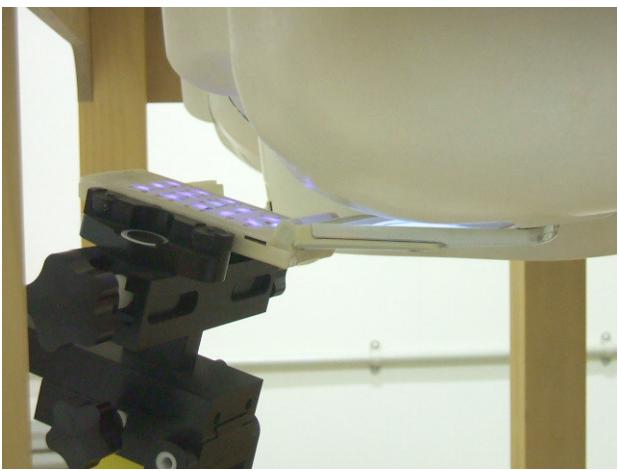
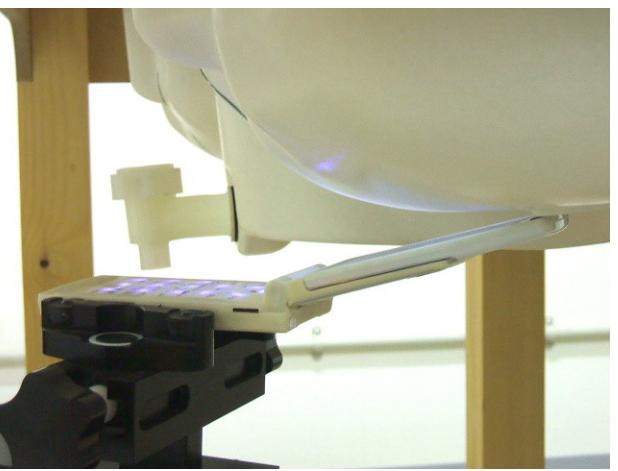
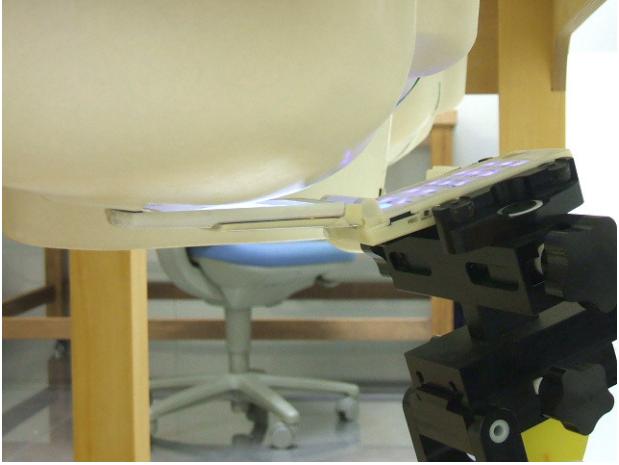
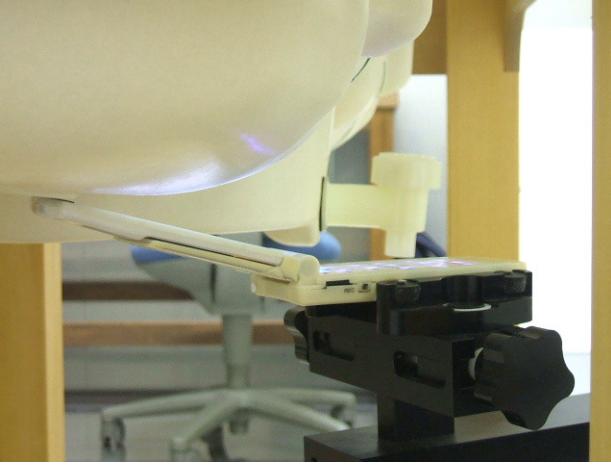
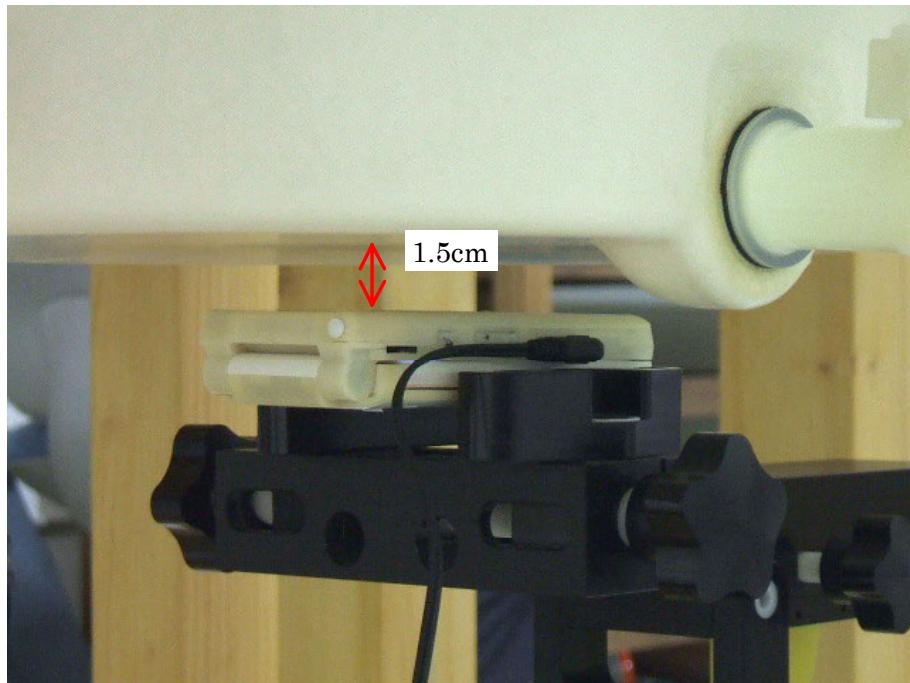


A.3 SAR Measurement Data**A.3.1 Left Side**

										
Cheek/Touch Position		Ear/Tilt Position								
GSM 1900 (Duty Cycle: 12.0 %, Crest Factor: 8.3)		Date : May 14, 2007								
EUT Set-up Configuration		Frequency	Power [dBm] (Peak)							
EUT Position	Antenna	Channel	MHz	Start	End	Limit [mW/g]	SAR (1g) [mW/g]	Tissue Temp. [°C]		
Cheek/Touch	Fixed	0512	1850.20	30.36	30.31	1.6	0.163	23.0		
		0661	1880.00	30.25	30.19		0.122	23.0		
		0810	1909.80	30.38	30.34		0.139	23.0		
Ear/Tilt	Fixed	0512	1850.20	--	--	1.6	**	--		
		0661	1880.00	30.25	30.21		0.0364	23.0		
		0810	1909.80	--	--		**	--		
NOTES :										
1. Depth of Liquid : 15.0 cm										
2. Transmitter power was measured at the antenna-conducted terminal.										
3. The SAR result marked at ** is optional, because the SAR measured at the middle channel for that configuration is at least 3.0 dB lower than the SAR limit.										
4. Please refer to attachment for the result presentation in plot format.										

A.3.2 Right Side

										
Cheek/Touch Position		Ear/Tilt Position								
GSM 1900 (Duty Cycle: 12.0 %, Crest Factor: 8.3)		Date : May 14, 2007								
EUT Set-up Configuration		Frequency	Power [dBm] (Peak)							
EUT Position	Antenna	Channel	MHz	Start	End	Limit [mW/g]	SAR (1g) [mW/g]	Tissue Temp. [°C]		
Cheek/Touch	Fixed	0512	1850.20	--	--	1.6	**	--		
		0661	1880.00	30.25	30.20		0.0955	23.0		
		0810	1909.80	--	--		**	--		
Ear/Tilt	Fixed	0512	1850.20	--	--	1.6	**	--		
		0661	1880.00	30.25	30.20		0.0505	23.0		
		0810	1909.80	--	--		**	--		
NOTES :										
1. Depth of Liquid : 15.0 cm										
2. Transmitter power was measured at the antenna-conducted terminal.										
3. The SAR result marked at ** is optional, because the SAR measured at the middle channel for that configuration is at least 3.0 dB lower than the SAR limit.										
4. Please refer to attachment for the result presentation in plot format.										

A.3.3 Body-worn Position

GSM 1900 (Duty Cycle: 12.0 %, Crest Factor: 8.3)

Date : May 15, 2007

EUT Set-up Configuration		Frequency		Power [dBm] (Peak)		Limit [mW/g]	SAR (1g) [mW/g]	Tissue Temp. [°C]
Separation	Antenna	Channel	MHz	Start	End			
1.5 cm	Fixed	0512	1850.20	30.36	30.32	1.6	0.150	23.0
		0661	1880.00	30.25	30.21		0.126	23.0
		0810	1909.80	30.38	30.33		0.123	23.0

GSM 1900 GSM+GPRS (Duty Cycle: 12.0 %, Crest Factor: 8.3)

1.5 cm	Fixed	0512	1850.20	30.31	30.27	1.6	0.148	23.0
		0661	1880.00	30.21	30.17		0.118	23.0
		0810	1909.80	30.35	30.32		0.122	23.0

NOTES :

1. Depth of Liquid : 15.0 cm
2. Transmitter power was measured at the antenna-conducted terminal.
3. The earphone wire connected to the EUT to simulate hand-free operation in a body-worn configuration.
4. Please refer to attachment for the result presentation in plot format.