

MEASUREMENT REPORT

of

Wireless Pocket PC

Applicant : FUJITSU LIMITED
EUT : POCKET PC
Model No. : POCKET LOOX 610
FCC ID : EJE-PLWB001
Report No. : A5415886

Tested by :

Training Research Co., Ltd.

TEL : 886-2-26935155 FAX : 886-2-26934440

No. 255, Nanyang Street, Shijr, Taipei Hsien 221, Taiwan, R.O.C.

CERTIFICATION


We here by verify that:

The test data, data evaluation, test procedures and equipment configurations shown in this report were made mainly in accordance with the procedures given in ANSI C63.4 (1992) as a reference. All test were conducted by **Training Research Co., Ltd.**, 255 Nanyang Street, Shijr, Taipei Hsien 221, Taiwan, R.O.C. Also, we attest to the accuracy of each.

We further submit that the energy emitted by the sample EUT tested as described in the report is **in compliance with** the technical requirements set forth in the FCC Rules Part 15 Subpart B (Declaration of Conformity) and C Section 15.247.

Applicant : FUJITSU LIMITED
Applicant address : 1405 Ohmaru, Inagi-shi, Tokyo 206-8503, Japan
Product Name : FPC2303xxxx
Model Name : POCKET LOOX 610
FCC ID : EJE-PLWB001
Report No. : A5415886
Test Date : August 13, 2003

Prepared by:

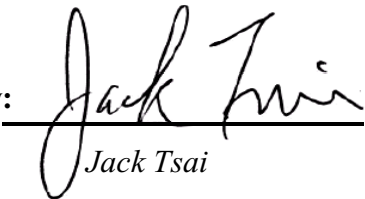
Jack Tsai

Approved by:


Frank Tsai**Conditions of issue :**

- (1) ***This test report shall not be reproduced except in full, without written approval of TRC. And the test result contained within this report only relate to the sample submitted for testing.***
- (2) ***This report must not be used by the client to claim product endorsement by NVLAP or any agency of U.S. Government.***

★ **NVLAP LAB CODE: 200174-0**

Federal Communications Commission

Declaration of Conformity (DoC)

For the Following Equipment:

Product name : FPC2303xxxx
Model name : POCKET LOOX 610
Trade name : Fujitsu-Siemens

Is herewith confirmed and found to comply with the requirements of CFR 47 part15 Subpart B - Unintentional Radiators regulation. The results of electromagnetic mission evaluation are shown in the report number : A5415886

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:

- (1) This device may not cause harmful interference, and
- (2) This device must accept any interference received,
including interference that may cause undesired operation

<i>Manufacturer</i>	<i>USA local representative</i>
Company name: ASUSTeK Computer Inc.	To be determined
Computer address: 4/F, 150, Li-Te Rd., Peitou, Taipei, Taiwan	
ZIP / Postal code 112	
Contact person: Lawrence Yu	
Title: Manager	
Internet e-mail address: Lawrence_yu@asus.com.tw	
Tel / Fax: 886-2-28943447 / 886-2-28950113	

Tables of Contents

I. GENERAL	6
1.1 Introduction	6
1.2 Description of EUT	6
1.3 Test method	6
1.4 Description of Support Equipment	7
1.5 Configuration of System Under Test	9
1.6 Verify the Frequency and Channel	11
1.7 Test Procedure	12
1.8 Location of the Test Site	12
1.9 General Test Condition	12
II. Section 15.101(a) : Equipment Authorization of Unintentional Radiators	13
III. Section 15.203 : Antenna Requirement	14
IV. Section 15.207 : Power Line Conducted Emissions for AC Powered Units	15
4.1 Test Condition & Setup	15
4.2 List of Test Instruments	15
4.3 Test Result of Conducted Emissions	16
Channel 01	16
Channel 06	17
Channel 11	18
Standby	19
V. Section 15.247(a) : Technical Description of the EUT	20

VI. Section 15.247(a)(2) : Bandwidth for Direct Sequence System	21
6.1 Test Condition & Setup	21
6.2 Test Instruments Configuration	21
6.3 List of Test Instruments	21
6.4 Test Result of Bandwidth	22
Channel 01	23
Channel 06	24
Channel 11	25
VII. Section 15.247(b) : Power Output	26
7.1 Test Condition & Setup	26
7.2 List of Test Instruments	26
7.3 Test Result	26
VIII. Section 15.247(c) : Spurious Emissions (Radiated)	27
8.1 Test Condition & Setup	27
8.2 List of Test Instruments	28
8.3 Test Result of Spurious Radiated Emissions	29
Below 1GHz	29
Above 1GHz, Channel 01	30
Above 1GHz, Channel 06	31
Above 1GHz, Channel 11	32
8.4 Test Result of Bandedge	33
Channel 01	34
Channel 11	35
IX. Section 15.247(d) : Power Spectral Density	36
9.1 Test Condition & Setup	36
9.2 Test Instruments Configuration	36
9.3 List of Test Instruments	36
9.4 Test Result of Power Spectral Density	37
Channel 01	38
Channel 06	39
Channel 11	40

I . GENERAL

1.1 Introduction

The following measurement report is submitted on behalf of applicant in support that the certification in accordance with Part 2 Subpart J and Part 15 Subpart A, B and C of the Commission's Rules and Regulations.

1.2 Description of EUT

FCC ID	:	EJE-PLWB001
Product Name	:	FPC2303xxxx
Model Name	:	POCKET LOOX 610
Frequency Range	:	2412MHz to 2462MHz
Support Channel	:	11 Channels
Channel Spacing	:	5 MHz
Modulation Skill	:	DBPSK / DQPSK / CCK
Power Type	:	(1) Battery-powered by the client's device, or (2) Power adapter Mfg.: PEI Model: AD3110 I/P: 100-240VAC, 50-60Hz, 0.36-0.2A ; O/P: 5VDC, 2.4A Power cable: (between AC source and adapter) 175cm length, non-shielded, no ferrite core Power cable: (between adapter and cradle) 150cm length, non-shielded, no ferrite core
Data Cable	:	USB cable: 124cm length, shielded, no ferrite core RS232 cable: 121cm length, shielded, no ferrite core

1.3 Test method

PDA with Cradle:

- (1) The POWER jack of cradle is connected with the AC power source via a power adaptor.
- (2) The USB/RS232 jack of cradle is connected with the USB/RS232 cable unterminal.
- (3) Put the PDA into the cradle.
- (4) The headphone jack of PDA is connected with the earphone.

PDA without Cradle:

- (5) The POWER jack of PDA body is connected with the AC power source via a power adaptor.
- (6) The USB/RS232 jack of PDA body is connected with the USB/RS232 cable unterminal.
- (7) The headphone jack of PDA body is connected with the earphone.

- (8) Using PC and software provided by the applicant to linking EUT. The software is operated under the Windows to linking the EUT in the unintentional test.
- (9) Set different channel being tested and repeat the procedures above.
 - (a) Radiated for intentional test: making EUT to the mode of continuous TX or RX
 - (b) Conducted and radiated for unintentional test: making EUT to the linking mode with another PDA.

1.4 Description of Support Equipment

In order to construct the minimum testing, following equipment were used as the support units.

PC : IBM 6840
 Model No. : 6840MJV
 Serial No. : 96CC 0C1
 FCC ID : N/A, DoC (Declaration of Confirmation) Approved
 檢磁 : 3892I279
 Power type : 100 ~ 127/ 200 ~ 240VAC, 4A/2A 50/60 Hz, Switching
 Power cord : Non-shielded, 182cm length, Plastic hood, No ferrite core

Monitor : HP 15' Color Monitor
 Model No. : D2827A
 Serial No. : KR91161719
 FCC ID : C5F7NFCMC1518X
 檢磁 : 3872B039
 Power type : 110 ~ 240 VAC / 50 ~ 60 Hz, Switching
 Power cord : Shielded, 1.83m long, No ferrite core
 Data cable : Shielded, 1.46m long, with two ferrite cores

Keyboard : HP
 Model No. : 5181
 Serial No. : BE21700405
 FCC ID : Doc Approved
 檢磁 : 3892C981
 Power type : By PC
 Data cable : Shielded, 1.70m length, with ferrite core

Mouse : HP
 Model No. : M-UR89
 Serial No. : LZS21750238
 FCC ID : Doc Approved
 檢磁 : 3892D767
 Power type : By PC
 Power cord : Shielded, 1.80m length, No ferrite core

USB

Gamepad : **Rockfire**
Model No. : QF-337uv
Serial No. : 10600545, KR91379759
FCC ID : None (CE approval)
檢磁 : 3862A574
Power type : By computer
Data Cable : Shielded, 1.81m long, Plastic, with ferrite core


Fax/Modem : **Aceex**
Model No. : DM-1414
Serial No. : 9010582
FCC ID : IFAXDM1414
Power type : 110 VAC / 50 ~ 60 Hz, Switching
Power Cord : Non-shielded, 1.90m long, Plastic hoods, and no ferrite bead
Data Cable : RS-232→Shielded, 1.30m long, Metal hoods , No bead
RJ-11Cx2→Non-shielded, 7' long, Plastic hoods, No bead

Printer : **HP**
Model No. : C6464A
Serial No. : TH16LEB5PK
FCC ID : N/A, DoC Approved
檢磁 : 3892H381
Power type : Switching adaptor
Power cord : Non-shielded, 173cm long, No ferrite core
(between adaptor and AC source)
Non-shielded, 180cm long, with ferrite core
(between printer and adaptor)
Data cable : Shielded, 1.70m long, No ferrite core

Earphone : **God Information Technology Co., Ltd.**
Model No. : MIC-A01
Serial No. : GIT-2001A001
FCC ID : None (CE approval)
Power type : By PDA
Data Cable : Non-Shielded, 1.18m length, no ferrite core

1.5 Configuration of System Under Test

(Conducted and Radiated of Unintentional, with Cradle)

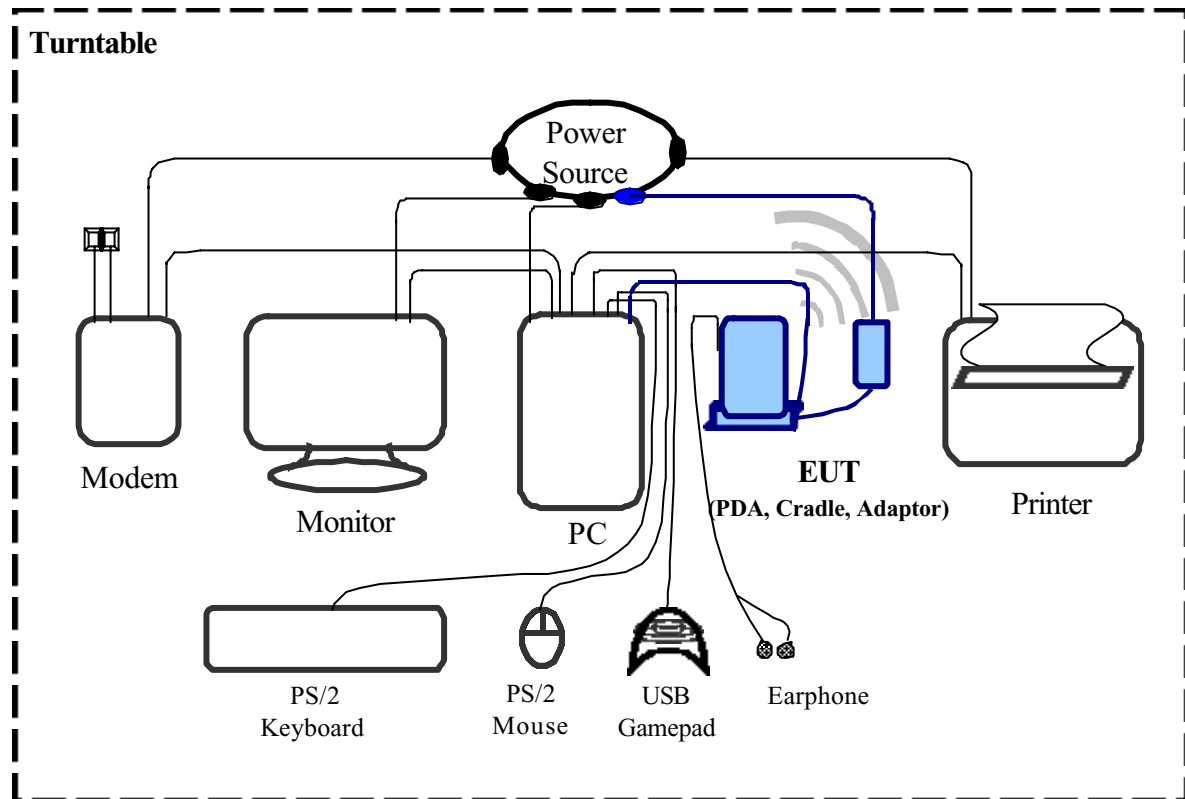

Connections of Equipment

PC:

- *VGA Port --- a monitor
- *Serial A-Port --- an external modem
- *Parallel Port --- a printer
- *PS/2 Ports --- a PS/2 keyboard and PS/2 mouse
- *USB A-Port --- a USB gamepad
- *USB B-Port --- EUT or *Serial B-Port --- EUT

EUT:

USB Cradle

- *USB Cable x 1 --- 124cm length, shielded, no ferrite core

RS232 Cradle

- *RS232 Cable x 1 --- 121cm length, shielded, no ferrite core


Switching Adaptor

- *Power Cable (between AC source and adaptor) x 1 --- 175cm length, non-shielded, no ferrite core
- *Power Cable (between adaptor and cradle) x 1 --- 150cm length, non-shielded, no ferrite core

Earphone:

- *Data cable x 1 --- 118cm length, non-shielded, no ferrite core

(Conducted and Radiated of Unintentional, without Cradle)

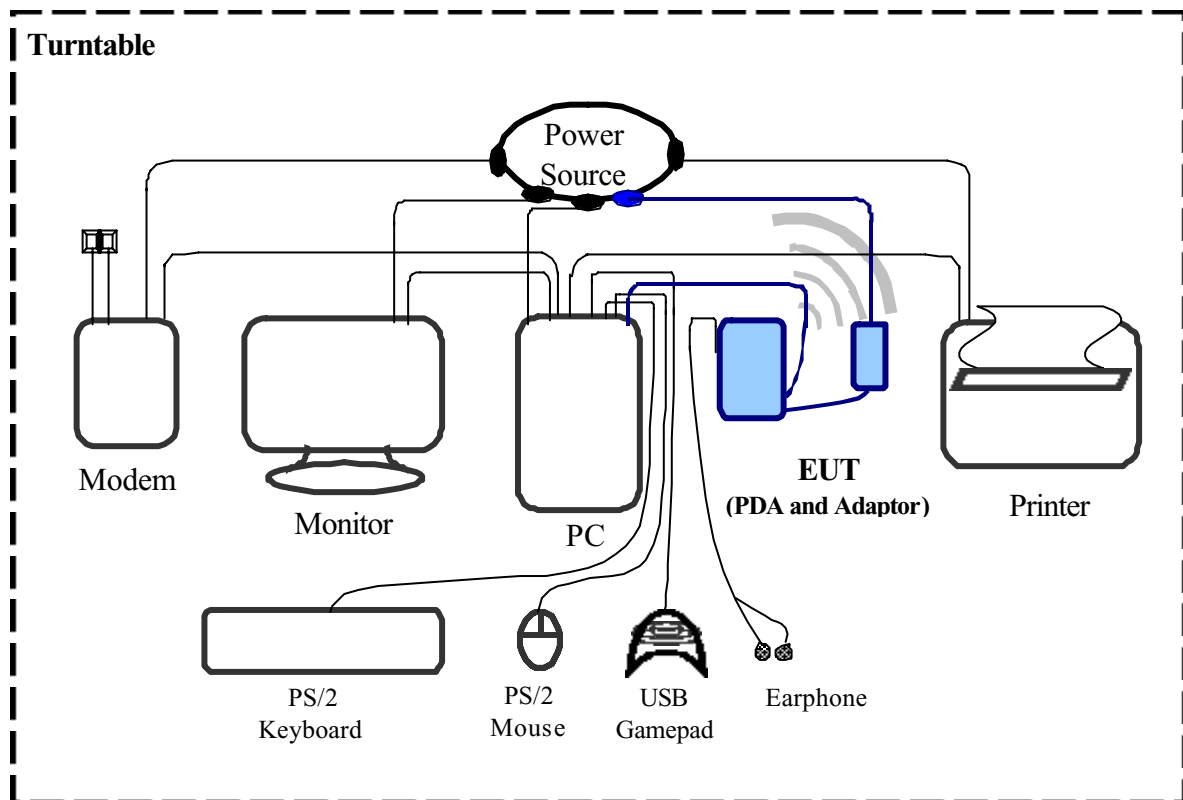

Connections of Equipment

PC:

- *VGA Port --- a monitor
- *Serial A-Port --- an external modem
- *Parallel Port --- a printer
- *PS/2 Ports --- a PS/2 keyboard and PS/2 mouse
- *USB A-Port --- a USB gamepad
- *USB B-Port --- **EUT** or *Serial B-Port --- **EUT**

EUT:

USB Cradle

- *USB Cable x 1 --- 124cm length, shielded, no ferrite core

RS232 Cradle

- *RS232 Cable x 1 --- 121cm length, shielded, no ferrite core


Switching Adaptor

- *Power Cable (between AC source and adaptor) x 1 --- 175cm length, non-shielded, no ferrite core
- *Power Cable (between adaptor and cradle) x 1 --- 150cm length, non-shielded, no ferrite core

Earphone:

- *Data cable x 1 --- 118cm length, non-shielded, no ferrite core

(Radiated of Intentional)

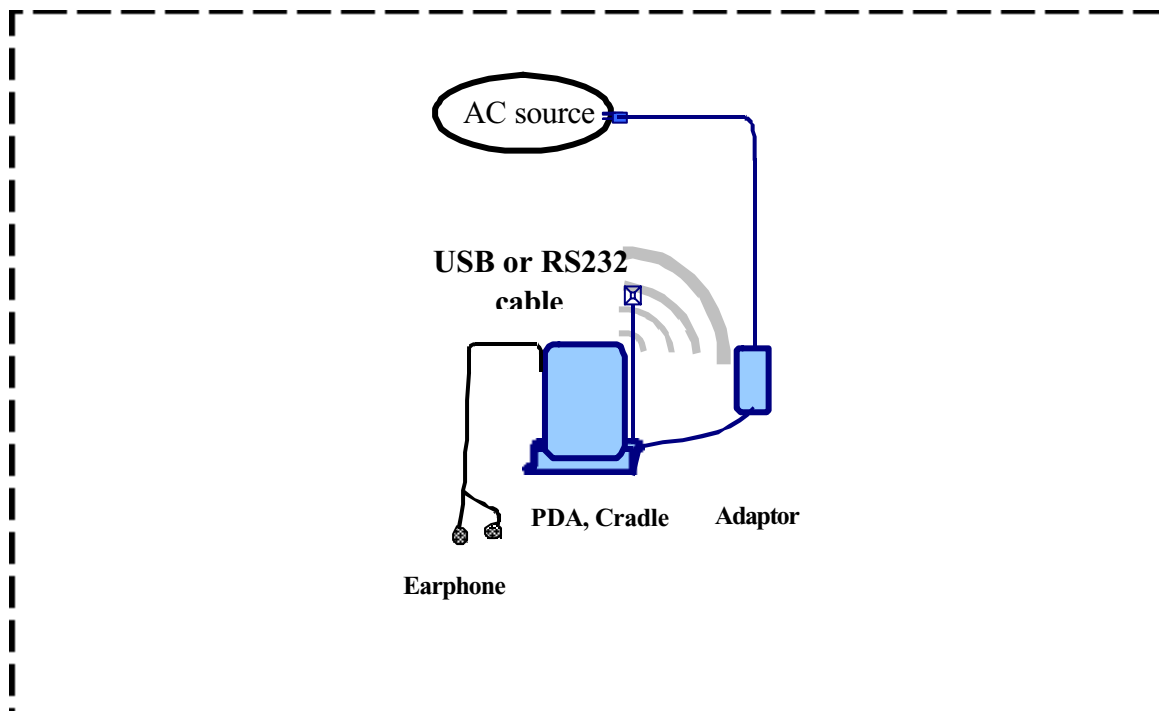

1.6 Verify the Frequency and Channel

Channel	Frequency (GHz)
1	2.412
2	2.417
3	2.422
4	2.427
5	2.432
6	2.437
7	2.442
8	2.447
9	2.452
10	2.457
11	2.462

Note:

1. This is for confirming that all frequencies are in 2.412GHz to 2.462GHz.
2. Section 15.31(m): Measurements on intentional radiators or receivers shall be performed at three frequencies for operating frequency range over 10 MHz.
(The locations of these frequencies one near the top, one near the middle and one near the bottom.)
3. After test, the EUT operating frequencies are in 2.412GHz to 2.462GHz. So all the items as followed in testing report are need to test these three frequencies:
Top: Channel – 1; Middle: Channel – 6; Bottom: Channel – 11.

1.7 Test Procedure

All measurements contained in this report were performed mainly according to the techniques described in ANSI C63.4 (1992) and the pre-setup was written on 1.3 test method, the detail setup was written on each test item.

1.8 Location of the Test Site

The radiated emissions measurements required by the rules were performed on the **three-meter, Anechoic Chamber (Registration Number: 93906)** maintained by *Training Research Co., Ltd.* 1F, No. 255 Nanyang Street, Shijr, Taipei Hsien 221, Taiwan, R.O.C. Complete description and measurement data have been placed on file with the commission. The conducted power line emissions tests and other test items were performed in a anechoic chamber also located at Training Research Co., Ltd.

No. 255 Nanyang Street, Shijr, Taipei Hsien 221, Taiwan, R.O.C. *Training Research Co., Ltd.* is listed by the FCC as a facility available to do measurement work for others on a contract basis.

1.9 General Test Condition

The conditions under which the EUT operates were varied to determine their effect on the equipment's emission characteristics. The final configuration of the test system and the mode of operation used during these tests were chosen as that which produced the highest emission levels. However, only those conditions, which the EUT was considered likely to encounter in normal use were investigated.

In test, they were set in high power and continuously transmitting mode that controlled by computer. The ch01, ch06 and ch11 of EUT were all tested. The setting up procedure is recorded on 1.3 test method.

II. Section 15.101(a): Equipment authorization of unintentional radiators

The EUT equipped with a USB / RS232 interface and should be operated with the computer. It was categorized to *Class B personal computers and peripherals* as cannot be operated stand-alone. The authorization requires **Declaration of Conformity (DoC)** and the items required such as Sect.15.107 (Conducted limits) and Sect.15.109 (Radiated emission limits) is same as Sect.15.207 and 15.247(C).

III. Section 15.203: Antenna requirement

The EUT can be equipped with detachable antenna. The detachable external antenna is affixed to the EUT using a unique connector, which allows for replacement of a broken antenna, but does not use a standard antenna jack or electrical connector.

The custom antenna specification of list as below:

Manufacturer	:	INPAQ TECHNOLOGY CO., LTD.
Part No	:	DAMK1B000000000
Connector Type	:	DAM
Antenna Type	:	Dipole Antenna
Antenna Gain	:	3.27dBi (Max.)

IV. Section 15.207: Power Line Conducted Emissions for AC Powered Units

4.1 Test Condition & Setup

The power line conducted emission measurements were performed in an anechoic chamber. The EUT was assembled on a wooden table, which is 80 centimeters high, was placed 40 centimeters from the backwall and at least 1 meter from the sidewall.

Power was fed to the EUT from the public utility power grid through a line filter and Line Impedance Stabilization Networks (LISNs). The LISN housing, measuring instrumentation case, ground plane, etc., were electrically bonded together at the same RF potential. The Spectrum analyzer (or EMI receiver) was connected to the AC line through an isolation transformer. The 50-ohm output of the LISN was connected to the spectrum analyzer directly. Conducted emission levels were in the CISPER quasi-peak and average detection mode. The analyzer's 6 dB bandwidth was set to 9 KHz. No post-detector video filter was used.

The spectrum was scanned from 150 KHz to 30 MHz. The physical arrangement of the test system and associated cabling was varied (within the scope of arrangements likely to be encountered in actual use) to determine the effect on the unit's emanations in amplitude and frequency. All spurious emission frequencies were observed. The highest emission amplitudes relative to the appropriate limit were measured and have been recorded in paragraph 2.4.

There is a test condition apply in this test item, the test procedure description as <1.3>. Three channels were tested, one in the top (CH01), one in the middle (CH06) and the other in bottom (CH11).

4.2 List of Test Instruments

<u>Instrument Name</u>	<u>Model No.</u>	<u>Brand</u>	<u>Serial No.</u>	<u>Calibration Date</u>	
				<u>Last time</u>	<u>Next time</u>
EMI Receiver	8546A	HP	3520A00242	07/28/03	07/28/04
RF Filter Section	85460A	HP	3448A00217	07/28/03	07/28/04
LISN (EUT)	LISN-01	TRC	9912-03,04	07/21/03	07/21/04
LISN (Support E.)	LISN-01	TRC	9912-05	06/21/03	06/21/04
Auto Switch Box	ASB-01	TRC	9904-01	11/20/02	11/20/03
(< 30MHz)					

The level of confidence of 95%, the uncertainty of measurement of conducted emission is ± 2.02 dB.

4.3 Test Result of Power Line Conducted Emissions

EUT station transmit only

The following table shows a summary of the highest emissions of power line conducted emissions on the LIVE and NETURAL conductors of the EUT power cord. Show as follows.

Test Conditions: Temperature : 25 °C Humidity : 73 % RH

Table 1 EUT includes Cradle for USB interface, Standby mode

Power Connected Emissions					FCC Class B		
Conductor	Frequency (KHz)	Peak (dBμV)	QP (dBμV)	Average (dBμV)	QP-limit (dBμV)	AVG-limit (dBμV)	Margin (dB)
Line 1	205.000	47.11	---	---	64.43	54.43	-7.32
	355.000	39.97	---	---	60.14	50.14	-10.17
	409.000	37.26	---	---	58.60	48.60	-11.34
	767.000	25.85	---	---	56.00	46.00	-20.15
	1518.000	21.82	---	---	56.00	46.00	-24.18
	3477.000	22.80	---	---	56.00	46.00	-23.20
	4952.000	25.38	---	---	56.00	46.00	-20.62
	5680.000	25.20	---	---	60.00	50.00	-24.80
	6870.000	31.07	---	---	60.00	50.00	-18.93
	8970.000	31.10	---	---	60.00	50.00	-18.90
Line 2	206.000	46.66	---	---	64.40	54.40	-7.74
	355.000	39.46	---	---	60.14	50.14	-10.68
	456.000	35.43	---	---	57.26	47.26	-11.83
	1166.000	25.00	---	---	56.00	46.00	-21.00
	1550.000	24.17	---	---	56.00	46.00	-21.83
	3477.000	29.47	---	---	56.00	46.00	-16.53
	7080.000	36.63	---	---	60.00	50.00	-13.37
	8870.000	35.22	---	---	60.00	50.00	-14.78

NOTE:

- (1)Margin = Peak Amplitude – Limit, *The reading amplitudes are all under limit.*
- (2)A "+" sign in the margin column means the emission is OVER the Class B Limit and "-" sign of means UNDER the Class B limit

Table 2 EUT includes Cradle for RS232 interface, Standby mode

Power Connected Emissions					FCC Class B		
Conductor	Frequency (KHz)	Peak (dBμV)	QP (dBμV)	Average (dBμV)	QP-limit (dBμV)	AVG-limit (dBμV)	Margin (dB)
Line 1	203.000	46.15	---	---	64.49	54.49	-8.34
	355.000	40.26	---	---	60.14	50.14	-9.88
	452.000	34.73	---	---	57.37	47.37	-12.64
	724.000	24.10	---	---	56.00	46.00	-21.90
	1818.000	23.82	---	---	56.00	46.00	-22.18
	3253.000	23.87	---	---	56.00	46.00	-22.13
	7190.000	35.94	---	---	60.00	50.00	-14.06
	8270.000	34.40	---	---	60.00	50.00	-15.60
	8690.000	34.47	---	---	60.00	50.00	-15.53
Line 2	201.000	47.01	---	---	64.54	54.54	-7.53
	370.000	39.53	---	---	59.71	49.71	-10.18
	738.000	24.10	---	---	56.00	46.00	-21.90
	1113.000	25.66	---	---	56.00	46.00	-20.34
	1464.000	24.44	---	---	56.00	46.00	-21.56
	3317.000	31.60	---	---	56.00	46.00	-14.40
	7190.000	37.15	---	---	60.00	50.00	-12.85
	8190.000	34.59	---	---	60.00	50.00	-15.41
	10090.000	28.60	---	---	60.00	50.00	-21.40

Table 3 EUT includes Cradle for USB interface, RX

Power Connected Emissions					FCC Class B		
Conductor	Frequency (KHz)	Peak (dBμV)	QP (dBμV)	Average (dBμV)	QP-limit (dBμV)	AVG-limit (dBμV)	Margin (dB)
Line 1	203.000	46.31	---	---	64.49	54.49	-8.18
	355.000	40.07	---	---	60.14	50.14	-10.07
	456.000	35.73	---	---	57.26	47.26	-11.53
	509.000	33.86	---	---	56.00	46.00	-12.14
	731.000	24.98	---	---	56.00	46.00	-21.02
	1801.000	19.66	---	---	56.00	46.00	-26.34
	3349.000	23.92	---	---	56.00	46.00	-22.08
	6980.000	32.89	---	---	60.00	50.00	-17.11
	8690.000	33.93	---	---	60.00	50.00	-16.07
Line 2	205.000	46.75	---	---	64.43	54.43	-7.68
	380.000	39.46	---	---	59.43	49.43	-9.97
	461.000	34.23	---	---	57.11	47.11	-12.88
	681.000	26.08	---	---	56.00	46.00	-19.92
	1070.000	26.33	---	---	56.00	46.00	-19.67
	3158.000	30.86	---	---	56.00	46.00	-15.14
	6770.000	33.12	---	---	60.00	50.00	-16.88
	7390.000	37.78	---	---	60.00	50.00	-12.22
	8560.000	36.84	---	---	60.00	50.00	-13.16

Table 4 EUT includes Cradle for RS232 interface, RX

Power Connected Emissions					FCC Class B		
Conductor	Frequency (KHz)	Peak (dBμV)	QP (dBμV)	Average (dBμV)	QP-limit (dBμV)	AVG-limit (dBμV)	Margin (dB)
Line 1	203.000	48.41	---	---	64.49	54.49	-6.08
	377.000	38.78	---	---	59.51	49.51	-10.73
	456.000	35.29	---	---	57.26	47.26	-11.97
	581.000	29.33	---	---	56.00	46.00	-16.67
	3702.000	24.84	---	---	56.00	46.00	-21.16
	5770.000	27.40	---	---	60.00	50.00	-22.60
	7260.000	34.28	---	---	60.00	50.00	-15.72
	8390.000	34.75	---	---	60.00	50.00	-15.25
Line 2	203.000	47.15	---	---	64.49	54.49	-7.34
	377.000	39.51	---	---	59.51	49.51	-10.00
	1166.000	27.97	---	---	56.00	46.00	-18.03
	1766.000	24.77	---	---	56.00	46.00	-21.23
	3349.000	32.94	---	---	56.00	46.00	-13.06
	3858.000	31.88	---	---	56.00	46.00	-14.12
	6870.000	35.73	---	---	60.00	50.00	-14.27
	7080.000	37.68	---	---	60.00	50.00	-12.32
	8270.000	33.95	---	---	60.00	50.00	-16.05

Table 5 EUT includes Cradle for USB interface, TX

Power Connected Emissions					FCC Class B		
Conductor	Frequency (KHz)	Peak (dBμV)	QP (dBμV)	Average (dBμV)	QP-limit (dBμV)	AVG-limit (dBμV)	Margin (dB)
Line 1	205.000	47.72	---	---	64.43	54.43	-6.71
	373.000	39.23	---	---	59.63	49.63	-10.40
	409.000	36.77	---	---	58.60	48.60	-11.83
	627.000	28.13	---	---	56.00	46.00	-17.87
	3638.000	23.75	---	---	56.00	46.00	-22.25
	5890.000	26.27	---	---	60.00	50.00	-23.73
	7150.000	33.67	---	---	60.00	50.00	-16.33
	8650.000	33.35	---	---	60.00	50.00	-16.65
Line 2	203.000	47.57	---	---	64.49	54.49	-6.92
	326.000	37.73	---	---	60.97	50.97	-13.24
	359.000	39.27	---	---	60.03	50.03	-10.76
	604.000	28.91	---	---	56.00	46.00	-17.09
	963.000	26.37	---	---	56.00	46.00	-19.63
	1295.000	24.36	---	---	56.00	46.00	-21.64
	3349.000	31.67	---	---	56.00	46.00	-14.33
	3638.000	32.30	---	---	56.00	46.00	-13.70
	7360.000	35.57	---	---	60.00	50.00	-14.43

Table 6 EUT includes Cradle for RS232 interface, TX

<i>Power Connected Emissions</i>					<i>FCC Class B</i>		
<i>Conductor</i>	<i>Frequency (KHz)</i>	<i>Peak (dBμV)</i>	<i>QP (dBμV)</i>	<i>Average (dBμV)</i>	<i>QP-limit (dBμV)</i>	<i>AVG-limit (dBμV)</i>	<i>Margin (dB)</i>
Line 1	203.000	45.98	---	---	64.49	54.49	-8.51
	377.000	38.62	---	---	59.51	49.51	-10.89
	456.000	36.15	---	---	57.26	47.26	-11.11
	674.000	26.61	---	---	56.00	46.00	-19.39
	1661.000	20.88	---	---	56.00	46.00	-25.12
	3574.000	25.20	---	---	56.00	46.00	-20.80
	5080.000	26.75	---	---	60.00	50.00	-23.25
	7290.000	34.21	---	---	60.00	50.00	-15.79
	8470.000	35.10	---	---	60.00	50.00	-14.90
Line 2	203.000	47.75	---	---	64.49	54.49	-6.74
	218.000	38.17	---	---	64.06	54.06	-15.89
	229.000	37.70	---	---	63.74	53.74	-16.04
	355.000	37.63	---	---	60.14	50.14	-12.51
	373.000	38.08	---	---	59.63	49.63	-11.55
	461.000	35.55	---	---	57.11	47.11	-11.56
	7080.000	36.12	---	---	60.00	50.00	-13.88
	7500.000	36.49	---	---	60.00	50.00	-13.51
	8780.000	36.15	---	---	60.00	50.00	-13.85

Table 7 EUT without Cradle for USB interface, RX

Power Connected Emissions					FCC Class B		
Conductor	Frequency (KHz)	Peak (dBμV)	QP (dBμV)	Average (dBμV)	QP-limit (dBμV)	AVG-limit (dBμV)	Margin (dB)
Line 1	203.000	47.57	---	---	64.49	54.49	-6.92
	377.000	39.04	---	---	59.51	49.51	-10.47
	456.000	35.40	---	---	57.26	47.26	-11.86
	695.000	27.03	---	---	56.00	46.00	-18.97
	1490.000	20.77	---	---	56.00	46.00	-25.23
	1906.000	21.33	---	---	56.00	46.00	-24.67
	3702.000	21.02	---	---	56.00	46.00	-24.98
	6870.000	32.06	---	---	60.00	50.00	-17.94
	7290.000	33.01	---	---	60.00	50.00	-16.99
	8470.000	34.23	---	---	60.00	50.00	-15.77
Line 2	206.000	45.61	---	---	64.40	54.40	-8.79
	377.000	40.71	---	---	59.51	49.51	-8.80
	452.000	35.75	---	---	57.37	47.37	-11.62
	509.000	32.67	---	---	56.00	46.00	-13.33
	703.000	26.37	---	---	56.00	46.00	-19.63
	1049.000	26.72	---	---	56.00	46.00	-19.28
	1385.000	26.44	---	---	56.00	46.00	-19.56
	3574.000	30.74	---	---	56.00	46.00	-15.26
	7190.000	36.68	---	---	60.00	50.00	-13.32
	8780.000	36.75	---	---	60.00	50.00	-13.25

Table 8 EUT without Cradle for RS232 interface, RX

<i>Power Connected Emissions</i>					<i>FCC Class B</i>		
<i>Conductor</i>	<i>Frequency (KHz)</i>	<i>Peak (dBμV)</i>	<i>QP (dBμV)</i>	<i>Average (dBμV)</i>	<i>QP-limit (dBμV)</i>	<i>AVG-limit (dBμV)</i>	<i>Margin (dB)</i>
Line 1	205.000	46.72	---	---	64.34	54.34	-7.62
	359.000	39.48	---	---	60.03	50.03	-10.55
	373.000	38.95	---	---	59.63	49.63	-10.68
	405.000	36.69	---	---	58.71	48.71	-12.02
	461.000	35.14	---	---	57.11	47.11	-11.97
	3574.000	24.98	---	---	56.00	46.00	-21.02
	7150.000	35.12	---	---	60.00	50.00	-14.88
	7290.000	35.98	---	---	60.00	50.00	-14.02
	8470.000	35.62	---	---	60.00	50.00	-14.38
Line 2	205.000	46.80	---	---	64.43	54.43	-7.63
	363.000	39.18	---	---	59.91	49.91	-10.73
	405.000	36.96	---	---	58.71	48.71	-11.75
	456.000	36.15	---	---	57.26	47.26	-11.11
	3702.000	34.30	---	---	56.00	46.00	-11.70
	6980.000	36.20	---	---	60.00	50.00	-13.80
	7570.000	35.59	---	---	60.00	50.00	-14.41
	8780.000	35.31	---	---	60.00	50.00	-14.69

Table 9 EUT without Cradle for USB interface, TX

Power Connected Emissions					FCC Class B		
Conductor	Frequency (KHz)	Peak (dBμV)	QP (dBμV)	Average (dBμV)	QP-limit (dBμV)	AVG-limit (dBμV)	Margin (dB)
Line 1	203.000	47.52	---	---	64.49	54.49	-6.97
	359.000	37.73	---	---	60.03	50.03	-12.30
	409.000	37.30	---	---	58.60	48.60	-11.30
	456.000	36.22	---	---	57.26	47.26	-11.04
	504.000	35.01	---	---	56.00	46.00	-10.99
	876.000	24.57	---	---	56.00	46.00	-21.43
	1477.000	22.81	---	---	56.00	46.00	-23.19
	2372.000	22.83	---	---	56.00	46.00	-23.17
	7150.000	33.45	---	---	60.00	50.00	-16.55
	8340.000	28.70	---	---	60.00	50.00	-21.30
Line 2	201.000	47.15	---	---	64.54	54.54	-7.39
	405.000	37.46	---	---	58.71	48.71	-11.25
	504.000	34.85	---	---	56.00	46.00	-11.15
	668.000	29.28	---	---	56.00	46.00	-16.72
	1359.000	26.96	---	---	56.00	46.00	-19.04
	3349.000	28.31	---	---	56.00	46.00	-17.69
	3702.000	29.45	---	---	56.00	46.00	-16.55
	6670.000	36.10	---	---	60.00	50.00	-13.90
	7770.000	32.94	---	---	60.00	50.00	-17.06
	8560.000	30.01	---	---	60.00	50.00	-19.99

Table 10 EUT without Cradle for RS232 interface, TX

<i>Power Connected Emissions</i>					<i>FCC Class B</i>		
<i>Conductor</i>	<i>Frequency (KHz)</i>	<i>Peak (dBμV)</i>	<i>QP (dBμV)</i>	<i>Average (dBμV)</i>	<i>QP-limit (dBμV)</i>	<i>AVG-limit (dBμV)</i>	<i>Margin (dB)</i>
Line 1	205.000	47.19	---	---	64.43	54.43	-7.24
	405.000	40.00	---	---	58.71	48.71	-8.71
	456.000	35.45	---	---	57.26	47.26	-11.81
	563.000	28.95	---	---	56.00	46.00	-17.05
	610.000	27.19	---	---	56.00	46.00	-18.81
	674.000	28.09	---	---	56.00	46.00	-17.91
	1385.000	24.18	---	---	56.00	46.00	-21.82
	3741.000	25.44	---	---	56.00	46.00	-20.56
	6670.000	31.98	---	---	60.00	50.00	-18.02
	7150.000	33.77	---	---	60.00	50.00	-16.23
Line 2	203.000	47.87	---	---	64.49	54.49	-6.62
	366.000	38.43	---	---	59.83	49.83	-11.40
	499.000	34.48	---	---	56.03	46.03	-11.55
	610.000	29.94	---	---	56.00	46.00	-16.06
	1006.000	25.90	---	---	56.00	46.00	-20.10
	1359.000	26.77	---	---	56.00	46.00	-19.23
	3349.000	29.07	---	---	56.00	46.00	-16.93
	3702.000	28.79	---	---	56.00	46.00	-17.21
	6670.000	33.93	---	---	60.00	50.00	-16.07
	7050.000	34.25	---	---	60.00	50.00	-15.75

V. Section 15.247 (a): Technical description of the EUT


Based on the Section 2.1, *Direct Sequence System* is a spread spectrum system in which the carrier has been modulated by a high speed spreading code and an information data stream. The high speed code sequence dominates the “modulating function” and is the direct cause of the wide spreading of the transmitted signal. In the operational description demonstrates the operation principles of the Baseband processor employed by the EUT, shows that which is a complete DSSS baseband processor and meets the definition of the Direct sequence spread spectrum system.

VI. Section 15.247(a)(2): Bandwidth for Direct Sequence System.

6.1 Test Condition & Setup

The transmitter bandwidth measurements were performed by the contact manner. The EUT was set to transmit continuously, also various channels were investigated to find the maximum occupied bandwidth. The output of the EUT was connected to the spectrum analyzer. The bandwidth of the fundamental frequency is observed by the spectrum analyzer with 100kHz RBW and 100kHz VBW.

6.2 Test Instruments Configuration

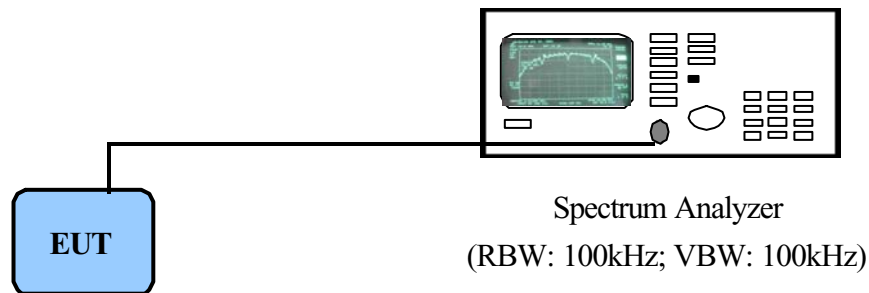

P.S.: Notebook computer to control the EUT at maximal power output and channel Number and set antenna kit

6.3 List of Test Instruments

Instrument Name	Model No.	Brand	Serial No.	Last time	Next time
Spectrum Analyzer	MS2665C	ANRITSU	6200175476	09/11/02	09/11/03

6.4 Test Result of Bandwidth

Bandwidth of Channel 1

Bandwidth (802.11b) : 11.16 MHz
The min. 6dB BW at least : 500 KHz

Bandwidth of Channel 6

Bandwidth (802.11b) : 12.16 MHz
The min. 6dB BW at least : 500 KHz


Bandwidth of Channel 11

Bandwidth (802.11b) : 12.26 MHz
The min. 6dB BW at least : 500 KHz


Note:

1. The data in the above table are summarizing the following attachment spectrum analyzer hard copy. According to the guidance, we'd made the measurement with the spectrum analyzer's resolution bandwidth (RBW)= $100kHz$ and set the $span \gg RBW$. The results show the measured 6dB bandwidth comply with the minimum 500kHz requirement.
2. The attachments show these on the following pages.


Bandwidth of Channel 1:

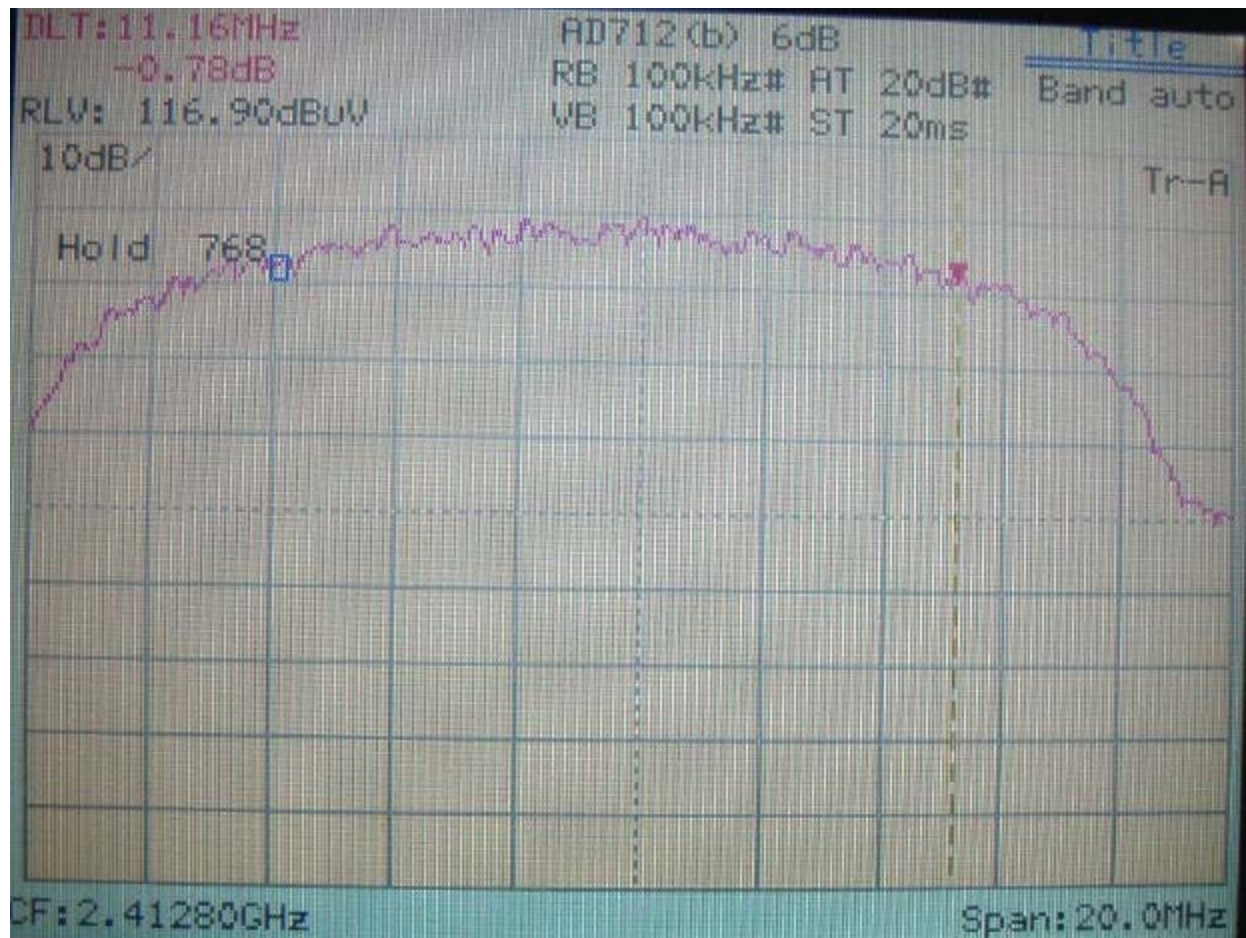

Bandwidth of Channel 6:

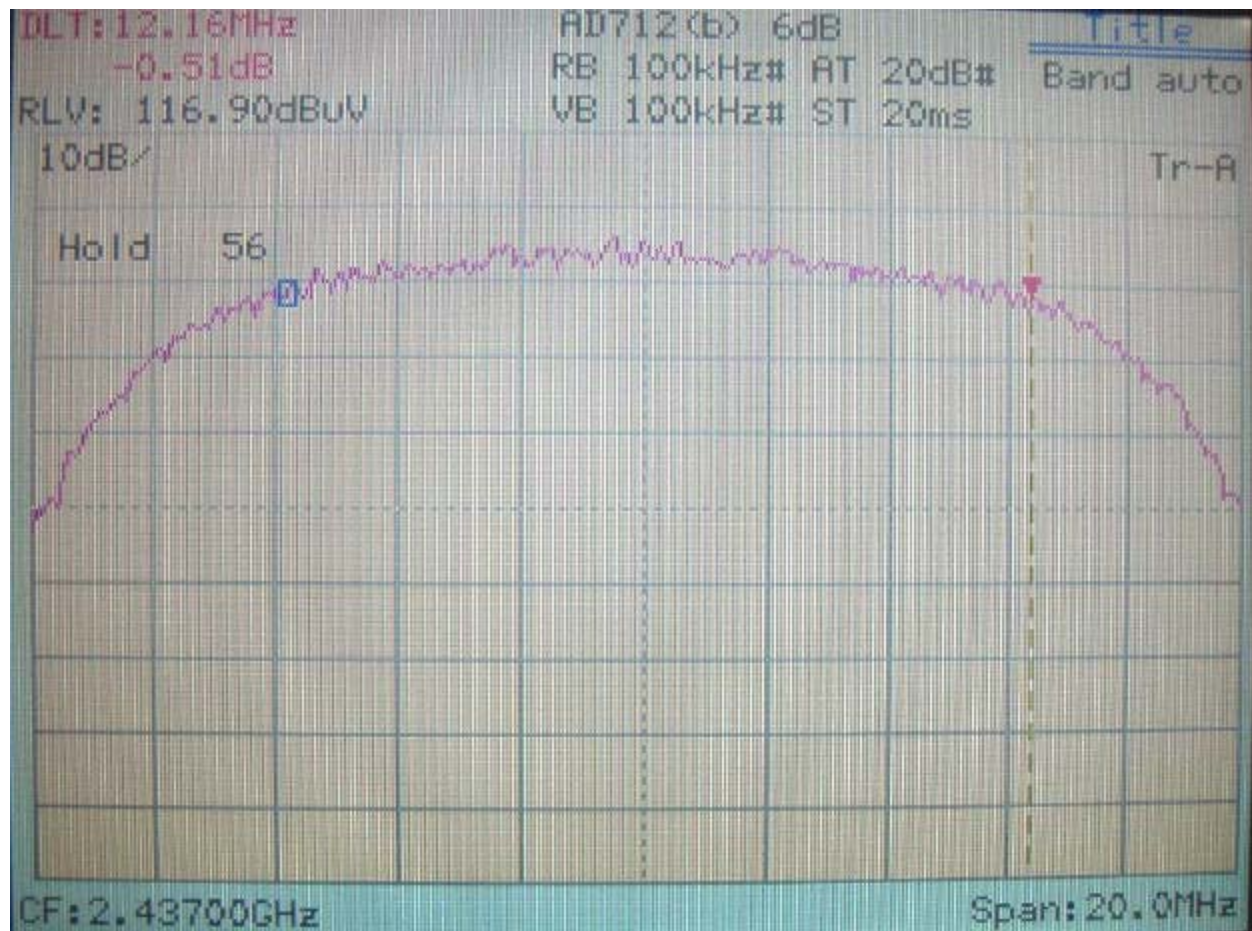


Bandwidth of Channel 11:

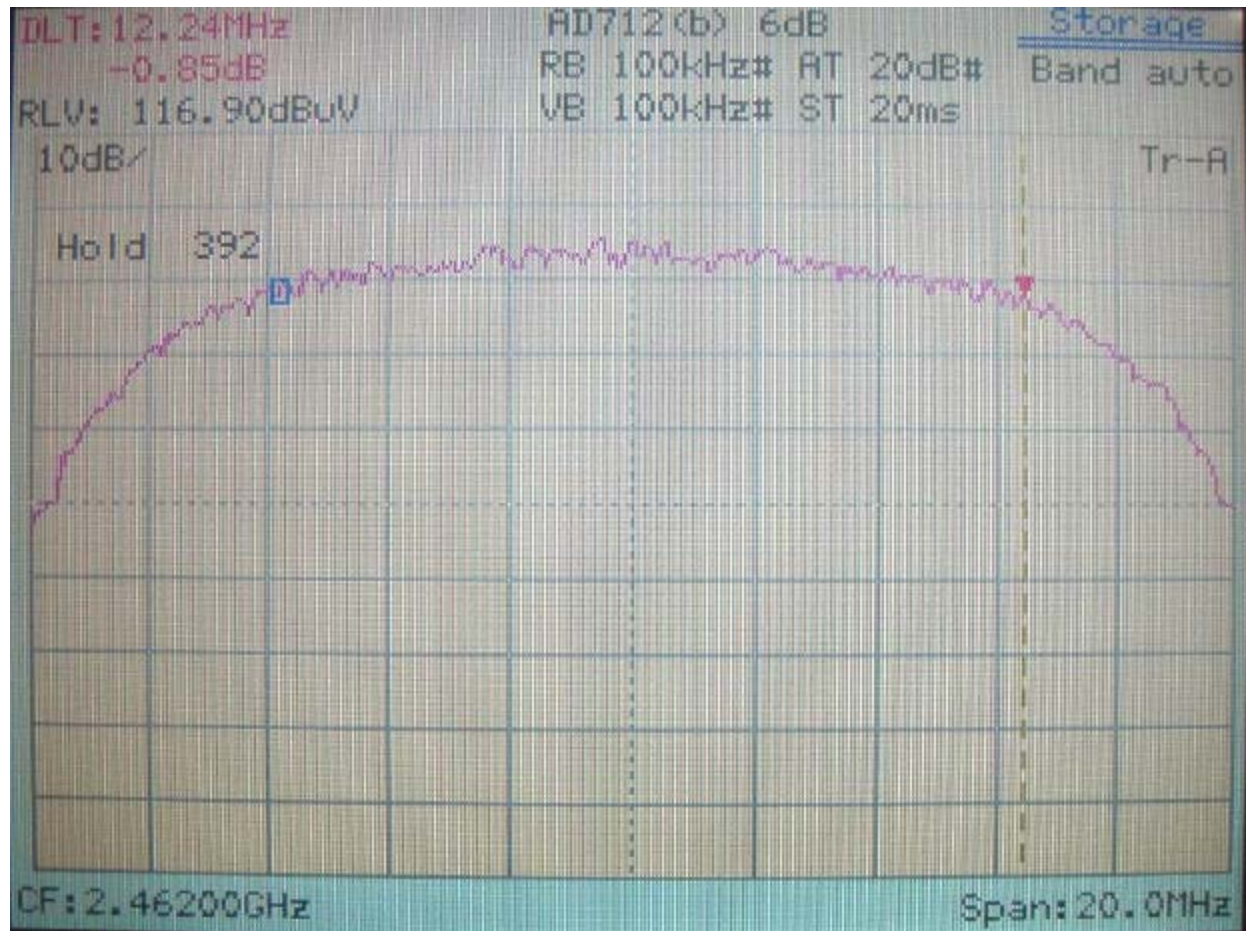

VII. Section 15.247(b): Power Output

7.1 Test Condition & Setup

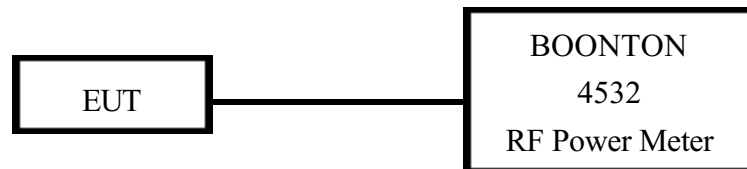

1. The output of the transmitter is connected to the BOONTON RF Power Meter.
2. The calibration is performed before every test. The values of the output power of the EUT will shown in the dBm directly are the transmitter output peak power. Recording as follows.

7.2 List of Test Instruments

Instrument Name	Model No.	Brand	Serial No.
RF Power Meter	4532	BOONTON	117501

7.3 Test Result

Formula:

Signal generator + |Cable loss| = Output peak power

Channel	Signal Generator	Cable Loss	Output peak power	
	dBm	dBm	dBm	mW
CH 1	11.53	0.70	12.23	16.711
CH 6	11.92	0.70	12.62	18.282
CH 11	11.38	0.70	12.08	16.144

VIII. Section 15.247 (C): Spurious Emissions (Radiated)

8.1 Test Condition & Setup

We'd performed the test by the *radiated emission skill*: The EUT was placed in an anechoic chamber, and set the EUT transmitting continuously and scanned at 3-meter distance to determine its emission characteristics. The physical arrangement of the EUT was varied (within the scope of arrangements likely to be encountered in actual use) to determine the effect on the unit's emanations in amplitude, directivity, and frequency. The exact system configuration, which produced the highest emissions was noted so it could be reproduced later during the final tests. For the measurement above 1GHz, according to the guidance we'd set the spectrum analyzer's 6dB bandwidth RBW to 1MHz.

This was done to ensure that the final measurements would demonstrate the worst-case interference potential of the EUT.

Final radiation measurements were made on a three-meter, anechoic chamber. The EUT system was placed on a nonconductive turntable, which is 0.8 meters height, top surface 1.0 x 1.5 meter.

The spectrum was examined from 30 MHz to 1000 MHz using an Hewlett Packard 8546A EMI Receiver, CHASE whole range Bi-log antenna (Model No.: CBL 6141A) is used to measure frequency from 30 MHz to 1GHz. The final test is used the HP 85460A spectrum and 8564E spectrum was examined from 1GHz to 25GHz using an Hewlett Packard Spectrum Analyzer, EMCO/CMT Horn Antenna (Model 3115 / RA42-K-F-4B-C) for 1G - 25GHz.

At each frequency, the EUT was rotated 360 degrees, and the antenna was raised and lowered from one to four meters to find the maximum emission levels. Measurements were taken using both horizontal and vertical antenna polarization.

Appropriate preamplifiers were used for improving sensitivity and precautions were taken to avoid overloading or desensitizing the spectrum analyzer. There are two spectrum analyzers use on this testing, HP 85460A for frequency 30MHz to 1000MHz, and 8564E for frequency 1GHz to 25GHz. No post-detector video filters were used in the test. The spectrum analyzer's 6dB bandwidth was set to 120KHz (spectrum was examined from 30 MHz to 1000 MHz), the spectrum analyzer's 6 dB bandwidth was set to 1 MHz (spectrum was examined from 1GHz to 25GHz) and the analyzer was operated in the maximum hold mode. There is a test condition applies in this test item, the test procedure description as the following:

Three channels were tested, one in the top (CH01), one in the middle (CH06) and the other in bottom (CH11). The setting up procedure is recorded on <1.3>

With the transmitter operating from a AC source and using the internal of EUT, radiates spurious emissions falling within the restricted bands of 15.209 were measured at operating frequencies corresponding to upper, middle and bottom channels in the 2400 ~ 2483.5 MHz band.

The actual field intensity in decibels referenced to 1 microvolt per meter (dBμV/m) is determined by algebraically adding the measured reading in dBμV, the antenna factor (dB), and cable loss (dB) at the appropriate frequency. Since the EUT was set to transmit continuously, no *duty cycle* is present.

For frequency between 30MHz to 1000MHz

$$F_{Ia} \text{ (dB}\mu\text{V/m)} = F_{Ir} \text{ (dB}\mu\text{V)} + \text{Correction Factors}$$

F_{Ia} : Actual Field Intensity

F_{Ir} : Reading of the Field Intensity

Correction Factors = Antenna Factor + Cable Loss – Amplifier Gain

For frequency between 1GHz to 25GHz

$$F_{Ia} \text{ (dB}\mu\text{V/m)} = F_{Ir} \text{ (dB}\mu\text{V)} + \text{Correction Factor}$$

F_{Ia} : Actual Field Intensity

F_{Ir} : Reading of the Field Intensity

Correction Factors = Antenna Factor + Cable Loss – Amplifier Gain

8.2 List of Test Instruments

Instrument Name	Model No.	Brand	Serial No.	Last time	Next time
EMI Receiver	8546A	HP	3520A00242	07/28/03	07/28/04
RF Filter Section	85460A	HP	3448A00217	07/28/03	07/28/04
Bi-log Antenna	CBL 6141A	CHASE	4206	05/27/03	05/27/04
Auto Switch Box	ASB-01	TRC	9904-01	11/20/02	11/20/03
(>30MHz)					
Spectrum Analyzer	8564E	HP	3720A00840	07/23/03	07/23/04
Microwave Preamplifier	84125C	HP	US36433002	07/30/03	07/30/04
Horn Antenna	3115	EMCO	9104-3668	12/24/02	12/24/03
Horn Antenna	RA42-K-F-4B-C	CMT	961505-003	02/01/03	02/01/04
Anechoic Chamber (cable calibrated together)				05/20/03	05/20/04

The level of confidence of 95% , the uncertainty of measurement of radiated emission is $\pm 3.44\text{dB}$.

8.3 Test Result of Spurious Radiated Emissions

EUT's transmit only

The highest peak values of radiated emissions from the EUT at various antenna heights, antenna polarizations, EUT orientation, etc. are recorded on the following.

Test Conditions: Temperature : 25 ° C Humidity : 73 % RH

30MHz to 1GHz, EUT for USB interface, Standby mode [Antenna polarity Horizontal]

Radiated Emission				Correction Factors (dB)	Corrected Amplitude (dBμV/m)	FCC Class B (3 m)	
Frequency (MHz)	Amplitude (dBμV)	Ant. H. (m)	Table (°)			Limit (dBμV/m)	Margin (dB)
73.65	28.00	1.00	68	1.67	29.67	40.00	-10.33
267.65	35.88	1.00	303	-2.94	32.94	46.00	-13.06
295.54	34.52	1.00	308	-2.40	32.12	46.00	-13.88
354.95	36.46	1.00	315	-1.18	35.28	46.00	-10.72
388.90	31.66	1.00	313	0.04	31.70	46.00	-14.30
500.45	27.73	1.00	263	4.58	32.31	46.00	-13.69

30MHz to 1GHz, EUT for USB interface, Standby mode [Antenna polarity Vertical]

Radiated Emission				Correction Factors (dB)	Corrected Amplitude (dBμV/m)	FCC Class B (3 m)	
Frequency (MHz)	Amplitude (dBμV)	Ant. H. (m)	Table (°)			Limit (dBμV/m)	Margin (dB)
32.27	26.84	1.00	251	6.68	33.52	40.00	-6.48
73.65	25.42	1.00	220	1.67	27.09	40.00	-12.91
97.90	28.62	1.00	146	-0.12	28.50	43.50	-15.00
182.77	30.57	1.00	64	-2.59	27.98	43.50	-15.52
283.41	31.46	1.00	298	-2.59	28.87	46.00	-17.13
399.81	31.89	1.00	218	0.43	32.32	46.00	-13.68

Note:

1. Margin = Amplitude – limit, if margin is minus means under limit.
2. Corrected Amplitude = Reading Amplitude + Correction Factors
3. Correction factor = Antenna factor + (Cable Loss – Amplitude gain)

30MHz to 1GHz, EUT for RS232 interface, Standby mode [Antenna polarity Horizontal]

Radiated Emission				Correction Factors	Corrected Amplitude	FCC Class B (3 m)	
Frequency (MHz)	Amplitude (dBμV)	Ant. H. (m)	Table (°)			Limit (dBμV/m)	Margin (dB)
188.84	33.62	1.00	38	-2.52	31.10	43.50	-12.40
194.90	35.59	1.00	51	-2.59	33.00	43.50	-10.50
267.65	34.20	1.00	234	-2.94	31.26	46.00	-14.74
295.54	32.50	1.00	314	-2.40	30.10	46.00	-15.90
351.31	35.20	1.00	312	-1.31	33.89	46.00	-12.11
401.02	30.24	1.00	318	0.49	30.73	46.00	-15.27

30MHz to 1GHz, EUT for RS232 interface, Standby mode [Antenna polarity Vertical]

Radiated Emission				Correction Factors	Corrected Amplitude	FCC Class B (3 m)	
Frequency (MHz)	Amplitude (dBμV)	Ant. H. (m)	Table (°)			Limit (dBμV/m)	Margin (dB)
120.94	29.29	1.00	15	-1.30	27.99	43.50	-15.51
194.90	33.77	1.00	86	-2.59	31.18	43.50	-12.32
267.65	29.86	1.00	296	-2.94	26.92	46.00	-19.08
313.72	29.48	1.00	146	-2.09	27.39	46.00	-18.61
399.81	30.38	1.00	322	0.43	30.81	46.00	-15.19
575.62	23.63	1.00	44	7.81	31.44	46.00	-14.56

30MHz to 1GHz, EUT includes cradle for USB interface, TX [Antenna polarity Horizontal]

Radiated Emission				Correction Factors	Corrected Amplitude	FCC Class B (3 m)	
Frequency (MHz)	Amplitude (dBμV)	Ant. H. (m)	Table (°)			Limit (dBμV/m)	Margin (dB)
73.65	30.47	1.00	94	1.67	32.14	40.00	-7.86
194.90	34.62	1.00	152	-2.59	32.03	43.50	-11.47
200.96	36.07	1.00	356	-2.68	33.39	43.50	-10.11
354.95	36.02	1.00	314	-1.18	34.84	46.00	-11.16
388.90	37.13	1.00	305	0.04	37.17	46.00	-8.83
500.45	29.44	1.00	314	4.58	34.02	46.00	-11.98

30MHz to 1GHz, EUT includes cradle for USB interface, TX [Antenna polarity Vertical]

Radiated Emission				Correction Factors	Corrected Amplitude	FCC Class B (3 m)	
Frequency (MHz)	Amplitude (dBμV)	Ant. H. (m)	Table (°)			Limit (dBμV/m)	Margin (dB)
37.27	40.00	1.00	155	-4.84	35.16	40.00	-4.84
97.90	43.50	1.00	48	-13.72	29.78	43.50	-13.72
251.89	45.00	1.00	269	-15.51	29.49	46.00	-16.51
301.60	46.00	1.00	300	-15.83	30.17	46.00	-15.83
399.81	46.00	1.00	215	-12.13	33.87	46.00	-12.13
548.95	46.00	1.00	295	-14.80	31.20	46.00	-14.80

30MHz to 1GHz, EUT includes cradle for RS232 interface, TX [Antenna polarity Horizontal]

Radiated Emission				Correction Factors (dB)	Corrected Amplitude (dBμV/m)	FCC Class B (3 m)	
Frequency (MHz)	Amplitude (dBμV)	Ant. H. (m)	Table (°)			Limit (dBμV/m)	Margin (dB)
196.11	34.31	1.00	357	-2.61	31.70	43.50	-11.80
202.17	35.89	1.00	91	-2.68	33.21	43.50	-10.29
285.84	35.25	1.00	234	-2.54	32.71	46.00	-13.29
301.60	37.27	1.00	323	-2.33	34.94	46.00	-11.06
390.11	35.30	1.00	330	0.08	35.38	46.00	-10.62
500.45	28.72	1.00	334	4.58	33.30	46.00	-12.70

30MHz to 1GHz, EUT includes cradle for RS232 interface, TX [Antenna polarity Vertical]

Radiated Emission				Correction Factors (dB)	Corrected Amplitude (dBμV/m)	FCC Class B (3 m)	
Frequency (MHz)	Amplitude (dBμV)	Ant. H. (m)	Table (°)			Limit (dBμV/m)	Margin (dB)
120.94	30.21	1.00	286	-1.30	28.91	43.50	-14.59
194.90	33.74	1.00	96	-2.59	31.15	43.50	-12.35
202.17	33.06	1.00	349	-2.68	30.38	43.50	-13.12
388.90	33.50	1.00	33	0.04	33.54	46.00	-12.46
401.02	30.84	1.00	325	0.49	31.33	46.00	-14.67
727.19	24.01	1.00	341	12.28	36.29	46.00	-9.71

30MHz to 1GHz, EUT without cradle for USB interface, TX [Antenna polarity Horizontal]

Radiated Emission				Correction Factors	Corrected Amplitude	FCC Class B (3 m)	
Frequency (MHz)	Amplitude (dBμV)	Ant. H. (m)	Table (°)			Limit (dBμV/m)	Margin (dB)
299.17	40.13	1.00	315	-2.37	37.76	46.00	-8.24
308.87	40.36	1.00	285	-2.18	38.18	46.00	-7.82
330.70	40.98	1.00	291	-1.75	39.23	46.00	-6.77
449.52	34.18	1.00	278	2.74	36.92	46.00	-9.08
499.24	32.86	1.00	268	4.53	37.39	46.00	-8.61
666.56	27.08	1.00	186	10.75	37.83	46.00	-8.17

30MHz to 1GHz, EUT without cradle for USB interface, TX [Antenna polarity Vertical]

Radiated Emission				Correction Factors	Corrected Amplitude	FCC Class B (3 m)	
Frequency (MHz)	Amplitude (dBμV)	Ant. H. (m)	Table (°)			Limit (dBμV/m)	Margin (dB)
37.27	30.78	1.00	256	6.68	37.46	40.00	-2.54
300.39	36.31	1.00	311	-2.35	33.96	46.00	-12.04
499.24	28.73	1.00	228	4.53	33.26	46.00	-12.74
597.45	24.26	1.00	164	8.62	32.88	46.00	-13.12
666.56	23.31	1.00	28	10.75	34.06	46.00	-11.94
696.87	24.93	1.00	140	11.66	36.59	46.00	-9.41

30MHz to 1GHz, EUT without cradle for RS232 interface, TX [Antenna polarity Horizontal]

Radiated Emission				Correction Factors	Corrected Amplitude	FCC Class B (3 m)	
Frequency (MHz)	Amplitude (dBμV)	Ant. H. (m)	Table (°)			Limit (dBμV/m)	Margin (dB)
300.39	43.88	1.00	355	-2.35	41.53	46.00	-4.47
330.70	40.61	1.00	305	-1.75	38.86	46.00	-7.14
399.81	36.14	1.00	283	0.43	36.57	46.00	-9.43
409.51	35.52	1.00	287	0.88	36.40	46.00	-9.60
499.24	32.16	1.00	211	4.53	36.69	46.00	-9.31
666.56	25.84	1.00	177	10.75	36.59	46.00	-9.41

30MHz to 1GHz, EUT without cradle for RS232 interface, TX [Antenna polarity Vertical]

Radiated Emission				Correction Factors	Corrected Amplitude	FCC Class B (3 m)	
Frequency (MHz)	Amplitude (dBμV)	Ant. H. (m)	Table (°)			Limit (dBμV/m)	Margin (dB)
44.55	28.37	1.00	341	5.34	33.71	40.00	-6.29
300.39	34.15	1.00	280	-2.35	31.80	46.00	-14.20
330.70	30.29	1.00	284	-1.75	28.54	46.00	-17.46
499.24	27.09	1.00	242	4.53	31.62	46.00	-14.38
642.31	23.20	1.00	215	10.02	33.22	46.00	-12.78
698.09	24.82	1.00	162	11.69	36.51	46.00	-9.49

Channel 1, 1GHz to 25GHz [Antenna polarity Horizontal]

Radiated Emission				Corrected Amplitude		FCC Class B (3m)		
Frequency (MHz)	Ant. H. (m)	Table (°)	Correction Factors (dB)	(dBμV/m)		Limit (dBμV/m)		Margin (dB)
				Peak	Average	Peak	Ave.	
4834.00	1.00	145	-24.17	44.64	---	74.00	53.96	-9.32
8343.00	1.00	117	-14.59	47.06	---	74.00	53.96	-6.90
9208.17	1.00	204	-14.79	47.46	---	74.00	53.96	-6.50
9657.67	1.00	69	-15.35	48.46	---	74.00	53.96	-5.50
12180.67	1.00	287	-16.66	47.41	---	74.00	53.96	-6.55

Channel 1, 1GHz to 25GHz [Antenna polarity Vertical]

Radiated Emission				Corrected Amplitude		FCC Class B (3m)		
Frequency (MHz)	Ant. H. (m)	Table (°)	Correction Factors (dB)	(dBμV/m)		Limit (dBμV/m)		Margin (dB)
				Peak	Average	Peak	Ave.	
5781.33	1.00	207	-20.50	44.90	---	74.00	53.96	-9.06
8710.33	1.00	326	-14.97	46.92	---	74.00	53.96	-7.04
9657.67	1.00	49	-15.35	46.82	---	74.00	53.96	-7.14
10629.17	1.00	145	-15.86	47.09	---	74.00	53.96	-6.87

Note:

1. Margin = Corrected - Limit.
2. The EUT utilizes a *permanently attached antenna*. In addition the spurious RF radiated emissions levels do comply with the *20dBc limit* both at its bandedges and other spurious emissions.
3. As stated in Section 15.35(b), for any frequencies above 1000MHz, radiated limits shown are based upon the use of measurement instrumentation employing an average detector function. As the results of our test, the peak amplitudes are already below the FCC limit. Thus the average amplitudes of the rest are omitted.

Channel 6, 1GHz to 25GHz [Antenna polarity Horizontal]

Radiated Emission				Corrected Amplitude		FCC Class B (3m)		
Frequency (MHz)	Ant. H. (m)	Table (°)	Correction Factors (dB)	(dBμV/m)		Limit (dBμV/m)		Margin (dB)
				Peak	Average	Peak	Ave.	
4882.33	1.00	25	-23.89	47.08	---	74.00	53.96	-6.88
5795.83	1.00	165	-20.33	45.30	---	74.00	53.96	-8.66
8318.83	1.00	225	-14.61	47.04	---	74.00	53.96	-6.92
9759.17	1.00	308	-15.15	47.43	---	74.00	53.96	-6.53
12432.00	1.00	18	-16.47	47.45	---	74.00	53.96	-6.51

Channel 6, 1GHz to 25GHz [Antenna polarity Vertical]

Radiated Emission				Corrected Amplitude		FCC Class B (3m)		
Frequency (MHz)	Ant. H. (m)	Table (°)	Correction Factors (dB)	(dBμV/m)		Limit (dBμV/m)		Margin (dB)
				Peak	Average	Peak	Ave.	
4882.33	1.00	28	-23.89	44.29	---	74.00	53.96	-9.67
8376.83	1.00	146	-14.57	47.07	---	74.00	53.96	-6.89
10300.50	1.00	220	-15.88	46.93	---	74.00	53.96	-7.03
11745.67	1.00	114	-15.49	47.28	---	74.00	53.96	-6.68
13065.17	1.00	207	-17.35	47.53	---	74.00	53.96	-6.43

Channel 11, 1GHz to 25GHz [Antenna polarity Horizontal]

Radiated Emission				Corrected Amplitude		FCC Class B (3m)		
Frequency (MHz)	Ant. H. (m)	Table (°)	Correction Factors (dB)	(dBμV/m)		Limit (dBμV/m)		Margin (dB)
				Peak	Average	Peak	Ave.	
4935.50	1.00	256	-23.71	46.04	---	74.00	53.96	-7.92
6545.00	1.00	174	-19.01	44.76	---	74.00	53.96	-9.20
8367.17	1.00	20	-14.58	46.72	---	74.00	53.96	-7.24
9116.33	1.00	26	-14.47	47.10	---	74.00	53.96	-6.86
9855.83	1.00	315	-15.16	48.67	---	74.00	53.96	-5.29
13016.83	1.00	217	-17.39	47.64	---	74.00	53.96	-6.32

Channel 11, 1GHz to 25GHz [Antenna polarity Vertical]

Radiated Emission				Corrected Amplitude		FCC Class B (3m)		
Frequency (MHz)	Ant. H. (m)	Table (°)	Correction Factors (dB)	(dBμV/m)		Limit (dBμV/m)		Margin (dB)
				Peak	Average	Peak	Ave.	
4930.67	1.00	10	-23.72	43.77	---	74.00	53.96	-10.19
5766.83	1.00	179	-20.67	44.26	---	74.00	53.96	-9.70
8715.17	1.00	294	-15.00	46.85	---	74.00	53.96	-7.11
9855.83	1.00	104	-15.16	47.21	---	74.00	53.96	-6.75
13103.83	1.00	54	-17.30	47.77	---	74.00	53.96	-6.19

8.4 Test Result of the Bandedge


If any 100 kHz bandwidth outside these frequency bands, the radio frequency power that is produced by the modulation products of the spreading sequence, the information sequence and the carrier frequency shall be either *at least 20 dB below that in any 100 kHz bandwidth within the band that contains the highest level of the desired power or shall not exceed the general levels specified in § 15.209(a)*,

We perform this section by the *radiated manner*, the RBW is set to 100kHz and VBW>RBW. We'd made the observation *up to 10th harmonics and the criterion is all the harmonic/spurious emissions must be 20dB below the highest emission level measured*. If the emissions fall in the restricted bands stated in the Part15.205(a) must also *comply with the radiated emission limits specified in Part15.209(a)*. (Peak mode: RBW=VBW=1MHz, Average mode: RBW=1MHz; VBW=10Hz)

The following pages show our observations referring to the channel 1 and 11 respectively.

Test Condition & Setup: same as < 8.1 >

Channel 1

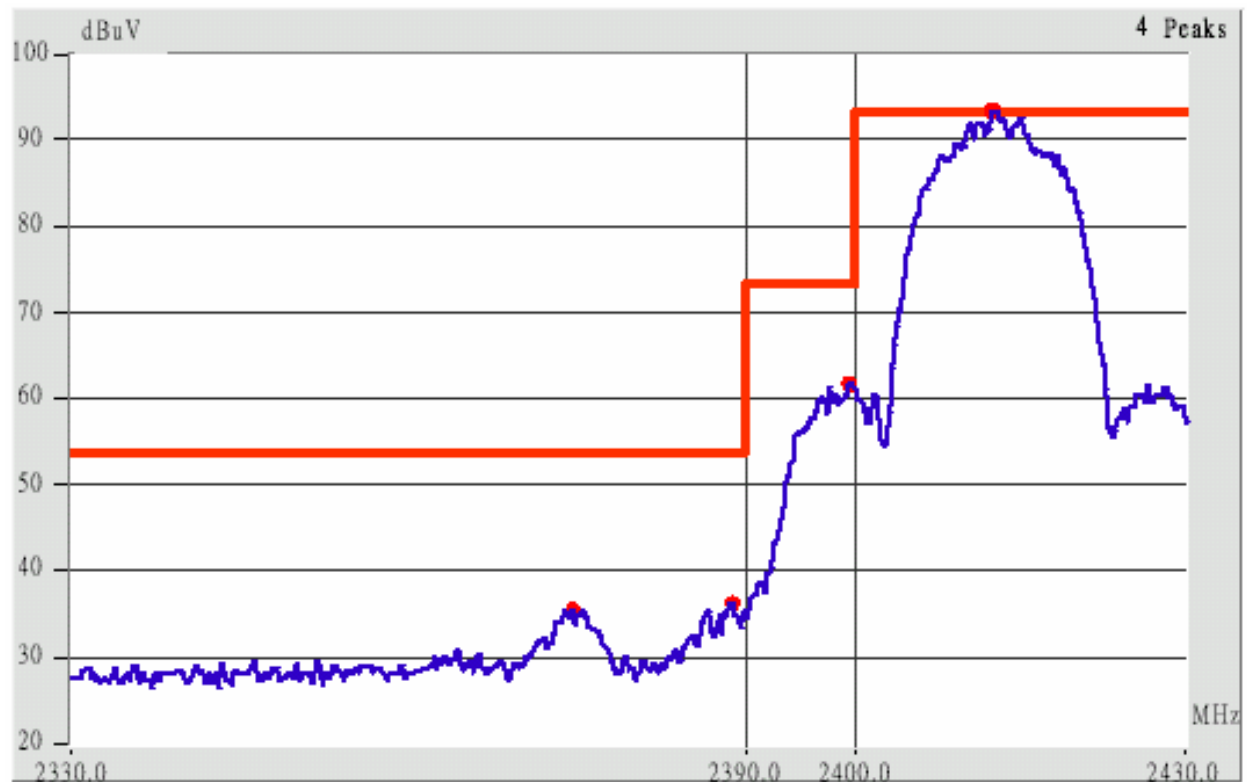


This is the hard copy of our bandedge measurement generated by our bandedge testing program. The plot shown above is the bandedge of channel 1.

1. The lobe left by the fundamental side is already 20dB below the highest emission level.
2. The emissions recorded in the restricted band is do comply with the Part 15.209(a) – as below.

<i>Radiated Emission</i>					<i>Corrected Amplitude</i>		<i>FCC Class B (3m)</i>		
<i>Frequency (MHz)</i>	<i>Ant. P.</i>	<i>Ant. H. (m)</i>	<i>Table (°)</i>	<i>Factors (dB)</i>	<i>(dBuV/m)</i>		<i>Limit (dBuV/m)</i>		<i>Margin (dB)</i>
					<i>Peak</i>	<i>Average</i>	<i>Peak</i>	<i>Ave.</i>	
2374.91	Hor	1.00	151	3.08	41.23	---	74.00	53.96	-12.73
2390.06	Hor	1.00	26	3.13	41.26	---	74.00	53.96	-12.70
2374.85	Ver	1.00	170	3.08	39.13	---	74.00	53.96	-14.83
2390.06	Ver	1.00	113	3.13	36.94	---	74.00	53.96	-17.02

Channel 11

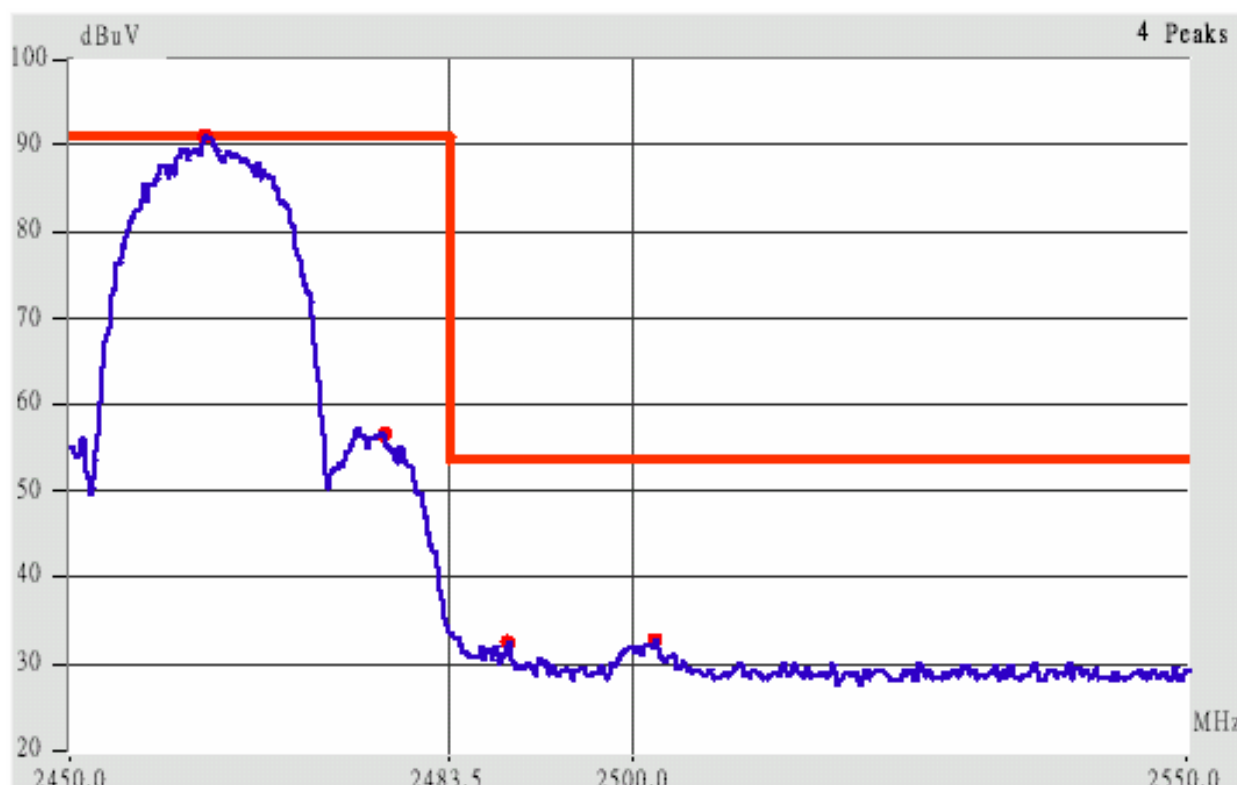

This is the hard copy of our bandedge measurement generated by our bandedge testing program. The plot shown above is the bandedge of channel 11.

1. The lobe right by the fundamental side is already 20dB below the highest emission level.
2. The emissions recorded in the restricted band is do comply with the Part 15.209(a) – as below


<i>Radiated Emission</i>					<i>Corrected Amplitude</i>		<i>FCC Class B (3m)</i>		
<i>Frequency (MHz)</i>	<i>Ant. P.</i>	<i>Ant. H. (m)</i>	<i>Table (°)</i>	<i>Factors (dB)</i>	<i>(dBμV/m)</i>		<i>Limit (dBμV/m)</i>		<i>Margin (dB)</i>
					<i>Peak</i>	<i>Average</i>	<i>Peak</i>	<i>Ave.</i>	
2483.50	Hor	1.00	27	3.45	43.47	---	74.00	53.96	-10.49
2488.12	Hor	1.00	116	3.46	40.72	---	74.00	53.96	-13.24
2499.67	Hor	1.00	108	3.50	41.37	---	74.00	53.96	-12.59
2500.79	Ver	1.00	253	3.50	41.38	---	74.00	53.96	-12.58
2501.21	Hor	1.00	60	3.50	40.58	---	74.00	53.96	-13.38

IX. Section 15.247(d): Power Spectral Density

9.1 Test Condition & Setup

The tests below are running with the EUT transmitter set at high power in TDD mode. The EUT is needed to force selection of output power level and channel number. While testing, the EUT was set to transmit continuously and to be tested by the contact manner with the spectrum analyzer.

9.2 Test Instruments Configuration

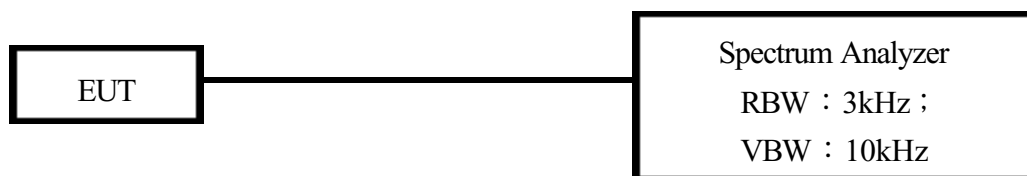

9.3 List of Test Instruments

Instrument Name	Model No.	Brand	Serial No.	Last time	Next time
Spectrum Analyzer	MS2665C	ANRITSU	6200175476	09/11/02	09/11/03

9.4 Test Result of Power spectral density


The following table shows a summary of the test results of the Power Spectral Density.

<i>Channel</i>	<i>Frequency (GHz)</i>	<i>Ppr (dBm)</i>	<i>Cable Loss (dB)</i>	<i>Ppq (dBm)</i>	<i>Limit (dB)</i>	<i>Margin (dB)</i>
CH 01	2.412	-17.35	0.60	-16.75	8.00	-24.75
CH 06	2.437	-17.76	0.60	-17.16	8.00	-25.16
CH 11	2.462	-18.87	0.60	-18.27	8.00	-26.27


Note:

1. The following pages show the results of spectrum reading.
2. Ppr: spectrum read power density (using peak search mode),
Ppq: actual peak power density in the spread spectrum band.
3. $Ppq = Ppr + |\text{Cable Loss}|$

Channel 01

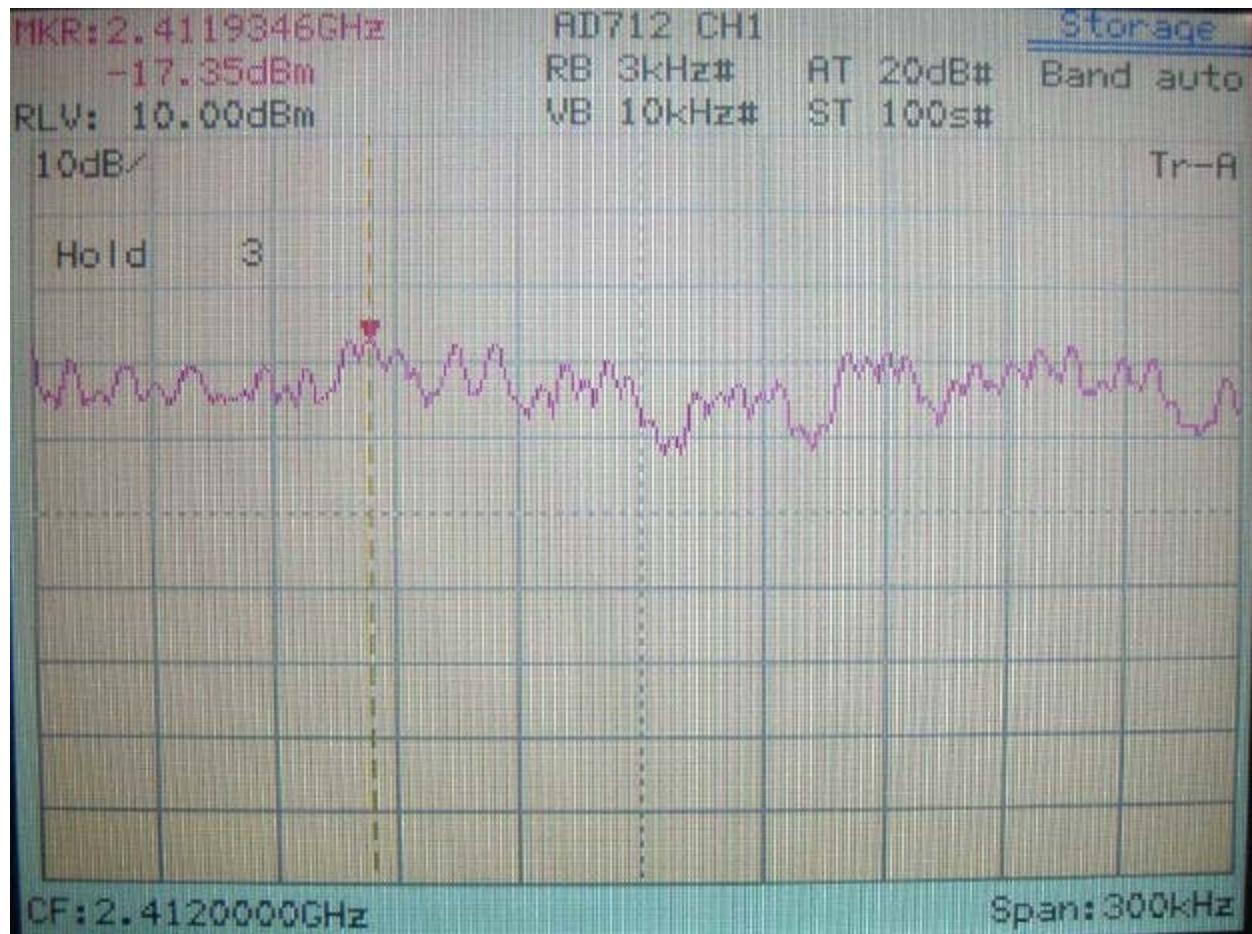

Channel 06

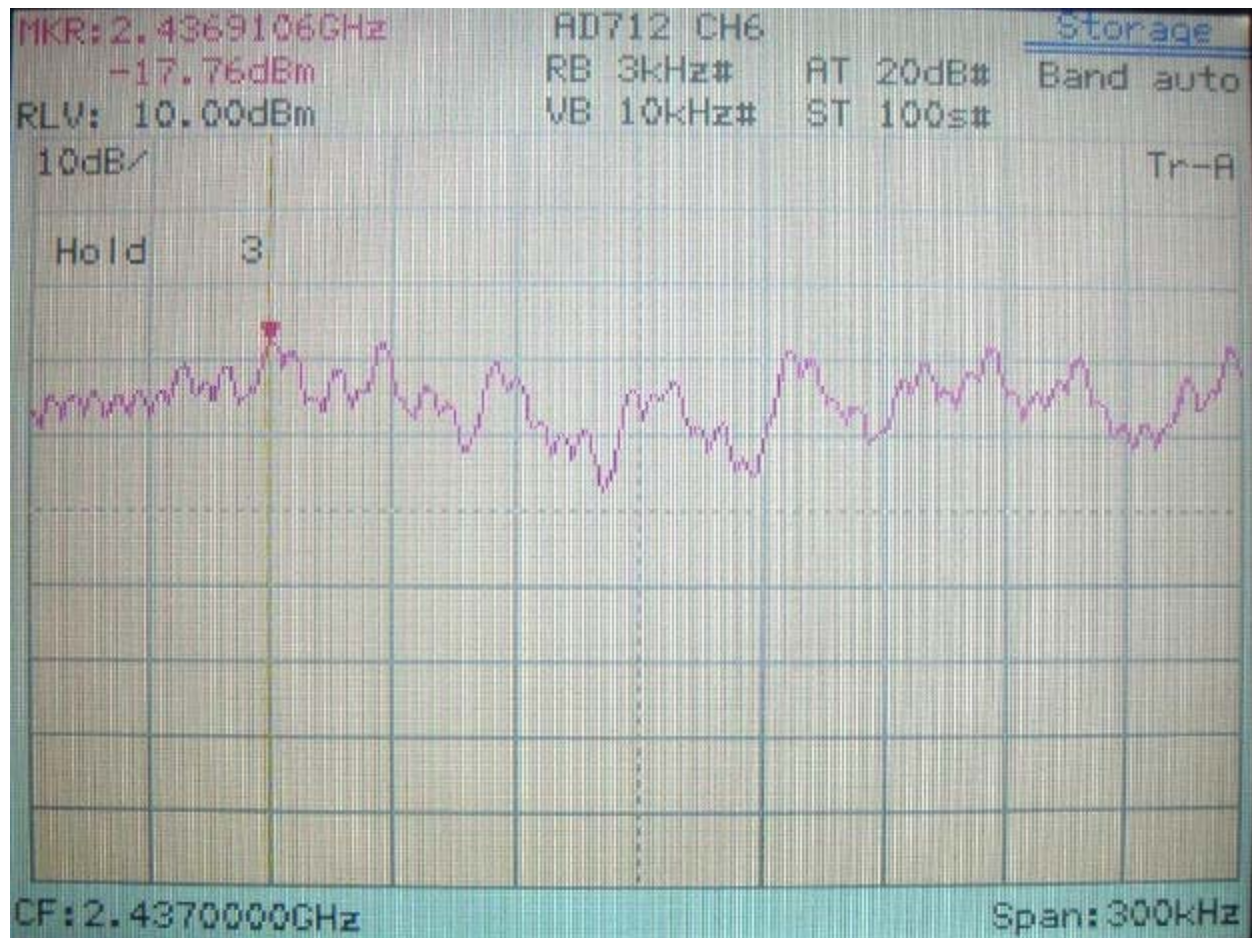

Channel 11

