

12345678

A

B

C

D

A


B

C

D


E

F

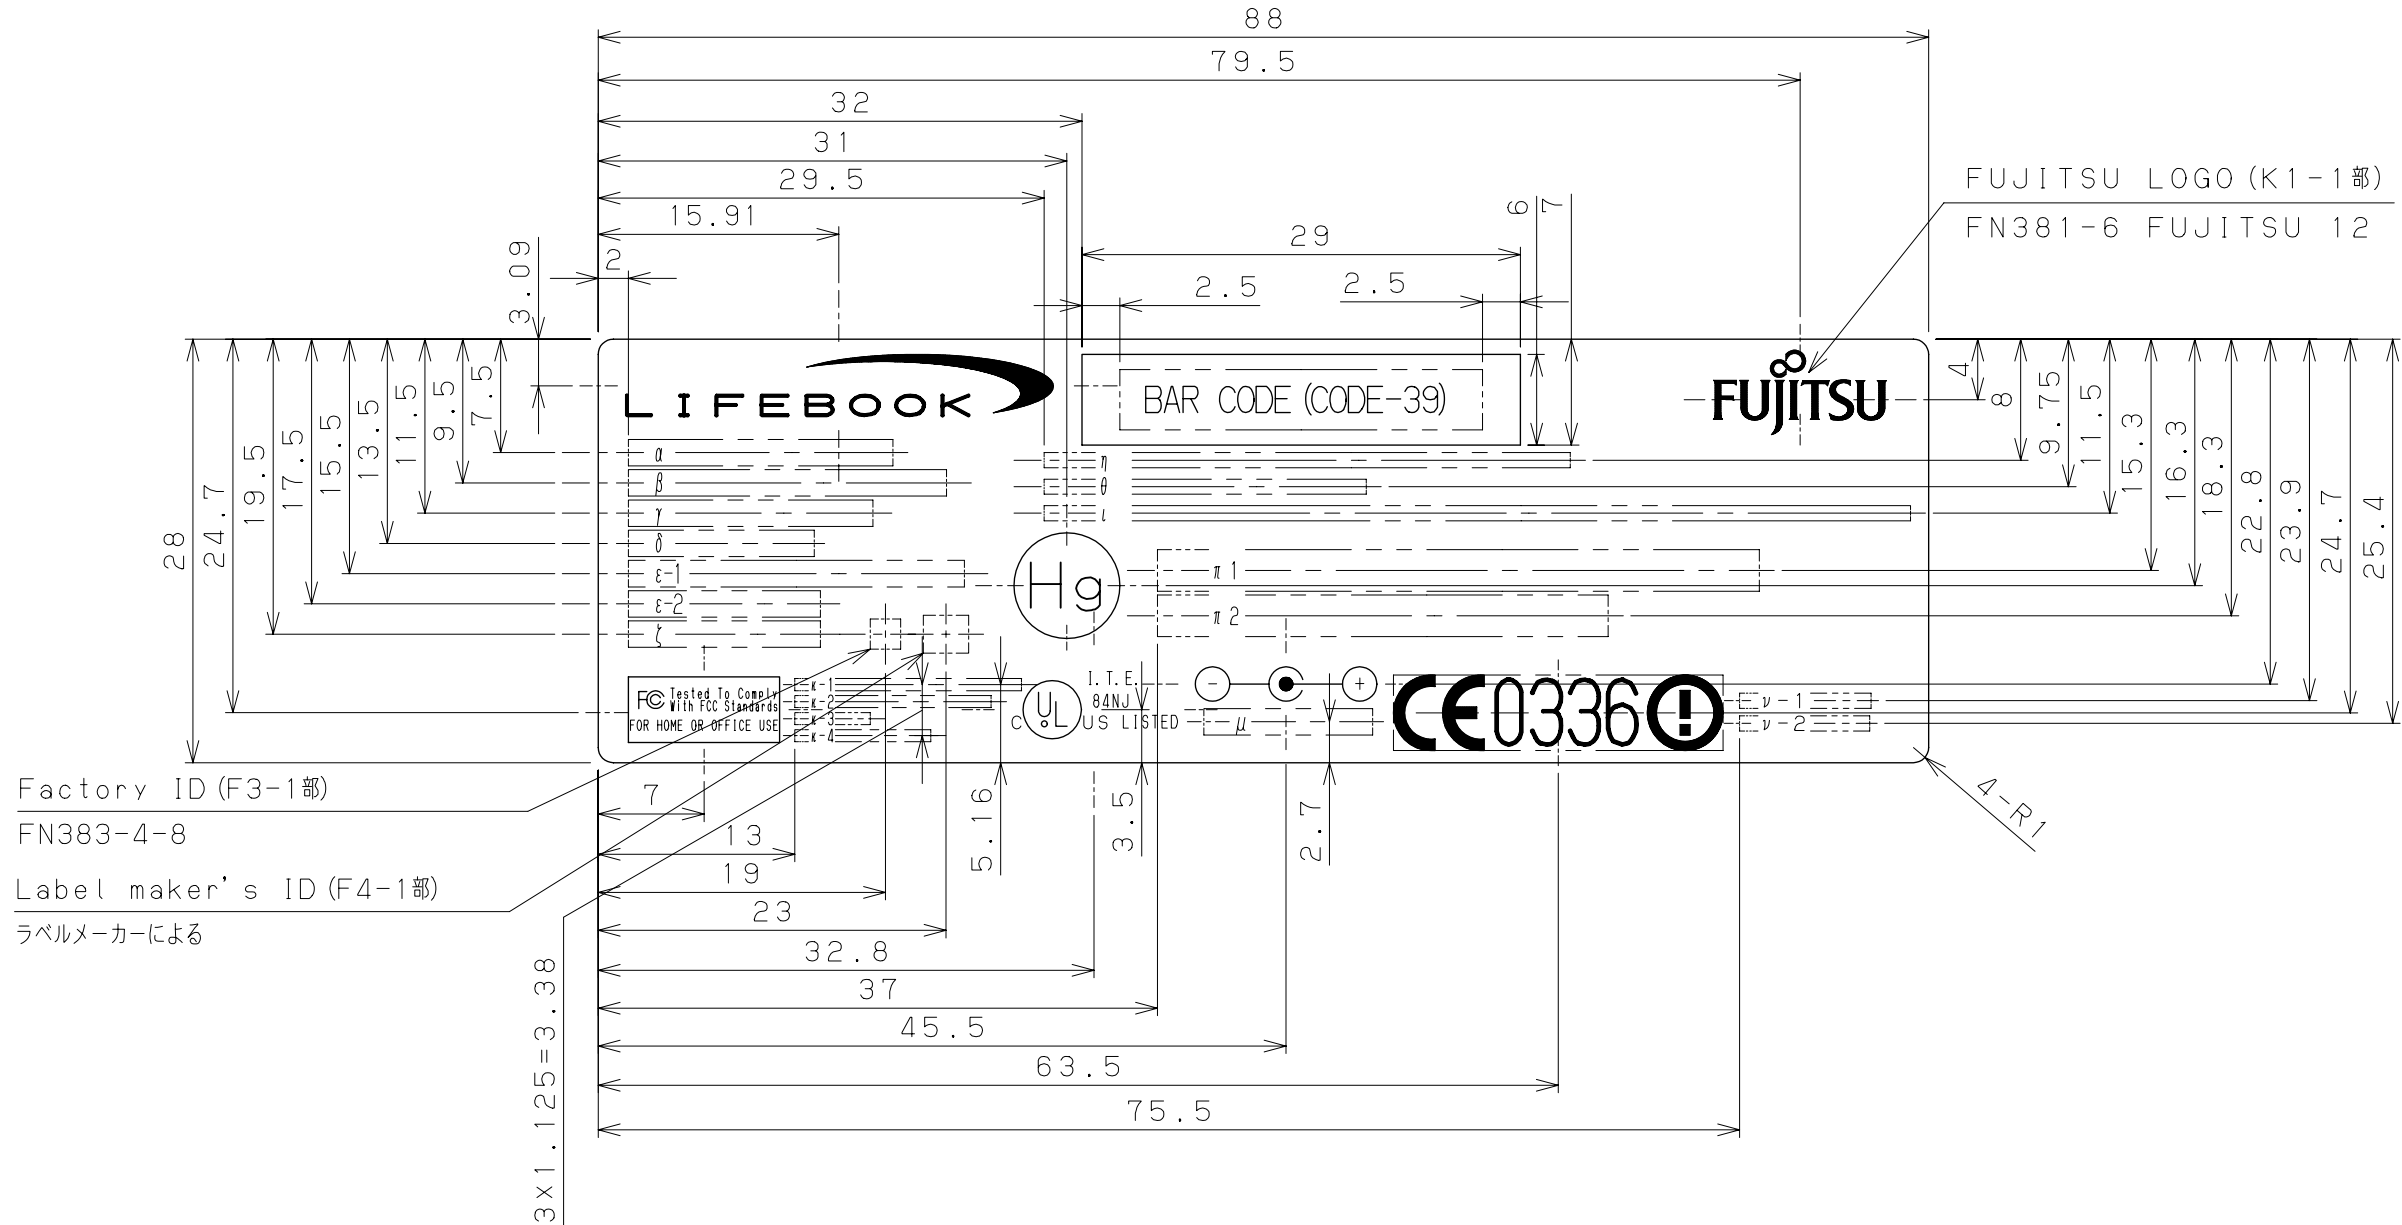


Factory ID (F3-1部)
FN383-4-8


Label maker's ID (F4-1部)
ラベルメーカーによる

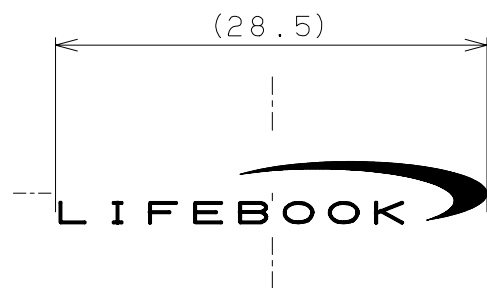


ブランドロゴ (K3-1部)




FCC15B (C1-1部)




UL/cUL (F1-4部)



Rating (A5-1部)



水銀マーク (F5-1部)
文字:F383-4-14

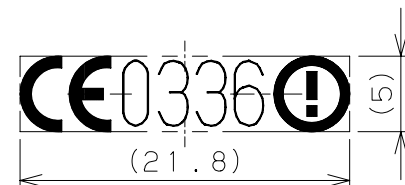

CE0336! (B2-4部)

DOCUMENT CONTROL SECTION

DATE

		Commercial Tolerance								
Item	Dimension	Q5-30	120 or less	315 or less	1000 or less	2000 or less	FN111-10	Class ()		
		±Q1	±Q15	±Q2	±Q3	±Q5	FN111-11	Metallic sinter, Aluminum alloy casting (Metal mold, Sand mold), Glass processing, Iron casting, Copper alloy casting, Rubber forming, Rubber processing, Sponge forming, Sponge processing		
		±Q15	±Q25	±Q4	±Q5	±Q7				
		±Q2	±Q3	±Q5	±Q8	±1.2				
		±Q2	±Q3	±Q5	±Q8	±1.2	FN111-13	Plastic mold	FN111-14	Die cast

MATER. SS UPO Thickness=80μ. (ANS-8)						SCALE			
FINISH Face:Delustering Laminating. Rear Surface:with adhesive.						2 : 1			
EDIT.	DATE	DESIG.	APPR.	DESCRIPTION					
NOTE ONION (FCS) FPC04107AK S7010				TITLE. DEV, LBL, U4B, C					
SECTION 1322 F0204A01370				DRAW. NO. X0CP184229-01					CUST.
DATE		DESIG.	CHECK	APPR.	FUJITSU LIMITED			SHEET	
040128		SAITO	SAITO	TANAKA				1 / 2	

A

B

C

D

記号 part		記述 (印字／印刷) 内容 description	分類番号		文字 (語長) / シンボル (横幅) サイズ character/symbol (width) size
			大別	小別	
α		LifeBook <u>[S]</u> Series	A 1	5	FN383-4-6 (1.5mm)
β		Product_No : <u>FPC04107AK</u>	A 2	1	
γ		Part_No : <u>CP184081</u>	A 3	1	
δ		Reg_No : <u>S7010</u>	A 4	1	
ε	1	Fujitsu Computer Systems Corporation	L 1	7	
	2	Sunnyvale, CA			
ζ		MADE_IN_JAPAN	L 2	1	FN383-4-4 (1mm)
η		Contains_Lithium_Battery. Must_be_recycled_or_disposed_of_properly.	N 3	2	
θ		See_User's_Manual_for_FCC_Notices.	C 4	1	
ι		The_Windows_logo_is_a_registered_trademark_of_Microsoft_Corporation_in_the_United_States_and/or_other_countries.	H 1	1	
κ	1	Complies_With_FCC_Part_68_Rules.	D 2	1	FN383-4-3 (0.75mm)
	2	FCC_Reg_No : <u>US:EJECN00B8687</u>			
	3	REN= <u>0.0B</u>			
	4	USOC_Jacks=RJ11C			
λ		<u>[84N]</u>	F 1	3	FN383-4 (0.8mm)
μ		DC <u>[19]</u> V = <u>[3.16]</u> A	A 5	4	FN383-4-4 (1mm)
ν	1	FCC_ID : <u>EJE-WB0004</u>	E 1	3	
	2	IC : <u>[337J-WB0004]</u>			
π	1	LAMP_CONTAINS_MERCURY,	F 5	3	FN383-4-11 (2.75mm)
	2	DISPOSE_PROPERLY			

記述内容：(1) 本ラベルの記述 (印字／印刷) 内容は銘版共通記述仕様書 (M8CP165120-XX) による。
尚、「共通」は銘版共通記述仕様書を「個別」は本図面を意味する。
(2) 本ラベル図面は外形、記述のレイアウト及びサイズを指示する。
(3) 破線で囲まれている部分については本図面を参照とする。
(4) バーコード仕様はCODE39による。バーコード内容：CP184229

注意事項：(1) 本ラベルにはUL及びCSA認定材を使用のこと。
(2) 下地色=COOL BLACK (DESIGN-C010-B174)
(3) 文字色は、白 (抜き文字でも可) とする。
(4) 想像線は記入文字の位置を示す。又、 $\alpha \sim \pi$ の は1文字分の空白を表す。
尚、文字が入らない場合は、長体文字も可とする。
(5) 外形線は印刷不要。

その他：(1) 粘着剤は、耐熱・永久接着タイプとする。
なお、粘着力は、JIS Z 0237 粘着テープ・粘着シートは試験方法 (180度引きはがし法) により”1kgf/25mm幅”以上とする。
(2) 粘着面は、保護紙付とする。

Description (1) The descriptive content of this label depends on the application specifications. (M8CP165120-XX)
"Common" shows the common description specifications and "invidual" shows this specifications.
(2) This label drawing directs externals and the layout and the size of the description.
(3) Only about a part surrounded in the dashed line applies this specification.
(4) The specification of the bar code follows CODE39.
Content of bar code:CP184229


Items to write：(1) UL and CSA authorization materials must be used for this label.
(2) Imaginaly line shows location of letter.
The under-score () in part α to π means one blank of a letter.
(3) Visible outline should not be printed.

Colour：(1) Back ground colour：COOL BLACK. (DESIGN-C010-B174)
(2) Symbol and All letter：white (or Pull out).

Miscellaneous：(1) Pressure sensitive abhesive is heat resistance and permanent adhesive type.
Adhesive strength is for JIS Z 0237.
Adhesive tape and adhesion sheet is more '1kgf/25mm wighth' for test method, (peeled of 180 degrees).
(2) Adhesion surface is stick to protective paper.

DOCUMENT CONTROL SECTION

DATE

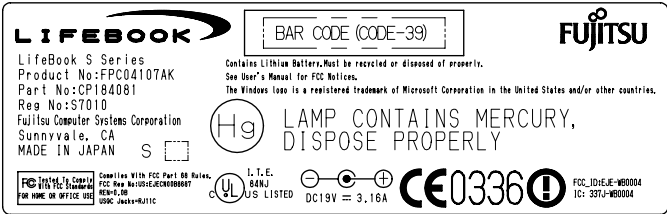

EDIT.	DATE	DESIG.	APPR.	DESCRIPTION
NOTE ONION (FCS) FPC04107AK S7010				TITLE.
SECTION 1322 F0204A01370				DRAW. NO. X0CP184229-01
DATE		DESIG.	CHECK	APPR.
FUJITSU LIMITED				SHEET 2 / 2