



**UL Apex Co., Ltd.**

Test report No. : 26AE0214-HO-6  
Page : 1 of 136  
Issued date : September 9, 2005  
FCC ID : EJE-WB0037

## **SAR EVALUATION REPORT**

**Report No. : 26AE0214-HO-6**

**Applicant : FUJITSU LIMITED**

**Type of Equipment : Personal Computer**

**Model No. : P1510D**

**FCC ID : EJE-WB0037**

**Test standard : FCC47CFR 2.1093  
FCC OET Bulletin 65, Supplement C**

**Test Result : Complied (IEEE 802.11a)**

**Max SAR Measured  
(5150-5350MHz Band) : 1.05W/kg( Body, 5250MHz Turbo mode)  
(5725-5850MHz Band) : 0.546 W/kg( Body, 5745MHz Normal mode)**

1. This test report shall not be reproduced except full or partial, without the written approval of UL Apex Co., Ltd.
2. The results in this report apply only to the sample tested.
3. This equipment is in compliance with above regulation. We hereby certify that the data contain a true representation of the SAR profile.
4. The test results in this test report are traceable to the national or international standards.

**Date of test : May 10 and 11, 2005**

**Tested by : M. Ikuta**  
Miyo Ikuta  
EMC Lab. Head Office

**Approved by : T. Maeno**  
Tetsuo Maeno  
Site Manager of Head Office EMC Lab.

<b>CONTENTS</b>	<b>PAGE</b>
SECTION 1 : Client information.....	3
SECTION 2 : Equipment under test .....	4
SECTION 3 : Requirements for compliance testing defined by the FCC .....	7
SECTION 4 : Dosimetry assessment setup .....	7
SECTION 5 : Test system specifications.....	11
SECTION 6 : Test setup of EUT .....	12
SECTION 7 : Measurement uncertainty .....	18
SECTION 8 : Simulated tissue liquid parameter.....	19
SECTION 9 : System validation data.....	21
SECTION 10 : Evaluation procedure .....	22
SECTION 11 : Exposure limit .....	23
SECTION 12 : SAR Measurement results (5150-5350MHz)[Normal Mode] .....	24
SECTION 13 : SAR Measurement results (5725-5850MHz) [Normal mode].....	28
SECTION 14 : SAR Measurement results (5150-5350MHz ,5725-5850MHz) [Turbo mode] .....	32
SECTION 15 : Equipment & calibration information .....	34
SECTION 16 : References.....	35
APPENDIX 1 : Photographs of test setup .....	36
APPENDIX 2 : SAR Measurement data (5150-5350MHz)[Normal mode].....	49
APPENDIX 3 : SAR Measurement data (5725-5850MHz)[Normal mode].....	69
APPENDIX 4 : SAR Measurement data (5150-5350MHz,5725-5850MHz)[Turbo mode] .....	92
APPENDIX 5 : Validation Measurement data.....	101
APPENDIX 6 : System Validation Dipole (D5GHzV2,S/N: 1020) .....	105
APPENDIX 7 : Dosimetric E-field Probe Calibration (EX3DV4, S/N:3540).....	116
APPENDIX 8 : The 5-6GHz Extension (SPEAG information).....	126
APPENDIX 9 : Power drift measurement.....	135

### **SECTION 1 : Client information**

Company Name : FUJITSU LIMITED  
Brand Name : FUJITSU  
Address : 1-1, Kamikodanaka 4-chome, Nakahara-ku, Kawasaki 211-8588, Japan  
Telephone Number : +81-44-754-3885  
Facsimile Number : +81-44-754-3769  
Contact Person : Tsuyoshi Uchihara

## SECTION 2 : Equipment under test

### 2.1 Identification of EUT

Applicant : FUJITSU LIMITED  
Type of Equipment : Personal Computer  
Model No. : P1510D  
Serial No. : R5100002  
Country of Manufacture : Japan  
Receipt Date of Sample : January 17, 2005  
Condition of EUT : Engineering prototype  
(Not for sale: This sample is equivalent to mass-produced items.)  
Size of EUT(L\*W:H) : 160\*230\*35  
Category Identified : Portable device  
Supply : DC16.0V / 2.5A  
Battery : This PC (model : P1510D) has two types.

<b>Standard Battery (Li ion Battery)</b>  Model name CP229720 Serial No. P1510D_Battery_3_01 V / mAh 10.8Vdc / 2600mAh	
<b>Option Battery (Li ion Battery)</b>  Model name CP229725 Serial No. P1510D_Battery_6_01 V / mAh 10.8Vdc / 5200mAh	

### Photographs of EUT

Note type use



Tablet type use



### 2.2 Product description of EUT

This EUT has IEEE802.11 a/b/g module which consists of 2.4GHz and 5GHz in the same chip, and the other module is Bluetooth.

Main antenna is used in the W-LAN(IEEE802.11 a/b/g) modes, Aux antenna is used in the W-LAN(IEEE802.11 a/b/g) and Bluetooth.

### 2.3 Product description of Wireless LAN module

This EUT has the Wireless LAN module of IEEE.802.11a/b/g.  
The description only of the IEEE.802.11a mode is shown below.

Tx Frequency : 5180-5320MHz (5150-5250MHz & 5250-5350MHz Band)  
5745-5825MHz (5725-5850MHz Band)

Modulation : OFDM

Rating : DC3.3V

Max.Output Power Tested (5210MHz) : 13.34 dBm Peak Conducted

Max.Output Power Tested (5745MHz) : 20.03 dBm Peak Conducted

#### 2.3.1 Product description of Antenna (Main antenna and Aux antenna)

Antenna Type : Monopole Antenna(M/N:YCE-5008)

Antenna Connector : U.FL

Antenna Gain : 2.4GHz(Max.) Main -4.78dBi, Aux -1.49dBi  
5GHz(Max.) Main 0.90dBi, Aux -0.97dBi  
(These antenna gains are values in which antenna were mounted to the PC.)

### 2.4 Product description of Bluetooth module

Tx Frequency : 2402-2480MHz (Bluetooth)

Modulation : FHSS

Rating : DC3.3V

Max.Output Power Tested : 11.32 dBm Peak Conducted

#### 2.4.1 Product description of Antenna (Aux antenna)

Antenna Type : Monopole Antenna(M/N:YCE-5008)

Antenna Connector : U.FL

Antenna Gain : Aux -1.49dBi  
(These antenna gains are values in which antenna were mounted to the PC.)

---

### **SECTION 3 : Requirements for compliance testing defined by the FCC**

The US Federal Communications Commission has released the report and order "Guidelines for Evaluating the Environmental Effects of RF Radiation", ET Docket No. 93-62 in August 1996. The order requires routine SAR evaluation prior to equipment authorization of portable transmitter devices, including portable telephones. For consumer products, the applicable limit is 1.6 mW/g for an uncontrolled environment and 8.0 mW/g for an occupational/controlled environment as recommended by the ANSI/IEEE standard C95.1-1992. According to the Supplement C of OET Bulletin 65 "Evaluating Compliance with FCC Guide-lines for Human Exposure to Radio frequency Electromagnetic Fields", released on Jun 29, 2001 by the FCC, the device should be evaluated at maximum output power (radiated from the antenna) under "worst-case" conditions for normal or intended use, incorporating normal antenna operating positions, device peak performance frequencies and positions for maximum RF energy coupling.

1 Specific Absorption Rate (SAR) is a measure of the rate of energy absorption due to exposure to an RF transmitting source (wireless portable device).


2 IEEE/ANSI Std. C95.1-1992 limits are used to determine compliance with FCC ET Docket 93-62.

---

### **SECTION 4 : Dosimetry assessment setup**

These measurements were performed with the automated near-field scanning system DASY4 from Schmid & Partner Engineering AG (SPEAG). The system is based on a high precision robot (working range greater than 0.9 m), which positions the probes with a positional repeatability of better than +/- 0.02 mm. Special E- and H-field probes have been developed for measurements close to material discontinuity, the sensors of which are directly loaded with a Schottky diode and connected via highly resistive lines to the data acquisition unit. The SAR measurements were conducted with the dosimetry probe EX3DV4, SN: 1020 (manufactured by SPEAG), designed in the classical triangular configuration and optimized for dosimetric evaluation. The probe has been calibrated according to the procedure described in [2] with accuracy of better than +/-10%. The spherical isotropy was evaluated with the procedure described in [3] and found to be better than +/-0.25 dB. The phantom used was the SAM Twin Phantom as described in FCC supplement C, IEEE P1528 and CENELEC EN50361.

#### 4.1 Configuration and peripherals

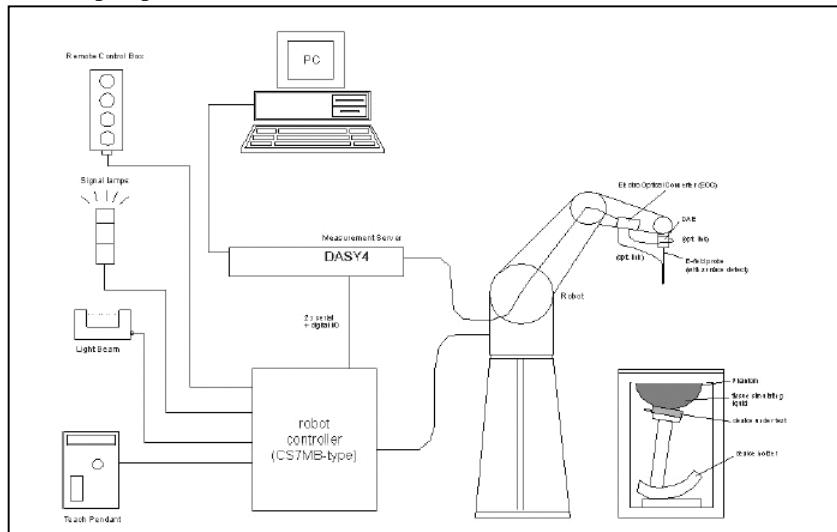

The DASY4 system for performing compliance tests consist of the following items:

1. A standard high precision 6-axis robot (Stäubli RX family) with controller and software.  
An arm extension for accommodating the data acquisition electronics (DAE).
2. A dosimetric probe, i.e., an isotropic E-field probe optimized and calibrated for usage in tissue simulating liquid. The probe is equipped with an optical surface detector system.
3. A data acquisition electronic (DAE), which performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. The unit is battery powered with standard or rechargeable batteries. The signal is optically transmitted to the EOC.
4. The Electro-optical converter (EOC) performs the conversion between optical and electrical of the signals for the digital communication to the DAE and for the analog signal from the optical surface detection. The EOC is connected to the measurement server.
5. The function of the measurement server is to perform the time critical tasks such as signal filtering, control of the robot operation and fast movement interrupts.
6. A probe alignment unit which improves the (absolute) accuracy of the probe positioning.
7. A computer operating Windows 2000.
8. DASY4 software.
9. Remote control with teaches pendant and additional circuitry for robot safety such as warning lamps, etc.
10. The SAM twin phantom enabling testing left-hand and right-hand usage.
11. The device holder for handheld mobile phones.
12. Tissue simulating liquid mixed according to the given recipes.
13. Validation dipole kits allowing to validate the proper functioning of the system.

**UL Apex Co., Ltd.**

**Head Office EMC Lab.**

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone: +81 596 24 8116

Facsimile: +81 596 24 8124

## 4.2 System components

### 4.2.1 EX3DV4 Probe Specification

**Construction:**

Symmetrical design with triangular core  
Built-in shielding against static charges  
PEEK enclosure material (resistant to organic solvents, e.g., glycol ether)

**Calibration:**

Basic Broad Band calibration in air : 10-3000 MHz  
Frequencies of 900 MHz, 1.8 GHz and 2.45GHz (Head and Body)

**Frequency:**

10 MHz to > 6GHz; Linearity: +/-0.2 dB(30 MHz to 3 GHz)

**Directivity:**

+/-0.3 dB in HSL (rotation around probe axis)  
+/-0.5 dB in tissue material (rotation normal probe axis)

**Dynamic Range:**

10uW/g to > 100 mW/g; Linearity: +/-0.2 dB(noise: typically < 1uW/g)

**Dimensions:**

Overall length: 330 mm (Tip: 20 mm)  
Tip diameter: 2.5mm (Body: 12 mm)  
Typical distance from probe tip to dipole centers: 1 mm

**Application:**

Highprecision dosimetric measurement in any exposure scenario (e.g., very strong gradient fields). Only probe which enables compliance testing for frequencies up to 6GHz with precision of better 30%.

**EX3DV4 E-field Probe**

#### 4.2.2 SAM Phantom

**Construction:**

The shell corresponds to the specifications of the Specific Anthropomorphic Mannequin (SAM) phantom defined in IEEE 1528-200X, CENELEC EN 50361 and IEC 62209. It enables the dosimetric evaluation of left and right hand phone usage as well as body mounted usage at the flat phantom region. A cover prevents evaporation of the liquid. Reference markings on the phantom allow the complete setup of all predefined phantom positions and measurement grids by manually teaching three points with the robot.

**Shell Thickness:**


2 +/-0.2 mm

**Filling Volume:**

Approx. 25 liters

**Dimensions:**

(H x L x W): 810 x 1000 x 500 mm

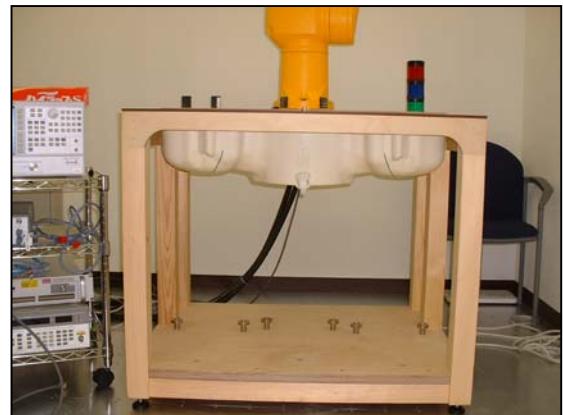

**SAM Phantom**

#### 4.2.3 Device Holder for Transmitters

In combination with the SAM Twin Phantom V4.0, the Mounting Device enables the rotation of the mounted transmitter

in spherical coordinates whereby the rotation points is the ear opening. The devices can be easily, accurately, and repeatedly positioned according to the FCC and CENELEC specifications. The device holder can be locked at different phantom locations (left head, right head, flat phantom).

\* Note: A simulating human hand is not used due to the complex anatomical and geometrical structure of the hand that may produced infinite number of configurations.

To produce the worst-case condition (the hand absorbs antenna output power), the hand is omitted during the tests.



**Device Holder**

Device holder couldn't be used at this SAR measurement.

## SECTION 5 : Test system specifications

### Robot RX60L

<b>Number of Axes</b>	:	6
<b>Payload</b>	:	1.6 kg
<b>Reach</b>	:	800mm
<b>Repeatability</b>	:	+/-0.025mm
<b>Control Unit</b>	:	CS7M
<b>Programming Language</b>	:	V+
<b>Manufacture</b>	:	Stäubli Unimation Corp. Robot Model: RX60

### DASY4 Measurement server

<b>Features</b>	:	166MHz low power Pentium MMX 32MB chipdisk and 64MB RAM Serial link to DAE (with watchdog supervision) 16 Bit A/D converter for surface detection system Two serial links to robot (one for real-time communication which is supervised by watchdog) Ethernet link to PC (with watchdog supervision) Emergency stop relay for robot safety chain Two expansion slots for future applications Schimid & Partner Engineering AG
<b>Manufacture</b>	:	

### Data Acquisition Electronic (DAE)

<b>Features</b>	:	Signal amplifier, multiplexer, A/D converter and control logic Serial optical link for communication with DASY4 embedded system (fully remote controlled) 2 step probe touch detector for mechanical surface detection and emergency robot stop (not in -R version)
<b>Measurement Range</b>	:	1 µV to > 200 mV (16 bit resolution and two range settings: 4mV, 400mV)
<b>Input Offset voltage</b>	:	< 1 µV (with auto zero)
<b>Input Resistance</b>	:	200 MΩ
<b>Battery Power</b>	:	> 10 h of operation (with two 9 V battery)
<b>Dimension</b>	:	60 x 60 x 68 mm
<b>Manufacture</b>	:	Schimid & Partner Engineering AG

### Software

<b>Item</b>	:	Dosimetric Assesment System DASY4
<b>Type No.</b>	:	SD 000 401A, SD 000 402A
<b>Software version No.</b>	:	4.5
<b>Manufacture / Origin</b>	:	Schimid & Partner Engineering AG

### E-Field Probe

<b>Model</b>	:	EX3DV4
<b>Serial No.</b>	:	1020
<b>Construction</b>	:	Symmetrical design with triangular core
<b>Frequency</b>	:	10 MHz to 6 GHz
<b>Linearity</b>	:	+/-0.2 dB (30 MHz to 3 GHz)
<b>Manufacture</b>	:	Schimid & Partner Engineering AG

### Phantom

<b>Type</b>	:	SAM Twin Phantom V4.0
<b>Shell Material</b>	:	Fiberglass
<b>Thickness</b>	:	2.0 +/-0.2 mm
<b>Volume</b>	:	Approx. 25 liters
<b>Manufacture</b>	:	Schimid & Partner Engineering AG

**UL Apex Co., Ltd.**

**Head Office EMC Lab.**

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone: +81 596 24 8116

Facsimile: +81 596 24 8124

---

## **SECTION 6 : Test setup of EUT**

### **6.1 Photographs of test setup**



When users operate or carry this EUT, it could be considered to touch or get close to their bodies. This EUT can be used also as a Tablet PC. In order to assume these situations, we performed the test at the following positions. Please refer to "APPENDIX 1" for more details.

- 1.Main Front : The test was performed in touch with main front to the flat section of SAM phantom.
- 2.Aux Front : The test was performed in touch with aux front to the flat section of SAM phantom.
- 3.Main Back : The test was performed in distanced 15mm with main back to the flat section of SAM phantom.
- 4.Aux Back : The test was performed in distanced 15mm with aux back to the flat section of SAM phantom.
- 5.Main Bottom: The test was performed in touch with main bottom to the flat section of SAM phantom.
- 6.Aux Bottom: The test was performed in touch with aux bottom to the flat section of SAM phantom.
- 7.Main Side : The test was performed in touch with main side to the flat section of SAM phantom.
- 8.Aux Side : The test was performed in touch with aux side to the flat section of SAM phantom.

“Front”and “ Side” positions are assumed when users operate in the tablet type use.

When users operate or carry this EUT, it is can be touched to the user’s Body. Therefore, “Front”and “Side” positions were tested in the touch to the phantom.

However, “Back” position is assumed when users operate in the note type use. Therefore “Back” position was tested in the distance 15mm from the phantom.

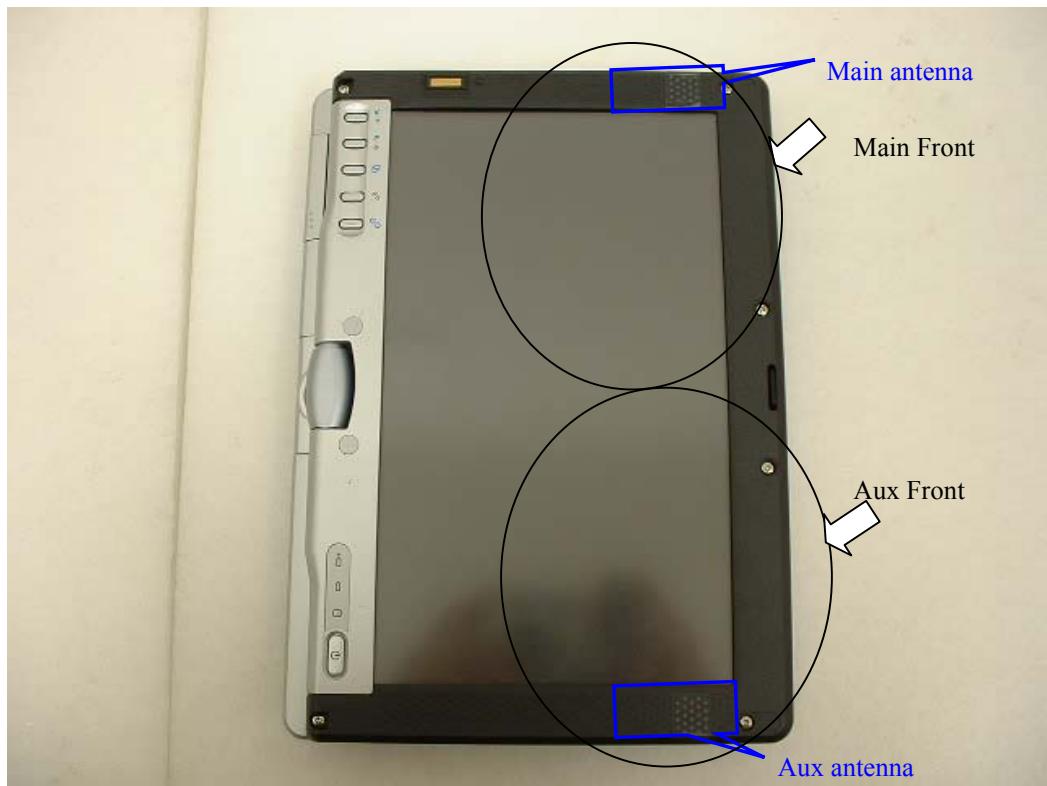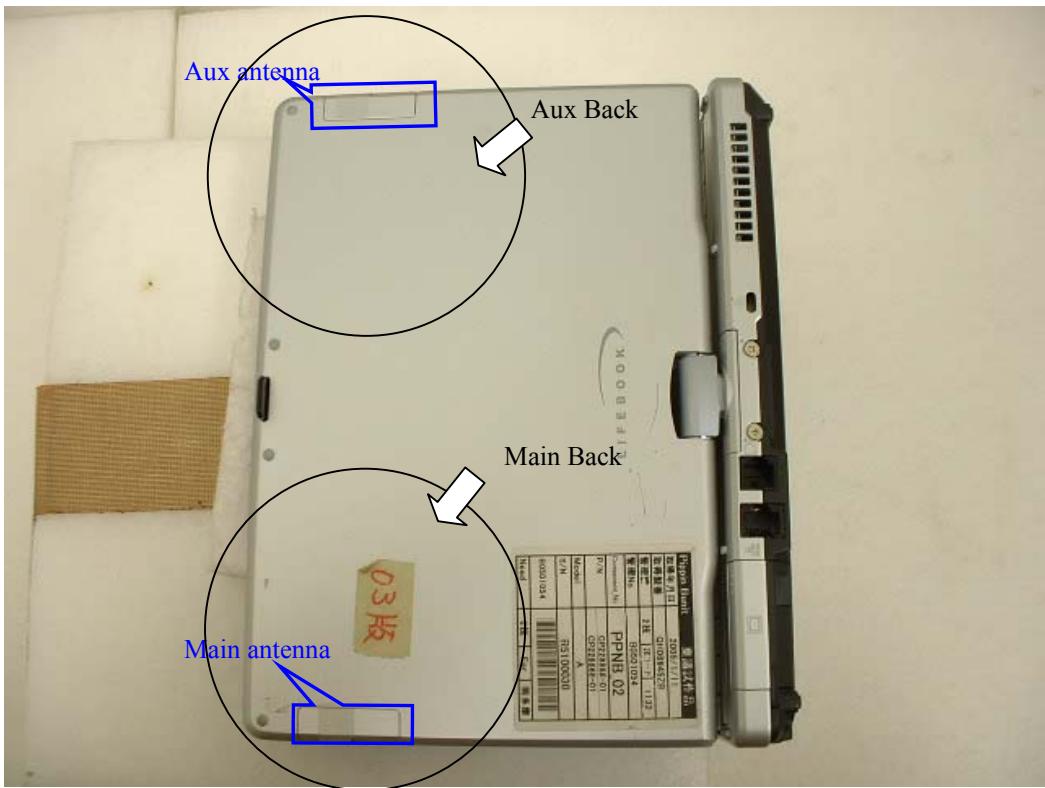**1. Front****2. Back**

---


**UL Apex Co., Ltd.****Head Office EMC Lab.**

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN


Telephone: +81 596 24 8116

Facsimile: +81 596 24 8124

### 3. Bottom

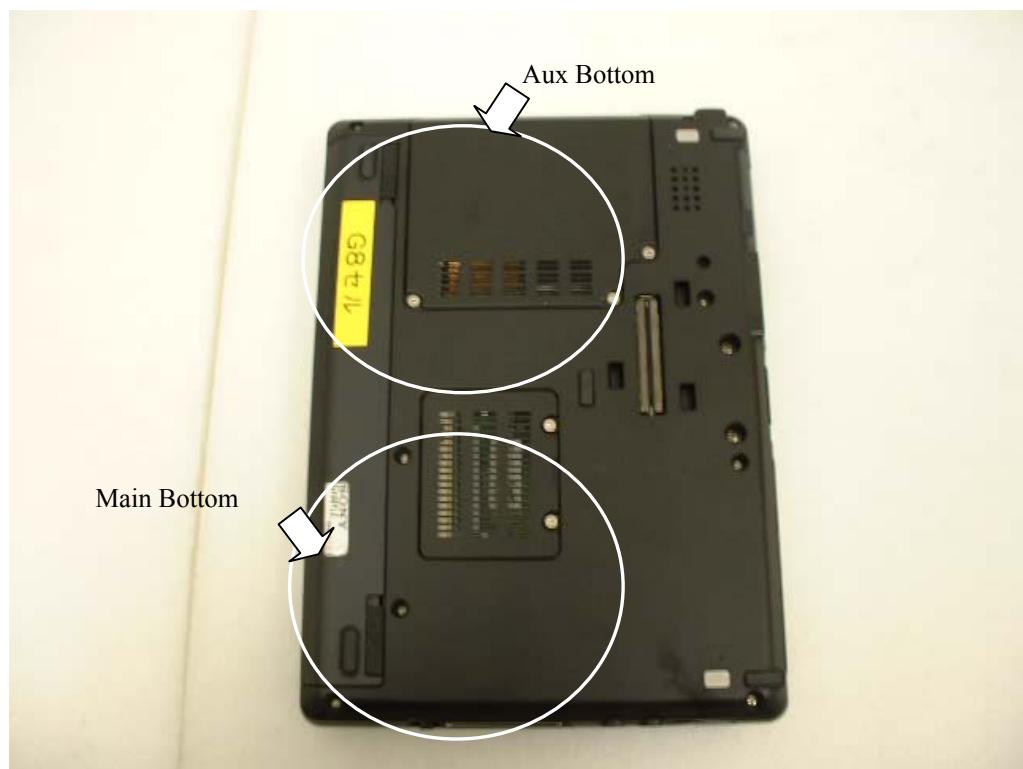

### 4. Main Side

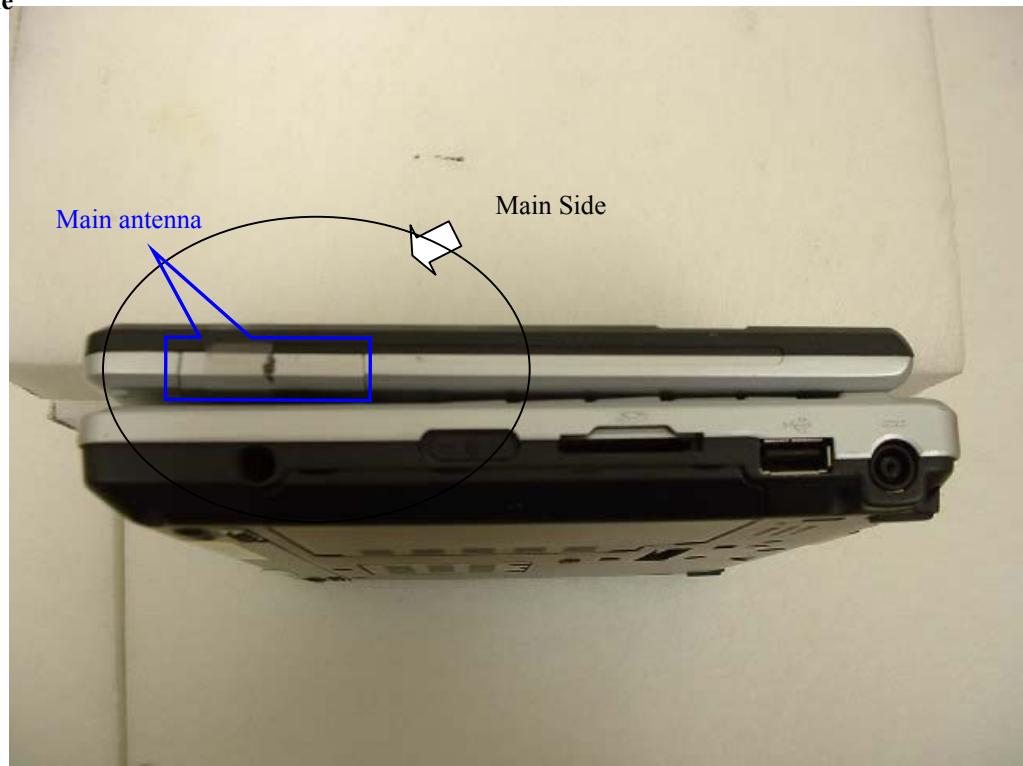

**UL Apex Co., Ltd.**


**Head Office EMC Lab.**

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone: +81 596 24 8116

Facsimile: +81 596 24 8124

5. Aux Side

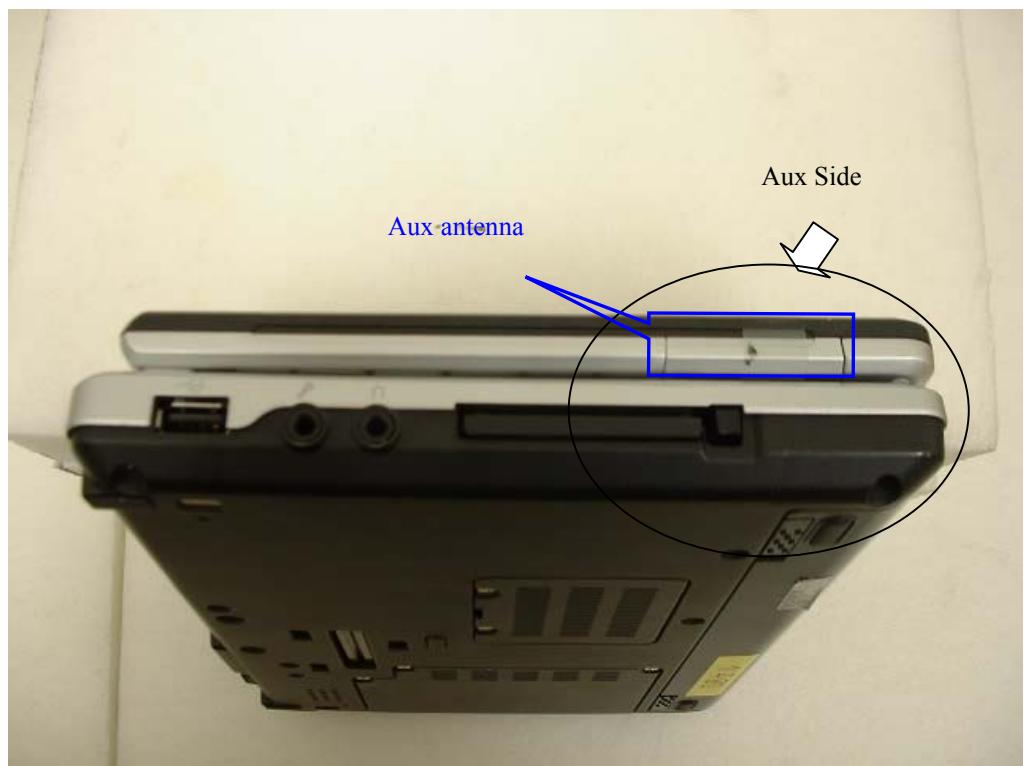

---

**UL Apex Co., Ltd.**

**Head Office EMC Lab.**

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone: +81 596 24 8116

Facsimile: +81 596 24 8124

---

## 6.2 EUT Tune-up procedure

The Wireless LAN module has IEEE.802.11a/b/g.

The frequency range and the modulation used in the testing of IEEE.802.11a are shown as a following.

### 1. IEEE 802.11a

Frequency band	: 5150-5350MHz
Channel	: 36ch(5180MHz),52ch(5260MHz),64ch(5320MHz)
Modulation	: OFDM(BPSK,QPSK,16QAM,64QAM)
Crest factor	: 1
Frequency band	: 5725-5850MHz
Channel number	: 149ch(5745MHz),157ch(5785MHz),165ch(5825MHz)
Modulation	: OFDM(BPSK,QPSK,16QAM,64QAM)
Crest factor	: 1

### 2. IEEE 802.11a / Turbo mode

Frequency band	: 5150-5350MHz
Channel number	: 42ch(5210MHz),50ch(5250MHz),58ch(5290MHz)
Modulation	: OFDM(BPSK,QPSK,16QAM,64QAM)
Crest factor	: 1
Frequency band	: 5725-5850MHz
Channel number	: 152ch(5760MHz),160ch(5800MHz)
Modulation	: OFDM(BPSK,QPSK,16QAM,64QAM)
Crest factor	: 1

### 6.3 Method of measurement

#### 1. Normal mode

Step1. The data rate in the higher peak power of each modulation was decided, then the worst modulation was searched in the SAR testing.

Step2. The changing of the option Battery

The test was performed at worst modulation of Step1.

Step3. The searching of the worst position

This test was performed at the worst modulation of Step1.

Step4. The changing of the frequency

This test was performed at the worst conditions of Step3.

#### 2. Turbo mode

This test in turbo mode test was performed at the worst conditions (Antenna , Modulation and Position) in Normal mode because the difference between Turbo mode and Normal mode was 2 channels transmission at the same time or 1 channel transmission.

#### 3. Distance between PC and Phantom

The measurement was performed with the distance 5mm and 10mm to check if the distance 0mm may not have the worst value at the conditions of the highest SAR value of this EUT. As result, the distance 0mm had the worst value.

## SECTION 7 : Measurement uncertainty

### 7.1 Uncertainty of 802.11a modes testing

The uncertainty budget has been determined for the DASY4 measurement system according to the APPENDIX 8 documents and is given in the following Table.

Error Description	Uncertainty value $\pm$ %	Probability distribution	divisor	(ci) 1g	Standard Uncertainty (1g)	vi or v <sub>eff</sub>
<b>Measurement System</b>						
Probe calibration	$\pm 6.8$	Normal	1	1	$\pm 6.8$	$\infty$
Axial isotropy of the probe	$\pm 4.7$	Rectangular	$\sqrt{3}$	$(1-c_p)^{1/2}$	$\pm 1.9$	$\infty$
Spherical isotropy of the probe	$\pm 9.6$	Rectangular	$\sqrt{3}$	$(c_p)^{1/2}$	$\pm 3.9$	$\infty$
Boundary effects	$\pm 2.0$	Rectangular	$\sqrt{3}$	1	$\pm 1.2$	$\infty$
Probe linearity	$\pm 4.7$	Rectangular	$\sqrt{3}$	1	$\pm 2.7$	$\infty$
Detection limit	$\pm 1.0$	Rectangular	$\sqrt{3}$	1	$\pm 0.6$	$\infty$
Readout electronics	$\pm 1.0$	Normal	1	1	$\pm 1.0$	$\infty$
Response time	$\pm 0.8$	Rectangular	$\sqrt{3}$	1	$\pm 0.5$	$\infty$
Integration time	$\pm 2.6$	Rectangular	$\sqrt{3}$	1	$\pm 1.5$	$\infty$
RF ambient conditions	$\pm 3.0$	Rectangular	$\sqrt{3}$	1	$\pm 1.7$	$\infty$
Mech. constraints of robot	$\pm 0.8$	Rectangular	$\sqrt{3}$	1	$\pm 0.5$	$\infty$
Probe positioning	$\pm 5.7$	Rectangular	1	1	$\pm 5.7$	$\infty$
Extrap. and integration	$\pm 4.0$	Rectangular	$\sqrt{3}$	1	$\pm 2.3$	$\infty$
<b>Test Sample Related</b>						
Device positioning	$\pm 2.9$	Rectangular	$\sqrt{3}$	1	$\pm 2.9$	36
Device holder uncertainty	$\pm 3.6$	Rectangular	$\sqrt{3}$	1	$\pm 3.6$	18
Power drift	$\pm 10.0$	Rectangular	$\sqrt{3}$	1	$\pm 5.8$	$\infty$
<b>Phantom and Setup</b>						
Phantom uncertainty	$\pm 4.0$	Rectangular	$\sqrt{3}$	1	$\pm 2.3$	$\infty$
Liquid conductivity (target)	$\pm 5.0$	Rectangular	$\sqrt{3}$	0.64	$\pm 1.8$	$\infty$
Liquid conductivity (meas.)	$\pm 5.0$	Rectangular	1	0.64	$\pm 3.2$	$\infty$
Liquid permittivity (target)	$\pm 5.0$	Rectangular	$\sqrt{3}$	0.6	$\pm 1.7$	$\infty$
Liquid permittivity (meas.)	$\pm 5.0$	Rectangular	1	0.6	$\pm 3.0$	$\infty$
<b>Combined Standard Uncertainty</b>						
<b>Expanded Uncertainty (k=2)</b>						
<b><math>\pm 14.298</math></b>						
<b><math>\pm 28.6</math></b>						

The test result shows that the power drift exceeded  $\pm 5\%$ . Therefore, the uncertainty of power drift expanded to  $\pm 10\%$ . (Refer to the APPENDIX 8) However, the extended uncertainty (k= 2) of a test is less than 30%.

**UL Apex Co., Ltd.**

**Head Office EMC Lab.**

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone: +81 596 24 8116

Facsimile: +81 596 24 8124

## SECTION 8 : Simulated tissue liquid parameter

### 8.1 Simulated Tissue Liquid Parameter confirmation

The dielectric parameters were checked prior to assessment using the HP85070D dielectric probe kit. The dielectric parameters measurement are reported in each correspondent section.

#### 8.1.1 Muscle 5GHz

Type of liquid : **Muscle 5GHz**  
 Ambient temperature (deg.c.) : **25.0(May 10 and 11)**  
 Relative Humidity (%) : **35(May 10),36(May 11)**  
 Liquid depth (cm) : **15.2**

Measured By : Miyo Ikuta

DIELECTRIC PARAMETERS MEASUREMENT RESULTS								
Date	Frequency [MHz]	Liquid Temp [deg.c]		Parameters	Target Value	Measured	Deviation [%]	Limit [%]
		Before	After					
10-May	5200	25.0	25.0	Relative Permittivity $\epsilon_r$	49.0	46.8	-4.5	+/-5
				Conductivity $\sigma$ [mho/m]	5.30	5.53	4.3	+/-5
10-May	5800	25.0	25.0	Relative Permittivity $\epsilon_r$	48.2	45.8	-5.0	+/-5
				Conductivity $\sigma$ [mho/m]	6.00	6.29	4.8	+/-5
11-May	5800	25.0	25.0	Relative Permittivity $\epsilon_r$	48.2	45.9	-4.8	+/-5
				Conductivity $\sigma$ [mho/m]	6.00	6.3	5.0	+/-5

### 8.2 Simulated Tissues Composition of 5GHz

Ingredient	MIXTURE(%)	
	Head 5GHz	Muscle 5GHz
Water	64.0	78.0
Mineral Oil	18.0	11.0
Emulsifiers	15.0	9.0
Additives and salt	3.0	2.0

**UL Apex Co., Ltd.**

**Head Office EMC Lab.**

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone: +81 596 24 8116

Facsimile: +81 596 24 8124

### 8.3 Decision on Simulated Tissues of 5200MHz

In the current standards (e.g., IEEE P1528, OET 65 Supplement C), the dielectric parameters suggested for head and body tissue simulating liquid are given at 3000MHz and 5800MHz. As an intermediate solution, dielectric parameters for the frequencies between 5000to 5800 MHz were obtained using linear interpolation. Therefore the dielectric parameters of 5200MHz were decided as following.  
(5200MHz Body Tissue/ Relative Permittivity  $\epsilon_r$ : 49.0, Conductivity  $\sigma$  : 5.30 )

f (MHz)	Head Tissue		Body Tissue		Reference
	$\epsilon_r$	$\sigma$ [mho/m]	$\epsilon_r$	$\sigma$ [mho/m]	
3000	38.5	2.40	52.0	2.73	Standard
5800	35.3	5.27	48.2	6.00	Standard
5000	36.2	4.45	49.3	5.07	Interpolated
5100	36.1	4.55	49.1	5.18	Interpolated
5200	36.0	4.66	49.0	5.30	Interpolated
5300	35.9	4.76	48.9	5.42	Interpolated
5400	35.8	4.86	48.7	5.53	Interpolated
5500	35.6	4.96	48.6	5.65	Interpolated
5600	35.5	5.07	48.5	5.77	Interpolated
5700	35.4	5.17	48.3	5.88	Interpolated

Standard and interpolated dielectric parameters for head and body tissue simulating liquid in the frequency range 3000 to 5800MHz.


## SECTION 9 : System validation data

The target values of 5GHz were not defied by IEEE 1528. So, the target values were made into the calibration values of SPEAG. And each of the validation results of 5200MHz and 5800MHz checked (Evaluation of muscle) that it was within +/-10% as compared with the calibration values of SPEAG. The validation results are in the table below. Please refer to APPENDIX5.

Type of liquid : **Muscle 5GHz**  
 Ambient temperature (deg.c.) : **25.0(May 10 and 11)**  
 Relative Humidity (%) : **35(May 10),36(May 11)**  
 Dipole : **D5GHzV2 SN:1020**  
 Power : **250mW**  
 Measured By : Miyo Ikuta

SYSTEM PERFORMANCE CHECK											
Liquid ( Muscle 5100-5800 MHz )								System dipole validation target & measured			
Date	Frequency	Liquid Temp [deg.c.]		Relative Permittivity $\epsilon_r$		Conductivity $\sigma$ [mho/m]		SAR 1g [W/kg]		Deviation [%]	Limit [%]
		Before	After	Target	Measured	Target	Measured	Target	Measured		
10-May	5200	24.5	24.5	49.0	46.8	5.30	5.53	20.5	22.0	7.3	+/-10
10-May	5800	24.0	24.0	49.0	45.8	5.30	6.29	19.6	21.2	8.2	+/-10
11-May	5800	25.0	24.9	48.2	45.9	6.00	6.30	19.6	21.1	7.7	+/-10

Note: Please refer to Attachment for the result representation in plot forma

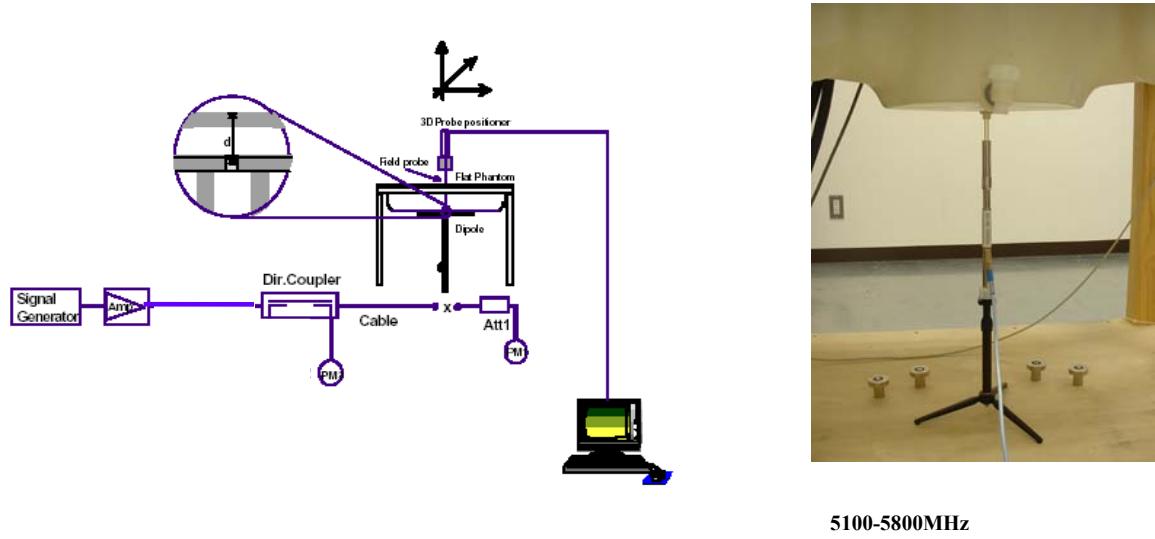

**Test system for the system performance check setup diagram**

---

## **SECTION 10 : Evaluation procedure**

**The evaluation was performed with the following procedure:**

**Step 1:** Measurement of the E-field at a fixed location above the ear point or central position of flat phantom was used as a reference value for assessing the power drop.

**Step 2:** The SAR distribution at the exposed side of head or body position was measured at a distance of each device from the inner surface of the shell. The area covered the entire dimension of the wireless LAN antenna and the horizontal grid spacing was 10mm x 10 mm. Based on these data, the area of the maximum absorption was determined by spline interpolation.

**Step 3:** Around this point found in the Step 2 (area scan), a volume of 30mm x 30mm x 21mm was assessed by measuring 7 x 7 x 8 points. And for any secondary peaks found in the Step2 which are within 2dB of maximum peak and not with this Step3 (Zoom scan) is repeated. On the basis of this data set, the spatial peak SAR value was evaluated under the following procedure:

1. The data at the surface were extrapolated, since the center of the dipoles is 1 mm mm away from the tip of the probe and the distance between the surface and the lowest measuring point is 1.3 mm. The extrapolation was based on a least square algorithm [4]. A polynomial of the fourth order was calculated through the points in z-axes. This polynomial was then used to evaluate the points between the surface and the probe tip.
2. The maximum interpolated value was searched with a straightforward algorithm. Around this maximum the SAR values averaged over the spatial volumes (1 g or 10 g) were computed by the 3D-Spline interpolation algorithm. The 3D-Spline is composed of three one-dimensional splines with the "Not a knot"-condition (in x, y and z-directions) [4], [5]. The volume was integrated with the trapezoidal-algorithm. One thousand points (10 x 10 x 10) were interpolated to calculate the average.
3. All neighboring volumes were evaluated until no neighboring volume with a higher average value was found.

**Step 4:** Re-measurement of the E-field at the same location as in Step 1.

---

**UL Apex Co., Ltd.**

**Head Office EMC Lab.**

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone: +81 596 24 8116

Facsimile: +81 596 24 8124

## **SECTION 11 : Exposure limit**

### **(A) Limits for Occupational/Controlled Exposure (W/kg)**

Spatial Average (averaged over the whole body)	Spatial Peak (averaged over any 1g of tissue)	Spatial Peak (hands/wrists/feet/ankles averaged over 10g)
0.4	8.0	20.0

### **(B) Limits for General population/Uncontrolled Exposure (W/kg)**

Spatial Average (averaged over the whole body)	Spatial Peak (averaged over any 1g of tissue)	Spatial Peak (hands/wrists/feet/ankles averaged over 10g)
0.08	1.6	4.0

**Occupational/Controlled Environments:** are defined as locations where there is exposure that may be incurred by people who are aware of the potential for exposure, (i.e. as a result of employment or occupation).

**General Population/Uncontrolled Environments:** are defined as locations where there is the exposure of individuals who have no knowledge or control of their exposure.

<b>NOTE:GENERAL POPULATION/UNCONTROLLED EXPOSURE SPATIAL PEAK(averaged over any 1g of tissue) LIMIT 1.6 W/kg</b>
--

---

**UL Apex Co., Ltd.**

**Head Office EMC Lab.**

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone: +81 596 24 8116

Facsimile: +81 596 24 8124

**SECTION 12 : SAR Measurement results (5150-5350MHz)[Normal Mode]****12.1 Main Antenna****12.1.1 Conducted power of Main antenna**

<b>[IEEE802.11a 5150-5350MHz : Main Antenna(by the data rate) ]</b>						
Modulation	Data rate [Mbps]	S/A Reading [dBm]	Cable Loss [dB]	Atten. [dB]	Result [dBm]	Converted [mW]
BPSK	6	2.00	1.11	10.00	13.11	20.46
	9	2.01	1.11	10.00	13.12	20.51
QPSK	12	2.13	1.11	10.00	13.24	21.09
	18	2.13	1.11	10.00	13.24	21.09
16QAM	24	2.07	1.11	10.00	13.18	20.80
	36	2.09	1.11	10.00	13.20	20.89
64QAM	48	2.00	1.11	10.00	13.11	20.46
	54	2.17	1.11	10.00	13.28	21.28

**[The worst data rate in SAR result]**

<b>[IEEE802.11a 5150-5350MHz: Main Antenna(9Mbps)]</b>						
Ch	Freq. [MHz]	S/A Reading [dBm]	Cable Loss [dB]	Atten. [dB]	Result [dBm]	Converted [mW]
36	5180.0	1.39	0.94	10.00	12.33	17.12
52	5260.0	2.01	1.11	10.00	13.12	20.49
64	5320.0	1.87	1.04	10.00	12.91	19.54

<b>[IEEE802.11a 5150-5350MHz: Main Antenna(54Mbps)]</b>						
Ch	Freq. [MHz]	S/A Reading [dBm]	Cable Loss [dB]	Atten. [dB]	Result [dBm]	Converted [mW]
36	5180.0	1.52	0.94	10.00	12.46	17.64
52	5260.0	2.17	1.11	10.00	13.28	21.28
64	5320.0	1.99	1.04	10.00	13.03	20.09

### 12.1.2 Body 5150-5350MHz SAR of Main antenna [Normal mode]

Liquid Depth (cm)	: 15.2	Model	: P1510D
Parameters	: $\epsilon_r = 46.8$ , $\sigma = 5.53$	Serial No.	: R5100002
Ambient temperature (deg.c.)	: 25.0	Modulation	: OFDM
Relative Humidity (%)	: 35	Crest factor	: 1

Date : May 10,2005  
 Measured By : Miyo Ikuta

BODY SAR MEASUREMENT RESULTS OF MAIN ANTENNA(IEEE802.11a 5150-5350MHz NORMAL MODE)												
Frequency			Modulation	Phantom Section	EUT Set-up Conditions				Liquid Temp.[deg.c]	SAR(1g) [W/kg]		
Band	Channel	[MHz]			Antenna	Position	Separation [mm]	Before	After	Maximum value of multi-peak		
<b>5150-5350MHz</b>												
<b>Step1 Modulation search</b>												
52	5260	BPSK(9Mbps)	Flat	Main	Main side	0	24.8	24.8	<b>1.04</b>			
52	5260	QPSK(12Mbps)	Flat	Main	Main side	0	24.7	24.5	<b>0.989</b>			
52	5260	16QAM(36Mbps)	Flat	Main	Main side	0	24.5	24.5	<b>0.988</b>			
52	5260	64QAM(54Mbps)	Flat	Main	Main side	0	24.4	24.4	<b>1.01</b>			
<b>Step2 Battery change (option battery) *1</b>												
52	5260	BPSK(9Mbps)	Flat	Main	Main side	0	24.4	24.4	<b>1.03</b>			
<b>Step3 Position search</b>												
52	5260	BPSK(9Mbps)	Flat	Main	Main Front	0	24.4	24.4	<b>0.497</b>			
52	5260	BPSK(9Mbps)	Flat	Main	Main Back	15	24.4	24.4	<b>0.047</b>			
52	5260	BPSK(9Mbps)	Flat	Main	Main Bottom	0	24.4	24.4	<b>0.026</b>			
<b>Step4 Frequency Change</b>												
36	5180	BPSK(9Mbps)	Flat	Main	Main side	0	24.4	24.4	<b>0.736</b>			
64	5320	BPSK(9Mbps)	Flat	Main	Main side	0	24.4	24.4	<b>0.883</b>			
<b>ANSI / IEEE C95.1 1992 - SAFETY LIMIT</b>							<b>Body SAR: 1.6 W/kg (averaged over 1 gram)</b>					
<b>Spatial Peak Uncontrolled Exposure / General Population</b>							<b>Body SAR: 1.6 W/kg (averaged over 1 gram)</b>					

\*1

This EUT has two types of batteries.(The same voltage, only difference of capacity)

The comparison test was performed in the same conditions (Main side / Mid ch / worst modulation) on two types of batteries. As a result, the SAR value of a standard battery was a little higher than the SAR value of the option battery. Therefore, the other tests were performed with a standard battery.

**UL Apex Co., Ltd.**

**Head Office EMC Lab.**

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone: +81 596 24 8116

Facsimile: +81 596 24 8124

## 12.2 Aux Antenna

### 12.2.1 Conducted power of Aux Antenna

[IEEE802.11a 5150-5350MHz: Aux Antenna (by the data rate) ]						
Modulation	Data rate [Mbps]	S/A Reading [dBm]	Cable Loss [dB]	Atten. [dB]	Result [dBm]	Converted [mW]
BPSK	6	1.65	1.11	10.00	12.76	18.88
	9	1.71	1.11	10.00	12.82	19.14
QPSK	12	1.72	1.11	10.00	12.83	19.19
	18	1.68	1.11	10.00	12.79	19.01
16QAM	24	1.72	1.11	10.00	12.83	19.19
	36	1.73	1.11	10.00	12.84	19.22
64QAM	48	1.65	1.11	10.00	12.76	18.88
	54	1.75	1.11	10.00	12.86	19.32

[IEEE802.11a 5150-5350MHz: Aux Antenna(54Mbps) ]						
Ch	Freq. [MHz]	S/A Reading [dBm]	Cable Loss [dB]	Atten. [dB]	Result [dBm]	Converted [mW]
36	5180.0	1.30	0.94	10.00	12.24	16.75
52	5260.0	1.75	1.11	10.00	12.86	19.32
64	5320.0	1.18	1.04	10.00	12.22	16.68

### 12.2.2 Body 5150-5350MHz SAR of Aux antenna [Normal mode]

Liquid Depth (cm)	: 15.2	Model	: P1510D
Parameters	: $\epsilon_r = 46.8$ , $\sigma = 5.53$	Serial No.	: R5100002
Ambient temperature (deg.c.)	: 25.0	Modulation	: OFDM
Relative Humidity (%)	: 34	Crest factor	: 1

Date : May 10,2005  
 Measured By : Miyo Ikuta

BODY SAR MEASUREMENT RESULTS OF AUX ANTENNA(IEEE802.11a 5150-5350MHz NORMAL MODE)												
Frequency			Modulation	Phantom Section	EUT Set-up Conditions			Liquid Temp.[deg.c]		SAR(1g)		
Band	Channel	[MHz]			Antenna	Position	Separation [mm]	Before	After	[W/kg]		
<b>5150-5350MHz</b>												
<b>Step1 Modulation search</b>												
52	5260	BPSK(9Mbps)	Flat	Aux	Aux Side	0	24.5	24.5	<b>0.917</b>			
52	5260	QPSK(12Mbps)	Flat	Aux	Aux Side	0	24.5	24.5	<b>0.850</b>			
52	5260	16QAM(36Mbps)	Flat	Aux	Aux Side	0	24.5	24.5	<b>0.863</b>			
52	5260	64QAM(54Mbps)	Flat	Aux	Aux Side	0	24.5	24.5	<b>0.938</b>			
<b>Step3 Position search</b>												
52	5260	BPSK(54Mbps)	Flat	Aux	Aux Front	0	24.4	24.3	<b>0.391</b>			
52	5260	BPSK(54Mbps)	Flat	Aux	Aux Back	15	24.0	24.0	<b>0.026</b>			
52	5260	BPSK(54Mbps)	Flat	Aux	Aux Bottom	0	24.5	24.5	<b>0.019</b>			
<b>Step4 Frequency Change</b>												
36	5180	BPSK(54Mbps)	Flat	Aux	Aux Side	0	24.5	24.5	<b>0.477</b>			
64	5320	BPSK(54Mbps)	Flat	Aux	Aux Side	0	24.4	24.4	<b>0.591</b>			
<b>ANSI / IEEE C95.1 1992 - SAFETY LIMIT</b>							<b>Body SAR: 1.6 W/kg</b> (averaged over 1 gram)					
<b>Spatial Peak Uncontrolled Exposure / General Population</b>												

**UL Apex Co., Ltd.**

**Head Office EMC Lab.**

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone: +81 596 24 8116

Facsimile: +81 596 24 8124

---

## **SECTION 13 : SAR Measurement results (5725-5850MHz) [Normal mode]**

### **13.1 Main Antenna**

#### **13.1.1 Conducted power of Main antenna**

<b>[IEEE802.11a 5725-5850MHz: Main Antenna (by the data rate) ]</b>						
Modulation	Data rate [Mbps]	S/A Reading [dBm]	Cable Loss [dB]	Atten. [dB]	Result [dBm]	Converted [mW]
BPSK	6	7.67	1.16	10.00	18.83	76.42
	9	7.45	1.16	10.00	18.61	72.65
QPSK	12	7.37	1.16	10.00	18.53	71.32
	18	7.47	1.16	10.00	18.63	72.98
16QAM	24	7.85	1.16	10.00	19.01	79.66
	36	7.66	1.16	10.00	18.82	76.25
64QAM	48	7.72	1.16	10.00	18.88	77.31
	54	8.11	1.16	10.00	19.27	84.57

[The worst data rate in SAR result]

<b>[IEEE802.11a 5725-5850MHz: Main Antenna(54Mbps )]</b>						
Ch	Freq. [MHz]	S/A Reading [dBm]	Cable Loss [dB]	Atten. [dB]	Result [dBm]	Converted [mW]
149	5745.0	8.83	1.20	10.00	20.03	100.67
157	5785.0	8.11	1.16	10.00	19.27	84.57
165	5825.0	7.87	1.19	10.00	19.06	80.57

## 13.1.2 Body 5725-5850MHz SAR of Main antenna [Normal mode]

Liquid Depth (cm)	: 15.2	Model	: P1510D
Parameters	: $\epsilon_r = 45.8$ , $\sigma = 6.29$	Serial No.	: R5100002
Ambient temperature (deg.c.)	: 25.0	Modulation	: OFDM
Relative Humidity (%)	: 35	Crest factor	: 1

Date : May 10,2005  
 Measured By : Miyo Ikuta

BODY SAR MEASUREMENT RESULTS OF MAIN ANTENNA(IEEE802.11a 5725-5850MHz NORMAL MODE)										
Frequency			Modulation	Phantom Section	EUT Set-up Conditions				Liquid Temp.[deg.c]	SAR(1g) [W/kg]
Band	Channel	[MHz]			Antenna	Position	Separation [mm]	Before	After	Maximum value of multi-peak
5725-5850MHz	<b>Step1 Modulation search</b>									
	157	5785	BPSK(6Mbps)	Flat	Main	Main side	0	24.0	24.0	<b>0.265</b>
	157	5785	QPSK(18Mbps)	Flat	Main	Main side	0	24.0	24.0	<b>0.284</b>
	157	5785	16QAM(24Mbps)	Flat	Main	Main side	0	24.1	24.1	<b>0.286</b>
	157	5785	64QAM(54Mbps)	Flat	Main	Main side	0	24.1	24.3	<b>0.296</b>
	<b>Step2 Battery change (option battery)*1</b>									
	157	5785	64QAM(54Mbps)	Flat	Main	Main side	0	24.2	24.3	<b>0.294</b>
	<b>Step3 Position search</b>									
	157	5785	64QAM(54Mbps)	Flat	Main	Main Front	0	24.2	24.3	<b>0.201</b>
	157	5785	64QAM(54Mbps)	Flat	Main	Main Back	15	24.1	24.2	<b>0.028</b>
	157	5785	64QAM(54Mbps)	Flat	Main	Main Bottom	0	24.4	24.2	<b>0.024</b>
	<b>Step4 Frequency Change</b>									
	149	5745	64QAM(54Mbps)	Flat	Main	Main side	0	24.2	24.0	<b>0.349</b>
	165	5825	64QAM(54Mbps)	Flat	Main	Main side	0	24.0	24.1	<b>0.263</b>
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure / General Population								Body SAR: 1.6 W/kg (averaged over 1 gram)		

UL Apex Co., Ltd.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone: +81 596 24 8116

Facsimile: +81 596 24 8124

### 13.2 Aux Antenna

#### 13.2.1 Conducted power of Aux Antenna

[IEEE802.11a Aux Antenna (by the data rate) ]						
Modulation	Data rate	S/A Reading [dBm]	Cable Loss [dB]	Atten. [dB]	Result [dBm]	Converted [mW]
BPSK	6	7.31	1.16	10.00	18.47	70.34
	9	7.38	1.16	10.00	18.54	71.49
QPSK	12	7.15	1.16	10.00	18.31	67.80
	18	7.25	1.16	10.00	18.41	69.38
16QAM	24	7.65	1.16	10.00	18.81	76.07
	36	7.56	1.16	10.00	18.72	74.51
64QAM	48	7.66	1.16	10.00	18.82	76.25
	54	7.91	1.16	10.00	19.07	80.76

[The Worst data rate in SAR result]

[IEEE802.11a: Aux Antenna(9Mbps)]						
Ch	Freq.	S/A Reading [dBm]	Cable Loss [dB]	Atten. [dB]	Result [dBm]	Converted [mW]
149	5745.0	8.32	1.20	10.00	19.52	89.52
157	5785.0	7.38	1.16	10.00	18.54	71.49
165	5825.0	7.18	1.19	10.00	18.37	68.74

[IEEE802.11a: Aux Antenna(54Mbps)]						
Ch	Freq.	S/A Reading [dBm]	Cable Loss [dB]	Atten. [dB]	Result [dBm]	Converted [mW]
149	5745.0	8.80	1.20	10.00	20.00	99.98
157	5785.0	7.91	1.16	10.00	19.07	80.76
165	5825.0	7.64	1.19	10.00	18.83	76.42

UL Apex Co., Ltd.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone: +81 596 24 8116

Facsimile: +81 596 24 8124

### 13.2.2 Body 5725-5850MHz SAR of Aux antenna [Normal mode]

Liquid Depth (cm) : **15.2** Model : **P1510D**  
 Parameters :  $\epsilon_r = 45.9, \sigma = 6.30$  Serial No. : **R5100002**  
 Ambient temperature (deg.c.) : **25.0** Modulation : **OFDM**  
 Relative Humidity (%) : **36** Crest factor : **1**

Date : May 11,2005  
 Measured By : Miyo Ikuta

BODY SAR MEASUREMENT RESULTS OF AUX ANTENNA(IEEE802.11a 5725-5850MHz NORMAL MODE)										
Frequency			Modulation	Phantom Section	EUT Set-up Conditions			Liquid Temp.[deg.c]		SAR(1g)
Band	Channel	[MHz]			Antenna	Position	Separation [mm]	Before	After	[W/kg]
<b>5725-5850MHz Step 1 Modulation search</b>										
157	5785	BPSK(9Mbps)	Flat	Aux	Aux Side	0	24.8	24.7	<b>0.474</b>	
157	5785	QPSK(18Mbps)	Flat	Aux	Aux Side	0	24.7	24.6	<b>0.438</b>	
157	5785	16QAM(24Mbps)	Flat	Aux	Aux Side	0	24.6	24.6	<b>0.434</b>	
157	5785	64QAM(54Mbps)	Flat	Aux	Aux Side	0	24.5	24.5	<b>0.429</b>	
<b>Step 3 Position search</b>										
157	5785	BPSK(9Mbps)	Flat	Aux	Aux Front	0	24.5	24.5	<b>0.250</b>	
157	5785	BPSK(9Mbps)	Flat	Aux	Aux Back	15	24.4	24.3	<b>0.035</b>	
157	5785	BPSK(9Mbps)	Flat	Aux	Aux Bottom	0	24.5	24.5	<b>0.019</b>	
<b>Step 4 Frequency Change</b>										
149	5745	BPSK(9Mbps)	Flat	Aux	Aux Side	0	24.4	24.4	<b>0.546</b>	
165	5825	BPSK(9Mbps)	Flat	Aux	Aux Side	0	24.5	24.5	<b>0.448</b>	
<b>Separation change</b>										
149	5745	BPSK(9Mbps)	Flat	Aux	Aux Side	5	23.5	23.5	<b>0.125</b>	
149	5745	BPSK(9Mbps)	Flat	Aux	Aux Side	10	23.5	23.5	<b>0.068</b>	
<b>ANSI / IEEE C95.1 1992 - SAFETY LIMIT</b>								Body SAR: 1.6 W/kg (averaged over 1 gram)		
<b>Spatial Peak Uncontrolled Exposure / General Population</b>								Body SAR: 1.6 W/kg (averaged over 1 gram)		

**SECTION 14 : SAR Measurement results (5150-5350MHz ,5725-5850MHz) [Turbo model]****14.1 Conducted power**

[The data rate of SAR testing (Main Antenna)]

<b>[IEEE802.11a 5150-5350MHz: Main Antenna(18Mbps[9*2])]</b>					
Freq. [MHz]	S/A Reading [dBm]	Cable Loss [dB]	Atten. [dB]	Result [dBm]	Converted [mW]
Turbo 5210MHz (18Mbps[9*2])	2.37	0.94	10.00	13.31	21.43
Turbo 5250MHz (18Mbps[9*2])	2.08	1.07	10.00	13.15	20.65
Turbo 5290MHz (18Mbps[9*2])	2.12	1.18	10.00	13.30	21.36

[The data rate of SAR testing (Aux Antenna) ]

<b>[IEEE802.11a 5725-5850MHz : Aux Antenna(18Mbps[9*2])]</b>					
Freq. [MHz]	S/A Reading [dBm]	Cable Loss [dB]	Atten. [dB]	Result [dBm]	Converted [mW]
Turbo 5760MHz (18Mbps[9*2])	-0.74	1.15	10.00	10.41	10.99
Turbo 5800MHz (18Mbps[9*2])	-1.31	1.17	10.00	9.86	9.68

<b>[IEEE802.11a 5150-5350MHz: Main Antenna(108Mbps[54*2])]</b>					
Freq. [MHz]	S/A Reading [dBm]	Cable Loss [dB]	Atten. [dB]	Result [dBm]	Converted [mW]
Turbo 5210MHz (108Mbps)	2.40	0.94	10.00	13.34	21.58
Turbo 5250MHz (108Mbps)	2.16	1.07	10.00	13.23	21.04
Turbo 5290MHz (108Mbps)	2.15	1.18	10.00	13.33	21.50

<b>[IEEE802.11a 5725-5850MHz: Main Antenna(108Mbps[54*2])]</b>					
Freq. [MHz]	S/A Reading [dBm]	Cable Loss [dB]	Atten. [dB]	Result [dBm]	Converted [mW]
Turbo 5760MHz (108Mbps)	-0.93	1.15	10.00	10.22	10.52
Turbo 5800MHz (108Mbps)	-1.72	1.17	10.00	9.45	8.81

**UL Apex Co., Ltd.****Head Office EMC Lab.**

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone: +81 596 24 8116

Facsimile: +81 596 24 8124

## 14.2 Body 5150-5350MHz, 5725-5850MHz SAR (Turbo mode)

### Body 5150-5350MHz (Turbo mode)

Liquid Depth (cm)	: 15.2	Model	: P1510D
Parameters	: $\epsilon_r = 46.8$ , $\sigma = 5.53$	Serial No.	: R5100002
Ambient temperature (deg.c.)	: 25.0	Modulation	: OFDM
Relative Humidity (%)	: 34	Crest factor	: 1

### Body 5725-5850MHz SAR (Turbo mode)

Liquid Depth (cm)	: 15.2	Model	: P1510D
Parameters	: $\epsilon_r = 45.9$ , $\sigma = 6.30$	Serial No.	: R5100002
Ambient temperature (deg.c.)	: 25.0	Modulation	: OFDM
Relative Humidity (%)	: 36	Crest factor	: 1

Date : May 10 and 11,2005

Measured By : Miyo Ikuta

BODY SAR MEASUREMENT RESULTS OF TURBO MODE										
Frequency			Modulation	Phantom Section	EUT Set-up Conditions			Liquid Temp.[deg.c]		SAR(1g)[W/kg]
Band	Channel	[MHz]			Antenna	Position	Separation [mm]	Before	After	Maximum value of multi-peak
<b>Turbo mode</b>										
5150-5350MHz	42	5210	BPSK(18Mbps)[9*2]	Flat	Main	Main Side	0	24.0	24.0	0.922
	50	5250	BPSK(18Mbps)[9*2]	Flat	Main	Main Side	0	24.0	24.0	1.05
	58	5290	BPSK(18Mbps)[9*2]	Flat	Main	Main Side	0	24.0	24.0	0.970
<b>Separation change</b>										
5725-5850MHz	50	5250	BPSK(18Mbps)[9*2]	Flat	Main	Main Side	5	24.1	24.1	0.235
	50	5250	BPSK(18Mbps)[9*2]	Flat	Main	Main Side	10	24.3	24.3	0.120
	152	5760	BPSK(18Mbps)[9*2]	Flat	Aux	Aux Side	0	24.3	24.3	0.359
	160	5800	BPSK(18Mbps)[9*2]	Flat	Aux	Aux Side	0	24.3	24.3	0.400
<b>ANSI / IEEE C95.1 1992 - SAFETY LIMIT</b>								<b>Body SAR: 1.6 W/kg (averaged over 1 gram)</b>		
<b>Spatial Peak Uncontrolled Exposure / General Population</b>										

UL Apex Co., Ltd.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone: +81 596 24 8116

Facsimile: +81 596 24 8124

**SECTION 15 : Equipment & calibration information**

Name of Equipment	Manufacture	Model number	Serial number	Calibration	
				Last Cal	due date
Power Meter	Agilent	E4417A	GB41290639	2004/11/09	2005/11/08
Power Sensor	Agilent	E9300B	US40010300	2004/11/15	2005/11/14
Power Sensor	Agilent	E9327A	US40440545	2004/11/23	2005/11/22
Spectrum Analyzer	Agilent	E4448A	MY44020357	2004/06/12	2005/06/11
S-Parameter Network Analyzer	Agilent	8753ES	US39174808	2003/10/23	2006/10/22
Signal Generator	Rohde&Schwarz	SML40	100023	2005/01/05	2006/01/04
RF Amplifier	TSJ	CBP02063033	-	2004/2/24	2005/2/23
Dosimetric E-Field Probe	Schmid&Partner Engineering AG	EX3DV4	1020	2005/1/14	2006/1/13
Data Acquisition Electronics	Schmid&Partner Engineering AG	DAE3	516	2005/3/10	2006/3/09
Robot,SAM Phantom	Schmid&Partner Engineering AG	DASY4	I021834	N/A	N/A
Attenuator	Agilent	US40010300	08498-60012	2004/12/16	2005/12/15
Attenuator	Orient Microwave	BX10-0476-00	-	2005/03/16	2006/03/15
Microwave Cable (Conducted cable)	Suhner	SUCOFLEX 104	233011/4	2005/02/03	2006/02/02
Microwave Cable (Conducted cable)	MIItachi	U.FL-2LP-066-A-(200)	-	2004/07/22	2005/07/21
5GHz System Validation Dipole	Schmid&Partner Engineering AG	D5GHzV2	1020	2004/2/23	2005/2/22
Dual Directional Coupler	N/A	Narda	3702	N/A	N/A
Body 5800MHz	N/A	N/A	N/A	N/A	N/A
Ambient Noise <0.012W/kg	SAR room	-	-	2005/5/10 2005/5/11	-

**UL Apex Co., Ltd.****Head Office EMC Lab.**

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone: +81 596 24 8116

Facsimile: +81 596 24 8124

---

## **SECTION 16 : References**

- [1]ANSI, ANSI/IEEE C95.1-1992: IEEE Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz, The Institute of Electrical and Electronics Engineers, Inc., New York, NY 10017, 1992.
- [2] Katja Pokovic, Thomas Schmid, and Niels Kuster, "Robust setup for precise calibration of E-field probes in tissue simulating liquids at mobile communications frequencies", in ICECOM '97, Dubrovnik, October 15-17, 1997, pp. 120-124.
- [3] Katja Pokovic, Thomas Schmid, and Niels Kuster, "E- field probe with improved isotropy in brain simulating liquids", in Proceedings of the ELMAR, Zadar, Croatia, 23-25 June, 1996, pp.172-175.
- [4] W. Gander, Computermathematik, Birkhaeuser, Basel, 1992.
- [5] W. H. Press, S. A. Teukolsky, W. T. Vetterling, and B. P. Flannery, Numerical Recepies in C, The Art of Scientific Computing, Second Edition, Cambridge University Press, 1992.
- [6] Barry N. Taylor and Christ E. Kuyatt, "Guidelines for evaluating and expressing the uncertainty of NIST measurement results", Tech. Rep., National Institute of Standards and Technology, 1994.