

**EMC Technologies Pty Ltd**

ABN 82 057 105 549  
176 Harrick Road  
Keilor Park  
Victoria Australia 3042

Ph: + 613 9365 1000  
Fax: + 613 9331 7455  
email: melb@emctech.com.au

## SAR Test Report

Report Number: M071143\_CERT\_4965AG\_SAR\_2.4

Test Sample: Portable Tablet Computer  
Radio Modules: WLAN 4965AG & Bluetooth EYTF3CS FT  
Model Number: P1620  
Tested For: Fujitsu Australia Pty Ltd  
FCC ID: EJE-WB0055  
IC: 337J-WB0055  
Date of Issue: 14<sup>th</sup> January 2008

EMC Technologies Pty Ltd reports apply only to the specific samples tested under stated test conditions. It is the manufacturer's responsibility to assure that additional production units of this model are manufactured with identical electrical and mechanical components. EMC Technologies Pty Ltd shall have no liability for any deductions, inferences or generalisations drawn by the client or others from EMC Technologies Pty Ltd issued reports. This report shall not be used to claim, constitute or imply product endorsement by EMC Technologies Pty Ltd.



Nata Accredited Laboratory  
Number: 5292

EMC Technologies is a NATA Accredited Laboratory complying with the requirements specified in ISO/IEC 17025 and results produced are traceable to national standards of measurement. This document shall not be reproduced, except in full.

## CONTENTS

<b>1.0 GENERAL INFORMATION .....</b>	<b>3</b>
<b>2.0 INTRODUCTION .....</b>	<b>4</b>
<b>3.0 SAMPLE TECHNICAL INFORMATION.....</b>	<b>4</b>
3.1 EUT (WLAN) Details.....	4
3.2 EUT (Bluetooth) Details .....	5
3.3 EUT (Notebook PC) Details.....	6
3.4 Test sample Accessories.....	6
3.4.1 Battery Types.....	6
<b>4.0 TEST SIGNAL, FREQUENCY AND OUTPUT POWER .....</b>	<b>7</b>
4.1 Battery Status .....	8
<b>5.0 DETAILS OF TEST LABORATORY .....</b>	<b>8</b>
5.1 Location .....	8
5.2 Accreditations .....	8
5.3 Environmental Factors.....	8
<b>6.0 DESCRIPTION OF SAR MEASUREMENT SYSTEM.....</b>	<b>9</b>
6.1 Probe Positioning System.....	9
6.2 E-Field Probe Type and Performance .....	9
6.3 Data Acquisition Electronics .....	9
6.4 Validation .....	9
6.4.1 Validation Results @ 2450MHz .....	9
6.4.2 Deviation from reference validation values.....	9
6.4.3 Liquid Depth 15cm.....	10
6.5 Phantom Properties (Size, Shape, Shell Thickness).....	11
6.6 Tissue Material Properties.....	12
6.6.1 Liquid Temperature and Humidity.....	12
6.7 Simulated Tissue Composition Used for SAR Test.....	12
6.8 Device Holder for Laptops and P 10.1 Phantom .....	13
<b>7.0 SAR MEASUREMENT PROCEDURE USING DASY4.....</b>	<b>13</b>
<b>8.0 MEASUREMENT UNCERTAINTY .....</b>	<b>14</b>
<b>9.0 EQUIPMENT LIST AND CALIBRATION DETAILS.....</b>	<b>16</b>
<b>10.0 OET BULLETIN 65 – SUPPLEMENT C TEST METHOD.....</b>	<b>17</b>
10.1 Positions .....	17
10.1.1 “Tablet” Position Definition (0mm spacing).....	17
10.1.2 “Edge On” Position.....	17
10.2 List of All Test Cases (Antenna In/Out, Test Frequencies, User Modes).....	17
10.3 FCC RF Exposure Limits for Occupational/ Controlled Exposure.....	18
10.4 FCC RF Exposure Limits for Un-controlled/Non-occupational .....	18
<b>11.0 SAR MEASUREMENT RESULTS .....</b>	<b>19</b>
11.1 2450MHz SAR Results .....	19
<b>12.0 COMPLIANCE STATEMENT.....</b>	<b>20</b>
<b>APPENDIX A1 TEST SAMPLE PHOTOGRAPHS .....</b>	<b>21</b>
<b>APPENDIX A2 TEST SAMPLE PHOTOGRAPHS .....</b>	<b>22</b>
<b>APPENDIX A3 TEST SAMPLE PHOTOGRAPHS .....</b>	<b>23</b>
<b>APPENDIX A4 TEST SETUP PHOTOGRAPHS .....</b>	<b>24</b>
<b>APPENDIX A5 TEST SAMPLE PHOTOGRAPHS .....</b>	<b>25</b>
<b>APPENDIX A6 TEST SAMPLE PHOTOGRAPHS .....</b>	<b>26</b>
<b>APPENDIX A7 TEST SAMPLE PHOTOGRAPHS .....</b>	<b>27</b>
<b>APPENDIX B PLOTS OF THE SAR MEASUREMENTS .....</b>	<b>28</b>
<b>APPENDIX C CALIBRATION DOCUMENTS.....</b>	<b>49</b>



**SAR TEST REPORT****Report Number: M071143\_CERT\_4965AG\_SAR\_2.4****FCC ID: EJE-WB0055****IC: 337J-WB0055****1.0 GENERAL INFORMATION**

**Test Sample:** Portable Tablet Computer  
**Model Name:** P1620  
**Radio Modules:** WLAN 4965AG & Bluetooth EYTF3CS FT  
**Interface Type:** Mini-PCI Module  
**Device Category:** Portable Transmitter  
**Test Device:** Pre-Production Unit  
**FCC ID:** EJE-WB0055  
**IC:** 337J-WB0055  
**RF exposure Category:** General Population/Uncontrolled

**Manufacturer:** Fujitsu Limited

**Test Standard/s:**

1. Evaluating Compliance with FCC Guidelines For Human Exposure to Radiofrequency Electromagnetic Fields Supplement C (Edition 01-01) to OET Bulletin 65 (Edition 97-01)
2. Evaluation Procedure for Mobile and Portable Radio Transmitters with respect to Health Canada's Safety Code 6 for Exposure of Humans to Radio Frequency Fields. RSS-102 Issue 1 (Provisional) September 25, 1999

**Statement Of Compliance:** The Fujitsu Tablet Computer P1620 with Wireless LAN model 4965AG and Bluetooth module EYTF3CS FT complied\* with the FCC General public/uncontrolled RF exposure limits of 1.6mW/g per requirements of 47CFR2.1093(d). It also complied with IC RSS-102 requirements.

\*. Refer to compliance statement section 9.

**Test Date:** 7<sup>th</sup> & 10<sup>th</sup> December 2007


**Tested for:** Fujitsu Australia Pty Ltd  
**Address:** 1230 Nepean Highway, Cheltenham VIC 3192  
**Contact:** Praveen Rao  
**Phone:** +61 3 9265 0210  
**Fax:** +61 3 9265 0656

**Test Officer:**



\_\_\_\_\_  
**Kim H Long**  
Test Engineer

**Authorised Signature:**



\_\_\_\_\_  
**Chris Zombolas**  
Technical Director



**SAR TEST REPORT**  
**Portable Tablet Computer**  
**Model: P1620**  
**Report Number: M071143\_CERT\_4965AG\_SAR\_2.4**

## 2.0 INTRODUCTION

Testing was performed on the Fujitsu Tablet PC, Model: P1620 with INTEL Mini-PCI Wireless LAN Module (KEDRON 802.11a/b/g), Model: 4965AG & TAIYO YUDEN Bluetooth Module, Model: EYTF3CS FT. The KEDRON module is an OEM product. The Mini-PCI Wireless LAN (WLAN) was tested in the dedicated host – RYUGA, Model P1620.

The measurement test results mentioned hereon only apply to the 2450MHz frequency band; an additional report titled “M071143\_CERT\_4965AG\_SAR\_5.6” applies to the 5GHz range.

## 3.0 SAMPLE TECHNICAL INFORMATION

(Information supplied by the client)

### 3.1 EUT (WLAN) Details

<b>Transmitter:</b>	Mini-Card Wireless LAN Module
<b>Wireless Module:</b>	Kedron (11a/b/g)
<b>Model Number:</b>	4965AG
<b>Manufacturer:</b>	Intel Corporation
<b>Modulation Type:</b>	DSSS for 802.11b OFDM for 802.11g OFDM for 802.11a
<b>5GHz (802.11a)</b>	BPSK, QPSK, 16QAM, 64QAM
<b>2.4GHz (802.11b/g)</b>	CCK, DQPSK, DBPSK, 16QAM, 64QAM
<b>Maximum Data Rate:</b>	802.11b = 11 Mbps, 802.11g and 802.11a = 54 Mbps
<b>Frequency Range:</b>	2.412–2.462 GHz for 802.11b/g 5.18-5.32 GHz and 5.745-5.825 GHz for 802.11a
<b>Number of Channels:</b>	11 channels for 802.11b/g 13 channels for 802.11a
<b>Antenna Types:</b>	Nissei Electric Inverted F Antenna - Model: CP313544(Main:Rihgt), CP313545(Aux:Left)
<b>Antenna gain:</b>	Location: Top edge of LCD screen Please refer antenna data provided separately
<b>Power Supply:</b>	3.3 VDC from PCI bus



**Channels Tested and Output power setting:**

Channel and Mode	Frequency MHz	Average Output Power dBm
<b>802.11b/g mode</b>		
Channels 1, 6 and 11	2412, 2437 and 2462	15.5
<b>802.11a mode</b>		
Channels 36	5180	16.5
Channels 48	5240	16.5
Channels 52	5260	16.5
Channels 64	5320	16.5
Channels 149	5745	17.5
Channels 157	5785	17.5
Channels 165	5825	17.5

NOTE: For 5GHz SAR results refer to report titled "M071143\_CERT\_4965AG\_SAR\_5.6".

**3.2 EUT (Bluetooth) Details**

**Transmitter:** Bluetooth  
**Model Number:** EYTF3CS FT  
**Manufacturer:** TAIYO YUDEN  
**Network Standard:** Bluetooth™ RF Test Specification  
**Modulation Type:** Frequency Hopping Spread Spectrum (FHSS)  
**Frequency Range:** 2402 MHz to 2480 MHz  
**Number of Channels:** 79  
**Carrier Spacing:** 1.0 MHz  
**Antenna Types:** Nissei Electric Inverted F Antenna, Model: CP115428  
 Location: Right palm rest corner  
**Antenna gain:** Please refer antenna data provided separately  
**Max. Output Power:** 4 dBm  
**Reference Oscillator:** 16 MHz (Built-in)  
**Power Supply:** 3.3 VDC from host.

**Frequency allocation:**

Channel Number	Frequency (MHz)	Bluetooth Utility power setting
1	2402	Power (Ext, Int) = 0, 96
2	2403	
3	2404	
.	.	
.	.	
39	2440	
40*	2441	
41	2442	
.	.	
.	.	
77	2478	
78	2479	
79	2480	

\*Channels Tested



### 3.3 EUT (Notebook PC) Details

<b>EUT:</b>	RYUGA
<b>Model Name:</b>	P1620
<b>Serial Number:</b>	Pre-production Sample
<b>Manufacturer:</b>	FUJITSU LIMITED
<hr/>	
<b>CPU Type and Speed:</b>	Core2 Duo T7700 2.4GHz
<b>LCD</b>	12" SXGA+ / 12" XGA
<b>Wired LAN:</b>	Marvell 88E8055 : 10 Base-T/100 Base-TX/1000Base-T
<b>Modem:</b>	Agere MDC1.5 modem Model: D40
<b>Port Replicator Model:</b>	FPCPR65
<hr/>	
<b>AC Adapter Model:</b>	SEC100P2-19.0(Sanken) / SEC100P3-19.0(Sanken, 3pin) / ADP-80NB A(Delta)
<b>Voltage:</b>	19 V
<b>Current Specs:</b>	4.22A
<b>Watts:</b>	80W

### 3.4 Test sample Accessories

#### 3.4.1 Battery Types

One type of Fujitsu Lithium Ion Battery is used to power the Portable Tablet Computer Wireless LAN Model: 4965ABG. SAR measurements were performed with the battery as shown below.

#### Standard Battery

Model	Standard Battery	Extended Battery
Type:	Li-ion	Li-ion
V/mAh	10.8V/2600mAh	10.8V/5200mAh
Cell No.	6	6





## 4.1 Battery Status

The device battery was fully charged prior to commencement of measurement. Each SAR test was completed within 30 minutes. The battery condition was monitored by measuring the RF field at a defined position inside the phantom before the commencement of each test and again after the completion of the test. It was not possible to perform conducted power measurements at the output of the device, at the beginning and end of each scan due to lack of a suitable antenna port. The uncertainty associated with the power drift was less than 12% and was assessed in the uncertainty budget.

## 5.0 DETAILS OF TEST LABORATORY

### 5.1 Location

EMC Technologies Pty Ltd  
176 Harrick Road  
Keilor Park, (Melbourne) Victoria  
Australia 3042

**Telephone:** +61 3 9365 1000  
**Facsimile:** +61 3 9331 7455  
**email:** [melb@emctech.com.au](mailto:melb@emctech.com.au)  
**website:** [www.emctech.com.au](http://www.emctech.com.au)

### 5.2 Accreditations

EMC Technologies Pty. Ltd. is accredited by the National Association of Testing Authorities, Australia (NATA).  
**NATA Accredited Laboratory Number: 5292**

EMC Technologies Pty Ltd is NATA accredited for the following standards:

<b>AS/NZS 2772.1:</b>	RF and microwave radiation hazard measurement
<b>ACA:</b>	Radio communications (Electromagnetic Radiation - Human Exposure) Standard 2003
<b>FCC:</b>	Guidelines for Human Exposure to RF Electromagnetic Field OET65C 01/01
<b>EN 50360: 2001</b>	Product standard to demonstrate the compliance of mobile phones with the basic restrictions related to human exposure to electromagnetic fields (300 MHz – 3 GHz)
<b>EN 50361: 2001</b>	Basic standard for the measurement of Specific Absorption Rate related to human exposure to electromagnetic fields from mobile phones (300MHz – 3GHz)
<b>IEEE 1528: 2003</b>	Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head Due to Wireless Communications Devices: Measurement Techniques.

Refer to NATA website [www.nata.asn.au](http://www.nata.asn.au) for the full scope of accreditation.

### 5.3 Environmental Factors

The measurements were performed in a shielded room with no background RF signals. The temperature in the laboratory was controlled to within  $21\pm 1^{\circ}\text{C}$ , the humidity was in the range 44% to 62%. The liquid parameters are measured daily prior to the commencement of each test. Tests were performed to check that reflections within the environment did not influence the SAR measurements. The noise floor of the DASY4 SAR measurement system using the SN1377 probe was less than  $5\mu\text{V}$  in both air and liquid mediums.





## 6.0 DESCRIPTION OF SAR MEASUREMENT SYSTEM

### 6.1 Probe Positioning System

The measurements were performed with the state-of-the-art automated near-field scanning system **DASY4 V4.7 Build 53** from Schmid & Partner Engineering AG (SPEAG). The system is based on a high precision 6-axis robot (working range greater than 1.1m), which positions the SAR measurement probes with a positional repeatability of better than  $\pm 0.02$  mm. The DASY4 fully complies with the OET65 C (01-01), IEEE 1528 and EN50361 SAR measurement requirements.

### 6.2 E-Field Probe Type and Performance

The SAR measurements were conducted with SPEAG dosimetric probe ET3DV6 Serial: 1377 (2.45 GHz) designed in the classical triangular configuration and optimised for dosimetric evaluation. The probes have been calibrated and found to be accurate to better than  $\pm 0.25$  dB. The probe is suitable for measurements close to material discontinuity at the surface of the phantom. The sensors of the probe are directly loaded with Schottky diodes and connected via highly resistive lines (length = 300 mm) to the data acquisition unit.

### 6.3 Data Acquisition Electronics

The data acquisition electronics (DAE3) consists of a highly sensitive electrometer-grade preamplifier with auto-zeroing, a channel and gain switching multiplexer, a fast 16 bit AD-converter and a command decoder and control logic unit. The input impedance of the DAE3 box is 200 M $\Omega$ ; the inputs are symmetrical and floating. Common mode rejection is above 80dB. Transmission to the PC-card is accomplished through an optical downlink for data and status information as well as an optical uplink for commands and the clock.

The mechanical probe-mounting device includes two different sensor systems for frontal and sideways probe contacts. They are used for mechanical surface detection and probe collision detection.

### 6.4 Validation

#### 6.4.1 Validation Results @ 2450MHz

The following tables lists the dielectric properties of the tissue simulating liquid measured prior to SAR validation. The results of the validation are listed in columns 4 and 5. The forward power into the reference dipole for SAR validation was adjusted to 250 mW.

**Table: Validation Results (Dipole: SPEAG D2450V2 SN: 724)**

1. Validation Date	2. $\epsilon_r$ (measured)	3. $\sigma$ (mho/m) (measured)	4. Measured SAR 1g (mW/g)	5. Measured SAR 10g (mW/g)
7 <sup>th</sup> Dec 07	39.7	1.81	13.8	6.53
10 <sup>th</sup> Dec 07	40.0	1.80	13.8	6.47

#### 6.4.2 Deviation from reference validation values

The reference SAR values are derived using a reference dipole and flat section of the SAM phantom suitable for a centre frequency of 2450MHz. These reference SAR values are obtained from the IEEE Std 1528-2003 and are normalized to 1W.

The SPEAG calibration reference SAR value is the SAR validation result obtained in a specific dielectric liquid using the validation dipole (D2450V2) during calibration. The measured one-gram SAR should be within 10% of the expected target reference values shown in table below (2450MHz) below.

**Table: Deviation from reference validation values @ 2450MHz**

Frequency and Date	Measured SAR 1g (mW/g)	Measured SAR 1g (Normalized to 1W)	SPEAG Calibration reference SAR Value 1g (mW/g)	Deviation From SPEAG Reference (1g) %	IEEE Std 1528 reference SAR value 1g (mW/g)	Deviation From IEEE (1g) %
2450MHz	13.8	55.2	55.6	-0.72	52.4	5.34
2450MHz	13.8	55.2	55.6	-0.72	52.4	5.34

NOTE: All reference validation values are referenced to 1W input power.

**6.4.3 Liquid Depth 15cm**

During the SAR measurement process the liquid level was maintained to a level of 15cm with a tolerance of 0.5cm.



Photo of liquid Depth in Flat Phantom



### 6.6 Tissue Material Properties

The dielectric parameters of the brain simulating liquid were measured prior to SAR assessment using the HP85070A dielectric probe kit and HP8753ES Network Analyser. The actual dielectric parameters are shown in the following table.

**Table: Measured Brain Simulating Liquid Dielectric Values for Validations**

Frequency Band	$\epsilon_r$ (measured range)	$\epsilon_r$ (target)	$\sigma$ (mho/m) (measured range)	$\sigma$ (target)	$\rho$ kg/m <sup>3</sup>
2450 MHz Brain	40.0	39.2 ±5% (37.2 to 41.2)	1.80	1.80 ±5% (1.71 to 1.89)	1000

NOTE: The brain liquid parameters were within the required tolerances of ±5%.

**Table: Measured Body Simulating Liquid Dielectric Values**

Frequency Band	$\epsilon_r$ (measured range)	$\epsilon_r$ (target)	$\sigma$ (mho/m) (measured range)	$\sigma$ (target)	$\rho$ kg/m <sup>3</sup>
2412 MHz Muscle	52.3	52.7 ±5% (50.1 to 55.3)	1.91	1.95 ±5% (1.85 to 2.05)	1000
2437 MHz Muscle	52.2	52.7 ±5% (50.1 to 55.3)	1.95	1.95 ±5% (1.85 to 2.05)	1000
2462 MHz Muscle	52.0	52.7 ±5% (50.1 to 55.3)	1.98	1.95 ±5% (1.85 to 2.05)	1000

NOTE: The brain and muscle liquid parameters were within the required tolerances of ±5%.

#### 6.6.1 Liquid Temperature and Humidity

The humidity and dielectric/ambient temperatures were recorded during the assessment of the tissue material dielectric parameters. The difference between the ambient temperature of the liquid during the dielectric measurement and the temperature during tests was less than |2|°C.

**Table: Temperature and Humidity recorded for each day**

Date	Ambient Temperature (°C)	Liquid Temperature (°C)	Humidity (%)
7 <sup>th</sup> November 2007	21.1	20.9	62
10 <sup>th</sup> November 2007	21.9	21.4	44

### 6.7 Simulated Tissue Composition Used for SAR Test

The tissue simulating liquids are created prior to the SAR evaluation and often require slight modification each day to obtain the correct dielectric parameters.

**Table: Tissue Type: Brain @ 2450MHz**  
Volume of Liquid: 30 Litres

Approximate Composition	% By Weight
Distilled Water	62.7
Salt	0.5
Triton X-100	36.8

**Table: Tissue Type: Muscle @ 2450MHz**  
Volume of Liquid: 60 Litres

Approximate Composition	% By Weight
Distilled Water	73.2
Salt	0.04
DGBE	26.7

\*Refer "OET Bulletin 65 97/01 P38"



## 6.8 Device Holder for Laptops and P 10.1 Phantom

A low loss clamp was used to position the Tablet underneath the phantom surface. Small pieces of foam were then used to press the Tablet flush against the phantom surface.

*Refer to Appendix A for photographs of device positioning*

## 7.0 SAR MEASUREMENT PROCEDURE USING DASY4

The SAR evaluation was performed with the SPEAG DASY4 system. A summary of the procedure follows:

- a) A measurement of the SAR value at a fixed location is used as a reference value for assessing the power drop of the EUT. The SAR at this point is measured at the start of the test, and then again at the end of the test.
- b) The SAR distribution at the exposed flat section of the flat phantom is measured at a distance of 3.9 mm from the inner surface of the shell. The area covers the entire dimension of the EUT and the horizontal grid spacing is 15 mm x 15 mm. The actual Area Scan has dimensions of 81 mm x 201 mm surrounding the test device. Based on this data, the area of the maximum absorption is determined by Spline interpolation. The first “pre-scans” covered an area of 111 mm x 141 mm to ensure that the hotspot was correctly identified.
- c) Around this point, a volume of 30 mm x 30 mm x 30 mm is assessed by measuring 7 x 7 x 7 points. On the basis of this data set, the spatial peak SAR value is evaluated with the following procedure:
  - (i) The data at the surface are extrapolated, since the centre of the dipoles is 2.7 mm away from the tip of the probe and the distance between the surface and the lowest measuring point is 1.2 mm. The extrapolation is based on a least square algorithm. A polynomial of the fourth order is calculated through the points in z-axes. This polynomial is then used to evaluate the points between the surface and the probe tip.
  - (ii) The maximum interpolated value is searched with a straightforward algorithm. Around this maximum the SAR values averaged over the spatial volumes (1 g and 10 g) are computed using the 3D-Spline interpolation algorithm. The 3D-Spline is composed of three one-dimensional splines with the “Not a knot”- condition (in x, y and z-direction). The volume is integrated with the trapezoidal – algorithm. One thousand points (10 x 10 x 10) are interpolated to calculate the averages.
  - (iii) All neighbouring volumes are evaluated until no neighbouring volume with a higher average value is found.
  - (iv) The SAR value at the same location as in Step (a) is again measured to evaluate the actual power drift.



**Table: Uncertainty Budget for DASY4 V4.7 Build 53 – Validation 2450MHz**

a	b	c	D	e= f(d,k)	f	g	h=cxf/e	i=cxg/e	k
Uncertainty Component	Sec.	Tol. (6%)	Prob. Dist.	Div.	C <sub>i</sub> (1g)	C <sub>i</sub> (10g)	1g u <sub>i</sub> (6%)	10g u <sub>i</sub> (6%)	v <sub>i</sub>
<b>Measurement System</b>									
Probe Calibration (k=1) (standard calibration)	E.2.1	4.8	N	1	1	1	4.8	4.8	∞
Axial Isotropy	E.2.2	4.7	R	1.73	1	1	2.7	2.7	∞
Hemispherical Isotropy	E.2.2	0	R	1.73	1	1	0.0	0.0	∞
Boundary Effect	E.2.3	1	R	1.73	1	1	0.6	0.6	∞
Linearity	E.2.4	4.7	R	1.73	1	1	2.7	2.7	∞
System Detection Limits	E.2.5	1	R	1.73	1	1	0.6	0.6	∞
Readout Electronics	E.2.6	1	N	1	1	1	1.0	1.0	∞
Response Time	E.2.7	0	R	1.73	1	1	0.0	0.0	∞
Integration Time	E.2.8	0	R	1.73	1	1	0.0	0.0	∞
RF Ambient Conditions	E.6.1	0.05	R	1.73	1	1	0.0	0.0	∞
Probe Positioner Mechanical Tolerance	E.6.2	0.4	R	1.73	1	1	0.2	0.2	∞
Probe Positioning with respect to Phantom Shell	E.6.3	2.9	R	1.73	1	1	1.7	1.7	∞
Extrapolation, interpolation and Integration Algorithms for Max. SAR Evaluation	E.5	1	R	1.73	1	1	0.6	0.6	∞
<b>Test Sample Related</b>									
Dipole Axis to Liquid Surface		2	R	1.73	1	1	1.2	1.2	∞
Power Drift		4.7	R	1.73	1	1	2.7	2.7	∞
				□					□
<b>Phantom and Tissue Parameters</b>									
Phantom Uncertainty (shape and thickness tolerances)	E.3.1	4	R	1.73	1	1	2.3	2.3	∞
Liquid Conductivity – Deviation from target values	E.3.2	5	R	1.73	0.6	0.43	1.7	1.2	∞
Liquid Conductivity – Measurement uncertainty	E.3.3	2.5	N	1.73	0.6	0.43	0.9	0.6	5
Liquid Permittivity – Deviation from target values	E.3.2	5	R	1.73	0.6	0.49	1.7	1.4	∞
Liquid Permittivity – Measurement uncertainty	E.3.3	2.5	N	1.73	0.6	0.49	0.9	0.7	5
Combined standard Uncertainty			RSS				8.0	7.8	154
Expanded Uncertainty (95% CONFIDENCE LEVEL)			k=2				16.0	15.63	

Estimated total measurement uncertainty for the DASY4 measurement system was ±8.0%. The extended uncertainty (K = 2) was assessed to be ±16.0% based on 95% confidence level. The uncertainty is not added to the Validation measurement result.







## 10.0 OET BULLETIN 65 – SUPPLEMENT C TEST METHOD

Notebooks should be evaluated in normal use positions, typical for lap-held bottom-face only. However the number of positions will depend on the number of configurations the laptop can be operated in. The “RYUGA” can be used in either a conventional laptop position (see Appendix A1) or a Tablet configuration. The antenna location in the “RYUGA” is closest to the top of the screen when used in a conventional laptop configuration and due to the separation distances involved between the phantom and the laptop antenna, testing is not required in this position.

### 10.1 Positions

Applicable Head Configurations	: None
Applicable Body Configurations	: Tablet Position
	: Edge On Position

The “RYUGA” Portable PCs use interactive screen modes that allow the user to place their arms/hands on the screen. To account for occasional exposure to the arms, SAR tests were performed with the PC screen facing the phantom.

Therefore SAR measurements were performed with the front and back of the laptop facing the flat section of the AndreT Flat phantom (P 10.1). See Appendix A for photos of test positions.

#### 10.1.1 “Tablet” Position Definition (0mm spacing)

The device was tested in the 2.00 mm flat section of the AndreT Flat phantom P 10.1 for the “Tablet” position. The Transceiver was placed at the bottom of the phantom and suspended in such way that the back of the device was touching the phantom. This device orientation simulates the PC’s normal use – being held on the lap of the user. A spacing of 0mm ensures that the SAR results are conservative and represent a worst-case position.

#### 10.1.2 “Edge On” Position

The device was tested in the (2.00 mm) flat section of the AndreT phantom for the “Edge On” position. The Antenna edge of the Transceiver was placed underneath the flat section of the phantom and suspended until the edge touched the phantom. Refer to Appendix A for photos of measurement positions.

### 10.2 List of All Test Cases (Antenna In/Out, Test Frequencies, User Modes)

The device has a fixed antenna. Depending on the measured SAR level up to three test channels with the test sample operating at maximum power, as specified in section 4.0 were recorded. The following table represents the matrix used to determine what testing was required. The worst case result was verified with the Bluetooth transmitting at full power in co-transmission with the WLAN.

**Table: Testing configurations**

Phantom Configuration	*Device Mode	Antenna	Test Configurations		
			CHANNEL (LOW)	Channel (Middle)	Channel (High)
Tablet	DSSS 2.4GHz	A		X	
		B		X	
Edge On	OFDM 2.4GHz	A		X	
		B		X	
	DSSS 2.4GHz	A		X	
		B		X	

#### Legend

X Testing Required in this configuration

Testing required in this configuration only if SAR of middle channel is more than 3dB below the SAR limit or it is the worst case.



### 10.3 FCC RF Exposure Limits for Occupational/ Controlled Exposure

Spatial Peak SAR Limits For:	
Partial-Body:	8.0 mW/g (averaged over any 1g cube of tissue)
Hands, Wrists, Feet and Ankles:	20.0 mW/g (averaged over 10g cube of tissue)

### 10.4 FCC RF Exposure Limits for Un-controlled/Non-occupational

Spatial Peak SAR Limits For:	
Partial-Body:	1.6 mW/g (averaged over any 1g cube of tissue)
Hands, Wrists, Feet and Ankles:	4.0 mW/g (averaged over 10g cube of tissue)

## 11.0 SAR MEASUREMENT RESULTS

The SAR values averaged over 1g tissue masses were determined for the sample device for all test configurations listed in section 7.2.

### 11.1 2450MHz SAR Results

There are two modes of operation within the 2450MHz band, they include OFDM and DSSS modulations. Refer to section 7.2 for selection of all device test configurations. Table below displays the SAR results.

**Table: SAR MEASUREMENT RESULTS – DSSS Mode**

Test Position	Plot No.	Ant	Bit rate Mode (Mbps)	Channel Bandwidth (MHz)	Test Channel	Test Freq (MHz)	Measured 1g SAR Results (mW/g)	Measured Drift (dB)
*Tablet	1	A	1	-	06	2437	Pre-scan 0.09	0.14
*Tablet	2	B	1	-	06	2437	Pre-scan 0.15	0.08
Edge On Side	3	A	1	-	06	2437	0.11	-0.18
Edge On Side	4	B	1	-	06	2437	0.25	0.06
Edge On Top	5	B	1	-	01	2412	0.68	-0.44
Edge On Top	6	B	1	-	06	2437	0.76	-0.14
Edge On Top	7	B	1	-	11	2462	0.69	-0.19
Edge On Top	8	A	1	-	06	2437	0.64	-0.39
Edge On Top w/ Extended Battery	9	B	1	-	06	2437	0.08	-0.30
Edge On Top w/ BT	10	B	1	-	06	2437	0.65	-0.14

NOTE: The measurement uncertainty of 22.2% for 2.45GHz was not added to the result.

**Table: SAR MEASUREMENT RESULTS – OFDM Mode**

Test Position	Plot No.	Ant	Bit rate Mode (Mbps)	Channel Bandwidth (MHz)	Test Channel	Test Freq (MHz)	Measured 1g SAR Results (mW/g)	Measured Drift (dB)
Edge On Top	11	A	6	-	06	2437	0.64	-0.04
	12	B	6	-	06	2437	0.69	0.00

NOTE: The measurement uncertainty of 22.2% for 2.45GHz was not added to the result.

The highest SAR level recorded in the 2450MHz band was 0.76 mW/g as evaluated in a 1g cube of averaging mass. This value was obtained in Edge On Top position in DSSS mode, utilizing channel 06 (2437 MHz) and antenna B. The Bluetooth was ON at the Frequency of 2441 MHz.

## 12.0 COMPLIANCE STATEMENT

The Fujitsu Tablet PC, Model: P1620 with INTEL Mini-PCI Wireless LAN Module (KEDRON 802.11a/b/g), Model: 4965AG & TAIYO YUDEN Bluetooth Module, Model: EYTF3CS FT was found to comply with the FCC and RSS-102 SAR requirements.

The highest SAR level recorded was 0.76 mW/g for a 1g cube. This value was measured at 2437 MHz (channel 06) in the "Edge On Top" position in DSSS modulation mode at the antenna B. The Bluetooth was ON at Frequency 2441 MHz. This was below the limit of 1.6 mW/g for uncontrolled exposure, even taking into account the measurement uncertainty of 22.2 %.



### APPENDIX A1 TEST SAMPLE PHOTOGRAPHS

P1620 Host - Conventional Laptop Configuration




P1620 Host - Tablet Configuration




### APPENDIX A2 TEST SAMPLE PHOTOGRAPHS

Model: 4965AG – WLAN Module

Front

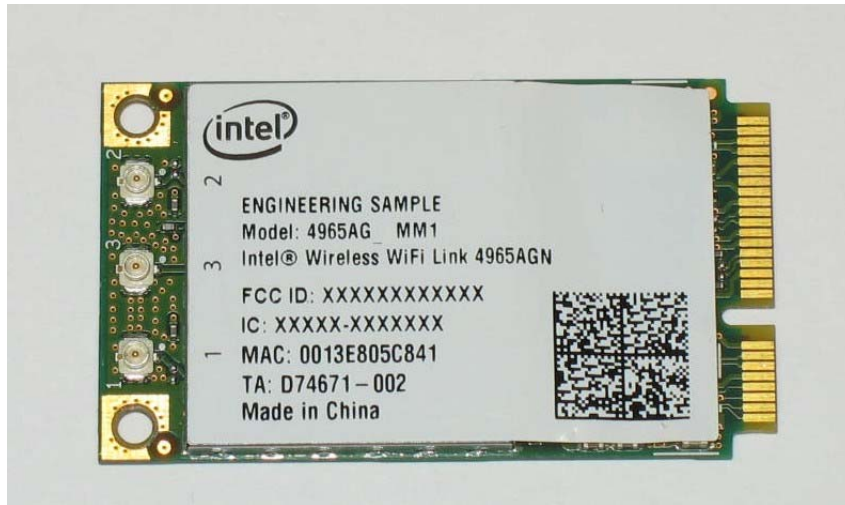

Back

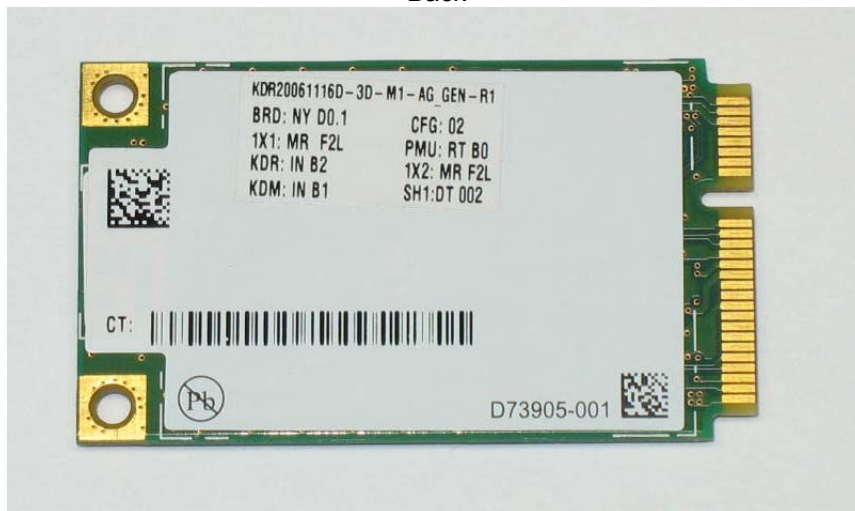

### APPENDIX A3 TEST SAMPLE PHOTOGRAPHS

Standard Battery



Extended Battery




4965AG inside the Fujitsu TABLET Computer



## APPENDIX A4 TEST SETUP PHOTOGRAPHS

Tablet Position

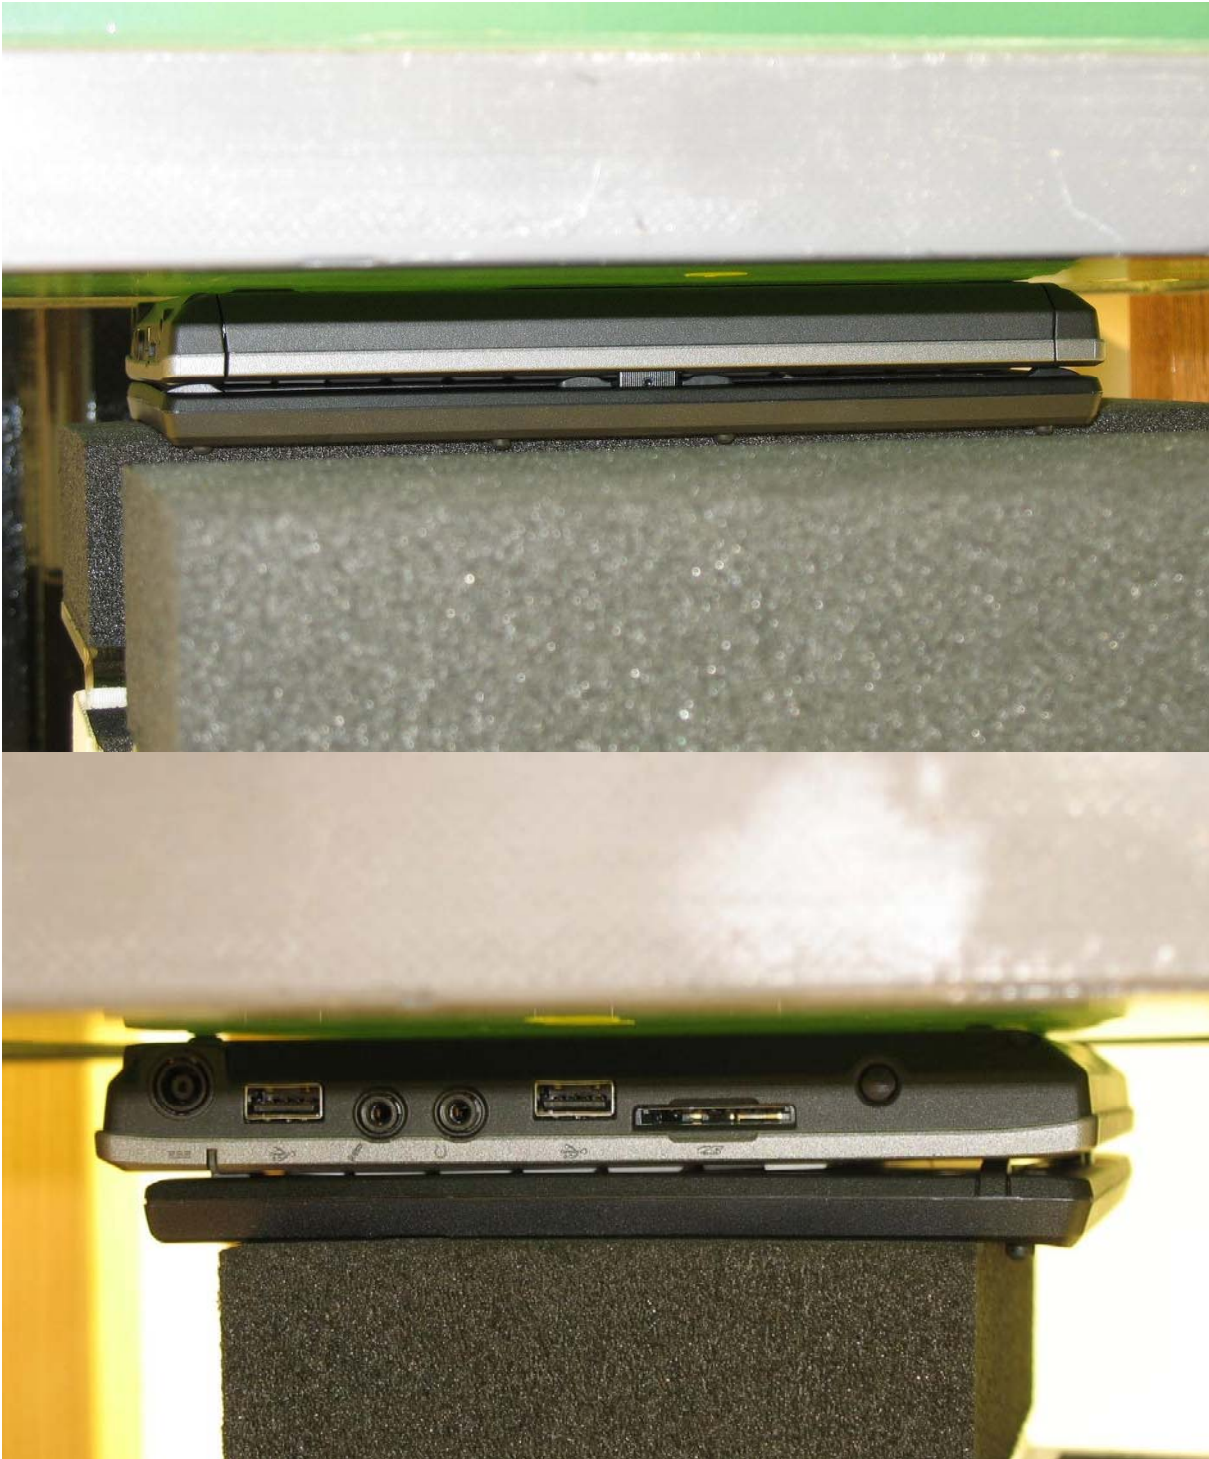



## APPENDIX A5 TEST SAMPLE PHOTOGRAPHS

Edge On Side Position





## APPENDIX A6 TEST SAMPLE PHOTOGRAPHS

Edge On Top Position



## APPENDIX A7 TEST SAMPLE PHOTOGRAPHS

Edge On Top Position w/ Extended Battery

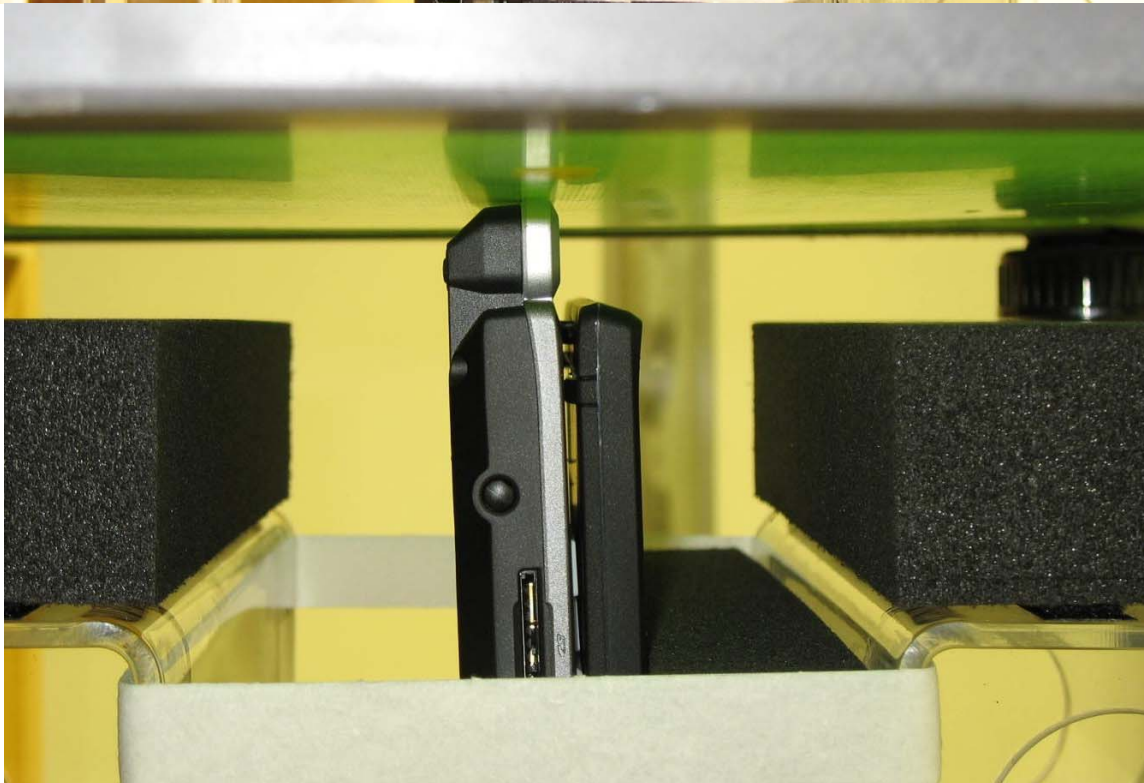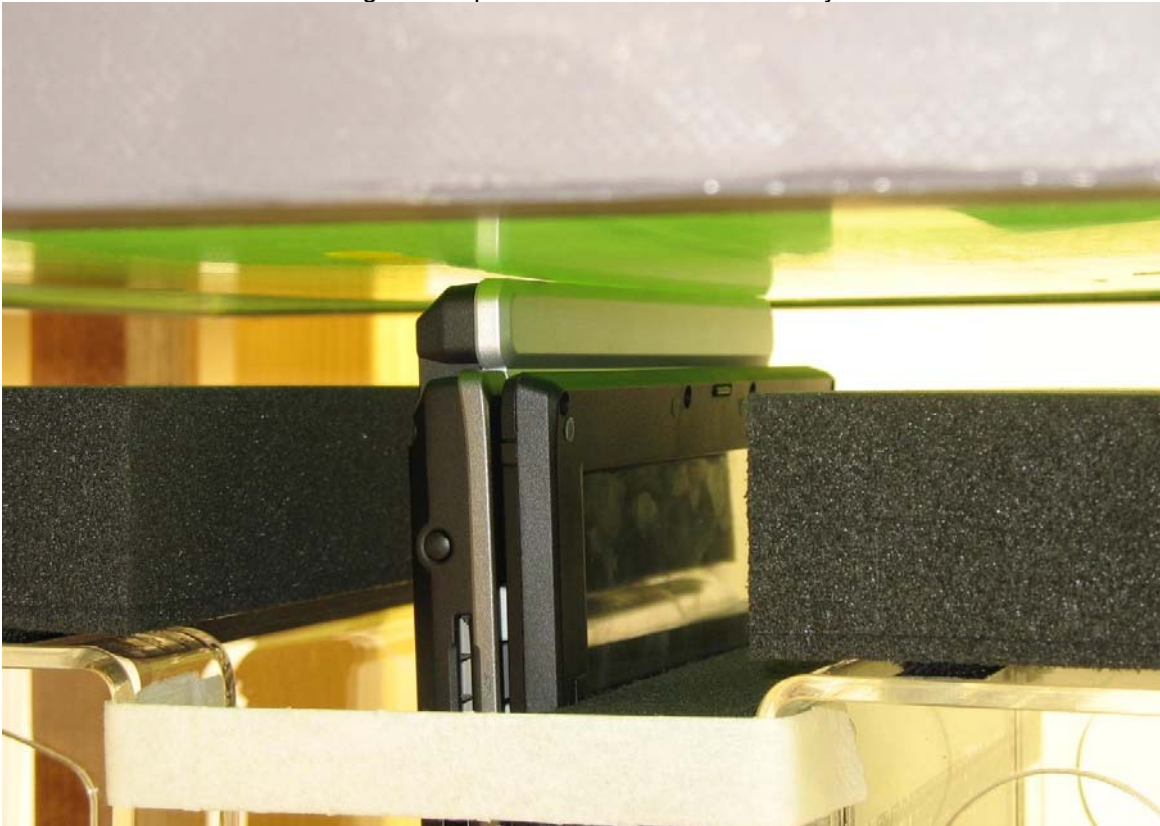



Test Date: 10 December 2007


File Name: Tablet DSSS 2450 MHz Antenna A Bluetooth Off Prescan 10-12-07.da4

**DUT: Fujitsu Tablet Ryuga with Kedron 11abg and Bluetooth; Type: 4965 AG; Serial: MAC: 0013E805C841**

- \* Communication System: DSSS 2450 MHz; Frequency: 2437 MHz; Duty Cycle: 1:1
- \* Medium parameters used:  $\sigma = 1.94479$  mho/m,  $\epsilon_r = 52.1599$ ;  $\rho = 1000$  kg/m<sup>3</sup>
- Electronics: DAE3 Sn359; Probe: ET3DV6 - SN1377; ConvF(3.98, 3.98, 3.98)
- Phantom: Flat Phantom 10.1; Serial: P 10.1; Phantom section: Flat 2.2 Section

**Channel 6 Bluetooth at 2441 MHz Test/Area Scan (111x141x1):** Measurement grid: dx=20mm, dy=20mm  
 Maximum value of SAR (interpolated) = 0.098 mW/g

**Channel 6 Bluetooth at 2441 MHz Test/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm  
 Reference Value = 5.94 V/m; Power Drift = 0.138 dB  
 Peak SAR (extrapolated) = 0.171 W/kg  
**SAR(1 g) = 0.092 mW/g; SAR(10 g) = 0.050 mW/g**  
 Maximum value of SAR (measured) = 0.099 mW/g

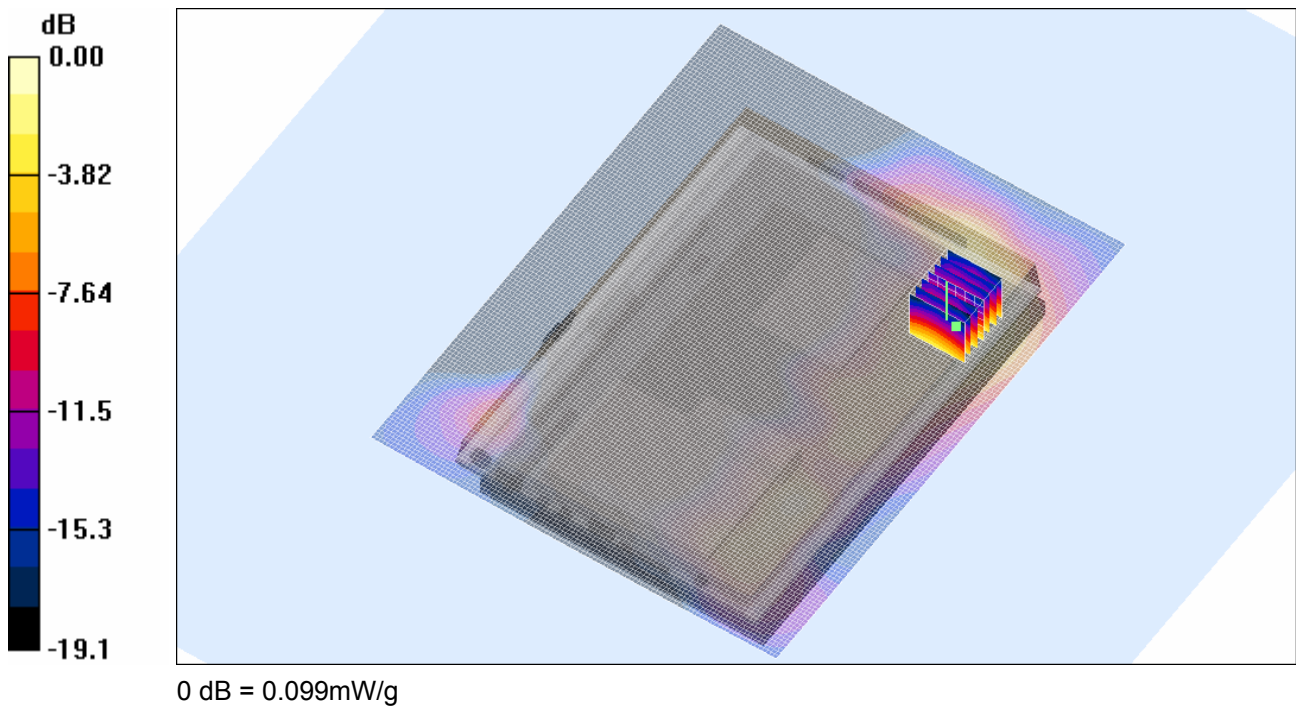

**SAR MEASUREMENT PLOT 1**

Ambient Temperature  
 Liquid Temperature  
 Humidity

21.9 Degrees Celsius  
 21.4 Degrees Celsius  
 44.0 %



Test Date: 07 December 2007


File Name: Tablet DSSS 2450 MHz Antenna B Bluetooth Off Prescan 07-12-07.da4

**DUT: Fujitsu Tablet Ryuga with Kedron 11abg and Bluetooth; Type: 4965 AG; Serial: MAC: 0013E805C841**

- \* Communication System: DSSS 2450 MHz; Frequency: 2437 MHz; Duty Cycle: 1:1
- \* Medium parameters used:  $\sigma = 1.9757$  mho/m,  $\epsilon_r = 52.0636$ ;  $\rho = 1000$  kg/m<sup>3</sup>
- Electronics: DAE3 Sn359; Probe: ET3DV6 - SN1377; ConvF(3.98, 3.98, 3.98)
- Phantom: Flat Phantom 10.1; Serial: P 10.1; Phantom section: Flat 2.2 Section

**Channel 6 Bluetooth at 2441 MHz Test/Area Scan (111x141x1):** Measurement grid: dx=20mm, dy=20mm  
 Maximum value of SAR (interpolated) = 0.140 mW/g

**Channel 6 Bluetooth at 2441 MHz Test/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm  
 Reference Value = 7.48 V/m; Power Drift = 0.080 dB  
 Peak SAR (extrapolated) = 0.339 W/kg  
**SAR(1 g) = 0.151 mW/g; SAR(10 g) = 0.074 mW/g**  
 Maximum value of SAR (measured) = 0.165 mW/g

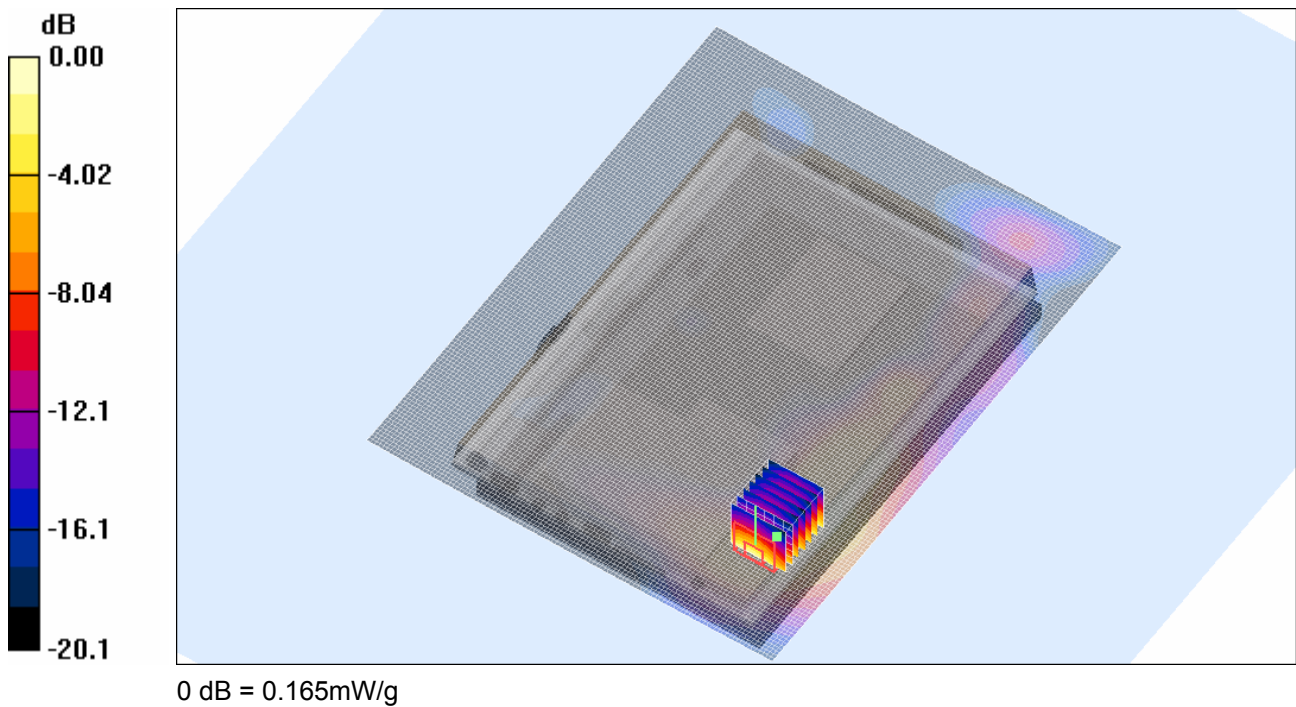


**SAR MEASUREMENT PLOT 2**

Ambient Temperature  
 Liquid Temperature  
 Humidity

**21.1 Degrees Celsius**  
**20.9 Degrees Celsius**  
**62.0 %**



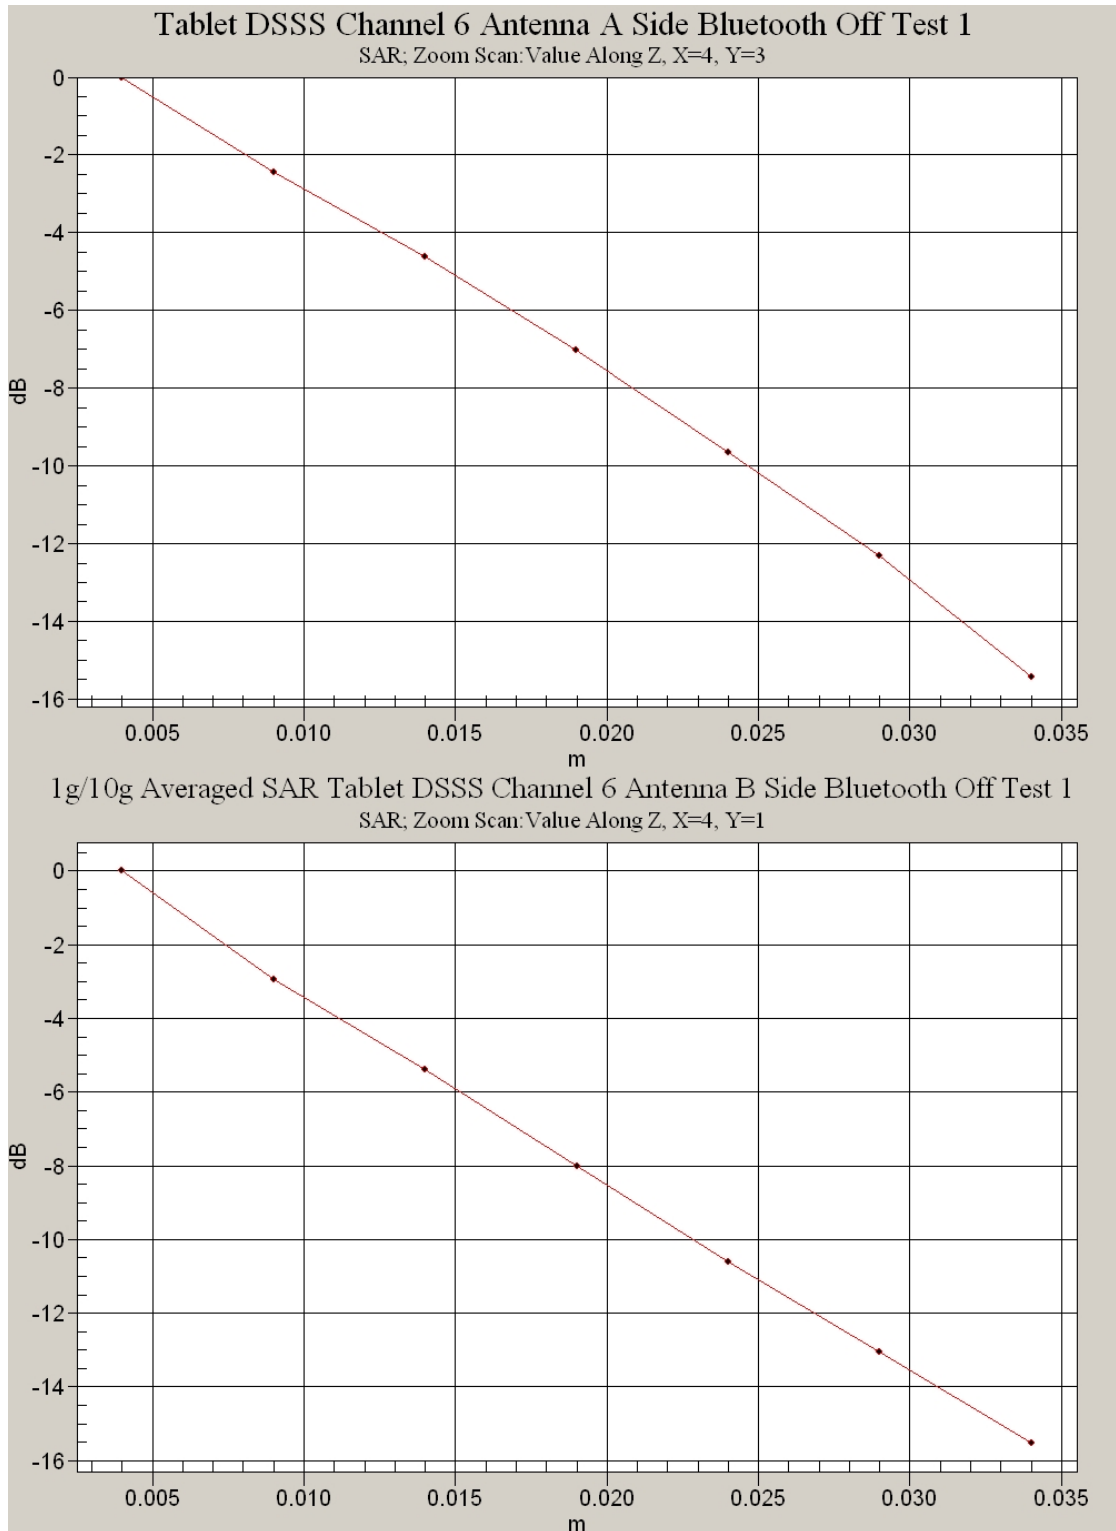

Test Date: 07 December 2007


File Name: Edge On DSSS 2450 MHz Antenna A Side Bluetooth Off 07-12-07.da4

**DUT: Fujitsu Tablet Ryuga with Kedron 11abg and Bluetooth; Type: 4965 AG; Serial: MAC: 0013E805C841**

- \* Communication System: DSSS 2450 MHz; Frequency: 2437 MHz; Duty Cycle: 1:1
- \* Medium parameters used:  $\sigma = 1.9757$  mho/m,  $\epsilon_r = 52.0636$ ;  $\rho = 1000$  kg/m<sup>3</sup>
- Electronics: DAE3 Sn359; Probe: ET3DV6 - SN1377; ConvF(3.98, 3.98, 3.98)
- Phantom: Flat Phantom 10.1; Serial: P 10.1; Phantom section: Flat 2.2 Section

**Channel 6 Test/Area Scan (81x201x1):** Measurement grid: dx=10mm, dy=10mm  
 Maximum value of SAR (interpolated) = 0.115 mW/g

**Channel 6 Test/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm  
 Reference Value = 7.16 V/m; Power Drift = -0.176 dB  
 Peak SAR (extrapolated) = 0.255 W/kg  
**SAR(1 g) = 0.114 mW/g; SAR(10 g) = 0.057 mW/g**  
 Maximum value of SAR (measured) = 0.129 mW/g

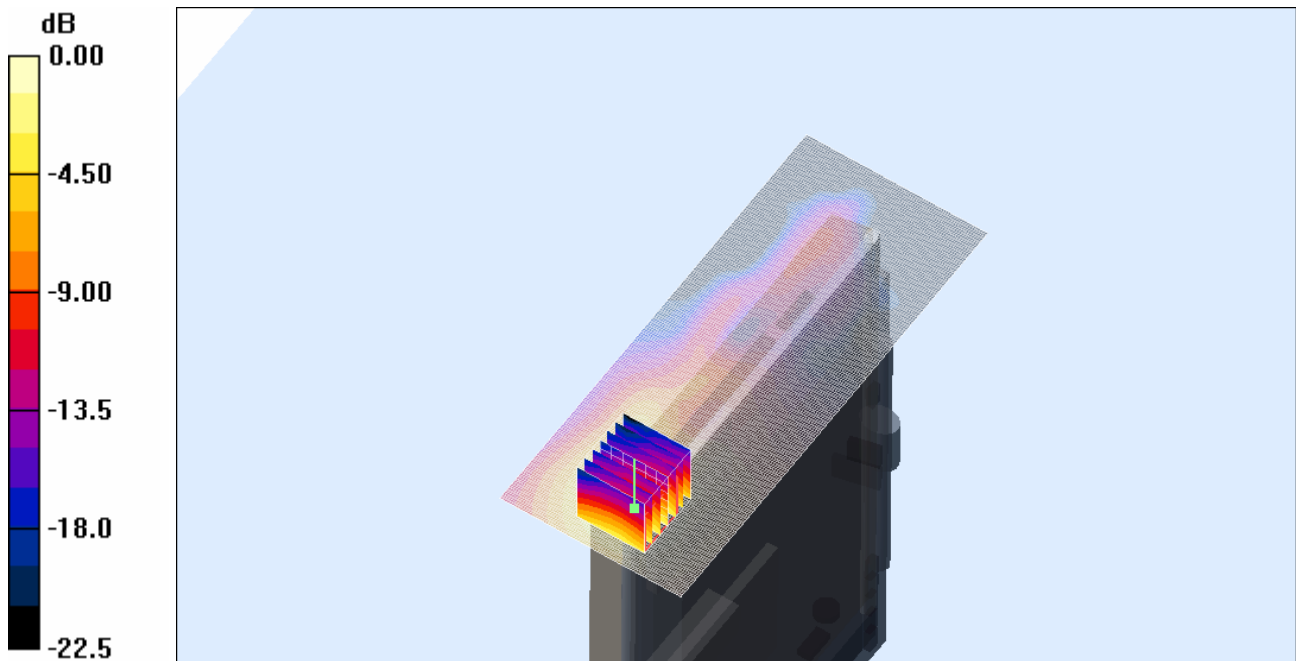

0 dB = 0.129mW/g

**SAR MEASUREMENT PLOT 3**

Ambient Temperature  
 Liquid Temperature  
 Humidity

21.1 Degrees Celsius  
 20.9 Degrees Celsius  
 62.0 %





Test Date: 07 December 2007


File Name: Edge On DSSS 2450 MHz Antenna B Side Bluetooth Off 07-12-07.da4

DUT: **Fujitsu Tablet Ryuga with Kedron 11abg and Bluetooth; Type: 4965 AG; Serial: MAC: 0013E805C841**

- \* Communication System: DSSS 2450 MHz; Frequency: 2437 MHz; Duty Cycle: 1:1
- \* Medium parameters used:  $\sigma = 1.9757$  mho/m,  $\epsilon_r = 52.0636$ ;  $\rho = 1000$  kg/m<sup>3</sup>
- Electronics: DAE3 Sn359; Probe: ET3DV6 - SN1377; ConvF(3.98, 3.98, 3.98)
- Phantom: Flat Phantom 10.1; Serial: P 10.1; Phantom section: Flat 2.2 Section

**Channel 6 Test/Area Scan (81x201x1):** Measurement grid: dx=10mm, dy=10mm  
 Maximum value of SAR (interpolated) = 0.234 mW/g

**Channel 6 Test/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm  
 Reference Value = 7.22 V/m; Power Drift = 0.064 dB  
 Peak SAR (extrapolated) = 0.636 W/kg  
**SAR(1 g) = 0.251 mW/g; SAR(10 g) = 0.121 mW/g**  
 Maximum value of SAR (measured) = 0.274 mW/g

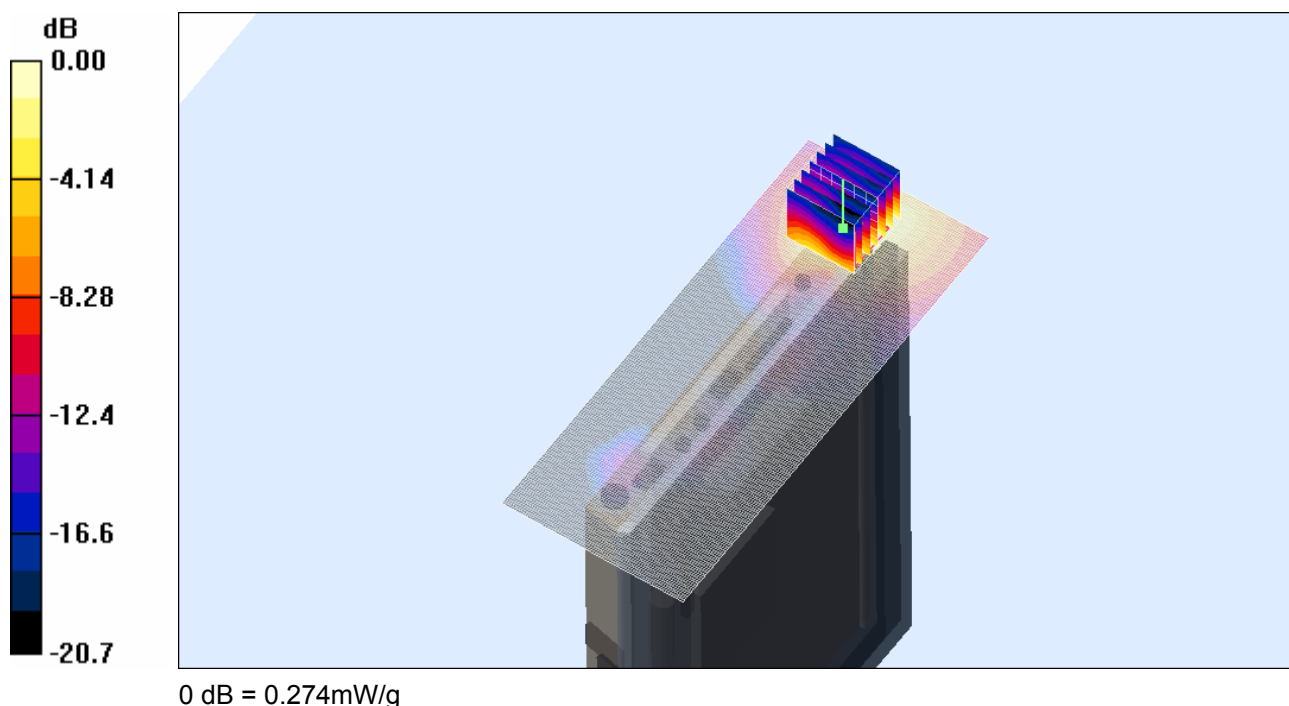


**SAR MEASUREMENT PLOT 4**

Ambient Temperature  
 Liquid Temperature  
 Humidity


**21.1 Degrees Celsius**  
**20.9 Degrees Celsius**  
**62.0 %**



1g/10g Averaged SAR Edge On DSSS Channel 6 Antenna A Side Bluetooth Off Test 1  
SAR; Zoom Scan: Value Along Z, X=3, Y=3

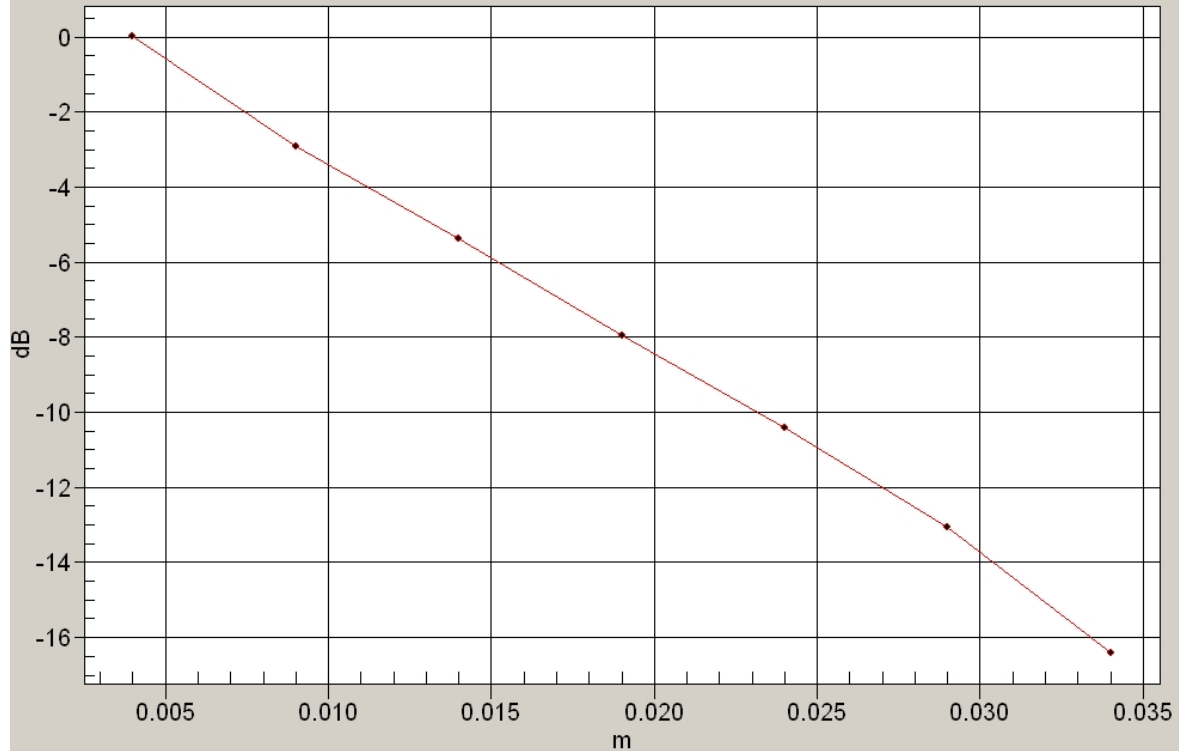

1g/10g Averaged SAR Edge On DSSS Channel 6 Antenna B Side Bluetooth Off Test 1  
SAR; Zoom Scan: Value Along Z, X=3, Y=3

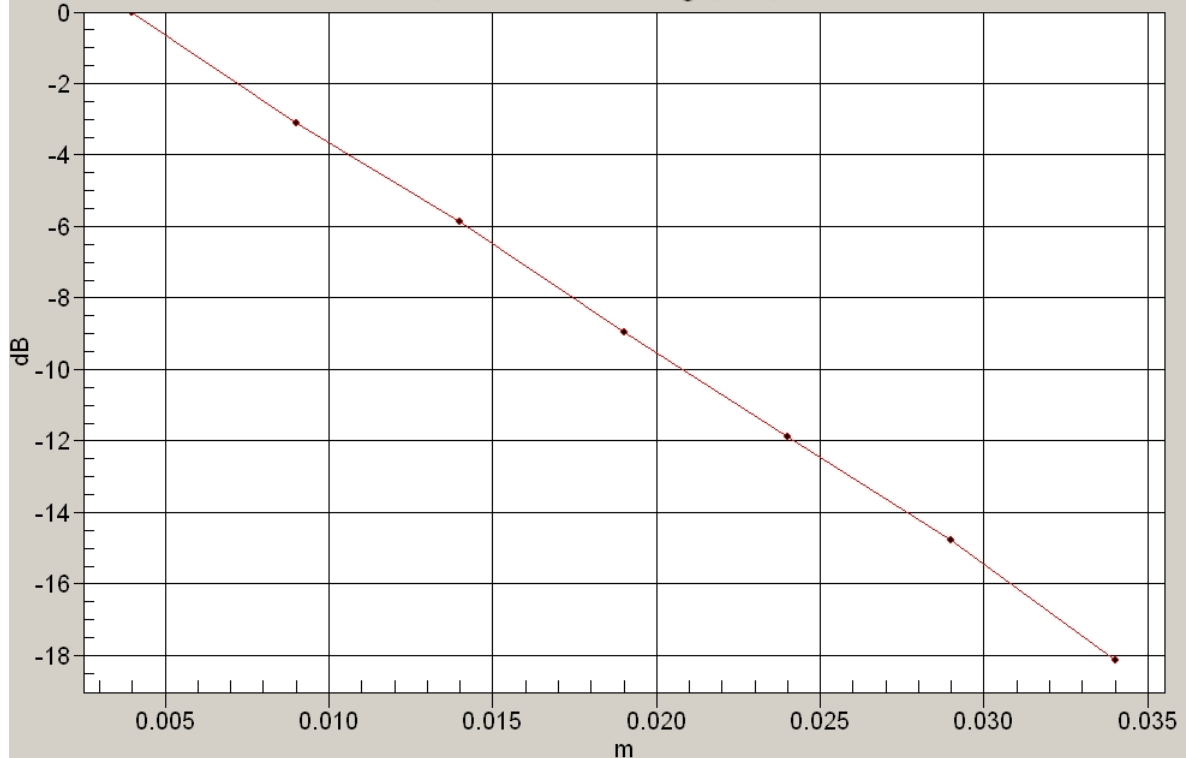

Test Date: 10 December 2007


File Name: Edge On Top DSSS 2450 MHz Antenna B Bluetooth Off 10-12-07.da4

**DUT: Fujitsu Tablet Ryuga with Kedron 11abg and Bluetooth; Type: 4965 AG; Serial: MAC: 0013E805C841**

- \* Communication System: DSSS 2450 MHz; Frequency: 2412 MHz; Duty Cycle: 1:1
- \* Medium parameters used:  $\sigma = 1.91196$  mho/m,  $\epsilon_r = 52.2812$ ;  $\rho = 1000$  kg/m<sup>3</sup>
- Electronics: DAE3 Sn359; Probe: ET3DV6 - SN1377; ConvF(3.98, 3.98, 3.98)
- Phantom: Flat Phantom 10.1; Serial: P 10.1; Phantom section: Flat 2.2 Section

**Channel 1 Test/Area Scan (81x131x1):** Measurement grid: dx=10mm, dy=10mm  
 Maximum value of SAR (interpolated) = 0.815 mW/g

**Channel 1 Test/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm  
 Reference Value = 16.5 V/m; Power Drift = -0.443 dB  
 Peak SAR (extrapolated) = 1.50 W/kg  
**SAR(1 g) = 0.680 mW/g; SAR(10 g) = 0.335 mW/g**  
 Maximum value of SAR (measured) = 0.748 mW/g

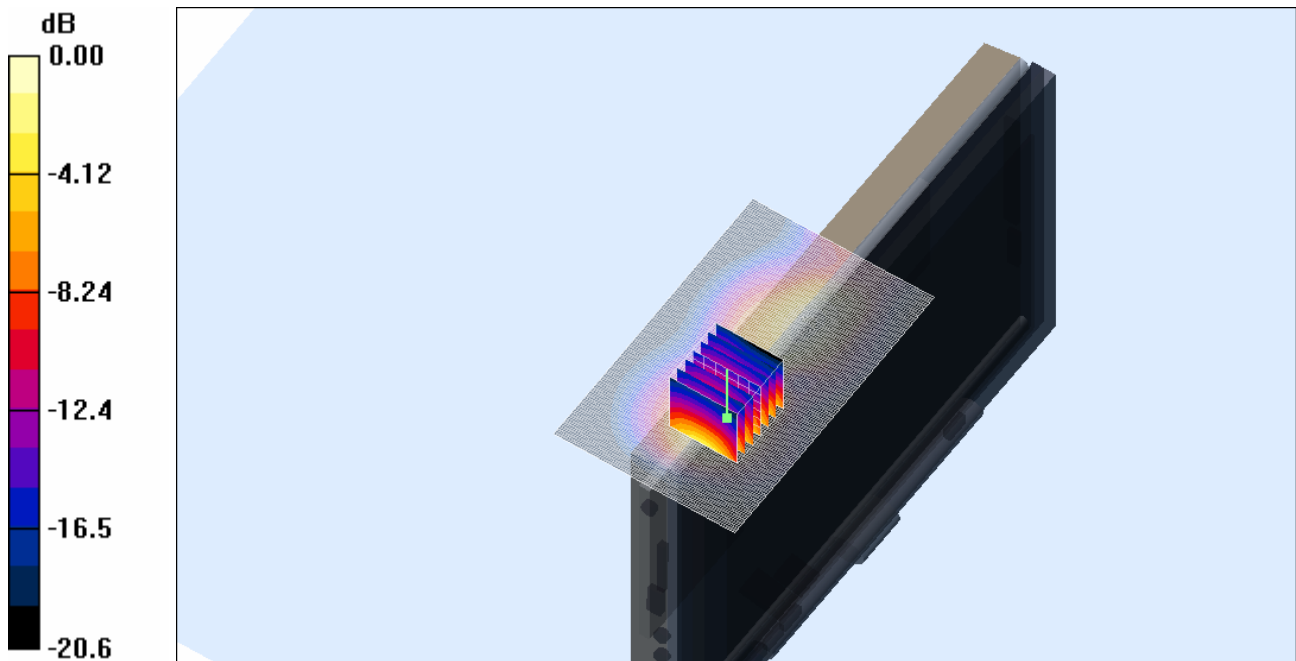

**SAR MEASUREMENT PLOT 5**

Ambient Temperature	21.9 Degrees Celsius
Liquid Temperature	21.4 Degrees Celsius
Humidity	44.0 %



Test Date: 07 December 2007

File Name: Edge On Top DSSS 2450 MHz Antenna B Bluetooth Off 07-12-07.da4

DUT: **Fujitsu Tablet Ryuga with Kedron 11abg and Bluetooth; Type: 4965 AG; Serial: MAC: 0013E805C841**

\* Communication System: DSSS 2450 MHz; Frequency: 2437 MHz; Duty Cycle: 1:1

\* Medium parameters used:  $\sigma = 1.9757 \text{ mho/m}$ ,  $\epsilon_r = 52.0636$ ;  $\rho = 1000 \text{ kg/m}^3$

- Electronics: DAE3 Sn359; Probe: ET3DV6 - SN1377; ConvF(3.98, 3.98, 3.98)

- Phantom: Flat Phantom 10.1; Serial: P 10.1; Phantom section: Flat 2.2 Section

**Channel 6 Test/Area Scan (81x131x1):** Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.859 mW/g


**Channel 6 Test/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 17.5 V/m; Power Drift = -0.136 dB

Peak SAR (extrapolated) = 1.70 W/kg

**SAR(1 g) = 0.764 mW/g; SAR(10 g) = 0.383 mW/g**

Maximum value of SAR (measured) = 0.851 mW/g

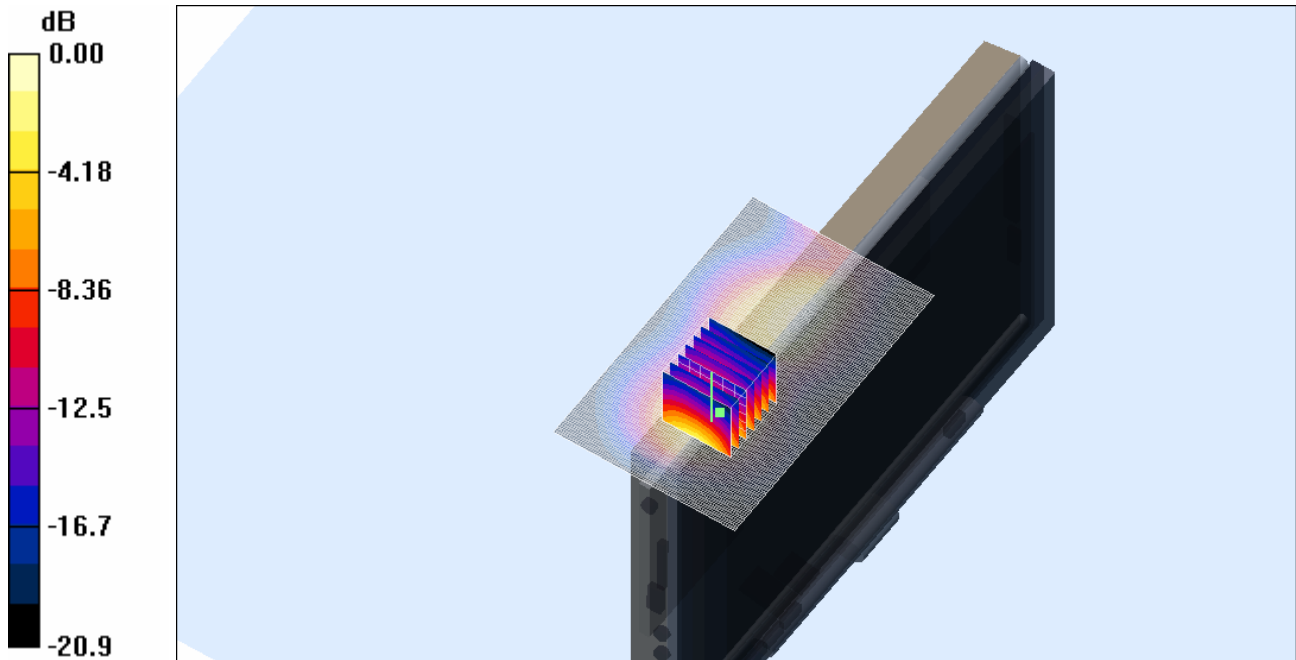

0 dB = 0.851mW/g

**SAR MEASUREMENT PLOT 6**

Ambient Temperature  
Liquid Temperature  
Humidity

21.1 Degrees Celsius  
20.9 Degrees Celsius  
62.0 %



Test Date: 10 December 2007

File Name: Edge On Top DSSS 2450 MHz Antenna B Bluetooth Off 10-12-07.da4

**DUT: Fujitsu Tablet Ryuga with Kedron 11abg and Bluetooth; Type: 4965 AG; Serial: MAC: 0013E805C841**

\* Communication System: DSSS 2450 MHz; Frequency: 2462 MHz; Duty Cycle: 1:1

\* Medium parameters used:  $\sigma = 1.97742$  mho/m,  $\epsilon_r = 52.0362$ ;  $\rho = 1000$  kg/m<sup>3</sup>

- Electronics: DAE3 Sn359; Probe: ET3DV6 - SN1377; ConvF(3.98, 3.98, 3.98)

- Phantom: Flat Phantom 10.1; Serial: P 10.1; Phantom section: Flat 2.2 Section

**Channel 11 Test/Area Scan (81x131x1):** Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.791 mW/g


**Channel 11 Test/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 17.2 V/m; Power Drift = -0.191 dB

Peak SAR (extrapolated) = 1.55 W/kg

**SAR(1 g) = 0.687 mW/g; SAR(10 g) = 0.344 mW/g**

Maximum value of SAR (measured) = 0.753 mW/g

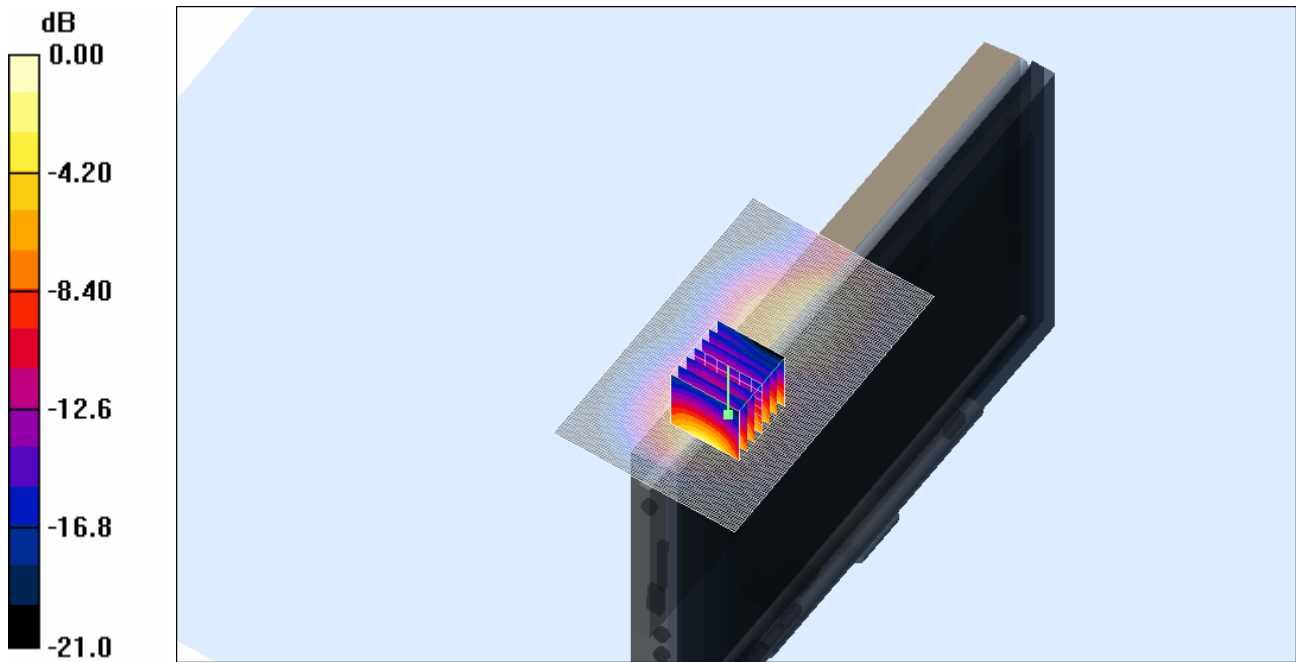


**SAR MEASUREMENT PLOT 7**

Ambient Temperature  
Liquid Temperature  
Humidity

21.9 Degrees Celsius  
21.4 Degrees Celsius  
44.0 %



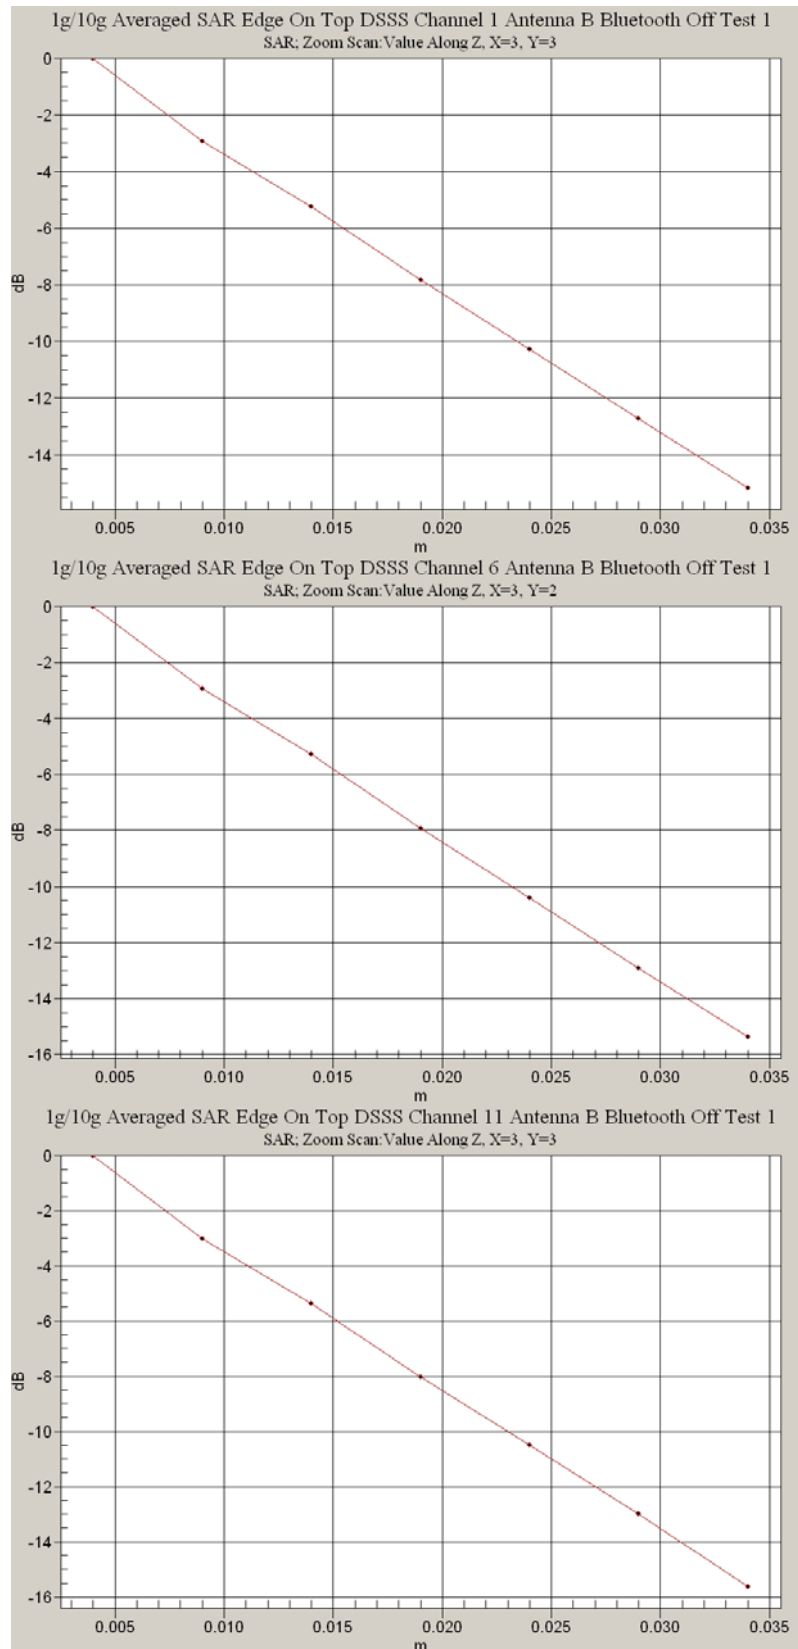

Test Date: 07 December 2007

File Name: Edge On Top DSSS 2450 MHz Antenna A Bluetooth Off 07-12-07.da4

**DUT: Fujitsu Tablet Ryuga with Kedron 11abg and Bluetooth; Type: 4965 AG; Serial: MAC: 0013E805C841**

\* Communication System: DSSS 2450 MHz; Frequency: 2437 MHz; Duty Cycle: 1:1


\* Medium parameters used:  $\sigma = 1.9757$  mho/m,  $\epsilon_r = 52.0636$ ;  $\rho = 1000$  kg/m<sup>3</sup>

- Electronics: DAE3 Sn359; Probe: ET3DV6 - SN1377; ConvF(3.98, 3.98, 3.98)

- Phantom: Flat Phantom 10.1; Serial: P 10.1; Phantom section: Flat 2.2 Section

**Channel 6 Test/Area Scan (81x131x1):** Measurement grid: dx=10mm, dy=10mm  
Maximum value of SAR (interpolated) = 0.745 mW/g

**Channel 6 Test/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm  
Reference Value = 19.4 V/m; Power Drift = -0.392 dB  
Peak SAR (extrapolated) = 1.51 W/kg  
**SAR(1 g) = 0.643 mW/g; SAR(10 g) = 0.304 mW/g**  
Maximum value of SAR (measured) = 0.719 mW/g

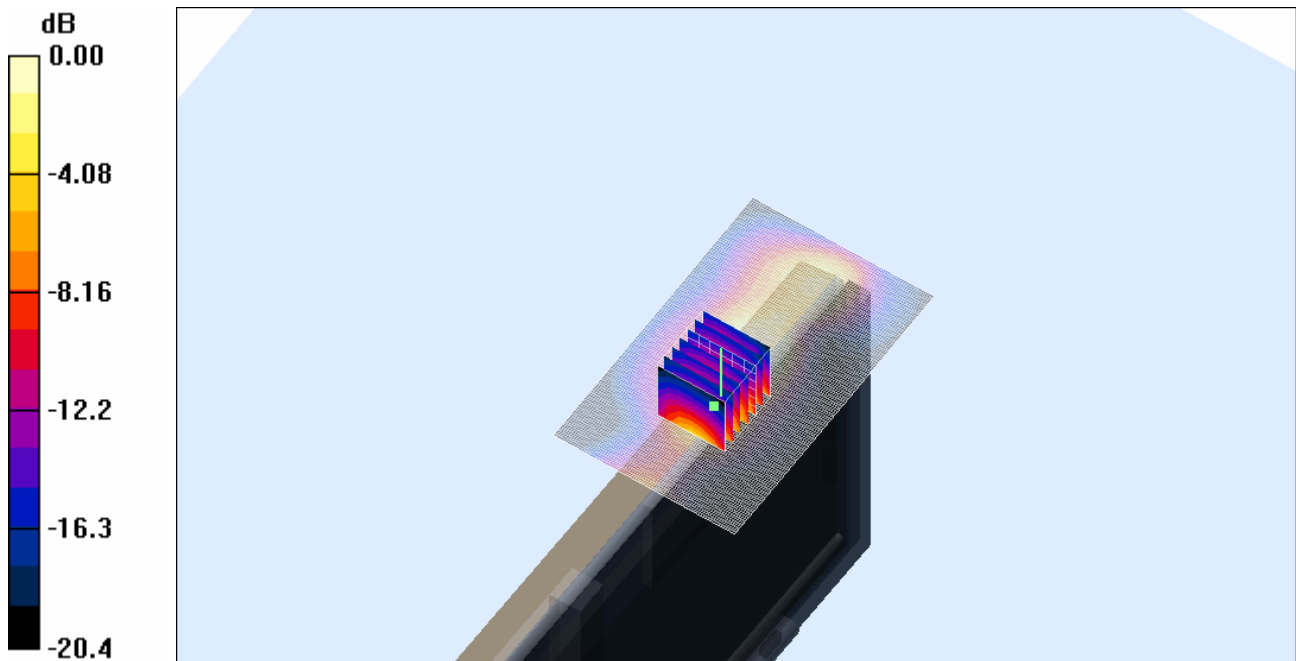

**SAR MEASUREMENT PLOT 8**

Ambient Temperature  
Liquid Temperature  
Humidity

21.1 Degrees Celsius  
20.9 Degrees Celsius  
62.0 %



Test Date: 10 December 2007


File Name: Edge On Top DSSS 2450 MHz Antenna B Bluetooth Off Extended Battery 10-12-07.da4

**DUT: Fujitsu Tablet Ryuga with Kedron 11abg and Bluetooth; Type: 4965 AG; Serial: MAC: 0013E805C841**

- \* Communication System: DSSS 2450 MHz; Frequency: 2437 MHz; Duty Cycle: 1:1
- \* Medium parameters used:  $\sigma = 1.94479$  mho/m,  $\epsilon_r = 52.1599$ ;  $\rho = 1000$  kg/m<sup>3</sup>
- Electronics: DAE3 Sn359; Probe: ET3DV6 - SN1377; ConvF(3.98, 3.98, 3.98)
- Phantom: Flat Phantom 10.1; Serial: P 10.1; Phantom section: Flat 2.2 Section

**Channel 6 Test/Area Scan (81x131x1):** Measurement grid: dx=10mm, dy=10mm  
 Maximum value of SAR (interpolated) = 0.093 mW/g

**Channel 6 Test/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm  
 Reference Value = 7.25 V/m; Power Drift = -0.299 dB  
 Peak SAR (extrapolated) = 0.175 W/kg  
**SAR(1 g) = 0.081 mW/g; SAR(10 g) = 0.043 mW/g**  
 Maximum value of SAR (measured) = 0.090 mW/g

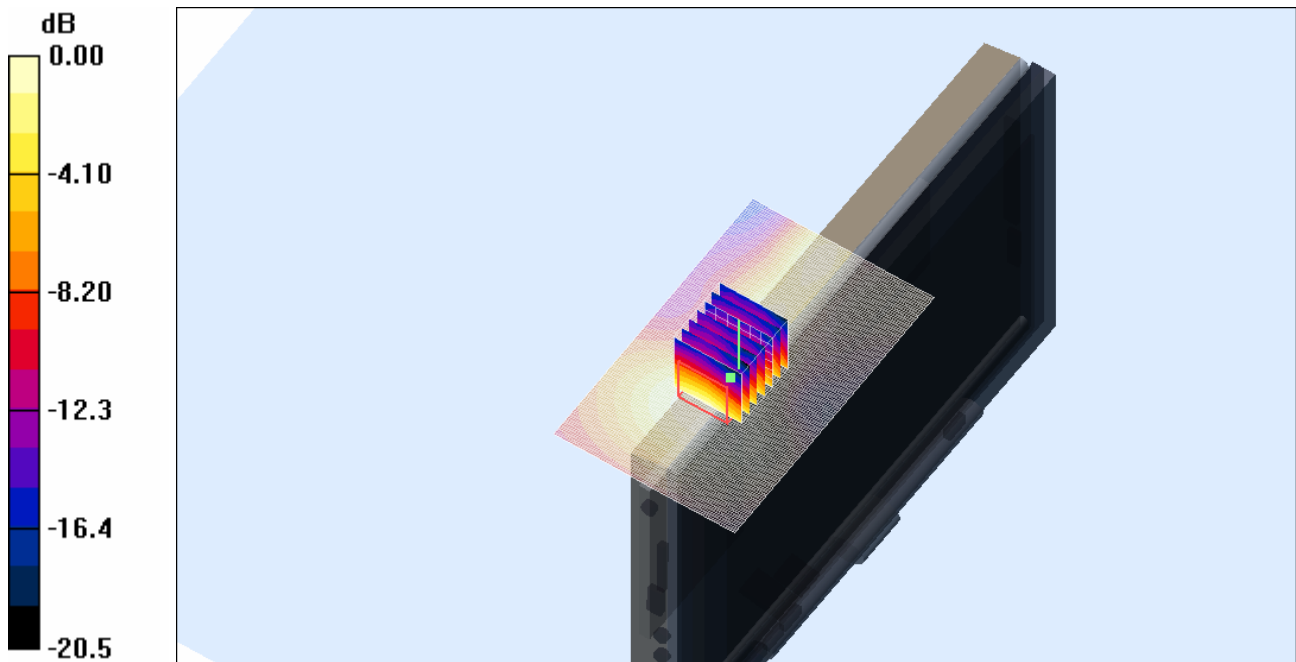

0 dB = 0.090mW/g

**SAR MEASUREMENT PLOT 9**

Ambient Temperature  
 Liquid Temperature  
 Humidity

**21.9 Degrees Celsius**  
**21.4 Degrees Celsius**  
**44.0 %**

