



Global Product Certification
EMC-EMF-Safety Approvals

EMC Technologies Pty Ltd
ABN 82 057 105 549
176 Harrick Road
Keilor Park
Victoria Australia 3042

Ph: + 613 9365 1000
Fax: + 613 9331 7455
email: melb@emctech.com.au

SAR Test Report

Report Number: M080404_CERT_533AN_HMW_SAR_5.6

Test Sample: Portable TABLET Computer
Host PC Model Number: T5010
Radio Modules: WLAN 533AN_HMW & Bluetooth
EYSMJCS
Tested For: Fujitsu Australia Pty Ltd
WLAN FCC ID: EJE-WB0058
WLAN IC: 337J-WB0058
Date of Issue: 19th June 2008

EMC Technologies Pty Ltd reports apply only to the specific samples tested under stated test conditions. It is the manufacturer's responsibility to assure that additional production units of this model are manufactured with identical electrical and mechanical components. EMC Technologies Pty Ltd shall have no liability for any deductions, inferences or generalisations drawn by the client or others from EMC Technologies Pty Ltd issued reports. This report shall not be used to claim, constitute or imply product endorsement by EMC Technologies Pty Ltd.

CONTENTS

1.0 GENERAL INFORMATION.....	3
2.0 INTRODUCTION.....	4
3.0 SAMPLE TECHNICAL INFORMATION.....	4
3.1 EUT (WLAN) Details	4
3.2 EUT (Bluetooth) Details.....	5
3.3 EUT (Notebook PC) Details	6
3.4 Test sample Accessories	6
3.4.1 <i>Battery Types</i>	6
4.0 TEST SIGNAL, FREQUENCY AND OUTPUT POWER.....	7
4.1 Battery Status.....	7
5.0 DETAILS OF TEST LABORATORY.....	8
5.1 Location	8
5.2 Accreditations.....	8
5.3 Environmental Factors	9
6.0 DESCRIPTION OF SAR MEASUREMENT SYSTEM.....	9
6.1 Probe Positioning System	9
6.2 E-Field Probe Type and Performance	9
6.3 Data Acquisition Electronics	9
6.4 Validation	10
6.4.1 <i>Validation Results @ 5GHz</i>	10
6.4.2 <i>Deviation from reference validation values</i>	10
6.4.3 <i>Liquid Depth 15cm</i>	11
6.5 Phantom Properties (Size, Shape, Shell Thickness)	12
6.6 Tissue Material Properties.....	13
6.6.1 <i>Liquid Temperature and Humidity</i>	14
6.7 Simulated Tissue Composition Used for SAR Test	14
6.8 Device Holder for Laptops and P 10.1 Phantom	14
7.0 SAR MEASUREMENT PROCEDURE USING DASY4.....	15
8.0 MEASUREMENT UNCERTAINTY.....	16
9.0 QUIPMENT LIST AND CALIBRATION DETAILS	18
10.0 OET BULLETIN 65 – SUPPLEMENT C TEST METHOD	19
10.1.1 <i>Lap Held Position</i>	19
10.1.2 <i>“Tablet” Position Definition (0mm spacing)</i>	19
10.1.3 <i>“Edge On” Position</i>	19
10.2 List of All Test Cases (Antenna In/Out, Test Frequencies, User Modes).....	20
10.3 FCC RF Exposure Limits for Occupational/ Controlled Exposure.....	20
10.4 FCC RF Exposure Limits for Un-controlled/Non-occupational	20
11.0 SAR MEASUREMENT RESULTS	21
11.1 GHz Band SAR Results	21
12.0 COMPLIANCE STATEMENT	23
APPENDIX A1 TEST SAMPLE PHOTOGRAPHS	24
APPENDIX A2 TEST SAMPLE PHOTOGRAPHS	25
APPENDIX A3 TEST SAMPLE PHOTOGRAPHS	26
APPENDIX A4 TEST SETUP PHOTOGRAPHS	27
APPENDIX A5 TEST SETUP PHOTOGRAPHS	28
APPENDIX A6 TEST SETUP PHOTOGRAPHS	29
APPENDIX A7 TEST SETUP PHOTOGRAPHS	30
APPENDIX B PLOTS OF THE SAR MEASUREMENTS	31
APPENDIX C CALIBRATION DOCUMENTS	73

SAR TEST REPORT

Report Number: M080404_CERT_533AN_HMW_SAR_5.6
HOST PC FCC ID: EJE-WB0058
HOST PC IC: 337J-WB0058

1.0 GENERAL INFORMATION

Test Sample: Portable TABLET Computer
Model Name: T5010
Radio Modules: WLAN 533AN_HMW & Bluetooth EYSMJCS
Interface Type: Mini-PCI Module
Device Category: Portable Transmitter
Test Device: Pre-Production Unit
FCC ID: EJE-WB0058
HOST PC IC: 337J-WB0058
RF exposure Category: General Population/Uncontrolled

Manufacturer: Fujitsu Limited

Test Standard/s:


1. Evaluating Compliance with FCC Guidelines For Human Exposure to Radiofrequency Electromagnetic Fields
Supplement C (Edition 01-01) to OET Bulletin 65 (Edition 97-01)
2. Radio Frequency Exposure Compliance of Radiocommunication Apparatus (All Frequency Bands)
RSS-102 Issue 2 November 2005

Statement Of Compliance: The Fujitsu TABLET Computer T5010 with Wireless LAN model 533AN_HMW and Bluetooth module EYSMJCS complied* with the FCC General public/uncontrolled RF exposure limits of 1.6mW/g per requirements of 47CFR2.1093(d). It also complied with IC RSS-102 requirements.

Test Dates: 22nd, 24th and 28th April 2008


Tested for: Fujitsu Australia Pty Ltd
Address: 1230 Nepean Highway, Cheltenham VIC 3192
Contact: Praveen Rao
Phone: +61 3 9265 0210
Fax: +61 3 9265 0656
E-mail: Praveen.rao@au.fujitsu.com

Test Officer:



Peter Jakubiec

Authorised Signature:



Peter Jakubiec

SAR TEST REPORT
Portable TABLET Computer
Model: T5010
Report Number: M080404 _ CERT_533AN_HMW_SAR_5.6

2.0 INTRODUCTION

Testing was performed on the Fujitsu TABLET PC, Model: T5010 with INTEL Mini-PCI Wireless LAN Module (WIFI LINK 5300 (SHIRLEY PEAK) 802.11a/b/g/n), Model: 533AN_HMW & TAIYO YUDEN Bluetooth Module, Model: EYSMJCS. The WIFI LINK 5300 (SHIRLEY PEAK) module is an OEM product. The Mini-PCI Wireless LAN (WLAN) was tested in the dedicated host – LIFEBOOK T SERIES, Model T5010.

The measurement test results mentioned hereon only apply to the 5GHz frequency band; an additional report titled “M080404 _ CERT_533AN_HMW_SAR_2.4” applies to the 2450MHz frequency range.

3.0 SAMPLE TECHNICAL INFORMATION

(Information supplied by the client)

3.1 EUT (WLAN) Details

Transmitter:	Half Mini-Card Wireless LAN Module
Wireless Module:	WiFi Link 5300(Shirley Peak) (11a/b/g/n)
Model Number:	533AN_HMW
Manufacturer:	Intel Corporation
Modulation Type:	DSSS for 802.11b OFDM for 802.11g OFDM for 802.11a OFDM for 802.11n
5GHz (802.11a/n)	BPSK, QPSK, 16QAM, 64QAM
2.4GHz (802.11b/g/n)	CCK, DQPSK, DBPSK, 16QAM, 64QAM
Maximum Data Rate:	802.11b = 11 Mbps, 802.11g and 802.11a = 54 Mbps 802.11n = 450 Mbps
Frequency Range:	2.412–2.462 GHz for 11b/g/n 5.18–5.32 GHz, 5.500–5.700 GHz and 5.745–5.825 GHz for 11a/n
Number of Channels:	11 channels for 11b/g/n 24 channels for 11a/n with 20MHz Bandwidth 18 channels for 11n with 40MHz Bandwidth
Antenna Types:	Nissei Electric Inverted F Antenna(1 st , 2 nd), Yokowa Monopole(3 rd) Location: Top edge of LCD screen(1 st , 2 nd), right side of hinge (3 rd)
Power Supply:	3.3 VDC from PCI bus

Channels and Output power setting:

Channel and Mode	Frequency MHz	Average Output Power dBm
802.11b/g/n mode		
Channels 1	2412	12.5
Channels 6	2437	16.5
Channels 11	2462	11.5
802.11a/n mode with 20MHz Bandwidth		
Channels 36	5180	
Channels 52	5260	
Channels 64	5320	
Channels 149	5745	
Channels 157	5785	
Channels 165	5825	
Channels 100	5500	
Channels 120	5600	
Channels 140	5700	
802.11n mode with 40MHz Bandwidth		
Channels 38	5190	13.5
Channels 46	5270	16.5
Channels 62	5310	14.0
Channels 151	5755	
Channels 159	5795	16.5

NOTE: For 2450 MHz SAR results refer to report titled "M080404 _ CERT_533AN_HMW_SAR_2.4".

3.2 EUT (Bluetooth) Details

Transmitter:	Bluetooth
Model Number:	EYSMJCS
Manufacturer:	TAIYO YUDEN
Network Standard:	Bluetooth™ RF Test Specification
Modulation Type:	Frequency Hopping Spread Spectrum (FHSS)
Frequency Range:	2402 MHz to 2480 MHz
Number of Channels:	79
Carrier Spacing:	1.0 MHz
Antenna Types:	Included BT module
Location:	Left side of hinge
Max. Output Power:	4 dBm
Reference Oscillator:	16 MHz (Built-in)
Power Supply:	3.3 VDC from host.

Frequency allocation:

Channel Number	Frequency (MHz)	Bluetooth Utility power setting
1	2402	
2	2403	
-	-	
39	2440	
40	2441	
41	2442	
-	-	
78	2479	
79	2480	

Power (Ext, Int) = 0, 96



Accreditation No. 5292

This document must not be copied or reproduced, except in full without the written permission of the Manager, EMC Technologies Pty Ltd. The certificate on page 3 may be reproduced in full.
www.emctech.com.au

3.3 EUT (Notebook PC) Details

Host notebook :	LifeBook T series
Model Name:	T5010
Serial Number:	Pre-production Sample
Manufacturer:	FUJITSU LIMITED
CPU Type and Speed:	Core2 Duo T9600 2.8GHz
LCD	13.3"WXGA LED
Wired LAN:	Intel 82567LM : 10 Base-T/100 Base-TX/1000Base-T
Modem:	Agere MDC1.5 modem Model: D40
Port Replicator Model:	FPCPR85
AC Adapter Model:	SEC100P2-19.0(Sanken) / SEC100P3-19.0(Sanken, 3pin) / ADP-80NB A(Delta) / SED100P2-19.0(Sanken)
Voltage:	19 V
Current Specs:	4.22A
Watts:	80W
Radio Modules:	WLAN (Shirley Peak IEEE802.11a/b/g/n, 3x3)
WLAN Model Number:	533AN_HMW
WLAN Manufacturer:	Intel Corp.
Interface Type:	Half Mini-Card Wireless LAN Module
Radio Modules:	Bluetooth module
Model Number:	EYSMJCS
Manufacturer:	TAIYO YUDEN
Interface Type:	USB

3.4 Test sample Accessories

3.4.1 Battery Types

One type of Fujitsu Lithium Ion Battery is used to power the Portable TABLET Computer Wireless LAN Model: 533AN_HMW. SAR measurements were performed with the battery as shown below.

Standard Battery

Product Number:	FPCBP155
V/mAh	10.8V/5200mAh
Cell No.	6

4.0 TEST SIGNAL, FREQUENCY AND OUTPUT POWER

INTEL's CRTU test tool was used to configure the WLAN for testing. The Portable Tablet Computer Wireless LAN had a total of 11 channels (USA model) within the 2412 to 2462 MHz frequency band and 17 channels within the frequency range 5180 – 5825 MHz. In The frequency range 2412 MHz to 2462 MHz the device operates in 2 modes, OFDM and DSSS. Within the 5180 – 5825 MHz frequency range the device operates in OFDM mode only. For the SAR measurements the device was operating in continuous transmit mode using programming codes supplied by Fujitsu.

The test results mentioned in this report only apply to the 5200/5800MHz frequency range. An additional report titled "M080404_CERT_533AN_HMW_SAR_2.4" is specific to the 2450MHz range.

The WLAN modules can be configured in a number of different data rates. It was found that the highest source based time averaged power was measured when using the lowest data rates available in each mode. This lowest data rate corresponds to 6Mbps in OFDM mode and 1Mbps in DSSS mode.

The frequency span of the 2450 MHz range and 5600MHz Bands was more than 10MHz consequently; the SAR levels of the test sample were measured for lowest, centre and highest channels in the applicable modes. The EUT is capable of using two antennas transmitting simultaneously (HT8 DATA mode) the power level is 3dB lower (50%) than if a single antenna was transmitting, and also the EUT is capable of using three antennas transmitting simultaneously (HT16 DATA mode) the power level is 5dB lower than if a single antenna was transmitting. There were no wires or other connections to the Portable TABLET Computer during the SAR measurements.

4.1 Battery Status

The device battery was fully charged prior to commencement of measurement. Each SAR test was completed within 30 minutes. The battery condition was monitored by measuring the RF field at a defined position inside the phantom before the commencement of each test and again after the completion of the test. It was not possible to perform conducted power measurements at the output of the device, at the beginning and end of each scan due to lack of a suitable antenna port. The uncertainty associated with the power drift was less than 12% and was assessed in the uncertainty budget.

5.0 DETAILS OF TEST LABORATORY

5.1 Location

EMC Technologies Pty Ltd
176 Harrick Road
Keilor Park, (Melbourne) Victoria
Australia 3042

Telephone: +61 3 9365 1000
Facsimile: +61 3 9331 7455
email: melb@emctech.com.au
website: www.emctech.com.au

5.2 Accreditations

EMC Technologies Pty. Ltd. is accredited by the National Association of Testing Authorities, Australia (NATA).
NATA Accredited Laboratory Number: 5292

EMC Technologies Pty Ltd is NATA accredited for the following standards:

AS/NZS 2772.1:	RF and microwave radiation hazard measurement
ACA:	Radio communications (Electromagnetic Radiation - Human Exposure) Standard 2003
FCC:	Guidelines for Human Exposure to RF Electromagnetic Field OET65C 01/01
EN 50360: 2001	Product standard to demonstrate the compliance of mobile phones with the basic restrictions related to human exposure to electromagnetic fields (300 MHz – 3 GHz)
EN 50361: 2001	Basic standard for the measurement of Specific Absorption Rate related to human exposure to electromagnetic fields from mobile phones (300MHz – 3GHz)
IEEE 1528: 2003	Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head Due to Wireless Communications Devices: Measurement Techniques.

The 5.2 to 5.8 GHz SAR measurement range is not within the current scope of NATA accreditation.

Refer to NATA website www.nata.asn.au for the full scope of accreditation.

5.3 Environmental Factors

The measurements were performed in a shielded room with no background RF signals. The temperature in the laboratory was controlled to within $21\pm1^{\circ}\text{C}$, the humidity was in the range 33% to 58%. The liquid parameters are measured daily prior to the commencement of each test. Tests were performed to check that reflections within the environment did not influence the SAR measurements. The noise floor of the DASY4 SAR measurement system using the SN3563 probe was less than $5\mu\text{V}$ in both air and liquid mediums.

6.0 DESCRIPTION OF SAR MEASUREMENT SYSTEM

Applicable Head Configurations	: None
Applicable Body Configurations	: Tablet Position
	: Laps On Position
	: Edge On Position

6.1 Probe Positioning System

The measurements were performed with the state-of-the-art automated near-field scanning system **DASY4 V4.7 Build 53** from Schmid & Partner Engineering AG (SPEAG). The system is based on a high precision 6-axis robot (working range greater than 1.1m), which positions the SAR measurement probes with a positional repeatability of better than ± 0.02 mm. The DASY4 fully complies with the OET65 C (01-01), IEEE 1528 and EN50361 SAR measurement requirements.

6.2 E-Field Probe Type and Performance

The SAR measurements were conducted with SPEAG dosimetric probe EX3DV4 Serial: 3563 (5.6 GHz) designed in the classical triangular configuration and optimised for dosimetric evaluation. The probe has been calibrated and found to be accurate to better than ± 0.25 dB. The probe is suitable for measurements close to material discontinuity at the surface of the phantom. The sensors of the probe are directly loaded with Schottky diodes and connected via highly resistive lines (length = 300 mm) to the data acquisition unit.

6.3 Data Acquisition Electronics

The data acquisition electronics (DAE3) consists of a highly sensitive electrometer-grade preamplifier with auto-zeroing, a channel and gain switching multiplexer, a fast 16 bit AD-converter and a command decoder and control logic unit. The input impedance of the DAE3 box is $200\text{ M}\Omega$; the inputs are symmetrical and floating. Common mode rejection is above 80dB. Transmission to the PC-card is accomplished through an optical downlink for data and status information as well as an optical uplink for commands and the clock.

The mechanical probe-mounting device includes two different sensor systems for frontal and sideways probe contacts. They are used for mechanical surface detection and probe collision detection.

6.4 Validation

6.4.1 Validation Results @ 5GHz

The following table lists the dielectric properties of the tissue simulating liquid measured prior to SAR validation. The results of the validation are listed in columns 4 and 5. The forward power into the reference dipole for SAR validation was adjusted to 250 mW.

Table: Validation Results (Dipole: SPEAG D5GHzV2 SN: 1008)

1. Validation Date	2. ϵ_r (measured)	3. σ (mho/m) (measured)	4. Measured SAR 1g (mW/g)	5. Measured SAR 10g (mW/g)
22 nd April 2008	35.7	4.66	18.8	5.40
24 th April 2008	35.2	4.99	20.6	5.89
28 th April 2008	34.3	5.31	19.5	5.53

6.4.2 Deviation from reference validation values

Currently no IEEE Std 1528-2003 SAR reference values are available in 5.6 GHz band, as a consequence all validation results were compared against the SPEAG calibration reference SAR values.

The SPEAG calibration reference SAR value is the SAR validation result obtained in a specific dielectric liquid using the validation dipole (D5GHzV2) during calibration. The measured one-gram SAR should be within 10% of the expected target reference values shown in below.

Table: Deviation from reference validation values in 5.6 GHz band.

Frequency and Date	Measured SAR 1g (mW/g)	Measured SAR 1g (Normalized to 1W)	SPEAG Calibration reference SAR Value 1g (mW/g)	Deviation From SPEAG Reference (1g)
22 nd April 2008 5200MHz	18.8	75.20	77.6	-3.09
24 th April 2008 5500MHz	20.6	82.40	79.8	3.26
28 th April 2008 5800MHz	19.5	78.00	76.3	2.23

NOTE: All reference validation values are referenced to 1W input power.

6.4.3 Liquid Depth 15cm

During the SAR measurement process the liquid level was maintained to a level of a least 15cm with a tolerance of 0.5cm.

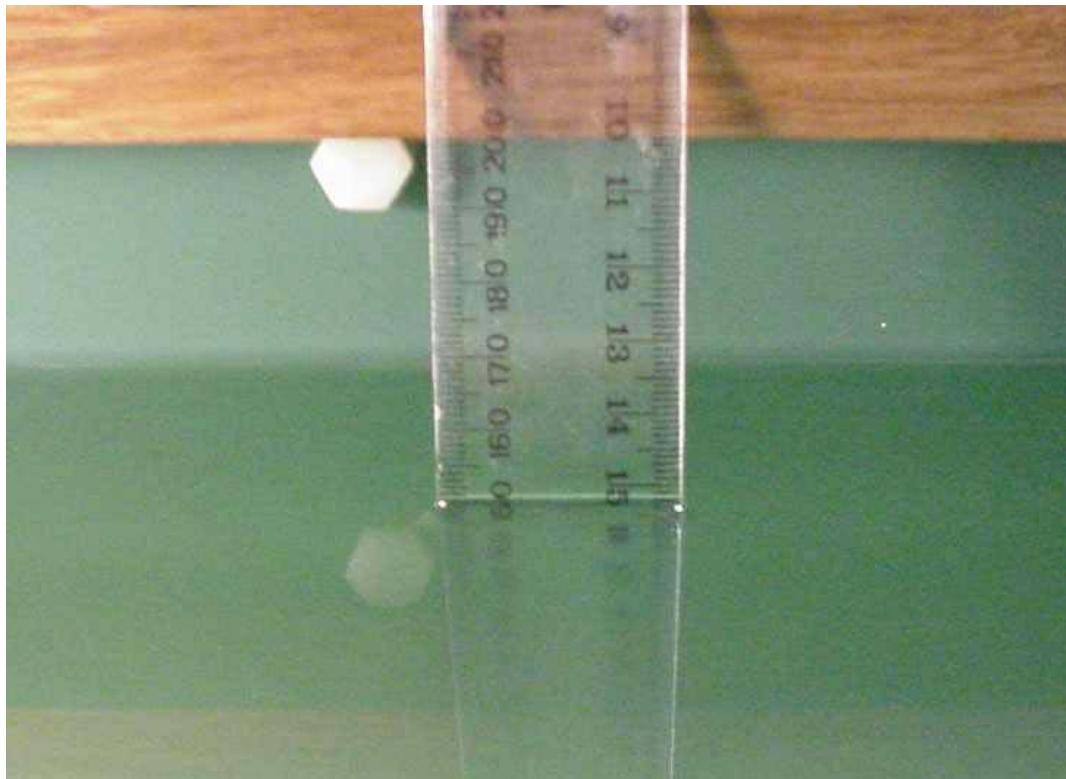


Photo of liquid Depth in Flat Phantom

6.5 Phantom Properties (Size, Shape, Shell Thickness)

The phantom used during the validations was the SAM Phantom model: TP - 1060 from SPEAG. It is a phantom with a single thickness of 2 mm and was filled with the required tissue simulating liquid. The SAM phantom support structures were all non-metallic and spaced more than one device width away in transverse directions.

For SAR testing in the body worn positions an AndreT Flat phantom P 10.1 was used. The phantom thickness is 2.0mm +/- 0.2 mm and was filled with the required tissue simulating liquid. Table below provides a summary of the measured phantom properties.

Table: Phantom Properties

Phantom Properties	Required
Thickness of flat section	2.0mm \pm 0.2mm (bottom section)
Dielectric Constant	<5.0
Loss Tangent	<0.05

Depth of Phantom 200mm
 Length of Flat Section 620mm
 Width of Flat Section 540mm

P 10.1 Flat Phantom



P 10.1 Flat Phantom



6.6 Tissue Material Properties

The dielectric parameters of the brain simulating liquid were measured prior to SAR assessment using the HP85070A dielectric probe kit and HP8753ES Network Analyser. The actual dielectric parameters are shown in the following table.

Table: Measured Brain Simulating Liquid Dielectric Values for Validations

Frequency Band	ϵ_r (measured range)	ϵ_r (target)	σ (mho/m) (measured range)	σ (target)	ρ kg/m ³
5200 MHz Brain	35.7	36.0 \pm 5% (34.2 to 37.8)	4.66	4.76 \pm 5% (4.43 to 4.90)	1000
5500 MHz Brain	35.2	35.6 \pm 5% (33.8 to 37.4)	4.99	4.96 \pm 5% (4.71 to 5.21)	1000
5800 MHz Brain	34.3	35.3 \pm 5% (33.5 to 37.1)	5.31	5.27 \pm 5% (5.01 to 5.53)	1000

NOTE: The brain liquid parameters were within the required tolerances of \pm 5%.

Table: Measured Body Simulating Liquid Dielectric Values for 5200MHz range

Frequency Band	ϵ_r (measured range)	ϵ_r (target)	σ (mho/m) (measured range)	σ (target)	ρ kg/m ³
5180 MHz Muscle	47.1	49.0 \pm 10% (44.1 to 53.9)	5.20	5.3 \pm 10% (4.77 to 5.83)	1000
5260 MHz Muscle	46.8	48.9 \pm 10% (44.0 to 53.8)	5.36	5.4 \pm 10% (4.86 to 5.94)	1000
5320 MHz Muscle	46.6	48.8 \pm 10% (43.9 to 53.7)	5.45	5.4 \pm 10% (4.86 to 5.94)	1000

Table: Measured Body Simulating Liquid Dielectric Values for 5600MHz range

Frequency Band	ϵ_r (measured range)	ϵ_r (target)	σ (mho/m) (measured range)	σ (target)	ρ kg/m ³
5500 MHz Muscle	46.6	48.6 \pm 10% (43.7 to 53.4)	5.68	5.6 \pm 10% (5.04 to 6.16)	1000
5600 MHz Muscle	46.3	48.5 \pm 10% (43.8 to 53.5)	5.84	5.77 \pm 10% (5.20 to 6.34)	1000
5700 MHz Muscle	46.0	48.4 \pm 10% (43.6 to 53.2)	6.00	5.9 \pm 10% (5.31 to 6.49)	1000

Table: Measured Body Simulating Liquid Dielectric Values for 5800MHz range

Frequency Band	ϵ_r (measured range)	ϵ_r (target)	σ (mho/m) (measured range)	σ (target)	ρ kg/m ³
5745 MHz Muscle	44.9	48.3 \pm 10% (43.5 to 53.1)	5.97	5.9 \pm 10% (5.31 to 6.49)	1000
5785 MHz Muscle	44.8	48.2 \pm 10% (43.4 to 53.0)	6.04	6.0 \pm 10% (5.4 to 6.60)	1000
5825 MHz Muscle	44.7	48.2 \pm 10% (43.4 to 53.0)	6.10	6.0 \pm 10% (5.4 to 6.60)	1000

NOTE: The muscle liquid parameters were within the required tolerances of \pm 10%.

6.6.1 Liquid Temperature and Humidity

The humidity and dielectric/ambient temperatures were recorded during the assessment of the tissue material dielectric parameters. The difference between the ambient temperature of the liquid during the dielectric measurement and the temperature during tests was less than |2|°C.

Table: Temperature and Humidity recorded for each day

Date	Ambient Temperature (°C)	Liquid Temperature (°C)	Humidity (%)
22 nd April 2008	21.8	21.2	58.0
24 th April 2008	21.0	20.8	46.0
28 th April 2008	21.8	21.4	33.0

6.7 Simulated Tissue Composition Used for SAR Test

A low loss clamp was used to position the TABLET underneath the phantom surface. Small pieces of foam were then used to press the TABLET flush against the phantom surface.

Table: Tissue Type: Muscle @ 5600MHz

Volume of Liquid: 60 Litres

EMCT Liquid
Composition
Distilled Water
Salt
Triton X-100

6.8 Device Holder for Laptops and P 10.1 Phantom

A low loss clamp was used to position the Laptop underneath the phantom surface. Small pieces of foam were then used to press the laptop flush against the phantom surface.

Refer to Appendix A for photographs of device positioning

7.0 SAR MEASUREMENT PROCEDURE USING DASY4

The SAR evaluation was performed with the SPEAG DASY4 system. A summary of the procedure follows:

- a) A measurement of the SAR value at a fixed location is used as a reference value for assessing the power drop of the EUT. The SAR at this point is measured at the start of the test, and then again at the end of the test.
- b) The SAR distribution at the exposed flat section of the flat phantom is measured at a distance of 2.0 mm from the inner surface of the shell. The area covers the entire dimension of the EUT and the horizontal grid spacing is 15 mm x 15 mm. The actual Area Scan has dimensions of 100mm x 140mm surrounding the test device. Based on this data, the area of the maximum absorption is determined by Spline interpolation.
- c) Around this point, a volume of 24 mm x 24 mm x 20 mm is assessed by measuring 7 x 7 x 9 points. On the basis of this data set, the spatial peak SAR value is evaluated with the following procedure:
 - (i) The data at the surface are extrapolated, since the centre of the dipoles is 1.0 mm away from the tip of the probe and the distance between the surface and the lowest measuring point is 2.0 mm. The extrapolation is based on a least square algorithm. A polynomial of the fourth order is calculated through the points in z-axes. This polynomial is then used to evaluate the points between the surface and the probe tip.
 - (ii) The maximum interpolated value is searched with a straightforward algorithm. Around this maximum the SAR values averaged over the spatial volumes (1 g and 10 g) are computed using the 3D-Spline interpolation algorithm. The 3D-Spline is composed of three one-dimensional splines with the "Not a knot"- condition (in x, y and z-direction). The volume is integrated with the trapezoidal – algorithm. One thousand points (10 x 10 x 10) are interpolated to calculate the averages.
 - (iii) All neighbouring volumes are evaluated until no neighbouring volume with a higher average value is found.
 - (iv) The SAR value at the same location as in Step (a) is again measured to evaluate the actual power drift.

8.0 MEASUREMENT UNCERTAINTY

The uncertainty analysis is based on the template listed in the IEEE Std 1528-2003 for both Handset SAR tests and Validation uncertainty. The measurement uncertainty of a specific device is evaluated independently.

Table: Uncertainty Budget for DASY4 Version V4.7 Build 53 – EUT SAR test 5GHz

a	b	c	d	e= f(d,k)	f	g	h=cxf/e	i=cxg/e	k
Uncertainty Component	Sec.	Tol. (%)	Prob. Dist.	Div.	C _i (1g)	C _i (10g)	1g u _i (%)	10g u _i (%)	v _i
Measurement System									
Probe Calibration (k=1) (numerical calibration)	E.2.1	6.8	N	1	1	1	6.8	6.8	∞
Axial Isotropy	E.2.2	4.7	R	1.73	0.707	0.707	1.9	1.9	∞
Hemispherical Isotropy	E.2.2	9.6	R	1.73	0.707	0.707	3.9	3.9	∞
Boundary Effect	E.2.3	2	R	1.73	1	1	1.2	1.2	∞
Linearity	E.2.4	4.7	R	1.73	1	1	2.7	2.7	∞
System Detection Limits	E.2.5	1	R	1.73	1	1	0.6	0.6	∞
Readout Electronics	E.2.6	1	N	1	1	1	1.0	1.0	∞
Response Time	E.2.7	0.8	R	1.73	1	1	0.5	0.5	∞
Integration Time	E.2.8	2.6	R	1.73	1	1	1.5	1.5	∞
RF Ambient Conditions	E.6.1	0.075	R	1.73	1	1	0.0	0.0	∞
Probe Positioner Mechanical Tolerance	E.6.2	0.8	R	1.73	1	1	0.5	0.5	∞
Probe Positioning with respect to Phantom Shell	E.6.3	5.7	R	1.73	1	1	3.3	3.3	∞
Extrapolation, interpolation and Integration Algorithms for Max. SAR Evaluation	E.5	4	R	1.73	1	1	2.3	2.3	∞
Test Sample Related									
Test Sample Positioning	E.4.2	2.9	N	1	1	1	2.9	2.9	11
Device Holder Uncertainty	E.4.1	3.6	N	1	1	1	3.6	3.6	7
Output Power Variation – SAR Drift Measurement	6.6.2	11.76	R	1.73	1	1	6.8	6.8	∞
Phantom and Tissue Parameters									
Phantom Uncertainty (shape and thickness tolerances)	E.3.1	4	R	1.73	1	1	2.3	2.3	∞
Liquid Conductivity – Deviation from target values	E.3.2	10	R	1.73	0.64	0.43	3.7	2.5	∞
Liquid Conductivity – Measurement uncertainty	E.3.3	2.5	N	1	0.64	0.43	1.6	1.1	5
Liquid Permittivity – Deviation from target values	E.3.2	10	R	1.73	0.6	0.49	3.5	2.8	∞
Liquid Permittivity – Measurement uncertainty	E.3.3	2.5	N	1	0.6	0.49	1.5	1.2	5
Combined standard Uncertainty			RSS				14.1	13.6	154
Expanded Uncertainty (95% CONFIDENCE LEVEL)			k=2				28.1	27.11	

Estimated total measurement uncertainty for the DASY4 measurement system was $\pm 14.1\%$. The extended uncertainty (K = 2) was assessed to be $\pm 28.1\%$ based on 95% confidence level. The uncertainty is not added to the measurement result.

Table: Uncertainty Budget for DASY4 Version V4.7 Build 53 – Validation 5GHz

a	b	c	d	e= f(d,k)	f	g	h=cxf/e	i=cxg/e	k
Uncertainty Component	Sec.	Tol. (%)	Prob. Dist.	Div.	C _i (1g)	C _i (10g)	1g u _i (%)	10g u _i (%)	v _i
Measurement System									
Probe Calibration (k=1) (standard calibration)	E.2.1	6.6	N	1	1	1	6.6	6.6	∞
Axial Isotropy	E.2.2	4.7	R	1.73	1	1	2.7	2.7	∞
Hemispherical Isotropy	E.2.2	0	R	1.73	1	1	0.0	0.0	∞
Boundary Effect	E.2.3	2	R	1.73	1	1	1.2	1.2	∞
Linearity	E.2.4	4.7	R	1.73	1	1	2.7	2.7	∞
System Detection Limits	E.2.5	1	R	1.73	1	1	0.6	0.6	∞
Readout Electronics	E.2.6	1	N	1	1	1	1.0	1.0	∞
Response Time	E.2.7	0	R	1.73	1	1	0.0	0.0	∞
Integration Time	E.2.8	0	R	1.73	1	1	0.0	0.0	∞
RF Ambient Conditions	E.6.1	0.075	R	1.73	1	1	0.0	0.0	∞
Probe Positioner Mechanical Tolerance	E.6.2	0.8	R	1.73	1	1	0.5	0.5	∞
Probe Positioning with respect to Phantom Shell	E.6.3	5.7	R	1.73	1	1	3.3	3.3	∞
Extrapolation, interpolation and Integration Algorithms for Max. SAR Evaluation	E.5	4	R	1.73	1	1	2.3	2.3	∞
Test Sample Related									
Dipole Axis to Liquid distance	E.4.2	2	N	1	1	1	2.0	2.0	11
Output Power Variation – SAR Drift Measurement	6.6.2	4.7	R	1.73	1	1	2.7	2.7	∞
Phantom and Tissue Parameters									
Phantom Uncertainty (shape and thickness tolerances)	E.3.1	4	R	1.73	1	1	2.3	2.3	∞
Liquid Conductivity – Deviation from target values	E.3.2	5	R	1.73	0.64	0.43	1.8	1.2	∞
Liquid Conductivity – Measurement uncertainty	E.3.3	2.5	N	1	0.64	0.43	1.6	1.1	5
Liquid Permittivity – Deviation from target values	E.3.2	5	R	1.73	0.6	0.49	1.7	1.4	∞
Liquid Permittivity – Measurement uncertainty	E.3.3	2.5	N	1	0.6	0.49	1.5	1.2	5
Combined standard Uncertainty			RSS				10.3	10.0	154
Expanded Uncertainty (95% CONFIDENCE LEVEL)			k=2				20.5	20.02	

Estimated total measurement uncertainty for the DASY4 measurement system was $\pm 10.3\%$. The extended uncertainty (K = 2) was assessed to be $\pm 20.5\%$ based on 95% confidence level. The uncertainty is not added to the measurement result.

9.0 EQUIPMENT LIST AND CALIBRATION DETAILS

Table: SPEAG DASY4 Version V4.7 Build 53

Equipment Type	Manufacturer	Model Number	Serial Number	Calibration Due	Used For this Test?
Robot - Six Axes	Staubli	RX90BL	N/A	Not applicable	✓
Robot Remote Control	SPEAG	CS7MB	RX90B	Not applicable	✓
SAM Phantom	SPEAG	N/A	1260	Not applicable	✓
SAM Phantom	SPEAG	N/A	1060	Not applicable	
Flat Phantom	AndreT	10.1	P 10.1	Not Applicable	✓
Flat Phantom	AndreT	9.1	P 9.1	Not Applicable	
Flat Phantom	SPEAG	PO1A 6mm	1003	Not Applicable	
Data Acquisition Electronics	SPEAG	DAE3 V1	359	03-July-2008	
Data Acquisition Electronics	SPEAG	DAE3 V1	442	26-Feb-09	✓
Probe E-Field - Dummy	SPEAG	DP1	N/A	Not applicable	
Probe E-Field	SPEAG	ET3DV6	1380	18-Dec-2008	
Probe E-Field	SPEAG	ET3DV6	1377	09-July-2008	
Probe E-Field	SPEAG	ES3DV6	3029	Not Used	
Probe E-Field	SPEAG	EX3DV4	3563	13-July-2008	✓
Antenna Dipole 300 MHz	SPEAG	D300V2	1005	14-Dec-2009	
Antenna Dipole 450 MHz	SPEAG	D450V2	1009	14-Dec-2008	
Antenna Dipole 900 MHz	SPEAG	D900V2	047	6-July-2008	
Antenna Dipole 1640 MHz	SPEAG	D1640V2	314	30-June-2008	
Antenna Dipole 1800 MHz	SPEAG	D1800V2	242	3-July-2008	
Antenna Dipole 1950 MHz	SPEAG	D1950V3	1113	5-March-2009	
Antenna Dipole 3500 MHz	SPEAG	D3500V2	1002	06-July-2008	
Antenna Dipole 2450 MHz	SPEAG	D2450V2	724	13-Dec-2008	
Antenna Dipole 5600 MHz	SPEAG	D5GHzV2	1008	07-Dec-2009	✓
RF Amplifier	EIN	603L	N/A	Not applicable	
RF Amplifier	Mini-Circuits	ZHL-42	N/A	Not applicable	
RF Amplifier	Mini-Circuits	ZVE-8G	N/A	Not applicable	✓
Synthesized signal generator	Hewlett Packard	ESG-D3000A	GB37420238	*In test	
RF Power Meter Dual	Hewlett Packard	437B	3125012786	30-May-2008	✓
RF Power Sensor 0.01 - 18 GHz	Hewlett Packard	8481H	1545A01634	30-May-2008	✓
RF Power Meter Dual	Gigatronics	8542B	1830125	11-May-2008	
RF Power Sensor	Gigatronics	80301A	1828805	11-May-2008	
RF Power Meter Dual	Hewlett Packard	435A	1733A05847	*In test	✓
RF Power Sensor	Hewlett Packard	8482A	2349A10114	*In test	✓
Network Analyser	Hewlett Packard	8714B	GB3510035	06-Sept-2008	
Network Analyser	Hewlett Packard	8753ES	JP39240130	02 Oct-2008	✓
Dual Directional Coupler	Hewlett Packard	778D	1144 04700	*In test	
Dual Directional Coupler	NARDA	3022	75453	*In test	✓

* Calibrated during the test for the relevant parameters.

10.0 OET BULLETIN 65 – SUPPLEMENT C TEST METHOD

Notebooks should be evaluated in normal use positions, typical for lap-held bottom-face only. However the number of positions will depend on the number of configurations the laptop can be operated in. The “LIFEBOOK T SERIES” can be used in either a conventional laptop position (see Appendix A1) or a Tablet configuration.

10.1.1 Lap Held Position

The device was suspended underneath the 2.00mm flat section of the AndreT Flat phantom P 10.1, with the base of the device pressed against the phantom. This orientation simulates the normal use of the device as a conventional notebook, with the PC being placed on the lap of a user.

10.1.2 “Tablet” Position Definition (0mm spacing)

The device was tested in the 2.00 mm flat section of the AndreT Flat phantom P 10.1 for the “Tablet” position. The Transceiver was placed at the bottom of the phantom and suspended in such way that the back of the device was touching the phantom. This device orientation simulates the PC’s normal use – being held on the lap of the user. A spacing of 0mm ensures that the SAR results are conservative and represent a worst-case position.

10.1.3 “Edge On” Position

The device was tested in the (2.00 mm) flat section of the AndreT phantom for the “Edge On” position. The Antenna edge of the Transceiver was placed underneath the flat section of the phantom and suspended until the edge touched the phantom. *Refer to Appendix A for photos of measurement positions.*



Accreditation No. 5292

This document must not be copied or reproduced, except in full without the written permission of the Manager, EMC Technologies Pty Ltd. The certificate on page 3 may be reproduced in full.
www.emctech.com.au

10.2 List of All Test Cases (Antenna In/Out, Test Frequencies, User Modes)


The device has a fixed antenna. Depending on the measured SAR level up to three test channels with the test sample operating at maximum power, as specified in section 4.0 were recorded. The following table represents the matrix used to determine what testing was required.

Table: Testing configurations

Phantom Configuration	*Device Mode	Antenna	Test Configurations		
			Channel (Low)	Channel (Middle)	Channel (High)
Lap Held	OFDM 5GHz All Bands	A		X	
		B		X	
Tablet	OFDM 5GHz All Bands	A		X	
		B		X	
Edge On	OFDM 5GHz All Bands	A		X	
		B		X	

Legend

 Testing Required in this configuration

 Testing required in this configuration only if SAR of middle channel is more than 3dB below the SAR limit or it is the worst case.

10.3 FCC RF Exposure Limits for Occupational/ Controlled Exposure

Spatial Peak SAR Limits For:

Partial-Body:	8.0 mW/g (averaged over any 1g cube of tissue)
Hands, Wrists, Feet and Ankles:	20.0 mW/g (averaged over 10g cube of tissue)

10.4 FCC RF Exposure Limits for Un-controlled/Non-occupational

Spatial Peak SAR Limits For:

Partial-Body:	1.6 mW/g (averaged over any 1g cube of tissue)
Hands, Wrists, Feet and Ankles:	4.0 mW/g (averaged over 10g cube of tissue)

11.0 SAR MEASUREMENT RESULTS

The SAR values averaged over 1g tissue masses were determined for the sample device for all test configurations listed in section 10.2.

11.1 GHz Band SAR Results

Table: SAR MEASUREMENT RESULTS Lower Band – OFDM Mode

Test Position	Plot No.	Ant	Bit rate Mode (Mbps)	Channel Bandwidth (MHz)	Test Channel	Test Freq (MHz)	Measured 1g SAR Results (mW/g)	Measured Drift (dB)
Tablet	1	A	6	-	52	5240	0.028	-0.188
	2	B		-	52		0.056	0.233
	3	C		-	52		0.140	0.127
Edge On Bottom	4	C	6	-	36	5180	1.12	0.409
	5	C		-	52	5240	0.837	0.077
	6	C		-	64	5320	0.637	0.367
Edge On Bottom	7	C	HT0	20 MHz	52	5240	0.619	0.143
	8	C		40 MHz	52		0.582	-0.01
Laps On	9	C	6	-	52	5240	0.113	0.435
Edge On Side	10	B	6	-	52	5240	0.030	-0.168

NOTE: The measurement uncertainty of 28.1% for 5GHz testing is not added to the result.

The highest SAR level recorded in the 5.2 GHz band was 1.12mW/g as evaluated in a 1g cube of averaging mass. This value was obtained in the Edge On Bottom position in OFDM mode, utilizing channel 36 (5180 MHz) and antenna C.

Table: SAR MEASUREMENT RESULTS Middle Band – OFDM Mode

Test Position	Plot No.	Ant	Bit rate Mode (Mbps)	Channel Bandwidth (MHz)	Test Channel	Test Freq (MHz)	Measured 1g SAR Results (mW/g)	Measured Drift (dB)
Tablet	11	A	6	-	120	5600	0.047	-0.235
	12	B		-	120	5600	0.061	-0.006
	13	C		-	120	5600	0.184	0.309
Edge On Bottom	14	C	6	-	100	5500	1.13	-0.086
	15	C		-	120	5600	1.51	-0.482
	16	C		-	140	5700	1.41	-0.464
Edge On Side	17	B	6	-	120	5600	0.039	0.049
Laps On	18	C	6	-	120	5600	0.130	0.036

NOTE: The measurement uncertainty of 28.1% for 5GHz testing is not added to the result.

The highest SAR level recorded in the 5.6 GHz band was 1.51mW/g as evaluated in a 1g cube of averaging mass. This value was obtained in Edge On Bottom position in OFDM mode, utilizing channel 120 (5600MHz) and antenna C.

Table: SAR MEASUREMENT RESULTS Upper Band – OFDM Mode

Test Position	Plot No.	Ant	Bit rate Mode (Mbps)	Channel Bandwidth (MHz)	Test Channel	Test Freq (MHz)	Measured 1g SAR Results (mW/g)	Measured Drift (dB)
Tablet	19	A	6	-	157	5785	0.018	0.231
	20	B		-	157	5785	0.058	-0.064
	21	C		-	157	5785	0.355	0.099
Edge On Bottom	22	C	6	-	149	5745	1.54	-0.111
	23	C		-	157	5785	1.46	0.016
	24	C		-	165	5825	1.44	-0.158
Edge On Side	25	B	6	-	157	5785	0.039	0.191
Laps On	26	C	6	-	157	5785	0.365	0.140

NOTE: The measurement uncertainty of 28.1% for 5GHz testing is not added to the result.

The highest SAR level recorded in the 5.8 GHz band was 1.54mW/g as evaluated in a 1g cube of averaging mass. This value was obtained in Edge On Bottom position in OFDM mode, utilizing channel 149 (5745MHz) and antenna C.

12.0 COMPLIANCE STATEMENT

The Fujitsu TABLET PC, Model: T5010 with INTEL Mini-PCI Wireless LAN Module (WIFI LINK 5300 (SHIRLEY PEAK) 802.11a/b/g/n), Model: 533AN_HMW & TAIYO YUDEN Bluetooth Module, Model: EYSMJCS was found to comply with the FCC and RSS-102 SAR requirements.

The highest SAR level recorded was 1.54mW/g for a 1g cube. This value was measured at 5745 MHz (channel 149) in the "Edge On Bottom" position in OFDM modulation mode at the antenna C. This was below the limit of 1.6 mW/g for uncontrolled exposure, but was within the band of measurement uncertainty around the limit.

APPENDIX A1 TEST SAMPLE PHOTOGRAPHS

T5010 Host - Conventional Laptop Configuration



T5010 Host - Tablet Configuration



APPENDIX A2 TEST SAMPLE PHOTOGRAPHS

Model: 533AN_HMW – WLAN Module
Front



Back



APPENDIX A3 TEST SAMPLE PHOTOGRAPHS

Battery 1



Battery 2




533AN_HMW inside the Fujitsu TABLET Computer



APPENDIX A4 TEST SETUP PHOTOGRAPHS

Tablet Position

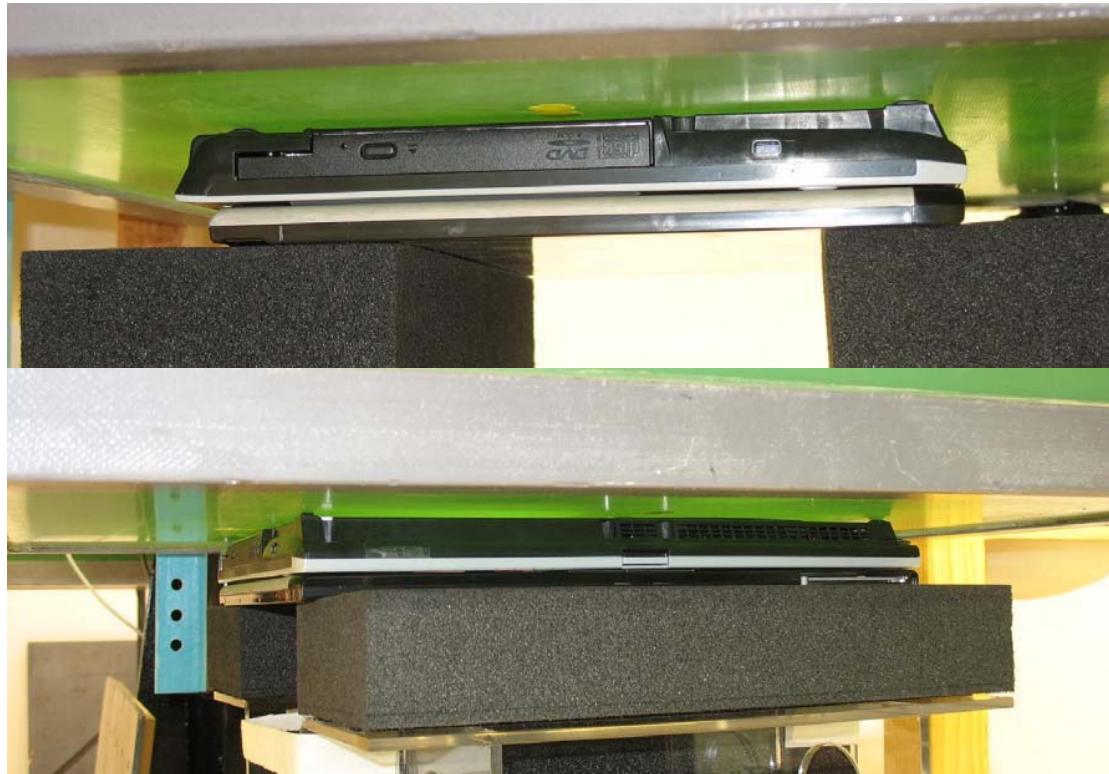


APPENDIX A5 TEST SETUP PHOTOGRAPHS

Edge On Bottom Position



APPENDIX A6 TEST SETUP PHOTOGRAPHS

Edge On Side Position

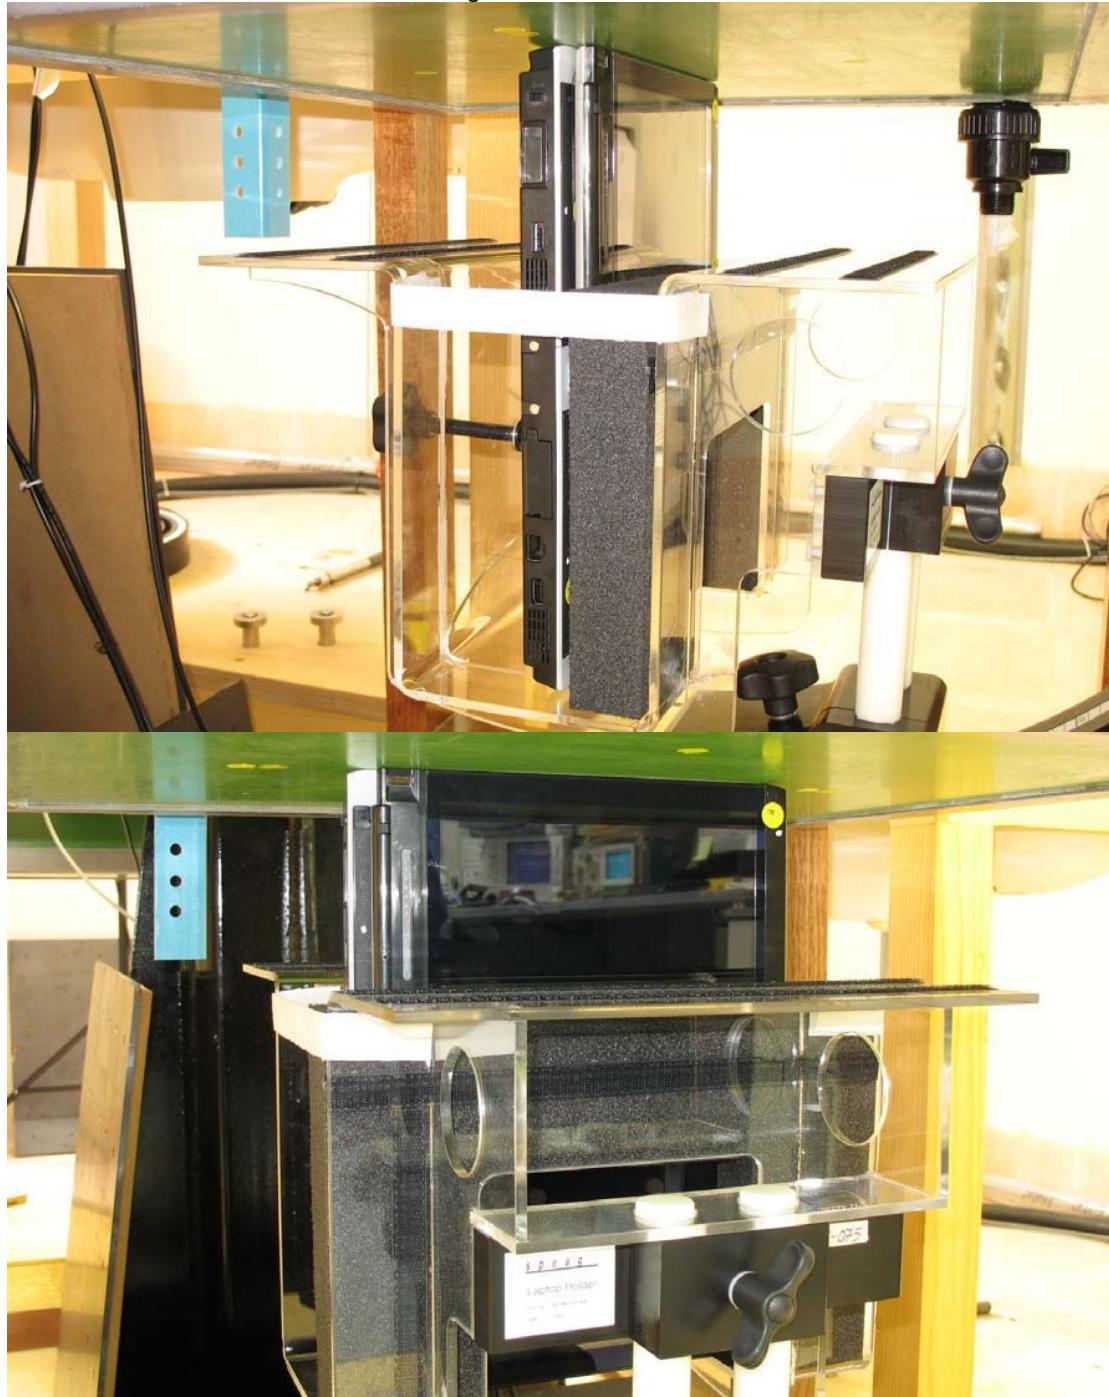

This document must not be copied or reproduced, except in full without the written permission of the Manager, EMC Technologies Pty Ltd. The certificate on page 3 may be reproduced in full.
www.emctech.com.au

APPENDIX A7 TEST SETUP PHOTOGRAPHS

Lap Held Position



APPENDIX B PLOTS OF THE SAR MEASUREMENTS

Plots of the measured SAR distributions inside the phantom are given in this Appendix for all tested configurations. The spatial peak SAR values were assessed with the procedure described in this report.

Table: 5200 MHz Band SAR Measurement Plot Numbers

Test Position	Plot No.	Ant	Bit rate Mode (Mbps)	Channel Bandwidth (MHz)	Test Channel
Tablet	1	A	6	-	52
	2	B		-	52
	3	C		-	52
Z-Axis graphs for Plots 1 to 3					
Edge On Bottom	4	C	6	-	36
	5	C		-	52
	6	C		-	64
Z-Axis graphs for Plots 4 to 6					
Edge On Bottom	7	C	HT0	20	52
	8	C		40	52
Z-Axis graphs for Plots 7 to 8					
Laps On	9	C	6	-	52
Edge On Side	10	B	6	-	52
Z-Axis graphs for Plots 9 to 10					

Table: 5600 MHz Band SAR Measurement Plot Numbers

Test Position	Plot No.	Ant	Bit rate Mode (Mbps)	Channel Bandwidth (MHz)	Test Channel
Tablet	11	A	6	-	120
	12	B		-	120
	13	C		-	120
Z-Axis graphs for Plots 11 to 13					
Edge On Bottom	14	C	6	-	100
	15	C		-	120
	16	C		-	140
Z-Axis graphs for Plots 14 to 16					
Edge On Side	17	B	6	-	120
Laps On	18	C	6	-	120
Z-Axis graphs for Plots 17 to 18					

Table: 5800 MHz Band SAR Measurement Plot Numbers

Test Position	Plot No.	Ant	Bit rate Mode (Mbps)	Channel Bandwidth (MHz)	Test Channel
Tablet	19	A	6	-	157
	20	B		-	157
	21	C		-	157
Z-Axis graphs for Plots 19 to 21					
Edge On Bottom	22	C	6	-	149
	23	C		-	157
	24	C		-	165
Z-Axis graphs for Plots 22 to 24					
Edge On Side	25	B	6	-	157
Laps On	26	C	6	-	157
Z-Axis graphs for Plots 25 to 26					

Table: Validation Plots

Plot 27	Validation 5200 MHz 22 nd April 2008
Plot 28	Validation 5500 MHz 24 th April 2008
Plot 29	Validation 5800 MHz 28 th April 2008
Z-Axis graphs for Plots 27 to 29	

Test Date: 22 April 2008

File Name: Tablet OFDM 5.2 GHz Ant A Bluetooth Off 22-04-08.da4

DUT: **Fujitsu Notebook Seneca with Shirley Peak 11abgn and Bluetooth; Type: 533AN_HMW; Serial: MAC: 0016EA042224**

- * Communication System: OFDM 5250 MHz; Frequency: 5260 MHz; Duty Cycle: 1:1
- * Medium parameters used: $\sigma = 5.36277 \text{ mho/m}$, $\epsilon_r = 46.7909$; $\rho = 1000 \text{ kg/m}^3$
- Electronics: DAE3 Sn442; Probe: EX3DV4 - SN3563; ConvF(3.79, 3.79, 3.79)
- Phantom: Flat Phantom 10.1; Serial: P 10.1; Phantom section: Flat 2.2 Section

Channel 052 Test/Area Scan (81x121x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.083 mW/g


Channel 052 Test/Zoom Scan (7x7x9)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2.5mm

Reference Value = 1.87 V/m; Power Drift = -0.188 dB

Peak SAR (extrapolated) = 0.235 W/kg

SAR(1 g) = 0.028 mW/g; SAR(10 g) = 0.00809 mW/g

Maximum value of SAR (measured) = 0.051 mW/g

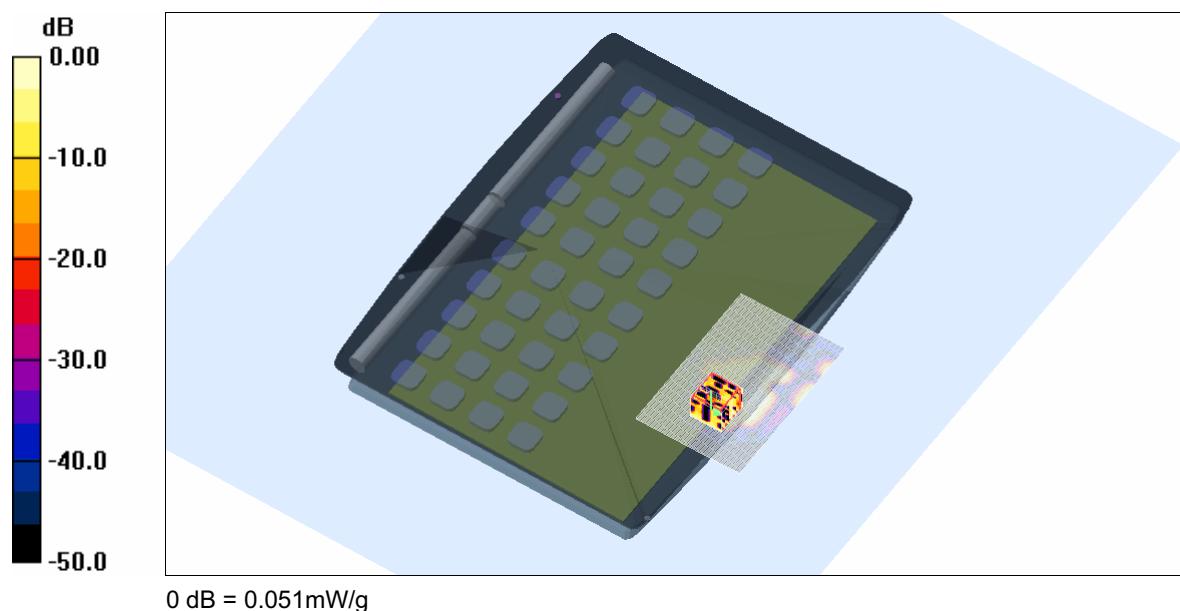

SAR MEASUREMENT PLOT 1

Ambient Temperature
Liquid Temperature
Humidity

21.8 Degrees Celsius
21.2 Degrees Celsius
58.0 %



This document must not be copied or reproduced, except in full without the written permission of the Manager, EMC Technologies Pty Ltd. The certificate on page 3 may be reproduced in full.
www.emctech.com.au

Test Date: 22 April 2008

File Name: Tablet OFDM 5.2 GHz Ant B Bluetooth Off 22-04-08.da4

DUT: **Fujitsu Notebook Seneca with Shirley Peak 11abgn and Bluetooth; Type: 533AN_HMW; Serial: MAC: 0016EA042224**

- * Communication System: OFDM 5250 MHz; Frequency: 5260 MHz; Duty Cycle: 1:1
- * Medium parameters used: $\sigma = 5.36277 \text{ mho/m}$, $\epsilon_r = 46.7909$; $\rho = 1000 \text{ kg/m}^3$
- Electronics: DAE3 Sn442; Probe: EX3DV4 - SN3563; ConvF(3.79, 3.79, 3.79)
- Phantom: Flat Phantom 10.1; Serial: P 10.1; Phantom section: Flat 2.2 Section

Channel 052 Test/Area Scan (81x121x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.129 mW/g


Channel 052 Test/Zoom Scan (7x7x9)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2.5mm

Reference Value = 3.48 V/m; Power Drift = 0.233 dB

Peak SAR (extrapolated) = 0.292 W/kg

SAR(1 g) = 0.056 mW/g; SAR(10 g) = 0.020 mW/g

Maximum value of SAR (measured) = 0.113 mW/g

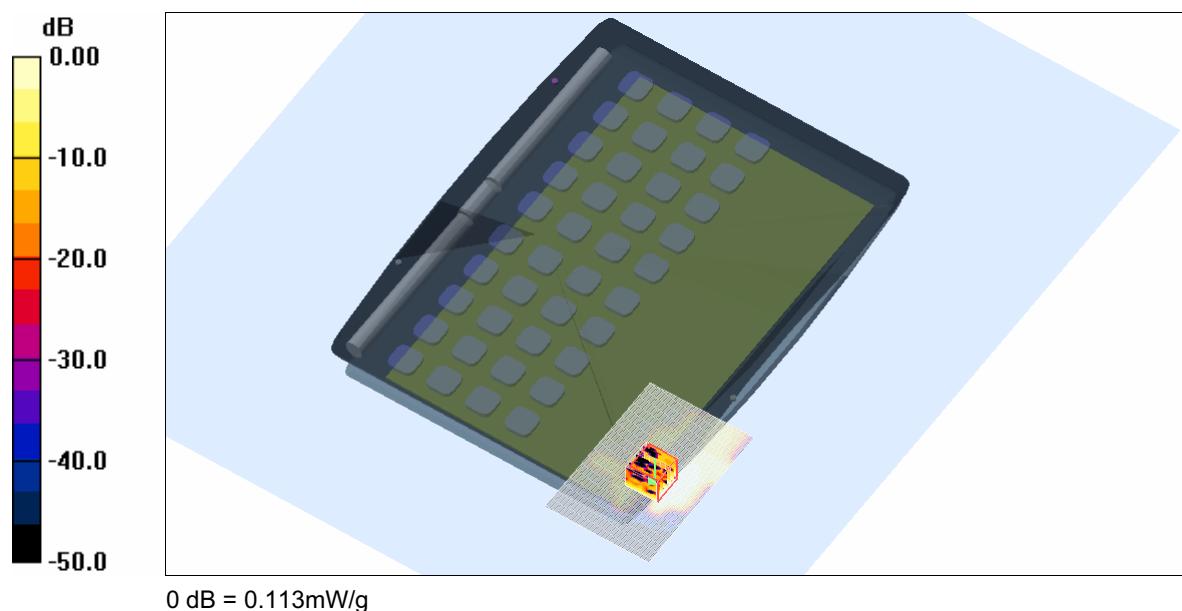

Ambient Temperature
Liquid Temperature
Humidity

21.8 Degrees Celsius
21.2 Degrees Celsius
58.0 %

Test Date: 22 April 2008

File Name: Tablet OFDM 5.2 GHz Ant C Bluetooth Off 22-04-08.da4

DUT: **Fujitsu Notebook Seneca with Shirley Peak 11abgn and Bluetooth; Type: 533AN_HMW; Serial: MAC: 0016EA042224**

* Communication System: OFDM 5250 MHz; Frequency: 5260 MHz; Duty Cycle: 1:1

* Medium parameters used: $\sigma = 5.36277 \text{ mho/m}$, $\epsilon_r = 46.7909$; $\rho = 1000 \text{ kg/m}^3$

- Electronics: DAE3 Sn442; Probe: EX3DV4 - SN3563; ConvF(3.79, 3.79, 3.79)

- Phantom: Flat Phantom 10.1; Serial: P 10.1; Phantom section: Flat 2.2 Section

Channel 052 Test/Area Scan (81x141x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.277 mW/g


Channel 052 Test/Zoom Scan (7x7x9)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2.5mm

Reference Value = 3.88 V/m; Power Drift = 0.127 dB

Peak SAR (extrapolated) = 0.500 W/kg




SAR(1 g) = 0.140 mW/g; SAR(10 g) = 0.048 mW/g

Maximum value of SAR (measured) = 0.275 mW/g

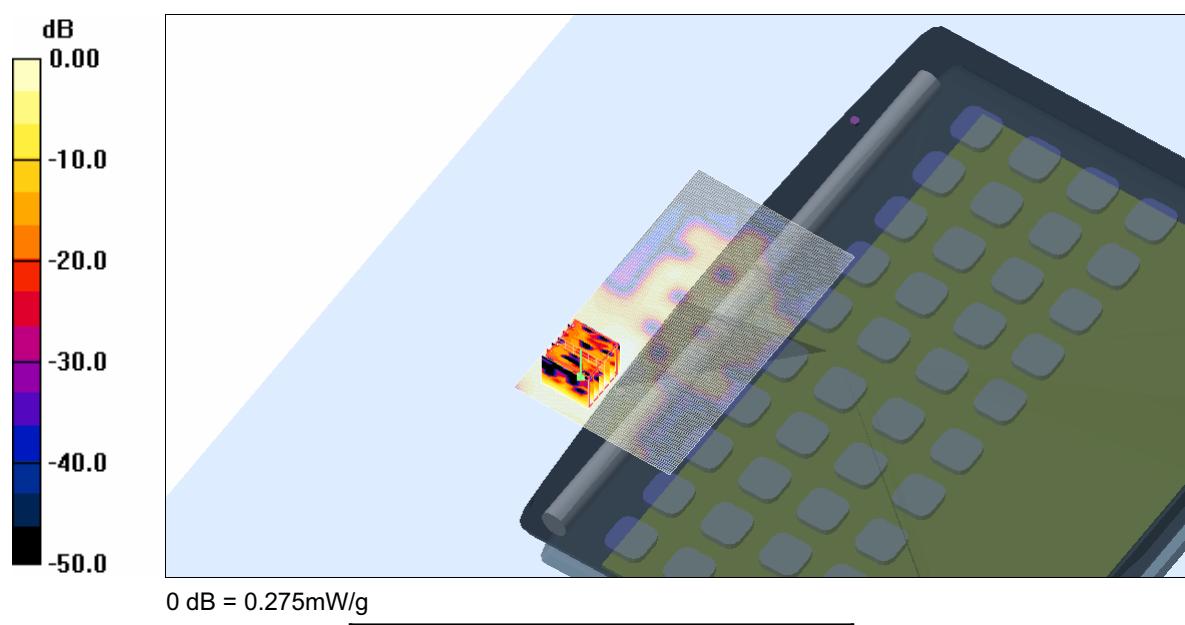

Ambient Temperature
Liquid Temperature
Humidity

21.8 Degrees Celsius
21.2 Degrees Celsius
58.0 %

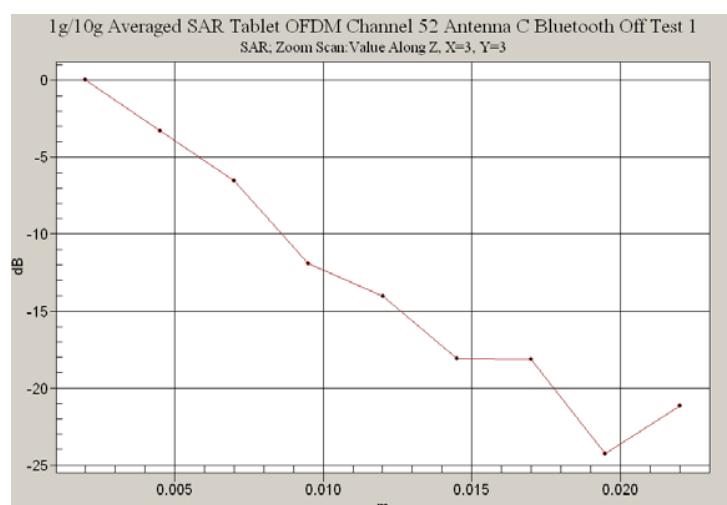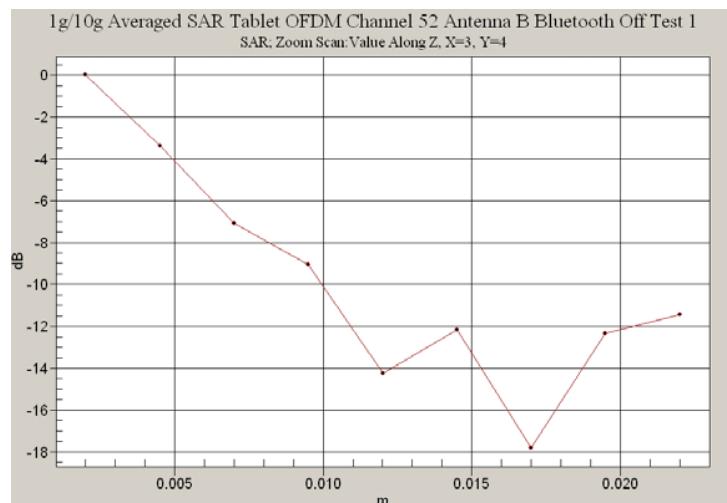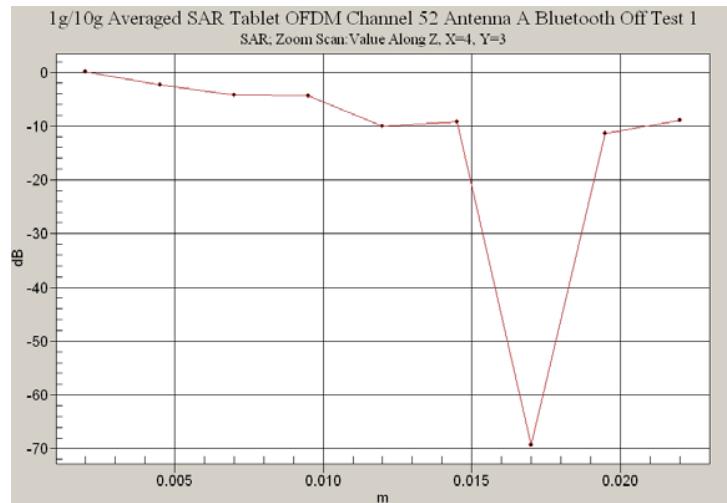

Test Date: 22 April 2008

File Name: Edge On Bottom OFDM 5.2 GHz Ant C Bluetooth Off 22-04-08.da4

DUT: Fujitsu Notebook Seneca with Shirley Peak 11abgn and Bluetooth; Type: 533AN_HMW; Serial: MAC: 0016EA042224

* Communication System: OFDM 5250 MHz; Frequency: 5180 MHz; Duty Cycle: 1:1

* Medium parameters used: $\sigma = 5.20457 \text{ mho/m}$, $\epsilon_r = 47.1037$; $\rho = 1000 \text{ kg/m}^3$

- Electronics: DAE3 Sn442; Probe: EX3DV4 - SN3563; ConvF(3.79, 3.79, 3.79)

- Phantom: Flat Phantom 10.1; Serial: P 10.1; Phantom section: Flat 2.2 Section

Channel 036 Test/Area Scan (101x141x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 2.44 mW/g


Channel 036 Test/Zoom Scan (7x7x9)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2.5mm

Reference Value = 7.80 V/m; Power Drift = 0.409 dB

Peak SAR (extrapolated) = 4.29 W/kg

SAR(1 g) = 1.12 mW/g; SAR(10 g) = 0.334 mW/g

Maximum value of SAR (measured) = 2.33 mW/g

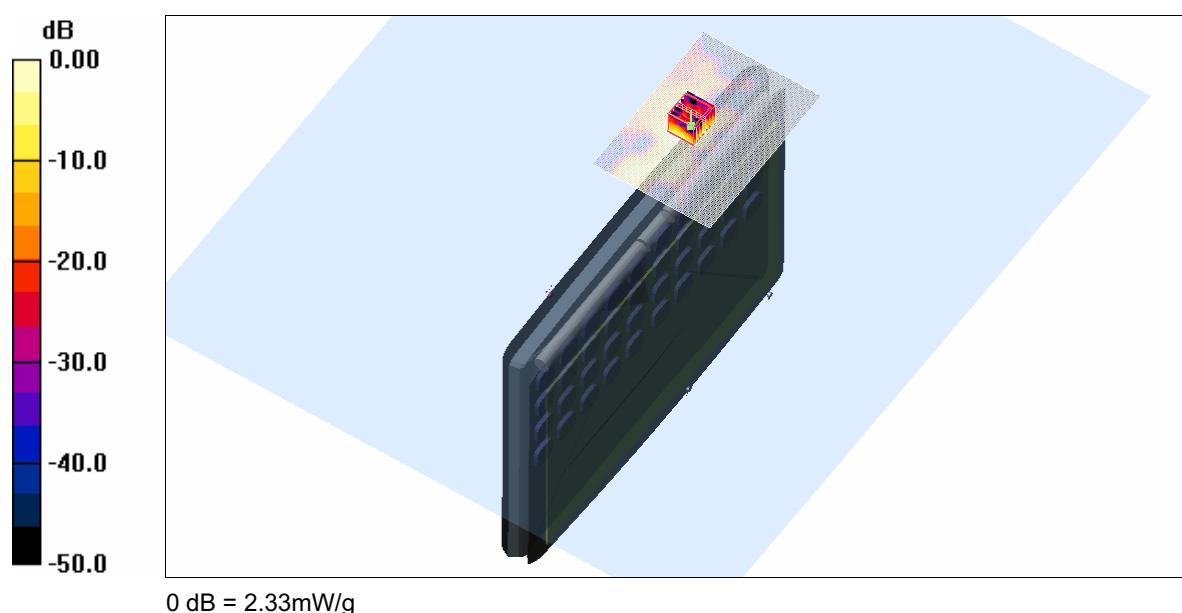

Ambient Temperature

21.8 Degrees Celsius

Liquid Temperature

21.2 Degrees Celsius

Humidity

58.0 %



This document must not be copied or reproduced, except in full without the written permission of the Manager, EMC Technologies Pty Ltd. The certificate on page 3 may be reproduced in full.
www.emctech.com.au

Test Date: 22 April 2008

File Name: Edge On Bottom OFDM 5.2 GHz Ant C Bluetooth Off 22-04-08.da4

DUT: Fujitsu Notebook Seneca with Shirley Peak 11abgn and Bluetooth; Type: 533AN_HMW; Serial: MAC: 0016EA042224

* Communication System: OFDM 5250 MHz; Frequency: 5260 MHz; Duty Cycle: 1:1

* Medium parameters used: $\sigma = 5.36277 \text{ mho/m}$, $\epsilon_r = 46.7909$; $\rho = 1000 \text{ kg/m}^3$

- Electronics: DAE3 Sn442; Probe: EX3DV4 - SN3563; ConvF(3.79, 3.79, 3.79)

- Phantom: Flat Phantom 10.1; Serial: P 10.1; Phantom section: Flat 2.2 Section

Channel 052 Test/Area Scan (101x141x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 1.70 mW/g


Channel 052 Test/Zoom Scan (7x7x9)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2.5mm

Reference Value = 14.9 V/m; Power Drift = 0.077 dB

Peak SAR (extrapolated) = 3.21 W/kg

SAR(1 g) = 0.837 mW/g; SAR(10 g) = 0.245 mW/g

Maximum value of SAR (measured) = 1.74 mW/g

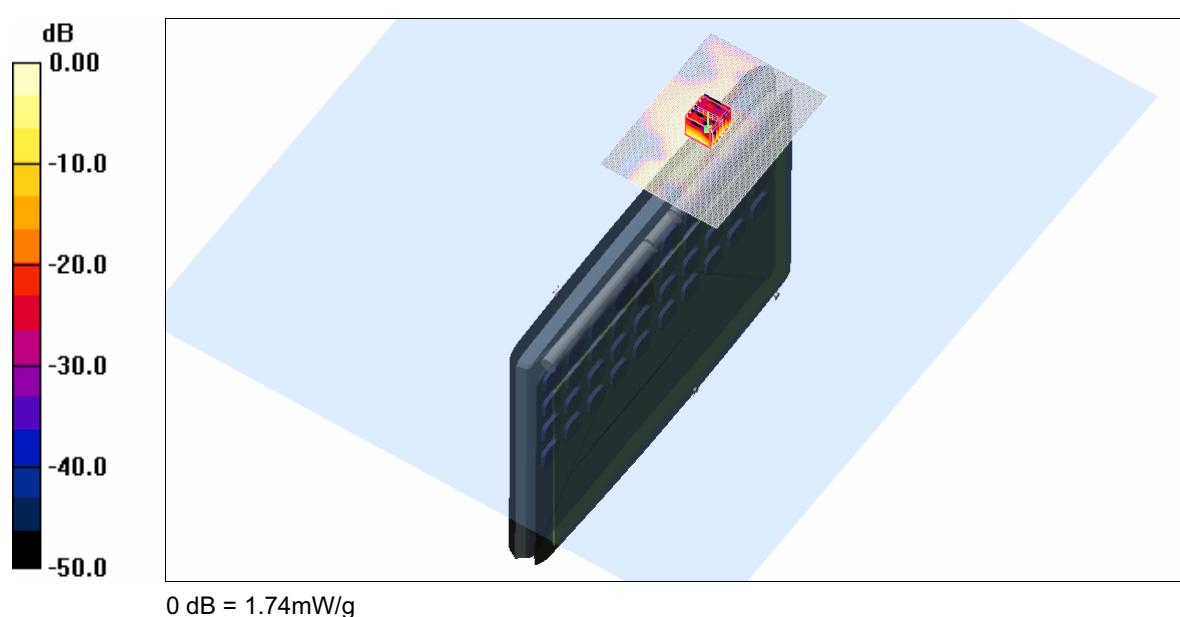

Ambient Temperature
Liquid Temperature
Humidity

21.8 Degrees Celsius
21.2 Degrees Celsius
58.0 %

Test Date: 22 April 2008

File Name: Edge On Bottom OFDM 5.2 GHz Ant C Bluetooth Off 22-04-08.da4

DUT: Fujitsu Notebook Seneca with Shirley Peak 11abgn and Bluetooth; Type: 533AN_HMW; Serial: MAC: 0016EA042224

* Communication System: OFDM 5250 MHz; Frequency: 5320 MHz; Duty Cycle: 1:1

* Medium parameters used: $\sigma = 5.44976 \text{ mho/m}$, $\epsilon_r = 46.6231$; $\rho = 1000 \text{ kg/m}^3$

- Electronics: DAE3 Sn442; Probe: EX3DV4 - SN3563; ConvF(3.79, 3.79, 3.79)

- Phantom: Flat Phantom 10.1; Serial: P 10.1; Phantom section: Flat 2.2 Section

Channel 064 Test/Area Scan (101x141x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 1.48 mW/g


Channel 064 Test/Zoom Scan (7x7x9)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2.5mm

Reference Value = 5.95 V/m; Power Drift = 0.367 dB

Peak SAR (extrapolated) = 2.50 W/kg

SAR(1 g) = 0.637 mW/g; SAR(10 g) = 0.183 mW/g

Maximum value of SAR (measured) = 1.33 mW/g

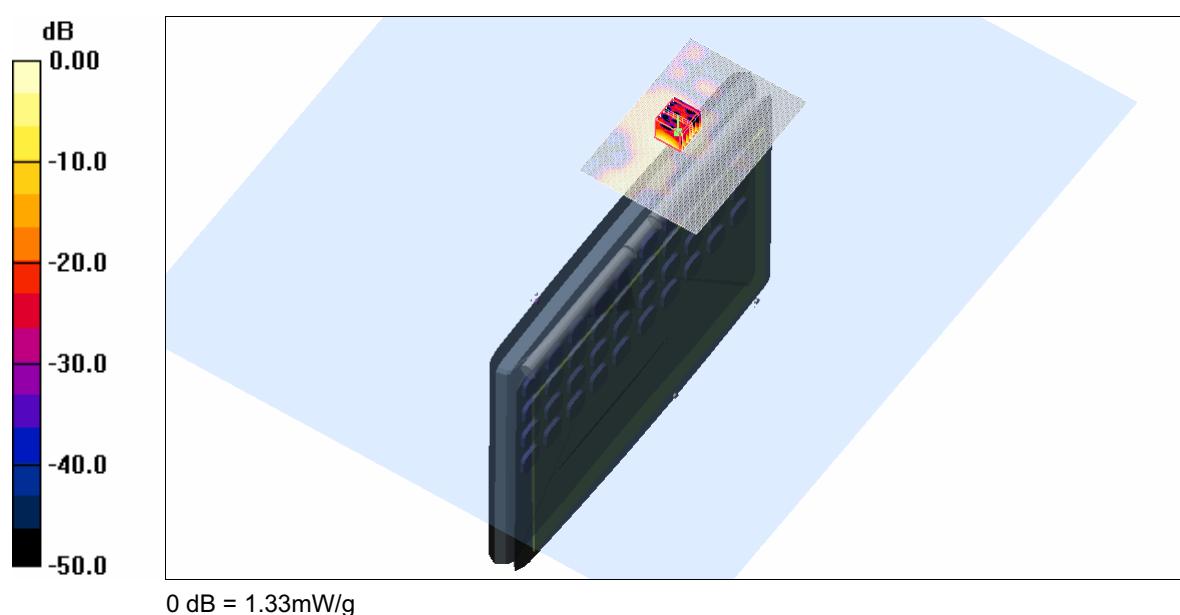


Ambient Temperature
Liquid Temperature
Humidity

21.8 Degrees Celsius
21.2 Degrees Celsius
58.0 %



This document must not be copied or reproduced, except in full without the written permission of the Manager, EMC Technologies Pty Ltd. The certificate on page 3 may be reproduced in full.
www.emctech.com.au

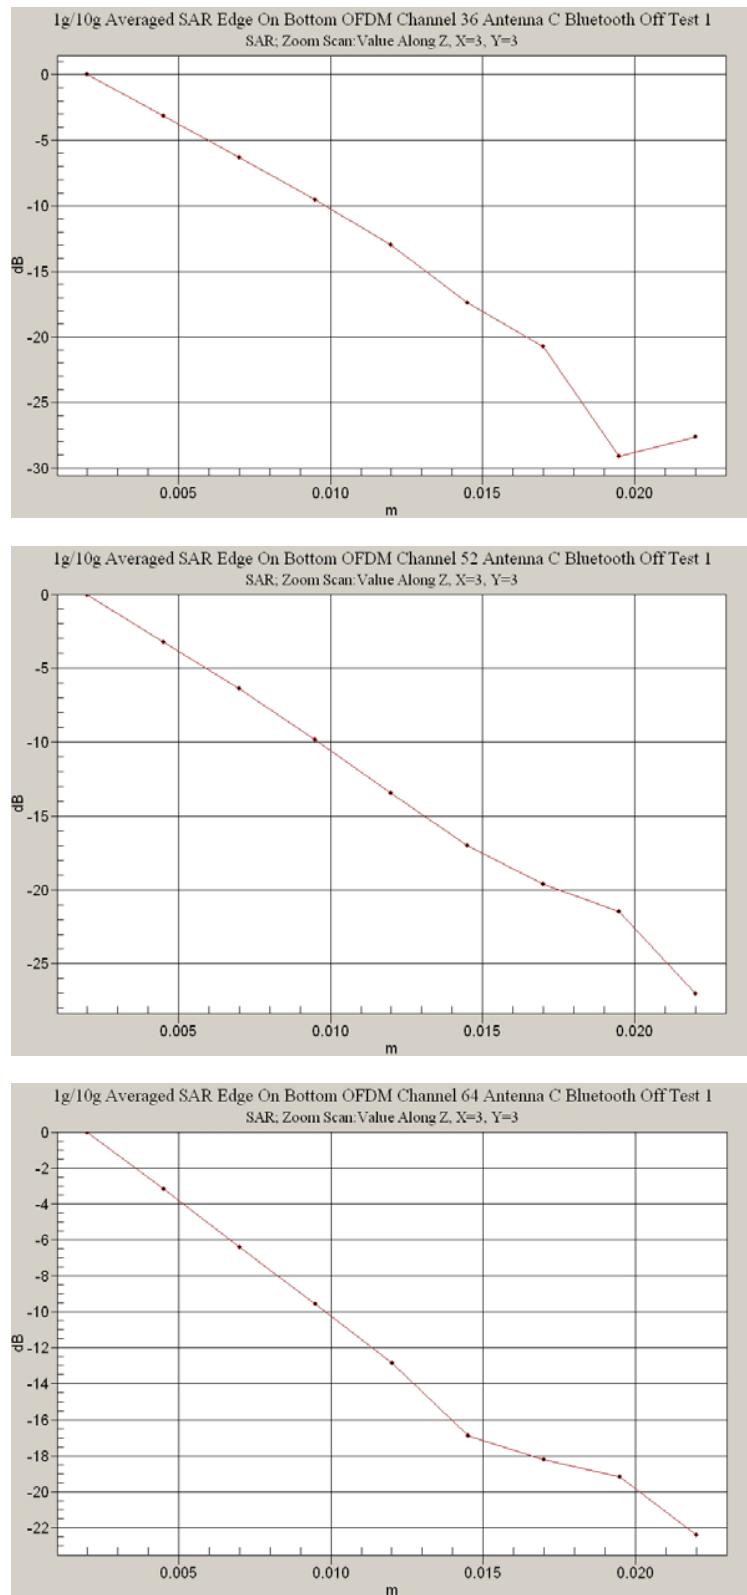

Test Date: 22 April 2008

File Name: Edge On Bottom OFDM HT0 (20MHz) 5.2 GHz Ant C Bluetooth Off 22-04-08.da4

DUT: **Fujitsu Notebook Seneca with Shirley Peak 11abgn and Bluetooth; Type: 533AN_HMW; Serial: MAC: 0016EA042224**

* Communication System: OFDM 5250 MHz; Frequency: 5260 MHz; Duty Cycle: 1:1

* Medium parameters used: $\sigma = 5.36277 \text{ mho/m}$, $\epsilon_r = 46.7909$; $\rho = 1000 \text{ kg/m}^3$

- Electronics: DAE3 Sn442; Probe: EX3DV4 - SN3563; ConvF(3.79, 3.79, 3.79)

- Phantom: Flat Phantom 10.1; Serial: P 10.1; Phantom section: Flat 2.2 Section

Channel 052 Test/Area Scan (101x141x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 1.28 mW/g


Channel 052 Test/Zoom Scan (7x7x9)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2.5mm

Reference Value = 14.8 V/m; Power Drift = 0.143 dB

Peak SAR (extrapolated) = 2.30 W/kg

SAR(1 g) = 0.619 mW/g; SAR(10 g) = 0.188 mW/g

Maximum value of SAR (measured) = 1.26 mW/g

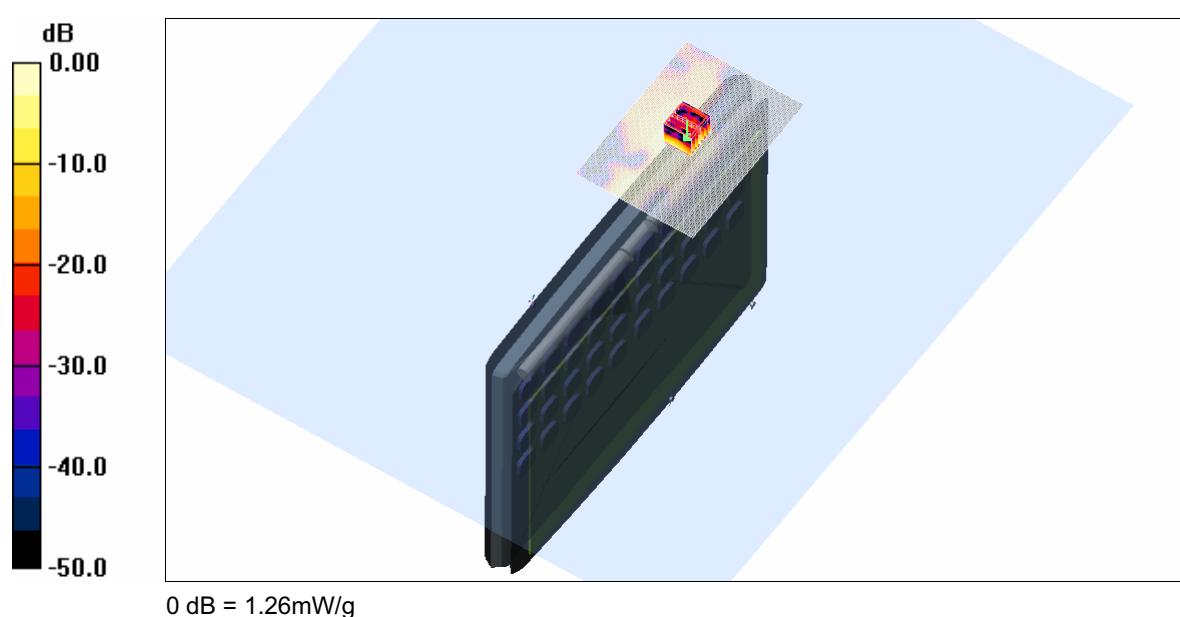

Ambient Temperature
Liquid Temperature
Humidity

21.8 Degrees Celsius
21.2 Degrees Celsius
58.0 %

Test Date: 22 April 2008

File Name: Edge On Bottom OFDM HT0 (40MHz) 5.2 GHz Ant C Bluetooth Off 22-04-08.da4

DUT: Fujitsu Notebook Seneca with Shirley Peak 11abgn and Bluetooth; Type: 533AN_HMW; Serial: MAC: 0016EA042224

* Communication System: OFDM 5250 MHz; Frequency: 5270 MHz; Duty Cycle: 1:1

* Medium parameters used: $\sigma = 5.38147 \text{ mho/m}$, $\epsilon_r = 46.7723$; $\rho = 1000 \text{ kg/m}^3$

- Electronics: DAE3 Sn442; Probe: EX3DV4 - SN3563; ConvF(3.79, 3.79, 3.79)

- Phantom: Flat Phantom 10.1; Serial: P 10.1; Phantom section: Flat 2.2 Section

Channel 054 Test/Area Scan (101x141x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 1.20 mW/g


Channel 054 Test/Zoom Scan (7x7x9)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2.5mm

Reference Value = 14.6 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 2.15 W/kg



SAR(1 g) = 0.582 mW/g; SAR(10 g) = 0.176 mW/g

Maximum value of SAR (measured) = 1.20 mW/g

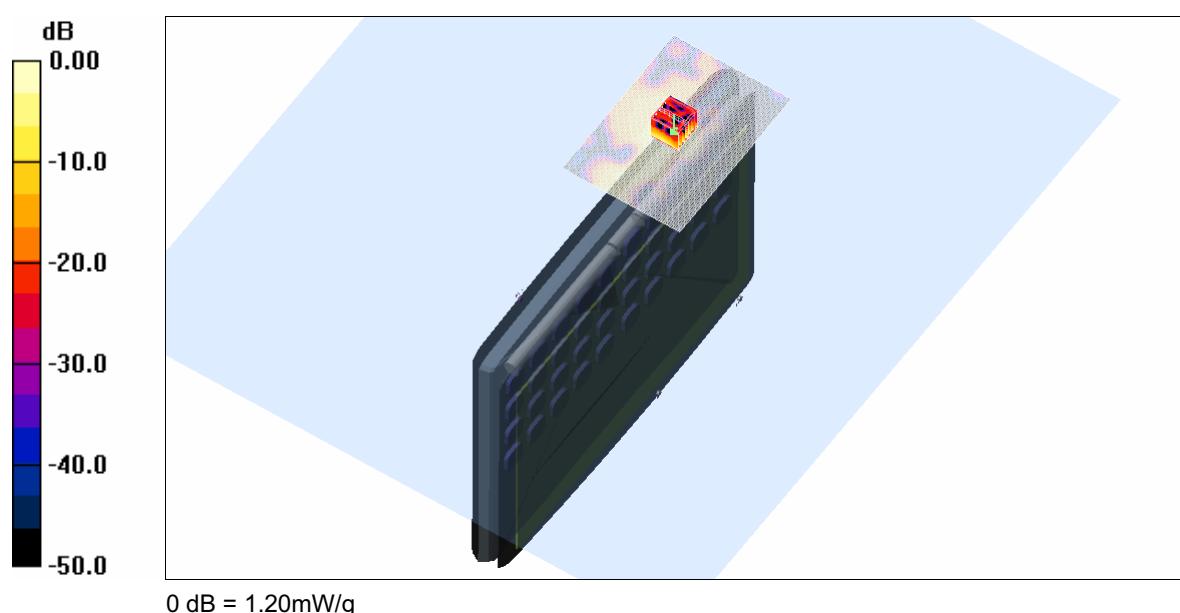

Ambient Temperature
Liquid Temperature
Humidity

21.8 Degrees Celsius
21.2 Degrees Celsius
58.0 %

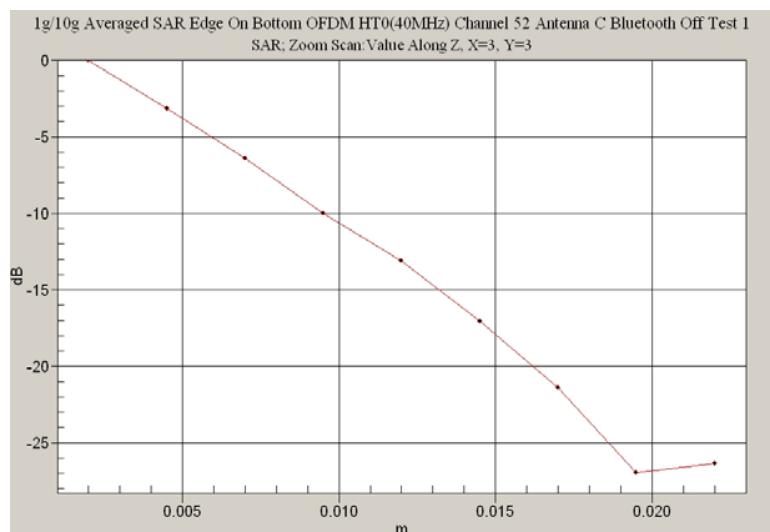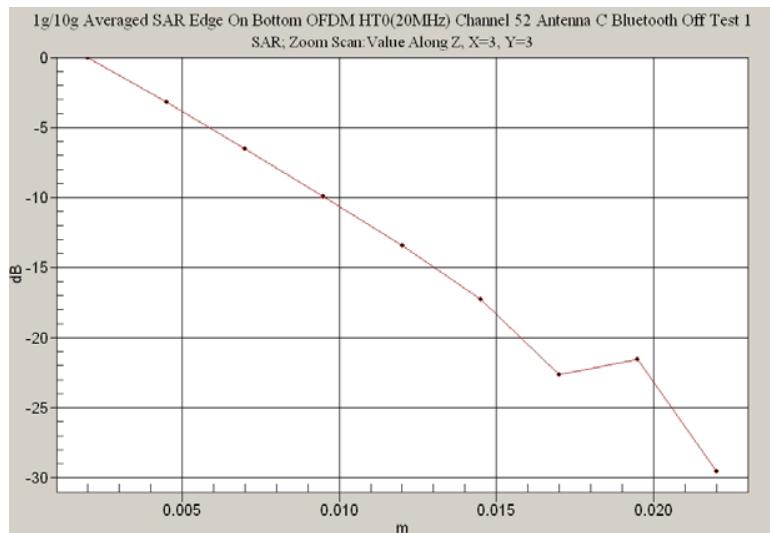

Test Date: 22 April 2008

File Name: Laps On OFDM 5.2 GHz Ant C Bluetooth Off 22-04-08.da4

DUT: Fujitsu Notebook Seneca with Shirley Peak 11abgn and Bluetooth; Type: 533AN_HMW; Serial: MAC: 0016EA042224

- * Communication System: OFDM 5250 MHz; Frequency: 5260 MHz; Duty Cycle: 1:1
- * Medium parameters used: $\sigma = 5.36277 \text{ mho/m}$, $\epsilon_r = 46.7909$; $\rho = 1000 \text{ kg/m}^3$
- Electronics: DAE3 Sn442; Probe: EX3DV4 - SN3563; ConvF(3.79, 3.79, 3.79)
- Phantom: Flat Phantom 10.1; Serial: P 10.1; Phantom section: Flat 2.2 Section

Channel 052 Test/Area Scan (81x141x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.357 mW/g


Channel 052 Test/Zoom Scan (7x7x9)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2.5mm

Reference Value = 5.26 V/m; Power Drift = 0.435 dB

Peak SAR (extrapolated) = 0.419 W/kg

SAR(1 g) = 0.113 mW/g; SAR(10 g) = 0.030 mW/g

Maximum value of SAR (measured) = 0.236 mW/g

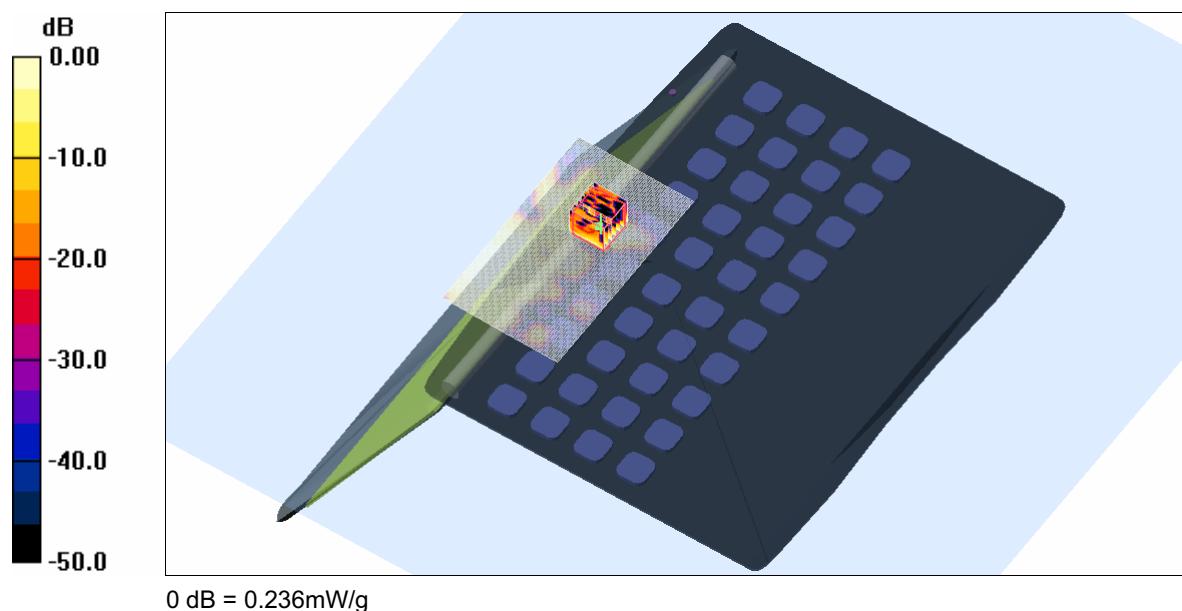

Ambient Temperature
Liquid Temperature
Humidity

21.8 Degrees Celsius
21.2 Degrees Celsius
58.0 %

Test Date: 22 April 2008

File Name: Edge On Side OFDM 5.2 GHz Ant B Bluetooth Off 22-04-08.da4

DUT: **Fujitsu Notebook Seneca with Shirley Peak 11abgn and Bluetooth; Type: 533AN_HMW; Serial: MAC: 0016EA042224**

* Communication System: OFDM 5250 MHz; Frequency: 5260 MHz; Duty Cycle: 1:1

* Medium parameters used: $\sigma = 5.36277 \text{ mho/m}$, $\epsilon_r = 46.7909$; $\rho = 1000 \text{ kg/m}^3$

- Electronics: DAE3 Sn442; Probe: EX3DV4 - SN3563; ConvF(3.79, 3.79, 3.79)

- Phantom: Flat Phantom 10.1; Serial: P 10.1; Phantom section: Flat 2.2 Section

Channel 052 Test/Area Scan (81x121x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.098 mW/g


Channel 052 Test/Zoom Scan (7x7x9)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2.5mm

Reference Value = 3.29 V/m; Power Drift = -0.168 dB

Peak SAR (extrapolated) = 0.345 W/kg

SAR(1 g) = 0.030 mW/g; SAR(10 g) = 0.012 mW/g

Maximum value of SAR (measured) = 0.059 mW/g

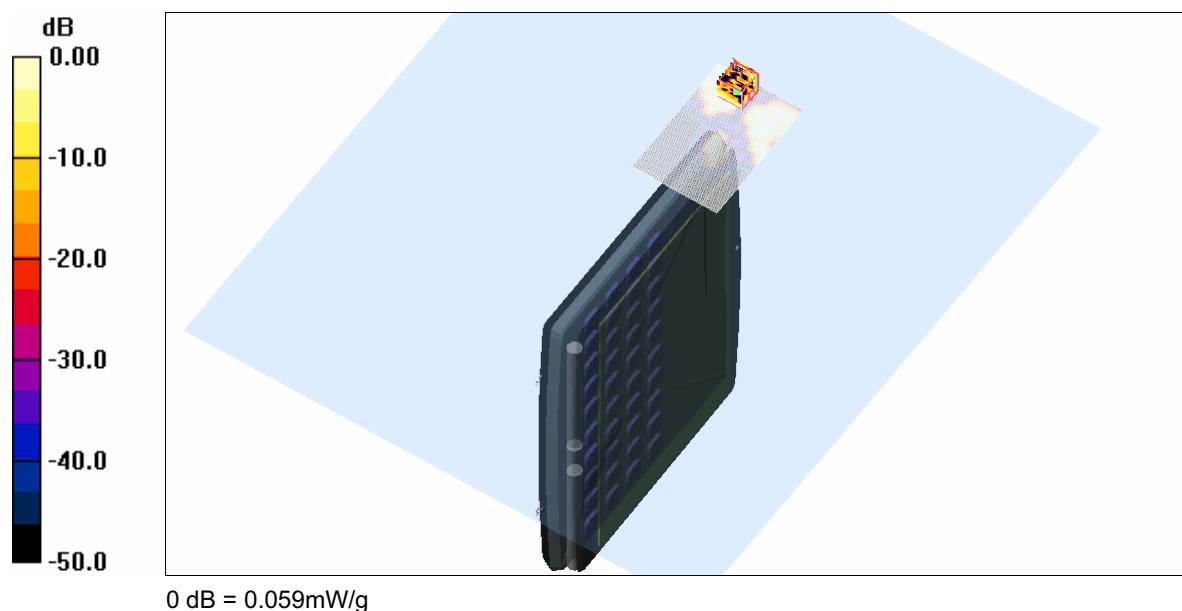

Ambient Temperature
Liquid Temperature
Humidity

21.8 Degrees Celsius
21.2 Degrees Celsius
58.0 %



This document must not be copied or reproduced, except in full without the written permission of the Manager, EMC Technologies Pty Ltd. The certificate on page 3 may be reproduced in full.
www.emctech.com.au

