



EMC Technologies Pty Ltd

ABN 82 057 105 549

176 Harrick Road

Keilor Park

Victoria Australia 3042

Ph: + 613 9365 1000

Fax: + 613 9331 7455

email: melb@emctech.com.au

SAR Test Report

Report Number: M080425_CERT_AR5BHB92_SAR_5.6

Test Sample: Portable Tablet Computer
Radio Modules: WLAN AR5BHB92 &
Bluetooth EYSMJCS
Host PC Model Number: T5010
Tested For: Fujitsu Australia Pty Ltd
HOST PC FCC ID: EJE-WB0059
HOST PC IC: 337J-WB0059
Date of Issue: 10th June 2008

EMC Technologies Pty Ltd reports apply only to the specific samples tested under stated test conditions. It is the manufacturer's responsibility to assure that additional production units of this model are manufactured with identical electrical and mechanical components. EMC Technologies Pty Ltd shall have no liability for any deductions, inferences or generalisations drawn by the client or others from EMC Technologies Pty Ltd issued reports. This report shall not be used to claim, constitute or imply product endorsement by EMC Technologies Pty Ltd.



This document must not be copied or reproduced, except in full without the written permission of the Manager, EMC Technologies Pty Ltd. The certificate on page 3 may be reproduced in full.

www.emctech.com.au

CONTENTS

1.0 GENERAL INFORMATION.....	3
2.0 INTRODUCTION.....	4
3.0 SAMPLE TECHNICAL INFORMATION.....	4
3.1 EUT (WLAN) Details	4
3.2 EUT (Bluetooth) Details.....	6
3.3 EUT (Notebook PC) Details	6
3.4 Test sample Accessories	7
3.4.1 Battery Types	7
4.0 TEST SIGNAL, FREQUENCY AND OUTPUT POWER.....	8
4.1 Battery Status.....	8
5.0 DETAILS OF TEST LABORATORY.....	9
5.1 Location	9
5.2 Accreditations.....	9
5.3 Environmental Factors	9
6.0 DESCRIPTION OF SAR MEASUREMENT SYSTEM.....	10
6.1 Probe Positioning System	10
6.2 E-Field Probe Type and Performance	10
6.3 Data Acquisition Electronics.....	10
6.4 Validation	11
6.4.1 Validation Results @ 5GHz.....	11
6.4.2 Deviation from reference validation values	11
6.4.3 Liquid Depth 15cm.....	12
6.5 Phantom Properties (Size, Shape, Shell Thickness)	13
6.6 Tissue Material Properties.....	14
6.6.1 Liquid Temperature and Humidity.....	15
6.7 Simulated Tissue Composition Used for SAR Test	15
6.8 Device Holder for Laptops and P 10.1 Phantom	15
7.0 SAR MEASUREMENT PROCEDURE USING DASY4.....	16
8.0 MEASUREMENT UNCERTAINTY.....	17
9.0 QUIPMENT LIST AND CALIBRATION DETAILS	19
10.0 OET BULLETIN 65 – SUPPLEMENT C TEST METHOD	20
10.1 Positions	20
10.1.1 “Tablet” Position Definition (0mm spacing)	20
10.1.2 “Edge On” Position	20
10.2 List of All Test Cases (Antenna In/Out, Test Frequencies, User Modes).....	21
10.3 FCC RF Exposure Limits for Occupational/ Controlled Exposure.....	21
10.4 FCC RF Exposure Limits for Un-controlled/Non-occupational	21
11.0 SAR MEASUREMENT RESULTS	22
11.1 5 GHz Band SAR Results	22
12.0 COMPLIANCE STATEMENT	23
APPENDIX A1 TEST SAMPLE PHOTOGRAPHS	24
APPENDIX A2 TEST SAMPLE PHOTOGRAPHS	25
APPENDIX A3 TEST SAMPLE PHOTOGRAPHS	26
APPENDIX A4 TEST SETUP PHOTOGRAPHS	27
APPENDIX A5 TEST SAMPLE PHOTOGRAPHS	28
APPENDIX B PLOTS OF THE SAR MEASUREMENTS	29
APPENDIX C CALIBRATION DOCUMENTS	48



This document must not be copied or reproduced, except in full without the written permission of the Manager, EMC Technologies Pty Ltd. The certificate on page 3 may be reproduced in full.

www.emctech.com.au

SAR TEST REPORT

Report Number: M080425_CERT_AR5BHB92_SAR_5.6

HOST PC FCC ID: EJE-WB0059

HOST PC IC: 337J-WB0059

1.0 GENERAL INFORMATION

Test Sample: Portable Tablet Computer
Model Name: T5010
Radio Modules: WLAN AR5BHB92 & Bluetooth EYSMJCS
Interface Type: Mini-PCI Module
Device Category: Portable Transmitter
Test Device: Pre-Production Unit
FCC ID: EJE-WB0059
HOST PC IC: 337J-WB0059
RF exposure Category: General Population/Uncontrolled
Manufacturer: Fujitsu Limited

Test Standard/s:

1. Evaluating Compliance with FCC Guidelines For Human Exposure to Radiofrequency Electromagnetic Fields Supplement C (Edition 01-01) to OET Bulletin 65 (Edition 97-01)
2. Radio Frequency Exposure Compliance of Radiocommunication Apparatus (All Frequency Bands) RSS-102 Issue 2 November 2005

Statement Of Compliance: The Fujitsu TABLET Computer T5010 with Wireless LAN model AR5BHB92 and Bluetooth module EYSMJCS complied* with the FCC General public/uncontrolled RF exposure limits of 1.6mW/g per requirements of 47CFR2.1093(d). It also complied with IC RSS-102 requirements.

*. Refer to compliance statement section 9.

Test Dates: 12th to 21st April 2008

Tested for: Fujitsu Australia Pty Ltd
Address: 1230 Nepean Highway, Cheltenham VIC 3192
Contact: Praveen Rao
Phone: +61 3 9265 0210
Fax: +61 3 9265 0656
E-mail: Praveen.rao@au.fujitsu.com

Test Officer:



Peter Jakubiec



Authorised Signature:

Peter Jakubiec



This document must not be copied or reproduced, except in full without the written permission of the Manager, EMC Technologies Pty Ltd. The certificate on page 3 may be reproduced in full.

www.emctech.com.au

SAR TEST REPORT
Portable Tablet Computer
Model: T5010
Report Number: M080425_CERT_AR5BHB92_SAR_5.6

2.0 INTRODUCTION

Testing was performed on the Fujitsu Tablet PC, Model:T5010 with INTEL Mini-PCI Wireless LAN Module (HB92 802.11a/b/g/n), Model: AR5BHB92 & TAIYO YUDEN Bluetooth Module, Model: EYSMJCS. The HB92 module is an OEM product. The Mini-PCI Wireless LAN (WLAN) was tested in the dedicated host – LIFEBOOK T SERIES, Model T5010 .

The measurement test results mentioned hereon only apply to the 5GHz frequency band; an additional report titled "M080425_CERT_AR5BHB92_SAR_2.4" applies to the 2450MHz frequency range.

3.0 SAMPLE TECHNICAL INFORMATION

(Information supplied by the client)

3.1 EUT (WLAN) Details

Transmitter:	Mini-Card Wireless LAN Module
FCC ID:	EJE-WB0059
IC:	337J-WB0059
Wireless Module:	HB92 (802.11a/b/g/n)
Model Number:	AR5BHB92
Manufacturer:	Intel Corporation
Modulation Type:	DSSS for 802.11b OFDM for 802.11g OFDM for 802.11a OFDM for 802.11n
2.4 GHz (802.11b/g/n):	CCK, DQPSK, DBPSK, 16QAM, 64QAM
5 GHz (802.11a/n):	BPSK, QPSK, 16QAM, 64QAM
Maximum Data Rate:	802.11b = 11 Mbps, 802.11g and 802.11a = 54 Mbps 802.11n = 300 Mbps
Frequency Ranges:	2.412–2.462 GHz for 11b/g/n 5.18-5.32 GHz, 5.500-5.700 GHz and 5.745-5.825 GHz for 11a/n
Number of Channels:	11 channels for 11b/g/n with 20MHz Bandwidth 24 channels for 11a/n with 20MHz Bandwidth 18 channels for 11n with 40MHz Bandwidth
Antenna Types:	Nissei Electric Inverted F Antenna Model: refer to WLAN antenna data Location: Top edge of LCD screen
Power Supply:	Please refer antenna data provided separately 3.3 VDC from PCI Express bus



This document must not be copied or reproduced, except in full without the written permission of the Manager, EMC Technologies Pty Ltd. The certificate on page 3 may be reproduced in full.

www.emctech.com.au

Channels and Output power setting:

Channel and Mode	Frequency MHz	Average Output Power dBm
802.11b/g mode		
Channels 1, 6 and 11	2412, 2437 and 2462	14.0
802.11a mode		
Channels 36	5180	8.5
Channels 48	5240	13.0
Channels 64	5320	13.0
Channels 100	5500	14.0
Channels 120	5600	14.0
Channels 140	5700	14.0
Channels 149	5745	14.0
Channels 157	5785	14.0
Channels 165	5825	14.0
802.11n mode with 20MHz Bandwidth		
Channels 1 & 6	2412 & 2437	14.0
Channels 11	2462	12.5
Channels 36	5180	10.0
Channels 48	5240	13.5
Channels 64	5320	13.5
Channels 100	5500	14.0
Channels 120	5600	14.0
Channels 140	5700	14.0
Channels 149	5745	14.0
Channels 157	5785	14.0
Channels 165	5825	14.0
802.11n mode with 40MHz Bandwidth		
Channels 3	2412	12.0
Channels 6	2437	14.0
Channels 9	2462	10.5
Channels 38	5190	12.5
Channels 54	5270	14.0
Channels 62	5310	14.0
Channels 102	5510	14.0
Channels 118	5590	14.0
Channels 134	5670	14.0
Channels 151	5755	14.0
Channels 159	5795	14.0

NOTE: For 2450 MHz SAR results refer to report titled "M080425_CERT_AR5BHB92_SAR_2.4".



This document must not be copied or reproduced, except in full without the written permission of the Manager, EMC Technologies Pty Ltd. The certificate on page 3 may be reproduced in full.

www.emctech.com.au

3.2 EUT (Bluetooth) Details

Transmitter: Bluetooth
FCC ID: RYYEYSMJCS
IC: 4389B-EYSMJCS
Model Number: EYSMJCS
Manufacturer: TAIYO YUDEN
Network Standard: Bluetooth™ RF Test Specification
Modulation Type: Frequency Hopping Spread Spectrum (FHSS)
Frequency Range: 2402 MHz to 2480 MHz
Number of Channels: 79
Carrier Spacing: 1.0 MHz
Antenna Types: Included BT module
 Location: left side of hinge
Max. Output Power: 4 dBm
Reference Oscillator: 16 MHz (Built-in)
Power Supply: 3.3 VDC from host.

Frequency allocation:

Channel Number	Frequency (MHz)	Bluetooth Utility power setting
1	2402	Power (Ext, Int) = 0, 96
2	2403	
-	-	
39	2440	
40	2441	
41	2442	
-	-	
78	2479	
79	2480	

3.3 EUT (Notebook PC) Details

EUT: LIFEBOOK T SERIES
Model Name: T5010
Serial Number: Pre-production Sample
Manufacturer: FUJITSU LIMITED

CPU Type and Speed: Core2 Duo T9600 2.8GHz
LCD: 13.3" WXGA (LED)
Wired LAN: Intel 82567LM : 10 Base-T/100 Base-TX/1000Base-T
Modem: Agere MDC1.5 modem Model: D40
Port Replicator Model: FPCPR85

AC Adapter Model: SEC100P2-19.0(Sanken) / SEC100P3-19.0(Sanken, 3pin) / ADP-80NB A(Delta) / SED100P2-19.0(Sanken)
Voltage: 19 V
Current Specs: 4.22A
Watts: 80W



This document must not be copied or reproduced, except in full without the written permission of the Manager, EMC Technologies Pty Ltd. The certificate on page 3 may be reproduced in full.

www.emctech.com.au

3.4 Test sample Accessories

3.4.1 Battery Types

One type of Fujitsu Lithium Ion Battery is used to power the Portable Tablet Computer Wireless LAN Model: AR5BHB92. SAR measurements were performed with the battery as shown below.

Standard Battery

Model	FPCBP155	FPCBP155
V/mAh	10.8V 5200mAh	10.8V 5200mAh
Part No.:	CP293420-01	CP293420-01
Lot No.:	X01A-6412	X01A-6607



This document must not be copied or reproduced, except in full without the written permission of the Manager, EMC Technologies Pty Ltd. The certificate on page 3 may be reproduced in full.

www.emctech.com.au

4.0 TEST SIGNAL, FREQUENCY AND OUTPUT POWER

INTEL's CRTU test tool was used to configure the WLAN for testing. The Portable Tablet Computer Wireless LAN had a total of 11 channels within the 2412 to 2462 MHz frequency band and 17 channels within the frequency range 5180 – 5825 MHz. In The frequency range 2412 MHz to 2462 MHz the device operates in 2 modes, OFDM and DSSS. Within the 5180 – 5825 MHz frequency range the device operates in OFDM mode only. For the SAR measurements the device was operating in continuous transmit mode using programming codes supplied by Fujitsu. The fixed frequency channels used in the testing are shown in Table Below.

The Bluetooth module operates over 79 channels within the frequency range 2402 to 2480 MHz. It is possible for the Bluetooth module to operate simultaneously with the WLAN module (co-transmission). For the SAR measurements the device was operating in continuous transmit mode using programming codes supplied by Fujitsu. The tests were conducted with only the WLAN operating and also with the WLAN and Bluetooth module operating in co-transmission. The fixed frequency channels used in the testing are shown in the table below. The Bluetooth interface utilizes dedicated antenna, for the purpose of this report labelled antenna "D".

The test results mentioned in this report only apply to the 5200/5800MHz frequency range. An additional report titled "M080425_CERT_AR5BHB92_SAR_2.4" is specific to the 2450MHz range.

The WLAN modules can be configured in a number of different data rates. It was found that the highest source based time averaged power was measured when using the lowest data rates available in each mode. This lowest data rate corresponds to 6Mbps in OFDM mode and 1Mbps in DSSS mode. It was found that OFDM using data rate HT0 with 40MHz bandwidth produced the highest SAR level and thus only the results with this modulation is incorporate into the report as the other modulations were tested with different power settings.

The frequency span of the 2450 MHz range and 5600MHz Bands was more than 10MHz consequently; the SAR levels of the test sample were measured for lowest, centre and highest channels in the applicable modes. The EUT is capable of using two antennas transmitting simultaneously (HT8 DATA mode) the power level is 3dB lower (50%) than if a single antenna was transmitting. There were no wires or other connections to the Portable Tablet Computer during the SAR measurements.

At the beginning and at the completion of the SAR tests, the conducted power of the device was measured after temporary modification of antenna connector inside the device's TX RX compartment. Measurements were performed with a calibrated Power Meter.

4.1 Battery Status

The device battery was fully charged prior to commencement of measurement. Each SAR test was completed within 30 minutes. The battery condition was monitored by measuring the RF field at a defined position inside the phantom before the commencement of each test and again after the completion of the test. It was not possible to perform conducted power measurements at the output of the device, at the beginning and end of each scan due to lack of a suitable antenna port. The uncertainty associated with the power drift was less than 12% and was assessed in the uncertainty budget.



5.0 DETAILS OF TEST LABORATORY

5.1 Location

EMC Technologies Pty Ltd
176 Harrick Road
Keilor Park, (Melbourne) Victoria
Australia 3042

Telephone: +61 3 9365 1000
Facsimile: +61 3 9331 7455
email: melb@emctech.com.au
website: www.emctech.com.au

5.2 Accreditations

EMC Technologies Pty. Ltd. is accredited by the National Association of Testing Authorities, Australia (NATA).
NATA Accredited Laboratory Number: 5292

EMC Technologies Pty Ltd is NATA accredited for the following standards:

AS/NZS 2772.1:	RF and microwave radiation hazard measurement
ACA:	Radio communications (Electromagnetic Radiation - Human Exposure) Standard 2003
FCC:	Guidelines for Human Exposure to RF Electromagnetic Field OET65C 01/01
EN 50360: 2001	Product standard to demonstrate the compliance of mobile phones with the basic restrictions related to human exposure to electromagnetic fields (300 MHz – 3 GHz)
EN 50361: 2001	Basic standard for the measurement of Specific Absorption Rate related to human exposure to electromagnetic fields from mobile phones (300MHz – 3GHz)
IEEE 1528: 2003	Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head Due to Wireless Communications Devices: Measurement Techniques.

Refer to NATA website www.nata.asn.au for the full scope of accreditation.

5.3 Environmental Factors

The measurements were performed in a shielded room with no background RF signals. The temperature in the laboratory was controlled to within $21 \pm 1^\circ\text{C}$, the humidity was in the range 48% to 54%. The liquid parameters are measured daily prior to the commencement of each test. Tests were performed to check that reflections within the environment did not influence the SAR measurements. The noise floor of the DASY4 SAR measurement system using the SN3563 probe was less than $5\mu\text{V}$ in both air and liquid mediums.



This document must not be copied or reproduced, except in full without the written permission of the Manager, EMC Technologies Pty Ltd. The certificate on page 3 may be reproduced in full.

www.emctech.com.au

6.0 DESCRIPTION OF SAR MEASUREMENT SYSTEM

Applicable Head Configurations	: None
Applicable Body Configurations	: Tablet Position : Edge On Position

6.1 Probe Positioning System

The measurements were performed with the state-of-the-art automated near-field scanning system **DASY4 V4.7 Build 53** from Schmid & Partner Engineering AG (SPEAG). The system is based on a high precision 6-axis robot (working range greater than 1.1m), which positions the SAR measurement probes with a positional repeatability of better than ± 0.02 mm. The DASY4 fully complies with the OET65 C (01-01), IEEE 1528 and EN50361 SAR measurement requirements.

6.2 E-Field Probe Type and Performance

The SAR measurements were conducted with SPEAG dosimetric probe EX3DV4 Serial: 3563 (5.6 GHz) designed in the classical triangular configuration and optimised for dosimetric evaluation. The probe has been calibrated and found to be accurate to better than ± 0.25 dB. The probe is suitable for measurements close to material discontinuity at the surface of the phantom. The sensors of the probe are directly loaded with Schottky diodes and connected via highly resistive lines (length = 300 mm) to the data acquisition unit.

6.3 Data Acquisition Electronics

The data acquisition electronics (DAE3) consists of a highly sensitive electrometer-grade preamplifier with auto-zeroing, a channel and gain switching multiplexer, a fast 16 bit AD-converter and a command decoder and control logic unit. The input impedance of the DAE3 box is 200 M Ω ; the inputs are symmetrical and floating. Common mode rejection is above 80dB. Transmission to the PC-card is accomplished through an optical downlink for data and status information as well as an optical uplink for commands and the clock.

The mechanical probe-mounting device includes two different sensor systems for frontal and sideways probe contacts. They are used for mechanical surface detection and probe collision detection.



This document must not be copied or reproduced, except in full without the written permission of the Manager, EMC Technologies Pty Ltd. The certificate on page 3 may be reproduced in full.

www.emctech.com.au

6.4 Validation

6.4.1 Validation Results @ 5GHz

The following table lists the dielectric properties of the tissue simulating liquid measured prior to SAR validation. The results of the validation are listed in columns 4 and 5. The forward power into the reference dipole for SAR validation was adjusted to 250 mW.

Table: Validation Results (Dipole: SPEAG D5GHzV2 SN: 1008)

1. Validation Date	2. ϵ_r (measured)	3. σ (mho/m) (measured)	4. Measured SAR 1g (mW/g)	5. Measured SAR 10g (mW/g)
12 th April 08	35.9	4.57	19.5	5.53
17 th April 08	35.8	4.60	19.8	5.63
18 th April 08	35.1	5.11	21.6	6.12
21 st April 08	33.9	5.33	20.6	5.83

6.4.2 Deviation from reference validation values

Currently no IEEE Std 1528-2003 SAR reference values are available in 5.6 GHz band, as a consequence all validation results were compared against the SPEAG calibration reference SAR values.

The SPEAG calibration reference SAR value is the SAR validation result obtained in a specific dielectric liquid using the validation dipole (D5GHzV2) during calibration. The measured one-gram SAR should be within 10% of the expected target reference values shown in below.

Table: Deviation from reference validation values in 5.6 GHz band.

Frequency and Date	Measured SAR 1g (mW/g)	Measured SAR 1g (Normalized to 1W)	SPEAG Calibration reference SAR Value 1g (mW/g)	Deviation From SPEAG Reference (1g)
5200MHz 12 th April 08	19.5	78.0	77.6	0.52
5200MHz 17 th April 08	19.8	79.2	77.6	2.06
5500MHz 18 th April 08	21.6	86.4	79.8	8.27
5800MHz 21 st April 08	20.6	82.4	76.3	7.99

NOTE: All reference validation values are referenced to 1W input power.



This document must not be copied or reproduced, except in full without the written permission of the Manager, EMC Technologies Pty Ltd. The certificate on page 3 may be reproduced in full.

www.emctech.com.au

6.4.3 Liquid Depth 15cm

During the SAR measurement process the liquid level was maintained to a level of a least 15cm with a tolerance of 0.5cm.

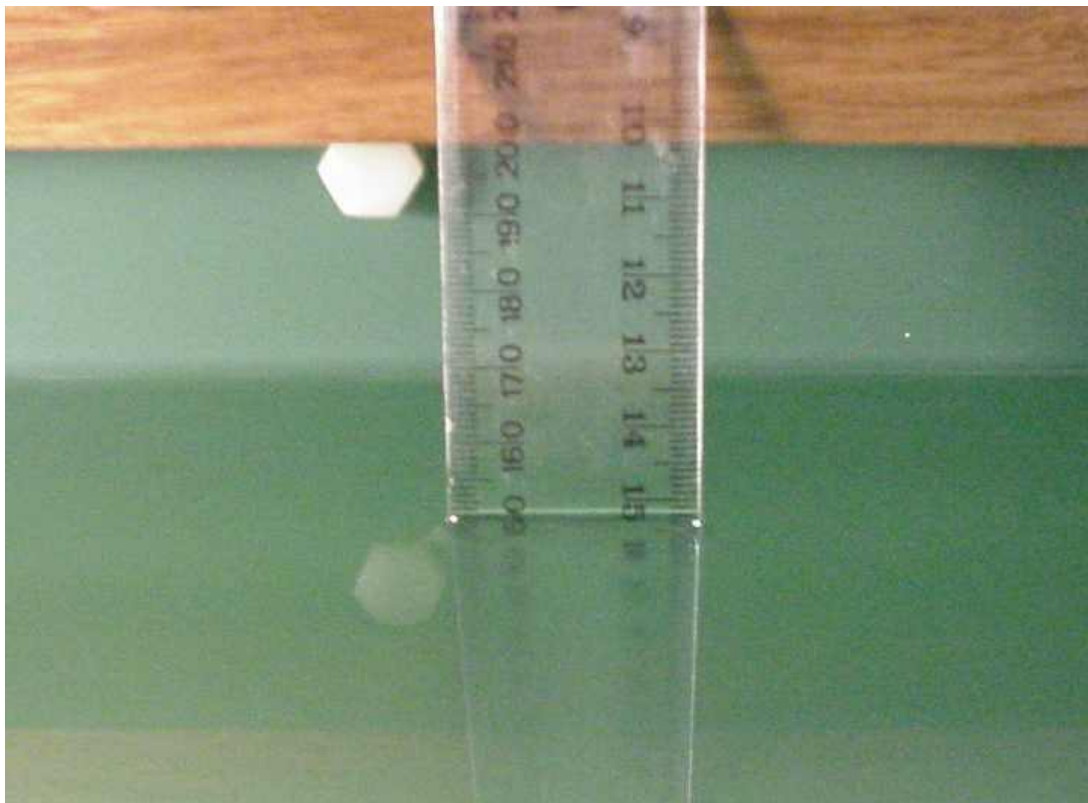


Photo of liquid Depth in Flat Phantom

6.5 Phantom Properties (Size, Shape, Shell Thickness)

The phantom used during the validations was the SAM Phantom model: TP - 1060 from SPEAG. It is a phantom with a single thickness of 2 mm and was filled with the required tissue simulating liquid. The SAM phantom support structures were all non-metallic and spaced more than one device width away in transverse directions.

For SAR testing in the body worn positions an AndreT Flat phantom P 10.1 was used. The phantom thickness is 2.0mm \pm 0.2 mm and was filled with the required tissue simulating liquid. Table below provides a summary of the measured phantom properties. *Refer to Appendix C Part 4, for details of P 10.1 phantom dielectric properties and loss tangent.*

Table: Phantom Properties

Phantom Properties	Required
Thickness of flat section	2.0mm \pm 0.2mm (bottom section)
Dielectric Constant	<5.0
Loss Tangent	<0.05

Depth of Phantom	200mm
Length of Flat Section	620mm
Width of Flat Section	540mm

P 10.1 Flat Phantom



P 10.1 Flat Phantom



This document must not be copied or reproduced, except in full without the written permission of the Manager, EMC Technologies Pty Ltd. The certificate on page 3 may be reproduced in full.

www.emctech.com.au

6.6 Tissue Material Properties

The dielectric parameters of the brain simulating liquid were measured prior to SAR assessment using the HP85070A dielectric probe kit and HP8753ES Network Analyser. The actual dielectric parameters are shown in the following table.

Table: Measured Brain Simulating Liquid Dielectric Values for Validations

Frequency Band	ϵ_r (measured range)	ϵ_r (target)	σ (mho/m) (measured range)	σ (target)	ρ kg/m ³
5200 MHz Brain	35.8	36.0 \pm 5% (34.2 to 37.8)	4.57	4.76 \pm 5% (4.43 to 4.90)	1000
5500 MHz Brain	35.1	35.6 \pm 5% (33.8 to 37.4)	5.09	4.96 \pm 5% (4.71 to 5.21)	1000
5800 MHz Brain	33.9	35.3 \pm 5% (33.5 to 37.1)	5.33	5.27 \pm 5% (5.01 to 5.53)	1000

NOTE: The brain liquid parameters were within the required tolerances of \pm 5%.

Table: Measured Body Simulating Liquid Dielectric Values for 5200MHz range

Frequency Band	ϵ_r (measured range)	ϵ_r (target)	σ (mho/m) (measured range)	σ (target)	ρ kg/m ³
5190	48.5	49.0 \pm 10% (44.1 to 53.9)	5.17	5.3 \pm 10% (4.77 to 5.83)	1000
5260	47.3	48.9 \pm 10% (44.01 to 53.8)	5.22	5.4 \pm 10% (4.86 to 5.94)	1000
5270	48.3	48.8 \pm 10% (43.9 to 55.3)	5.34	5.4 \pm 10% (4.86 to 5.94)	1000

Table: Measured Body Simulating Liquid Dielectric Values for 5600MHz range

Frequency Band	ϵ_r (measured range)	ϵ_r (target)	σ (mho/m) (measured range)	σ (target)	ρ kg/m ³
5510	46.3	48.6 \pm 10% (43.7 to 53.4)	5.81	5.6 \pm 10% (5.04 to 6.16)	1000
5590	45.9	48.5 \pm 10% (43.8 to 53.5)	5.98	5.77 \pm 10% (5.20 to 6.34)	1000
5670	45.8	48.4 \pm 10% (43.6 to 53.2)	6.12	5.9 \pm 10% (5.31 to 6.49)	1000

Table: Measured Body Simulating Liquid Dielectric Values for 5800MHz range

Frequency Band	ϵ_r (measured range)	ϵ_r (target)	σ (mho/m) (measured range)	σ (target)	ρ kg/m ³
5755 MHz Muscle	45.4	48.3 \pm 10% (43.47 to 53.13)	6.09	5.9 \pm 10% (5.31 to 6.49)	1000
5785 MHz Muscle	45.3	48.2 \pm 10% (43.38 to 53.02)	6.15	6.0 \pm 10% (5.4 to 6.60)	1000
5795 MHz Muscle	45.3	48.2 \pm 10% (43.38 to 53.02)	6.17	6.0 \pm 10% (5.4 to 6.60)	1000

NOTE: The muscle liquid parameters were within the required tolerances of \pm 10%.



This document must not be copied or reproduced, except in full without the written permission of the Manager, EMC Technologies Pty Ltd. The certificate on page 3 may be reproduced in full.

www.emctech.com.au

6.6.1 Liquid Temperature and Humidity

The humidity and dielectric/ambient temperatures were recorded during the assessment of the tissue material dielectric parameters. The difference between the ambient temperature of the liquid during the dielectric measurement and the temperature during tests was less than $|2|^\circ\text{C}$.

Table: Temperature and Humidity recorded for each day

Date	Ambient Temperature ($^\circ\text{C}$)	Liquid Temperature ($^\circ\text{C}$)	Humidity (%)
12 th April 08	21.4	21.1	54.0
17 th April 08	20.5	20.2	53.0
18 th April 08	21.0	20.9	53.0
21 st April 08	20.8	20.7	51.0

6.7 Simulated Tissue Composition Used for SAR Test

A low loss clamp was used to position the Tablet underneath the phantom surface. Small pieces of foam were then used to press the Tablet flush against the phantom surface.

Table: Tissue Type: Muscle @ 5600MHz

Volume of Liquid: 60 Litres

EMCT Liquid

Composition
Distilled Water
Salt
Triton X-100

6.8 Device Holder for Laptops and P 10.1 Phantom

A low loss clamp was used to position the Laptop underneath the phantom surface. Small pieces of foam were then used to press the laptop flush against the phantom surface.

Refer to Appendix A for photographs of device positioning



This document must not be copied or reproduced, except in full without the written permission of the Manager, EMC Technologies Pty Ltd. The certificate on page 3 may be reproduced in full.

www.emctech.com.au

7.0 SAR MEASUREMENT PROCEDURE USING DASY4

The SAR evaluation was performed with the SPEAG DASY4 system. A summary of the procedure follows:

- a) A measurement of the SAR value at a fixed location is used as a reference value for assessing the power drop of the EUT. The SAR at this point is measured at the start of the test, and then again at the end of the test.
- b) The SAR distribution at the exposed flat section of the flat phantom is measured at a distance of 2.0 mm from the inner surface of the shell. The area covers the entire dimension of the EUT and the horizontal grid spacing is 15 mm x 15 mm. The actual Area Scan has dimensions of 150mm x 210mm surrounding the test device. Based on this data, the area of the maximum absorption is determined by Spline interpolation.
- c) Around this point, a volume of 24 mm x 24 mm x 20 mm is assessed by measuring 7 x 7 x 9 points. On the basis of this data set, the spatial peak SAR value is evaluated with the following procedure:
 - (i) The data at the surface are extrapolated, since the centre of the dipoles is 1.0 mm away from the tip of the probe and the distance between the surface and the lowest measuring point is 2.0 mm. The extrapolation is based on a least square algorithm. A polynomial of the fourth order is calculated through the points in z-axes. This polynomial is then used to evaluate the points between the surface and the probe tip.
 - (ii) The maximum interpolated value is searched with a straightforward algorithm. Around this maximum the SAR values averaged over the spatial volumes (1 g and 10 g) are computed using the 3D-Spline interpolation algorithm. The 3D-Spline is composed of three one-dimensional splines with the "Not a knot"- condition (in x, y and z-direction). The volume is integrated with the trapezoidal – algorithm. One thousand points (10 x 10 x 10) are interpolated to calculate the averages.
 - (iii) All neighbouring volumes are evaluated until no neighbouring volume with a higher average value is found.
 - (iv) The SAR value at the same location as in Step (a) is again measured to evaluate the actual power drift.



8.0 MEASUREMENT UNCERTAINTY

The uncertainty analysis is based on the template listed in the IEEE Std 1528-2003 for both Handset SAR tests and Validation uncertainty. The measurement uncertainty of a specific device is evaluated independently.

Table: Uncertainty Budget for DASY4 Version V4.7 Build 53 – EUT SAR test 5GHz

a	b	c	d	e= f(d,k)	f	g	h=cxf/e	i=cxg/e	k
Uncertainty Component	Sec.	Tol. (%)	Prob. Dist.	Div.	C _i (1g)	C _i (10g)	1g u _i (%)	10g u _i (%)	v _i
Measurement System									
Probe Calibration (k=1) (numerical calibration)	E.2.1	6.8	N	1	1	1	6.8	6.8	∞
Axial Isotropy	E.2.2	4.7	R	1.73	0.707	0.707	1.9	1.9	∞
Hemispherical Isotropy	E.2.2	9.6	R	1.73	0.707	0.707	3.9	3.9	∞
Boundary Effect	E.2.3	2	R	1.73	1	1	1.2	1.2	∞
Linearity	E.2.4	4.7	R	1.73	1	1	2.7	2.7	∞
System Detection Limits	E.2.5	1	R	1.73	1	1	0.6	0.6	∞
Readout Electronics	E.2.6	1	N	1	1	1	1.0	1.0	∞
Response Time	E.2.7	0.8	R	1.73	1	1	0.5	0.5	∞
Integration Time	E.2.8	2.6	R	1.73	1	1	1.5	1.5	∞
RF Ambient Conditions	E.6.1	0.075	R	1.73	1	1	0.0	0.0	∞
Probe Positioner Mechanical Tolerance	E.6.2	0.8	R	1.73	1	1	0.5	0.5	∞
Probe Positioning with respect to Phantom Shell	E.6.3	5.7	R	1.73	1	1	3.3	3.3	∞
Extrapolation, interpolation and Integration Algorithms for Max. SAR Evaluation	E.5	4	R	1.73	1	1	2.3	2.3	∞
Test Sample Related									
Test Sample Positioning	E.4.2	2.9	N	1	1	1	2.9	2.9	11
Device Holder Uncertainty	E.4.1	3.6	N	1	1	1	3.6	3.6	7
Output Power Variation – SAR Drift Measurement	6.6.2	11.61	R	1.73	1	1	6.7	6.7	∞
Phantom and Tissue Parameters									
Phantom Uncertainty (shape and thickness tolerances)	E.3.1	4	R	1.73	1	1	2.3	2.3	∞
Liquid Conductivity – Deviation from target values	E.3.2	10	R	1.73	0.64	0.43	3.7	2.5	∞
Liquid Conductivity – Measurement uncertainty	E.3.3	2.5	N	1	0.64	0.43	1.6	1.1	5
Liquid Permittivity – Deviation from target values	E.3.2	10	R	1.73	0.6	0.49	3.5	2.8	∞
Liquid Permittivity – Measurement uncertainty	E.3.3	2.5	N	1	0.6	0.49	1.5	1.2	5
Combined standard Uncertainty			RSS				14.0	13.5	154
Expanded Uncertainty (95% CONFIDENCE LEVEL)			k=2				28.0	27.03	

Estimated total measurement uncertainty for the DASY4 measurement system was ±14.0%. The extended uncertainty (K = 2) was assessed to be ±28.0% based on 95% confidence level. The uncertainty is not added to the measurement result.



This document must not be copied or reproduced, except in full without the written permission of the Manager, EMC Technologies Pty Ltd. The certificate on page 3 may be reproduced in full.

www.emctech.com.au

Table: Uncertainty Budget for DASY4 Version V4.7 Build 53 – Validation 5GHz

a	b	c	d	e= f(d,k)	f	g	h=cxf/e	i=cxg/e	k
Uncertainty Component	Sec.	Tol. (%)	Prob. Dist.	Div.	C _i (1g)	C _i (10g)	1g u _i (%)	10g u _i (%)	v _i
Measurement System									
Probe Calibration (k=1) (standard calibration)	E.2.1	6.6	N	1	1	1	6.6	6.6	∞
Axial Isotropy	E.2.2	4.7	R	1.73	1	1	2.7	2.7	∞
Hemispherical Isotropy	E.2.2	0	R	1.73	1	1	0.0	0.0	∞
Boundary Effect	E.2.3	2	R	1.73	1	1	1.2	1.2	∞
Linearity	E.2.4	4.7	R	1.73	1	1	2.7	2.7	∞
System Detection Limits	E.2.5	1	R	1.73	1	1	0.6	0.6	∞
Readout Electronics	E.2.6	1	N	1	1	1	1.0	1.0	∞
Response Time	E.2.7	0	R	1.73	1	1	0.0	0.0	∞
Integration Time	E.2.8	0	R	1.73	1	1	0.0	0.0	∞
RF Ambient Conditions	E.6.1	0.075	R	1.73	1	1	0.0	0.0	∞
Probe Positioner Mechanical Tolerance	E.6.2	0.8	R	1.73	1	1	0.5	0.5	∞
Probe Positioning with respect to Phantom Shell	E.6.3	5.7	R	1.73	1	1	3.3	3.3	∞
Extrapolation, interpolation and Integration Algorithms for Max. SAR Evaluation	E.5	4	R	1.73	1	1	2.3	2.3	∞
Test Sample Related									
Dipole Axis to Liquid distance	E.4.2	2	N	1	1	1	2.0	2.0	11
Output Power Variation – SAR Drift Measurement	6.6.2	4.7	R	1.73	1	1	2.7	2.7	∞
Phantom and Tissue Parameters									
Phantom Uncertainty (shape and thickness tolerances)	E.3.1	4	R	1.73	1	1	2.3	2.3	∞
Liquid Conductivity – Deviation from target values	E.3.2	5	R	1.73	0.64	0.43	1.8	1.2	∞
Liquid Conductivity – Measurement uncertainty	E.3.3	2.5	N	1	0.64	0.43	1.6	1.1	5
Liquid Permittivity – Deviation from target values	E.3.2	5	R	1.73	0.6	0.49	1.7	1.4	∞
Liquid Permittivity – Measurement uncertainty	E.3.3	2.5	N	1	0.6	0.49	1.5	1.2	5
Combined standard Uncertainty			RSS				10.3	10.0	154
Expanded Uncertainty (95% CONFIDENCE LEVEL)			k=2				20.5	20.02	

Estimated total measurement uncertainty for the DASY4 measurement system was $\pm 10.3\%$. The extended uncertainty ($K = 2$) was assessed to be $\pm 20.5\%$ based on 95% confidence level. The uncertainty is not added to the measurement result.



This document must not be copied or reproduced, except in full without the written permission of the Manager, EMC Technologies Pty Ltd. The certificate on page 3 may be reproduced in full.

www.emctech.com.au

9.0 EQUIPMENT LIST AND CALIBRATION DETAILS

Table: SPEAG DASY4 Version V4.7 Build 53

Equipment Type	Manufacturer	Model Number	Serial Number	Calibration Due	Used For this Test?
Robot - Six Axes	Staubli	RX90BL	N/A	Not applicable	✓
Robot Remote Control	SPEAG	CS7MB	RX90B	Not applicable	✓
SAM Phantom	SPEAG	N/A	1260	Not applicable	✓
SAM Phantom	SPEAG	N/A	1060	Not applicable	
Flat Phantom	AndreT	10.1	P 10.1	Not Applicable	✓
Flat Phantom	AndreT	9.1	P 9.1	Not Applicable	
Flat Phantom	SPEAG	PO1A 6mm	1003	Not Applicable	
Data Acquisition Electronics	SPEAG	DAE3 V1	359	03-July-2008	
Data Acquisition Electronics	SPEAG	DAE3 V1	442	26-Feb-09	✓
Probe E-Field - Dummy	SPEAG	DP1	N/A	Not applicable	
Probe E-Field	SPEAG	ET3DV6	1380	18-Dec-2008	
Probe E-Field	SPEAG	ET3DV6	1377	09-July-2008	
Probe E-Field	SPEAG	ES3DV6	3029	Not Used	
Probe E-Field	SPEAG	EX3DV4	3563	13-July-2008	✓
Antenna Dipole 300 MHz	SPEAG	D300V2	1005	14-Dec-2009	
Antenna Dipole 450 MHz	SPEAG	D450V2	1009	14-Dec-2008	
Antenna Dipole 900 MHz	SPEAG	D900V2	047	6-July-2008	
Antenna Dipole 1640 MHz	SPEAG	D1640V2	314	30-June-2008	
Antenna Dipole 1800 MHz	SPEAG	D1800V2	242	3-July-2008	
Antenna Dipole 1950 MHz	SPEAG	D1950V3	1113	5-March-2009	
Antenna Dipole 3500 MHz	SPEAG	D3500V2	1002	06-July-2008	
Antenna Dipole 2450 MHz	SPEAG	D2450V2	724	13-Dec-2008	
Antenna Dipole 5600 MHz	SPEAG	D5GHzV2	1008	07-Dec-2009	✓
RF Amplifier	EIN	603L	N/A	Not applicable	
RF Amplifier	Mini-Circuits	ZHL-42	N/A	Not applicable	
RF Amplifier	Mini-Circuits	ZVE-8G	N/A	Not applicable	✓
Synthesized signal generator	Hewlett Packard	ESG-D3000A	GB3742023 8	*In test	✓
RF Power Meter Dual	Hewlett Packard	437B	3125012786	30-May-2008	✓
RF Power Sensor 0.01 - 18 GHz	Hewlett Packard	8481H	1545A0163 4	30-May-2008	✓
RF Power Meter Dual	Gigatronics	8542B	1830125	11-May-2008	✓
RF Power Sensor	Gigatronics	80301A	1828805	11-May-2008	✓
RF Power Meter Dual	Hewlett Packard	435A	1733A0584 7	*In test	✓
RF Power Sensor	Hewlett Packard	8482A	2349A1011 4	*In test	✓
Network Analyser	Hewlett Packard	8714B	GB3510035	06-Sept-2008	
Network Analyser	Hewlett Packard	8753ES	JP39240130	02 Oct-2008	✓
Dual Directional Coupler	Hewlett Packard	778D	1144 04700	*In test	
Dual Directional Coupler	NARDA	3022	75453	*In test	✓

* Calibrated during the test for the relevant parameters.



This document must not be copied or reproduced, except in full without the written permission of the Manager, EMC Technologies Pty Ltd. The certificate on page 3 may be reproduced in full.

www.emctech.com.au

10.0 OET BULLETIN 65 – SUPPLEMENT C TEST METHOD

Notebooks should be evaluated in normal use positions, typical for lap-held bottom-face only. However the number of positions will depend on the number of configurations the laptop can be operated in. The “LifeBook T series” can be used in either a conventional laptop position (see Appendix A1) or a Tablet configuration. The antenna location in the “LifeBook T series” is closest to the top of the screen when used in a conventional laptop configuration and due to the separation distances involved between the phantom and the laptop antenna, testing is not required in this position.

10.1 Positions

10.1.1 “Tablet” Position Definition (0mm spacing)

The device was tested in the 2.00 mm flat section of the AndreT Flat phantom P 10.1 for the “Tablet” position. The Transceiver was placed at the bottom of the phantom and suspended in such way that the back of the device was touching the phantom. This device orientation simulates the PC’s normal use – being held on the lap of the user. A spacing of 0mm ensures that the SAR results are conservative and represent a worst-case position.

10.1.2 “Edge On” Position

The device was tested in the (2.00 mm) flat section of the AndreT phantom for the “Edge On” position. The Antenna edge of the Transceiver was placed underneath the flat section of the phantom and suspended until the edge touched the phantom. *Refer to Appendix A for photos of measurement positions.*



This document must not be copied or reproduced, except in full without the written permission of the Manager, EMC Technologies Pty Ltd. The certificate on page 3 may be reproduced in full.

www.emctech.com.au

10.2 List of All Test Cases (Antenna In/Out, Test Frequencies, User Modes)

The device has a fixed antenna. Depending on the measured SAR level up to three test channels with the test sample operating at maximum power, as specified in section 4.0 were recorded. The following table represents the matrix used to determine what testing was required.

Table: Testing configurations

Phantom Configuration	*Device Mode	Antenna	Test Configurations		
			Channel (Low)	Channel (Middle)	Channel (High)
Tablet	OFDM 5GHz All Bands	A		X	
		B		X	
Edge On	OFDM 5GHz All Bands	A		X	
		B		X	

Legend

X Testing Required in this configuration

Testing required in this configuration only if SAR of middle channel is more than 3dB below the SAR limit or it is the worst case.

10.3 FCC RF Exposure Limits for Occupational/ Controlled Exposure

Spatial Peak SAR Limits For:	
Partial-Body:	8.0 mW/g (averaged over any 1g cube of tissue)
Hands, Wrists, Feet and Ankles:	20.0 mW/g (averaged over 10g cube of tissue)

10.4 FCC RF Exposure Limits for Un-controlled/Non-occupational

Spatial Peak SAR Limits For:	
Partial-Body:	1.6 mW/g (averaged over any 1g cube of tissue)
Hands, Wrists, Feet and Ankles:	4.0 mW/g (averaged over 10g cube of tissue)



This document must not be copied or reproduced, except in full without the written permission of the Manager, EMC Technologies Pty Ltd. The certificate on page 3 may be reproduced in full.

www.emctech.com.au

11.0 SAR MEASUREMENT RESULTS

The SAR values averaged over 1g tissue masses were determined for the sample device for all test configurations listed in section 7.2.

11.1 5 GHz Band SAR Results

Table: SAR MEASUREMENT RESULTS Lower Band – OFDM Mode

Test Position	Plot No.	Ant	Bit rate Mode (Mbps)	Channel Bandwidth (MHz)	Test Channel	Test Freq (MHz)	Measured 1g SAR Results (mW/g)	Measured Drift (dB)
Tablet	1	Aux	HT0	40	54	5270	0.034	-0.107
Table	2	Main	HT0	40	54	5270	0.009	0.180
Edge On Side	3	Aux	HT0	40	54	5270	0.019	0.055

NOTE: The measurement uncertainty of 28.0% for 5GHz testing is not added to the result.

The highest SAR level recorded in the 5.2 GHz band was 0.034 mW/g as evaluated in a 1g cube of averaging mass. This value was obtained in Tablet position in OFDM mode, utilizing channel 54 (5270MHz) and antenna Aux.

Table: SAR MEASUREMENT RESULTS Middle Band – OFDM Mode

Test Position	Plot No.	Ant	Bit rate Mode (Mbps)	Channel Bandwidth (MHz)	Test Channel	Test Freq (MHz)	Measured 1g SAR Results (mW/g)	Measured Drift (dB)
Tablet	4	Aux	HT0	40	118	5590	0.035	0.408
Tablet	5	Main	HT0	40	118	5590	0.012	0.209
Edge On Side	6	Aux	HT0	40	118	5590	0.021	-0.304

NOTE: The measurement uncertainty of 28.0% for 5GHz testing is not added to the result.

The highest SAR level recorded in the 5.6 GHz band was 0.035 mW/g as evaluated in a 1g cube of averaging mass. This value was obtained in Tablet position in OFDM mode, utilizing channel 118 (5590MHz) and antenna Aux.

Table: SAR MEASUREMENT RESULTS Upper Band – OFDM Mode

Test Position	Plot No.	Ant	Bit rate Mode (Mbps)	Channel Bandwidth (MHz)	Test Channel	Test Freq (MHz)	Measured 1g SAR Results (mW/g)	Measured Drift (dB)
Tablet	7	Aux	HT0	40	159	5795	0.030	0.360
Tablet	8	Main	HT0	40	159	5795	0.005	0.477
Edge On Side	9	Aux	HT0	40	159	5795	0.012	-0.105

NOTE: The measurement uncertainty of 28.0% for 5GHz testing is not added to the result.

*This plot was used for identifying the “hotspot” only.

The highest SAR level recorded in the 5.8 GHz band was 0.030 mW/g as evaluated in a 1g cube of averaging mass. This value was obtained in Tablet position in OFDM mode, utilizing channel 40 (5795MHz) and antenna Aux.



12.0 COMPLIANCE STATEMENT

The Fujitsu TABLET PC, Model: T5010 with INTEL Mini-PCI Wireless LAN Module (HB92 802.11a/b/g/n), Model: AR5BHB92 & TAIYO YUDEN Bluetooth Module, Model: EYSMJCS was found to comply with the FCC and RSS-102 SAR requirements.

The highest SAR level recorded was 0.035 mW/g for a 1g cube. This value was measured at 5590 MHz (channel 118) in the Tablet position in OFDM modulation mode at the antenna Aux. This was below the limit of 1.6 mW/g for uncontrolled exposure, even taking into account the measurement uncertainty of 28.0 %.



This document must not be copied or reproduced, except in full without the written permission of the Manager, EMC Technologies Pty Ltd. The certificate on page 3 may be reproduced in full.

www.emctech.com.au

APPENDIX A1 TEST SAMPLE PHOTOGRAPHS

T5010 Host - Conventional Laptop Configuration



T5010 Host - Tablet Configuration



This document must not be copied or reproduced, except in full without the written permission of the Manager, EMC Technologies Pty Ltd. The certificate on page 3 may be reproduced in full.


www.emctech.com.au

APPENDIX A2 TEST SAMPLE PHOTOGRAPHS

Model: AR5BHB92 – WLAN Module
Front



Back

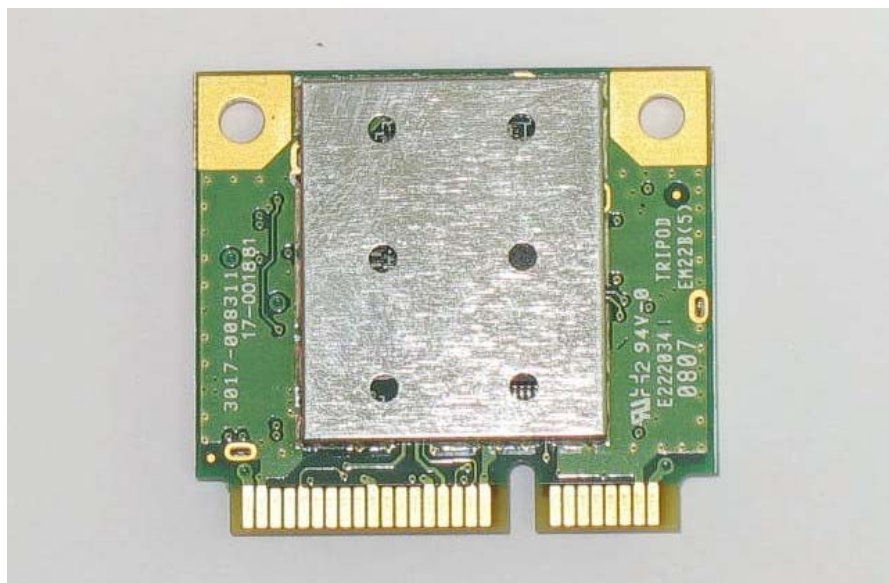

This document must not be copied or reproduced, except in full without the written permission of the Manager, EMC Technologies Pty Ltd. The certificate on page 3 may be reproduced in full.

www.emctech.com.au

APPENDIX A3 TEST SAMPLE PHOTOGRAPHS

Battery 1



Battery 2



AR5BHB92 inside the Fujitsu TABLET Computer



This document must not be copied or reproduced, except in full without the written permission of the Manager, EMC Technologies Pty Ltd. The certificate on page 3 may be reproduced in full.

www.emctech.com.au

APPENDIX A4 TEST SETUP PHOTOGRAPHS

Tablet Position




This document must not be copied or reproduced, except in full without the written permission of the Manager, EMC Technologies Pty Ltd. The certificate on page 3 may be reproduced in full.

www.emctech.com.au

APPENDIX A5 TEST SAMPLE PHOTOGRAPHS

Edge On Position

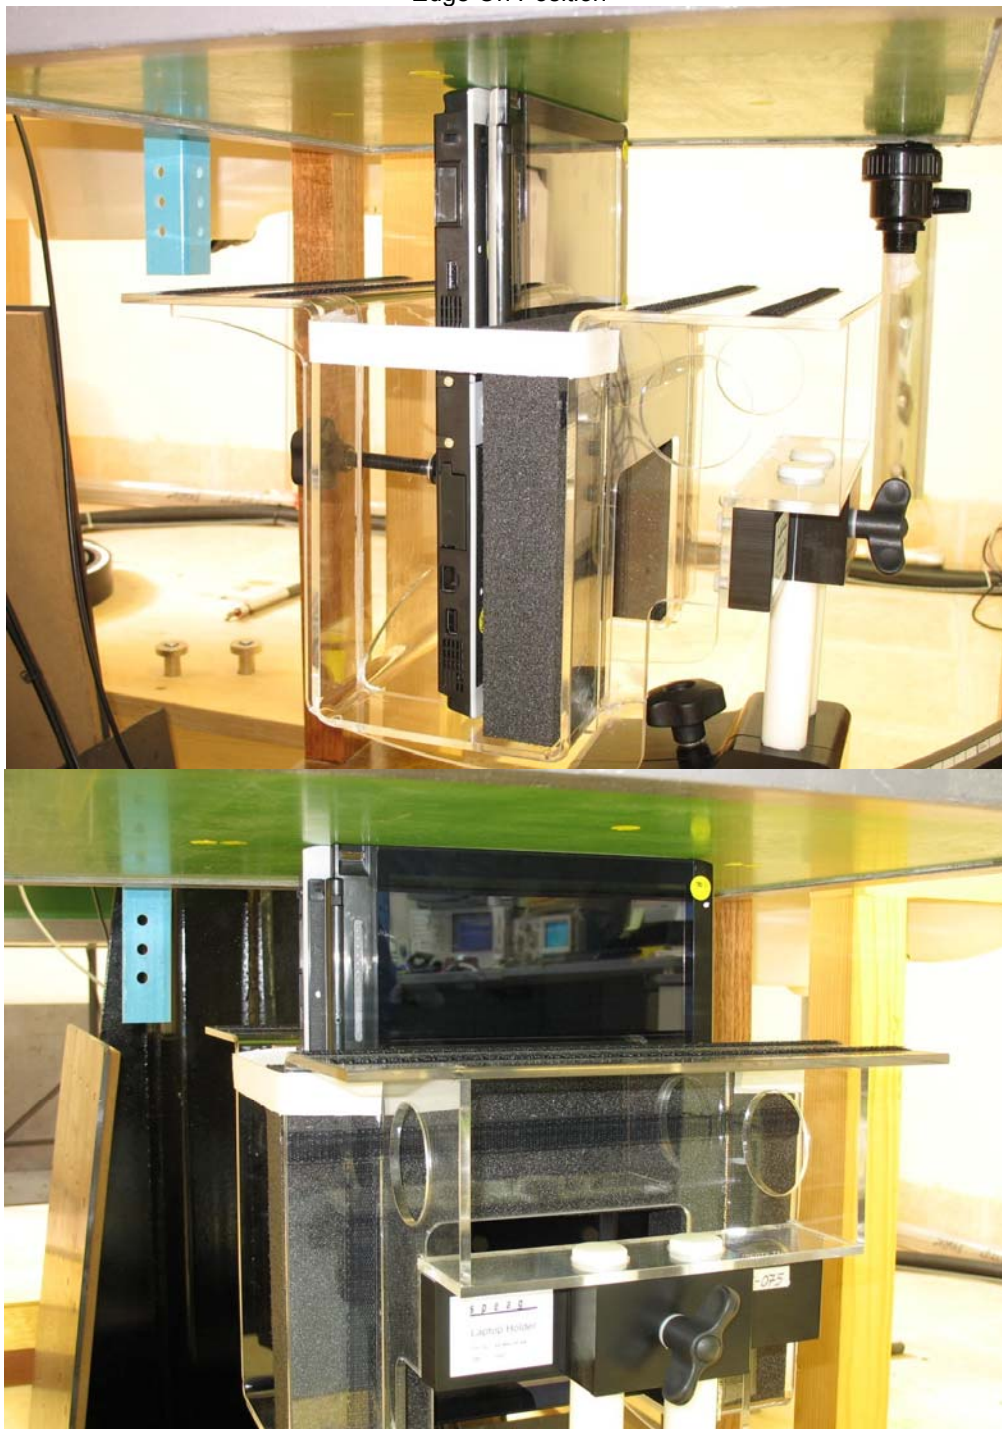

This document must not be copied or reproduced, except in full without the written permission of the Manager, EMC Technologies Pty Ltd. The certificate on page 3 may be reproduced in full.

www.emctech.com.au

APPENDIX B PLOTS OF THE SAR MEASUREMENTS

Plots of the measured SAR distributions inside the phantom are given in this Appendix for all tested configurations. The spatial peak SAR values were assessed with the procedure described in this report.

Table: 5200 MHz Band SAR Measurement Plot Numbers

Test Position	Plot No.	Ant	Bit rate Mode (Mbps)	Channel Bandwidth (MHz)	Test Channel
Tablet	1	Aux	HT0	40	54
Table	2	Main	HT0	40	54
Edge On Side	3	Aux	HT0	40	54
Z-Axis graphs for Plots 1 to 3					

Table: 5600 MHz Band SAR Measurement Plot Numbers

Test Position	Plot No.	Ant	Bit rate Mode (Mbps)	Channel Bandwidth (MHz)	Test Channel
Tablet	4	Aux	HT0	40	118
Tablet	5	Main	HT0	40	118
Edge On Side	6	Aux	HT0	40	118
Z-Axis graphs for Plots 4 to 6					

Table: 5800 MHz Band SAR Measurement Plot Numbers

Test Position	Plot No.	Ant	Bit rate Mode (Mbps)	Channel Bandwidth (MHz)	Test Channel
Tablet	7	Aux	HT0	40	159
Tablet	8	Main	HT0	40	159
Edge On Side	9	Aux	HT0	40	159
Z-Axis graphs for Plots 7 to 9					

Table: Validation Plots

Plot 10	Validation 5200 MHz 12 th April 2008
Plot 11	Validation 5200 MHz 17 th April 2008
Z-Axis graphs for Plots 10 to 11	
Plot 12	Validation 5500 MHz 18 th April 2008
Plot 13	Validation 5800 MHz 21 st April 2008
Z-Axis graphs for Plots 12 to 13	



This document must not be copied or reproduced, except in full without the written permission of the Manager, EMC Technologies Pty Ltd. The certificate on page 3 may be reproduced in full.

www.emctech.com.au

Test Date: 17 April 2008

File Name: Tablet OFDM HT0 (40MHz) 5.2 GHz Ant Aux Bluetooth Off 17-04-08.da4

DUT: Fujitsu Notebook Seneca with Atheros 11abgn and Bluetooth; Type: HB92; Serial: MAC: 001B9E-C850F4

* Communication System: OFDM 5250 MHz; Frequency: 5270 MHz; Duty Cycle: 1:1

* Medium parameters used: $\sigma = 5.34282$ mho/m, $\epsilon_r = 48.3576$; $\rho = 1000$ kg/m³

- Electronics: DAE3 Sn442; Probe: EX3DV4 - SN3563; ConvF(3.79, 3.79, 3.79)

- Phantom: Flat Phantom 10.1; Serial: P 10.1; Phantom section: Flat 2.2 Section

Channel 054 Test/Area Scan (101x141x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.147 mW/g


Channel 054 Test/Zoom Scan (7x7x9)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2.5mm

Reference Value = 3.20 V/m; Power Drift = -0.107 dB

Peak SAR (extrapolated) = 0.351 W/kg

SAR(1 g) = 0.034 mW/g; SAR(10 g) = 0.014 mW/g

Maximum value of SAR (measured) = 0.069 mW/g

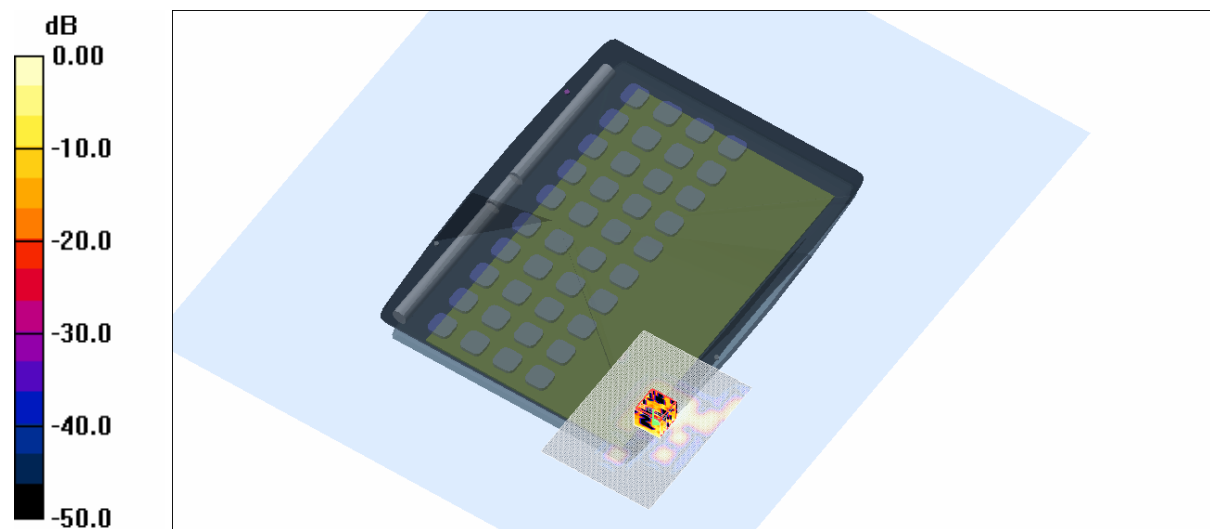

SAR MEASUREMENT PLOT 1

Ambient Temperature
Liquid Temperature
Humidity

20.5 Degrees Celsius
20.2 Degrees Celsius
53.0 %



This document must not be copied or reproduced, except in full without the written permission of the Manager, EMC Technologies Pty Ltd. The certificate on page 3 may be reproduced in full.

www.emctech.com.au

Test Date: 17 April 2008

File Name: Tablet OFDM HT0 (40MHz) 5.2 GHz Ant Main Bluetooth Off 17-04-08.da4

DUT: Fujitsu Notebook Seneca with Atheros 11abgn and Bluetooth; Type: HB92; Serial: MAC: 001B9E-C850F4

* Communication System: OFDM 5250 MHz; Frequency: 5270 MHz; Duty Cycle: 1:1

* Medium parameters used: $\sigma = 5.34282$ mho/m, $\epsilon_r = 48.3576$; $\rho = 1000$ kg/m³

- Electronics: DAE3 Sn442; Probe: EX3DV4 - SN3563; ConvF(3.79, 3.79, 3.79)

- Phantom: Flat Phantom 10.1; Serial: P 10.1; Phantom section: Flat 2.2 Section

Channel 054 Test/Area Scan (101x141x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.039 mW/g


Channel 054 Test/Zoom Scan (7x7x9)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2.5mm

Reference Value = 1.68 V/m; Power Drift = 0.180 dB

Peak SAR (extrapolated) = 0.149 W/kg

SAR(1 g) = 0.00897 mW/g; SAR(10 g) = 0.00206 mW/g

Maximum value of SAR (measured) = 0.037 mW/g

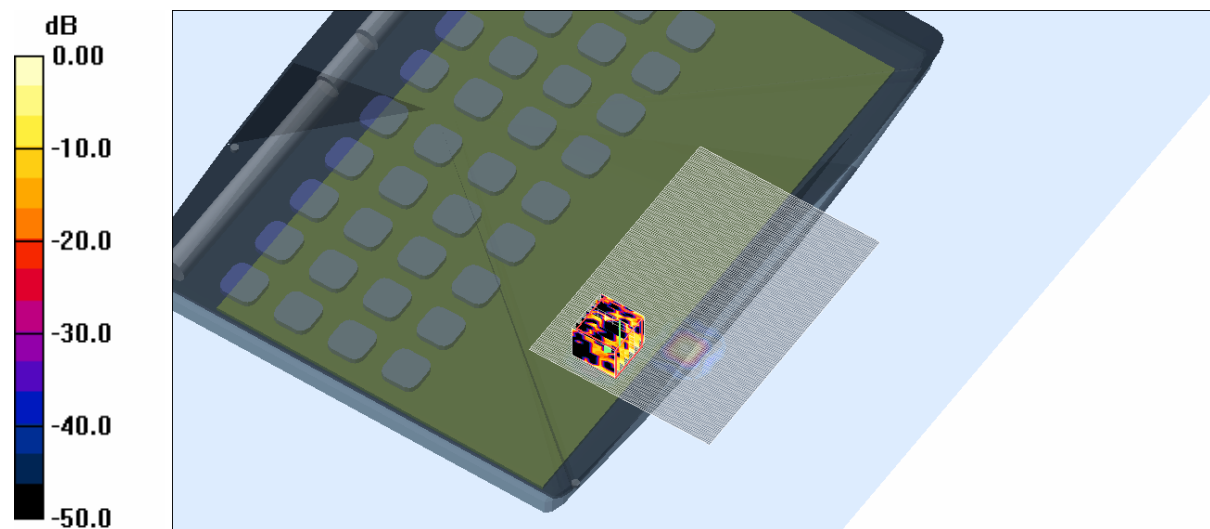

SAR MEASUREMENT PLOT 2

Ambient Temperature
Liquid Temperature
Humidity

20.5 Degrees Celsius
20.2 Degrees Celsius
53.0 %



This document must not be copied or reproduced, except in full without the written permission of the Manager, EMC Technologies Pty Ltd. The certificate on page 3 may be reproduced in full.

www.emctech.com.au

Test Date: 17 April 2008

File Name: Edge On Side OFDM HT0 (40MHz) 5.2 GHz Ant Aux Bluetooth Off 17-04-08.da4

DUT: Fujitsu Notebook Seneca with Atheros 11abgn and Bluetooth; Type: HB92; Serial: MAC: 001B9E-C850F4

* Communication System: OFDM 5250 MHz; Frequency: 5270 MHz; Duty Cycle: 1:1

* Medium parameters used: $\sigma = 5.34282$ mho/m, $\epsilon_r = 48.3576$; $\rho = 1000$ kg/m³

- Electronics: DAE3 Sn442; Probe: EX3DV4 - SN3563; ConvF(3.79, 3.79, 3.79)

- Phantom: Flat Phantom 10.1; Serial: P 10.1; Phantom section: Flat 2.2 Section

Channel 054 Test/Area Scan (101x141x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.070 mW/g


Channel 054 Test/Zoom Scan (7x7x9)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2.5mm

Reference Value = 1.66 V/m; Power Drift = 0.055 dB

Peak SAR (extrapolated) = 0.180 W/kg

SAR(1 g) = 0.019 mW/g; SAR(10 g) = 0.00521 mW/g

Maximum value of SAR (measured) = 0.046 mW/g

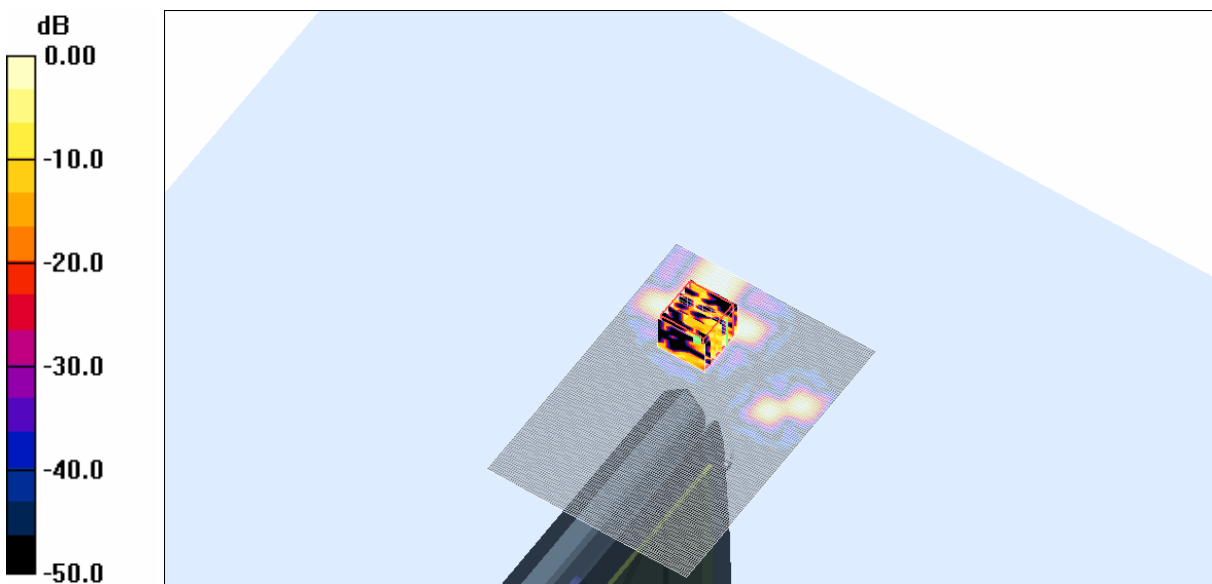

0 dB = 0.046mW/g

SAR MEASUREMENT PLOT 3


Ambient Temperature
Liquid Temperature
Humidity

20.5 Degrees Celsius
20.2 Degrees Celsius
53.0 %



This document must not be copied or reproduced, except in full without the written permission of the Manager, EMC Technologies Pty Ltd. The certificate on page 3 may be reproduced in full.

www.emctech.com.au

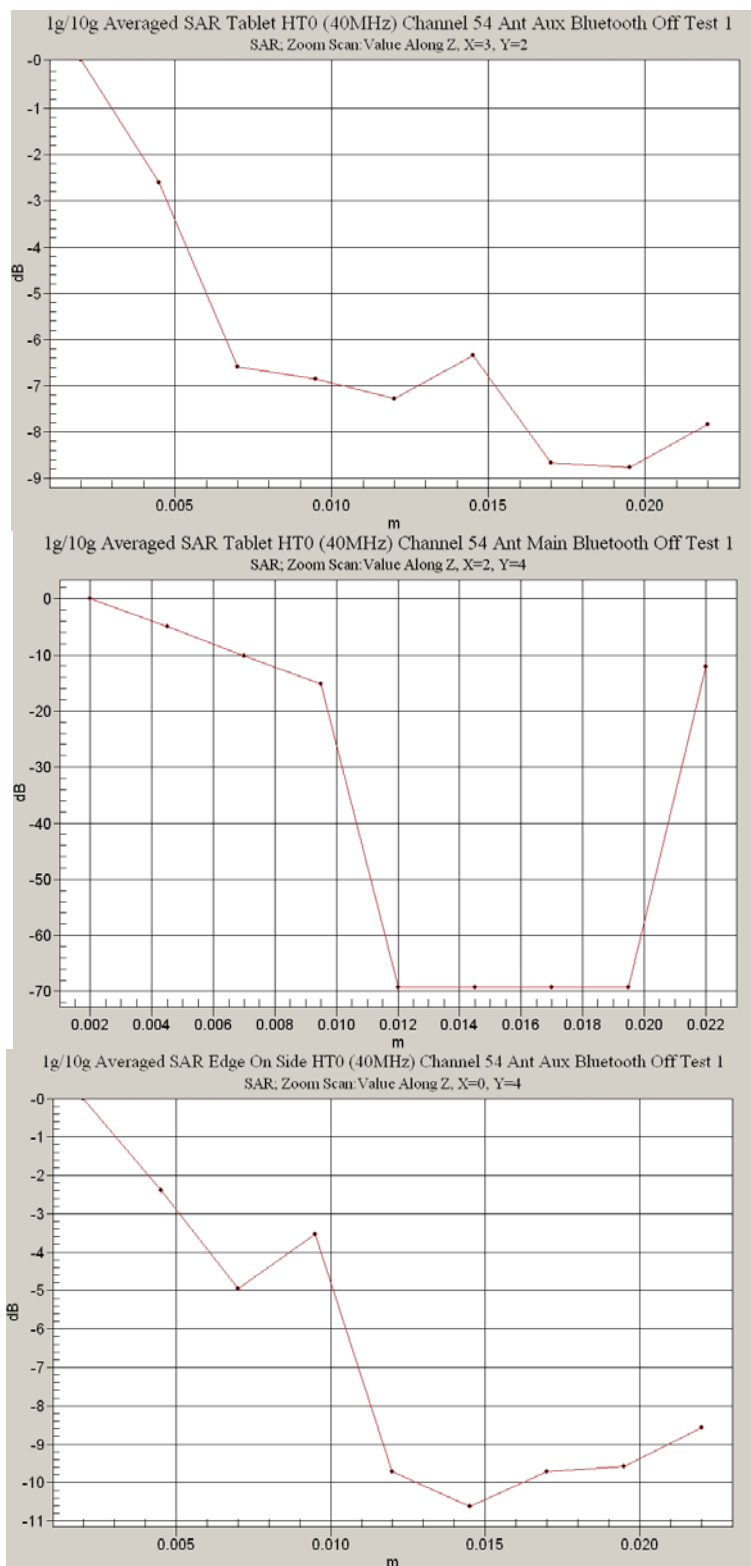

This document must not be copied or reproduced, except in full without the written permission of the Manager, EMC Technologies Pty Ltd. The certificate on page 3 may be reproduced in full.

www.emctech.com.au