

## APPENDIX A1 TEST SETUP PHOTOGRAPHS

Tablet Position



Accreditation No. 5292

---

This document must not be copied or reproduced, except in full without the written permission of the Manager, EMC Technologies Pty Ltd. The certificate on page 3 may be reproduced in full.  
[www.emctech.com.au](http://www.emctech.com.au)

## APPENDIX B PLOTS OF THE SAR MEASUREMENTS

Plots of the measured SAR distributions inside the phantom are given in this Appendix for all tested configurations. The spatial peak SAR values were assessed with the procedure described in this report.

**Table: 5200 MHz Band SAR Measurement Plot Numbers**

Test Position	Plot No.	Ant	Bit rate Mode (Mbps)	Channel Bandwidth (MHz)	Test Channel
Tablet	1	B	6	-	52
Tablet	2	A	6	-	36
	3	A	6	-	52
	4	A	6	-	64

Z-Axis graphs for Plots 1 to 4

**Table: 5600 MHz Band SAR Measurement Plot Numbers**

Test Position	Plot No.	Ant	Bit rate Mode (Mbps)	Channel Bandwidth (MHz)	Test Channel
Tablet	5	B	6	-	120
Tablet	6	A	6	-	100
	7	A	6	-	120
	8	A	6	-	140

Z-Axis graphs for Plots 5 to 8

**Table: 5800 MHz Band SAR Measurement Plot Numbers**

Test Position	Plot No.	Ant	Bit rate Mode (Mbps)	Channel Bandwidth (MHz)	Test Channel
Tablet	9	A	6	-	157
Tablet	10	B	6	-	149
	11	B	6	-	157
	12	B	6	-	165

Z-Axis graphs for Plots 9 to 12

**Table: Validation Plots**

Plot 13	Validation 5200 MHz 6 <sup>th</sup> September 2008
Plot 14	Validation 5500 MHz 4 <sup>th</sup> September 2008
Plot 15	Validation 5800 MHz 4 <sup>th</sup> September 2008
	Z-Axis graphs for Plots 13 to 15



Accreditation No. 5292

This document must not be copied or reproduced, except in full without the written permission of the Manager, EMC Technologies Pty Ltd. The certificate on page 3 may be reproduced in full.  
[www.emctech.com.au](http://www.emctech.com.au)

**Test Date: 06 September 2008**

File Name: Tablet OFDM 5.2 GHz Antenna B 06-09-08.da4

DUT: **Fujitsu Tablet Oneya with HB92 2x2 abgn; Type: AR5BHB92; Serial: MAC:**

\* Communication System: OFDM 5250 MHz; Frequency: 5260 MHz; Duty Cycle: 1:1

\* Medium parameters used:  $f = 5260.6$  MHz;  $\sigma = 5.6$  mho/m;  $\epsilon_r = 44.7$ ;  $\rho = 1000$  kg/m<sup>3</sup>

- Electronics: DAE3 Sn442; Probe: EX3DV4 - SN3563; ConvF(3.72, 3.72, 3.72)

- Phantom: Flat Phantom 10.1; Serial: P 10.1; Phantom section: Flat 2.2 Section

**Channel 52 Test/Area Scan (71x101x1):** Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.556 mW/g


**Channel 52 Test/Zoom Scan (7x7x9)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=2.5mm

Reference Value = 6.56 V/m; Power Drift = -0.242 dB

Peak SAR (extrapolated) = 0.830 W/kg

**SAR(1 g) = 0.254 mW/g; SAR(10 g) = 0.088 mW/g**

Maximum value of SAR (measured) = 0.483 mW/g

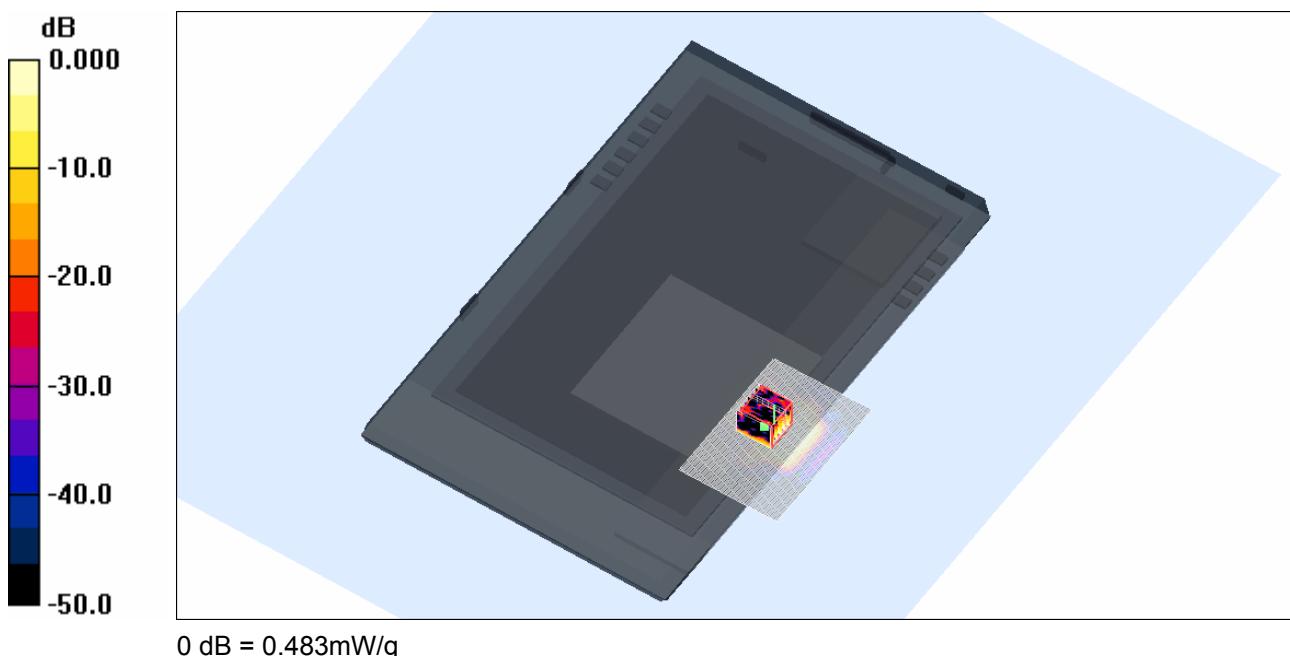

Ambient Temperature  
Liquid Temperature  
Humidity

20.3 Degrees Celsius  
20.1 Degrees Celsius  
39.0 %



Accreditation No. 5292

This document must not be copied or reproduced, except in full without the written permission of the Manager, EMC Technologies Pty Ltd. The certificate on page 3 may be reproduced in full.  
[www.emctech.com.au](http://www.emctech.com.au)

**Test Date: 06 September 2008**

File Name: Tablet OFDM 5.2 GHz Antenna A 06-09-08.da4

**DUT: Fujitsu Tablet Oneya with HB92 2x2 abgn; Type: AR5BHB92; Serial: MAC:**

\* Communication System: OFDM 5250 MHz; Frequency: 5180 MHz; Duty Cycle: 1:1

\* Medium parameters used:  $f = 5173$  MHz;  $\sigma = 5.43$  mho/m;  $\epsilon_r = 44.9$ ;  $\rho = 1000$  kg/m<sup>3</sup>

- Electronics: DAE3 Sn442; Probe: EX3DV4 - SN3563; ConvF(3.72, 3.72, 3.72)

- Phantom: Flat Phantom 10.1; Serial: P 10.1; Phantom section: Flat 2.2 Section

**Channel 36 Test/Area Scan (71x101x1):** Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.314 mW/g


**Channel 36 Test/Zoom Scan (7x7x9)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=2.5mm

Reference Value = 2.69 V/m; Power Drift = -0.205 dB

Peak SAR (extrapolated) = 0.413 W/kg

**SAR(1 g) = 0.120 mW/g; SAR(10 g) = 0.037 mW/g**

Maximum value of SAR (measured) = 0.235 mW/g

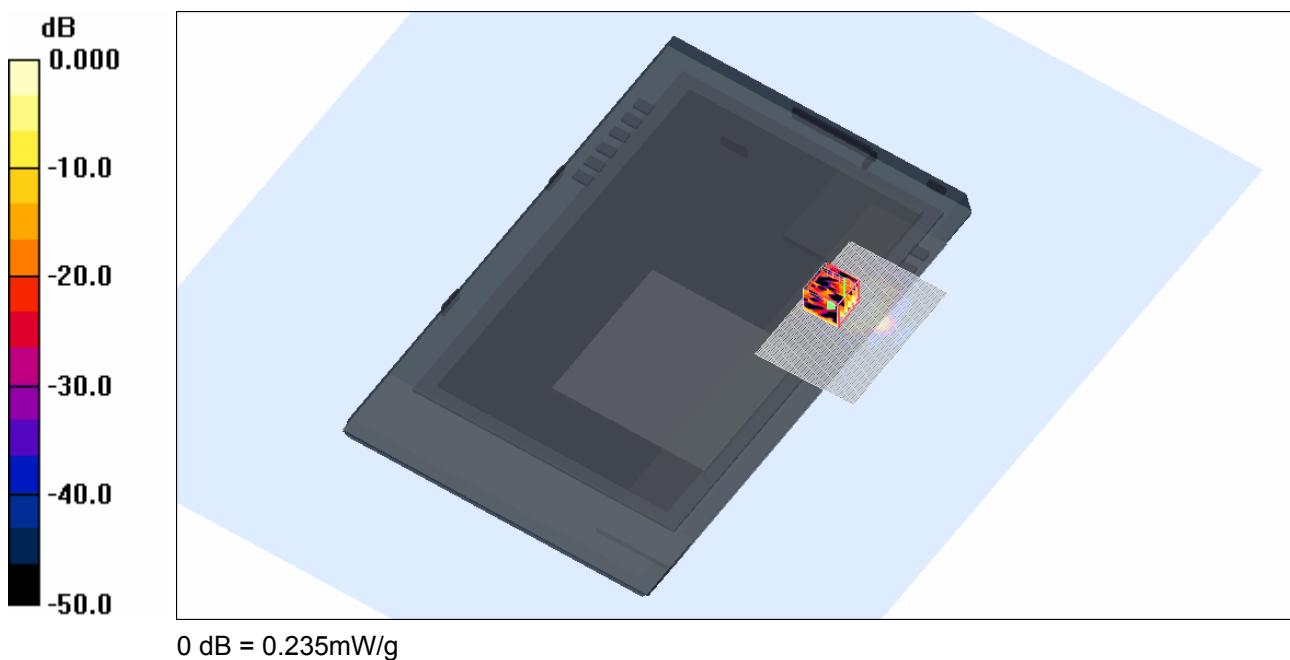

Ambient Temperature  
Liquid Temperature  
Humidity

20.3 Degrees Celsius  
20.1 Degrees Celsius  
39.0 %



Accreditation No. 5292

This document must not be copied or reproduced, except in full without the written permission of the Manager, EMC Technologies Pty Ltd. The certificate on page 3 may be reproduced in full.  
[www.emctech.com.au](http://www.emctech.com.au)

**Test Date: 06 September 2008**

File Name: Tablet OFDM 5.2 GHz Antenna A 06-09-08.da4

**DUT: Fujitsu Tablet Oneya with HB92 2x2 abgn; Type: AR5BHB92; Serial: MAC:**

\* Communication System: OFDM 5250 MHz; Frequency: 5260 MHz; Duty Cycle: 1:1

\* Medium parameters used:  $f = 5260.6$  MHz;  $\sigma = 5.6$  mho/m;  $\epsilon_r = 44.7$ ;  $\rho = 1000$  kg/m<sup>3</sup>

- Electronics: DAE3 Sn442; Probe: EX3DV4 - SN3563; ConvF(3.72, 3.72, 3.72)

- Phantom: Flat Phantom 10.1; Serial: P 10.1; Phantom section: Flat 2.2 Section

**Channel 52 Test/Area Scan (71x101x1):** Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.775 mW/g


**Channel 52 Test/Zoom Scan (7x7x9)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=2.5mm

Reference Value = 3.53 V/m; Power Drift = -0.465 dB

Peak SAR (extrapolated) = 1.68 W/kg

**SAR(1 g) = 0.336 mW/g; SAR(10 g) = 0.124 mW/g**

Maximum value of SAR (measured) = 0.614 mW/g

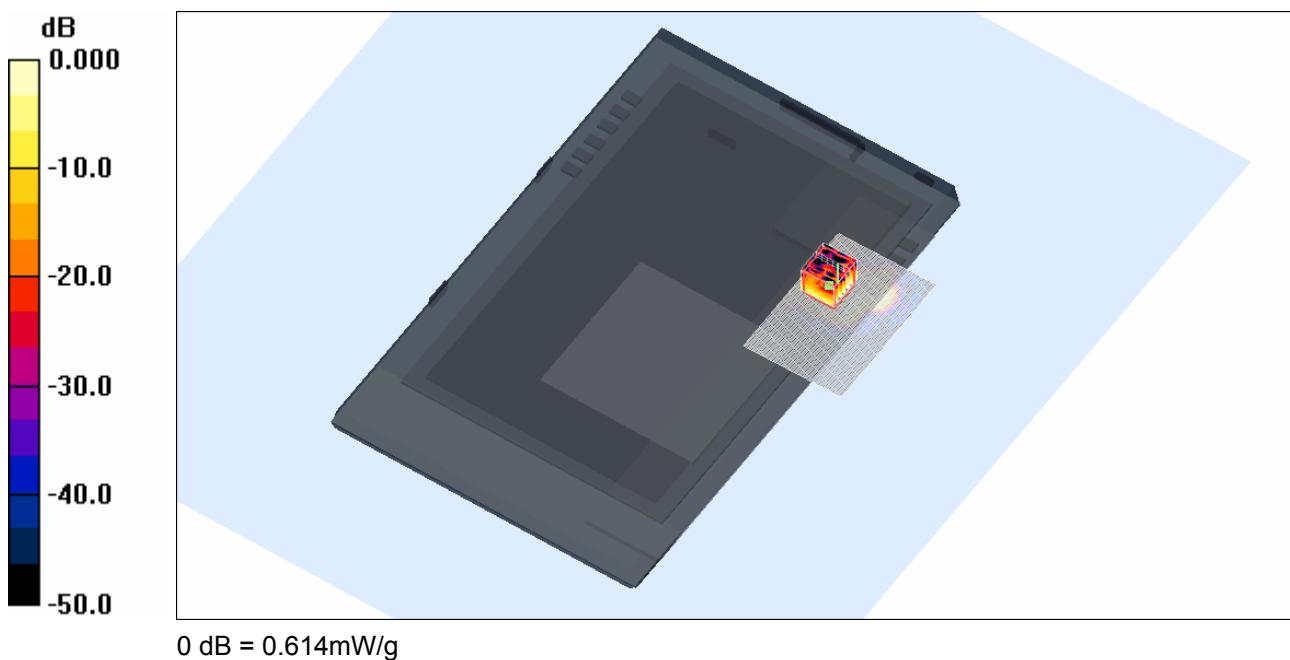

Ambient Temperature  
Liquid Temperature  
Humidity

20.3 Degrees Celsius  
20.1 Degrees Celsius  
39.0 %



This document must not be copied or reproduced, except in full without the written permission of the Manager, EMC Technologies Pty Ltd. The certificate on page 3 may be reproduced in full.  
[www.emctech.com.au](http://www.emctech.com.au)

**Test Date: 06 September 2008**

File Name: Tablet OFDM 5.2 GHz Antenna A 06-09-08.da4

**DUT: Fujitsu Tablet Oneya with HB92 2x2 abgn; Type: AR5BHB92; Serial: MAC:**

\* Communication System: OFDM 5250 MHz; Frequency: 5320 MHz; Duty Cycle: 1:1

\* Medium parameters used:  $f = 5319$  MHz;  $\sigma = 5.7$  mho/m;  $\epsilon_r = 44.4$ ;  $\rho = 1000$  kg/m<sup>3</sup>

- Electronics: DAE3 Sn442; Probe: EX3DV4 - SN3563; ConvF(3.72, 3.72, 3.72)

- Phantom: Flat Phantom 10.1; Serial: P 10.1; Phantom section: Flat 2.2 Section

**Channel 64 Test/Area Scan (71x101x1):** Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.834 mW/g


**Channel 64 Test/Zoom Scan (7x7x9)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=2.5mm

Reference Value = 5.20 V/m; Power Drift = 0.115 dB

Peak SAR (extrapolated) = 1.03 W/kg

**SAR(1 g) = 0.323 mW/g; SAR(10 g) = 0.116 mW/g**

Maximum value of SAR (measured) = 0.610 mW/g

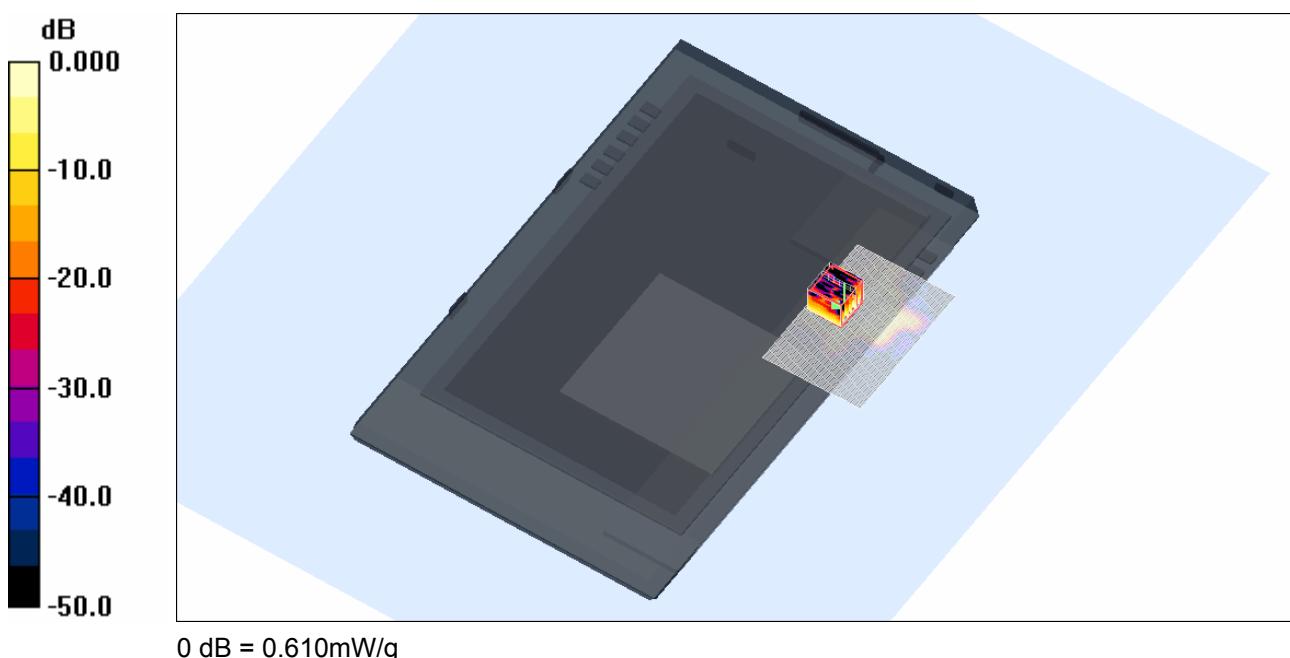



Ambient Temperature  
Liquid Temperature  
Humidity

20.3 Degrees Celsius  
20.1 Degrees Celsius  
39.0 %





Accreditation No. 5292

This document must not be copied or reproduced, except in full without the written permission of the Manager, EMC Technologies Pty Ltd. The certificate on page 3 may be reproduced in full.  
[www.emctech.com.au](http://www.emctech.com.au)

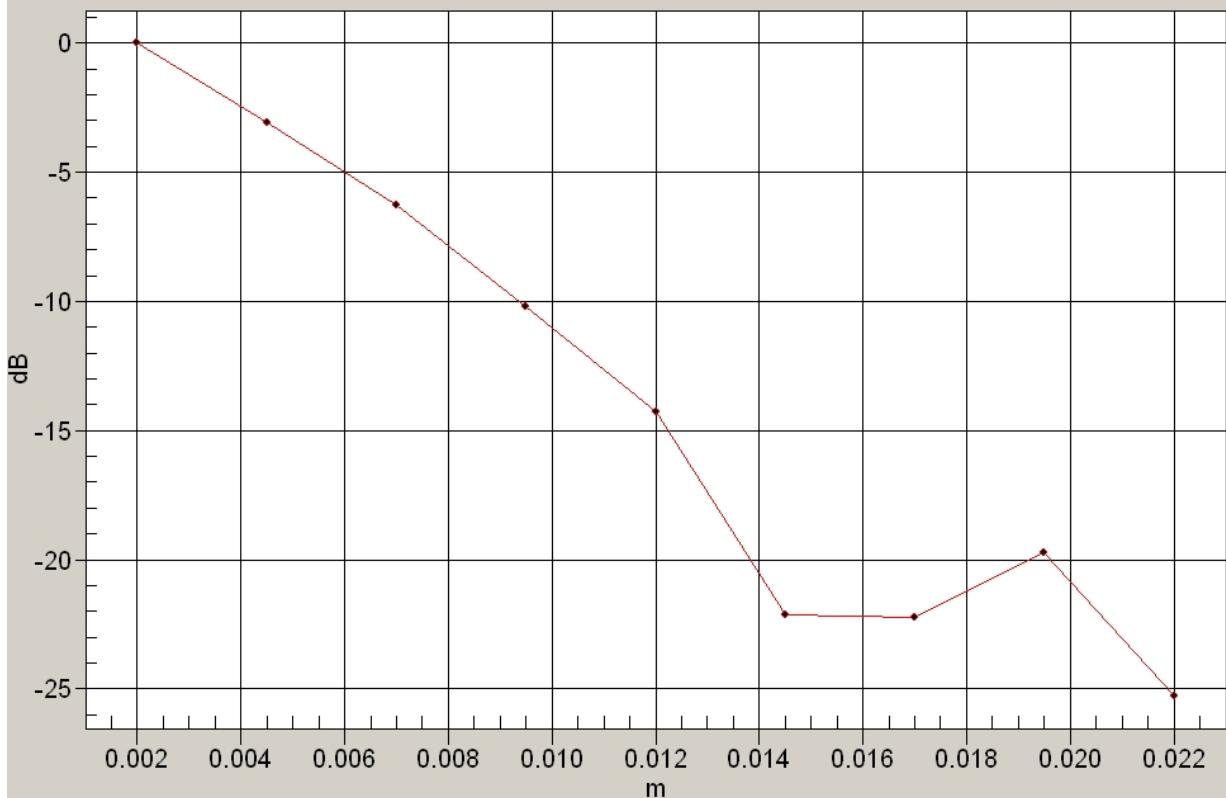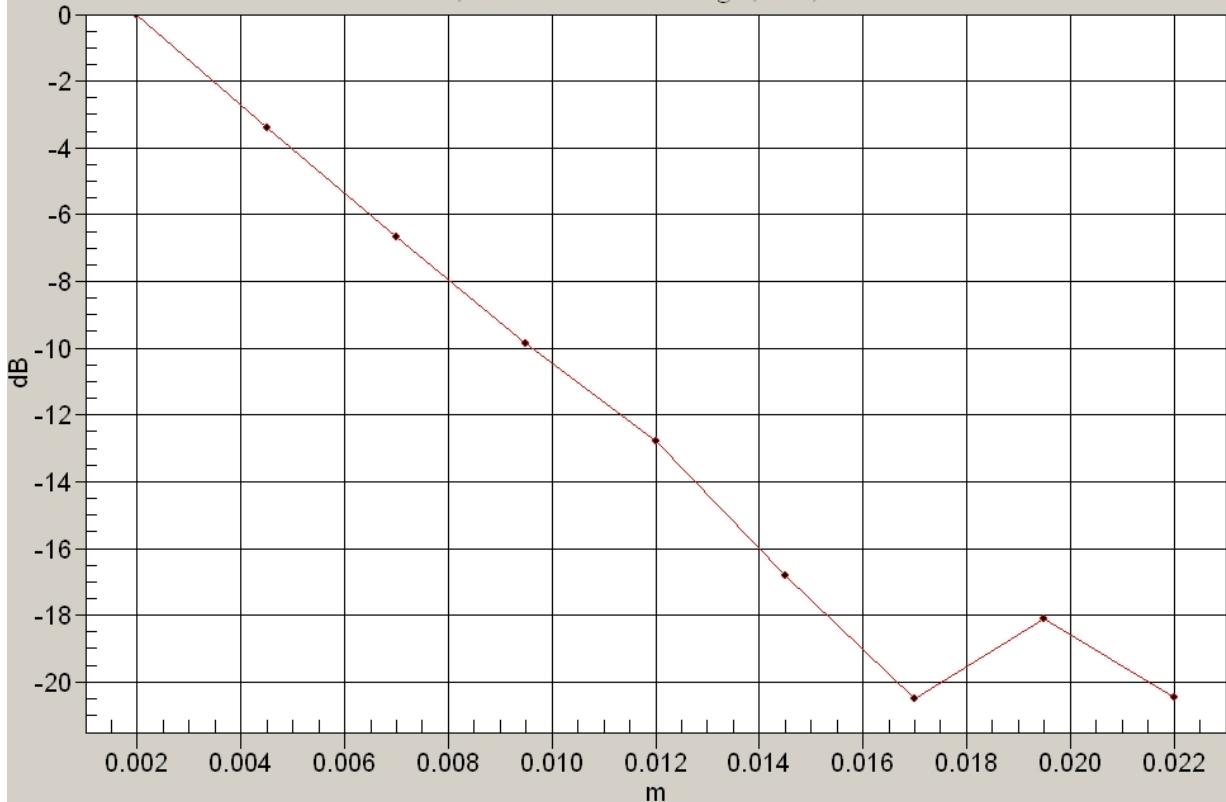**1g/10g Averaged SAR Tablet OFDM Channel 52 Antenna B Test 1**  
SAR; Zoom Scan: Value Along Z, X=2, Y=4**1g/10g Averaged SAR Tablet OFDM Channel 36 Antenna A Test 1**  
SAR; Zoom Scan: Value Along Z, X=2, Y=5

Accreditation No. 5292

This document must not be copied or reproduced, except in full without the written permission of the Manager, EMC Technologies Pty Ltd. The certificate on page 3 may be reproduced in full.  
[www.emctech.com.au](http://www.emctech.com.au)

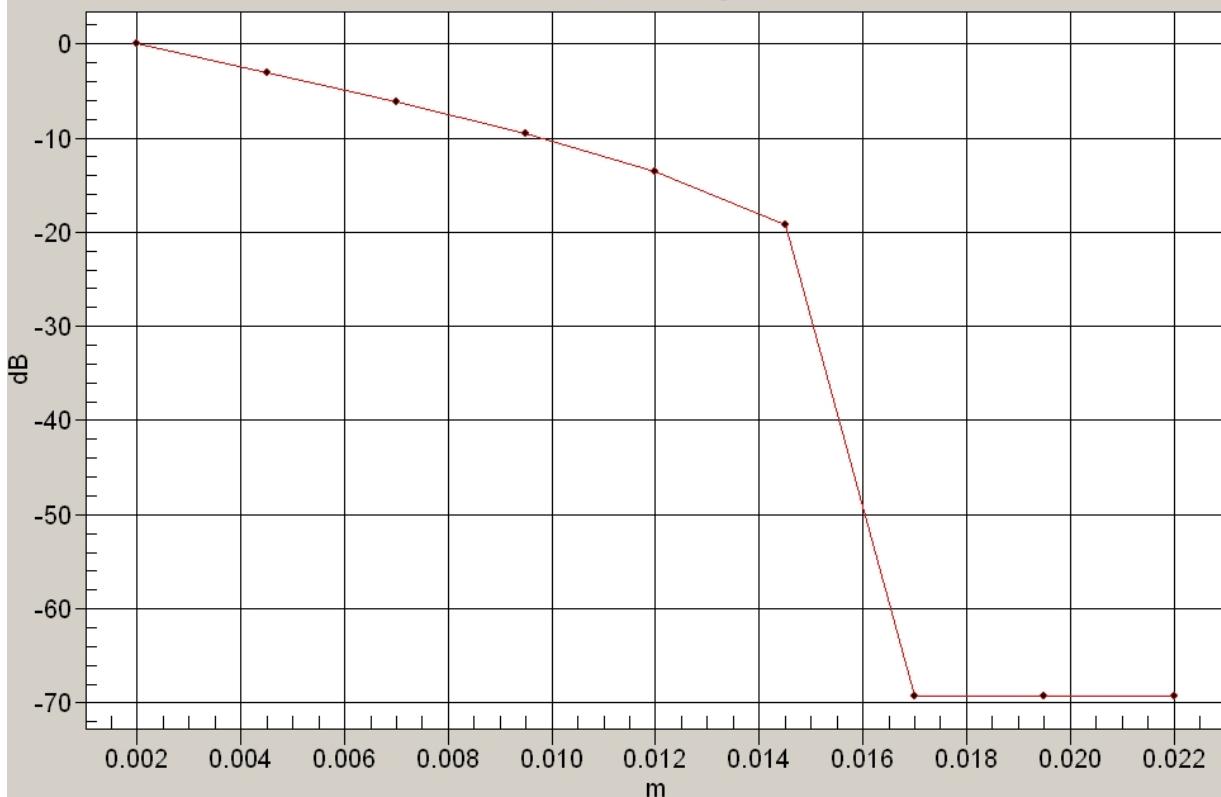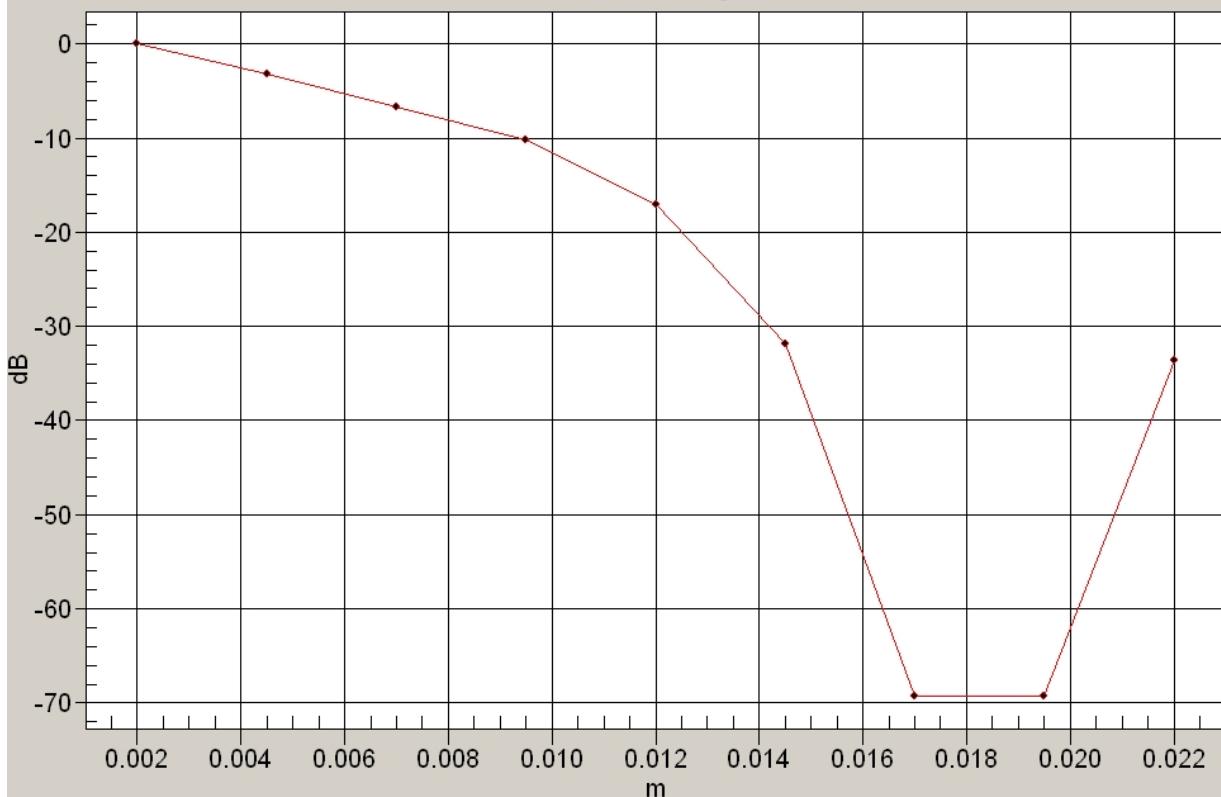**1g/10g Averaged SAR Tablet OFDM Channel 52 Antenna A Test 1**  
SAR; Zoom Scan:Value Along Z, X=2, Y=4**1g/10g Averaged SAR Tablet OFDM Channel 64 Antenna A Test 1**  
SAR; Zoom Scan:Value Along Z, X=2, Y=4

Accreditation No. 5292

This document must not be copied or reproduced, except in full without the written permission of the Manager, EMC Technologies Pty Ltd. The certificate on page 3 may be reproduced in full.  
[www.emctech.com.au](http://www.emctech.com.au)

**Test Date: 04 September 2008**

File Name: Tablet OFDM 5.6 GHz Antenna B 04-09-08.da4

**DUT: Fujitsu Tablet Oneya with HB92 2x2 abgn; Type: AR5BHB92; Serial: MAC:**

\* Communication System: OFDM 5770 MHz; Frequency: 5600 MHz; Duty Cycle: 1:1

\* Medium parameters used:  $f = 5596.4$  MHz;  $\sigma = 5.86$  mho/m;  $\epsilon_r = 44.5$ ;  $\rho = 1000$  kg/m<sup>3</sup>

- Electronics: DAE3 Sn442; Probe: EX3DV4 - SN3563; ConvF(3.75, 3.75, 3.75)

- Phantom: Flat Phantom 10.1; Serial: P 10.1; Phantom section: Flat 2.2 Section

**Channel 120 Test/Area Scan (71x101x1):** Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.584 mW/g


**Channel 120 Test/Zoom Scan (7x7x9)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=2.5mm

Reference Value = 8.69 V/m; Power Drift = -0.400 dB

Peak SAR (extrapolated) = 1.14 W/kg

**SAR(1 g) = 0.290 mW/g; SAR(10 g) = 0.095 mW/g**

Maximum value of SAR (measured) = 0.597 mW/g

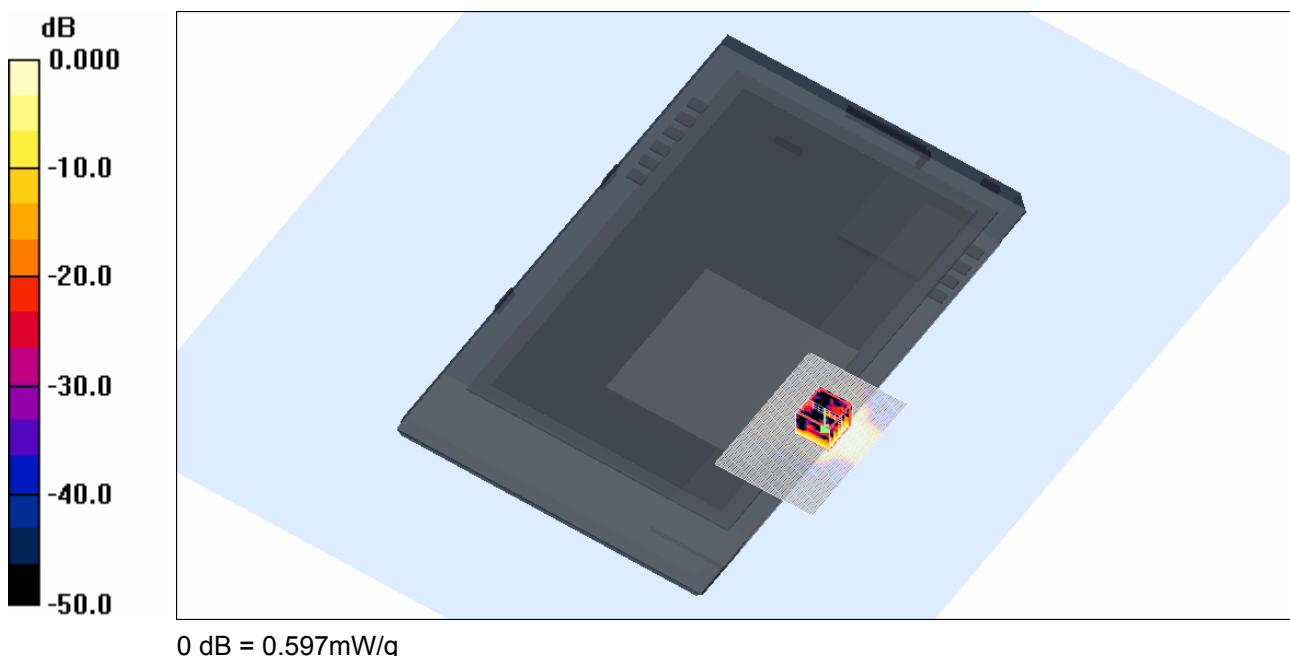

Ambient Temperature  
Liquid Temperature  
Humidity

20.4 Degrees Celsius  
20.1 Degrees Celsius  
36.0 %



Accreditation No. 5292

This document must not be copied or reproduced, except in full without the written permission of the Manager, EMC Technologies Pty Ltd. The certificate on page 3 may be reproduced in full.  
[www.emctech.com.au](http://www.emctech.com.au)

**Test Date: 04 September 2008**

File Name: Tablet OFDM 5.6 GHz Antenna A 04-09-08.da4

**DUT: Fujitsu Tablet Oneya with HB92 2x2 abgn; Type: AR5BHB92; Serial: MAC:**

\* Communication System: OFDM 5770 MHz; Frequency: 5500 MHz; Duty Cycle: 1:1

\* Medium parameters used:  $f = 5494.2$  MHz;  $\sigma = 5.68$  mho/m;  $\epsilon_r = 44.8$ ;  $\rho = 1000$  kg/m<sup>3</sup>

- Electronics: DAE3 Sn442; Probe: EX3DV4 - SN3563; ConvF(3.75, 3.75, 3.75)

- Phantom: Flat Phantom 10.1; Serial: P 10.1; Phantom section: Flat 2.2 Section

**Channel 100 Test/Area Scan (71x101x1):** Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.508 mW/g


**Channel 100 Test/Zoom Scan (7x7x9)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=2.5mm

Reference Value = 2.93 V/m; Power Drift = -0.357 dB

Peak SAR (extrapolated) = 1.33 W/kg

**SAR(1 g) = 0.255 mW/g; SAR(10 g) = 0.094 mW/g**

Maximum value of SAR (measured) = 0.508 mW/g

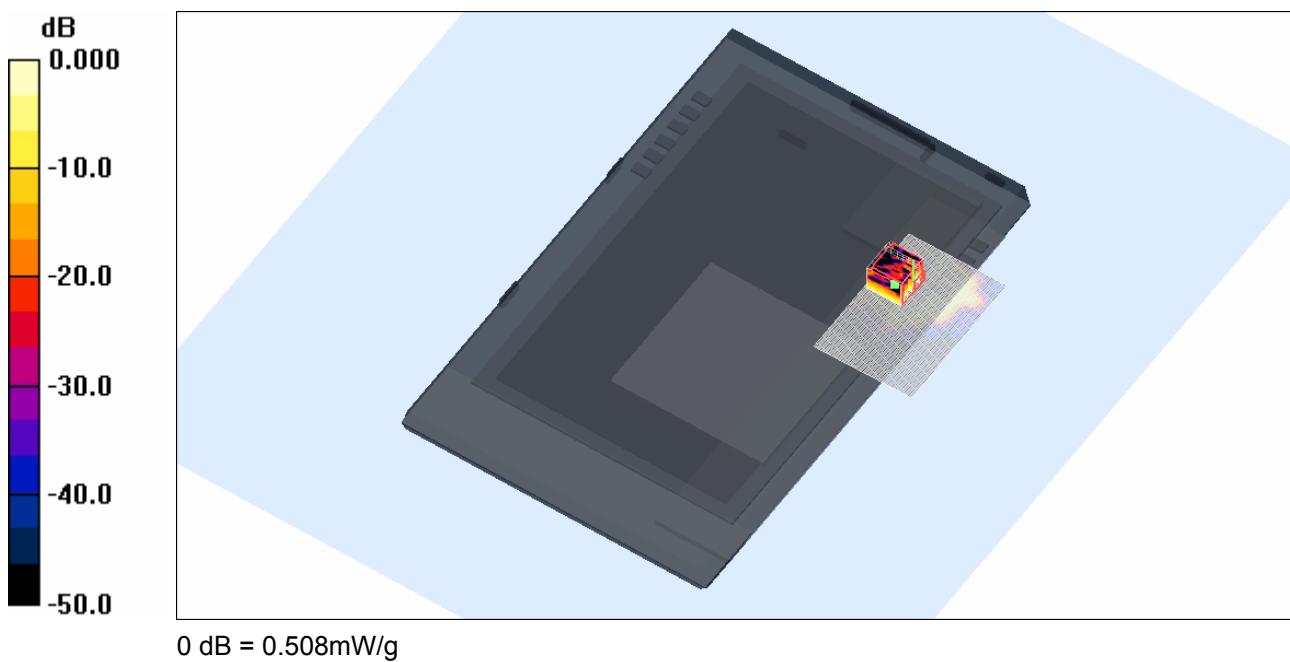

Ambient Temperature  
Liquid Temperature  
Humidity

20.4 Degrees Celsius  
20.1 Degrees Celsius  
36.0 %



Accreditation No. 5292

This document must not be copied or reproduced, except in full without the written permission of the Manager, EMC Technologies Pty Ltd. The certificate on page 3 may be reproduced in full.  
[www.emctech.com.au](http://www.emctech.com.au)

**Test Date: 04 September 2008**

File Name: Tablet OFDM 5.6 GHz Antenna A 04-09-08.da4

**DUT: Fujitsu Tablet Oneya with HB92 2x2 abgn; Type: AR5BHB92; Serial: MAC:**

\* Communication System: OFDM 5770 MHz; Frequency: 5600 MHz; Duty Cycle: 1:1

\* Medium parameters used:  $f = 5596.4$  MHz;  $\sigma = 5.86$  mho/m;  $\epsilon_r = 44.5$ ;  $\rho = 1000$  kg/m<sup>3</sup>

- Electronics: DAE3 Sn442; Probe: EX3DV4 - SN3563; ConvF(3.75, 3.75, 3.75)

- Phantom: Flat Phantom 10.1; Serial: P 10.1; Phantom section: Flat 2.2 Section

**Channel 120 Test/Area Scan (71x101x1):** Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.660 mW/g


**Channel 120 Test/Zoom Scan (7x7x9)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=2.5mm

Reference Value = 5.52 V/m; Power Drift = -0.410 dB

Peak SAR (extrapolated) = 1.22 W/kg

**SAR(1 g) = 0.309 mW/g; SAR(10 g) = 0.110 mW/g**

Maximum value of SAR (measured) = 0.615 mW/g

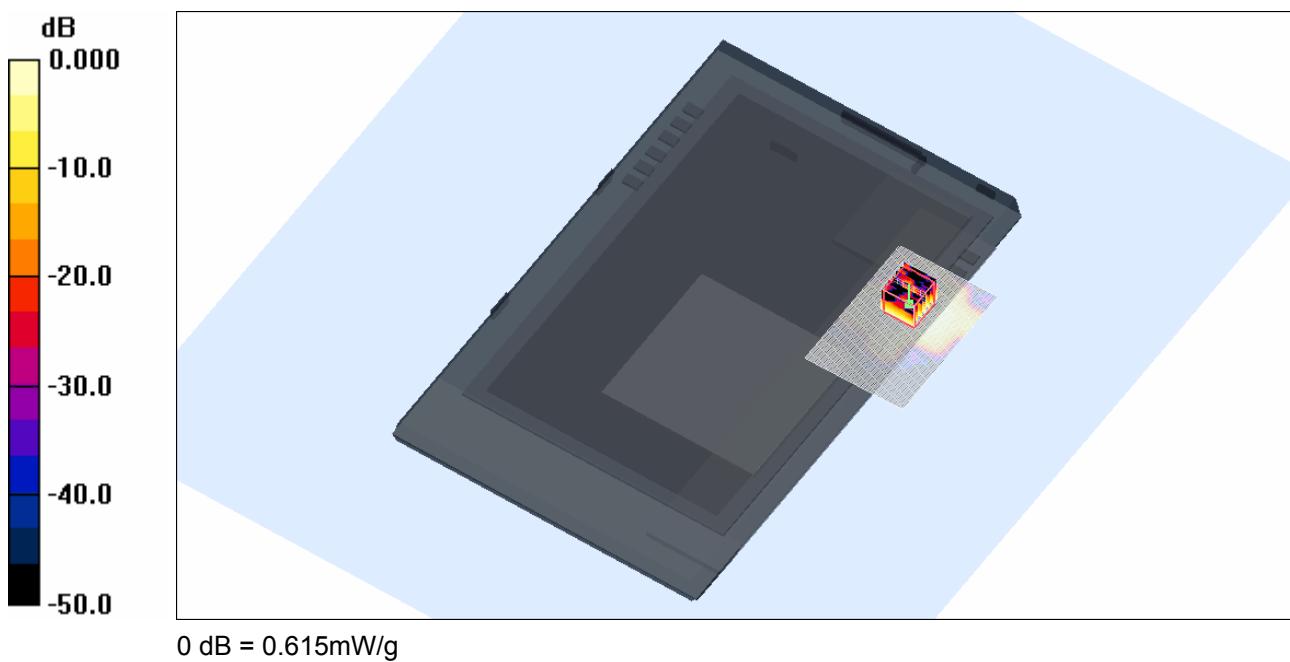

Ambient Temperature  
Liquid Temperature  
Humidity

20.4 Degrees Celsius  
20.1 Degrees Celsius  
36.0 %



This document must not be copied or reproduced, except in full without the written permission of the Manager, EMC Technologies Pty Ltd. The certificate on page 3 may be reproduced in full.  
[www.emctech.com.au](http://www.emctech.com.au)

**Test Date: 04 September 2008**

File Name: Tablet OFDM 5.6 GHz Antenna A 04-09-08.da4

DUT: **Fujitsu Tablet Oneya with HB92 2x2 abgn; Type: AR5BHB92; Serial: MAC:**

\* Communication System: OFDM 5770 MHz; Frequency: 5700 MHz; Duty Cycle: 1:1

\* Medium parameters used:  $f = 5698.6$  MHz;  $\sigma = 6.03$  mho/m;  $\epsilon_r = 44.2$ ;  $\rho = 1000$  kg/m<sup>3</sup>

- Electronics: DAE3 Sn442; Probe: EX3DV4 - SN3563; ConvF(3.75, 3.75, 3.75)

- Phantom: Flat Phantom 10.1; Serial: P 10.1; Phantom section: Flat 2.2 Section

**Channel 140 Test/Area Scan (71x101x1):** Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.409 mW/g


**Channel 140 Test/Zoom Scan (7x7x9)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=2.5mm

Reference Value = 2.97 V/m; Power Drift = 0.057 dB

Peak SAR (extrapolated) = 0.717 W/kg

**SAR(1 g) = 0.192 mW/g; SAR(10 g) = 0.068 mW/g**

Maximum value of SAR (measured) = 0.396 mW/g

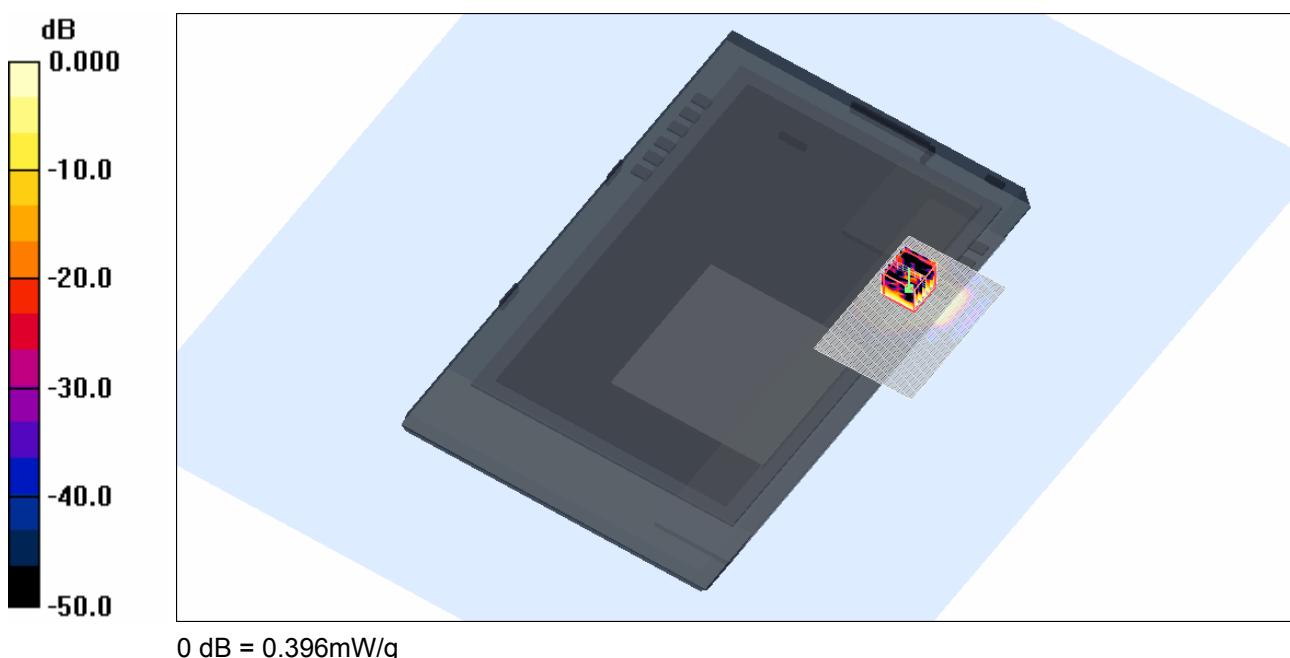



Ambient Temperature  
Liquid Temperature  
Humidity

20.4 Degrees Celsius  
20.1 Degrees Celsius  
36.0 %





Accreditation No. 5292

This document must not be copied or reproduced, except in full without the written permission of the Manager, EMC Technologies Pty Ltd. The certificate on page 3 may be reproduced in full.  
[www.emctech.com.au](http://www.emctech.com.au)

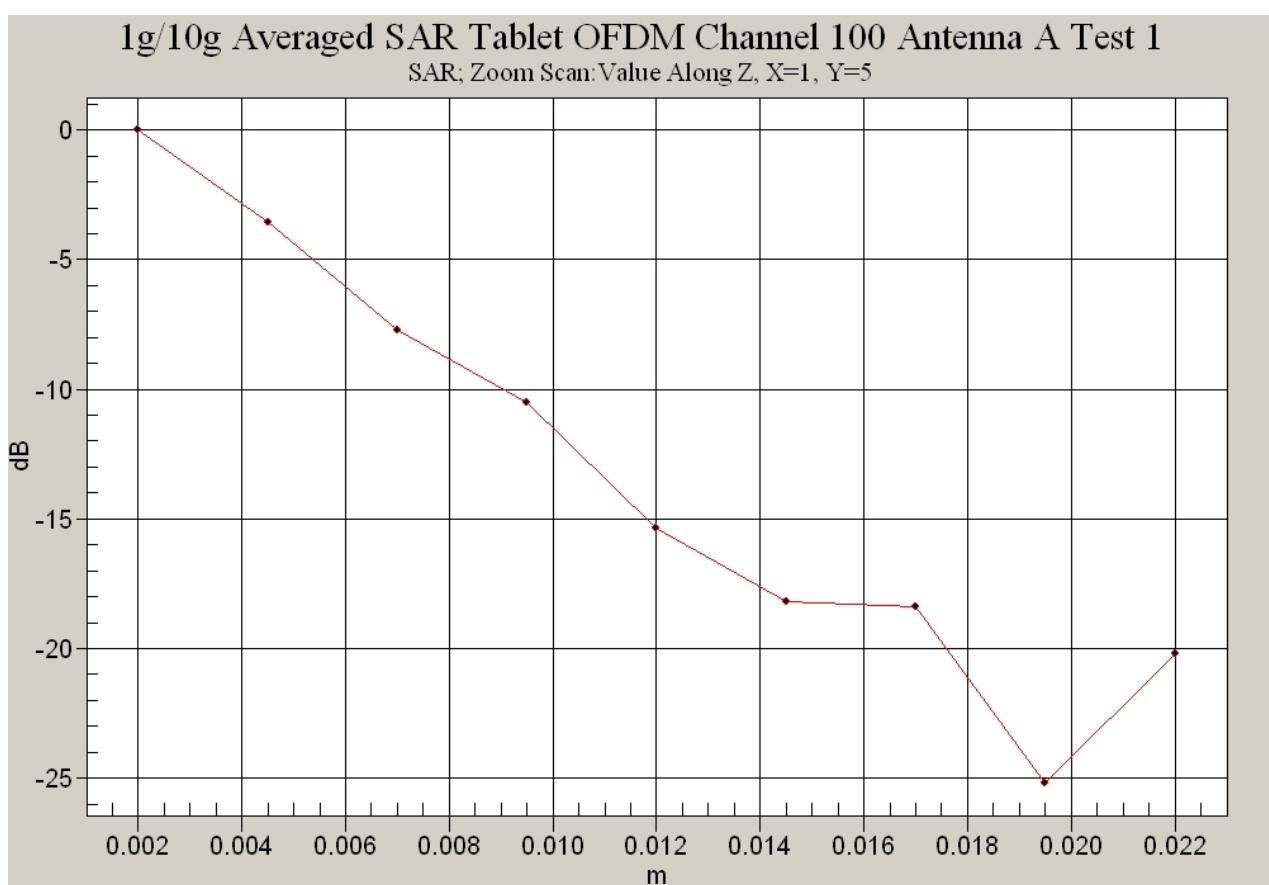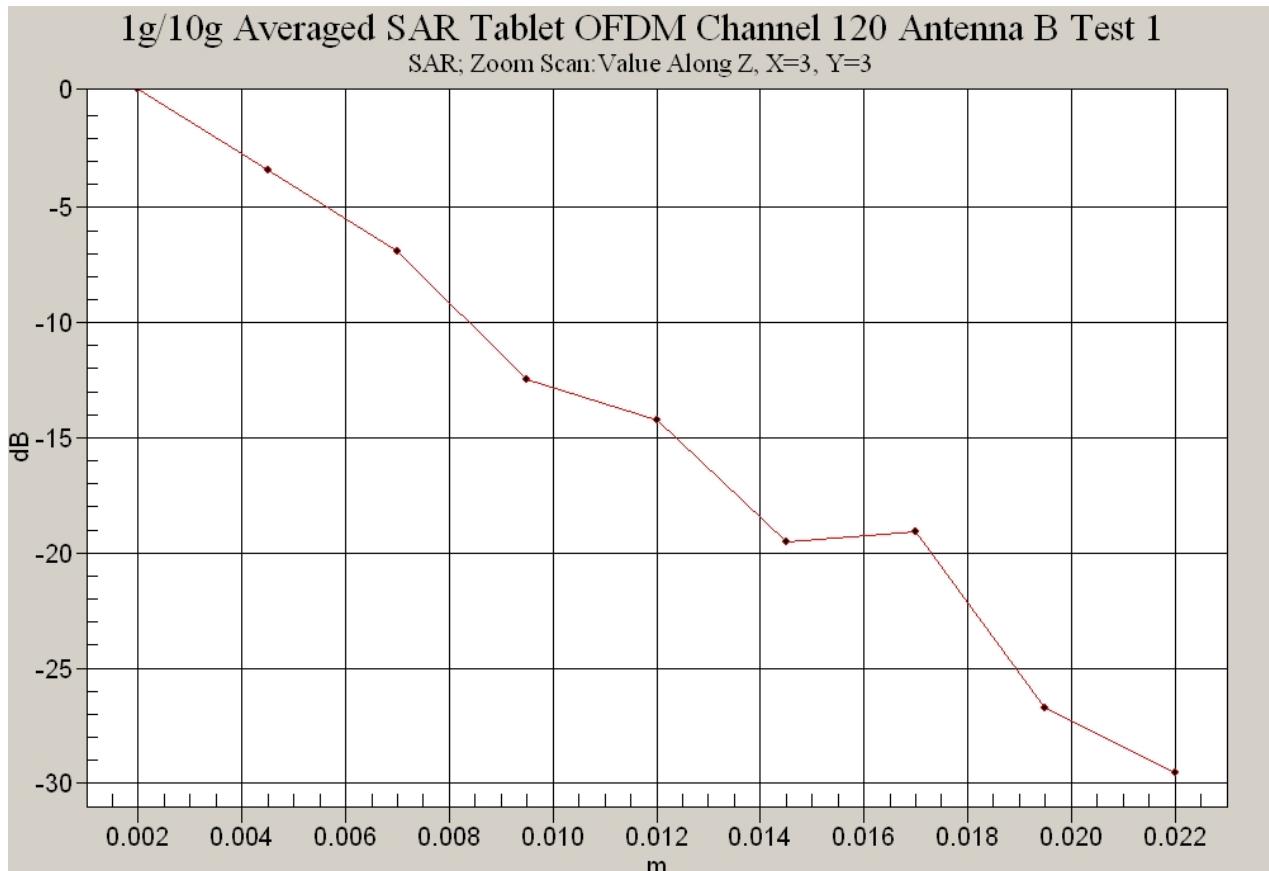

This document must not be copied or reproduced, except in full without the written permission of the Manager, EMC Technologies Pty Ltd. The certificate on page 3 may be reproduced in full.  
[www.emctech.com.au](http://www.emctech.com.au)

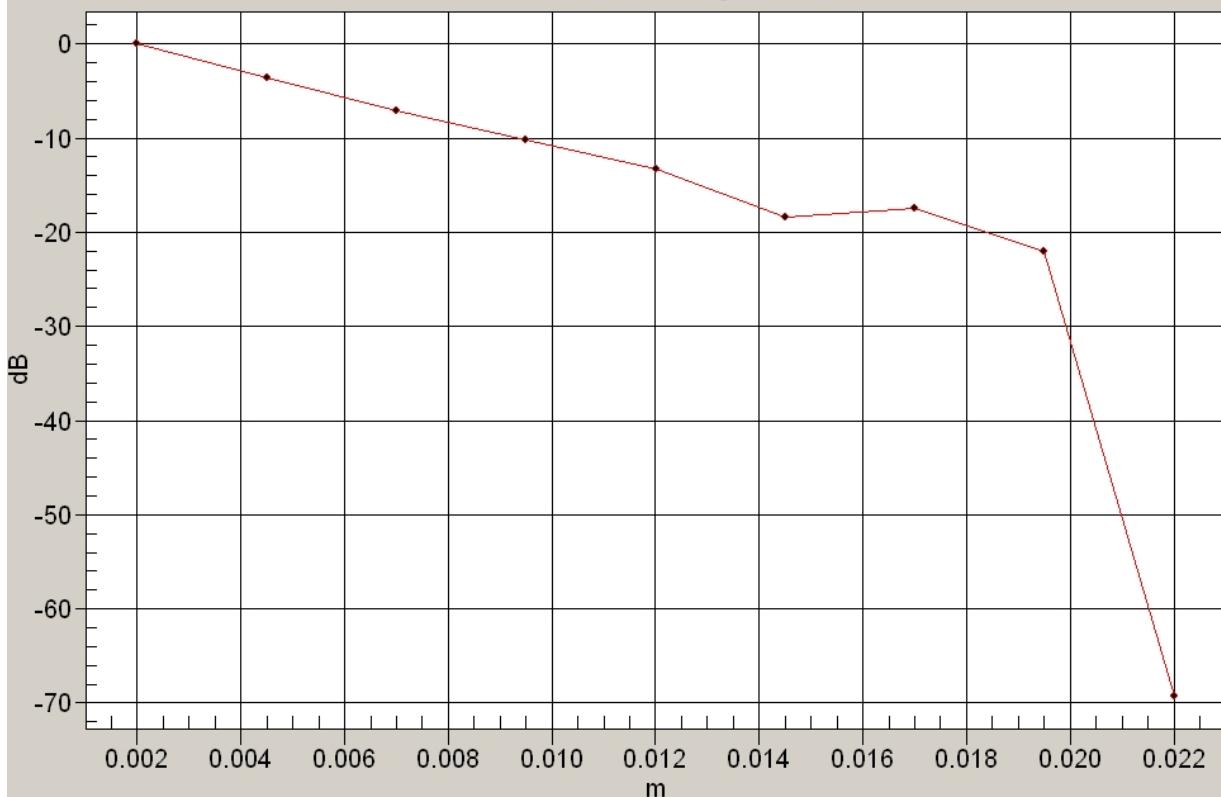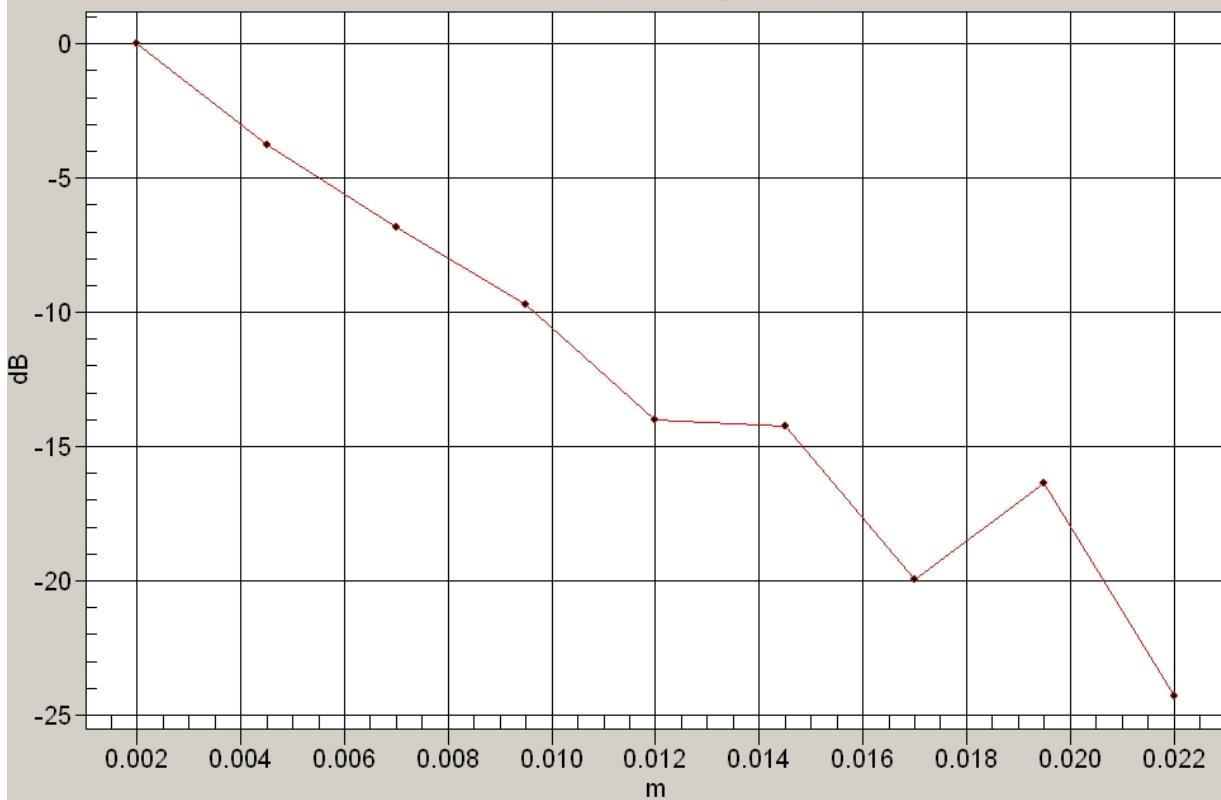**1g/10g Averaged SAR Tablet OFDM Channel 120 Antenna A Test 1**  
SAR; Zoom Scan:Value Along Z, X=3, Y=3**1g/10g Averaged SAR Tablet OFDM Channel 140 Antenna A Test 1**  
SAR; Zoom Scan:Value Along Z, X=3, Y=3

**Test Date: 04 September 2008**

File Name: Tablet OFDM 5.8 GHz Antenna A 04-09-08.da4

**DUT: Fujitsu Tablet Oneya with HB92 2x2 abgn; Type: AR5BHB92; Serial: MAC:**

\* Communication System: OFDM 5770 MHz; Frequency: 5785 MHz; Duty Cycle: 1:1

\* Medium parameters used:  $f = 5786.2$  MHz;  $\sigma = 6.14$  mho/m;  $\epsilon_r = 46.7$ ;  $\rho = 1000$  kg/m<sup>3</sup>

- Electronics: DAE3 Sn442; Probe: EX3DV4 - SN3563; ConvF(3.71, 3.71, 3.71)

- Phantom: Flat Phantom 10.1; Serial: P 10.1; Phantom section: Flat 2.2 Section

**Channel 157 Test/Area Scan (71x101x1):** Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.407 mW/g


**Channel 157 Test/Zoom Scan (7x7x9)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=2.5mm

Reference Value = 4.22 V/m; Power Drift = -0.424 dB

Peak SAR (extrapolated) = 0.604 W/kg

**SAR(1 g) = 0.158 mW/g; SAR(10 g) = 0.052 mW/g**

Maximum value of SAR (measured) = 0.327 mW/g

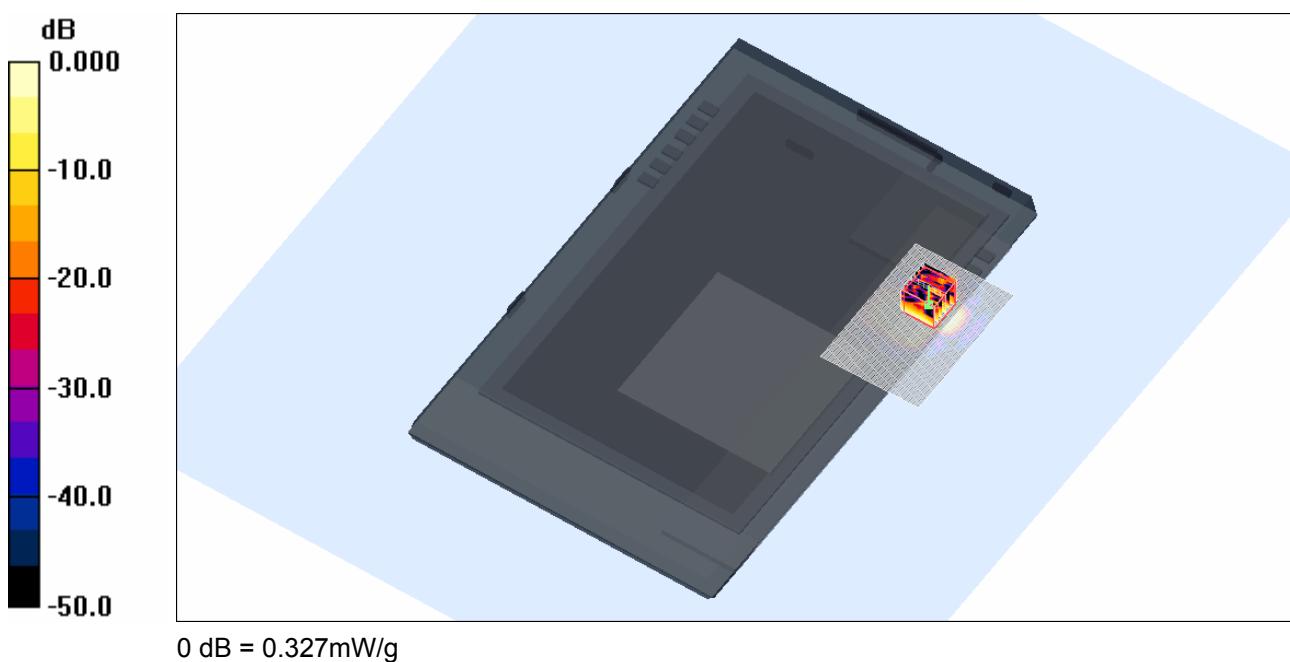

Ambient Temperature  
Liquid Temperature  
Humidity

20.4 Degrees Celsius  
20.1 Degrees Celsius  
36.0 %



This document must not be copied or reproduced, except in full without the written permission of the Manager, EMC Technologies Pty Ltd. The certificate on page 3 may be reproduced in full.  
[www.emctech.com.au](http://www.emctech.com.au)

**Test Date: 04 September 2008**

File Name: Tablet OFDM 5.8 GHz Antenna B 04-08-08.da4

**DUT: Fujitsu Tablet Oneya with HB92 2x2 abgn; Type: AR5BHB92; Serial: MAC:**

\* Communication System: OFDM 5770 MHz; Frequency: 5745 MHz; Duty Cycle: 1:1

\* Medium parameters used:  $f = 5742.4$  MHz;  $\sigma = 6.05$  mho/m;  $\epsilon_r = 46.8$ ;  $\rho = 1000$  kg/m<sup>3</sup>

- Electronics: DAE3 Sn442; Probe: EX3DV4 - SN3563; ConvF(3.71, 3.71, 3.71)

- Phantom: Flat Phantom 10.1; Serial: P 10.1; Phantom section: Flat 2.2 Section

**Channel 149 Test/Area Scan (71x101x1):** Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.720 mW/g


**Channel 149 Test/Zoom Scan (7x7x9)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=2.5mm

Reference Value = 4.28 V/m; Power Drift = 0.242 dB

Peak SAR (extrapolated) = 1.19 W/kg

**SAR(1 g) = 0.318 mW/g; SAR(10 g) = 0.105 mW/g**

Maximum value of SAR (measured) = 0.651 mW/g

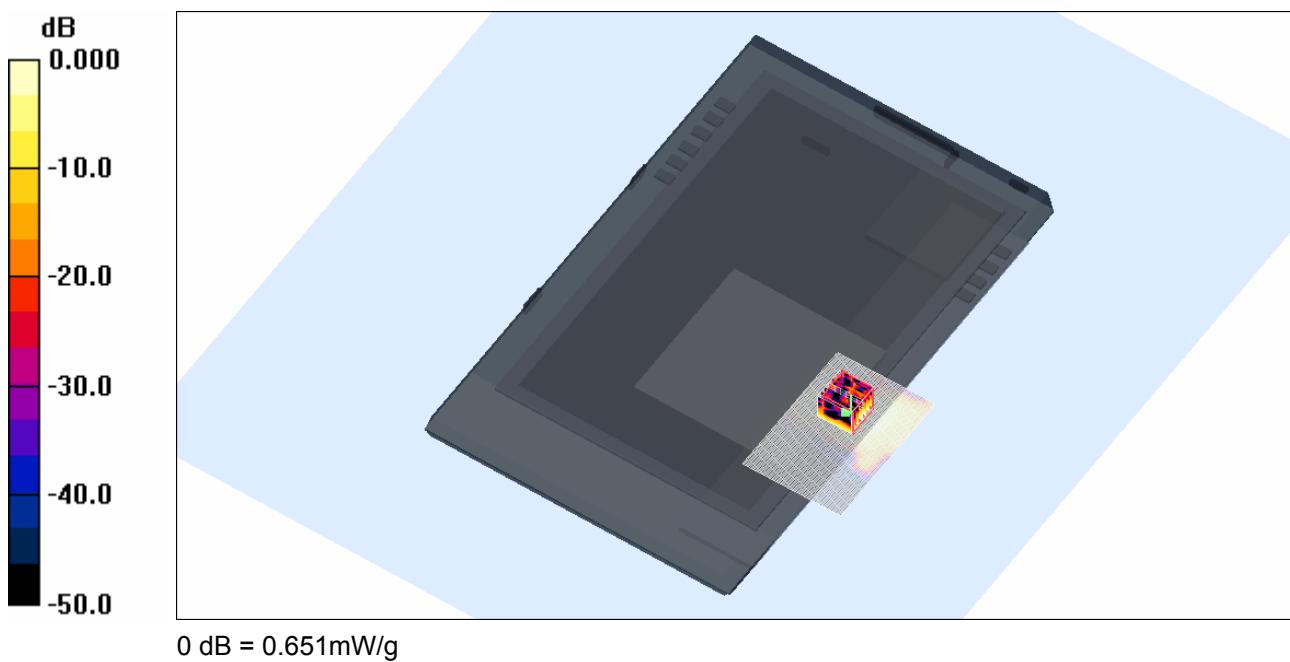

Ambient Temperature  
Liquid Temperature  
Humidity

20.4 Degrees Celsius  
20.1 Degrees Celsius  
36.0 %



Accreditation No. 5292

This document must not be copied or reproduced, except in full without the written permission of the Manager, EMC Technologies Pty Ltd. The certificate on page 3 may be reproduced in full.  
[www.emctech.com.au](http://www.emctech.com.au)

**Test Date: 04 September 2008**

File Name: Tablet OFDM 5.8 GHz Antenna B 04-08-08.da4

**DUT: Fujitsu Tablet Oneya with HB92 2x2 abgn; Type: AR5BHB92; Serial: MAC:**

\* Communication System: OFDM 5770 MHz; Frequency: 5785 MHz; Duty Cycle: 1:1

\* Medium parameters used:  $f = 5786.2$  MHz;  $\sigma = 6.14$  mho/m;  $\epsilon_r = 46.7$ ;  $\rho = 1000$  kg/m<sup>3</sup>

- Electronics: DAE3 Sn442; Probe: EX3DV4 - SN3563; ConvF(3.71, 3.71, 3.71)

- Phantom: Flat Phantom 10.1; Serial: P 10.1; Phantom section: Flat 2.2 Section

**Channel 157 Test/Area Scan (71x101x1):** Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.767 mW/g


**Channel 157 Test/Zoom Scan (7x7x9)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=2.5mm

Reference Value = 8.56 V/m; Power Drift = -0.421 dB

Peak SAR (extrapolated) = 1.82 W/kg

**SAR(1 g) = 0.358 mW/g; SAR(10 g) = 0.109 mW/g**

Maximum value of SAR (measured) = 0.727 mW/g

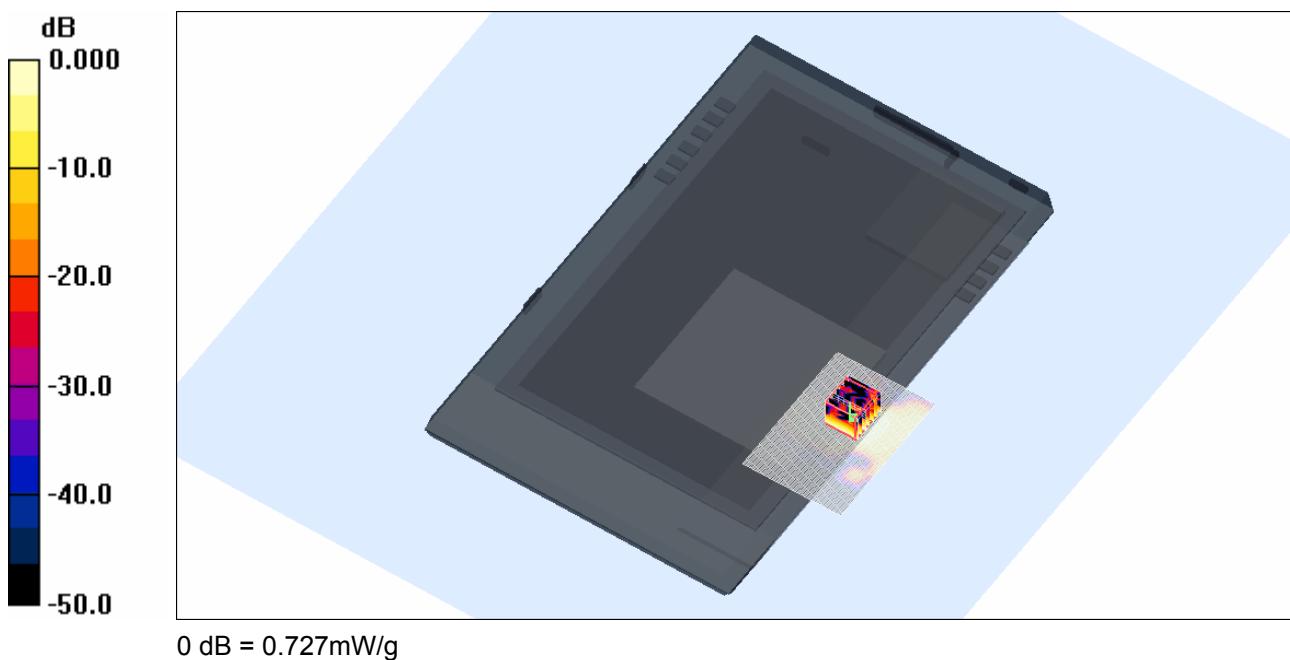

Ambient Temperature  
Liquid Temperature  
Humidity

20.4 Degrees Celsius  
20.1 Degrees Celsius  
36.0 %



Accreditation No. 5292

This document must not be copied or reproduced, except in full without the written permission of the Manager, EMC Technologies Pty Ltd. The certificate on page 3 may be reproduced in full.  
[www.emctech.com.au](http://www.emctech.com.au)

**Test Date: 04 September 2008**

File Name: Tablet OFDM 5.8 GHz Antenna B 04-08-08.da4

**DUT: Fujitsu Tablet Oneya with HB92 2x2 abgn; Type: AR5BHB92; Serial: MAC:**

\* Communication System: OFDM 5770 MHz; Frequency: 5825 MHz; Duty Cycle: 1:1

\* Medium parameters used:  $f = 5830$  MHz;  $\sigma = 6.19$  mho/m;  $\epsilon_r = 46.6$ ;  $\rho = 1000$  kg/m<sup>3</sup>

- Electronics: DAE3 Sn442; Probe: EX3DV4 - SN3563; ConvF(3.71, 3.71, 3.71)

- Phantom: Flat Phantom 10.1; Serial: P 10.1; Phantom section: Flat 2.2 Section

**Channel 165 Test/Area Scan (71x101x1):** Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.839 mW/g


**Channel 165 Test/Zoom Scan (7x7x9)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=2.5mm

Reference Value = 5.56 V/m; Power Drift = -0.035 dB

Peak SAR (extrapolated) = 1.70 W/kg

**SAR(1 g) = 0.420 mW/g; SAR(10 g) = 0.147 mW/g**

Maximum value of SAR (measured) = 0.824 mW/g

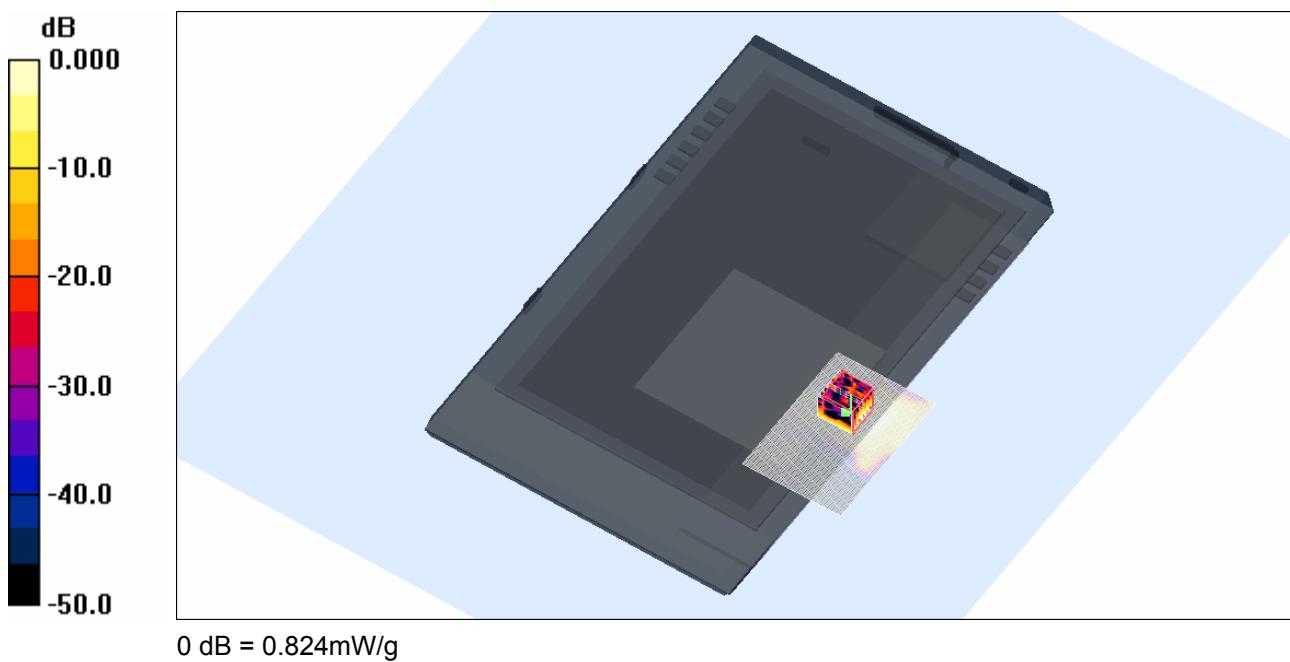



Ambient Temperature  
Liquid Temperature  
Humidity

20.4 Degrees Celsius  
20.1 Degrees Celsius  
36.0 %





Accreditation No. 5292

This document must not be copied or reproduced, except in full without the written permission of the Manager, EMC Technologies Pty Ltd. The certificate on page 3 may be reproduced in full.  
[www.emctech.com.au](http://www.emctech.com.au)

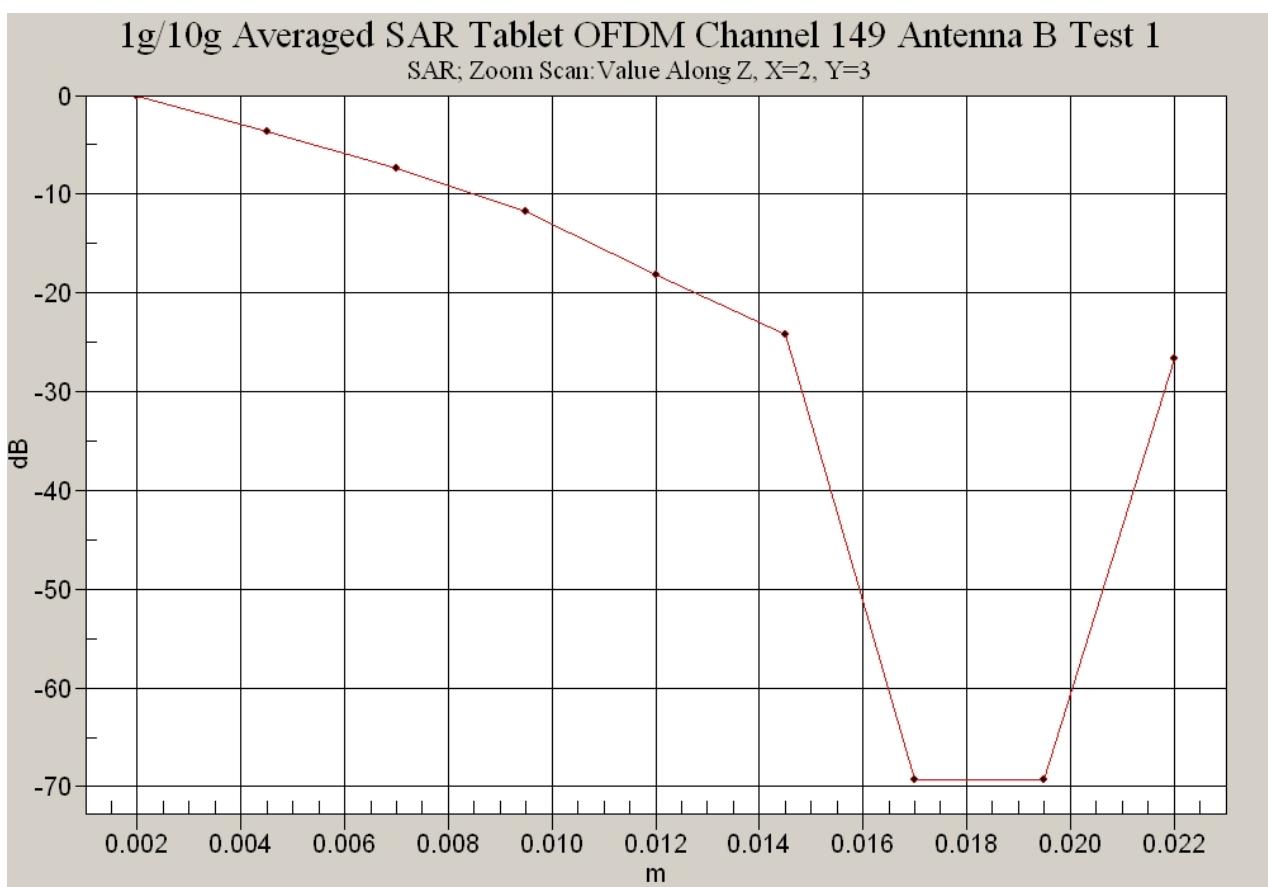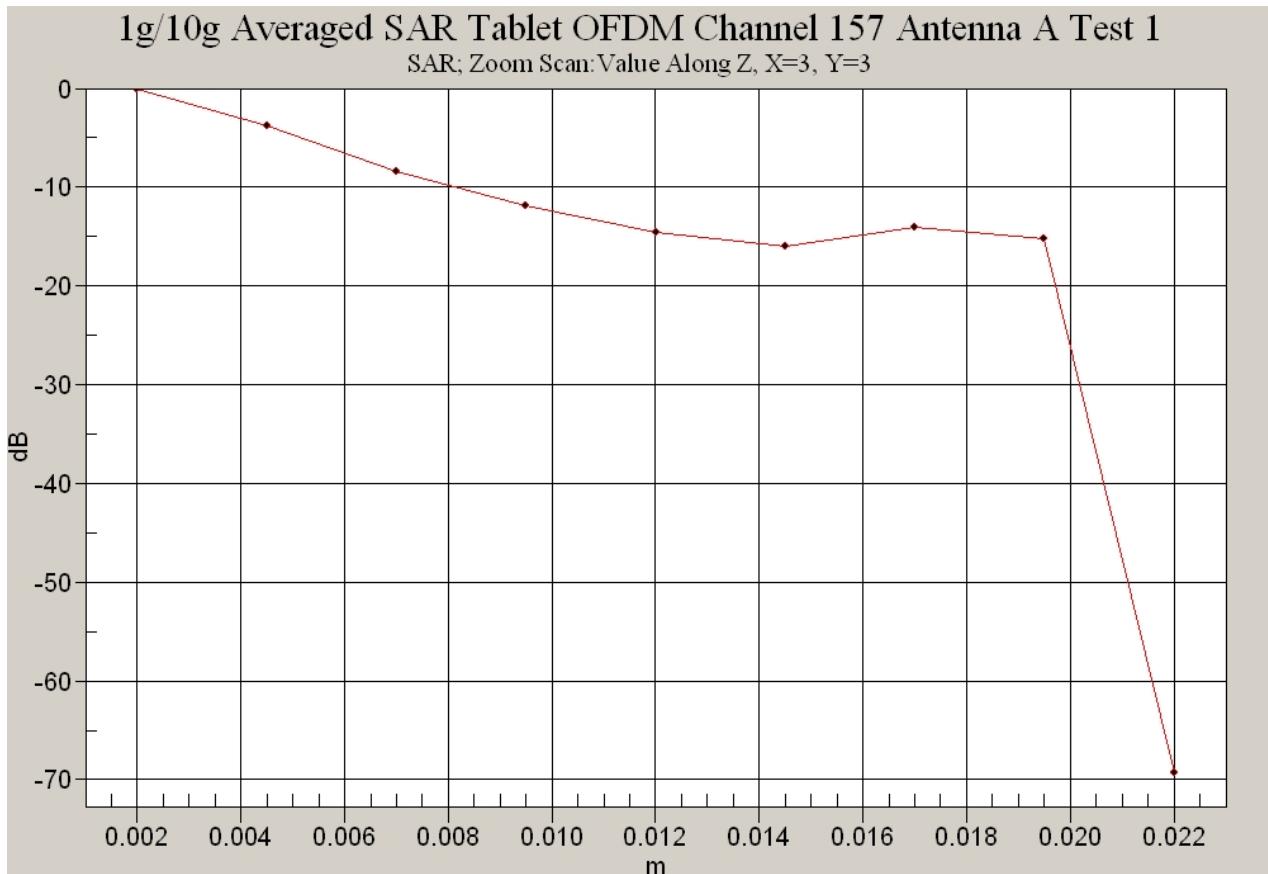

Accreditation No. 5292

This document must not be copied or reproduced, except in full without the written permission of the Manager, EMC Technologies Pty Ltd. The certificate on page 3 may be reproduced in full.  
[www.emctech.com.au](http://www.emctech.com.au)

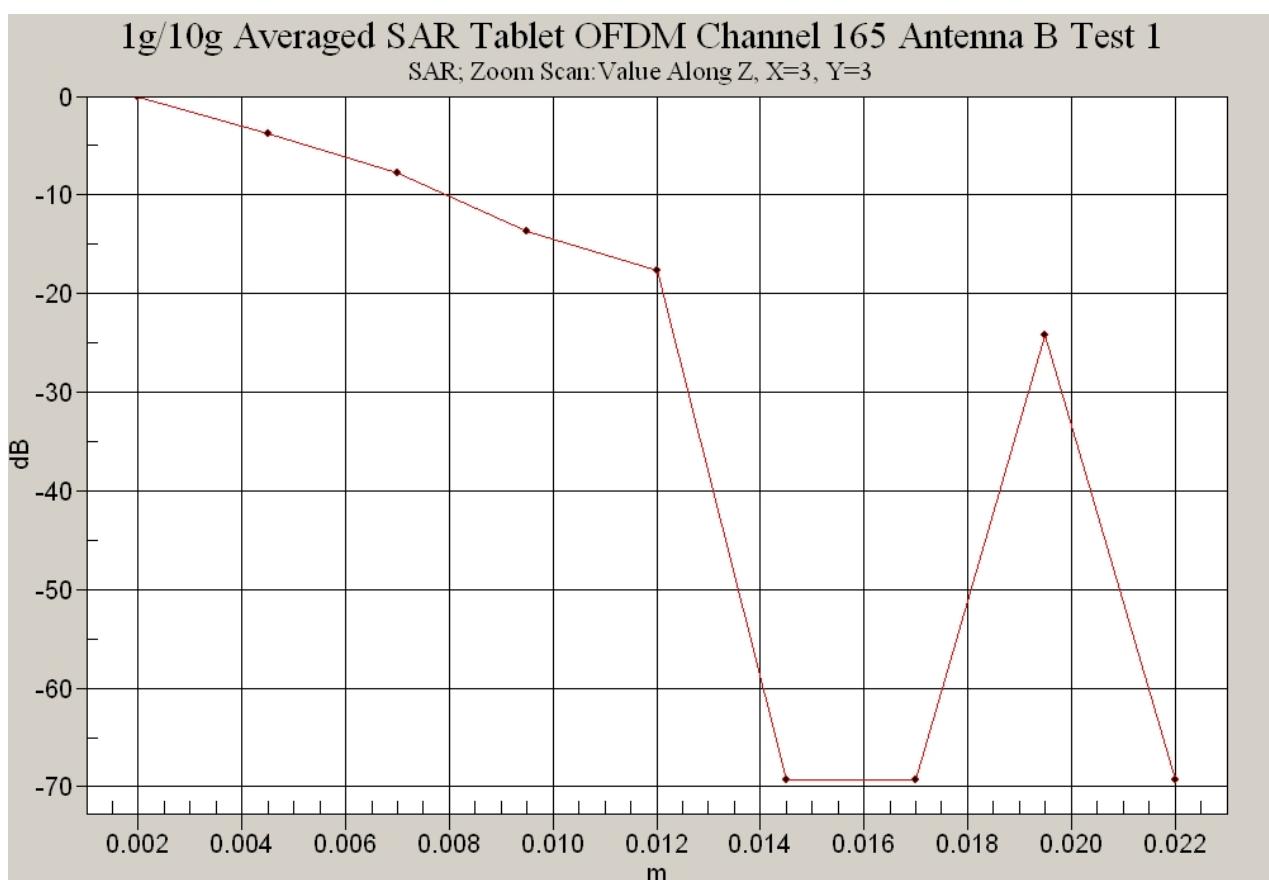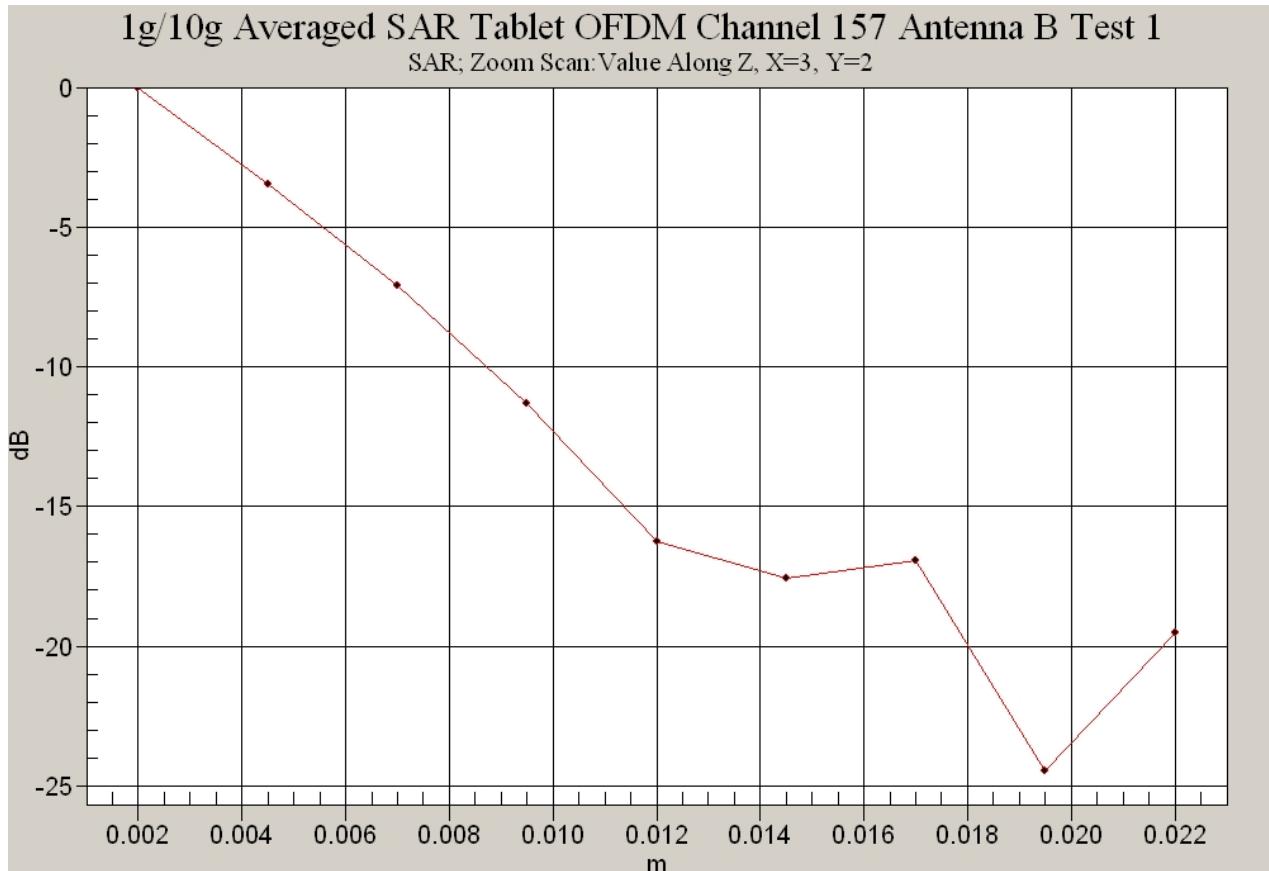

Accreditation No. 5292

This document must not be copied or reproduced, except in full without the written permission of the Manager, EMC Technologies Pty Ltd. The certificate on page 3 may be reproduced in full.  
[www.emctech.com.au](http://www.emctech.com.au)

**Test Date: 06 September 2008**


**File Name: Validation 5200MHz (DAE 442 Probe EX3DV4) 06-09-08.da4**

**DUT: Dipole 5200\_5800 MHz; Type: D5GHzV2; Serial: 1008**

\* Communication System: CW 5200 MHz; Frequency: 5200 MHz; Duty Cycle: 1:1  
 \* Medium parameters used:  $f = 5202.2$  MHz;  $\sigma = 4.84$  mho/m;  $\epsilon_r = 35.4$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
 - Electronics: DAE3 Sn442; Probe: EX3DV4 - SN3563; ConvF(4.3, 4.3, 4.3)  
 - Phantom: SAM 22; Serial: 1260; Phantom section: Flat Section

**Channel 1 Test/Area Scan (91x91x1):** Measurement grid: dx=10mm, dy=10mm  
 Maximum value of SAR (interpolated) = 48.8 mW/g

**Channel 1 Test/Zoom Scan (7x7x9)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=2.5mm  
 Reference Value = 105.9 V/m; Power Drift = 0.043 dB  
 Peak SAR (extrapolated) = 90.0 W/kg  
**SAR(1 g) = 22.9 mW/g; SAR(10 g) = 6.5 mW/g**  
 Maximum value of SAR (measured) = 47.6 mW/g

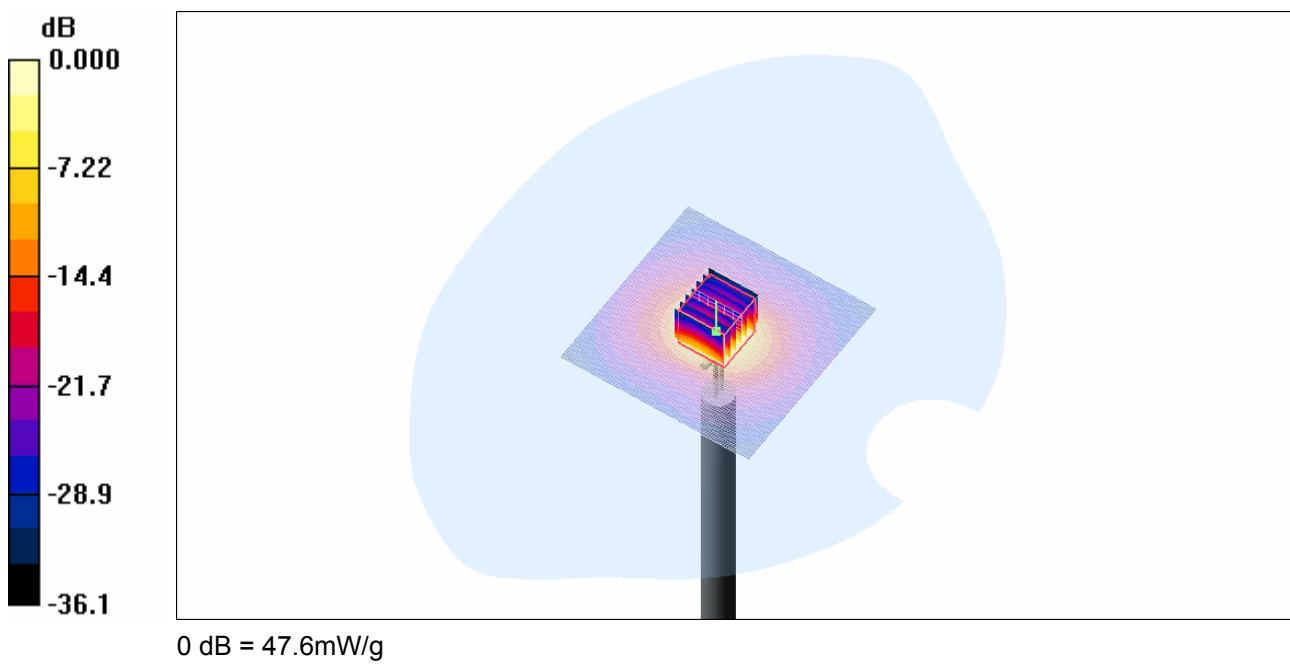

**Ambient Temperature**  
**Liquid Temperature**  
**Humidity**

**20.3 Degrees Celsius**  
**20.1 Degrees Celsius**  
**39.0 %**



Accreditation No. 5292

This document must not be copied or reproduced, except in full without the written permission of the Manager, EMC Technologies Pty Ltd. The certificate on page 3 may be reproduced in full.  
[www.emctech.com.au](http://www.emctech.com.au)

**Test Date: 04 September 2008**

**File Name: Validation 5500MHz (DAE 442 Probe EX3DV4) 04-09-08.da4**

**DUT: Dipole 5200\_5800 MHz; Type: D5GHzV2; Serial: 1008**

\* Communication System: CW 5500 MHz; Frequency: 5500 MHz; Duty Cycle: 1:1

\* Medium parameters used:  $f = 5494.2$  MHz;  $\sigma = 5.09$  mho/m;  $\epsilon_r = 34.7$ ;  $\rho = 1000$  kg/m<sup>3</sup>

- Electronics: DAE3 Sn442; Probe: EX3DV4 - SN3563; ConvF(4, 4, 4)

- Phantom: SAM 22; Serial: 1260; Phantom section: Flat Section

**Channel 1 Test/Area Scan (91x91x1):** Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 46.0 mW/g


**Channel 1 Test/Zoom Scan (7x7x9)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=2.5mm

Reference Value = 102.7 V/m; Power Drift = -0.126 dB

Peak SAR (extrapolated) = 91.7 W/kg

**SAR(1 g) = 21.8 mW/g; SAR(10 g) = 6.2 mW/g**

Maximum value of SAR (measured) = 46.2 mW/g

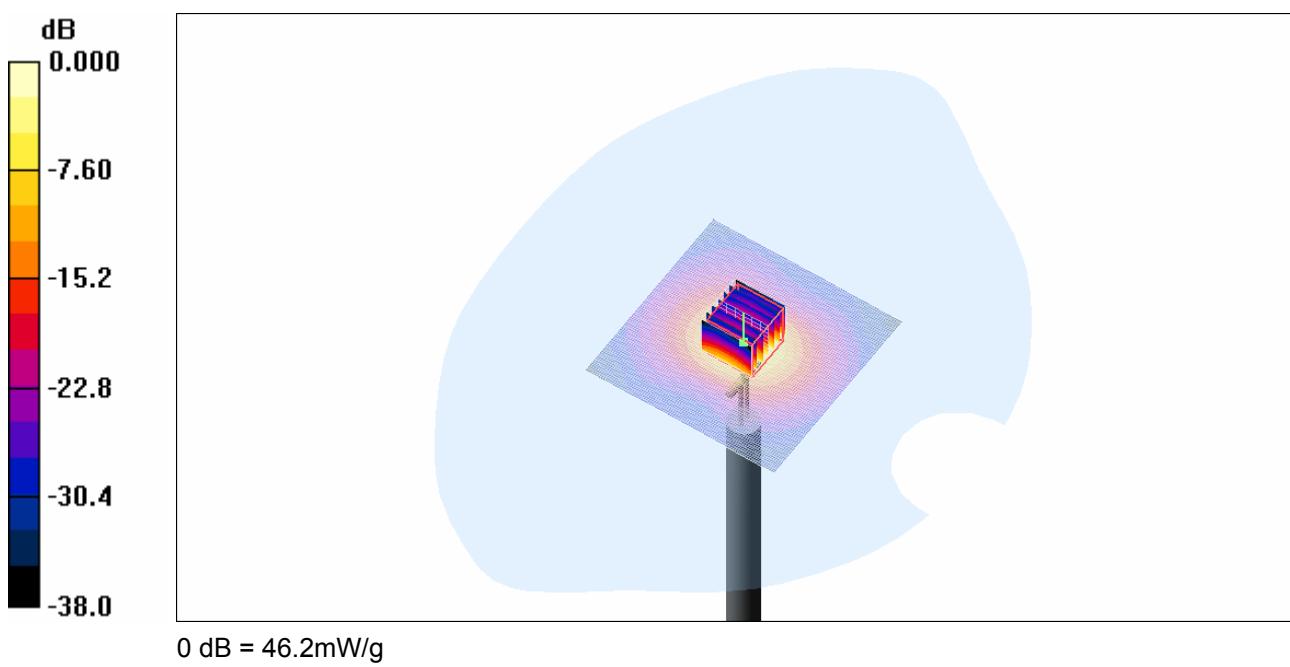

Ambient Temperature  
Liquid Temperature  
Humidity

20.4 Degrees Celsius  
20.1 Degrees Celsius  
36.0 %



Accreditation No. 5292

This document must not be copied or reproduced, except in full without the written permission of the Manager, EMC Technologies Pty Ltd. The certificate on page 3 may be reproduced in full.  
[www.emctech.com.au](http://www.emctech.com.au)

**Test Date: 04 September 2008**

**File Name: Validation 5800MHz (DAE 442 Probe EX3DV4) 04-09-08.da4**

**DUT: Dipole 5200\_5800 MHz; Type: D5GHzV2; Serial: 1008**

\* Communication System: CW 5800 MHz; Frequency: 5800 MHz; Duty Cycle: 1:1

\* Medium parameters used:  $f = 5800.8$  MHz;  $\sigma = 5.51$  mho/m;  $\epsilon_r = 33.9$ ;  $\rho = 1000$  kg/m<sup>3</sup>

- Electronics: DAE3 Sn442; Probe: EX3DV4 - SN3563; ConvF(3.87, 3.87, 3.87)

- Phantom: SAM 22; Serial: 1260; Phantom section: Flat Section

**Channel 1 Test/Area Scan (91x91x1):** Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 49.5 mW/g


**Channel 1 Test/Zoom Scan (7x7x9)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=2.5mm

Reference Value = 100.7 V/m; Power Drift = -0.030 dB

Peak SAR (extrapolated) = 104.9 W/kg

**SAR(1 g) = 23.4 mW/g; SAR(10 g) = 6.58 mW/g**

Maximum value of SAR (measured) = 50.5 mW/g

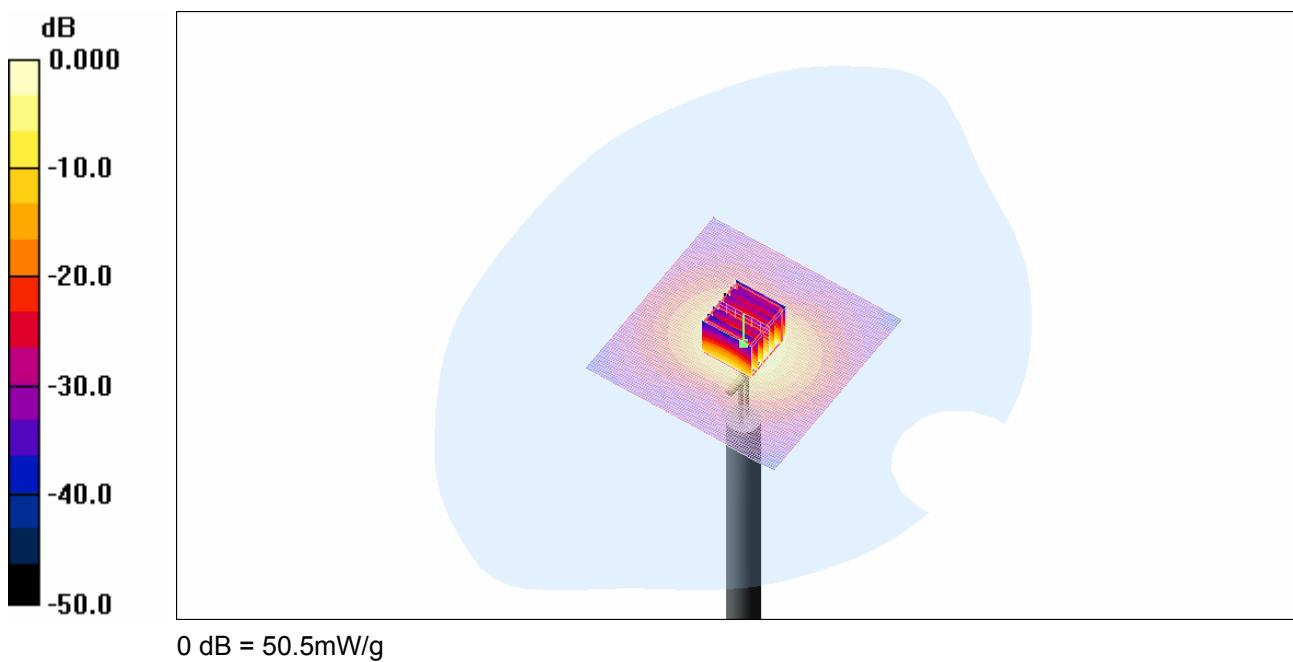



Ambient Temperature  
Liquid Temperature  
Humidity

20.4 Degrees Celsius  
20.1 Degrees Celsius  
36.0 %




Accreditation No. 5292

This document must not be copied or reproduced, except in full without the written permission of the Manager, EMC Technologies Pty Ltd. The certificate on page 3 may be reproduced in full.  
[www.emctech.com.au](http://www.emctech.com.au)

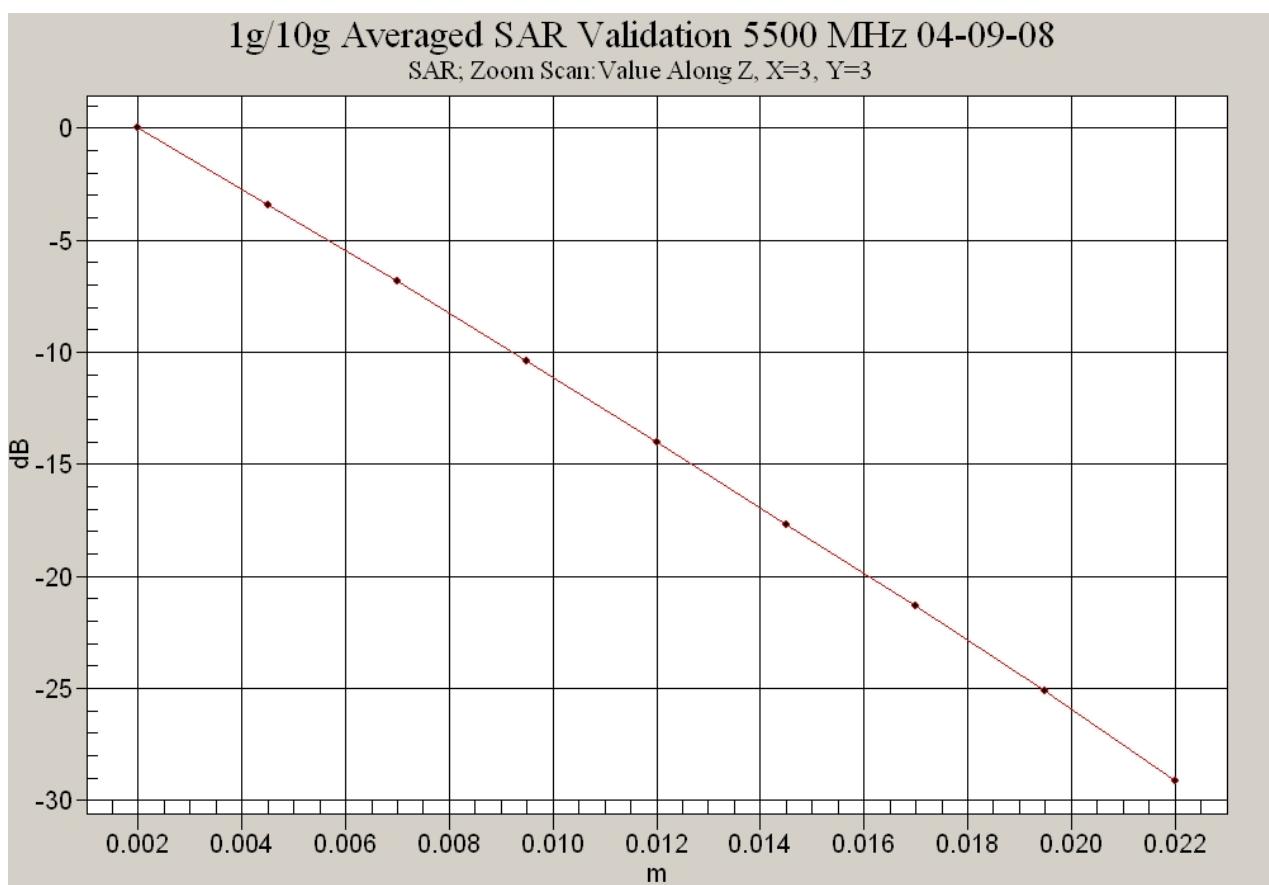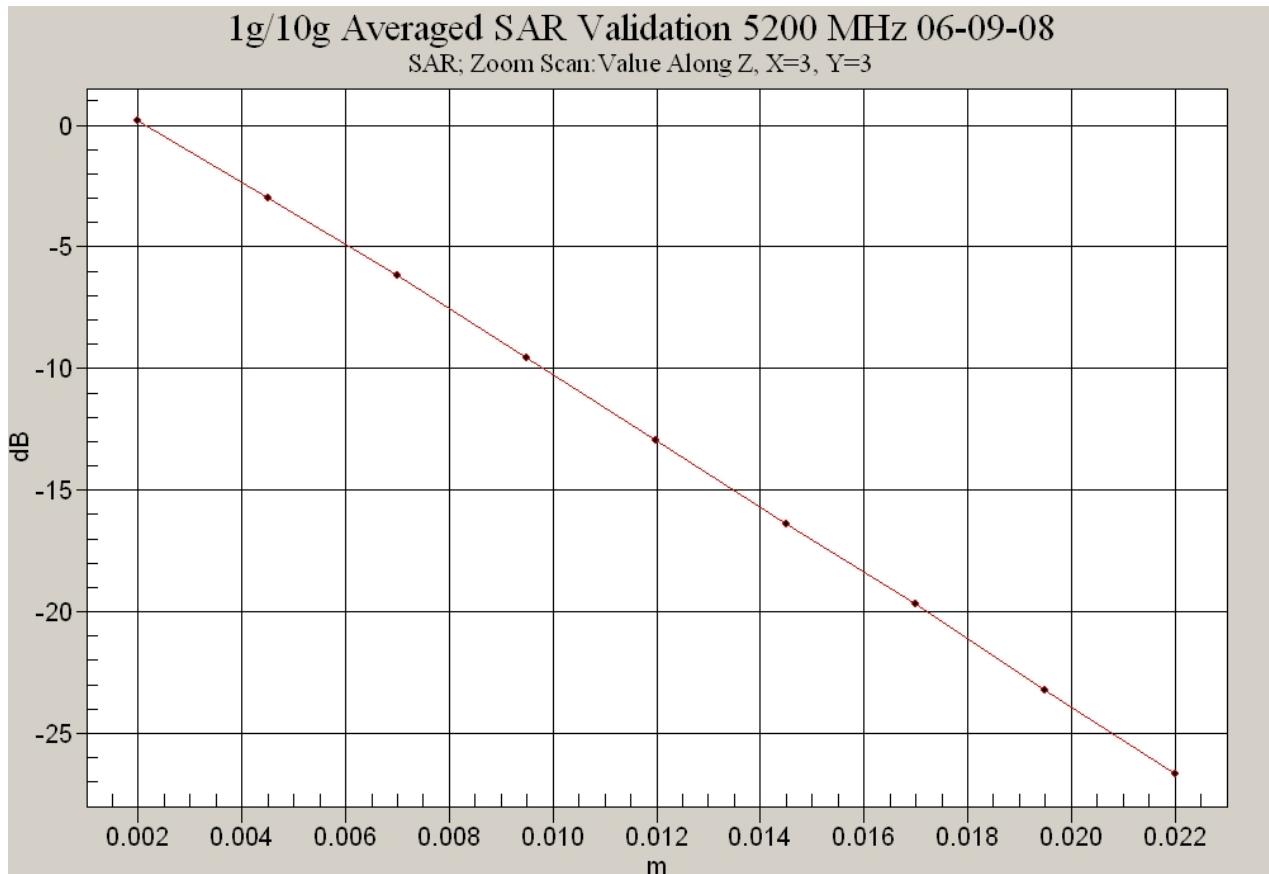

This document must not be copied or reproduced, except in full without the written permission of the Manager, EMC Technologies Pty Ltd. The certificate on page 3 may be reproduced in full.  
[www.emctech.com.au](http://www.emctech.com.au)

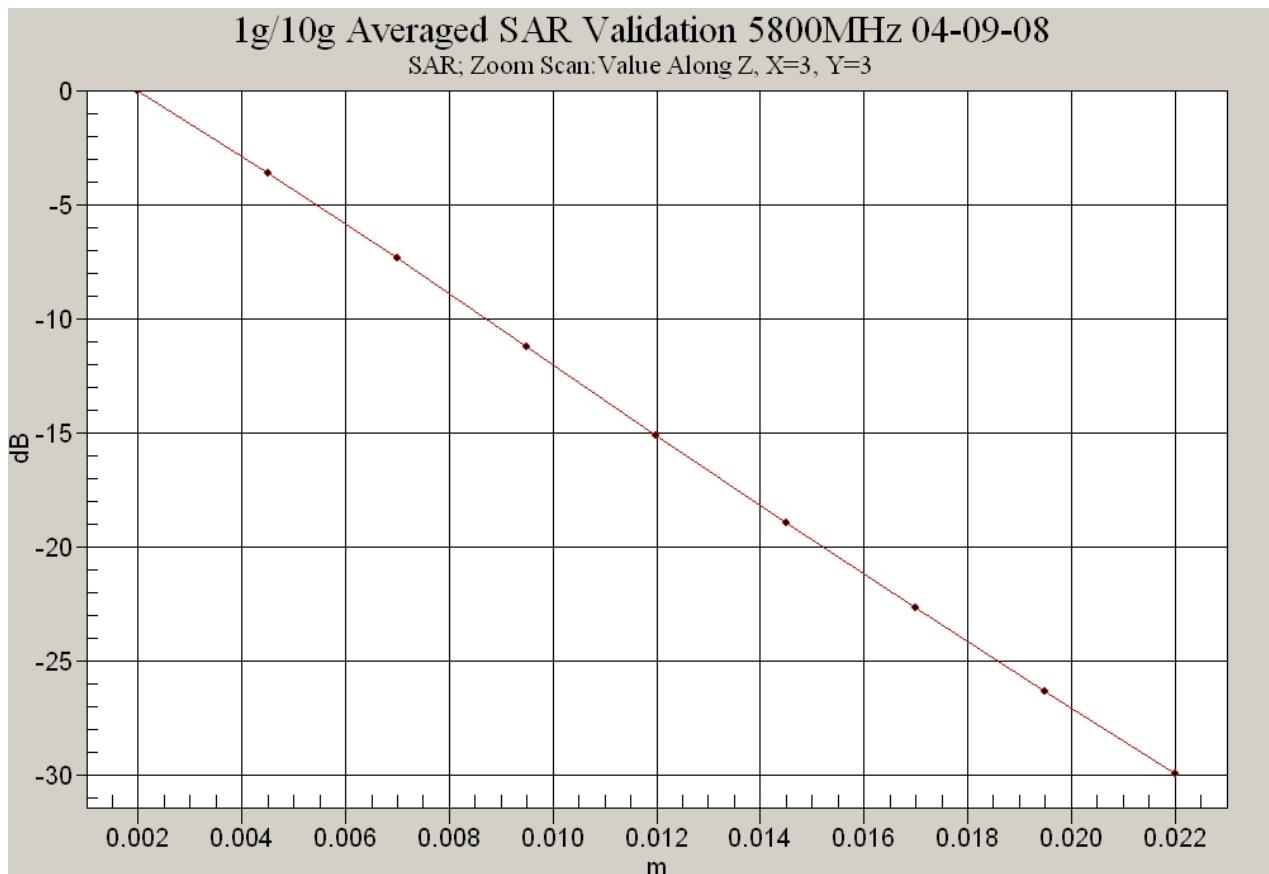

This document must not be copied or reproduced, except in full without the written permission of the Manager, EMC Technologies Pty Ltd. The certificate on page 3 may be reproduced in full.  
[www.emctech.com.au](http://www.emctech.com.au)