



Global Product Certification
EMC-EMF-Safety Approvals

EMC Technologies Pty Ltd
ABN 82 057 105 549
176 Harrick Road
Keilor Park
Victoria Australia 3042

Ph: + 613 9365 1000
Fax: + 613 9331 7455
email: melb@emctech.com.au

SAR Test Report

Report Number: M080823_CERT_AR5BHB92_SAR_5.6

Test Sample: Portable TABLET Computer
Host PC Model Number: ST6010
Radio Modules: WLAN AR5BHB92 & Bluetooth
EYSMJCS

PC System FCC ID: EJE-WB0072
PC System IC: 337J-WB0072
Date of Issue: 18th September 2008

EMC Technologies Pty Ltd reports apply only to the specific samples tested under stated test conditions. It is the manufacturer's responsibility to assure that additional production units of this model are manufactured with identical electrical and mechanical components. EMC Technologies Pty Ltd shall have no liability for any deductions, inferences or generalisations drawn by the client or others from EMC Technologies Pty Ltd issued reports. This report shall not be used to claim, constitute or imply product endorsement by EMC Technologies Pty Ltd.



Accreditation No. 5292

This document must not be copied or reproduced, except in full without the written permission of the Manager, EMC Technologies Pty Ltd. The certificate on page 3 may be reproduced in full.
www.emctech.com.au

CONTENTS

1.0 GENERAL INFORMATION	3
2.0 INTRODUCTION.....	4
3.0 SAMPLE TECHNICAL INFORMATION.....	4
3.1 EUT (WLAN) Details.....	4
3.2 EUT (Bluetooth) Details	6
3.3 EUT (Notebook PC) Details.....	7
3.4 Test sample Accessories.....	7
3.4.1 <i>Battery Types</i>	7
4.0 TEST SIGNAL, FREQUENCY AND OUTPUT POWER	8
4.1 Battery Status	8
5.0 DETAILS OF TEST LABORATORY	9
5.1 Location	9
5.2 Accreditations	9
5.3 Environmental Factors.....	10
6.0 DESCRIPTION OF SAR MEASUREMENT SYSTEM.....	10
6.1 Probe Positioning System.....	10
6.2 E-Field Probe Type and Performance	10
6.3 Data Acquisition Electronics	10
6.4 Validation	11
6.4.1 <i>Validation Results @ 5GHz</i>	11
6.4.2 <i>Deviation from reference validation values</i>	11
6.4.3 <i>Liquid Depth 15cm</i>	12
6.5 Phantom Properties (Size, Shape, Shell Thickness).....	13
6.6 Tissue Material Properties	14
6.6.1 <i>Liquid Temperature and Humidity</i>	15
6.7 Simulated Tissue Composition Used for SAR Test.....	15
6.8 Device Holder for Laptops and P 10.1 Phantom	15
7.0 SAR MEASUREMENT PROCEDURE USING DASY4.....	16
8.0 MEASUREMENT UNCERTAINTY	17
9.0 EQUIPMENT LIST AND CALIBRATION DETAILS	19
10.0 OET BULLETIN 65 – SUPPLEMENT C TEST METHOD.....	20
10.0 Position	20
10.1.1 <i>“Tablet” Position Definition (0mm spacing)</i>	20
10.2 List of All Test Cases (Antenna In/Out, Test Frequencies, User Modes).....	20
10.3 FCC RF Exposure Limits for Occupational/ Controlled Exposure.....	20
10.4 FCC RF Exposure Limits for Un-controlled/Non-occupational	20
11.0 SAR MEASUREMENT RESULTS	21
11.1 5 GHz Band SAR Results.....	21
12.0 COMPLIANCE STATEMENT	23
APPENDIX A1 TEST SETUP PHOTOGRAPHS	24
APPENDIX B PLOTS OF THE SAR MEASUREMENTS.....	25
APPENDIX C CALIBRATION DOCUMENTS	49



Accreditation No. 5292

This document must not be copied or reproduced, except in full without the written permission of the Manager, EMC Technologies Pty Ltd. The certificate on page 3 may be reproduced in full.
www.emctech.com.au

SAR TEST REPORT

Report Number: M080823_CERT_AR5BHB92_SAR_5.6

PC System FCC ID: EJE-WB0072

PC System IC: 337J-WB0072

1.0 GENERAL INFORMATION

Test Sample:	Portable TABLET Computer
Model Name:	ST6010
Radio Modules:	WLAN AR5BHB92 & Bluetooth EYSMJCS
Interface Type:	Mini-PCI Module
Device Category:	Portable Transmitter
Test Device:	Pre-Production Unit
FCC System ID:	<u>EJE-WB0072</u>
PC System IC:	<u>337J-WB0072</u>
RF exposure Category:	General Population/Uncontrolled
 Manufacturer:	Fujitsu Limited
 Test Standard/s:	<ol style="list-style-type: none">1. Evaluating Compliance with FCC Guidelines For Human Exposure to Radiofrequency Electromagnetic Fields Supplement C (Edition 01-01) to OET Bulletin 65 (Edition 97-01)2. Radio Frequency Exposure Compliance of Radiocommunication Apparatus (All Frequency Bands) RSS-102 Issue 2 November 2005
 Statement Of Compliance:	The Fujitsu TABLET Computer ST6010 with Wireless LAN model AR5BHB92 and Bluetooth module EYSMJCS complied* with the FCC General public/uncontrolled RF exposure limits of 1.6mW/g per requirements of 47CFR2.1093(d). It also complied with IC RSS-102 requirements.
 Test Dates:	4 th and 6 th September 2008

Test Officer:



Jason Cameron

Authorised Signature:



Peter Jakubiec
EMC Technologies Pty Ltd



Accreditation No. 5292

This document must not be copied or reproduced, except in full without the written permission of the Manager, EMC Technologies Pty Ltd. The certificate on page 3 may be reproduced in full.
www.emctech.com.au

SAR TEST REPORT
Portable TABLET Computer
Model: ST6010
Report Number: M080823 _ CERT_AR5BHB92 _ SAR_5.6

2.0 INTRODUCTION

Testing was performed on the Fujitsu TABLET PC, Model: ST6010 with AETHEROS Mini-PCI Wireless LAN Module (HB92 802.11a/b/g/n), Model: AR5BHB92 & TAIYO YUDEN Bluetooth Module, Model: EYSMJCS. The HB92 module is an OEM product. The Mini-PCI Wireless LAN (WLAN) was tested in the dedicated host – ST SERIES, Model ST6010.

The measurement test results mentioned hereon only apply to the 5GHz frequency band; an additional report titled “M080823_CERT_AR5BHB92_SAR_2.4” applies to the 2450MHz frequency range.

3.0 SAMPLE TECHNICAL INFORMATION

(Information supplied by the client)

3.1 EUT (WLAN) Details

Transmitter:	Half Mini-Card Wireless LAN Module
Wireless Module:	HB92 (11a/b/g/n)
Model Number:	AR5BHB92
Manufacturer:	Atheros Communication Inc,
Modulation Type:	DSSS for 802.11b OFDM for 802.11g OFDM for 802.11a OFDM for 802.11n
5GHz (802.11a/n)	BPSK, QPSK, 16QAM, 64QAM
2.4GHz (802.11b/g/n)	CCK, DQPSK, DBPSK, 16QAM, 64QAM
Maximum Data Rate:	802.11b = 11 Mbps, 802.11g and 802.11a = 54 Mbps 802.11n = 300 Mbps
Frequency Range:	2.412–2.462 GHz for 11b/g/n 5.18-5.32 GHz, 5.5-5.6 GHz and 5.745-5.825 GHz for 11a/n
Number of Channels:	11 channels for 11b/g/n with 20MHz Bandwidth 24 channels for 11a/n with 20MHz Bandwidth 18 channels for 11n with 40MHz Bandwidth
Antenna Types:	Nissei Electric Inverted F Antenna Model: refer to WLAN antenna data Location: Top edge of LCD screen
Antenna gain:	Please refer antenna data provided separately
Power Supply:	3.3 VDC from PCI Express bus



Accreditation No. 5292

This document must not be copied or reproduced, except in full without the written permission of the Manager, EMC Technologies Pty Ltd. The certificate on page 3 may be reproduced in full.
www.emctech.com.au

Channels and Output power setting:

Mode	Channel	Frequency (MHz)	Data Rate (Mbps)	Tx BW (MHz)	Average Power (dBm)
802.11a 5.2GHz	36	5180	6	-	8.5
	40	5200			
	48	5240			
	52	5260			13.0
	60	5300			
	64	5320			
802.11n 5.2GHz	36	5180	MCS0	20	10.0
	40	5200			
	48	5240			
	52	5260			13.5
	60	5300			
	64	5320			
802.11n 5.2GHz	38	5190	MCS0	40 Wide	12.5
	54	5270			
	62	5310			14.0
802.11a 5.6GHz	100	5500	6	-	14.0
	120	5600			
	140	5700			
802.11n 5.6GHz	100	5500	MCS0	20	14.0
	120	5600			
	140	5700			
802.11n 5.6GHz	102	5510	MCS0	40 Wide	14.0
	118	5590			
	134	5670			
	159	5795			

NOTE: For 2450 MHz SAR results refer to report titled "M080823_CERT_AR5BHB92_SAR_2.4".



Accreditation No. 5292

This document must not be copied or reproduced, except in full without the written permission of the Manager, EMC Technologies Pty Ltd. The certificate on page 3 may be reproduced in full.
www.emctech.com.au

3.2 EUT (Bluetooth) Details

Transmitter:	Bluetooth
Model Number:	EYSMJCS
Manufacturer:	TAIYO YUDEN
Network Standard:	Bluetooth™ RF Test Specification
Modulation Type:	Frequency Hopping Spread Spectrum (FHSS)
Frequency Range:	2402 MHz to 2480 MHz
Number of Channels:	79
Carrier Spacing:	1.0 MHz
Antenna Types:	Included in BT module Location: left bottom side of LCD in Primary Landscape configuration
Max. Output Power:	4 dBm
Reference Oscillator:	16 MHz (Built-in)
Power Supply:	3.3 VDC from host.

Frequency allocation:

Channel Number	Frequency (MHz)	Bluetooth Utility power setting
1	2402	Power (Ext, Int) = 0, 96
2	2403	
-	-	
39	2440	
40	2441	
41	2442	
-	-	
78	2479	
79	2480	



Accreditation No. 5292

This document must not be copied or reproduced, except in full without the written permission of the Manager, EMC Technologies Pty Ltd. The certificate on page 3 may be reproduced in full.
www.emctech.com.au

3.3 EUT (Notebook PC) Details

Host notebook :	ST series
Model Name:	ST6010
Serial Number:	Pre-production Sample
Manufacturer:	FUJITSU LIMITED
CPU Type and Speed:	Core2 Duo SU9400 1.4GHz
LCD	12.1"WXGA
Wired LAN:	Atheros 82567LF : 10 Base-T/100 Base-TX/1000Base-T
Modem:	None
Port Replicator Model:	FPCPRxx
AC Adapter Model:	60W: SED80N2-16.0(Sanken)
Voltage:	16 V
Current Specs:	3.75A
Watts:	60W

3.4 Test sample Accessories

3.4.1 Battery Types

One type of Fujitsu Lithium Ion Battery is used to power the Portable TABLET Computer with Wireless LAN Model: AR5BHB92. SAR measurements were performed with the battery as shown below.

Standard Battery

Battery #1		Battery #2	
Model	FPCBP 207	Model	FPCBP 207
V/mAh	10.8V/5800mAh	V/mAh	10.8V/5800mAh



Accreditation No. 5292

This document must not be copied or reproduced, except in full without the written permission of the Manager, EMC Technologies Pty Ltd. The certificate on page 3 may be reproduced in full.
www.emctech.com.au

4.0 TEST SIGNAL, FREQUENCY AND OUTPUT POWER

ATHEROS's ART test tool was used to configure the WLAN for testing. The Portable Tablet Computer Wireless LAN had a total of 11 channels (USA model) within the 2412 to 2462 MHz frequency band and 28 channels within the frequency range 5180 – 5825 MHz. In The frequency range 2412 MHz to 2462 MHz the device operates in 2 modes, OFDM and DSSS. Within the 5180 – 5825 MHz frequency range the device operates in OFDM mode only. For the SAR measurements the device was operating in continuous transmit mode using programming codes supplied by Fujitsu.

The Bluetooth module operates over 79 channels within the frequency range 2402 to 2480 MHz. It is possible for the Bluetooth module to operate simultaneously with the WLAN module (co-transmission). For the SAR measurements the device was operating in continuous transmit mode using programming codes supplied by Fujitsu. The tests were conducted with only the WLAN operating; there was no requirement for the Bluetooth module to operate for the purpose of determining co-transmission requirements due to the sufficient separation distance. The Bluetooth interface utilizes dedicated antenna, for the purpose of this report labelled antenna "D".

The test results mentioned in this report only apply to the 5200/5800MHz frequency range. An additional report titled 'M080823_CERT_AR5BHB92_SAR_2.4" is specific to the 2450MHz range.

The WLAN modules can be configured in a number of different data rates. It was found that the highest source based time averaged power was measured when using the lowest data rates available in each mode. This lowest data rate corresponds to 6Mbps in OFDM mode and 1Mbps in DSSS mode.

The frequency span of the 2450 MHz range and 5600MHz Bands was more than 10MHz consequently; the SAR levels of the test sample were measured for lowest, centre and highest channels in the applicable modes. The EUT is capable of using two antennas transmitting simultaneously (MCS8 DATA mode) the power level is 3dB lower (50%) than if a single antenna was transmitting. There were no wires or other connections to the Portable TABLET Computer during the SAR measurements.

At the beginning and at the completion of the SAR tests, the conducted power of the device was measured after temporary modification of antenna connector inside the device's TX RX compartment. Measurements were performed with a calibrated Power Meter. The Transmitter power was set to be equal or higher than power specified by the manufacturer.

4.1 Battery Status

The device battery was fully charged prior to commencement of measurement. Each SAR test was completed within 30 minutes. The battery condition was monitored by measuring the RF field at a defined position inside the phantom before the commencement of each test and again after the completion of the test. It was not possible to perform conducted power measurements at the output of the device, at the beginning and end of each scan due to lack of a suitable antenna port. The uncertainty associated with the power drift was less than 12% and was assessed in the uncertainty budget.



Accreditation No. 5292

This document must not be copied or reproduced, except in full without the written permission of the Manager, EMC Technologies Pty Ltd. The certificate on page 3 may be reproduced in full.
www.emctech.com.au

5.0 DETAILS OF TEST LABORATORY

5.1 Location

EMC Technologies Pty Ltd
176 Harrick Road
Keilor Park, (Melbourne) Victoria
Australia 3042

Telephone: +61 3 9365 1000
Facsimile: +61 3 9331 7455
email: melb@emctech.com.au
website: www.emctech.com.au

5.2 Accreditations

EMC Technologies Pty. Ltd. is accredited by the National Association of Testing Authorities, Australia (NATA).
NATA Accredited Laboratory Number: 5292

EMC Technologies Pty Ltd is NATA accredited for the following standards:

AS/NZS 2772.1:	RF and microwave radiation hazard measurement
ACA:	Radio communications (Electromagnetic Radiation - Human Exposure) Standard 2003
FCC:	Guidelines for Human Exposure to RF Electromagnetic Field OET65C 01/01
EN 50360: 2001	Product standard to demonstrate the compliance of mobile phones with the basic restrictions related to human exposure to electromagnetic fields (300 MHz – 3 GHz)
EN 50361: 2001	Basic standard for the measurement of Specific Absorption Rate related to human exposure to electromagnetic fields from mobile phones (300MHz – 3GHz)
IEEE 1528: 2003	Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head Due to Wireless Communications Devices: Measurement Techniques.

The 5.2 to 5.8 GHz SAR measurement range is not within the current scope of NATA accreditation.

Refer to NATA website www.nata.asn.au for the full scope of accreditation.



Accreditation No. 5292

This document must not be copied or reproduced, except in full without the written permission of the Manager, EMC Technologies Pty Ltd. The certificate on page 3 may be reproduced in full.
www.emctech.com.au

5.3 Environmental Factors

The measurements were performed in a shielded room with no background RF signals. The temperature in the laboratory was controlled to within $21\pm1^\circ\text{C}$, the humidity was in the range 36% to 39%. The liquid parameters are measured daily prior to the commencement of each test. Tests were performed to check that reflections within the environment did not influence the SAR measurements. The noise floor of the DASY4 SAR measurement system using the SN3563 probe was less than $5\mu\text{V}$ in both air and liquid mediums.

6.0 DESCRIPTION OF SAR MEASUREMENT SYSTEM

Applicable Head Configurations	: None
Applicable Body Configurations	: Tablet Position

6.1 Probe Positioning System

The measurements were performed with the state-of-the-art automated near-field scanning system **DASY4 V4.7 Build 53** from Schmid & Partner Engineering AG (SPEAG). The system is based on a high precision 6-axis robot (working range greater than 1.1m), which positions the SAR measurement probes with a positional repeatability of better than ± 0.02 mm. The DASY4 fully complies with the OET65 C (01-01), IEEE 1528 and EN50361 SAR measurement requirements.

6.2 E-Field Probe Type and Performance

The SAR measurements were conducted with SPEAG dosimetric probe EX3DV4 Serial: 3563 (5.6 GHz) designed in the classical triangular configuration and optimised for dosimetric evaluation. The probe has been calibrated and found to be accurate to better than ± 0.25 dB. The probe is suitable for measurements close to material discontinuity at the surface of the phantom. The sensors of the probe are directly loaded with Schottky diodes and connected via highly resistive lines (length = 300 mm) to the data acquisition unit.

6.3 Data Acquisition Electronics

The data acquisition electronics (DAE3) consists of a highly sensitive electrometer-grade preamplifier with auto-zeroing, a channel and gain switching multiplexer, a fast 16 bit AD-converter and a command decoder and control logic unit. The input impedance of the DAE3 box is $200\text{ M}\Omega$; the inputs are symmetrical and floating. Common mode rejection is above 80dB. Transmission to the PC-card is accomplished through an optical downlink for data and status information as well as an optical uplink for commands and the clock.

The mechanical probe-mounting device includes two different sensor systems for frontal and sideways probe contacts. They are used for mechanical surface detection and probe collision detection.



Accreditation No. 5292

This document must not be copied or reproduced, except in full without the written permission of the Manager, EMC Technologies Pty Ltd. The certificate on page 3 may be reproduced in full.
www.emctech.com.au

6.4 Validation

6.4.1 Validation Results @ 5GHz

The following table lists the dielectric properties of the tissue simulating liquid measured prior to SAR validation. The results of the validation are listed in columns 4 and 5. The forward power into the reference dipole for SAR validation was adjusted to 250 mW.

Table: Validation Results (Dipole: SPEAG D5GHzV2 SN: 1008)

1. Validation Date	2. ϵ_r (measured)	3. σ (mho/m) (measured)	4. Measured SAR 1g (mW/g)	5. Measured SAR 10g (mW/g)
4 th September 2008 5.8 GHz	33.9	5.51	23.4	6.58
4 th September 2008 5.5 GHz	34.7	5.09	21.8	6.20
6 th September 2008 5.2 GHz	35.4	4.84	22.9	6.50

6.4.2 Deviation from reference validation values

The reference SAR value is the SAR validation result obtained in a specific dielectric liquid using the validation dipole (D5GHzV2) after system component calibration. The measured one-gram SAR should be within 10% of the expected target reference values shown in table below.

Table: Deviation from reference validation values in 5.6 GHz band.

Frequency and Date	Measured SAR 1g (mW/g)	Measured SAR 1g (Normalized to 1W)	EMCT Calibration reference SAR Value 1g (mW/g)	Deviation From EMCT Reference (1g)
4 th September 2008 5800MHz	23.4	93.60	89.2	4.93
4 th September 2008 5500MHz	21.8	87.20	85.2	2.35
6 th September 2008 5200MHz	22.9	91.60	89.6	2.23

NOTE: All reference validation values are referenced to 1W input power.



Accreditation No. 5292

This document must not be copied or reproduced, except in full without the written permission of the Manager, EMC Technologies Pty Ltd. The certificate on page 3 may be reproduced in full.
www.emctech.com.au

6.4.3 Liquid Depth 15cm

During the SAR measurement process the liquid level was maintained to a level of a least 15cm with a tolerance of 0.5cm.

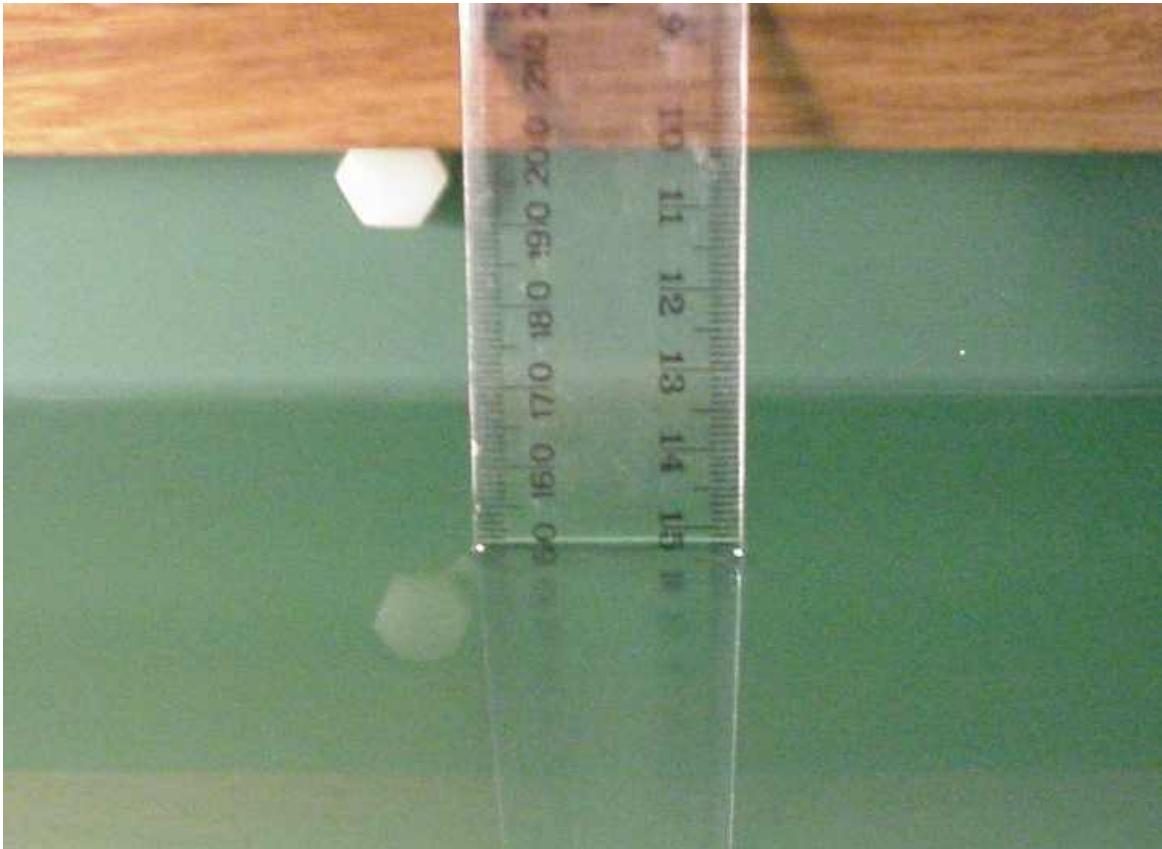


Photo of liquid Depth in Flat Phantom



Accreditation No. 5292

This document must not be copied or reproduced, except in full without the written permission of the Manager, EMC Technologies Pty Ltd. The certificate on page 3 may be reproduced in full.
www.emctech.com.au

6.5 Phantom Properties (Size, Shape, Shell Thickness)

The phantom used during the validations was the SAM Phantom model: TP - 1260 from SPEAG. It is a phantom with a single thickness of 2 mm and was filled with the required tissue simulating liquid. The SAM phantom support structures were all non-metallic and spaced more than one device width away in transverse directions.

For SAR testing in the body worn positions an AndreT Flat phantom P 10.1 was used. The phantom thickness is 2.0mm+/-0.2 mm and was filled with the required tissue simulating liquid. Table below provides a summary of the measured phantom properties.

Table: Phantom Properties

Phantom Properties	Required
Thickness of flat section	2.0mm \pm 0.2mm (bottom section)
Dielectric Constant	<5.0
Loss Tangent	<0.05

Depth of Phantom 200mm
 Length of Flat Section 620mm
 Width of Flat Section 540mm

P 10.1 Flat Phantom



P 10.1 Flat Phantom



Accreditation No. 5292

This document must not be copied or reproduced, except in full without the written permission of the Manager, EMC Technologies Pty Ltd. The certificate on page 3 may be reproduced in full.
www.emctech.com.au

6.6 Tissue Material Properties

The dielectric parameters of the brain simulating liquid were measured prior to SAR assessment using the HP85070A dielectric probe kit and HP8753ES Network Analyser. The actual dielectric parameters are shown in the following table.

Table: Measured Brain Simulating Liquid Dielectric Values for Validations

Frequency Band	ϵ_r (measured range)	ϵ_r (target)	σ (mho/m) (measured range)	σ (target)	ρ kg/m ³
5200 MHz Brain	35.4	36.0 \pm 5% (34.2 to 37.8)	4.84	4.76 \pm 5% (4.43 to 4.90)	1000
5500 MHz Brain	34.7	35.6 \pm 5% (33.8 to 37.4)	5.09	4.96 \pm 5% (4.71 to 5.21)	1000
5800 MHz Brain	33.9	35.3 \pm 5% (33.5 to 37.1)	5.51	5.27 \pm 5% (5.01 to 5.53)	1000

NOTE: The brain liquid parameters were within the required tolerances of \pm 5%.

Table: Measured Body Simulating Liquid Dielectric Values for 5200MHz range

Frequency Band	ϵ_r (measured range)	ϵ_r (target)	σ (mho/m) (measured range)	σ (target)	ρ kg/m ³
5180 MHz Muscle	44.9	49.0 \pm 10% (44.1 to 53.9)	5.43	5.3 \pm 10% (4.77 to 5.83)	1000
5260 MHz Muscle	44.7	48.9 \pm 10% (44.0 to 53.8)	5.60	5.4 \pm 10% (4.86 to 5.94)	1000
5320 MHz Muscle	44.4	48.8 \pm 10% (43.9 to 53.7)	5.70	5.4 \pm 10% (4.86 to 5.94)	1000

Table: Measured Body Simulating Liquid Dielectric Values for 5600MHz range

Frequency Band	ϵ_r (measured range)	ϵ_r (target)	σ (mho/m) (measured range)	σ (target)	ρ kg/m ³
5500 MHz Muscle	44.8	48.6 \pm 10% (43.7 to 53.4)	5.68	5.6 \pm 10% (5.04 to 6.16)	1000
5600 MHz Muscle	44.5	48.5 \pm 10% (43.8 to 53.5)	5.86	5.77 \pm 10% (5.20 to 6.34)	1000
5700 MHz Muscle	44.2	48.4 \pm 10% (43.6 to 53.2)	6.03	5.9 \pm 10% (5.31 to 6.49)	1000

Table: Measured Body Simulating Liquid Dielectric Values for 5800MHz range

Frequency Band	ϵ_r (measured range)	ϵ_r (target)	σ (mho/m) (measured range)	σ (target)	ρ kg/m ³
5745 MHz Muscle	46.8	48.3 \pm 10% (43.47 to 53.13)	6.05	5.9 \pm 10% (5.31 to 6.49)	1000
5785 MHz Muscle	46.7	48.2 \pm 10% (43.38 to 53.02)	6.14	6.0 \pm 10% (5.4 to 6.60)	1000
5825 MHz Muscle	46.6	48.2 \pm 10% (43.38 to 53.02)	6.19	6.0 \pm 10% (5.4 to 6.60)	1000

NOTE: The muscle liquid parameters were within the required tolerances of \pm 10%.



Accreditation No. 5292

6.6.1 Liquid Temperature and Humidity

The humidity and dielectric/ambient temperatures were recorded during the assessment of the tissue material dielectric parameters. The difference between the ambient temperature of the liquid during the dielectric measurement and the temperature during tests was less than $|2|^\circ\text{C}$.

Table: Temperature and Humidity recorded for each day

Date	Ambient Temperature (°C)	Liquid Temperature (°C)	Humidity (%)
4 th September 2008	20.4	20.1	36
6 th September 2008	20.3	20.1	39

6.7 Simulated Tissue Composition Used for SAR Test

A low loss clamp was used to position the TABLET underneath the phantom surface. Small pieces of foam were then used to press the TABLET flush against the phantom surface.

Table: Tissue Type: Muscle @ 5600MHz

Volume of Liquid: 60 Litres

EMCT Liquid
Composition
Distilled Water
Salt
Triton X-100

6.8 Device Holder for Laptops and P 10.1 Phantom

A low loss clamp was used to position the Laptop underneath the phantom surface. Small pieces of foam were then used to press the laptop flush against the phantom surface.

Refer to Appendix A for photographs of device positioning



Accreditation No. 5292

This document must not be copied or reproduced, except in full without the written permission of the Manager, EMC Technologies Pty Ltd. The certificate on page 3 may be reproduced in full.
www.emctech.com.au

7.0 SAR MEASUREMENT PROCEDURE USING DASY4

The SAR evaluation was performed with the SPEAG DASY4 system. A summary of the procedure follows:

- a) A measurement of the SAR value at a fixed location is used as a reference value for assessing the power drop of the EUT. The SAR at this point is measured at the start of the test, and then again at the end of the test.
- b) The SAR distribution at the exposed flat section of the flat phantom is measured at a distance of 2.0 mm from the inner surface of the shell. The area covers the entire dimension of the EUT and the horizontal grid spacing is 10 mm x 10 mm. The actual Area Scan has dimensions of 70mm x 100mm surrounding the test device. Based on this data, the area of the maximum absorption is determined by Spline interpolation.
- c) Around this point, a volume of 24 mm x 24 mm x 20 mm is assessed by measuring 7 x 7 x 9 points. On the basis of this data set, the spatial peak SAR value is evaluated with the following procedure:
 - (i) The data at the surface are extrapolated, since the centre of the dipoles is 1.0 mm away from the tip of the probe and the distance between the surface and the lowest measuring point is 2.0 mm. The extrapolation is based on a least square algorithm. A polynomial of the fourth order is calculated through the points in z-axes. This polynomial is then used to evaluate the points between the surface and the probe tip.
 - (ii) The maximum interpolated value is searched with a straightforward algorithm. Around this maximum the SAR values averaged over the spatial volumes (1 g and 10 g) are computed using the 3D-Spline interpolation algorithm. The 3D-Spline is composed of three one-dimensional splines with the "Not a knot"- condition (in x, y and z-direction). The volume is integrated with the trapezoidal – algorithm. One thousand points (10 x 10 x 10) are interpolated to calculate the averages.
 - (iii) All neighbouring volumes are evaluated until no neighbouring volume with a higher average value is found.
 - (iv) The SAR value at the same location as in Step (a) is again measured to evaluate the actual power drift.



Accreditation No. 5292

This document must not be copied or reproduced, except in full without the written permission of the Manager, EMC Technologies Pty Ltd. The certificate on page 3 may be reproduced in full.
www.emctech.com.au

8.0 MEASUREMENT UNCERTAINTY

The uncertainty analysis is based on the template listed in the IEEE Std 1528-2003 for both Handset SAR tests and Validation uncertainty. The measurement uncertainty of a specific device is evaluated independently.

Table: Uncertainty Budget for DASY4 Version V4.7 Build 53 – EUT SAR test 5GHz

a	b	c	d	e= f(d,k)	f	g	h=cxf/e	i=cxg/e	k
Uncertainty Component	Sec.	Tol. (%)	Prob. Dist.	Div.	C_i (1g)	C_i (10g)	$1g u_i$ (%)	$10g u_i$ (%)	v_i
Measurement System									
Probe Calibration (k=1) (numerical calibration)	E.2.1	6.8	N	1	1	1	6.8	6.8	∞
Axial Isotropy	E.2.2	4.7	R	1.73	0.707	0.707	1.9	1.9	∞
Hemispherical Isotropy	E.2.2	9.6	R	1.73	0.707	0.707	3.9	3.9	∞
Boundary Effect	E.2.3	2	R	1.73	1	1	1.2	1.2	∞
Linearity	E.2.4	4.7	R	1.73	1	1	2.7	2.7	∞
System Detection Limits	E.2.5	1	R	1.73	1	1	0.6	0.6	∞
Readout Electronics	E.2.6	1	N	1	1	1	1.0	1.0	∞
Response Time	E.2.7	0.8	R	1.73	1	1	0.5	0.5	∞
Integration Time	E.2.8	2.6	R	1.73	1	1	1.5	1.5	∞
RF Ambient Conditions	E.6.1	0.075	R	1.73	1	1	0.0	0.0	∞
Probe Positioner Mechanical Tolerance	E.6.2	0.8	R	1.73	1	1	0.5	0.5	∞
Probe Positioning with respect to Phantom Shell	E.6.3	5.7	R	1.73	1	1	3.3	3.3	∞
Extrapolation, interpolation and Integration Algorithms for Max. SAR Evaluation	E.5	4	R	1.73	1	1	2.3	2.3	∞
Test Sample Related									
Test Sample Positioning	E.4.2	2.9	N	1	1	1	2.9	2.9	11
Device Holder Uncertainty	E.4.1	3.6	N	1	1	1	3.6	3.6	7
Output Power Variation – SAR Drift Measurement	6.6.2	11.30	R	1.73	1	1	6.5	6.5	∞
Phantom and Tissue Parameters									
Phantom Uncertainty (shape and thickness tolerances)	E.3.1	4	R	1.73	1	1	2.3	2.3	∞
Liquid Conductivity – Deviation from target values	E.3.2	10	R	1.73	0.64	0.43	3.7	2.5	∞
Liquid Conductivity – Measurement uncertainty	E.3.3	2.5	N	1	0.64	0.43	1.6	1.1	5
Liquid Permittivity – Deviation from target values	E.3.2	10	R	1.73	0.6	0.49	3.5	2.8	∞
Liquid Permittivity – Measurement uncertainty	E.3.3	2.5	N	1	0.6	0.49	1.5	1.2	5
Combined standard Uncertainty			RSS				13.9	13.4	154
Expanded Uncertainty (95% CONFIDENCE LEVEL)			k=2				27.8	26.85	

Estimated total measurement uncertainty for the DASY4 measurement system was $\pm 13.9\%$. The extended uncertainty (K = 2) was assessed to be $\pm 27.8\%$ based on 95% confidence level. The uncertainty is not added to the measurement result.



Accreditation No. 5292

This document must not be copied or reproduced, except in full without the written permission of the Manager, EMC Technologies Pty Ltd. The certificate on page 3 may be reproduced in full.
www.emctech.com.au

Table: Uncertainty Budget for DASY4 Version V4.7 Build 53 – Validation 5GHz

a	b	c	d	e= f(d,k)	f	g	h=cxf/e	i=cxg/e	k
Uncertainty Component	Sec.	Tol. (%)	Prob. Dist.	Div.	C _i (1g)	C _i (10g)	1g u _i (%)	10g u _i (%)	v _i
Measurement System									
Probe Calibration (k=1) (standard calibration)	E.2.1	6.6	N	1	1	1	6.6	6.6	∞
Axial Isotropy	E.2.2	4.7	R	1.73	1	1	2.7	2.7	∞
Hemispherical Isotropy	E.2.2	0	R	1.73	1	1	0.0	0.0	∞
Boundary Effect	E.2.3	2	R	1.73	1	1	1.2	1.2	∞
Linearity	E.2.4	4.7	R	1.73	1	1	2.7	2.7	∞
System Detection Limits	E.2.5	1	R	1.73	1	1	0.6	0.6	∞
Readout Electronics	E.2.6	1	N	1	1	1	1.0	1.0	∞
Response Time	E.2.7	0	R	1.73	1	1	0.0	0.0	∞
Integration Time	E.2.8	0	R	1.73	1	1	0.0	0.0	∞
RF Ambient Conditions	E.6.1	0.075	R	1.73	1	1	0.0	0.0	∞
Probe Positioner Mechanical Tolerance	E.6.2	0.8	R	1.73	1	1	0.5	0.5	∞
Probe Positioning with respect to Phantom Shell	E.6.3	5.7	R	1.73	1	1	3.3	3.3	∞
Extrapolation, interpolation and Integration Algorithms for Max. SAR Evaluation	E.5	4	R	1.73	1	1	2.3	2.3	∞
Test Sample Related									
Dipole Axis to Liquid distance	E.4.2	2	N	1	1	1	2.0	2.0	11
Output Power Variation – SAR Drift Measurement	6.6.2	4.7	R	1.73	1	1	2.7	2.7	∞
Phantom and Tissue Parameters									
Phantom Uncertainty (shape and thickness tolerances)	E.3.1	4	R	1.73	1	1	2.3	2.3	∞
Liquid Conductivity – Deviation from target values	E.3.2	5	R	1.73	0.64	0.43	1.8	1.2	∞
Liquid Conductivity – Measurement uncertainty	E.3.3	2.5	N	1	0.64	0.43	1.6	1.1	5
Liquid Permittivity – Deviation from target values	E.3.2	5	R	1.73	0.6	0.49	1.7	1.4	∞
Liquid Permittivity – Measurement uncertainty	E.3.3	2.5	N	1	0.6	0.49	1.5	1.2	5
Combined standard Uncertainty			RSS				10.3	10.0	154
Expanded Uncertainty (95% CONFIDENCE LEVEL)			k=2				20.5	20.02	

Estimated total measurement uncertainty for the DASY4 measurement system was $\pm 10.3\%$. The extended uncertainty (K = 2) was assessed to be $\pm 20.5\%$ based on 95% confidence level. The uncertainty is not added to the measurement result.



Accreditation No. 5292

This document must not be copied or reproduced, except in full without the written permission of the Manager, EMC Technologies Pty Ltd. The certificate on page 3 may be reproduced in full.
www.emctech.com.au

9.0 EQUIPMENT LIST AND CALIBRATION DETAILS

Table: SPEAG DASY4 Version V4.7 Build 53

Equipment Type	Manufacturer	Model Number	Serial Number	Calibration Due	Used For this Test?
Robot - Six Axes	Staubli	RX90BL	N/A	Not applicable	✓
Robot Remote Control	SPEAG	CS7MB	RX90B	Not applicable	✓
SAM Phantom	SPEAG	N/A	1260	Not applicable	✓
SAM Phantom	SPEAG	N/A	1060	Not applicable	
Flat Phantom	AndreT	10.1	P 10.1	Not Applicable	✓
Flat Phantom	AndreT	9.1	P 9.1	Not Applicable	
Flat Phantom	SPEAG	PO1A 6mm	1003	Not Applicable	
Data Acquisition Electronics	SPEAG	DAE3 V1	359	11-July-2009	
Data Acquisition Electronics	SPEAG	DAE3 V1	442	24-July-2009	✓
Probe E-Field - Dummy	SPEAG	DP1	N/A	Not applicable	
Probe E-Field	SPEAG	ET3DV6	1380	18-Dec-2008	
Probe E-Field	SPEAG	ET3DV6	1377	14-July-2009	
Probe E-Field	SPEAG	ES3DV6	3029	Not Used	
Probe E-Field	SPEAG	EX3DV4	3563	14-July-2009	✓
Antenna Dipole 300 MHz	SPEAG	D300V2	1005	14-Dec-2009	
Antenna Dipole 450 MHz	SPEAG	D450V2	1009	14-Dec-2008	
Antenna Dipole 900 MHz	SPEAG	D900V2	047	7-July-2010	
Antenna Dipole 1640 MHz	SPEAG	D1640V2	314	16-July-2010	
Antenna Dipole 1800 MHz	SPEAG	D1800V2	242	8-July-2010	
Antenna Dipole 1950 MHz	SPEAG	D1950V3	1113	5-March-2009	
Antenna Dipole 3500 MHz	SPEAG	D3500V2	1002	06-July-2009	
Antenna Dipole 2450 MHz	SPEAG	D2450V2	724	13-Dec-2008	
Antenna Dipole 5600 MHz	SPEAG	D5GHzV2	1008	07-Dec-2009	✓
RF Amplifier	EIN	603L	N/A	*In test	
RF Amplifier	Mini-Circuits	ZHL-42	N/A	*In test	
RF Amplifier	Mini-Circuits	ZVE-8G	N/A	*In test	✓
Synthesized signal generator	Hewlett Packard	ESG-D3000A	GB37420238	*In test	
RF Power Meter Dual	Hewlett Packard	437B	3125012786	07-July-2009	✓
RF Power Sensor 0.01 - 18 GHz	Hewlett Packard	8481H	1545A01634	09-July-2009	✓
RF Power Meter Dual	Gigatronics	8542B	1830125	24-June-2009	
RF Power Sensor	Gigatronics	80301A	1828805	24-June-2009	
RF Power Meter Dual	Hewlett Packard	435A	1733A05847	*In test	✓
RF Power Sensor	Hewlett Packard	8482A	2349A10114	*In test	✓
Network Analyser	Hewlett Packard	8714B	GB3510035	06-Sept-2008	
Network Analyser	Hewlett Packard	8753ES	JP39240130	02 Oct-2008	✓
Dual Directional Coupler	Hewlett Packard	778D	1144 04700	*In test	
Dual Directional Coupler	NARDA	3022	75453	*In test	✓

* Calibrated during the test for the relevant parameters.



Accreditation No. 5292

This document must not be copied or reproduced, except in full without the written permission of the Manager, EMC Technologies Pty Ltd. The certificate on page 3 may be reproduced in full.
www.emctech.com.au

10.0 OET BULLETIN 65 – SUPPLEMENT C TEST METHOD

Notebooks should be evaluated in normal use positions, typical for lap-held bottom-face only. However the number of positions will depend on the number of configurations the tablet can be operated in. The "ST SERIES" PC can be used on the lap or hand held as a Tablet PC. WLAN antennas are located at the edges of the LCD screen.

10.0 Position

10.1.1 "Tablet" Position Definition (0mm spacing)

The device was tested in the 2.00 mm flat section of the AndreT Flat phantom P 10.1 for the "Tablet" position. The Transceiver was placed at the bottom of the phantom and suspended in such way that the back of the device was touching the phantom. This device orientation simulates the PC's normal use – being held on the lap of the user. A spacing of 0mm ensures that the SAR results are conservative and represent a worst-case position.


10.2 List of All Test Cases (Antenna In/Out, Test Frequencies, User Modes)

The device has a fixed antenna. Depending on the measured SAR level up to three test channels with the test sample operating at maximum power were recorded. The following table represents the matrix used to determine what testing was required.

Table: Testing configurations

Phantom Configuration	*Device Mode	Antenna	Test Configurations		
			Channel (Low)	Channel (Middle)	Channel (High)
Tablet	OFDM 5GHz	A		X	
	All Bands	B		X	

Legend

	Testing Required in this configuration
	Testing required in this configuration only if SAR of middle channel is more than 3dB below the SAR limit or it is the worst case.

NOTE: Throughout this report, Antenna A, and B refer to Tx1, and Tx2 in the host respectively.

10.3 FCC RF Exposure Limits for Occupational/ Controlled Exposure

Spatial Peak SAR Limits For:	
Partial-Body:	8.0 mW/g (averaged over any 1g cube of tissue)
Hands, Wrists, Feet and Ankles:	20.0 mW/g (averaged over 10g cube of tissue)

10.4 FCC RF Exposure Limits for Un-controlled/Non-occupational

Spatial Peak SAR Limits For:	
Partial-Body:	1.6 mW/g (averaged over any 1g cube of tissue)
Hands, Wrists, Feet and Ankles:	4.0 mW/g (averaged over 10g cube of tissue)



Accreditation No. 5292

This document must not be copied or reproduced, except in full without the written permission of the Manager, EMC Technologies Pty Ltd. The certificate on page 3 may be reproduced in full.
www.emctech.com.au

11.0 SAR MEASUREMENT RESULTS

The SAR values averaged over 1g tissue masses were determined for the sample device for all test configurations listed in section 10.2.

11.1 5 GHz Band SAR Results

Table: SAR MEASUREMENT RESULTS Lower Band – OFDM Mode

Test Position	Plot No.	Ant	Bit rate Mode (Mbps)	Channel Bandwidth (MHz)	Test Channel	Test Freq (MHz)	Measured 1g SAR Results (mW/g)	Measured Drift (dB)
Tablet	1	B	6	-	52	5240	0.254	-0.242
	2	A	6	-	36	5180	0.120	-0.205
Tablet	3	A	6	-	52	5240	0.336	-0.465
	4	A	6	-	64	5320	0.323	0.115

NOTE: The measurement uncertainty of 27.8% for 5GHz testing is not added to the result.

The highest SAR level recorded in the 5.2 GHz band was 0.336 mW/g as evaluated in a 1g cube of averaging mass. This value was obtained in Tablet position in OFDM mode, utilizing channel 52 (5240MHz) and antenna A.

Table: SAR MEASUREMENT RESULTS Middle Band – OFDM Mode

Test Position	Plot No.	Ant	Bit rate Mode (Mbps)	Channel Bandwidth (MHz)	Test Channel	Test Freq (MHz)	Measured 1g SAR Results (mW/g)	Measured Drift (dB)
Tablet	5	B	6	-	120	5600	0.290	-0.400
	6	A	6	-	100	5500	0.255	-0.357
Tablet	7	A	6	-	120	5600	0.309	-0.410
	8	A	6	-	140	5700	0.192	0.057

NOTE: The measurement uncertainty of 27.8% for 5GHz testing is not added to the result.

The highest SAR level recorded in the 5.6 GHz band was 0.309 mW/g as evaluated in a 1g cube of averaging mass. This value was obtained in Tablet position in OFDM mode, utilizing channel 120 (5600MHz) and antenna A.



Accreditation No. 5292

This document must not be copied or reproduced, except in full without the written permission of the Manager, EMC Technologies Pty Ltd. The certificate on page 3 may be reproduced in full.
www.emctech.com.au

Table: SAR MEASUREMENT RESULTS Upper Band – OFDM Mode

Test Position	Plot No.	Ant	Bit rate Mode (Mbps)	Channel Bandwidth (MHz)	Test Channel	Test Freq (MHz)	Measured 1g SAR Results (mW/g)	Measured Drift (dB)
Tablet	9	A	6	-	157	5785	0.158	-0.424
Tablet	10	B	6	-	149	5745	0.318	0.242
	11	B	6	-	157	5785	0.358	-0.421
	12	B	6	-	165	5825	0.420	-0.035

NOTE: The measurement uncertainty of 27.8% for 5GHz testing is not added to the result.

The highest SAR level recorded in the 5.8 GHz band was 0.420 mW/g as evaluated in a 1g cube of averaging mass. This value was obtained in Tablet position in OFDM mode, utilizing channel 165 (5825MHz) and antenna A.



Accreditation No. 5292

This document must not be copied or reproduced, except in full without the written permission of the Manager, EMC Technologies Pty Ltd. The certificate on page 3 may be reproduced in full.
www.emctech.com.au

12.0 COMPLIANCE STATEMENT

The Fujitsu TABLET PC, Model: ST6010 with AETHEROS Mini-PCI Wireless LAN Module (HB92 802.11a/b/g/n), Model: AR5BHB92 & TAIYO YUDEN Bluetooth Module, Model: EYSMJCS was found to comply with the FCC and RSS-102 SAR requirements.

The highest SAR level recorded was 0.420 mW/g for a 1g cube. This value was measured at 5825 MHz (channel 165) in the "Tablet" position in OFDM modulation mode at the antenna A. This was below the limit of 1.6 mW/g for uncontrolled exposure, even taking into account the measurement uncertainty of 27.8 %.



Accreditation No. 5292

This document must not be copied or reproduced, except in full without the written permission of the Manager, EMC Technologies Pty Ltd. The certificate on page 3 may be reproduced in full.
www.emctech.com.au