



EMC Technologies Pty Ltd
ABN 82 057 105 549
176 Harrick Road
Keilor Park
Victoria Australia 3042

Ph: + 613 9365 1000
Fax: + 613 9331 7455
email: melb@emctech.com.au

SAR Test Report

Report Number: M130809_FCC_7260HMW_SAR_5.6R

This is replacement report for M130809_FCC_7260HMW_SAR_5.6

Test Sample: Convertible Tablet Computer
Host PC Model Number: T734/TH734
Radio Modules: WLAN INTEL CENTRINO
ADVANCED-N 7260HMW

PC System FCC ID: EJE-WB0086
PC System IC: 337J-WB0086
Date of Issue: 4th October 2013

EMC Technologies Pty Ltd reports apply only to the specific samples tested under stated test conditions. It is the manufacturer's responsibility to assure that additional production units of this model are manufactured with identical electrical and mechanical components. EMC Technologies Pty Ltd shall have no liability for any deductions, inferences or generalisations drawn by the client or others from EMC Technologies Pty Ltd issued reports. This report shall not be used to claim, constitute or imply product endorsement by EMC Technologies Pty Ltd.



This document is issued in accordance with NATA's accreditation requirements. The results of tests, calibration and/or measurements included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing and calibration reports.

This document shall only be reproduced in full, with the exception of the certificate on p3

CONTENTS

1.0 GENERAL INFORMATION 3

2.0 INTRODUCTION..... 4

3.0 TEST SAMPLE TECHNICAL INFORMATION 5

3.1 DUT (WLAN) Details..... 5

3.2 DUT (Bluetooth) Details..... 8

3.3 DUT (Notebook PC) Details..... 8

3.4 Test sample Accessories..... 8

3.4.1 *Battery Types*..... 8

4.0 TEST SIGNAL, FREQUENCY AND OUTPUT POWER 9

4.1 Battery Status 9

5.0 DETAILS OF TEST LABORATORY 10

5.1 Location 10

5.2 Accreditations 10

5.3 Environmental Factors..... 10

6.0 DESCRIPTION OF SAR MEASUREMENT SYSTEM..... 11

6.1 Probe Positioning System..... 11

6.2 E-Field Probe Type and Performance 11

6.3 System verification..... 11

6.3.1 *System verification Results @ 5GHz*..... 11

6.3.2 *Deviation from reference system verification values* 12

6.3.3 *Liquid Depth 15cm* 12

6.3.4 *Phantom Properties* 13

6.4 Phantom Properties 13

6.5 Tissue Material Properties 14

6.5.1 *Liquid Temperature and Humidity*..... 15

6.6 Simulated Tissue Composition Used for SAR Test..... 15

6.7 Device Holder for Laptops and P 10.1 Phantom 15

7.0 SAR MEASUREMENT PROCEDURE USING DASY5..... 16

8.0 MEASUREMENT UNCERTAINTY 17

9.0 EQUIPMENT LIST AND CALIBRATION DETAILS..... 19

10.0 TEST METHODOLOGY 20

10.1 Position 20

10.1.1 *“Lap Held” Position Definition (0mm spacing)* 20

10.1.2 *“Edge On” Position (Portrait or Landscape)*..... 20

10.1.3 *“Bystander” Position (25mm spacing)*..... 20

10.2 List of All Test Cases (Antenna In/Out, Test Frequencies, User Modes)..... 21

11.0 SAR MEASUREMENT RESULTS 22

5GHz Band SAR Results..... 22

12.0 COMPLIANCE STATEMENT 28

13.0 ANTENNA HOST PLATFORM LOCATION 29

APPENDIX A1 TEST SAMPLE PHOTOGRAPHS 30

APPENDIX A2 TEST SAMPLE PHOTOGRAPHS 31

APPENDIX A3 TEST SAMPLE PHOTOGRAPHS 32

APPENDIX A4 TEST SETUP PHOTOGRAPHS 33

APPENDIX A5 TEST SETUP PHOTOGRAPHS 34

APPENDIX A6 TEST SETUP PHOTOGRAPHS 35

APPENDIX A7 TEST SETUP PHOTOGRAPHS 36

APPENDIX A8 TEST SETUP PHOTOGRAPHS 37

APPENDIX B PLOTS OF THE SAR MEASUREMENTS..... 38

APPENDIX C CALIBRATION DOCUMENTS 131



This document is issued in accordance with NATA's accreditation requirements. The results of tests, calibration and/or measurements included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing and calibration reports.

This document shall only be reproduced in full, with the exception of the certificate on p3

SAR TEST REPORT

Report Number: M130809_FCC_7260HMW_SAR_5.6R
PC System FCC ID: EJE-WB0086,
PC System IC: 337J-WB0086,

1.0 GENERAL INFORMATION

Table 1

Test Sample: Portable Convertible Tablet Computer
Model Name: T734/TH734
Radio Modules: WLAN 7260HMW
Interface Type: Half Mini-PCI Module
Device Category: Portable Transmitter
Test Device: Pre-Production Unit
PC System FCC ID: EJE-WB0086
PC System IC: 337J-WB0086
RF exposure Category: General Population/Uncontrolled

Manufacturer: Fujitsu Limited


Test Standard/s: 1. 248227 D01 SAR meas for 802 11 a b g v01r02
 447498 D01 General RF Exposure Guidance v05r01
 616217 D04 SAR for laptop and tablets v01r01
 865664 D01 SAR Measurement 100 MHz to 6 GHz v01r01
 865664 D02 RF Exposure Reporting v01r01

Statement Of Compliance: The Fujitsu Convertible Tablet Computer T734/TH734 with Wireless LAN model 7260HMW complied with the FCC General public/uncontrolled RF exposure limits of 1.6mW/g per requirements of 47CFR2.1093(d).

Highest Reported SAR: 5 GHz WLAN Bands – 1.53 mW/g

Test Dates: 20th August to 4th September 2013

Test Officer: 

Authorised Signature: 

Peter Jakubiec

Chris Zombolas
Technical Director



This document is issued in accordance with NATA's accreditation requirements. The results of tests, calibration and/or measurements included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing and calibration reports.

This document shall only be reproduced in full, with the exception of the certificate on p3

SAR TEST REPORT
Portable Convertible Tablet Computer
Model: T734/TH734
Report Number: M130809_FCC_7260HMW_SAR_5.6R

2.0 INTRODUCTION

Testing was performed on the Fujitsu Convertible Tablet PC, Model: T734/TH734 with INTEL Half Mini-PCI Wireless LAN and Bluetooth Combo Module (INTEL CENTRINO ADVANCED-N 802.11a/b/g/n), Model: 7260HMW. The INTEL CENTRINO ADVANCED-N module is an OEM product. The Half Mini-PCI Wireless LAN (WLAN) was tested in the dedicated host – LIFEBOOK T series, Model T734/TH734. The system tested will be referred to as the DUT throughout this report. The Wireless LAN Module incorporates Bluetooth Transmitter, which can only transmit via Antenna B (2), the Bluetooth maximum power was 6dBm (including tune-up) therefore it did not require SAR testing as a stand-alone transmitter. This is in accordance with KDB 447498 section 4.3.1 exemption formula:

$$[(\text{max. power of channel, including tune-up tolerance, mW}) / (\text{min. test separation distance, mm})] \cdot [\sqrt{f(\text{GHz})}] \leq 3.0$$
 for 1-g SAR Result - $[(3.98)/(8\text{mm})] \cdot [\sqrt{f(2.45\text{GHz})}] = 0.78$

, and also for the simultaneous transmission according to the section 4.3.2 the estimated SAR is given by formula:

$$(\text{max. power of channel, including tune-up tolerance, mW}) / (\text{min. test separation distance, mm}) \cdot [\sqrt{f(\text{GHz})/x}] \text{ W/kg}$$

Result - $[(3.98)/(8\text{mm})] \cdot [\sqrt{f(2.45\text{GHz})}/7.5] = 0.1 \text{ W/kg}$.

The highest SAR for the antenna A (1) was 1.00 mW/g so the sum of the simultaneously transmitting Bluetooth and WLAN (Ant. B) was 1.10 mW/g which was below the SAR limit of 1.6mW/g.

The measurement test results mentioned herein only apply to the 5GHz frequency band; an additional report titled "M130809_FCC_7260HMW_SAR_2.4" applies to the 2450MHz frequency range.



This document is issued in accordance with NATA's accreditation requirements. The results of tests, calibration and/or measurements included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing and calibration reports.

This document shall only be reproduced in full, with the exception of the certificate on p3

3.0 TEST SAMPLE TECHNICAL INFORMATION

(Information supplied by the client)

3.1 DUT (WLAN) Details

Table 2

Transmitter:	Mini-Card Wireless LAN Module
FCC ID:	EJE-WB0086
IC:	337J-WB0086
Wireless Module:	INTEL CENTRINO ADVANCED-N (802.11a/b/g/n)
Model Number:	7260HMW
Manufacturer:	Intel Corporation
Modulation Type:	DSSS for 802.11b OFDM for 802.11g OFDM for 802.11a OFDM for 802.11n
2.4 GHz (802.11b/g/n):	CCK, DQPSK, DBPSK, 16QAM, 64QAM
5 GHz (802.11a/n):	BPSK, QPSK, 16QAM, 64QAM
Maximum Data Rate:	802.11b = 11 Mbps, 802.11g and 802.11a = 54 Mbps 802.11n = 450 Mbps
Frequency Ranges:	2.412 –2.462 GHz for 11b/g/n 5.18 - 5.825 GHz for 11a/n
Number of Channels:	11 channels for 11b/g/n 24 channels for 11a/n with 20MHz Bandwidth 18 channels for 11n with 40MHz Bandwidth
Antenna Types:	Nissei Inverted F antenna Model: PIFA Location: refer to Antenna location file
Power Supply:	3.3 VDC from PCI bus



This document is issued in accordance with NATA's accreditation requirements. The results of tests, calibration and/or measurements included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing and calibration reports.

This document shall only be reproduced in full, with the exception of the certificate on p3

Table 3 Channels and Output power setting

Mode	Channel	Frequency (MHz)	Data Rate (Mbps)	Tx BW (MHz)	Average Power Target (dBm)		Average Power Measured (dBm)			
					Ch A	Ch B	Ch A	Ch B		
802.11a	5.2 GHz		6	-	13.5	13.0	13.78	N/A		
	36	5180								
	40	5200								
	44	5220								
	48	5240								
	5.3 GHz				13.5	16	13.67	16.16		
	52	5260					N/A	N/A		
	56	5280					N/A	16.26		
	60	5300					13.0	13.58	N/A	
	64	5320								
	5.6 GHz				13.5	16.5	13.0	12.5	N/A	N/A
	100	5500								
	104	5520								
	108	5540								
	112	5560								
	116	5580								
	120	5600								
	124	5620								
	128	5640								
	132	5660								
	136	5680								
	140	5700								
	5.8 GHz				13.5	16.5	13.5	16.5	13.69	16.65
	149	5745								
	153	5765								
	157	5785								
	161	5805								
	165	5825								



This document is issued in accordance with NATA's accreditation requirements. The results of tests, calibration and/or measurements included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing and calibration reports.

This document shall only be reproduced in full, with the exception of the certificate on p3

5 GHz (802.11n)

Mode	Channel	Frequency (MHz)	Data Rate (Mbps)	Tx BW (MHz)	Average Power Target (dBm)		Average Power Measured (dBm)				
					Ch A	Ch B	Ch A	Ch B			
802.11n	5.2 GHz		HT0	20	13.5						
	36	5180					13.0	N/A	N/A		
	40	5200									
	44	5220					15.0	N/A	N/A		
	48	5240									
	5.3 GHz										
	52	5260								N/A	N/A
	56	5280					13.5	16	N/A	N/A	
	60	5300								N/A	N/A
	64	5320						13.0	N/A	N/A	
	5.6 GHz										
	100	5500				13.5	13.0	N/A	N/A		
	104	5520							N/A	N/A	
	108	5540							N/A	N/A	
	112	5560							N/A	N/A	
	116	5580							N/A	N/A	
	120	5600				13.5	16.5	N/A	N/A		
	124	5620							N/A	N/A	
	128	5640							N/A	N/A	
	132	5660							N/A	N/A	
	136	5680						N/A	N/A		
	140	5700			13.0	12.5	N/A	N/A			
	5.8 GHz										
	149	5745						N/A	N/A		
	153	5765						N/A	N/A		
	157	5785			13.5	16.5	N/A	N/A			
	161	5805						N/A	N/A		
	165	5825						N/A	N/A		
	5.2 GHz										
	38	5190				9.5	10.0	N/A	N/A		
	46	5230				13.5	15.5	N/A	15.58		
	5.3 GHz										
	54	5270				9.5	10.0	N/A	N/A		
	62	5310				11.0	11.0	N/A	N/A		
	5.6 GHz										
	102	5510				10.5	10.5	N/A	N/A		
	110	5550						N/A	N/A		
	118	5590						N/A	N/A		
	126	5630			13.5	16.5	N/A	N/A			
	134	5670					15.5	N/A	N/A		
5.8 GHz											
151	5755					N/A	N/A				
159	5795			13.5	16.5	N/A	N/A				
				40 Wide							

NOTE: For 2450 MHz SAR results refer to report titled "M130809_FCC_7260HMW_SAR_2.4".



This document is issued in accordance with NATA's accreditation requirements. The results of tests, calibration and/or measurements included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing and calibration reports.

This document shall only be reproduced in full, with the exception of the certificate on p3

3.2 DUT (Bluetooth) Details

Table 4

Transmitter:	Bluetooth contained in same WLAN module
Network Standard:	Bluetooth™ RF Test Specification
Modulation Type:	Frequency Hopping Spread Spectrum (FHSS)
Frequency Range:	2402 MHz to 2480 MHz
Number of Channels:	79
Carrier Spacing:	1.0 MHz
Antenna Types:	Nissei Inverted F antenna Model: PIFA Location: refer to Antenna location file
Max. Output Power:	6 dBm
Reference Oscillator:	16 MHz (Built-in)
Power Supply:	3.3 VDC from host.

3.3 DUT (Notebook PC) Details

Table 5

Host notebook :	LIFEBOOK T series
Model Name:	T734, TH734
Serial Number:	Pre-production Sample
Manufacturer:	FUJITSU LIMITED
CPU Type and Speed:	Core i7 2.9GHz
LCD	12.5"HD+(1366x768) : LP125WH2
Graphics chip	Non
Wired LAN:	Intel I217LM : 10 Base-T/100 Base-TX/1000Base-T
Modem:	Non
Port Replicator Model:	FPCPR132
AC Adapter Model:	90W: A13-090P1A(Chicony), A13-090P2A (Chicony) ADP-90BE D(Delta), ADP-90BE C(Delta) 80W: ADP-80SB A(Delta), ADP-80SB B(Delta), PJW1942NA(Tamura)
Voltage:	19 V
Current Specs:	4.74A / 4.22A
Watts:	90W / 80W

3.4 Test sample Accessories

3.4.1 Battery Types

One type of Fujitsu Lithium Ion battery is used to power the DUT.

Table 6 Battery Details

Brand name: Fujitsu
Model name: FPB0283
Power rating: 10.8V, 6700mAh
Type: Li-ion



This document is issued in accordance with NATA's accreditation requirements. The results of tests, calibration and/or measurements included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing and calibration reports.

This document shall only be reproduced in full, with the exception of the certificate on p3

4.0 TEST SIGNAL, FREQUENCY AND OUTPUT POWER

INTEL’s CRTU test tool was used to configure the WLAN for testing. The DUT Wireless LAN had a total of 11 channels within the 2412 to 2462 MHz frequency band and 12 channels within the frequency range 5180 to 5825 MHz. In The frequency range 2412 MHz to 2462 MHz the DUT operates in 2 modes, OFDM and DSSS. Within the 5180 to 5825 MHz frequency range the device operates in OFDM mode only. For the SAR measurements the device was operating in continuous transmit mode using programming codes supplied by Fujitsu.

The Bluetooth operates over 79 channels within the frequency range 2402 to 2480 MHz. The Bluetooth power is very low (6dBm max) and is located at a distance of 152mm from other transmitting antennas. Simultaneous transmission evaluation has been performed in accordance with Section 4.3.2 of KDB 447498 D01.

The test results mentioned in this report only apply to the 5 GHz frequency band. An additional report titled ‘M130809_FCC_7260HMW_SAR_2.4’ is specific to the 2450MHz range.

The WLAN modules can be configured in a number of different data rates. It was found that the highest source based time averaged power was measured when using the lowest data rates available in each mode. This lowest data rate corresponds to 6Mbps in OFDM mode and 1Mbps in DSSS mode.

The frequency span of the 2450 MHz range band was more than 10MHz consequently; the SAR levels of the test sample were measured for lowest, centre and highest channels in the applicable modes. The DUT is capable of using two antennas transmitting simultaneously (HT8 DATA mode) the power level is 3dB lower (50%) than if a single antenna was transmitting. There were no wires or other connections to the DUT during the SAR measurements.

At the beginning of the SAR tests, the conducted power of the device was measured after temporary modification of antenna connector inside the device’s TX RX compartment. Measurements were performed with a calibrated Power Meter. The Transmitter power was set to be equal or higher than power specified by the manufacturer and exceeded or was equal to the tune-up power of the transmitter module.

Table 7 Frequency and Conducted Power Results Bluetooth

Channel	Channel Frequency MHz	*Data Rate (Mbps)	Maximum Conducted Output Power Measured (dBm)
Channel 40	2441	N/A	6

4.1 Battery Status

The DUT battery was fully charged prior to commencement of measurement. Each SAR test was completed within 30 minutes. The battery condition was monitored by measuring the RF field at a defined position inside the phantom before the commencement of each test and again after the completion of the test. It was not possible to perform conducted power measurements at the output of the DUT, at the beginning and end of each scan due to lack of a suitable antenna port. The uncertainty associated with the power drift was less than 5% and was assessed in the uncertainty budget.



This document is issued in accordance with NATA’s accreditation requirements. The results of tests, calibration and/or measurements included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing and calibration reports.

This document shall only be reproduced in full, with the exception of the certificate on p3

5.0 DETAILS OF TEST LABORATORY

5.1 Location

EMC Technologies Pty Ltd
176 Harrick Road
Keilor Park, (Melbourne) Victoria
Australia 3042

Telephone: +61 3 9365 1000
Facsimile: +61 3 9331 7455
email: melb@emctech.com.au
website: www.emctech.com.au

5.2 Accreditations

EMC Technologies Pty. Ltd. is accredited by the National Association of Testing Authorities, Australia (NATA).
NATA Accredited Laboratory Number: 5292

EMC Technologies Pty Ltd is NATA accredited for the following standards:

Table 8

AS/NZS 2772.2:	RF and microwave radiation hazard measurement
ACMA:	Radio communications (Electromagnetic Radiation - Human Exposure) Standard 2003, as amended.
FCC:	Guidelines for Human Exposure to RF Electromagnetic Field OET65C 01/01
EN 50360: 2001	Product standard to demonstrate the compliance of mobile phones with the basic restrictions related to human exposure to electromagnetic fields (300 MHz – 3 GHz)
EN 62209-1:2006	Human Exposure to radio frequency fields from hand-held and body-mounted wireless communication devices - Human models instrumentation and procedures. Part 1: Procedure to determine the specific absorption rate (SAR) for hand-held devices used in close proximity to the ear (300 MHz to 3 GHz)
EN 62209-2:2010	Human Exposure to radio frequency fields from hand-held and body-mounted wireless communication devices - Human models instrumentation and procedures Part 2: Procedure to determine the specific absorption rate (SAR) for wireless communication devices used in close proximity to the human body (frequency range of 30 MHz to 6 GHz)
IEEE 1528: 2003	Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head Due to Wireless Communications Devices: Measurement Techniques.

Refer to NATA website www.nata.asn.au for the full scope of accreditation.

5.3 Environmental Factors

The measurements were performed in a shielded room with no background RF signals. The temperature in the laboratory was controlled to within $21 \pm 1^\circ\text{C}$, the humidity was in the range 38% to 49%. The liquid parameters are measured daily prior to the commencement of each test. Tests were performed to check that reflections within the environment did not influence the SAR measurements. The noise floor of the DASY5 SAR measurement system using the SN3657 probe was less than $5\mu\text{V}$ in both air and liquid mediums.

6.0 DESCRIPTION OF SAR MEASUREMENT SYSTEM

Table 9

Applicable Head Configurations	: None
Applicable Body Configurations	: Lap Held Position : Edge On Position : Bystander Position

6.1 Probe Positioning System

The measurements were performed with the state-of-the-art automated near-field scanning system **DASY5 Version 52** from Schmid & Partner Engineering AG (SPEAG). The DASY5 fully complies with the IEEE 1528 and EN62209-1 and EN62209-2 SAR measurement requirements.

6.2 E-Field Probe Type and Performance

The SAR measurements were conducted with SPEAG dosimetric probe EX3DV4 Serial: 3657. Please refer to appendix C for detailed information.

6.3 System verification

6.3.1 System verification Results @ 5GHz

The following table lists the dielectric properties of the tissue simulating liquid measured prior to SAR system verification. The results of the system verification are listed in columns 4 and 5. The forward power into the reference dipole for SAR system verification was adjusted to 100 mW.

Table 10 System verification Results (Dipole: SPEAG D5GHzV2 SN: 1008)

1. System Frequency and verification Date	2. ϵ_r (measured)	3. σ (mho/m) (measured)	4. Measured SAR 1g (mW/g)	5. Measured SAR 10g (mW/g)
5200 MHz 20 th August 2013	47.2	5.22	7.64	2.18
5500 MHz 21 st August 2013	47.9	5.80	8.41	2.38
5800 MHz 27 th August 2013	46.1	6.11	7.41	2.09
5200 MHz 4 th Sept. 2013	47.2	5.40	7.49	2.15
5500 MHz 4 th Sept. 2013	49.3	5.61	7.86	2.23
5800 MHz 4 th Sept. 2013	48.6	6.14	7.76	2.21

6.3.2 Deviation from reference system verification values

The SPEAG calibration reference SAR value is the SAR system verification result obtained in a specific dielectric liquid using the validation dipole (D5GHzV2) during calibration. The measured one-gram SAR should be within 10% of the expected target reference values shown in below.

Table 11 Deviation from reference system verification values in 5.6 GHz band

Frequency and Date	Measured SAR 1g (mW/g)	Measured SAR 1g (Normalized to 1W)	SPEAG Calibration reference SAR Value 1g (mW/g)	Deviation From SPEAG Reference 1g (%)
5200MHz 20 th August 2013	7.64	76.40	75.6	1.06
5500MHz 21 st August 2013	8.41	84.10	82.3	2.19
5800 MHz 27 th August 2013	7.41	74.10	76.7	-3.39
5200MHz 4 th Sept. 2013	7.49	74.90	75.6	-0.93
5500MHz 4 th Sept. 2013	7.86	78.60	82.3	-4.50
5800MHz 4 th Sept. 2013	7.76	77.60	76.7	1.17

NOTE: All reference system verification values are referenced to 1W input power.

6.3.3 Liquid Depth 15cm

During the SAR measurement process the liquid level was maintained to a level of 15cm with a tolerance of 0.5cm.

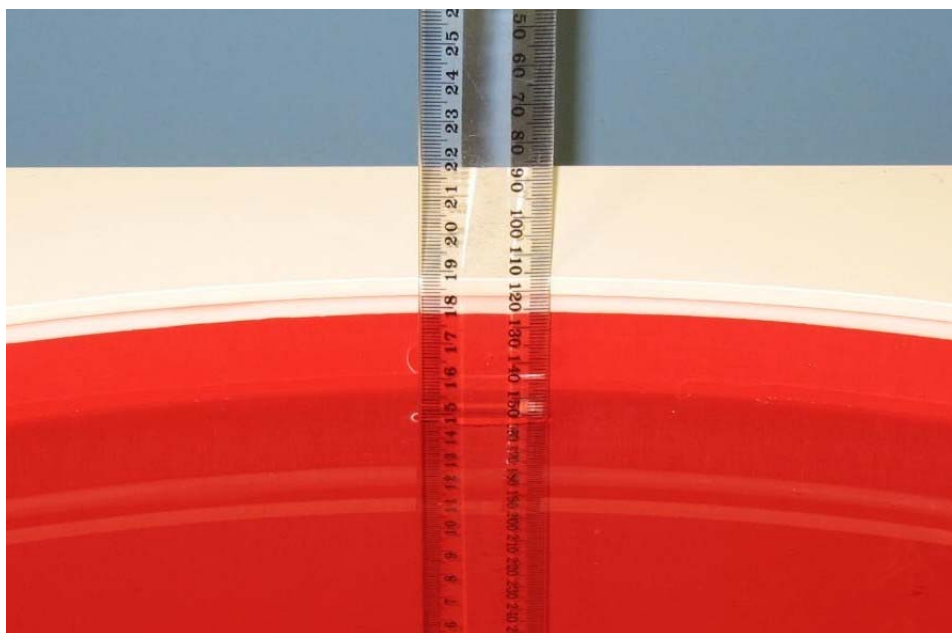


Photo of liquid Depth in Flat Phantom

6.3.4 Phantom Properties

The phantoms used during the testing comply with the IEEE 1528 and EN62209-1 and EN62209-2 SAR measurement requirements.

Table 12 Phantom Properties

Phantom Properties	
Depth of Phantom	17 cm
Width of flat section	40 cm
Length of flat section	65 cm
Thickness of flat section	2.0mm +/-0.2mm (flat section)
Dielectric Constant	<5.0
Loss Tangent	<0.05

6.4 Phantom Properties

The phantom used during the testing complies with the, IEEE 1528 and EN62209-1 and EN62209-2 SAR measurement requirements.



This document is issued in accordance with NATA's accreditation requirements. The results of tests, calibration and/or measurements included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing and calibration reports.

This document shall only be reproduced in full, with the exception of the certificate on p3

6.5 Tissue Material Properties

The dielectric parameters of the brain simulating liquid were measured prior to SAR assessment using the HP85070A dielectric probe kit and HP8753ES Network Analyser. The actual dielectric parameters are shown in the following table.

Table 13 Measured Body Simulating Liquid Dielectric Values for 5200MHz range

Frequency Band	ϵ_r (target)	σ (target)	ρ kg/m ³
5180 MHz Body	49.0 ±5%	5.3 ±5%	1000
5240 MHz Body	48.9 ±5%	5.4 ±5%	1000
5260 MHz Body	48.9 ±5%	5.4 ±5%	1000
5320 MHz Body	48.8 ±5%	5.4 ±5%	1000

Table 14 Measured Body Simulating Liquid Dielectric Values for 5600MHz range

Frequency Band	ϵ_r (target)	σ (target)	ρ kg/m ³
5520 MHz Body	48.6 ±5%	5.6 ±5%	1000
5580 MHz Body	48.5 ±5%	5.77 ±5%	1000
5620 MHz Body	48.5 ±5%	5.77 ±5%	1000
5680 MHz Body	48.4 ±5%	5.9 ±5%	1000

Table 15 Measured Body Simulating Liquid Dielectric Values for 5800MHz range

Frequency Band	ϵ_r (target)	σ (target)	ρ kg/m ³
5745 MHz Body	48.3 ±5%	5.9 ±5%	1000
5785 MHz Body	48.2 ±5%	6.0 ±5%	1000
5825 MHz Body	48.2 ±5%	6.0 ±5%	1000

NOTE: The muscle liquid parameters were within the required tolerances of ±5% for σ and ϵ_r .



This document is issued in accordance with NATA's accreditation requirements. The results of tests, calibration and/or measurements included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing and calibration reports.

This document shall only be reproduced in full, with the exception of the certificate on p3

6.5.1 Liquid Temperature and Humidity

The humidity and dielectric/ambient temperatures were recorded during the assessment of the tissue material dielectric parameters. The difference between the ambient temperature of the liquid during the dielectric measurement and the temperature during tests was less than $|2|^\circ\text{C}$.

Table 16 Temperature and Humidity recorded for each day

Date	Ambient Temperature ($^\circ\text{C}$)	Liquid Temperature ($^\circ\text{C}$)	Humidity (%)
20 th August 2013	21.0	20.8	39
21 st August 2013	21.8	21.5	38
27 th August 2013	21.7	21.5	38
4 th Sept. 2013	20.9	20.5	41

6.6 Simulated Tissue Composition Used for SAR Test

The tissue simulating liquids are created prior to the SAR evaluation and often require slight modification each day to obtain the correct dielectric parameters.

Table 17 Tissue Type: Muscle @ 5600MHz

EMCT Liquid, Volume of Liquid: 60 Litres

Approximate Composition	% By Weight
Distilled Water	77.5
Salt	0.3
Triton X-100	22.2

6.7 Device Holder for Laptops and P 10.1 Phantom

A low loss clamp was used to position the DUT underneath the phantom surface.
Refer to Appendix A for photographs of device positioning



7.0 SAR MEASUREMENT PROCEDURE USING DASY5

The SAR evaluation was performed with the SPEAG DASY5 system. A summary of the procedure follows:

- a) A measurement of the SAR value at a fixed location is used as a reference value for assessing the power drop of the DUT. The SAR at this point is measured at the start of the test, and then again at the end of the test.
- b) The SAR distribution at the exposed flat section of the flat phantom is measured at a distance of 2.0 mm from the inner surface of the shell. The area covers the entire dimension of the DUT and the horizontal grid spacing is 10 mm x 10 mm. The actual Area Scan has dimensions of 90mm x 120mm surrounding the test device. Based on this data, the area of the maximum absorption is determined by Spline interpolation.
- c) Around this point, a volume of 24 mm x 24 mm x 22 mm is assessed by measuring 7 x 7 x 12 points. On the basis of this data set, the spatial peak SAR value is evaluated with the following procedure:
 - (i) The data at the surface are extrapolated, since the centre of the dipoles is 1.0 mm away from the tip of the probe and the distance between the surface and the lowest measuring point is 2.0 mm. The extrapolation is based on a least square algorithm. A polynomial of the fourth order is calculated through the points in z-axes. This polynomial is then used to evaluate the points between the surface and the probe tip.
 - (ii) The maximum interpolated value is searched with a straightforward algorithm. Around this maximum the SAR values averaged over the spatial volumes (1 g and 10 g) are computed using the 3D-Spline interpolation algorithm. The 3D-Spline is composed of three one-dimensional splines with the "Not a knot"- condition (in x, y and z-direction). The volume is integrated with the trapezoidal – algorithm. One thousand points (10 x 10 x 10) are interpolated to calculate the averages.
 - (iii) All neighbouring volumes are evaluated until no neighbouring volume with a higher average value is found.
 - (iv) The SAR value at the same location as in Step (a) is again measured to evaluate the actual power drift.



This document is issued in accordance with NATA's accreditation requirements. The results of tests, calibration and/or measurements included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing and calibration reports.

This document shall only be reproduced in full, with the exception of the certificate on p3

8.0 MEASUREMENT UNCERTAINTY

The uncertainty analysis is based on the template listed in the IEEE Std 1528-2003 for both device SAR tests and Validation uncertainty. The measurement uncertainty of a specific device is evaluated independently.

Table 18 Uncertainty Budget for DASY5 Version 52 – DUT SAR test 5GHz

Error Description	Uncert. Value	Prob. Dist.	Div.	C _i (1g)	C _i (10g)	1g u _i	10g u _i	v _i
Measurement System								
Probe Calibration	6.55	N	1.00	1	1	6.55	6.55	∞
Axial Isotropy	4.7	R	1.73	0.7	0.7	1.90	1.90	∞
Hemispherical Isotropy	9.6	R	1.73	0.7	0.7	3.88	3.88	∞
Boundary Effects	2	R	1.73	1	1	1.15	1.15	∞
Linearity	4.7	R	1.73	1	1	2.71	2.71	∞
System Detection Limits	1	R	1.73	1	1	0.58	0.58	∞
Readout Electronics	0.3	N	1.00	1	1	0.30	0.30	∞
Response Time	0.8	R	1.73	1	1	0.46	0.46	∞
Integration Time	2.6	R	1.73	1	1	1.50	1.50	∞
RF Ambient Noise	3	R	1.73	1	1	1.73	1.73	∞
RF Ambient Reflections	3	R	1.73	1	1	1.73	1.73	∞
Probe Positioner	0.8	R	1.73	1	1	0.46	0.46	∞
Probe Positioning	9.9	R	1.73	1	1	5.72	5.72	∞
Max. SAR Eval.	4	R	1.73	1	1	2.31	2.31	∞
Post Processing	4	R	1.73	1	1	2.31	2.31	∞
Test Sample Related								
Power Scaling	0	R	1.73	1	1	0.00	0.00	∞
Test Sample Positioning	2.9	N	1.00	1	1	2.90	2.90	145
Device Holder Uncertainty	3.6	N	1.00	1	1	3.60	3.60	5
Output Power Variation – SAR Drift Measurement	4.72	R	1.73	1	1	2.73	2.73	∞
Phantom and Setup								
Phantom Uncertainty	7.9	R	1.73	1	1	4.56	4.56	∞
Liquid Conductivity – Deviation from target values	5	R	1.73	0.64	0.43	1.85	1.24	∞
Liquid Permittivity – Deviation from target values	5	R	1.73	0.6	0.49	1.73	1.41	∞
Liquid Conductivity – Measurement uncertainty	2.5	N	1.00	0.64	0.71	1.60	1.78	∞
Liquid Permittivity – Measurement uncertainty	2.5	N	1.00	0.6	0.26	1.50	0.65	∞
Temp.unc. - Conductivity	1.7	R	1.73	0.78	0.71	0.77	0.70	∞
Temp. unc. - Permittivity	0.3	R	1.73	0.23	0.26	0.04	0.05	∞
Combined standard Uncertainty (u _c)						13.6	13.4	
Expanded Uncertainty (95% CONFIDENCE LEVEL)				k= 2		27.1	26.8	

Estimated total measurement uncertainty for the DASY5 measurement system was ±13.6%. The extended uncertainty (K = 2) was assessed to be ±27.1% based on 95% confidence level. The uncertainty is not added to the measurement result.



This document is issued in accordance with NATA's accreditation requirements. The results of tests, calibration and/or measurements included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing and calibration reports.

This document shall only be reproduced in full, with the exception of the certificate on p3

Table 19 Uncertainty Budget for DASY5 Version 52 – System verification 5GHz

Error Description	Uncert. Value	Prob. Dist.	Div.	C _i (1g)	C _i (10g)	1g u _i	10g u _i	v _i
Measurement System								
Probe Calibration	6.55	N	1.00	1	1	6.55	6.55	∞
Axial Isotropy	4.7	R	1.73	1	1	2.71	2.71	∞
Hemispherical Isotropy	9.6	R	1.73	0	0	0.00	0.00	∞
Boundary Effects	1	R	1.73	1	1	0.58	0.58	∞
Linearity	4.7	R	1.73	1	1	2.71	2.71	∞
System Detection Limits	1	R	1.73	1	1	0.58	0.58	∞
Readout Electronics	0.3	N	1.00	1	1	0.30	0.30	∞
Response Time	0	R	1.73	1	1	0.00	0.00	∞
Integration Time	0	R	1.73	1	1	0.00	0.00	∞
RF Ambient Noise	1	R	1.73	1	1	0.58	0.58	∞
RF Ambient Reflections	1	R	1.73	1	1	0.58	0.58	∞
Probe Positioner	0.8	R	1.73	1	1	0.46	0.46	∞
Probe Positioning	6.7	R	1.73	1	1	3.87	3.87	∞
Max. SAR Eval.	2	R	1.73	1	1	1.15	1.15	∞
Post Processing	2	R	1.73	1	1	1.15	1.15	∞
Dipole Related								
Deviation of exp. dipole	5.5	R	1.73	1	1	3.18	3.18	∞
Dipole Axis to Liquid Dist.	2	R	1.73	1	1	1.15	1.15	∞
Input power & SAR drift	3.40	R	1.73	1	1	1.96	1.96	∞
Phantom and Setup								
Phantom Uncertainty	4	R	1.73	1	1	2.31	2.31	∞
Liquid Conductivity – Deviation from target values	5	R	1.73	0.64	0.43	1.85	1.24	∞
Liquid Permittivity – Deviation from target values	5	R	1.73	0.6	0.49	1.73	1.41	∞
Liquid Conductivity – Measurement uncertainty	2.5	N	1.00	0.78	0.71	1.95	1.78	∞
Liquid Permittivity – Measurement uncertainty	2.5	N	1.00	0.26	0.26	0.65	0.65	∞
Temp.unc. - Conductivity	1.7	R	1.73	0.78	0.71	0.77	0.70	∞
Temp. unc. - Permittivity	0.3	R	1.73	0.23	0.26	0.04	0.05	∞
Combined standard Uncertainty (u _c)						10.4	10.3	
Expanded Uncertainty (95% CONFIDENCE LEVEL)			k= 2			20.9	20.5	

Estimated total measurement uncertainty for the DASY5 measurement system was ±10.4%. The extended uncertainty (K = 2) was assessed to be ±20.9% based on 95% confidence level. The uncertainty is not added to the measurement result.



This document is issued in accordance with NATA's accreditation requirements. The results of tests, calibration and/or measurements included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing and calibration reports.

This document shall only be reproduced in full, with the exception of the certificate on p3

9.0 EQUIPMENT LIST AND CALIBRATION DETAILS

Table 20 SPEAG DASY5 Version 52

Equipment Type	Manufacturer	Model Number	Serial Number	Calibration Due	Used For this Test?
Robot - Six Axes	Staubli	RX90BL	N/A	Not applicable	✓
Robot Remote Control	SPEAG	CS7MB	RX90B	Not applicable	✓
SAM Phantom	SPEAG	N/A	1260	Not applicable	
SAM Phantom	SPEAG	N/A	1060	Not applicable	
Flat Phantom	AndreT	10.1	P 10.1	Not Applicable	
Flat Phantom	AndreT	9.1	P 9.1	Not Applicable	
Flat Phantom	SPEAG	ELI 4.0	1101	Not Applicable	✓
Data Acquisition Electronics	SPEAG	DAE3 V1	359	03-June-2014	
Data Acquisition Electronics	SPEAG	DAE3 V1	442	04-Dec-2013	✓
Probe E-Field - Dummy	SPEAG	DP1	N/A	Not applicable	
Probe E-Field	SPEAG	ET3DV6	1380	10-Dec-2013	
Probe E-Field	SPEAG	ET3DV6	1377	14-June-2014	
Probe E-Field	SPEAG	ES3DV6	3029	Not Used	
Probe E-Field	SPEAG	EX3DV4	3563	14-June-2014	
Probe E-Field	SPEAG	EX3DV4	3657	7-Dec-2013	✓
Antenna Dipole 300 MHz	SPEAG	D300V3	1012	11-Dec-2014	
Antenna Dipole 450 MHz	SPEAG	D450V3	1074	11-Dec-2014	
Antenna Dipole 750 MHz	SPEAG	D750V2	1051	9-Jan-2014	
Antenna Dipole 900 MHz	SPEAG	D900V2	047	22-June-2014	
Antenna Dipole 1640 MHz	SPEAG	D1640V2	314	20-June-2014	
Antenna Dipole 1800 MHz	SPEAG	D1800V2	242	20-June-2014	
Antenna Dipole 1950 MHz	SPEAG	D1950V3	1113	6-Dec -2014	
Antenna Dipole 2450 MHz	SPEAG	D2450V2	724	04-Dec-2014	
Antenna Dipole 2600 MHz	SPEAG	D2600V2	1044	10-Jan-2014	
Antenna Dipole 3500 MHz	SPEAG	D3500V2	1002	13-July-2013	
Antenna Dipole 5600 MHz	SPEAG	D5GHzV2	1008	14-Dec-2013	✓
RF Amplifier	EIN	603L	N/A	*In test	
RF Amplifier	Mini-Circuits	ZHL-42	N/A	*In test	
RF Amplifier	Mini-Circuits	ZVE-8G	N/A	*In test	✓
Synthesized signal generator	Hewlett Packard	ESG-D3000A	GB37420238	*In test	
RF Power Meter	Hewlett Packard	437B	3125012786	30-Aug-2013	✓
RF Power Sensor 0.01 - 18 GHz	Hewlett Packard	8481H	1545A01634	03-Sept-2013	✓
RF Power Meter	Rohde & Schwarz	NRP	101415	17-Sept-2013	✓
RF Power Sensor	Rohde & Schwarz	NRP - Z81	100174	17-Sept-2013	✓
RF Power Meter Dual	Hewlett Packard	435A	1733A05847	*In test	✓
RF Power Sensor	Hewlett Packard	8482A	2349A10114	*In test	✓
Network Analyser	Hewlett Packard	8714B	GB3510035	27-Sept-2013	
Network Analyser	Hewlett Packard	8753ES	JP39240130	5-Nov-2013	✓
Dual Directional Coupler	Hewlett Packard	778D	1144 04700	*In test	
Dual Directional Coupler	NARDA	3022	75453	*In test	✓
Radio Communication Test Set	Rohde & Schwarz	CMU200	101573	Not Applicable	
Radio Communication Test Set	Anritsu	MT8820A	6200240559	Not Applicable	
Radio Communication Test Set	Agilent	PXT E6621A	MY51100168	Not Applicable	

* Calibrated during the test for the relevant parameters.



This document is issued in accordance with NATA's accreditation requirements. The results of tests, calibration and/or measurements included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing and calibration reports.

This document shall only be reproduced in full, with the exception of the certificate on p3

10.0 TEST METHODOLOGY

Notebooks should be evaluated in normal use positions, typical for lap-held bottom-face only. However the number of positions will depend on the number of configurations the laptop can be operated in. The “LIFEBOOK T series” can be used in either a conventional laptop position (see Appendix A) or a Tablet configuration. The antenna location in the “LIFEBOOK T series ” is closest to the top of the screen when used in a conventional laptop configuration and due to the separation distances involved between the phantom and the laptop antenna, testing is not required in this position.

10.1 Position

10.1.1 “Lap Held” Position Definition (0mm spacing)

The DUT was tested in the 2.00 mm flat section of the SPEAG ELI4 phantom for the “Lap Held” position. The Transceiver was placed at the bottom of the phantom and suspended in such way that the back of the DUT was touching the phantom. This device orientation simulates the PC’s normal use – being held on the lap of the user. A spacing of 0mm ensures that the SAR results are conservative and represent a worst-case position.

10.1.2 “Edge On” Position (Portrait or Landscape)

The DUT was tested in the (2.00 mm) flat section of the SPEAG ELI4 phantom for the “Edge On” position. The Antenna edge of the Transceiver was placed underneath the flat section of the phantom and suspended until the edge touched the phantom. *Refer to Appendix A for photos of measurement positions.*

10.1.3 “Bystander” Position (25mm spacing)

The DUT was tested in the 2.00 mm flat section of the SPEAG ELI4 phantom for the “Bystander” position. The Transceiver was placed at the bottom of the phantom and suspended in such way that the back of its LCD screen was parallel to phantom and at 25mm distance. This orientation simulates use of the device in a way that allows occasional RF exposure of the nearby person (Bystander).



This document is issued in accordance with NATA's accreditation requirements. The results of tests, calibration and/or measurements included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing and calibration reports.

This document shall only be reproduced in full, with the exception of the certificate on p3


10.2 List of All Test Cases (Antenna In/Out, Test Frequencies, User Modes)

The DUT has a fixed antenna. Depending on the measured SAR level up to three test channels with the test sample operating at maximum power were recorded. The following table represents the matrix used to determine what testing was required. All relevant provisions of KDB 447498 are applied for SAR measurements of the host system. KDB 616217 was used in the SAR evaluation.


Table 21 Testing configurations

Phantom Configuration	*Device Mode	Antenna	Test Configurations		
			Channel (Low)	Channel (Middle)	Channel (High)
Lap Held	OFDM 5GHz All Bands	A		X	
		B		X	
Bystander	OFDM 5GHz All Bands	A		X	
		B		X	
Edge On	OFDM 5GHz All Bands	A		X	
		B		X	

Legend



Testing Required in this configuration



Testing required in this configuration only if SAR of middle channel is more than 3dB below the SAR limit or it is the worst case.

NOTE: Throughout this report, Antenna A and B refer to Tx1 and Tx2 in the host respectively.



This document is issued in accordance with NATA's accreditation requirements. The results of tests, calibration and/or measurements included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing and calibration reports.

This document shall only be reproduced in full, with the exception of the certificate on p3

11.0 SAR MEASUREMENT RESULTS

The SAR values averaged over 1g tissue masses were determined for the sample DUT for all test configurations listed in section 10.2.

11.1 5GHz Band SAR Results

Table 22 SAR MEASUREMENT RESULTS Lower Band – OFDM Mode

Test Position	Plot No.	Test Mode	Test Ch.	Test Freq. (MHz)	SAR (1g) mW/g	Drift (dB)	ϵ_r (target 48.9 \pm 5% 46.46 to 51.35)	σ (target 5.4 \pm 5% 5.13 to 5.67)
Bystander 25mm Spacing OFDM 5200 MHz Antenna A (1)	1.	OFDM 5 GHz 6 Mbs (802.11a)	52	5260	0.0973	-0.21	47.12	5.342
Bystander 25mm Spacing OFDM 5200 MHz Antenna B (2)	2.	OFDM 5 GHz 6 Mbs (802.11a)	52	5260	0.0372	0.02	47.12	5.342
Edge On Primary Portrait OFDM 5200 MHz Antenna B (2)	3.	OFDM 5 GHz 6 Mbs (802.11a)	52	5260	0.04	0.21	47.12	5.342
Edge On Secondary Portrait OFDM 5200 MHz Antenna A (1)		OFDM 5 GHz 6 Mbs (802.11a)	52	5260	Noise Floor	N/A	47.12	5.342
Test Position	Plot No.	Test Mode	Test Ch.	Test Freq. (MHz)	SAR (1g) mW/g	Drift (dB)	ϵ_r (target 49.0 \pm 5% 46.55 to 51.45)	σ (target 5.3 \pm 5% 5.04 to 5.57)
Edge On Secondary Landscape OFDM 5200 MHz Antenna A (1) Low Power Module Settings	4.	OFDM 5 GHz 6 Mbs (802.11a)	36	5180	0.66	-0.06	47.24	5.372
Test Position	Plot No.	Test Mode	Test Ch.	Test Freq. (MHz)	SAR (1g) mW/g	Drift (dB)	ϵ_r (target 48.9 \pm 5% 46.46 to 51.35)	σ (target 5.4 \pm 5% 5.13 to 5.67)
Edge On Secondary Landscape OFDM 5200 MHz Antenna A (1) Low Power Module Settings	5.	OFDM 5 GHz 6 Mbs (802.11a)	48	5240	0.821	-0.05	47.11	5.463
Test Position	Plot No.	Test Mode	Test Ch.	Test Freq. (MHz)	SAR (1g) mW/g	Drift (dB)	ϵ_r (target 48.9 \pm 5% 46.46 to 51.35)	σ (target 5.4 \pm 5% 5.13 to 5.67)
Edge On Secondary Landscape OFDM 5200 MHz Antenna A (1) Low Power Module Settings	6.	OFDM 5 GHz 6 Mbs (802.11a)	52	5260	0.806	-0.19	47.01	5.501
Test Position	Plot No.	Test Mode	Test Ch.	Test Freq. (MHz)	SAR (10g) mW/g	Drift (dB)	ϵ_r (target 48.8 \pm 5% 46.36 to 51.24)	σ (target 5.4 \pm 5% 5.13 to 5.67)
Edge On Secondary Landscape OFDM 5200 MHz Antenna A (1) Low Power Module Settings	7.	OFDM 5 GHz 6 Mbs (802.11a)	64	5320	0.812	-0.15	46.9	5.59
Test Position	Plot No.	Test Mode	Test Ch.	Test Freq. (MHz)	SAR (1g) mW/g	Drift (dB)	ϵ_r (target 48.9 \pm 5% 46.46 to 51.35)	σ (target 5.4 \pm 5% 5.13 to 5.67)
Edge On Secondary Landscape OFDM 5200 MHz Antenna A (1) Low Power Module Settings Variability Check	8.	OFDM 5 GHz 6 Mbs (802.11a)	48	5240	0.775	-0.19	47.11	5.463



This document is issued in accordance with NATA's accreditation requirements. The results of tests, calibration and/or measurements included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing and calibration reports.

This document shall only be reproduced in full, with the exception of the certificate on p3

Test Position	Plot No.	Test Mode	Test Ch.	Test Freq. (MHz)	SAR (1g) mW/g	Drift (dB)	ϵ_r (target 49.0 ±5% 46.55 to 51.45)	σ (target 5.3 ±5% 5.04 to 5.57)
Edge On Secondary Landscape OFDM 5200 MHz Antenna B (2)	9.	OFDM 5 GHz 6 Mbs (802.11a)	40	5200	0.657	-0.17	47.24	5.224
Test Position	Plot No.	Test Mode	Test Ch.	Test Freq. (MHz)	SAR (1g) mW/g	Drift (dB)	ϵ_r (target 48.9 ±5% 46.46 to 51.35)	σ (target 5.4 ±5% 5.13 to 5.67)
Edge On Secondary Landscape OFDM 5200 MHz Antenna B (2)	10.	OFDM 5 GHz HT0 (40 MHz) (802.11a)	46	5230	0.669	-0.16	47.19	5.28
Test Position	Plot No.	Test Mode	Test Ch.	Test Freq. (MHz)	SAR (1g) mW/g	Drift (dB)	ϵ_r (target 48.9 ±5% 46.46 to 51.35)	σ (target 5.4 ±5% 5.13 to 5.67)
Edge On Secondary Landscape OFDM 5200 MHz Antenna B (2)	11.	OFDM 5 GHz 6 Mbs (802.11a)	52	5260	0.727	-0.21	47.12	5.342
Test Position	Plot No.	Test Mode	Test Ch.	Test Freq. (MHz)	SAR (1g) mW/g	Drift (dB)	ϵ_r (target 48.8 ±5% 46.36 to 51.24)	σ (target 5.4 ±5% 5.13 to 5.67)
Edge On Secondary Landscape OFDM 5200 MHz Antenna B (2)	12.	OFDM 5 GHz 6 Mbs (802.11a)	60	5300	0.905	-0.16	47.02	5.424
Edge On Secondary Landscape OFDM 5200 MHz Antenna B (2) Variability Check	13.	OFDM 5 GHz 6 Mbs (802.11a)	60	5300	0.944	0.04	47.02	5.424
Test Position	Plot No.	Test Mode	Test Ch.	Test Freq. (MHz)	SAR (1g) mW/g	Drift (dB)	ϵ_r (target 48.9 ±5% 46.46 to 51.35)	σ (target 5.4 ±5% 5.13 to 5.67)
Lap Held OFDM 5200 MHz Antenna A (1)		OFDM 5 GHz 6 Mbs (802.11a)	52	5260	Noise Floor	N/A	47.12	5.342
Lap Held OFDM 5200 MHz Antenna B (2)	14.	OFDM 5 GHz 6 Mbs (802.11a)	52	5260	0.126	-0.06	47.12	5.342
Test Position	Plot No.	Test Mode	Test Ch.	Test Freq. (MHz)	SAR (1g) mW/g	Drift (dB)	ϵ_r (target 49.0 ±5% 46.55 to 51.45)	σ (target 5.3 ±5% 5.04 to 5.57)
System Performance Check with D5GHzV2 Dipole (uniform grid)	15.	CW	0	5200	7.64	-0.01	47.24	5.224
System Performance Check with D5GHzV2 Dipole (uniform grid) 2	16.	CW	0	5200	7.49	-0.09	47.22	5.404

NOTE: The measurement uncertainty of 27.1% for 5GHz testing is not added to the result.

The highest recorded SAR level was 0.944 mW/g in the 5.2 GHz band as evaluated in a 1g cube of averaging mass. This value was obtained in “Edge On Secondary Landscape” position in OFDM 5 GHz 6 Mbs mode, utilizing channel 60 (5300 MHz) and antenna B (2).



This document is issued in accordance with NATA's accreditation requirements. The results of tests, calibration and/or measurements included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing and calibration reports.

This document shall only be reproduced in full, with the exception of the certificate on p3

Table 23 SAR MEASUREMENT RESULTS Middle Band – OFDM Mode

Test Position	Plot No.	Test Mode	Test Ch.	Test Freq. (MHz)	SAR (1g) mW/g	Drift (dB)	εr (target 48.5 ±5% 46.08 to 50.93)	σ (target 5.77 ±5% 5.48 to 6.06)
Bystander 25mm Spacing OFDM 5600 MHz Antenna A (1)	17.	OFDM 5 GHz 6 Mbs (802.11a)	116	5580	0.208	-0.13	47.67	5.915
Bystander 25mm Spacing OFDM 5600 MHz Antenna B (2)	18.	OFDM 5 GHz 6 Mbs (802.11a)	116	5580	0.128	0.08	47.67	5.915
Edge On Primary Portrait OFDM 5600 MHz Antenna B (2)	19.	OFDM 5 GHz 6 Mbs (802.11a)	116	5580	0.104	-0.18	47.67	5.915
Edge On Secondary Portrait OFDM 5600 MHz Antenna A (1)		OFDM 5 GHz 6 Mbs (802.11a)	116	5580	Noise Floor	N/A	47.67	5.915
Test Position	Plot No.	Test Mode	Test Ch.	Test Freq. (MHz)	SAR (1g) mW/g	Drift (dB)	εr (target 48.6 ±5% 46.17 to 51.03)	σ (target 5.6 ±5% 5.32 to 5.88)
Edge On Secondary Landscape OFDM 5600 MHz Antenna A (1) Low Power Module Settings	20.	OFDM 5 GHz 6 Mbs (802.11a)	104	5520	0.792	-0.13	47.83	5.831
Test Position	Plot No.	Test Mode	Test Ch.	Test Freq. (MHz)	SAR (1g) mW/g	Drift (dB)	εr (target 48.5 ±5% 46.08 to 50.93)	σ (target 5.77 ±5% 5.48 to 6.06)
Edge On Secondary Landscape OFDM 5600 MHz Antenna A (1) Low Power Module Settings	21.	OFDM 5 GHz 6 Mbs (802.11a)	116	5580	0.964	0.05	47.67	5.915
Test Position	Plot No.	Test Mode	Test Ch.	Test Freq. (MHz)	SAR (1g) mW/g	Drift (dB)	εr (target 48.5 ±5% 46.08 to 50.93)	σ (target 5.77 ±5% 5.48 to 6.06)
Edge On Secondary Landscape OFDM 5600 MHz Antenna A (1) Low Power Module Settings	22.	OFDM 5 GHz 6 Mbs (802.11a)	124	5620	1.00	-0.09	47.54	5.972
Test Position	Plot No.	Test Mode	Test Ch.	Test Freq. (MHz)	SAR (1g) mW/g	Drift (dB)	εr (target 48.4 ±5% 45.98 to 50.82)	σ (target 5.9 ±5% 5.61 to 6.20)
Edge On Secondary Landscape OFDM 5600 MHz Antenna A (1) Low Power Module Settings	23.	OFDM 5 GHz 6 Mbs (802.11a)	136	5680	0.864	-0.21	47.38	6.067
Test Position	Plot No.	Test Mode	Test Ch.	Test Freq. (MHz)	SAR (1g) mW/g	Drift (dB)	εr (target 48.5 ±5% 46.08 to 50.93)	σ (target 5.77 ±5% 5.48 to 6.06)
Edge On Secondary Landscape OFDM 5600 MHz Antenna A (1) Low Power Module Settings Variability Check	24.	OFDM 5 GHz 6 Mbs (802.11a)	116	5580	0.98	0.07	47.67	5.915



This document is issued in accordance with NATA's accreditation requirements. The results of tests, calibration and/or measurements included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing and calibration reports.

This document shall only be reproduced in full, with the exception of the certificate on p3

Test Position	Plot No.	Test Mode	Test Ch.	Test Freq. (MHz)	SAR (1g) mW/g	Drift (dB)	εr (target 48.6 ±5% 46.17 to 51.03)	σ (target 5.6 ±5% 5.32 to 5.88)
Edge On Secondary Landscape OFDM 5600 MHz Antenna B (2)	25.	OFDM 5 GHz 6 Mbs (802.11a)	104	5520	1.18	-0.15	47.83	5.831
Test Position	Plot No.	Test Mode	Test Ch.	Test Freq. (MHz)	SAR (1g) mW/g	Drift (dB)	εr (target 48.5 ±5% 46.08 to 50.93)	σ (target 5.77 ±5% 5.48 to 6.06)
Edge On Secondary Landscape OFDM 5600 MHz Antenna B (2)	26.	OFDM 5 GHz 6 Mbs (802.11a)	116	5580	1.29	-0.02	47.67	5.915
Test Position	Plot No.	Test Mode	Test Ch.	Test Freq. (MHz)	SAR (1g) mW/g	Drift (dB)	εr (target 48.5 ±5% 46.08 to 50.93)	σ (target 5.77 ±5% 5.48 to 6.06)
Edge On Secondary Landscape OFDM 5600 MHz Antenna B (2)	27.	OFDM 5 GHz 6 Mbs (802.11a)	124	5620	1.39	-0.01	47.54	5.972
Edge On Secondary Landscape OFDM 5600 MHz Antenna B (2) Variability Check	28.	OFDM 5 GHz 6 Mbs (802.11a)	124	5620	1.53	-0.01	47.54	5.972
Edge On Secondary Landscape OFDM 5600 MHz Antenna B (2)	29.	OFDM 5 GHz 6 Mbs (802.11a)	124	5620	1.45	-0.08	47.54	5.972
Test Position	Plot No.	Test Mode	Test Ch.	Test Freq. (MHz)	SAR (1g) mW/g	Drift (dB)	εr (target 48.4 ±5% 45.98 to 50.82)	σ (target 5.9 ±5% 5.61 to 6.20)
Edge On Secondary Landscape OFDM 5600 MHz Antenna B (2)	30.	OFDM 5 GHz 6 Mbs (802.11a)	136	5680	1.08	-0.2	47.38	6.067
Test Position	Plot No.	Test Mode	Test Ch.	Test Freq. (MHz)	SAR (1g) mW/g	Drift (dB)	εr (target 48.5 ±5% 46.08 to 50.93)	σ (target 5.77 ±5% 5.48 to 6.06)
Lap Held OFDM 5600 MHz Antenna A (1)		OFDM 5 GHz 6 Mbs (802.11a)	116	5580	Noise Floor	N/A	47.67	5.915
Lap Held OFDM 5600 MHz Antenna B (2)	31.	OFDM 5 GHz 6 Mbs (802.11a)	116	5580	0.169	0.04	47.67	5.915
Test Position	Plot No.	Test Mode	Test Ch.	Test Freq. (MHz)	SAR (1g) mW/g	Drift (dB)	εr (target 48.6 ±5% 46.17 to 51.03)	σ (target 5.6 ±5% 5.32 to 5.88)
System Performance Check with D5GHzV2 Dipole (uniform grid)	32.	CW	1	5500	8.41	-0.17	47.9	5.796
System Performance Check with D5GHzV2 Dipole (uniform grid) 2	33.	CW	1	5500	7.86	-0.08	49.34	5.612

NOTE: The measurement uncertainty of 27.1% for 5GHz testing is not added to the result.

The highest Reported SAR level in the 5.6 GHz band was 1.53 mW/g as evaluated in a 1g cube of averaging mass. This value was obtained in Edge On Secondary Landscape position in OFDM 5 GHz 6 Mbs mode, utilizing channel 124 (5620MHz) and antenna B (2).



This document is issued in accordance with NATA's accreditation requirements. The results of tests, calibration and/or measurements included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing and calibration reports.

This document shall only be reproduced in full, with the exception of the certificate on p3

Table 24 SAR MEASUREMENT RESULTS Upper Band – OFDM Mode

Test Position	Plot No.	Test Mode	Test Ch.	Test Freq. (MHz)	SAR (1g) mW/g	Drift (dB)	ϵ_r (target 48.2 ±5% 45.79 to 50.61)	σ (target 6.0 ±5% 5.7 to 6.3)
Bystander 25mm Spacing OFDM 5800 MHz Antenna A (1)	34.	OFDM 5 GHz 6 Mbs (802.11a)	157	5785	0.112	0.14	46.11	6.089
Bystander 25mm Spacing OFDM 5800 MHz Antenna B (2)	35.	OFDM 5 GHz 6 Mbs (802.11a)	157	5785	0.111	0	46.11	6.089
Edge On Primary Portrait OFDM 5800 MHz Antenna B (2)	36.	OFDM 5 GHz 6 Mbs (802.11a)	157	5785	0.0547	-0.18	46.11	6.089
Edge On Secondary Portrait OFDM 5800 MHz Antenna A (1)		OFDM 5 GHz 6 Mbs (802.11a)	157	5785	Noise Floor	N/A	46.11	6.089
Test Position	Plot No.	Test Mode	Test Ch.	Test Freq. (MHz)	SAR (1g) mW/g	Drift (dB)	ϵ_r (target 48.3 ±5% 45.89 to 50.72)	σ (target 5.9 ±5% 5.61 to 6.20)
Edge On Secondary Landscape OFDM 5800 MHz Antenna A (1) Low Power Module Settings	37.	OFDM 5 GHz 6 Mbs (802.11a)	149	5745	0.672	0.07	48.75	6.025
Test Position	Plot No.	Test Mode	Test Ch.	Test Freq. (MHz)	SAR (1g) mW/g	Drift (dB)	ϵ_r (target 48.2 ±5% 45.79 to 50.61)	σ (target 6.0 ±5% 5.7 to 6.3)
Edge On Secondary Landscape OFDM 5800 MHz Antenna A (1) Low Power Module Settings	38.	OFDM 5 GHz 6 Mbs (802.11a)	157	5785	0.473	-0.15	48.66	6.114
Test Position	Plot No.	Test Mode	Test Ch.	Test Freq. (MHz)	SAR (1g) mW/g	Drift (dB)	ϵ_r (target 48.2 ±5% 45.79 to 50.61)	σ (target 6.0 ±5% 5.7 to 6.3)
Edge On Secondary Landscape OFDM 5800 MHz Antenna A (1) Low Power Module Settings	39.	OFDM 5 GHz 6 Mbs (802.11a)	165	5825	0.427	0.16	48.62	6.169



This document is issued in accordance with NATA's accreditation requirements. The results of tests, calibration and/or measurements included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing and calibration reports.

This document shall only be reproduced in full, with the exception of the certificate on p3

Test Position	Plot No.	Test Mode	Test Ch.	Test Freq. (MHz)	SAR (1g) mW/g	Drift (dB)	ϵ_r (target 48.3 \pm 5% 45.89 to 50.72)	σ (target 5.9 \pm 5% 5.61 to 6.20)
Edge On Secondary Landscape OFDM 5800 MHz Antenna B (2)	40.	OFDM 5 GHz 6 Mbs (802.11a)	149	5745	1.04	-0.05	46.25	6.02
Test Position	Plot No.	Test Mode	Test Ch.	Test Freq. (MHz)	SAR (1g) mW/g	Drift (dB)	ϵ_r (target 48.2 \pm 5% 45.79 to 50.61)	σ (target 6.0 \pm 5% 5.7 to 6.3)
Edge On Secondary Landscape OFDM 5800 MHz Antenna B (2)	41.	OFDM 5 GHz 6 Mbs (802.11a)	157	5785	1.21	-0.16	46.11	6.089
Edge On Secondary Landscape OFDM 5800 MHz Antenna B (2) Variability Check	42.	OFDM 5 GHz 6 Mbs (802.11a)	157	5785	1.06	-0.02	46.11	6.089
est Position	Plot No.	Test Mode	Test Ch.	Test Freq. (MHz)	SAR (1g) mW/g	Drift (dB)	ϵ_r (target 48.2 \pm 5% 45.79 to 50.61)	σ (target 6.0 \pm 5% 5.7 to 6.3)
Edge On Secondary Landscape OFDM 5800 MHz Antenna B (2)	43.	OFDM 5 GHz 6 Mbs (802.11a)	165	5825	1	-0.21	46.03	6.129
Test Position	Plot No.	Test Mode	Test Ch.	Test Freq. (MHz)	SAR (1g) mW/g	Drift (dB)	ϵ_r (target 48.2 \pm 5% 45.79 to 50.61)	σ (target 6.0 \pm 5% 5.7 to 6.3)
Lap Held OFDM 5800 MHz Antenna A (1)		OFDM 5 GHz 6 Mbs (802.11a)	157	5785	Noise Floor	N/A	46.11	6.089
Lap Held OFDM 5800 MHz Antenna B (2)	44.	OFDM 5 GHz 6 Mbs (802.11a)	157	5785	0.151	-0.02	46.11	6.089
Test Position	Plot No.	Test Mode	Test Ch.	Test Freq. (MHz)	SAR (1g) mW/g	Drift (dB)	ϵ_r (target 48.2 \pm 5% 45.79 to 50.61)	σ (target 6.0 \pm 5% 5.7 to 6.3)
System Performance Check with D5GHzV2 Dipole (uniform grid)	45.	CW	2	5800	7.41	0.01	46.06	6.105
System Performance Check with D5GHzV2 Dipole (uniform grid) 2	46.	CW	2	5800	7.76	-0.07	48.64	6.143

NOTE: The measurement uncertainty of 27.1% for 5GHz testing is not added to the result.

The highest Reported SAR level in the 5.8 GHz band was 1.21 mW/g as evaluated in a 1g cube of averaging mass. This value was obtained in Edge On Secondary Landscape position in OFDM 5 GHz 6 Mbs mode, utilizing channel 157 (5785 MHz) and antenna B (1).



This document is issued in accordance with NATA's accreditation requirements. The results of tests, calibration and/or measurements included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing and calibration reports.

This document shall only be reproduced in full, with the exception of the certificate on p3

12.0 COMPLIANCE STATEMENT

The Fujitsu Convertible Tablet PC, Model: T734/TH734 with INTEL Mini-PCI Wireless LAN Module (INTEL CENTRINO ADVANCED-N 802.11a/b/g/n), Model: 7260HMW was found to comply with the FCC SAR requirements.

The highest reported SAR level was 1.53 mW/g for a 1g cube. This value was measured at 5620MHz (channel 124) in the “Edge On Secondary Landscape” position in OFDM 5 GHz 6 Mbs modulation mode at the antenna B (1). This was below the limit of 1.6 mW/g for uncontrolled exposure, but was within the band of measurement uncertainty around the limit.

The SAR test Variability checks were conducted and the repeated results are included in the SAR results tables.



This document is issued in accordance with NATA's accreditation requirements. The results of tests, calibration and/or measurements included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing and calibration reports.

This document shall only be reproduced in full, with the exception of the certificate on p3

13.0 ANTENNA HOST PLATFORM LOCATION

