

#01_WLAN2.4GHz_802.11b 1Mbps_Bottom Face_0cm_Ch1;Ant 0

Communication System: 802.11b; Frequency: 2412 MHz; Duty Cycle: 1:1.009

Medium: MSL_2450_131005 Medium parameters used: $f = 2412$ MHz; $\sigma = 1.963$ mho/m; $\epsilon_r = 53.939$; ρ

$= 1000$ kg/m³

Ambient Temperature : 23.4 °C; Liquid Temperature : 22.4 °C

DASY5 Configuration:

- Probe: ES3DV3 - SN3071; ConvF(4.02, 4.02, 4.02); Calibrated: 2013/6/18;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1279; Calibrated: 2013/1/28
- Phantom: ELI 4.0_Front; Type: QDOVA001BB; Serial: 1029
- Measurement SW: DASY52, Version 52.8 (3); SEMCAD X Version 14.6.5 (6469)

Configuration/Ch1/Area Scan (61x71x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (interpolated) = 0.576 mW/g


Configuration/Ch1/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 17.346 V/m; Power Drift = 0.11 dB

Peak SAR (extrapolated) = 0.930 mW/g

SAR(1 g) = 0.438 mW/g; SAR(10 g) = 0.200 mW/g

Maximum value of SAR (measured) = 0.563 mW/g

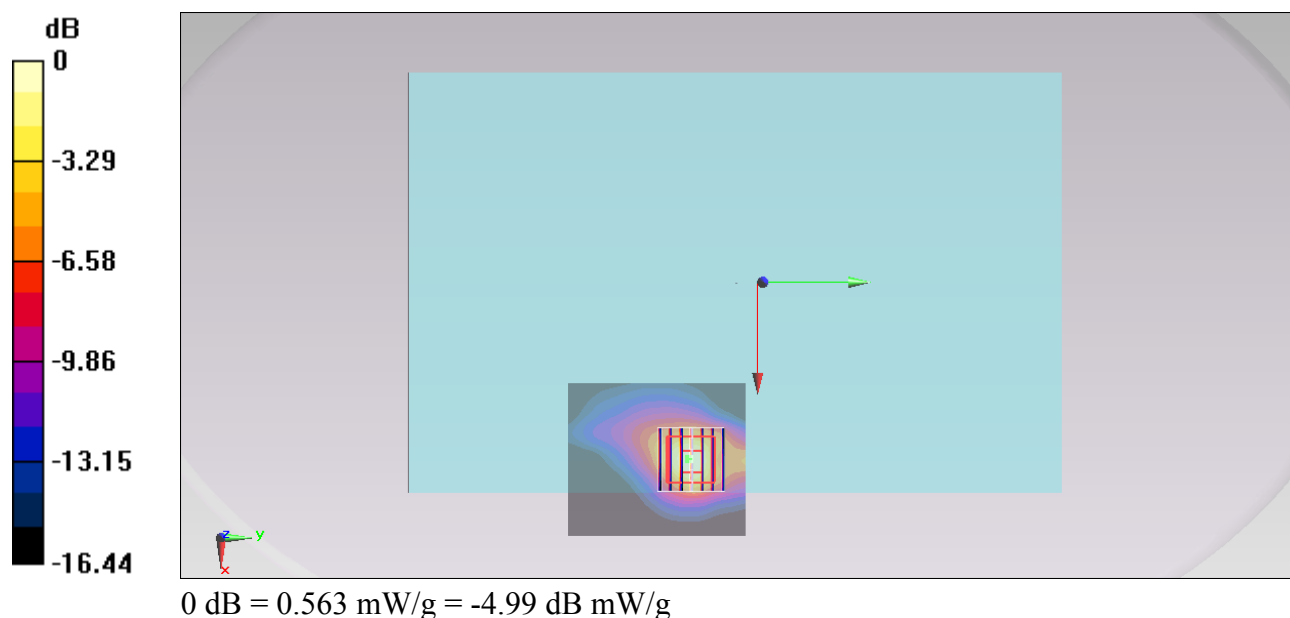

#02_WLAN2.4GHz_802.11b 1Mbps_Edge 1_0cm_Ch1;Ant 0

Communication System: 802.11b; Frequency: 2412 MHz; Duty Cycle: 1:1.009

Medium: MSL_2450_131005 Medium parameters used: $f = 2412$ MHz; $\sigma = 1.963$ mho/m; $\epsilon_r = 53.939$; ρ

$= 1000$ kg/m³

Ambient Temperature : 23.4 °C; Liquid Temperature : 22.4 °C

DASY5 Configuration:

- Probe: ES3DV3 - SN3071; ConvF(4.02, 4.02, 4.02); Calibrated: 2013/6/18;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1279; Calibrated: 2013/1/28
- Phantom: ELI 4.0_Front; Type: QDOVA001BB; Serial: 1029
- Measurement SW: DASY52, Version 52.8 (3); SEMCAD X Version 14.6.5 (6469)

Configuration/Ch1/Area Scan (51x71x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (interpolated) = 0.223 mW/g


Configuration/Ch1/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 11.694 V/m; Power Drift = -0.15 dB

Peak SAR (extrapolated) = 0.436 mW/g

SAR(1 g) = 0.185 mW/g; SAR(10 g) = 0.081 mW/g

Maximum value of SAR (measured) = 0.253 mW/g

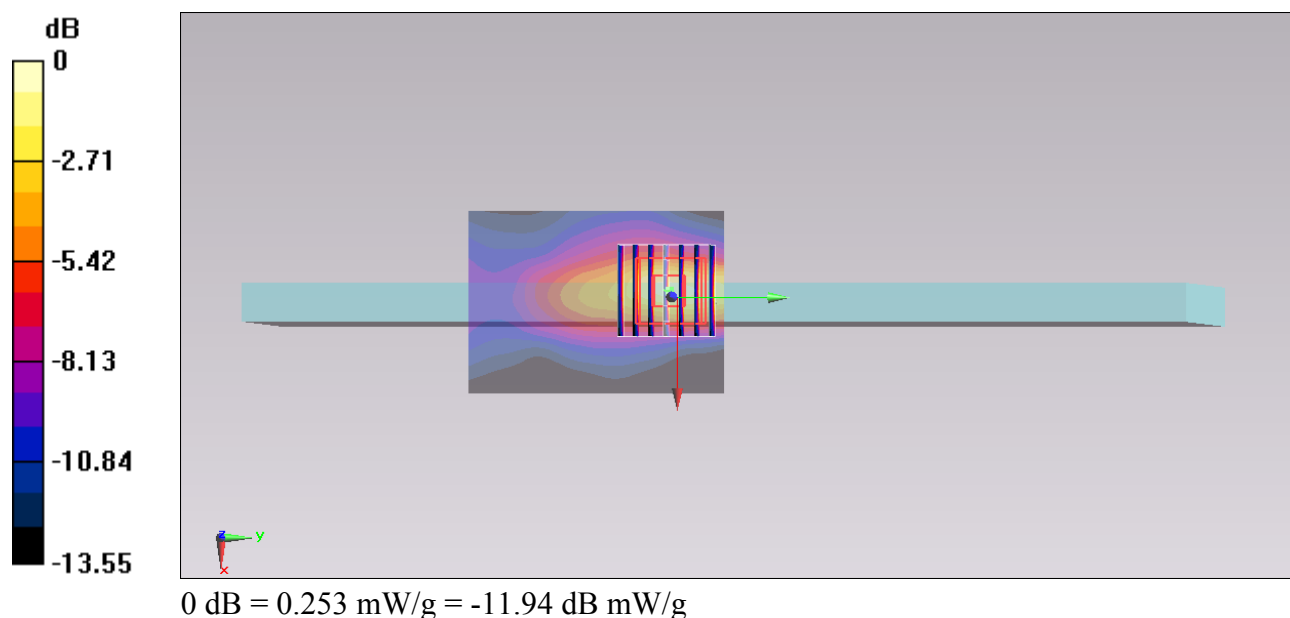

#06_WLAN2.4GHz_802.11b 1Mbps_Bottom Face_0cm_Ch11;Ant 1

Communication System: 802.11b; Frequency: 2462 MHz; Duty Cycle: 1:1.009

Medium: MSL_2450_131005 Medium parameters used: $f = 2462$ MHz; $\sigma = 2.038$ mho/m; $\epsilon_r = 53.837$; ρ

$= 1000$ kg/m³

Ambient Temperature : 23.4 °C; Liquid Temperature : 22.4 °C

DASY5 Configuration:

- Probe: ES3DV3 - SN3071; ConvF(4.02, 4.02, 4.02); Calibrated: 2013/6/18;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1279; Calibrated: 2013/1/28
- Phantom: ELI 4.0_Front; Type: QDOVA001BB; Serial: 1029
- Measurement SW: DASY52, Version 52.8 (3); SEMCAD X Version 14.6.5 (6469)

Configuration/Ch11/Area Scan (61x71x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (interpolated) = 0.270 mW/g


Configuration/Ch11/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 11.339 V/m; Power Drift = 0.07 dB

Peak SAR (extrapolated) = 0.442 mW/g

SAR(1 g) = 0.194 mW/g; SAR(10 g) = 0.089 mW/g

Maximum value of SAR (measured) = 0.252 mW/g

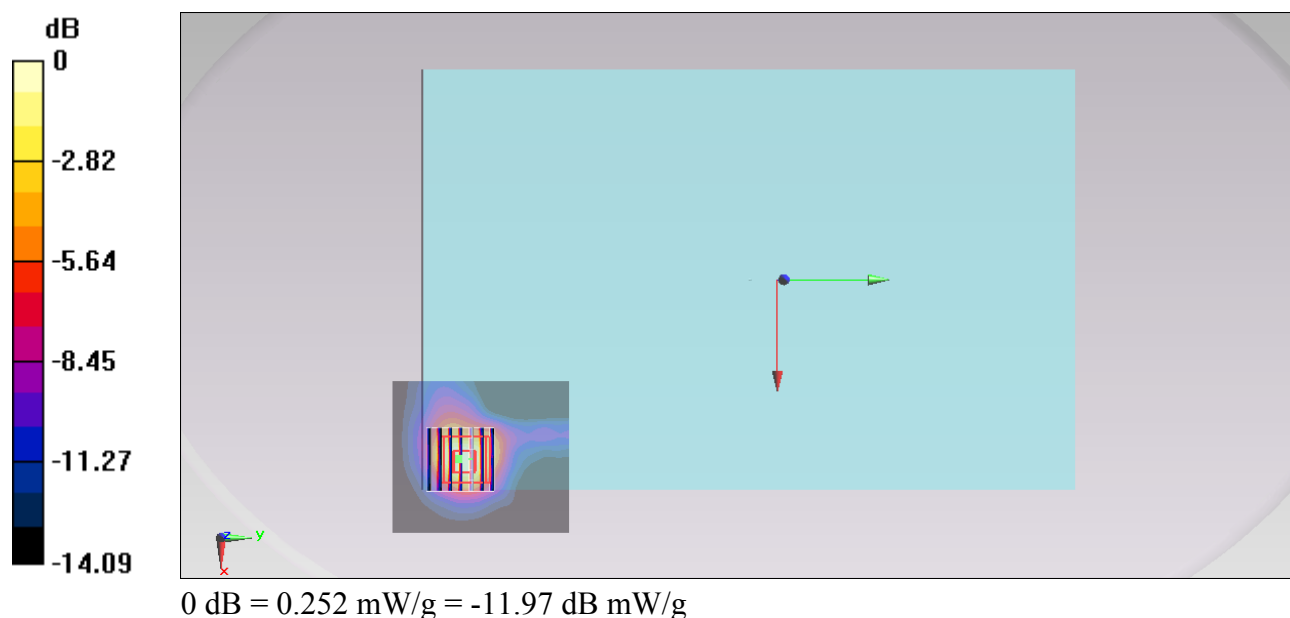

#07_WLAN2.4GHz_802.11b 1Mbps_Edge 1_0cm_Ch11;Ant 1

Communication System: 802.11b; Frequency: 2462 MHz; Duty Cycle: 1:1.009

Medium: MSL_2450_131005 Medium parameters used: $f = 2462$ MHz; $\sigma = 2.038$ mho/m; $\epsilon_r = 53.837$; ρ

$= 1000$ kg/m³

Ambient Temperature : 23.4 °C; Liquid Temperature : 22.4 °C

DASY5 Configuration:

- Probe: ES3DV3 - SN3071; ConvF(4.02, 4.02, 4.02); Calibrated: 2013/6/18;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1279; Calibrated: 2013/1/28
- Phantom: ELI 4.0_Front; Type: QDOVA001BB; Serial: 1029
- Measurement SW: DASY52, Version 52.8 (3); SEMCAD X Version 14.6.5 (6469)

Configuration/Ch11/Area Scan (51x71x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (interpolated) = 0.159 mW/g


Configuration/Ch11/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 9.279 V/m; Power Drift = 0.11 dB

Peak SAR (extrapolated) = 0.298 mW/g

SAR(1 g) = 0.127 mW/g; SAR(10 g) = 0.059 mW/g

Maximum value of SAR (measured) = 0.168 mW/g

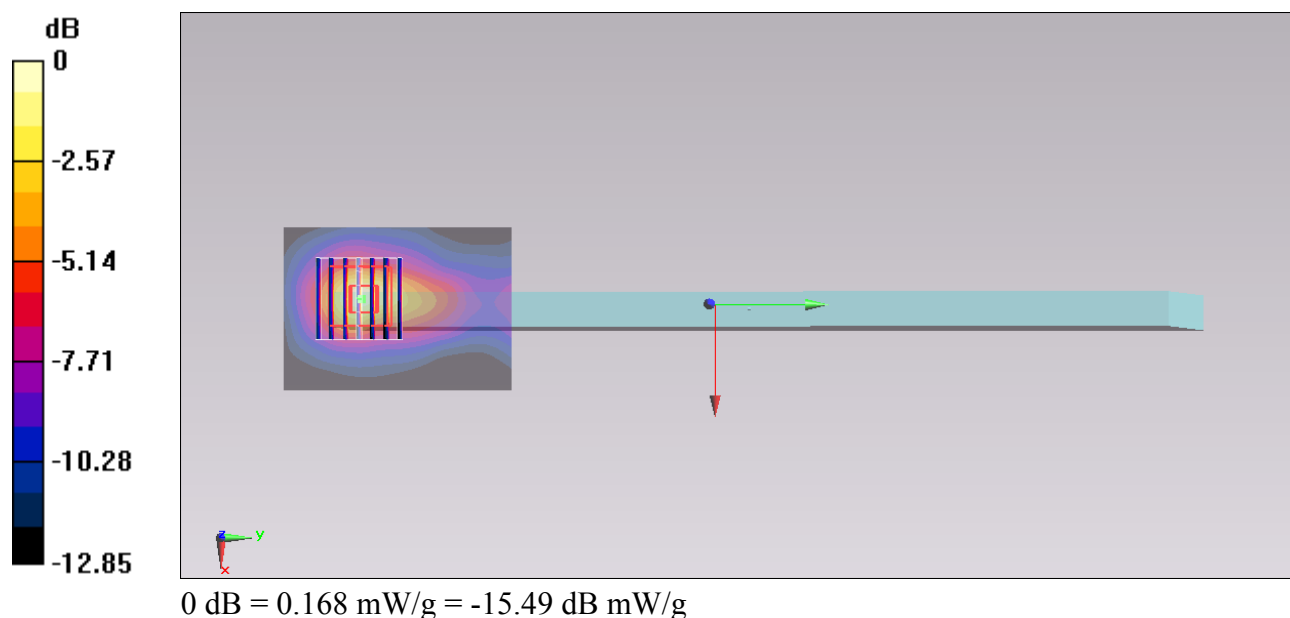

#08_WLAN2.4GHz_802.11b 1Mbps_Edge 4_0cm_Ch11;Ant 1

Communication System: 802.11b; Frequency: 2462 MHz; Duty Cycle: 1:1.009

Medium: MSL_2450_131005 Medium parameters used: $f = 2462$ MHz; $\sigma = 2.038$ mho/m; $\epsilon_r = 53.837$; ρ

$= 1000$ kg/m³

Ambient Temperature : 23.4 °C; Liquid Temperature : 22.4 °C

DASY5 Configuration:

- Probe: ES3DV3 - SN3071; ConvF(4.02, 4.02, 4.02); Calibrated: 2013/6/18;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1279; Calibrated: 2013/1/28
- Phantom: ELI 4.0_Front; Type: QDOVA001BB; Serial: 1029
- Measurement SW: DASY52, Version 52.8 (3); SEMCAD X Version 14.6.5 (6469)

Configuration/Ch11/Area Scan (51x71x1): Measurement grid: $dx=12$ mm, $dy=12$ mm

Maximum value of SAR (interpolated) = 0.0638 mW/g


Configuration/Ch11/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 5.555 V/m; Power Drift = 0.17 dB

Peak SAR (extrapolated) = 0.089 mW/g

SAR(1 g) = 0.049 mW/g; SAR(10 g) = 0.029 mW/g

Maximum value of SAR (measured) = 0.0600 mW/g

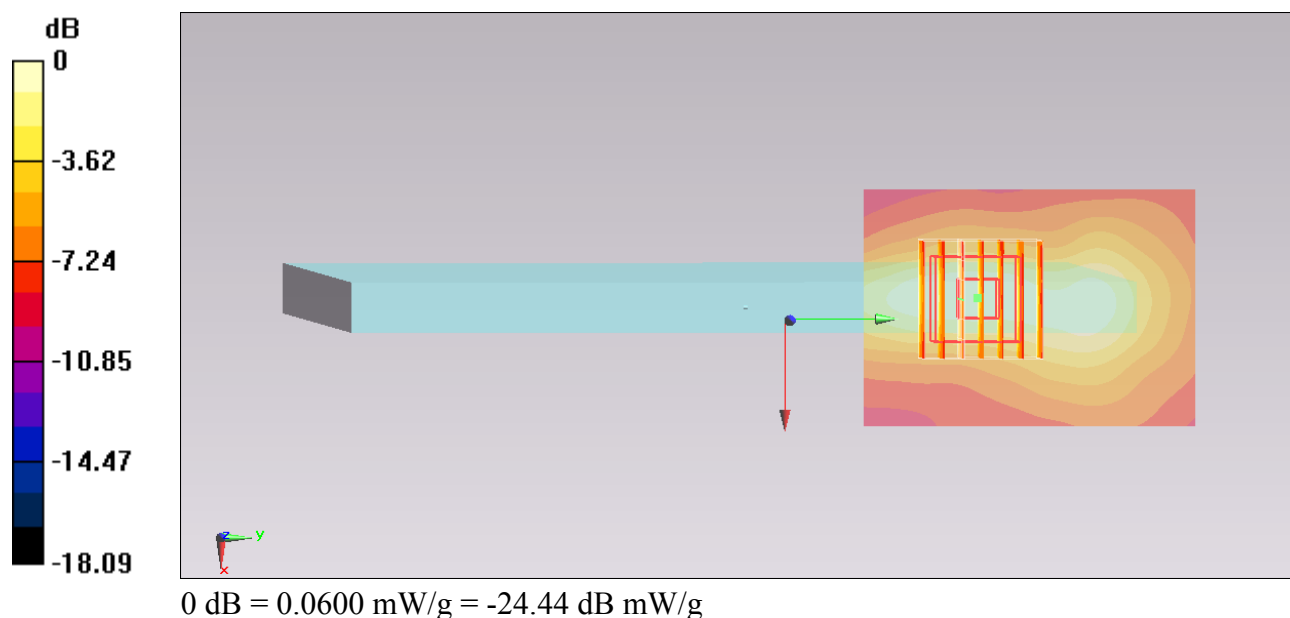

#09_WLAN2.4GHz_802.11g 6Mbps_Bottom Face_0cm_Ch6;Ant 1

Communication System: 802.11g; Frequency: 2437 MHz; Duty Cycle: 1:1.006

Medium: MSL_2450_131005 Medium parameters used: $f = 2437$ MHz; $\sigma = 2.001$ mho/m; $\epsilon_r = 53.87$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.4 °C; Liquid Temperature : 22.4 °C

DASY5 Configuration:

- Probe: ES3DV3 - SN3071; ConvF(4.02, 4.02, 4.02); Calibrated: 2013/6/18;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1279; Calibrated: 2013/1/28
- Phantom: ELI 4.0_Front; Type: QDOVA001BB; Serial: 1029
- Measurement SW: DASY52, Version 52.8 (3); SEMCAD X Version 14.6.5 (6469)

Configuration/Ch6/Area Scan (61x71x1): Measurement grid: dx=12mm, dy=12mm
Maximum value of SAR (interpolated) = 0.356 mW/g


Configuration/Ch6/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 13.308 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 0.611 mW/g

SAR(1 g) = 0.267 mW/g; SAR(10 g) = 0.121 mW/g

Maximum value of SAR (measured) = 0.350 mW/g

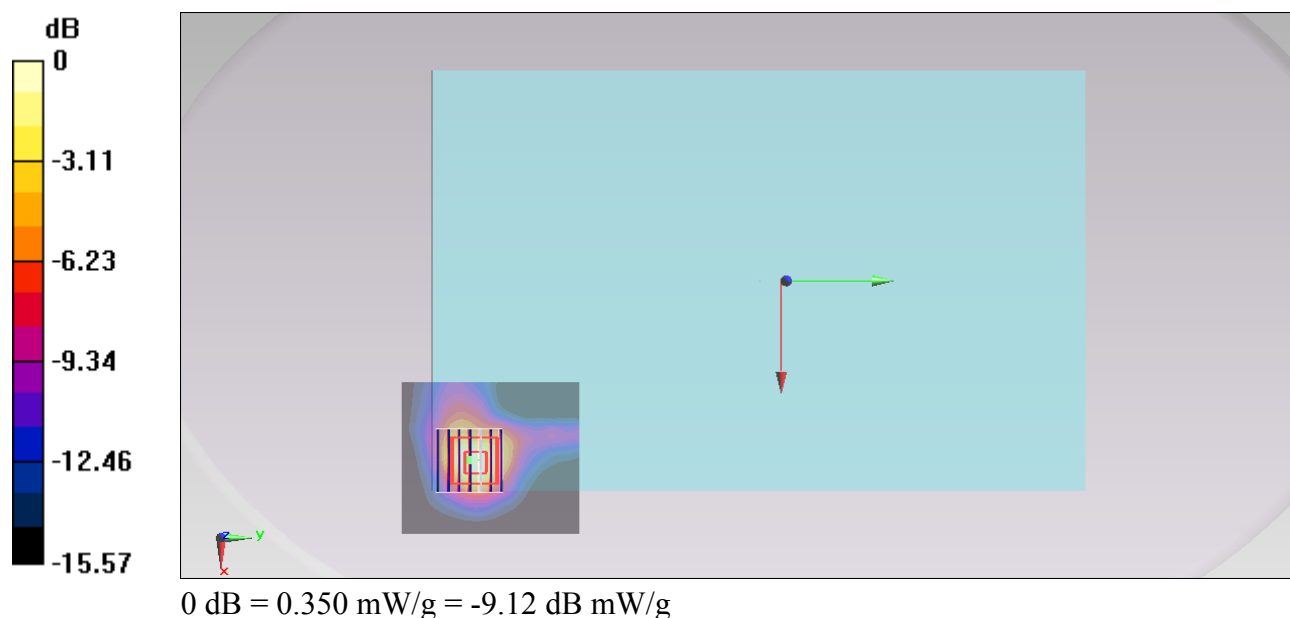

#10_WLAN2.4GHz_802.11n-HT20 MCS0_Bottom Face_0cm_Ch6;Ant 1

Communication System: 802.11n; Frequency: 2437 MHz; Duty Cycle: 1:1.010

Medium: MSL_2450_131005 Medium parameters used: $f = 2437$ MHz; $\sigma = 2.001$ mho/m; $\epsilon_r = 53.87$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.4 °C; Liquid Temperature : 22.4 °C

DASY5 Configuration:

- Probe: ES3DV3 - SN3071; ConvF(4.02, 4.02, 4.02); Calibrated: 2013/6/18;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1279; Calibrated: 2013/1/28
- Phantom: ELI 4.0_Front; Type: QDOVA001BB; Serial: 1029
- Measurement SW: DASY52, Version 52.8 (3); SEMCAD X Version 14.6.5 (6469)

Configuration/Ch6/Area Scan (61x71x1): Measurement grid: dx=12mm, dy=12mm
Maximum value of SAR (interpolated) = 0.429 mW/g


Configuration/Ch6/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 14.161 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 0.641 mW/g

SAR(1 g) = 0.278 mW/g; SAR(10 g) = 0.127 mW/g

Maximum value of SAR (measured) = 0.376 mW/g

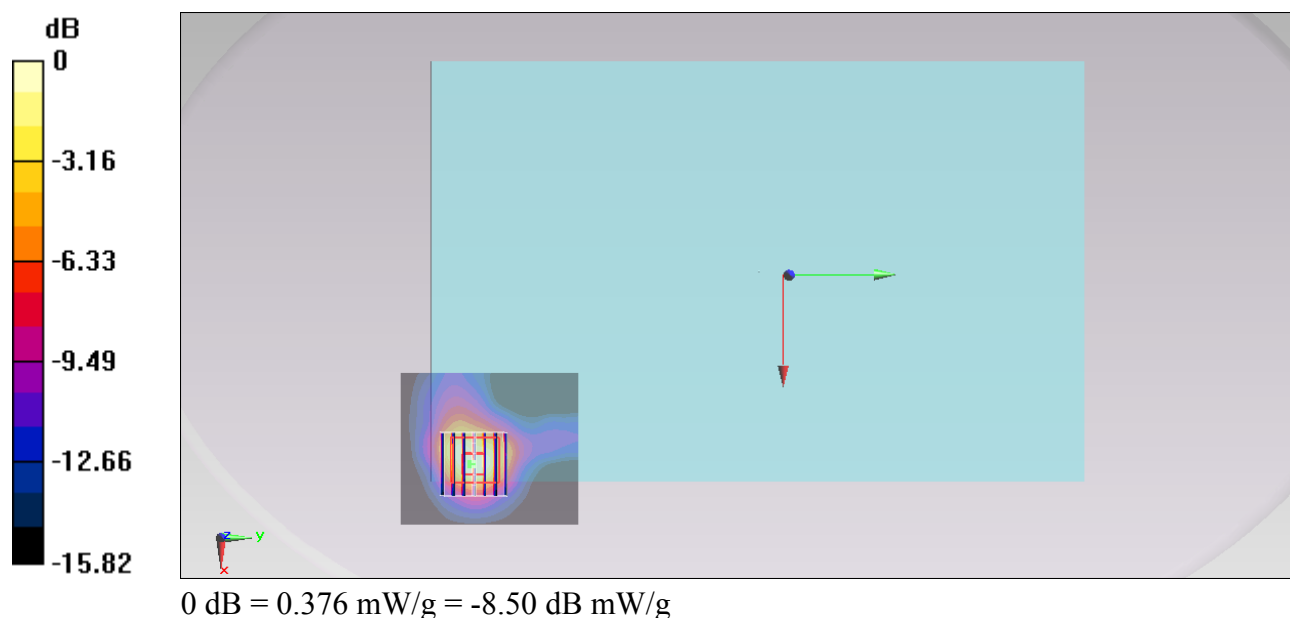

#29_WLAN5GHz_802.11a 6Mbps_Bottom Face_0cm_Ch36;Ant 0

Communication System: 802.11a; Frequency: 5180 MHz; Duty Cycle: 1:1.015

Medium: MSL_5G_131010 Medium parameters used : $f = 5180$ MHz; $\sigma = 5.097$ mho/m; $\epsilon_r = 47.487$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.6 °C; Liquid Temperature : 22.6 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3801; ConvF(4.24, 4.24, 4.24); Calibrated: 2013/6/20;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn778; Calibrated: 2013/8/21
- Phantom: ELI 4.0_Front; Type: QDOVA001BB; Serial: 1029
- Measurement SW: DASY52, Version 52.8 (3); SEMCAD X Version 14.6.5 (6469)

Configuration/Ch36/Area Scan (71x81x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 1.49 mW/g


Configuration/Ch36/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 19.402 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 2.870 mW/g

SAR(1 g) = 0.671 mW/g; SAR(10 g) = 0.223 mW/g

Maximum value of SAR (measured) = 1.64 mW/g

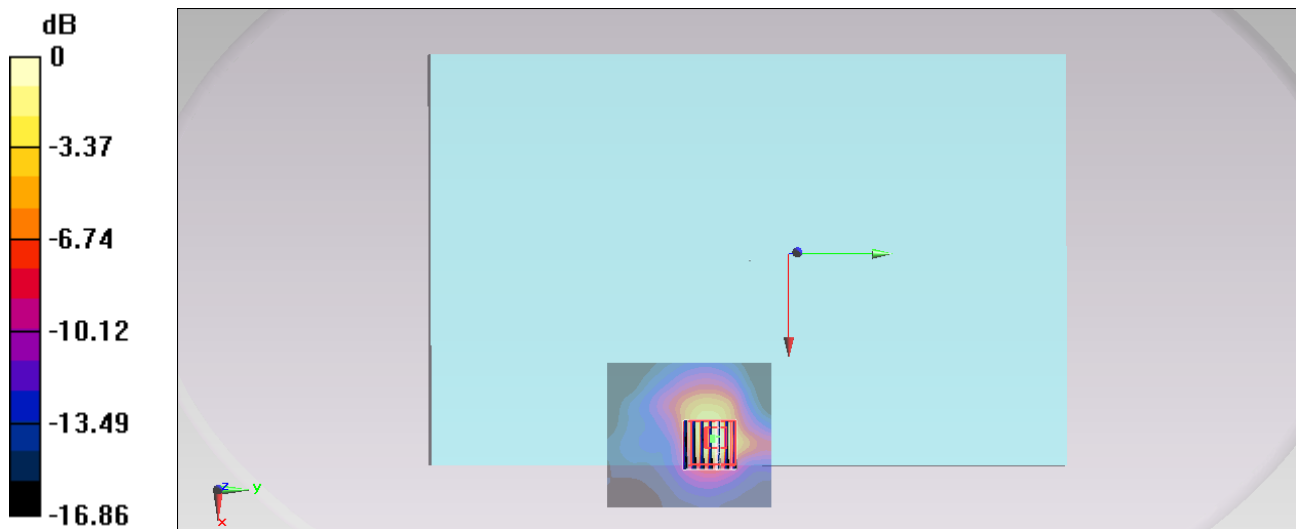

0 dB = 1.64 mW/g = 4.30 dB mW/g

#30_WLAN5GHz_802.11a 6Mbps_Edge 1_0cm_Ch36;Ant 0

Communication System: 802.11a; Frequency: 5180 MHz; Duty Cycle: 1:1.015

Medium: MSL_5G_131010 Medium parameters used : $f = 5180$ MHz; $\sigma = 5.097$ mho/m; $\epsilon_r = 47.487$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.6 °C; Liquid Temperature : 22.6 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3801; ConvF(4.24, 4.24, 4.24); Calibrated: 2013/6/20;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn778; Calibrated: 2013/8/21
- Phantom: ELI 4.0_Front; Type: QDOVA001BB; Serial: 1029
- Measurement SW: DASY52, Version 52.8 (3); SEMCAD X Version 14.6.5 (6469)

Configuration/Ch36/Area Scan (61x91x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.488 mW/g


Configuration/Ch36/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 11.212 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 0.974 mW/g

SAR(1 g) = 0.226 mW/g; SAR(10 g) = 0.084 mW/g

Maximum value of SAR (measured) = 0.504 mW/g

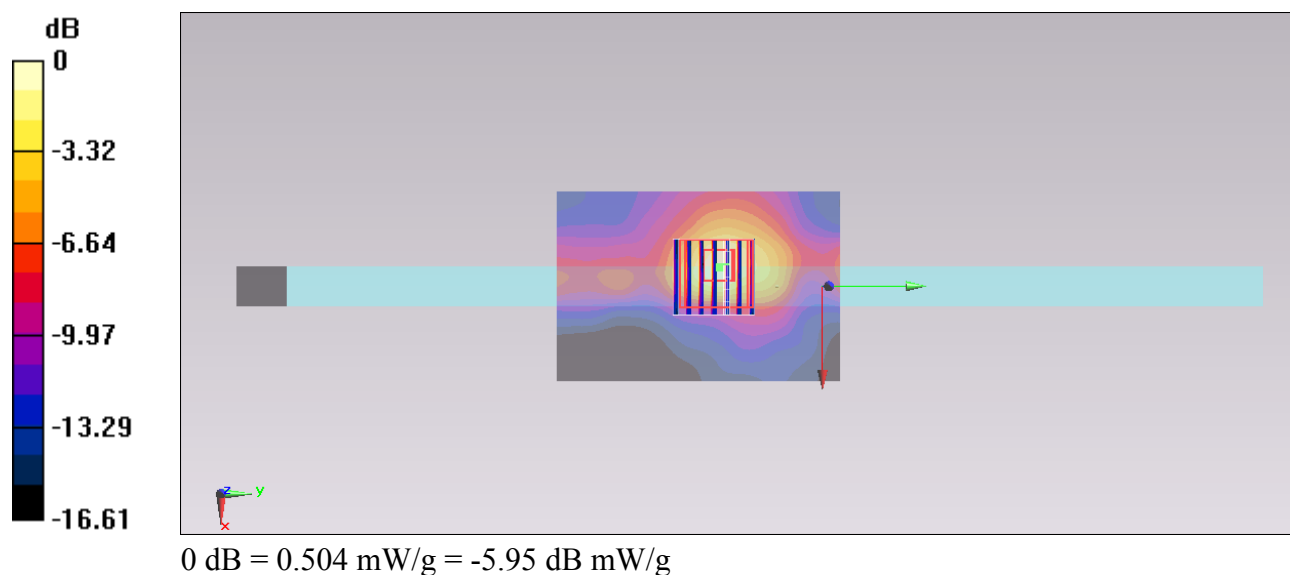

#70_WLAN5GHz_802.11a 6Mbps_Bottom Face_0cm_Ch64;Ant 0

Communication System: 802.11a; Frequency: 5320 MHz; Duty Cycle: 1:1.015

Medium: MSL_5G_131011 Medium parameters used: $f = 5320$ MHz; $\sigma = 5.478$ mho/m; $\epsilon_r = 47.239$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.5 °C; Liquid Temperature : 22.5 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3801; ConvF(4.05, 4.05, 4.05); Calibrated: 2013/6/20;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn778; Calibrated: 2013/8/21
- Phantom: ELI 4.0_Front; Type: QDOVA001BB; Serial: 1029
- Measurement SW: DASY52, Version 52.8 (3); SEMCAD X Version 14.6.5 (6469)

Configuration/Ch64/Area Scan (71x81x1): Measurement grid: dx=10mm, dy=10mm
Maximum value of SAR (interpolated) = 2.53 mW/g


Configuration/Ch64/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 23.721 V/m; Power Drift = 0.06 dB

Peak SAR (extrapolated) = 5.278 mW/g

SAR(1 g) = 1.13 mW/g; SAR(10 g) = 0.361 mW/g

Maximum value of SAR (measured) = 2.89 mW/g

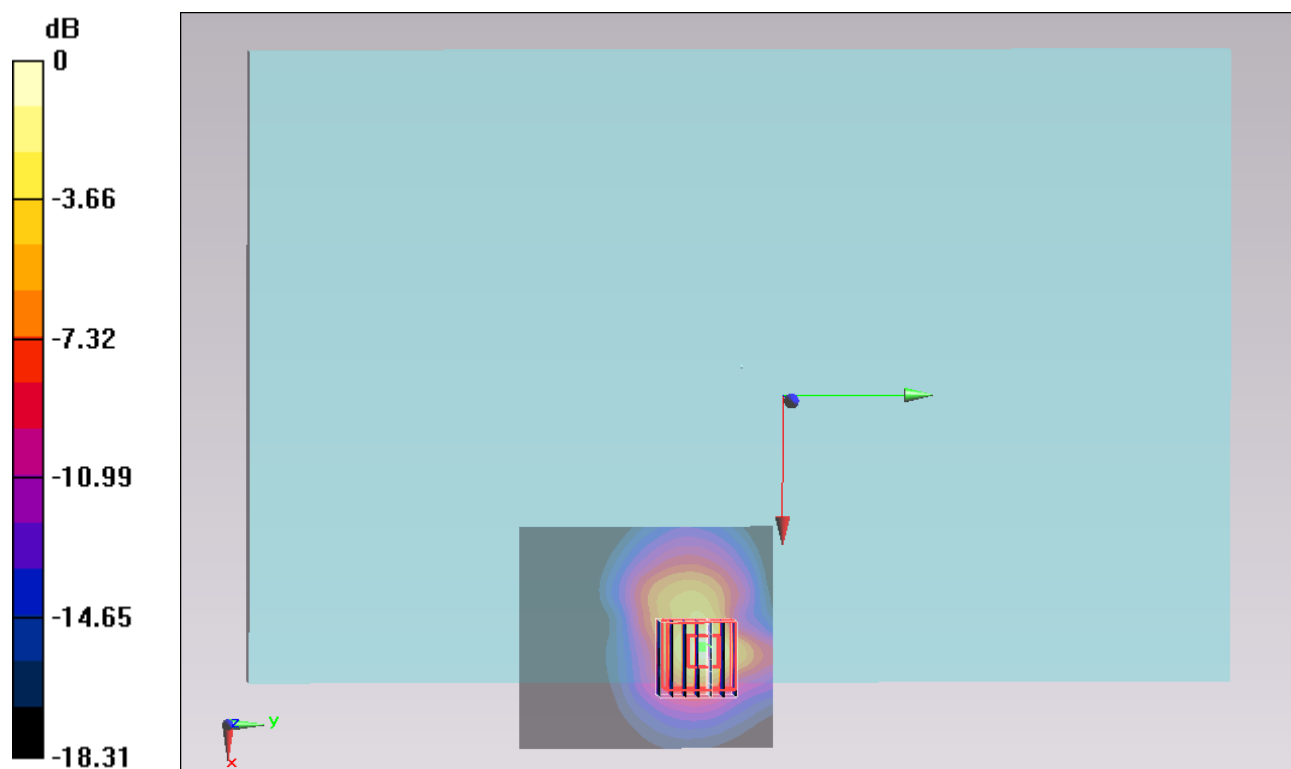

0 dB = 2.89 mW/g = 9.22 dB mW/g

#53_WLAN5GHz_802.11a 6Mbps_Bottom Face_0cm_Ch64;Ant 0_Repeat

Communication System: 802.11a; Frequency: 5320 MHz; Duty Cycle: 1:1.015

Medium: MSL_5G_131011 Medium parameters used : $f = 5320$ MHz; $\sigma = 5.478$ mho/m; $\epsilon_r = 47.239$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.5 °C; Liquid Temperature : 22.5 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3801; ConvF(4.05, 4.05, 4.05); Calibrated: 2013/6/20;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn778; Calibrated: 2013/8/21
- Phantom: ELI 4.0_Front; Type: QDOVA001BB; Serial: 1029
- Measurement SW: DASY52, Version 52.8 (3); SEMCAD X Version 14.6.5 (6469)

Configuration/Ch64/Area Scan (71x81x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 2.95 mW/g



Configuration/Ch64/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 24.943 V/m; Power Drift = 0.09 dB

Peak SAR (extrapolated) = 5.085 mW/g

SAR(1 g) = 1.11 mW/g; SAR(10 g) = 0.352 mW/g

Maximum value of SAR (measured) = 2.74 mW/g

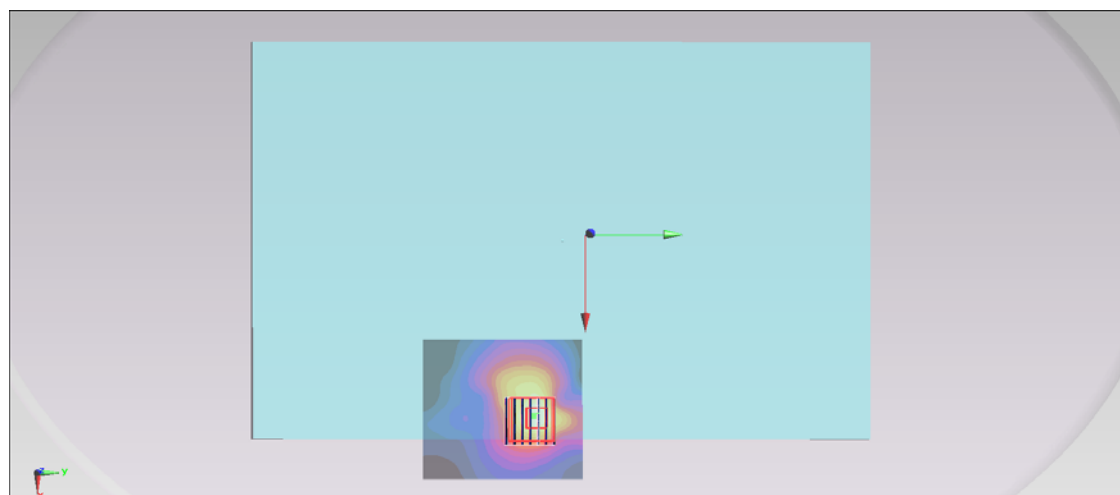

0 dB = 2.74 mW/g = 8.76 dB mW/g

#54_WLAN5GHz_802.11a 6Mbps_Bottom Face_0cm_Ch52;Ant 0

Communication System: 802.11a; Frequency: 5260 MHz; Duty Cycle: 1:1.015

Medium: MSL_5G_131011 Medium parameters used : $f = 5260$ MHz; $\sigma = 5.383$ mho/m; $\epsilon_r = 47.339$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.5 °C; Liquid Temperature : 22.5 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3801; ConvF(4.05, 4.05, 4.05); Calibrated: 2013/6/20;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn778; Calibrated: 2013/8/21
- Phantom: ELI 4.0_Front; Type: QDOVA001BB; Serial: 1029
- Measurement SW: DASY52, Version 52.8 (3); SEMCAD X Version 14.6.5 (6469)

Configuration/Ch52/Area Scan (71x81x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 2.05 mW/g


Configuration/Ch52/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 20.195 V/m; Power Drift = 0.10 dB

Peak SAR (extrapolated) = 3.439 mW/g

SAR(1 g) = 0.760 mW/g; SAR(10 g) = 0.252 mW/g

Maximum value of SAR (measured) = 1.87 mW/g

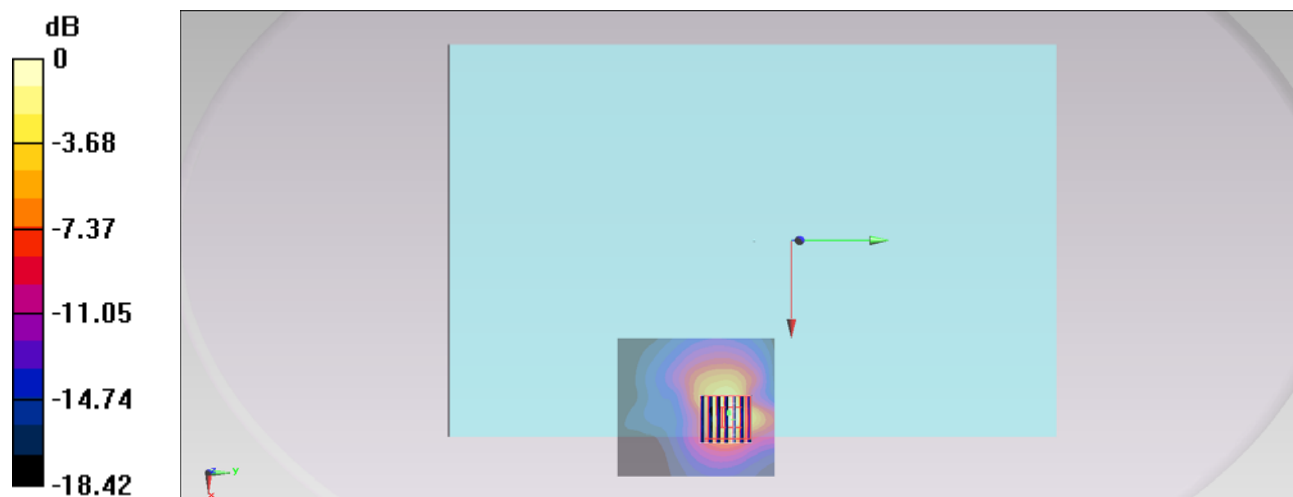

0 dB = 1.87 mW/g = 5.44 dB mW/g

#55_WLAN5GHz_802.11a 6Mbps_Edge 1_0cm_Ch64;Ant 0

Communication System: 802.11a; Frequency: 5320 MHz; Duty Cycle: 1:1.015

Medium: MSL_5G_131011 Medium parameters used (interpolated): $f = 5320$ MHz; $\sigma = 5.478$ mho/m; ϵ_r

$= 47.239$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.5 °C; Liquid Temperature : 22.5 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3801; ConvF(4.05, 4.05, 4.05); Calibrated: 2013/6/20;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn778; Calibrated: 2013/8/21
- Phantom: ELI 4.0_Front; Type: QDOVA001BB; Serial: 1029
- Measurement SW: DASY52, Version 52.8 (3); SEMCAD X Version 14.6.5 (6469)

Configuration/Ch64/Area Scan (61x81x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.968 mW/g


Configuration/Ch64/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 14.583 V/m; Power Drift = -0.19 dB

Peak SAR (extrapolated) = 1.650 mW/g

SAR(1 g) = 0.363 mW/g; SAR(10 g) = 0.102 mW/g

Maximum value of SAR (measured) = 0.911 mW/g

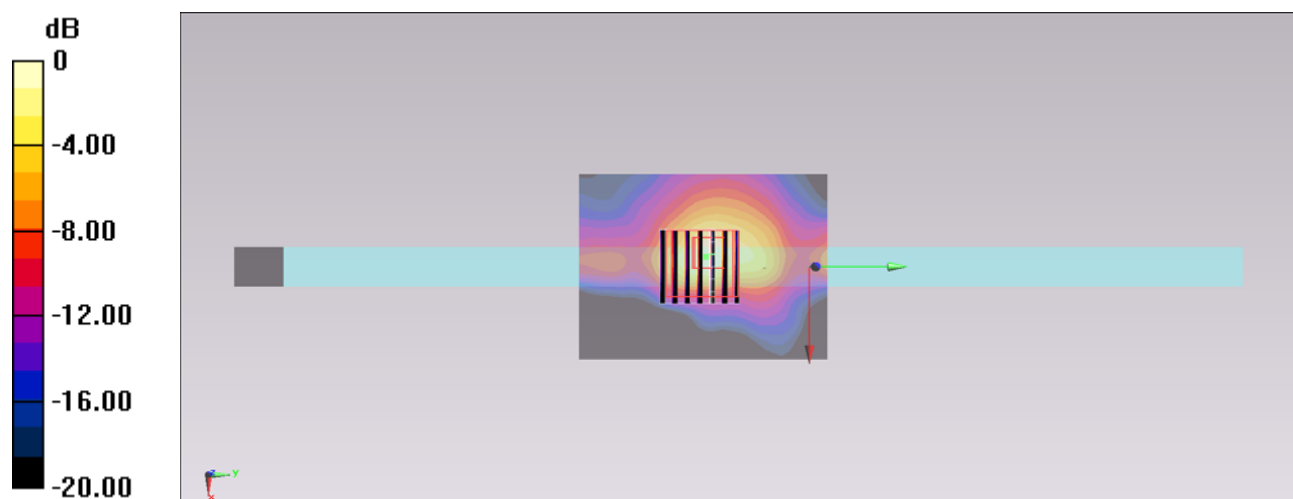

0 dB = 0.911 mW/g = -0.81 dB mW/g

#37_WLAN5GHz_802.11a 6Mbps_Bottom Face_0cm_Ch100;Ant 0

Communication System: 802.11a; Frequency: 5500 MHz; Duty Cycle: 1:1.015

Medium: MSL_5G_131010 Medium parameters used: $f = 5500$ MHz; $\sigma = 5.506$ mho/m; $\epsilon_r = 47.018$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.6 °C; Liquid Temperature : 22.6 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3801; ConvF(3.83, 3.83, 3.83); Calibrated: 2013/6/20;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn778; Calibrated: 2013/8/21
- Phantom: ELI 4.0_Front; Type: QDOVA001BB; Serial: 1029
- Measurement SW: DASY52, Version 52.8 (3); SEMCAD X Version 14.6.5 (6469)

Configuration/Ch100/Area Scan (71x81x1): Measurement grid: dx=10mm, dy=10mm
Maximum value of SAR (interpolated) = 3.25 mW/g


Configuration/Ch100/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 26.291 V/m; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 5.568 mW/g

SAR(1 g) = 1.18 mW/g; SAR(10 g) = 0.347 mW/g

Maximum value of SAR (measured) = 2.97 mW/g

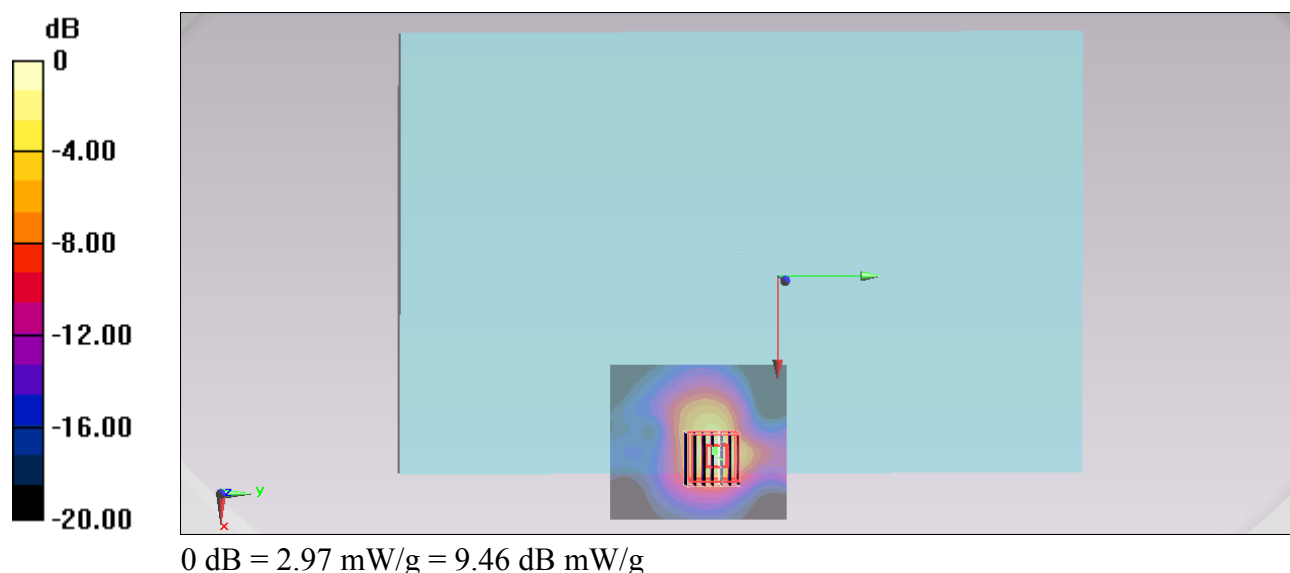

#38_WLAN5GHz_802.11a 6Mbps_Bottom Face_0cm_Ch116;Ant 0

Communication System: 802.11a; Frequency: 5580 MHz; Duty Cycle: 1:1.015

Medium: MSL_5G_131010 Medium parameters used: $f = 5580$ MHz; $\sigma = 5.618$ mho/m; $\epsilon_r = 46.854$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.6 °C; Liquid Temperature : 22.6 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3801; ConvF(4, 4, 4); Calibrated: 2013/6/20;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn778; Calibrated: 2013/8/21
- Phantom: ELI 4.0_Front; Type: QDOVA001BB; Serial: 1029
- Measurement SW: DASY52, Version 52.8 (3); SEMCAD X Version 14.6.5 (6469)

Configuration/Ch116/Area Scan (71x81x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 2.25 mW/g


Configuration/Ch116/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 21.670 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 4.400 mW/g

SAR(1 g) = 0.842 mW/g; SAR(10 g) = 0.255 mW/g

Maximum value of SAR (measured) = 2.25 mW/g

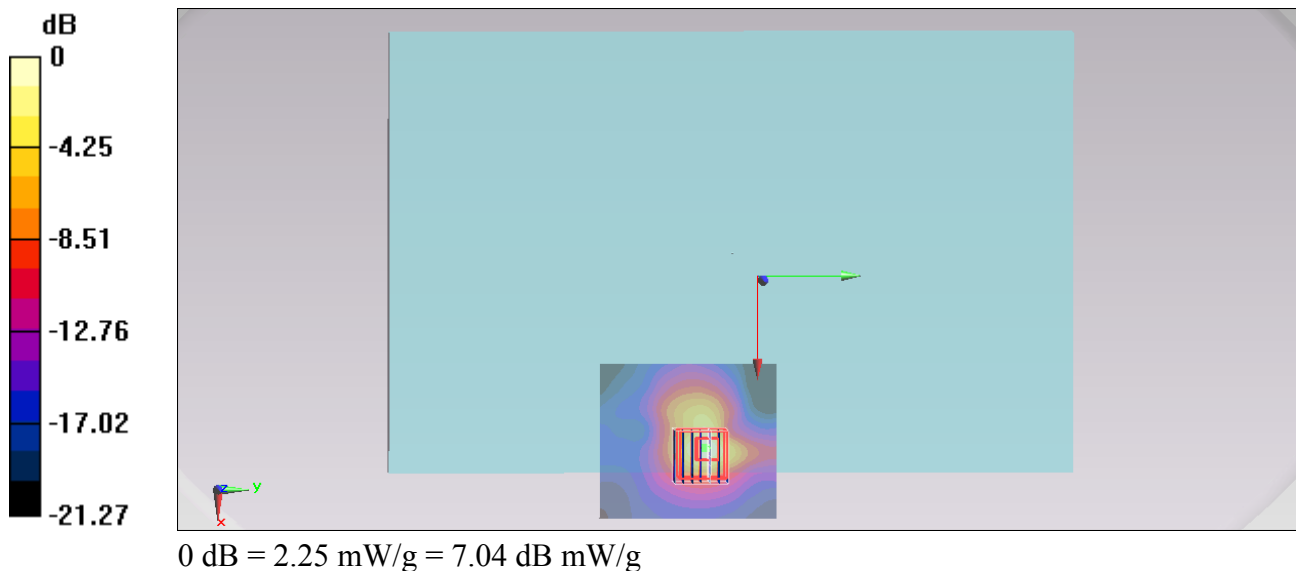

#39_WLAN5GHz_802.11a 6Mbps_Bottom Face_0cm_Ch136;Ant 0

Communication System: 802.11a; Frequency: 5680 MHz; Duty Cycle: 1:1.015

Medium: MSL_5G_131010 Medium parameters used: $f = 5680$ MHz; $\sigma = 5.781$ mho/m; $\epsilon_r = 46.704$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.6 °C; Liquid Temperature : 22.6 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3801; ConvF(4, 4, 4); Calibrated: 2013/6/20;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn778; Calibrated: 2013/8/21
- Phantom: ELI 4.0_Front; Type: QDOVA001BB; Serial: 1029
- Measurement SW: DASY52, Version 52.8 (3); SEMCAD X Version 14.6.5 (6469)

Configuration/Ch136/Area Scan (71x81x1): Measurement grid: dx=10mm, dy=10mm
Maximum value of SAR (interpolated) = 2.91 mW/g


Configuration/Ch136/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 24.463 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 5.821 mW/g

SAR(1 g) = 1.05 mW/g; SAR(10 g) = 0.302 mW/g

Maximum value of SAR (measured) = 2.90 mW/g

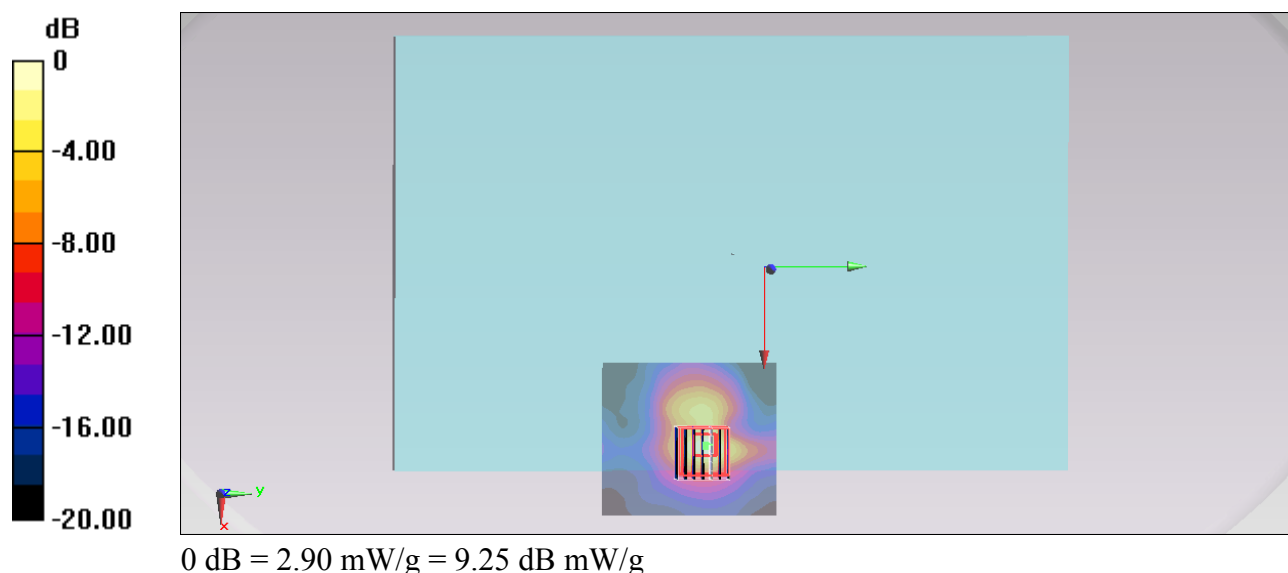

#43_WLAN5GHz_802.11a 6Mbps_Edge 1_0cm_Ch100;Ant 0

Communication System: 802.11a; Frequency: 5500 MHz; Duty Cycle: 1:1.015

Medium: MSL_5G_131010 Medium parameters used: $f = 5500$ MHz; $\sigma = 5.506$ mho/m; $\epsilon_r = 47.018$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.6 °C; Liquid Temperature : 22.6 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3801; ConvF(3.83, 3.83, 3.83); Calibrated: 2013/6/20;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn778; Calibrated: 2013/8/21
- Phantom: ELI 4.0_Front; Type: QDOVA001BB; Serial: 1029
- Measurement SW: DASY52, Version 52.8 (3); SEMCAD X Version 14.6.5 (6469)

Configuration/Ch100/Area Scan (61x91x1): Measurement grid: dx=10mm, dy=10mm
Maximum value of SAR (interpolated) = 1.11 mW/g


Configuration/Ch100/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 16.049 V/m; Power Drift = -0.06 dB

Peak SAR (extrapolated) = 2.032 mW/g

SAR(1 g) = 0.463 mW/g; SAR(10 g) = 0.152 mW/g

Maximum value of SAR (measured) = 1.06 mW/g

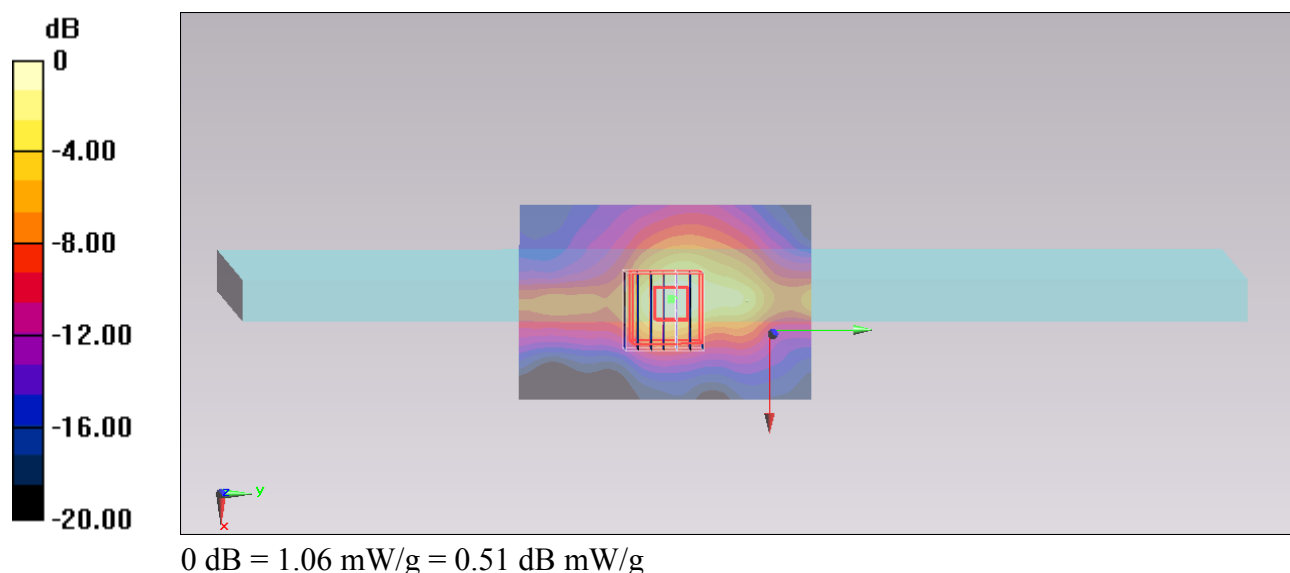

#47_WLAN5GHz_802.11a 6Mbps_Edge 1_0cm_Ch116;Ant 0

Communication System: 802.11a; Frequency: 5580 MHz; Duty Cycle: 1:1.015

Medium: MSL_5G_131010 Medium parameters used: $f = 5580$ MHz; $\sigma = 5.618$ mho/m; $\epsilon_r = 46.854$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.6 °C; Liquid Temperature : 22.6 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3801; ConvF(4, 4, 4); Calibrated: 2013/6/20;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn778; Calibrated: 2013/8/21
- Phantom: ELI 4.0_Front; Type: QDOVA001BB; Serial: 1029
- Measurement SW: DASY52, Version 52.8 (3); SEMCAD X Version 14.6.5 (6469)

Configuration/Ch116/Area Scan (61x91x1): Measurement grid: dx=10mm, dy=10mm
Maximum value of SAR (interpolated) = 0.751 mW/g


Configuration/Ch116/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 12.695 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 1.587 mW/g

SAR(1 g) = 0.338 mW/g; SAR(10 g) = 0.116 mW/g

Maximum value of SAR (measured) = 0.799 mW/g

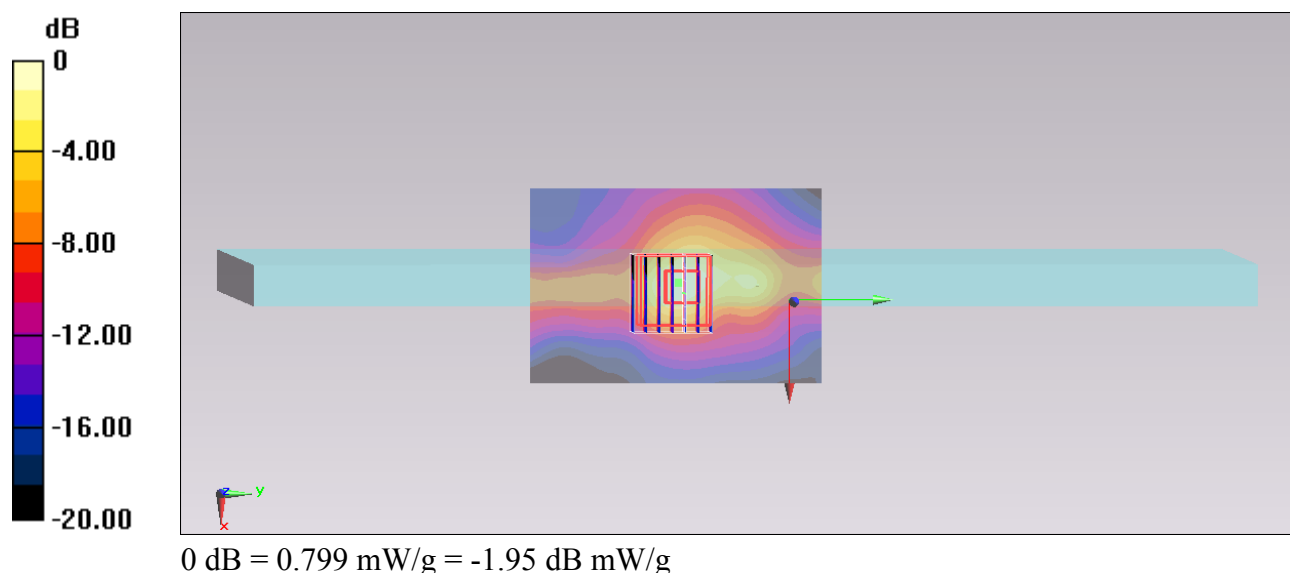

#48_WLAN5GHz_802.11a 6Mbps_Edge 1_0cm_Ch136;Ant 0

Communication System: 802.11a; Frequency: 5680 MHz; Duty Cycle: 1:1.015

Medium: MSL_5G_131010 Medium parameters used: $f = 5680$ MHz; $\sigma = 5.781$ mho/m; $\epsilon_r = 46.704$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.6 °C; Liquid Temperature : 22.6 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3801; ConvF(4, 4, 4); Calibrated: 2013/6/20;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn778; Calibrated: 2013/8/21
- Phantom: ELI 4.0_Front; Type: QDOVA001BB; Serial: 1029
- Measurement SW: DASY52, Version 52.8 (3); SEMCAD X Version 14.6.5 (6469)

Configuration/Ch136/Area Scan (61x91x1): Measurement grid: dx=10mm, dy=10mm
Maximum value of SAR (interpolated) = 0.801 mW/g


Configuration/Ch136/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 13.132 V/m; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 1.700 mW/g

SAR(1 g) = 0.353 mW/g; SAR(10 g) = 0.101 mW/g

Maximum value of SAR (measured) = 0.899 mW/g

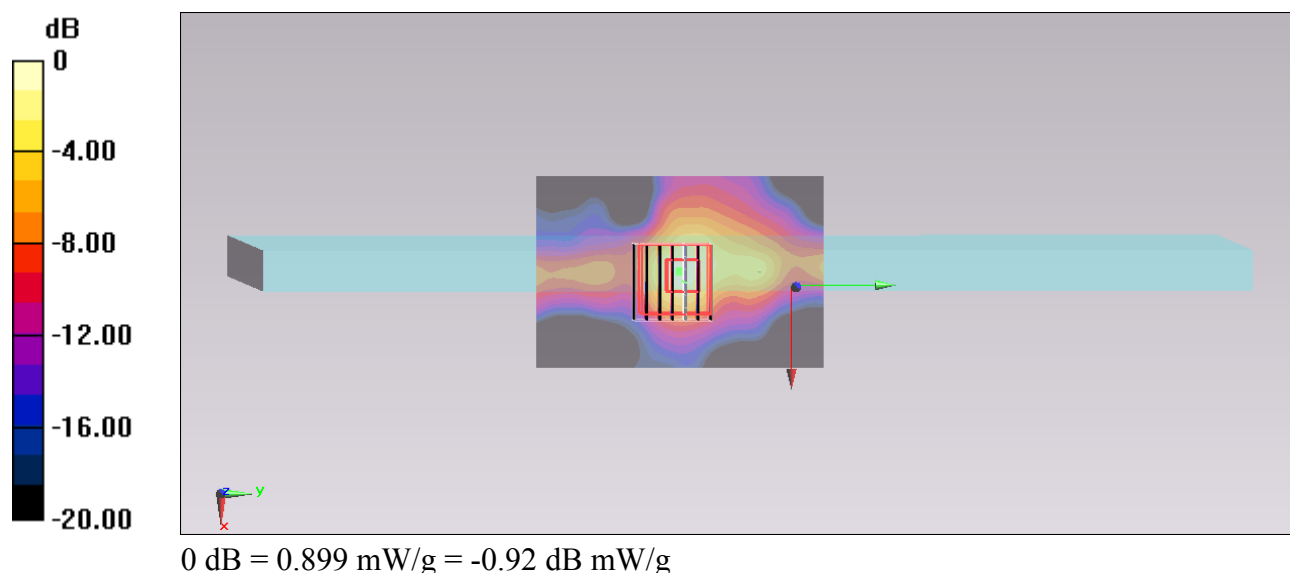

#60_WLAN5GHz_802.11a 6Mbps_Bottom Face_0cm_Ch165;Ant 0

Communication System: 802.11a; Frequency: 5825 MHz; Duty Cycle: 1:1.015

Medium: MSL_5G_131011 Medium parameters used : $f = 5825$ MHz; $\sigma = 6.296$ mho/m; $\epsilon_r = 46.355$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.5 °C; Liquid Temperature : 22.5 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3801; ConvF(3.9, 3.9, 3.9); Calibrated: 2013/6/20;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn778; Calibrated: 2013/8/21
- Phantom: ELI 4.0_Front; Type: QDOVA001BB; Serial: 1029
- Measurement SW: DASY52, Version 52.8 (3); SEMCAD X Version 14.6.5 (6469)

Configuration/Ch165/Area Scan (71x81x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 3.29 mW/g


Configuration/Ch165/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 26.609 V/m; Power Drift = 0.09 dB

Peak SAR (extrapolated) = 6.287 mW/g

SAR(1 g) = 1.27 mW/g; SAR(10 g) = 0.367 mW/g

Maximum value of SAR (measured) = 3.43 mW/g

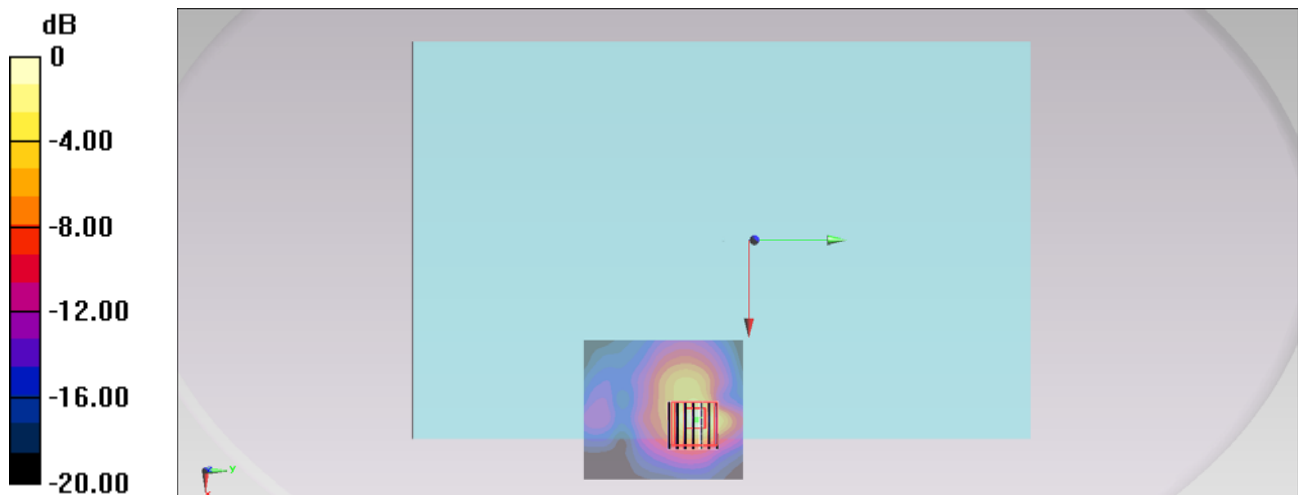

0 dB = 3.43 mW/g = 10.71 dB mW/g

#69_WLAN5GHz_802.11a 6Mbps_Bottom Face_0cm_Ch165;Ant 0_Repeat

Communication System: 802.11a; Frequency: 5825 MHz; Duty Cycle: 1:1.015

Medium: MSL_5G_131011 Medium parameters used: $f = 5825$ MHz; $\sigma = 6.296$ mho/m; $\epsilon_r = 46.355$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.5 °C; Liquid Temperature : 22.5 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3801; ConvF(3.9, 3.9, 3.9); Calibrated: 2013/6/20;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn778; Calibrated: 2013/8/21
- Phantom: ELI 4.0_Front; Type: QDOVA001BB; Serial: 1029
- Measurement SW: DASY52, Version 52.8 (3); SEMCAD X Version 14.6.5 (6469)

Configuration/Ch165/Area Scan (71x81x1): Measurement grid: dx=10mm, dy=10mm
Maximum value of SAR (interpolated) = 3.69 mW/g


Configuration/Ch165/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 29.196 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 6.281 mW/g

SAR(1 g) = 1.24 mW/g; SAR(10 g) = 0.346 mW/g

Maximum value of SAR (measured) = 3.39 mW/g

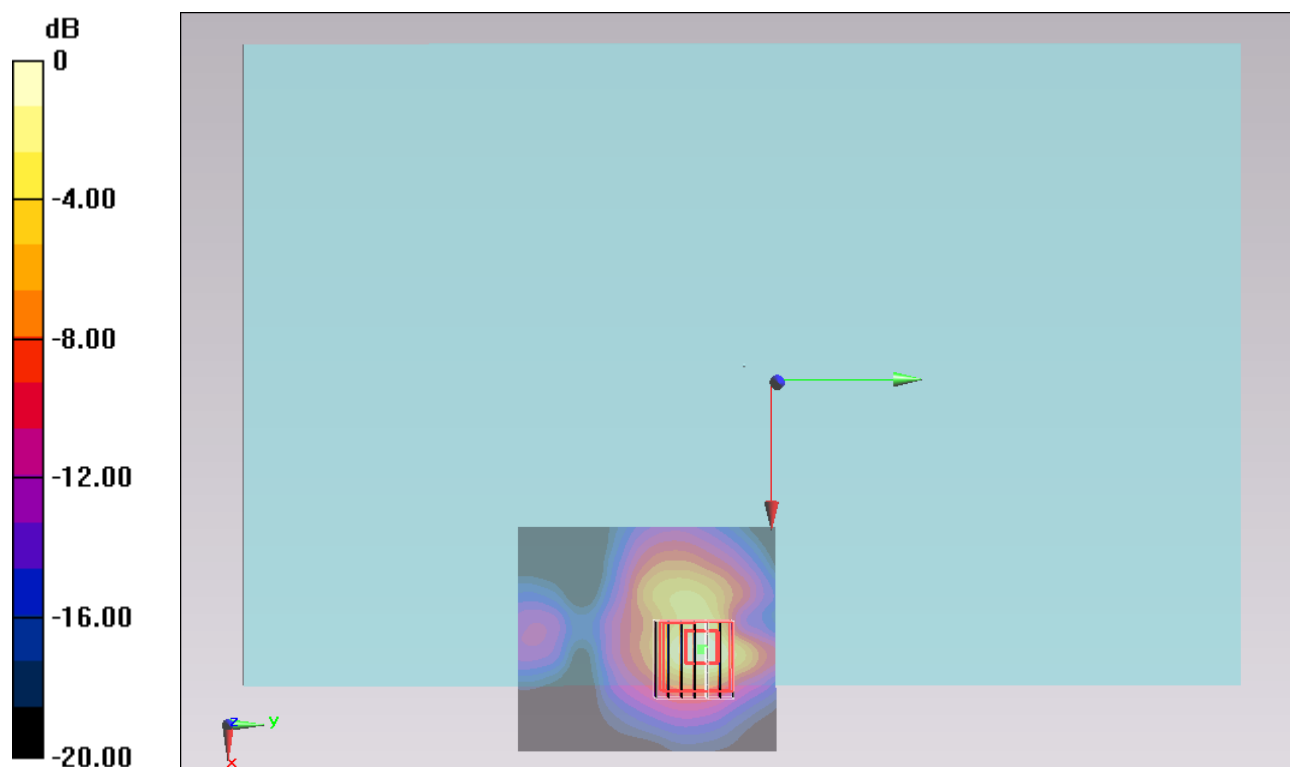

#61_WLAN5GHz_802.11a 6Mbps_Bottom Face_0cm_Ch149;Ant 0

Communication System: 802.11a; Frequency: 5745 MHz; Duty Cycle: 1:1.015

Medium: MSL_5G_131011 Medium parameters used : $f = 5745$ MHz; $\sigma = 6.17$ mho/m; $\epsilon_r = 46.632$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.5 °C; Liquid Temperature : 22.5 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3801; ConvF(3.9, 3.9, 3.9); Calibrated: 2013/6/20;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn778; Calibrated: 2013/8/21
- Phantom: ELI 4.0_Front; Type: QDOVA001BB; Serial: 1029
- Measurement SW: DASY52, Version 52.8 (3); SEMCAD X Version 14.6.5 (6469)

Configuration/Ch149/Area Scan (71x81x1): Measurement grid: dx=10mm, dy=10mm
Maximum value of SAR (interpolated) = 2.60 mW/g



Configuration/Ch149/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 23.133 V/m; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 4.655 mW/g

SAR(1 g) = 0.962 mW/g; SAR(10 g) = 0.291 mW/g

Maximum value of SAR (measured) = 2.56 mW/g

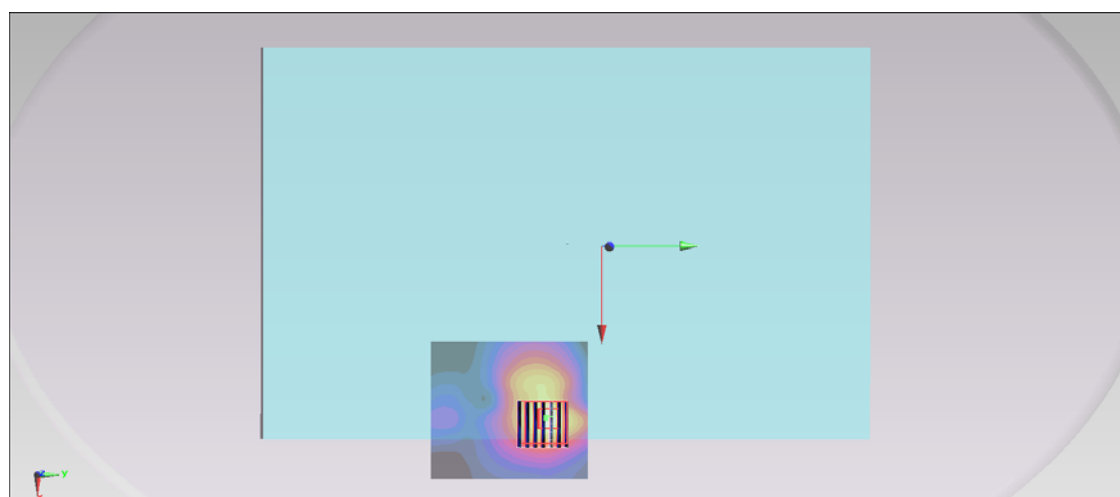

0 dB = 2.56 mW/g = 8.16 dB mW/g

#62_WLAN5GHz_802.11a 6Mbps_Bottom Face_0cm_Ch157;Ant 0

Communication System: 802.11a; Frequency: 5785 MHz; Duty Cycle: 1:1.015

Medium: MSL_5G_131011 Medium parameters used : $f = 5785$ MHz; $\sigma = 6.215$ mho/m; $\epsilon_r = 46.482$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.5 °C; Liquid Temperature : 22.5 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3801; ConvF(3.9, 3.9, 3.9); Calibrated: 2013/6/20;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn778; Calibrated: 2013/8/21
- Phantom: ELI 4.0_Front; Type: QDOVA001BB; Serial: 1029
- Measurement SW: DASY52, Version 52.8 (3); SEMCAD X Version 14.6.5 (6469)

Configuration/Ch157/Area Scan (71x81x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 3.42 mW/g


Configuration/Ch157/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 26.582 V/m; Power Drift = -0.10 dB

Peak SAR (extrapolated) = 6.244 mW/g

SAR(1 g) = 1.25 mW/g; SAR(10 g) = 0.368 mW/g

Maximum value of SAR (measured) = 3.33 mW/g

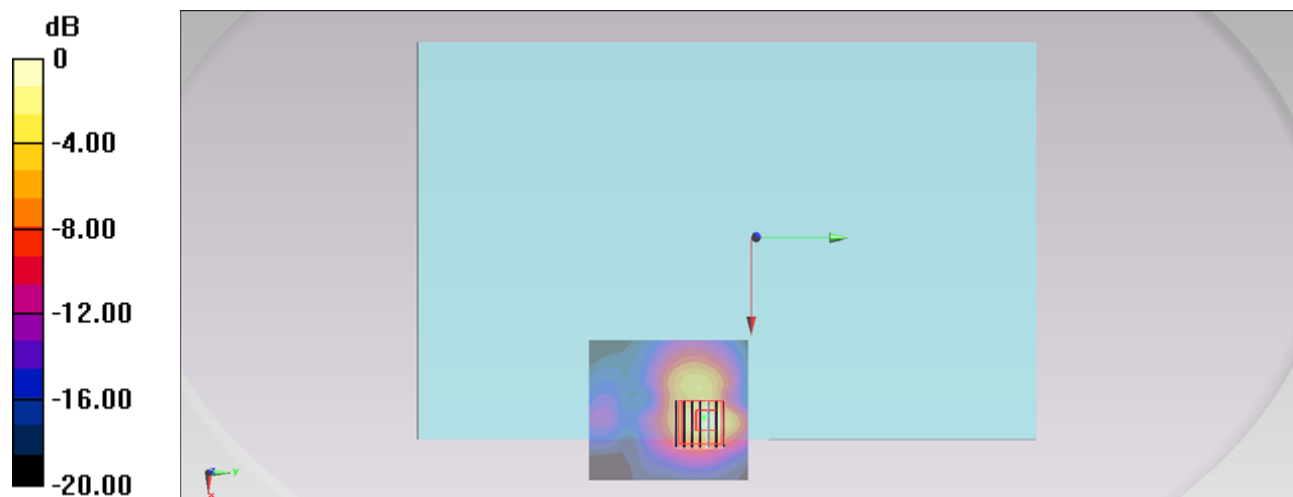

0 dB = 3.33 mW/g = 10.45 dB mW/g

#63_WLAN5GHz_802.11a 6Mbps_Edge 1_0cm_Ch165;Ant 0

Communication System: 802.11a; Frequency: 5825 MHz; Duty Cycle: 1:1.015

Medium: MSL_5G_131011 Medium parameters used : $f = 5825$ MHz; $\sigma = 6.296$ mho/m; $\epsilon_r = 46.355$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.5 °C; Liquid Temperature : 22.5 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3801; ConvF(3.9, 3.9, 3.9); Calibrated: 2013/6/20;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn778; Calibrated: 2013/8/21
- Phantom: ELI 4.0_Front; Type: QDOVA001BB; Serial: 1029
- Measurement SW: DASY52, Version 52.8 (3); SEMCAD X Version 14.6.5 (6469)

Configuration/Ch165/Area Scan (61x81x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 1.28 mW/g


Configuration/Ch165/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 15.474 V/m; Power Drift = -0.17 dB

Peak SAR (extrapolated) = 2.175 mW/g

SAR(1 g) = 0.475 mW/g; SAR(10 g) = 0.144 mW/g

Maximum value of SAR (measured) = 1.20 mW/g

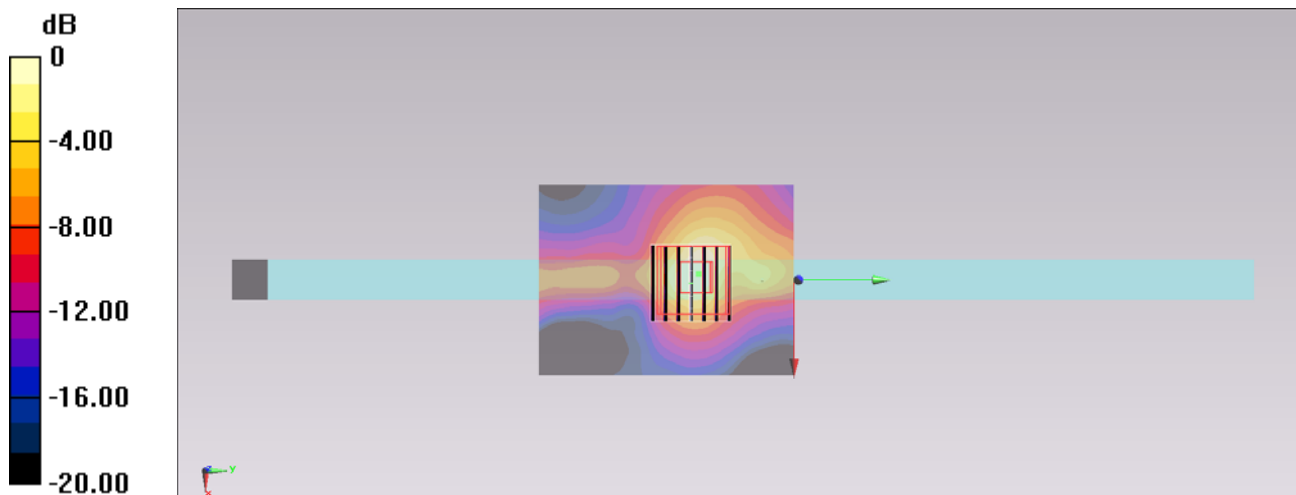

0 dB = 1.20 mW/g = 1.58 dB mW/g

#31_WLAN5GHz_802.11a 6Mbps_Bottom Face_0cm_Ch48;Ant 1

Communication System: 802.11a; Frequency: 5240 MHz; Duty Cycle: 1:1.015

Medium: MSL_5G_131010 Medium parameters used: $f = 5240$ MHz; $\sigma = 5.159$ mho/m; $\epsilon_r = 47.375$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.6 °C; Liquid Temperature : 22.6 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3801; ConvF(4.24, 4.24, 4.24); Calibrated: 2013/6/20;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn778; Calibrated: 2013/8/21
- Phantom: ELI 4.0_Front; Type: QDOVA001BB; Serial: 1029
- Measurement SW: DASY52, Version 52.8 (3); SEMCAD X Version 14.6.5 (6469)

Configuration/Ch48/Area Scan (71x91x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 1.20 mW/g


Configuration/Ch48/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 16.796 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 2.162 mW/g

SAR(1 g) = 0.485 mW/g; SAR(10 g) = 0.154 mW/g

Maximum value of SAR (measured) = 1.17 mW/g

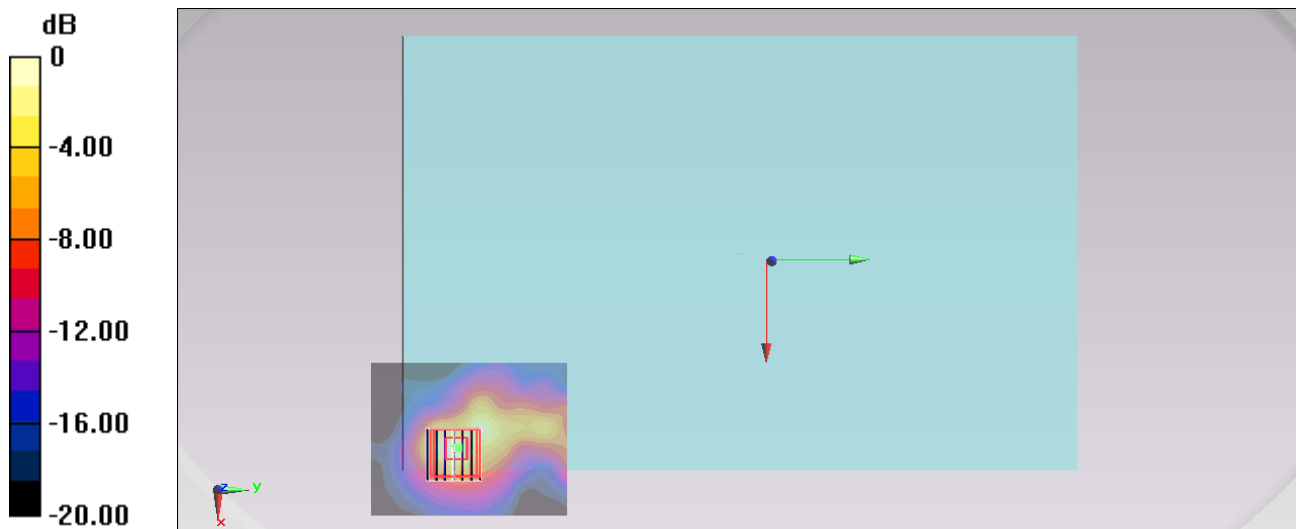

#32_WLAN5GHz_802.11a 6Mbps_Edge 1_0cm_Ch48;Ant 1

Communication System: 802.11a; Frequency: 5240 MHz; Duty Cycle: 1:1.015

Medium: MSL_5G_131010 Medium parameters used : $f = 5240$ MHz; $\sigma = 5.159$ mho/m; $\epsilon_r = 47.375$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.6 °C; Liquid Temperature : 22.6 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3801; ConvF(4.24, 4.24, 4.24); Calibrated: 2013/6/20;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn778; Calibrated: 2013/8/21
- Phantom: ELI 4.0_Front; Type: QDOVA001BB; Serial: 1029
- Measurement SW: DASY52, Version 52.8 (3); SEMCAD X Version 14.6.5 (6469)

Configuration/Ch48/Area Scan (61x91x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.829 mW/g


Configuration/Ch48/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 13.921 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 1.455 mW/g

SAR(1 g) = 0.354 mW/g; SAR(10 g) = 0.127 mW/g

Maximum value of SAR (measured) = 0.805 mW/g

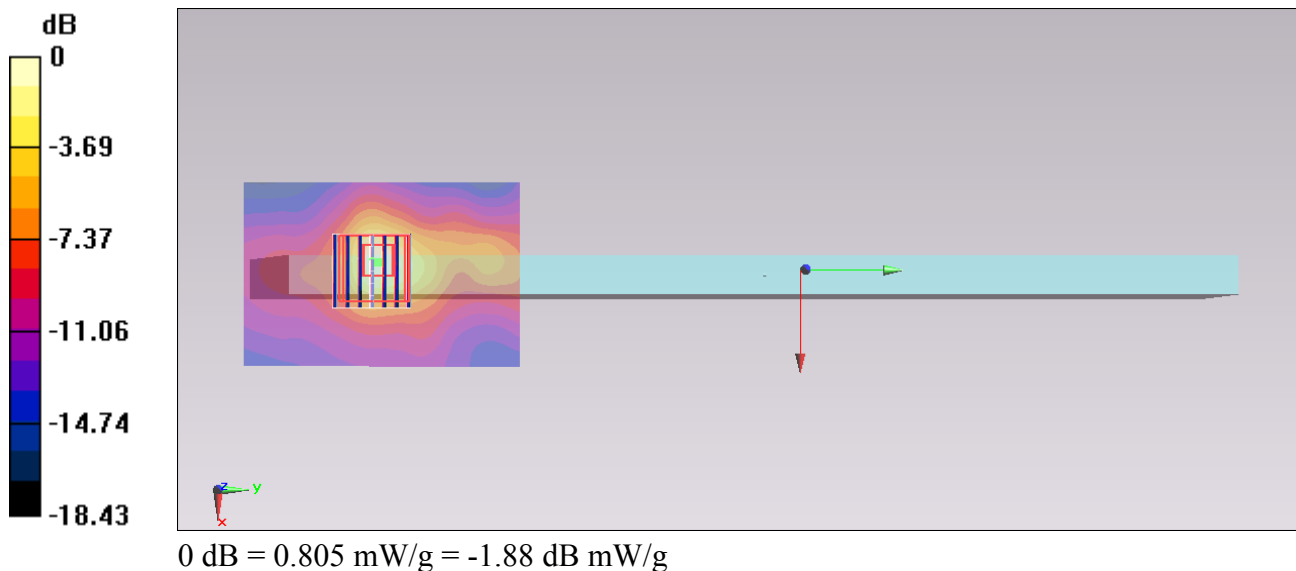

#33_WLAN5GHz_802.11a 6Mbps_Edge 4_0cm_Ch48;Ant 1

Communication System: 802.11a; Frequency: 5240 MHz; Duty Cycle: 1:1.015

Medium: MSL_5G_131010 Medium parameters used : $f = 5240$ MHz; $\sigma = 5.159$ mho/m; $\epsilon_r = 47.375$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.6 °C; Liquid Temperature : 22.6 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3801; ConvF(4.24, 4.24, 4.24); Calibrated: 2013/6/20;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn778; Calibrated: 2013/8/21
- Phantom: ELI 4.0_Front; Type: QDOVA001BB; Serial: 1029
- Measurement SW: DASY52, Version 52.8 (3); SEMCAD X Version 14.6.5 (6469)

Configuration/Ch48/Area Scan (61x91x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.239 mW/g


Configuration/Ch48/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 7.781 V/m; Power Drift = 0.13 dB

Peak SAR (extrapolated) = 0.498 mW/g

SAR(1 g) = 0.113 mW/g; SAR(10 g) = 0.036 mW/g

Maximum value of SAR (measured) = 0.264 mW/g

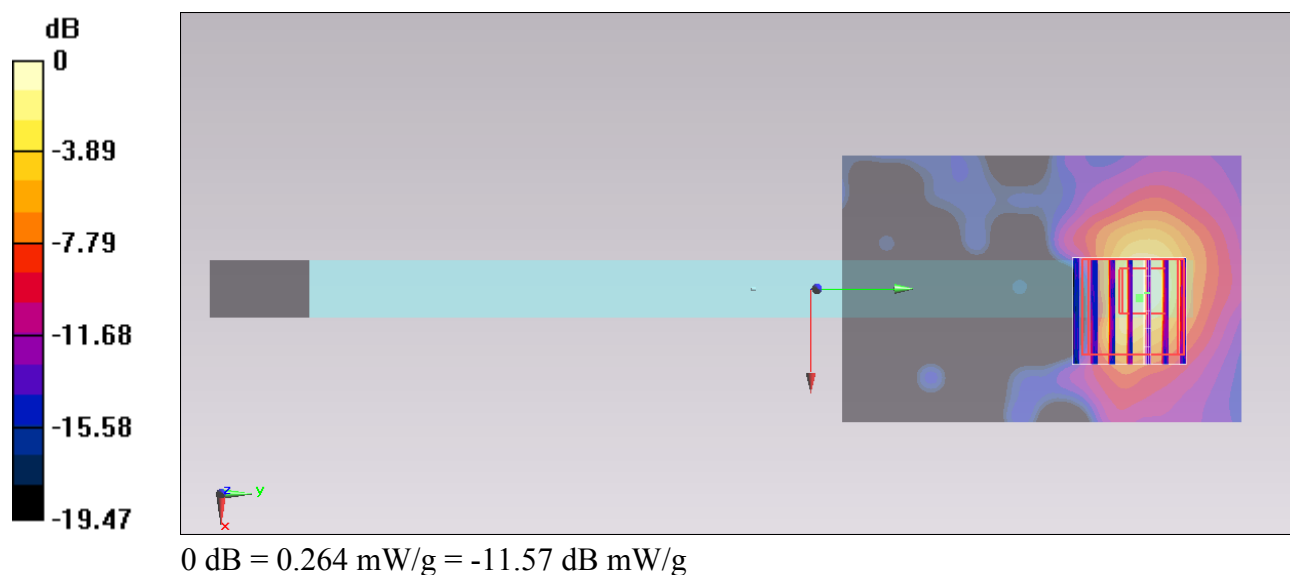

#56_WLAN5GHz_802.11a 6Mbps_Bottom Face_0cm_Ch60;Ant 1

Communication System: 802.11a; Frequency: 5300 MHz; Duty Cycle: 1:1.015

Medium: MSL_5G_131011 Medium parameters used: $f = 5300$ MHz; $\sigma = 5.466$ mho/m; $\epsilon_r = 47.251$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.5 °C; Liquid Temperature : 22.5 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3801; ConvF(4.05, 4.05, 4.05); Calibrated: 2013/6/20;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn778; Calibrated: 2013/8/21
- Phantom: ELI 4.0_Front; Type: QDOVA001BB; Serial: 1029
- Measurement SW: DASY52, Version 52.8 (3); SEMCAD X Version 14.6.5 (6469)

Configuration/Ch60/Area Scan (71x91x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 2.02 mW/g


Configuration/Ch60/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 21.777 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 3.891 mW/g

SAR(1 g) = 0.825 mW/g; SAR(10 g) = 0.242 mW/g

Maximum value of SAR (measured) = 2.08 mW/g

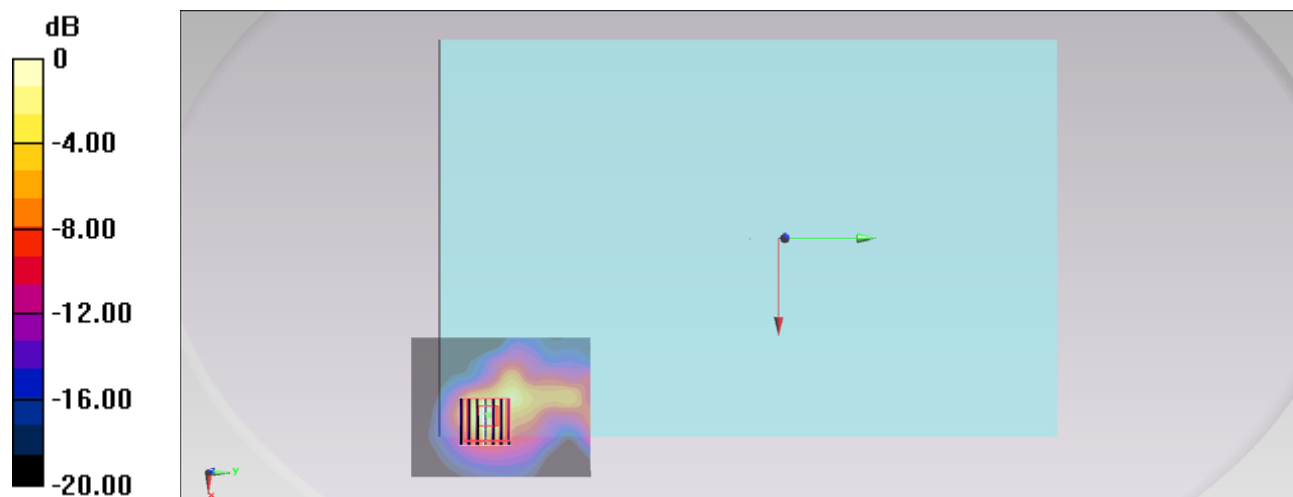

0 dB = 2.08 mW/g = 6.36 dB mW/g

#57_WLAN5GHz_802.11a 6Mbps_Bottom Face_0cm_Ch52;Ant 1

Communication System: 802.11a; Frequency: 5260 MHz; Duty Cycle: 1:1.015

Medium: MSL_5G_131011 Medium parameters used : $f = 5260$ MHz; $\sigma = 5.383$ mho/m; $\epsilon_r = 47.339$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.5 °C; Liquid Temperature : 22.5 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3801; ConvF(4.05, 4.05, 4.05); Calibrated: 2013/6/20;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn778; Calibrated: 2013/8/21
- Phantom: ELI 4.0_Front; Type: QDOVA001BB; Serial: 1029
- Measurement SW: DASY52, Version 52.8 (3); SEMCAD X Version 14.6.5 (6469)

Configuration/Ch52/Area Scan (71x91x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 1.60 mW/g


Configuration/Ch52/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 19.030 V/m; Power Drift = -0.06 dB

Peak SAR (extrapolated) = 2.889 mW/g

SAR(1 g) = 0.641 mW/g; SAR(10 g) = 0.201 mW/g

Maximum value of SAR (measured) = 1.60 mW/g

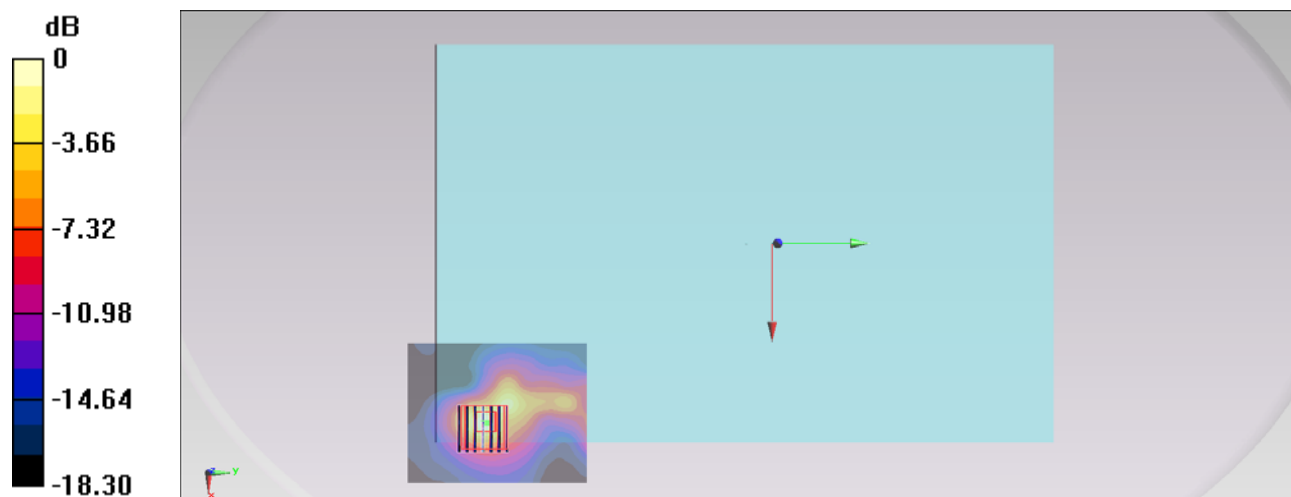

0 dB = 1.60 mW/g = 4.08 dB mW/g

#58_WLAN5GHz_802.11a 6Mbps_Edge 1_0cm_Ch60;Ant 1

Communication System: 802.11a; Frequency: 5300 MHz; Duty Cycle: 1:1.015

Medium: MSL_5G_131011 Medium parameters used: $f = 5300$ MHz; $\sigma = 5.466$ mho/m; $\epsilon_r = 47.251$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.5 °C; Liquid Temperature : 22.5 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3801; ConvF(4.05, 4.05, 4.05); Calibrated: 2013/6/20;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn778; Calibrated: 2013/8/21
- Phantom: ELI 4.0_Front; Type: QDOVA001BB; Serial: 1029
- Measurement SW: DASY52, Version 52.8 (3); SEMCAD X Version 14.6.5 (6469)

Configuration/Ch60/Area Scan (61x91x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 1.22 mW/g


Configuration/Ch60/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 15.799 V/m; Power Drift = -0.18 dB

Peak SAR (extrapolated) = 1.980 mW/g

SAR(1 g) = 0.449 mW/g; SAR(10 g) = 0.136 mW/g

Maximum value of SAR (measured) = 1.07 mW/g

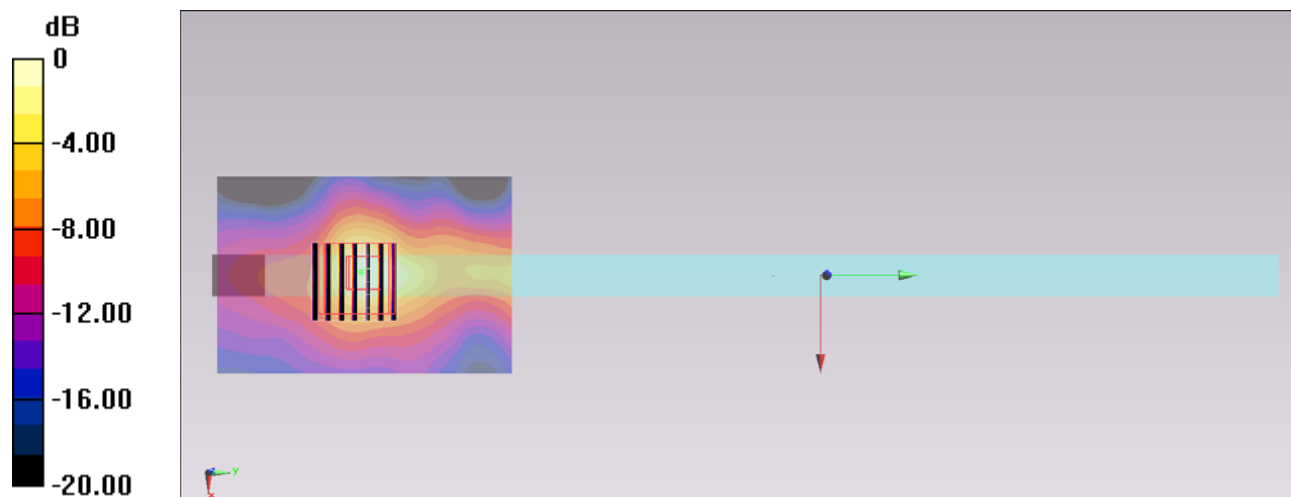

0 dB = 1.07 mW/g = 0.59 dB mW/g

#59_WLAN5GHz_802.11a 6Mbps_Edge 4_0cm_Ch60;Ant 1

Communication System: 802.11a; Frequency: 5300 MHz; Duty Cycle: 1:1.015

Medium: MSL_5G_131011 Medium parameters used: $f = 5300$ MHz; $\sigma = 5.466$ mho/m; $\epsilon_r = 47.251$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.5 °C; Liquid Temperature : 22.5 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3801; ConvF(4.05, 4.05, 4.05); Calibrated: 2013/6/20;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn778; Calibrated: 2013/8/21
- Phantom: ELI 4.0_Front; Type: QDOVA001BB; Serial: 1029
- Measurement SW: DASY52, Version 52.8 (3); SEMCAD X Version 14.6.5 (6469)

Configuration/Ch60/Area Scan (61x91x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.358 mW/g


Configuration/Ch60/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 8.849 V/m; Power Drift = -0.06 dB

Peak SAR (extrapolated) = 0.673 mW/g

SAR(1 g) = 0.150 mW/g; SAR(10 g) = 0.046 mW/g

Maximum value of SAR (measured) = 0.352 mW/g

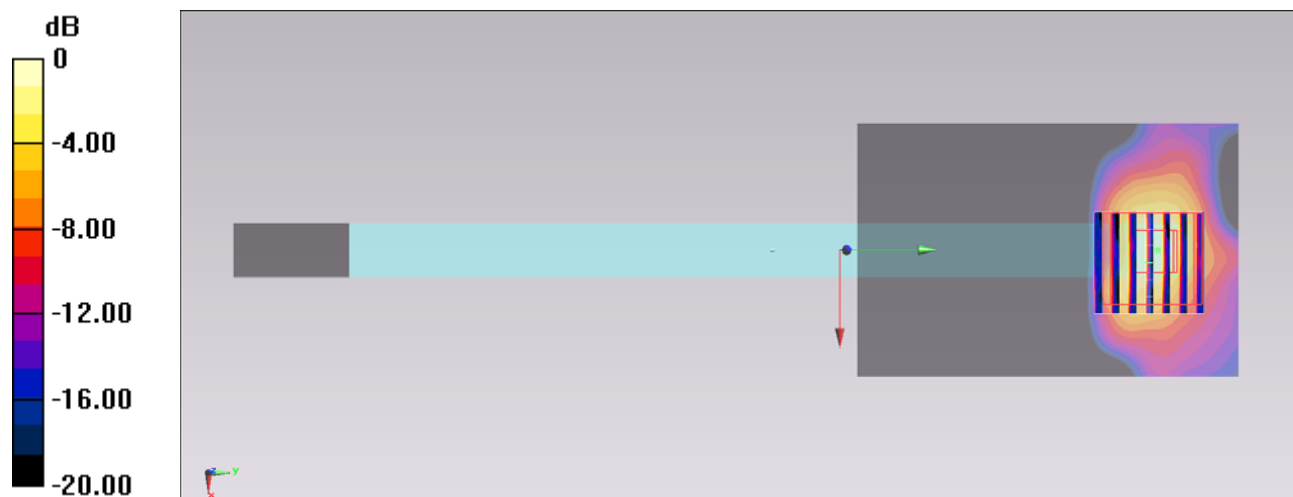

#40_WLAN5GHz_802.11a 6Mbps_Bottom Face_0cm_Ch116;Ant 1

Communication System: 802.11a; Frequency: 5580 MHz; Duty Cycle: 1:1.015

Medium: MSL_5G_131010 Medium parameters used: $f = 5580$ MHz; $\sigma = 5.618$ mho/m; $\epsilon_r = 46.854$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.6 °C; Liquid Temperature : 22.6 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3801; ConvF(4, 4, 4); Calibrated: 2013/6/20;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn778; Calibrated: 2013/8/21
- Phantom: ELI 4.0_Front; Type: QDOVA001BB; Serial: 1029
- Measurement SW: DASY52, Version 52.8 (3); SEMCAD X Version 14.6.5 (6469)

Configuration/Ch116/Area Scan (71x91x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 3.35 mW/g


Configuration/Ch116/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 26.668 V/m; Power Drift = -0.07 dB

Peak SAR (extrapolated) = 6.497 mW/g

SAR(1 g) = 1.26 mW/g; SAR(10 g) = 0.358 mW/g

Maximum value of SAR (measured) = 3.30 mW/g

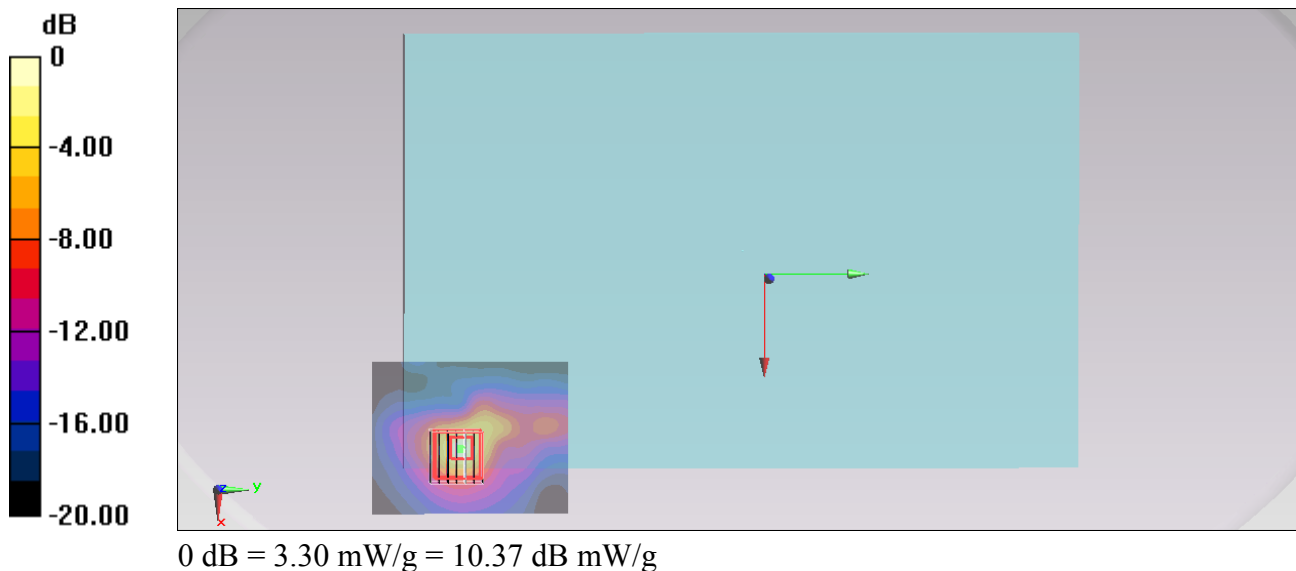

#49_WLAN5GHz_802.11a 6Mbps_Bottom Face_0cm_Ch116;Ant 1_Repeat

Communication System: 802.11a; Frequency: 5580 MHz; Duty Cycle: 1:1.015

Medium: MSL_5G_131010 Medium parameters used: $f = 5580$ MHz; $\sigma = 5.618$ mho/m; $\epsilon_r = 46.854$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.6 °C; Liquid Temperature : 22.6 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3801; ConvF(4, 4, 4); Calibrated: 2013/6/20;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn778; Calibrated: 2013/8/21
- Phantom: ELI 4.0_Front; Type: QDOVA001BB; Serial: 1029
- Measurement SW: DASY52, Version 52.8 (3); SEMCAD X Version 14.6.5 (6469)

Configuration/Ch116/Area Scan (71x91x1): Measurement grid: dx=10mm, dy=10mm
Maximum value of SAR (interpolated) = 3.24 mW/g


Configuration/Ch116/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 26.142 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 6.277 mW/g

SAR(1 g) = 1.21 mW/g; SAR(10 g) = 0.351 mW/g

Maximum value of SAR (measured) = 3.08 mW/g

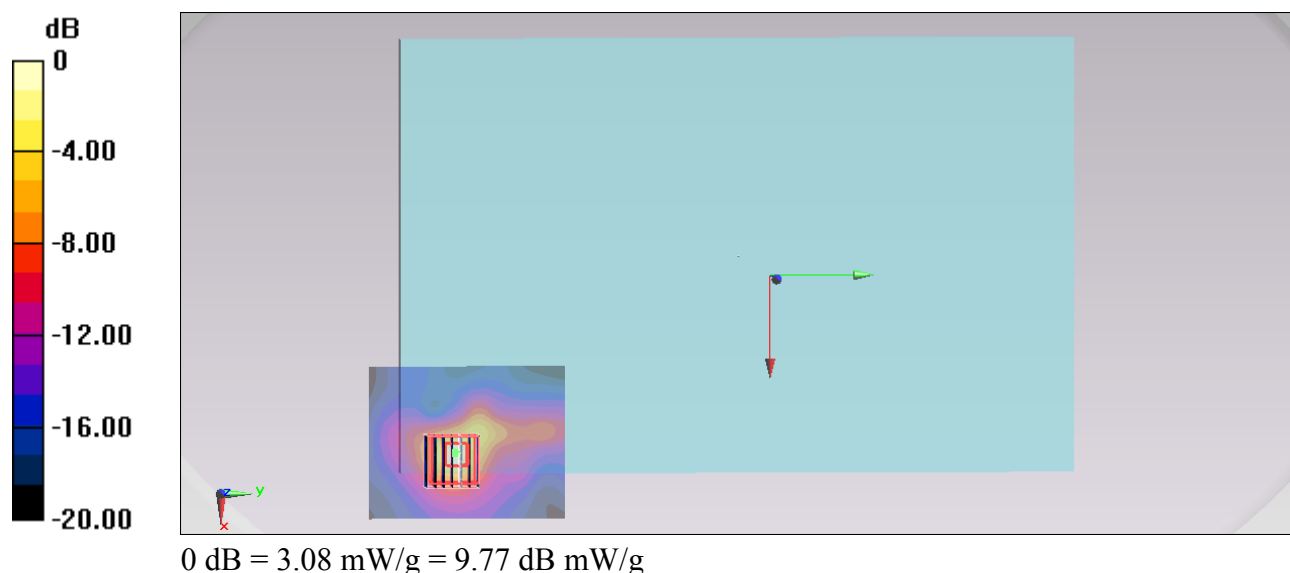

#41_WLAN5GHz_802.11a 6Mbps_Bottom Face_0cm_Ch108;Ant 1

Communication System: 802.11a; Frequency: 5540 MHz; Duty Cycle: 1:1.015

Medium: MSL_5G_131010 Medium parameters used: $f = 5540$ MHz; $\sigma = 5.568$ mho/m; $\epsilon_r = 46.968$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.6 °C; Liquid Temperature : 22.6 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3801; ConvF(3.83, 3.83, 3.83); Calibrated: 2013/6/20;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn778; Calibrated: 2013/8/21
- Phantom: ELI 4.0_Front; Type: QDOVA001BB; Serial: 1029
- Measurement SW: DASY52, Version 52.8 (3); SEMCAD X Version 14.6.5 (6469)

Configuration/Ch108/Area Scan (71x91x1): Measurement grid: dx=10mm, dy=10mm
Maximum value of SAR (interpolated) = 1.38 mW/g


Configuration/Ch108/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 17.673 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 2.544 mW/g

SAR(1 g) = 0.542 mW/g; SAR(10 g) = 0.168 mW/g

Maximum value of SAR (measured) = 1.37 mW/g

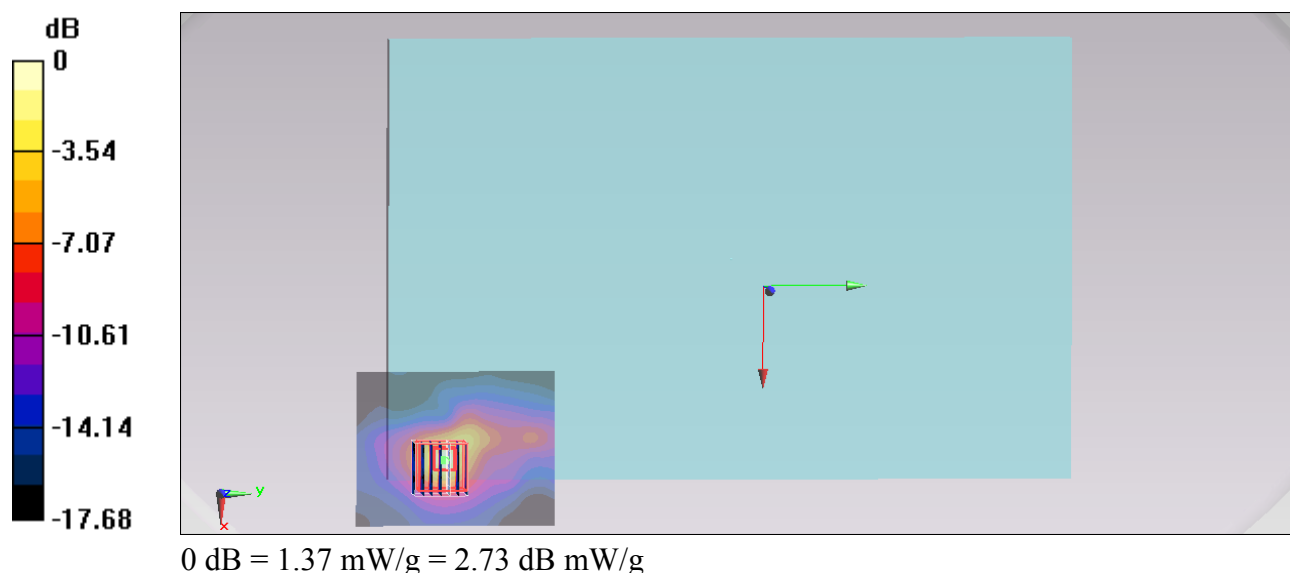

#42_WLAN5GHz_802.11a 6Mbps_Bottom Face_0cm_Ch132;Ant 1

Communication System: 802.11a; Frequency: 5660 MHz; Duty Cycle: 1:1.015

Medium: MSL_5G_131010 Medium parameters used: $f = 5660$ MHz; $\sigma = 5.752$ mho/m; $\epsilon_r = 46.723$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.6 °C; Liquid Temperature : 22.6 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3801; ConvF(4, 4, 4); Calibrated: 2013/6/20;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn778; Calibrated: 2013/8/21
- Phantom: ELI 4.0_Front; Type: QDOVA001BB; Serial: 1029
- Measurement SW: DASY52, Version 52.8 (3); SEMCAD X Version 14.6.5 (6469)

Configuration/Ch132/Area Scan (71x91x1): Measurement grid: dx=10mm, dy=10mm
Maximum value of SAR (interpolated) = 1.39 mW/g


Configuration/Ch132/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 17.031 V/m; Power Drift = 0.09 dB

Peak SAR (extrapolated) = 2.840 mW/g

SAR(1 g) = 0.539 mW/g; SAR(10 g) = 0.168 mW/g

Maximum value of SAR (measured) = 1.34 mW/g

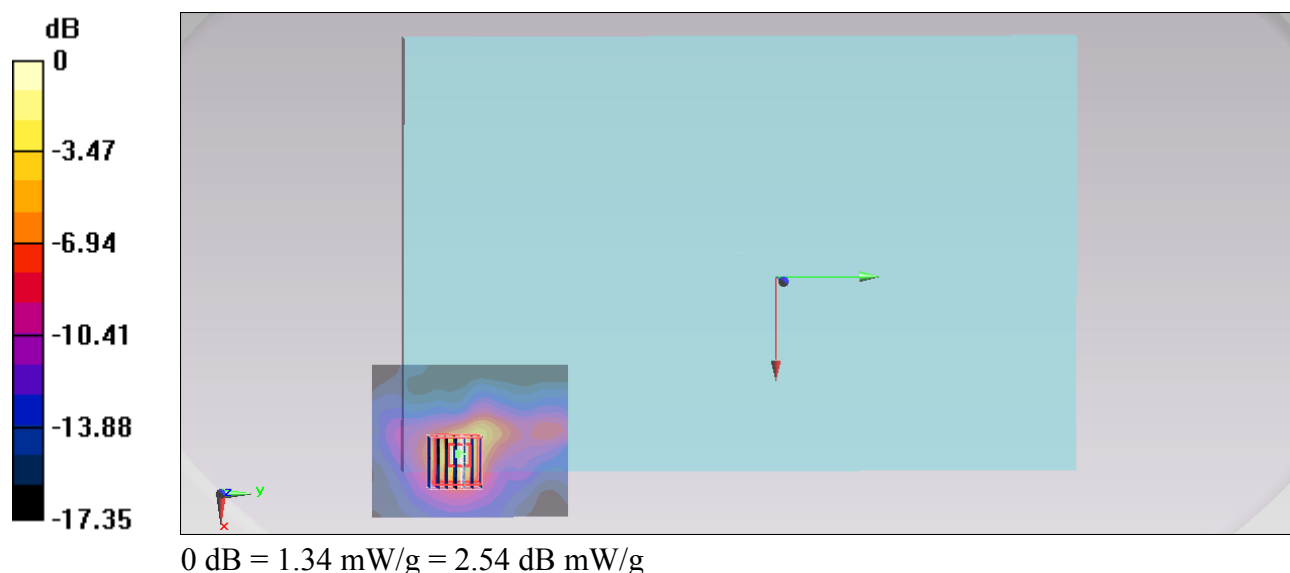

#44_WLAN5GHz_802.11a 6Mbps_Edge 1_0cm_Ch116;Ant 1

Communication System: 802.11a; Frequency: 5580 MHz; Duty Cycle: 1:1.015

Medium: MSL_5G_131010 Medium parameters used: $f = 5580$ MHz; $\sigma = 5.618$ mho/m; $\epsilon_r = 46.854$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.6 °C; Liquid Temperature : 22.6 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3801; ConvF(4, 4, 4); Calibrated: 2013/6/20;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn778; Calibrated: 2013/8/21
- Phantom: ELI 4.0_Front; Type: QDOVA001BB; Serial: 1029
- Measurement SW: DASY52, Version 52.8 (3); SEMCAD X Version 14.6.5 (6469)

Configuration/Ch116/Area Scan (61x91x1): Measurement grid: dx=10mm, dy=10mm
Maximum value of SAR (interpolated) = 2.04 mW/g


Configuration/Ch116/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 20.660 V/m; Power Drift = -0.08 dB

Peak SAR (extrapolated) = 4.148 mW/g

SAR(1 g) = 0.836 mW/g; SAR(10 g) = 0.282 mW/g

Maximum value of SAR (measured) = 1.98 mW/g

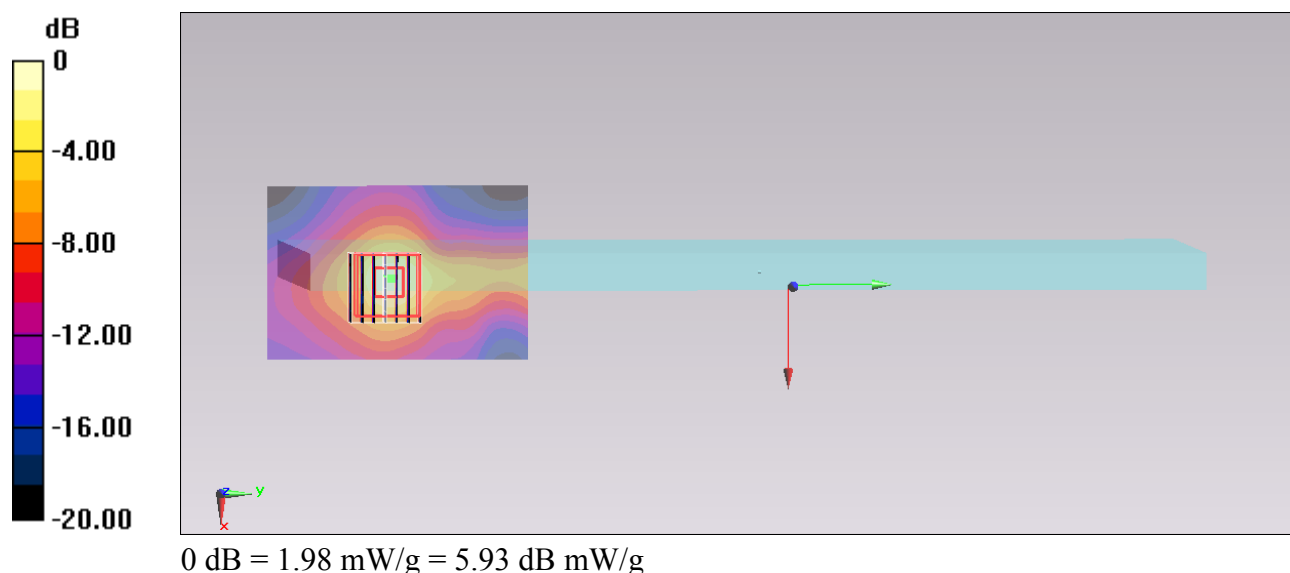

#45_WLAN5GHz_802.11a 6Mbps_Edge 1_0cm_Ch108;Ant 1

Communication System: 802.11a; Frequency: 5540 MHz; Duty Cycle: 1:1.015

Medium: MSL_5G_131010 Medium parameters used: $f = 5540$ MHz; $\sigma = 5.568$ mho/m; $\epsilon_r = 46.968$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.6 °C; Liquid Temperature : 22.6 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3801; ConvF(3.83, 3.83, 3.83); Calibrated: 2013/6/20;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn778; Calibrated: 2013/8/21
- Phantom: ELI 4.0_Front; Type: QDOVA001BB; Serial: 1029
- Measurement SW: DASY52, Version 52.8 (3); SEMCAD X Version 14.6.5 (6469)

Configuration/Ch108/Area Scan (61x91x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.932 mW/g


Configuration/Ch108/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 14.429 V/m; Power Drift = -0.14 dB

Peak SAR (extrapolated) = 1.691 mW/g

SAR(1 g) = 0.385 mW/g; SAR(10 g) = 0.138 mW/g

Maximum value of SAR (measured) = 0.874 mW/g

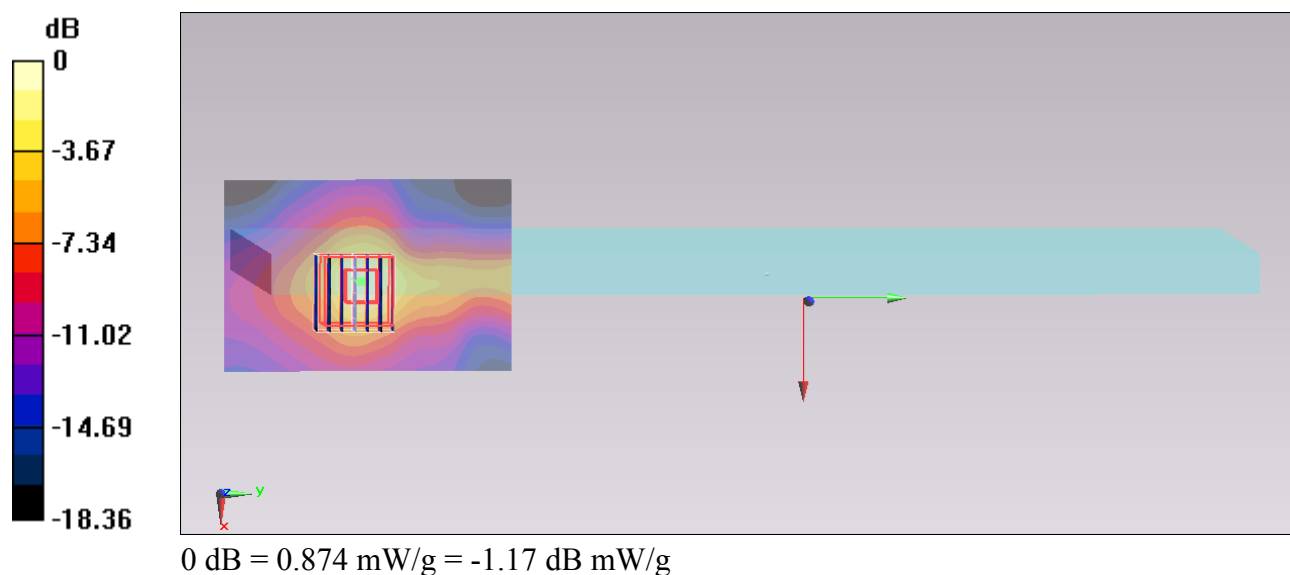

#46_WLAN5GHz_802.11a 6Mbps_Edge 1_0cm_Ch132;Ant 1

Communication System: 802.11a; Frequency: 5660 MHz; Duty Cycle: 1:1.015

Medium: MSL_5G_131010 Medium parameters used: $f = 5660$ MHz; $\sigma = 5.752$ mho/m; $\epsilon_r = 46.723$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.6 °C; Liquid Temperature : 22.6 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3801; ConvF(4, 4, 4); Calibrated: 2013/6/20;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn778; Calibrated: 2013/8/21
- Phantom: ELI 4.0_Front; Type: QDOVA001BB; Serial: 1029
- Measurement SW: DASY52, Version 52.8 (3); SEMCAD X Version 14.6.5 (6469)

Configuration/Ch132/Area Scan (61x91x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.990 mW/g


Configuration/Ch132/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 14.393 V/m; Power Drift = -0.19 dB

Peak SAR (extrapolated) = 2.050 mW/g

SAR(1 g) = 0.407 mW/g; SAR(10 g) = 0.143 mW/g

Maximum value of SAR (measured) = 0.970 mW/g

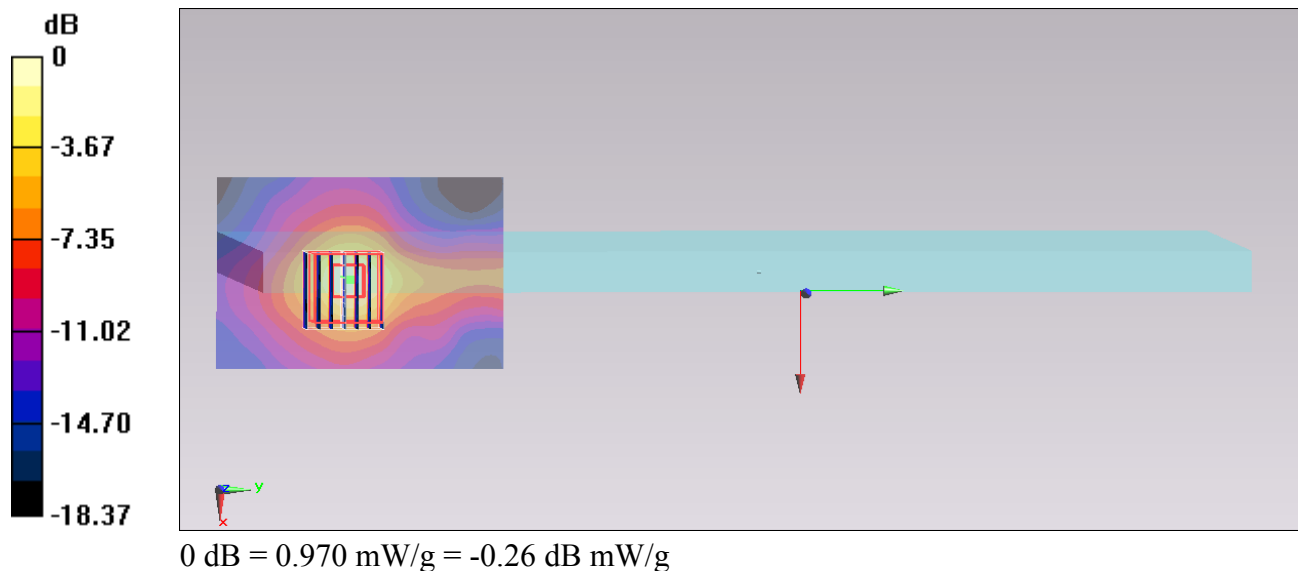

#50_WLAN5GHz_802.11a 6Mbps_Edge 4_0cm_Ch116;Ant 1

Communication System: 802.11a; Frequency: 5580 MHz; Duty Cycle: 1:1.015

Medium: MSL_5G_131010 Medium parameters used : $f = 5580$ MHz; $\sigma = 5.618$ mho/m; $\epsilon_r = 46.854$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.6 °C; Liquid Temperature : 22.6 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3801; ConvF(4, 4, 4); Calibrated: 2013/6/20;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn778; Calibrated: 2013/8/21
- Phantom: ELI 4.0_Front; Type: QDOVA001BB; Serial: 1029
- Measurement SW: DASY52, Version 52.8 (3); SEMCAD X Version 14.6.5 (6469)

Configuration/Ch116/Area Scan (61x91x1): Measurement grid: dx=10mm, dy=10mm
Maximum value of SAR (interpolated) = 0.991 mW/g


Configuration/Ch116/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 14.772 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 1.905 mW/g

SAR(1 g) = 0.393 mW/g; SAR(10 g) = 0.115 mW/g

Maximum value of SAR (measured) = 1.02 mW/g

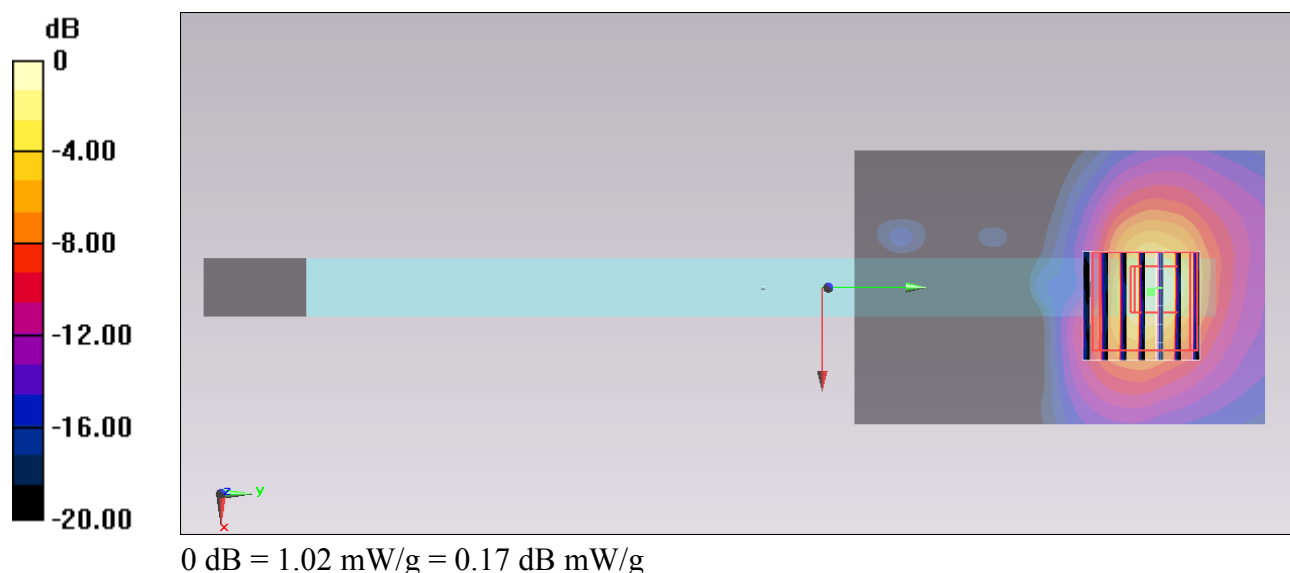

#51_WLAN5GHz_802.11a 6Mbps_Edge 4_0cm_Ch108;Ant 1

Communication System: 802.11a; Frequency: 5540 MHz; Duty Cycle: 1:1.015

Medium: MSL_5G_131010 Medium parameters used : $f = 5540$ MHz; $\sigma = 5.568$ mho/m; $\epsilon_r = 46.968$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.6 °C; Liquid Temperature : 22.6 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3801; ConvF(3.83, 3.83, 3.83); Calibrated: 2013/6/20;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn778; Calibrated: 2013/8/21
- Phantom: ELI 4.0_Front; Type: QDOVA001BB; Serial: 1029
- Measurement SW: DASY52, Version 52.8 (3); SEMCAD X Version 14.6.5 (6469)

Configuration/Ch108/Area Scan (61x91x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.405 mW/g


Configuration/Ch108/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 9.756 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 0.729 mW/g

SAR(1 g) = 0.167 mW/g; SAR(10 g) = 0.052 mW/g

Maximum value of SAR (measured) = 0.418 mW/g

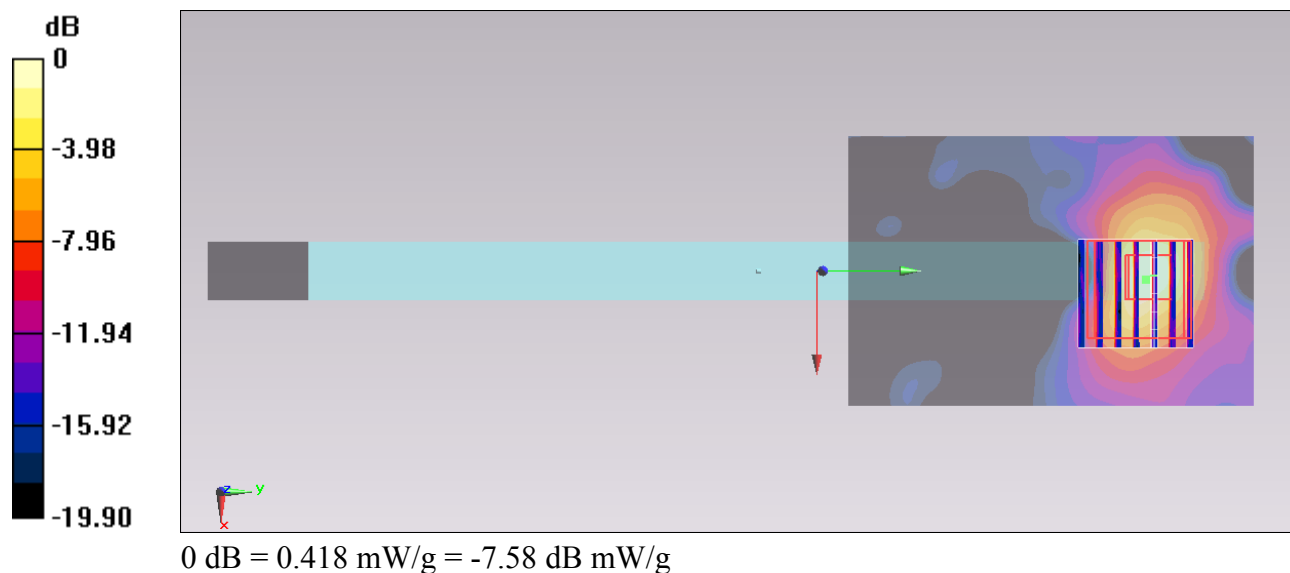

#52_WLAN5GHz_802.11a 6Mbps_Edge 4_0cm_Ch132;Ant 1

Communication System: 802.11a; Frequency: 5660 MHz; Duty Cycle: 1:1.015

Medium: MSL_5G_131010 Medium parameters used : $f = 5660$ MHz; $\sigma = 5.752$ mho/m; $\epsilon_r = 46.723$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.6 °C; Liquid Temperature : 22.6 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3801; ConvF(4, 4, 4); Calibrated: 2013/6/20;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn778; Calibrated: 2013/8/21
- Phantom: ELI 4.0_Front; Type: QDOVA001BB; Serial: 1029
- Measurement SW: DASY52, Version 52.8 (3); SEMCAD X Version 14.6.5 (6469)

Configuration/Ch132/Area Scan (61x91x1): Measurement grid: dx=10mm, dy=10mm
Maximum value of SAR (interpolated) = 0.479 mW/g


Configuration/Ch132/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 10.079 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 0.939 mW/g

SAR(1 g) = 0.193 mW/g; SAR(10 g) = 0.060 mW/g

Maximum value of SAR (measured) = 0.483 mW/g

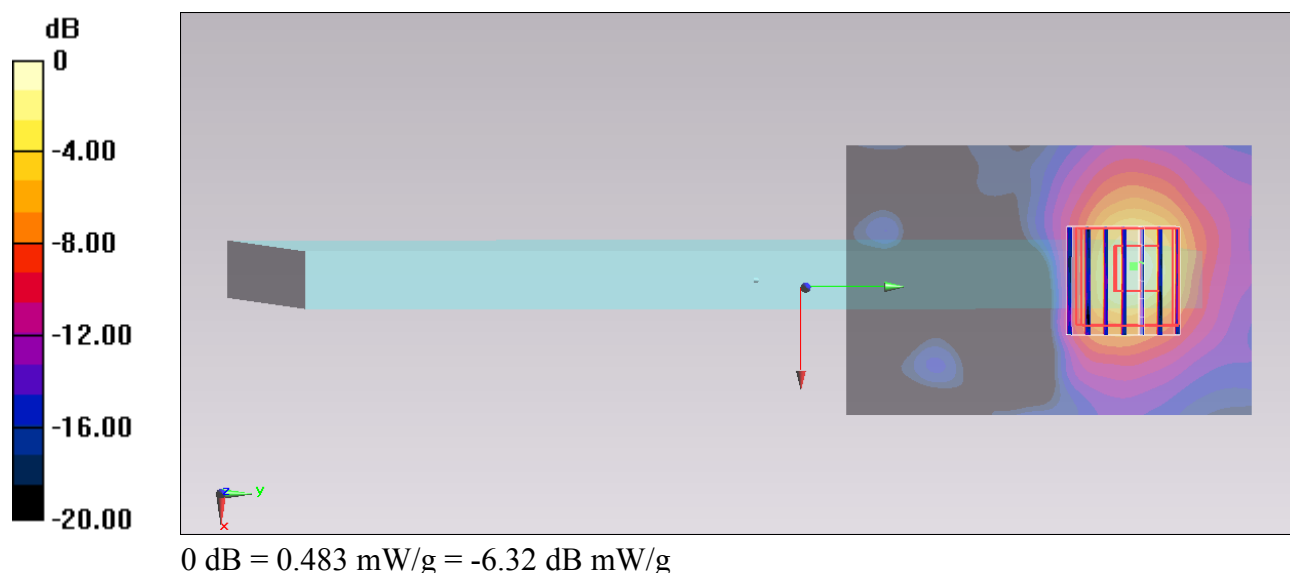

#64_WLAN5GHz_802.11a 6Mbps_Bottom Face_0cm_Ch149;Ant 1

Communication System: 802.11a; Frequency: 5745 MHz; Duty Cycle: 1:1.015

Medium: MSL_5G_131011 Medium parameters used : $f = 5745$ MHz; $\sigma = 6.17$ mho/m; $\epsilon_r = 46.632$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.5 °C; Liquid Temperature : 22.5 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3801; ConvF(3.9, 3.9, 3.9); Calibrated: 2013/6/20;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn778; Calibrated: 2013/8/21
- Phantom: ELI 4.0_Front; Type: QDOVA001BB; Serial: 1029
- Measurement SW: DASY52, Version 52.8 (3); SEMCAD X Version 14.6.5 (6469)

Configuration/Ch149/Area Scan (71x91x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 1.34 mW/g


Configuration/Ch149/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 17.428 V/m; Power Drift = 0.12 dB

Peak SAR (extrapolated) = 3.044 mW/g

SAR(1 g) = 0.617 mW/g; SAR(10 g) = 0.162 mW/g

Maximum value of SAR (measured) = 1.66 mW/g

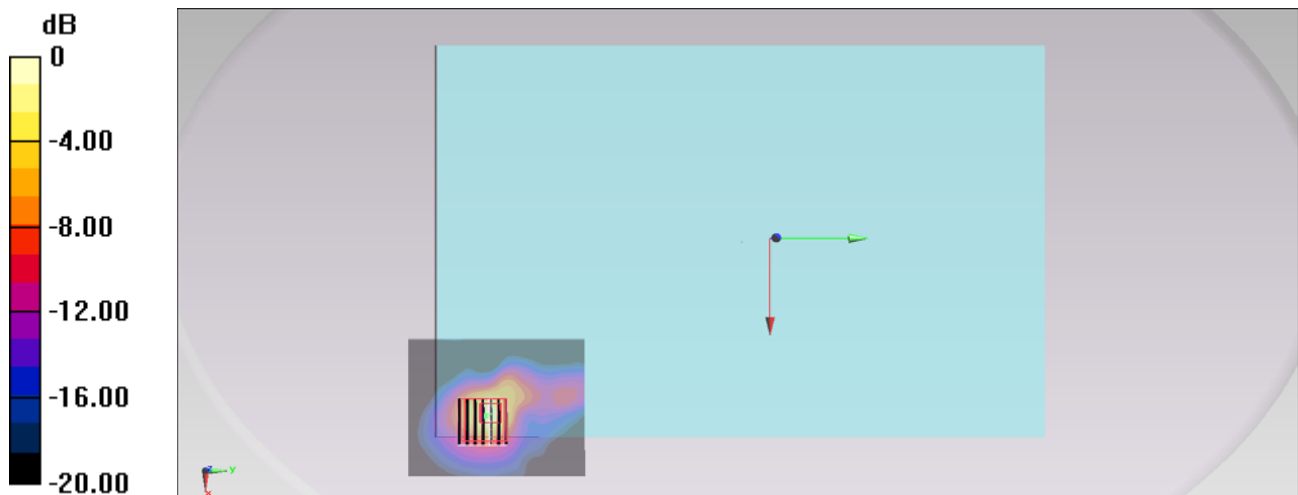

#65_WLAN5GHz_802.11a 6Mbps_Bottom Face_0cm_Ch157;Ant 1

Communication System: 802.11a; Frequency: 5785 MHz; Duty Cycle: 1:1.015

Medium: MSL_5G_131011 Medium parameters used : $f = 5785$ MHz; $\sigma = 6.215$ mho/m; $\epsilon_r = 46.482$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.5 °C; Liquid Temperature : 22.5 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3801; ConvF(3.9, 3.9, 3.9); Calibrated: 2013/6/20;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn778; Calibrated: 2013/8/21
- Phantom: ELI 4.0_Front; Type: QDOVA001BB; Serial: 1029
- Measurement SW: DASY52, Version 52.8 (3); SEMCAD X Version 14.6.5 (6469)

Configuration/Ch157/Area Scan (71x91x1): Measurement grid: dx=10mm, dy=10mm
Maximum value of SAR (interpolated) = 1.60 mW/g



Configuration/Ch157/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 18.335 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 2.929 mW/g

SAR(1 g) = 0.596 mW/g; SAR(10 g) = 0.162 mW/g

Maximum value of SAR (measured) = 1.56 mW/g

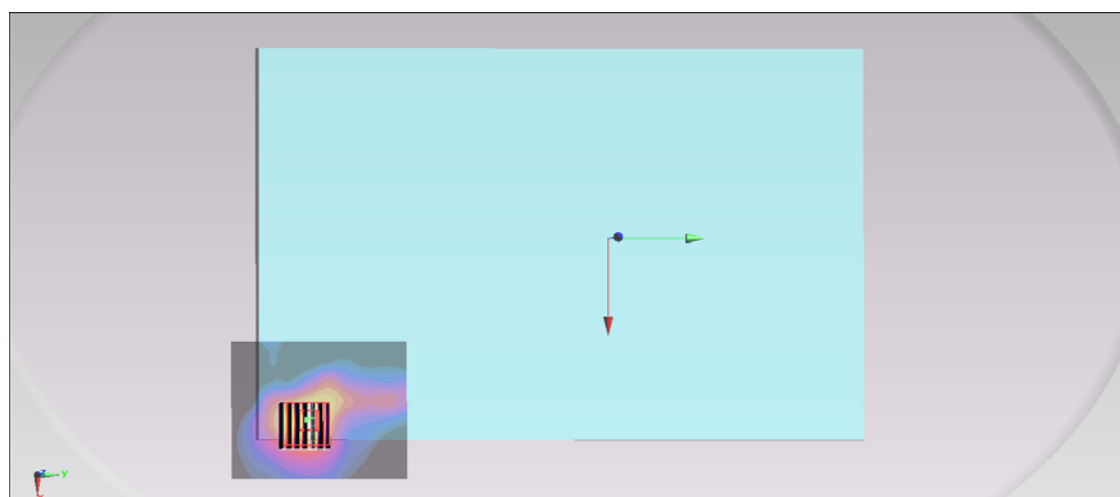

0 dB = 1.56 mW/g = 3.86 dB mW/g

#66_WLAN5GHz_802.11a 6Mbps_Bottom Face_0cm_Ch165;Ant 1

Communication System: 802.11a; Frequency: 5825 MHz; Duty Cycle: 1:1.015

Medium: MSL_5G_131011 Medium parameters used : $f = 5825$ MHz; $\sigma = 6.296$ mho/m; $\epsilon_r = 46.355$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.5 °C; Liquid Temperature : 22.5 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3801; ConvF(3.9, 3.9, 3.9); Calibrated: 2013/6/20;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn778; Calibrated: 2013/8/21
- Phantom: ELI 4.0_Front; Type: QDOVA001BB; Serial: 1029
- Measurement SW: DASY52, Version 52.8 (3); SEMCAD X Version 14.6.5 (6469)

Configuration/Ch165/Area Scan (71x91x1): Measurement grid: dx=10mm, dy=10mm
Maximum value of SAR (interpolated) = 1.15 mW/g


Configuration/Ch165/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 15.455 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 2.193 mW/g

SAR(1 g) = 0.466 mW/g; SAR(10 g) = 0.153 mW/g

Maximum value of SAR (measured) = 1.18 mW/g

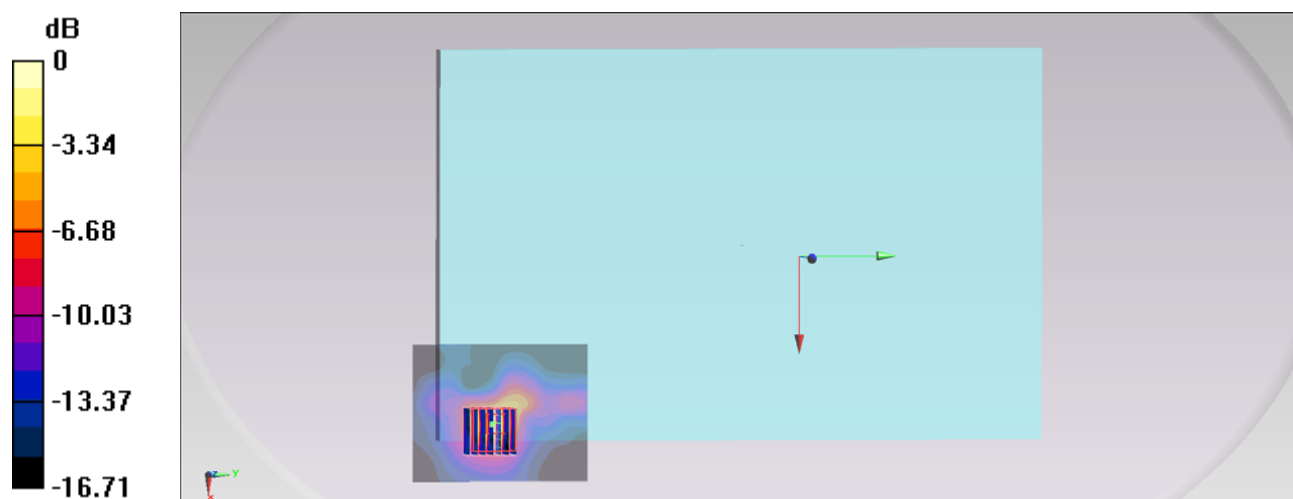

0 dB = 1.18 mW/g = 1.44 dB mW/g

#67_WLAN5GHz_802.11a 6Mbps_Edge 1_0cm_Ch149;Ant 1

Communication System: 802.11a; Frequency: 5745 MHz; Duty Cycle: 1:1.015

Medium: MSL_5G_131011 Medium parameters used: $f = 5745$ MHz; $\sigma = 6.17$ mho/m; $\epsilon_r = 46.632$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.5 °C; Liquid Temperature : 22.5 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3801; ConvF(3.9, 3.9, 3.9); Calibrated: 2013/6/20;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn778; Calibrated: 2013/8/21
- Phantom: ELI 4.0_Front; Type: QDOVA001BB; Serial: 1029
- Measurement SW: DASY52, Version 52.8 (3); SEMCAD X Version 14.6.5 (6469)

Configuration/Ch149/Area Scan (61x91x1): Measurement grid: dx=10mm, dy=10mm
Maximum value of SAR (interpolated) = 1.24 mW/g


Configuration/Ch149/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 16.029 V/m; Power Drift = -0.07 dB

Peak SAR (extrapolated) = 2.251 mW/g

SAR(1 g) = 0.481 mW/g; SAR(10 g) = 0.153 mW/g

Maximum value of SAR (measured) = 1.20 mW/g

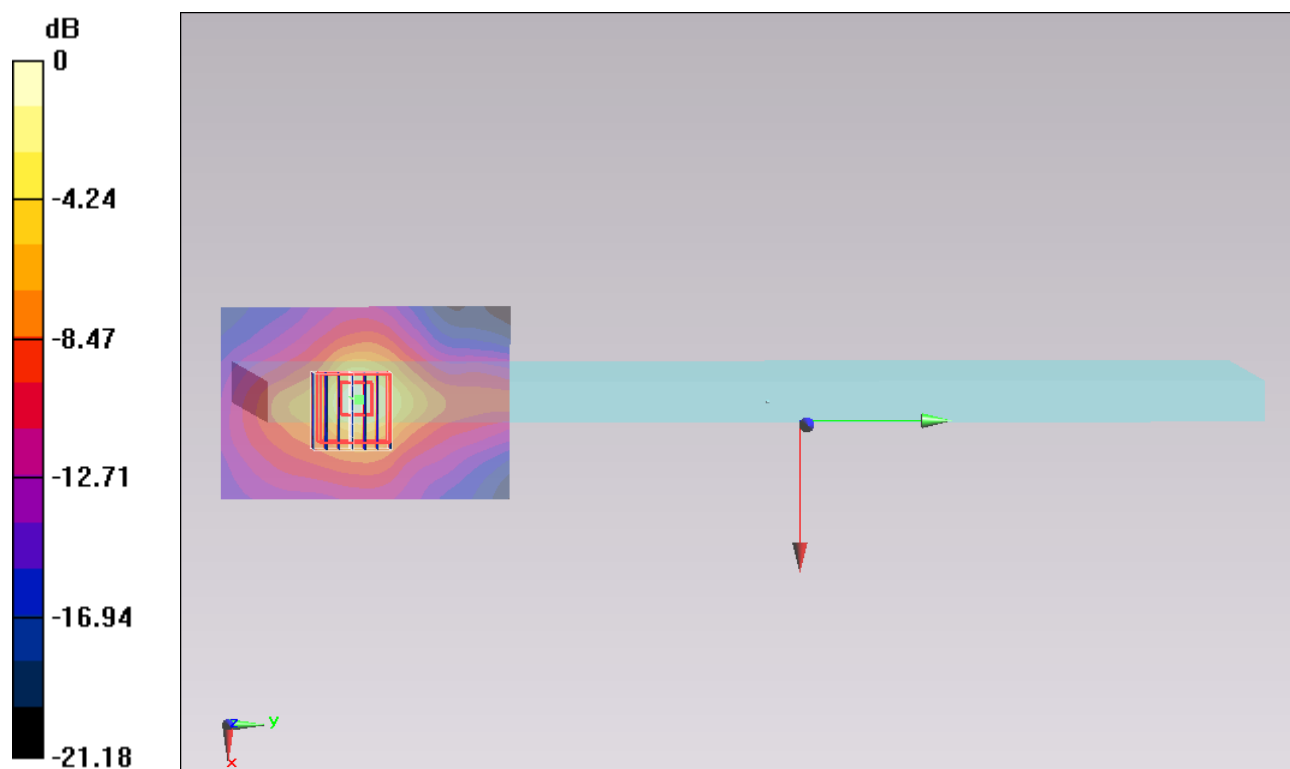

0 dB = 1.20 mW/g = 1.58 dB mW/g

#68_WLAN5GHz_802.11a 6Mbps_Edge 4_0cm_Ch149;Ant 1

Communication System: 802.11a; Frequency: 5745 MHz; Duty Cycle: 1:1.015

Medium: MSL_5G_131011 Medium parameters used: $f = 5745$ MHz; $\sigma = 6.17$ mho/m; $\epsilon_r = 46.632$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.5 °C; Liquid Temperature : 22.5 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3801; ConvF(3.9, 3.9, 3.9); Calibrated: 2013/6/20;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn778; Calibrated: 2013/8/21
- Phantom: ELI 4.0_Front; Type: QDOVA001BB; Serial: 1029
- Measurement SW: DASY52, Version 52.8 (3); SEMCAD X Version 14.6.5 (6469)

Configuration/Ch149/Area Scan (61x101x1): Measurement grid: dx=10mm, dy=10mm
Maximum value of SAR (interpolated) = 0.481 mW/g

Configuration/Ch149/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 10.306 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 0.926 mW/g

SAR(1 g) = 0.208 mW/g; SAR(10 g) = 0.073 mW/g

Maximum value of SAR (measured) = 0.492 mW/g

