



Global Product Certification
EMC-EMF Safety Approvals

EMC Technologies Pty Ltd
ABN 82 057 105 549
176 Harrick Road
Keilor Park Victoria Australia 3042

Ph: + 613 9365 1000
Fax: + 613 9331 7455
email: melb@emctech.com.au

**EMI TEST REPORT FOR CERTIFICATION
to
FCC PART 15 Subpart E (Section 15.407) & RSS-210**

FCC ID: EJE-WB0088
Industry Canada ID: 337J-WB0088

Test Sample: Convertible Tablet Computer
Model: T904

Radio Module: Intel Centrino Advanced-N Wilkins Peak 7260HMW

Report Number M131103_FCC_7260HMW

Issue Date: 2 December 2013

EMC Technologies Pty Ltd reports apply only to the specific samples tested under stated test conditions. It is the manufacturer's responsibility to assure that additional production units of this model are manufactured with identical electrical and mechanical components. EMC Technologies Pty Ltd shall have no liability for any deductions, inferences or generalisations drawn by the client or others from EMC Technologies Pty Ltd issued reports. This report shall not be used to claim, constitute or imply product endorsement by EMC Technologies Pty Ltd.

This document must not be copied or reproduced, except in full without the written permission of the Manager, EMC Technologies Pty Ltd. The certificate of pg 3 may be reproduced in full.
www.emctech.com.au

EMI TEST REPORT FOR CERTIFICATION
to
FCC PART 15 Subpart E (Section 15.407) & RSS-210

EMC Technologies Report No. M131103_FCC_7260HMW_NII-1

Issue Date: 2 December 2013

CONTENTS

1.0 INTRODUCTION
2.0 GENERAL INFORMATION

FCC 15.407 (U-NII) RESULTS

3.0 CONDUCTED EMI MEASUREMENTS
4.0 RADIATED EMI MEASUREMENTS
5.0 PEAK OUTPUT POWER
6.0 CHANNEL BANDWIDTH
7.0 PEAK POWER SPECTRAL DENSITY
8.0 PEAK EXCURSION
9.0 FREQUENCY STABILITY
10.0 DYNAMIC FREQUENCY SELECTION
11.0 DISCONTINUE TRANSMISSION
12.0 RADIO FREQUENCY EXPOSURE
13.0 ANTENNA REQUIREMENT
14.0 COMPLIANCE STATEMENT
15.0 MEASUREMENT UNCERTAINTIES
16.0 TEST REPORT APPENDICES

APPENDIX A: MEASUREMENT INSTRUMENT DETAILS

APPENDIX B: PHOTOGRAPHS
APPENDIX C: OPERATIONAL DESCRIPTION
APPENDIX D: BLOCK DIAGRAM
APPENDIX E: SCHEMATIC
APPENDIX F: ANTENNA INFORMATION
APPENDIX G: FCC LABELLING DETAILS
APPENDIX H: USER MANUAL

Attachment – RF Exposure Information

Attachment – FCC DOC for Convertible Tablet Computer

Attachment – Intel FCC Part 15E Test Report

**EMI TEST REPORT FOR CERTIFICATION
to
FCC PART 15 Subpart E (Section 15.407) & RSS-210**

Report No. M131103_FCC_7260HMW_NII

Test Sample: Portable Convertible Tablet Computer
Model: T904
Radio Module: Intel Centrino Advanced-N Wilkins Peak 7260HMW

FCC ID: EJE-WB0088
Industry Canada ID: 337J-WB0088
Equipment Type: Intentional Radiator (Transceiver)

Manufacturer (Host): Fujitsu Ltd
Address: 1-1 Kamikodanaka 4-Chome, Nakahara-Ku, Kawasaki, Japan

Test Standards: FCC Part 15 – Radio Frequency Devices (October 2009)
FCC Part 15, Subpart E – Unlicensed National Information, Infrastructure Devices
FCC Part 15.407, General Technical Requirements
ANSI C63.4 – 2009

RSS-210 Issue 8 Low Power Licence-Exempt RadioCommunication Devices Annex 9: Local Area Network Devices

RSS-102 Issue 1 (Provisional), Evaluation Procedure for Mobile and Portable Radio Transmitters with respect to Health Canada's Safety Code 6 for Exposure of Humans to Radio Frequency Fields

Test Dates: 22 November to 2 December 2013

Test Engineer: **Matt Grimwood**

Attestation: *I hereby certify that the device(s) described herein were tested as described in this report and that the data included is that which was obtained during such testing.*

Authorised Signatory:



Rob Weir
Facility Manager
EMC Technologies Pty Ltd

EMI TEST REPORT FOR CERTIFICATION
to
FCC PART 15 Subpart E (Section 15.407) & RSS-210

1.0 INTRODUCTION

EMI testing was performed on the Fujitsu Portable Convertible Tablet Computer, Model: T904 with Intel Centrino Advanced-N 7260 (Wilkins Peak2 802.11a/b/g/n + BT), Model: 7260HMW.

The 7260HMW WLAN module was originally certified by INTEL Corporation as a modular approval under FCC ID: PD97260H (Canada ID: 1000M-7260H).

The intention of this application is to certify the Fujitsu Portable Convertible Tablet Computer, Model: T904 incorporating the Intel Centrino Advanced-N 7260 (Wilkins Peak2 802.11a/b/g/n + BT), Model: 7260HMW radio module.

As requested by the customer only those requirements deemed likely to be affected by the host tablet are reported herein.

Refer to the modular test reports 30867RRF.002 and 30867RRF.003 from AT4 Wireless, S.A. with FCC registration number 905266 and Canadian Certification reference number IC 4621A-1 for results of tests that the tablet was deemed to have negligible effect. Original test reports are submitted with this application.

1.1 Summary of Results

FCC Subpart E, Section 15.407

FCC Part 15, Subpart E Clauses	Industry Canada RSS-210 Clauses	Test Performed	Result
15.203	5.5	Antenna Requirement	Complies
15.205	6.3	Operation in Restricted Band	Complies
15.207	6.6	Conducted Emissions	Complies
15.209	6.3	Radiated Emissions	Complies
15.407 (a)(1) (a)(2)	Annex A9.2	Peak Transmit Power	Note 1
15.407 (a)(5)	Annex A9.2	Peak Power Spectral Density	Note 1
15.407 (a)(6)		Peak Excursion	Note 1
15.407 (b)	Annex A9.3	Undesirable Emission	Complies
15.407 (c)	Annex A9.5(4)	Discontinue Transmission	Complies
15.407 (d)		Reserved	-
15.407 (e)	2.2 (Table 1)	Restricted to Indoor Operations	Complies
15.407 (f)	RSS-Gen (5.5)	Radio Frequency Hazard	Complies
15.407 (g)	Annex A9.5(5)	Frequency Stability	Note 1
15.407 (h)		Transmit Power Control	Not Applicable E.I.R.P < 500 mW
15.407 (h)	Annex A9.4	Dynamic Frequency Selection	Note 1

Note 1: Refer to the radio module report.

The sample **complied** with the requirements of 47 CFR, Part 15 Subpart E - Section 15.407.

The sample **complied** with the Industry Canada RSS-210 issue 8 - Low Power Licence-Exempt Radiocommunication Devices (All Frequency Bands): Category I Equipment, Annex 9 and the RF exposure requirements of RSS-102.

1.2 Modifications by EMC Technologies

No modifications were required.

2.0 GENERAL INFORMATION

(Information supplied by the Client)

2.1 EUT (WLAN) Details

Transmitter:	Half Mini-Card Wireless LAN Module
Wireless Module:	Intel Centrino Advanced-N 7260 (Wilkins Peak2) (11a/b/g/n)
Model Number:	7260HMW
Manufacturer:	Intel Corporation
Frequency Ranges:	2.412–2.462 GHz for 11b/g/n 5.18-5.32 GHz and 5.745-5.825 GHz for 11a/n
Maximum Data Rates:	802.11b = 11Mbps, 802.11g and 802.11a = 54Mbps 802.11n = 450 Mbps
Antenna Types:	Nissei Inverted F PIFA Antenna
Antenna gain:	Chain A = 2.78 dBi max (less than 6 dBi) Chain B = -0.14 dBi max (less than 6 dBi) Refer antenna data, provided separately

Channels and Output Power Setti:

The following power settings were taken from the Intel module specifications.

2.4 GHz (802.11b, 802.11g and 802.11n)

Mode	Tx BW (MHz)	Channel	Frequency (MHz)	Average Power Target (dBm)	
				Ch A	Ch B
802.11b 2.4 GHz	20	1	2412	15.5	14.0
		6	2437		
		11	2462	15.5	14.0
		13	2472	13.5	12.0
802.11g 2.4 GHz	20	1	2412	13.5	12.0
		2	2417	16.0	15.0
		6	2437	16.5	15.5
		10	2457		13.5
		11	2462	13.5	12.0
		13	2472	16.5	15.0
802.11n 2.4 GHz	20	1	2412	13.5	12.0
		2	2417	16.0	15.0
		6	2437	16.5	15.5
		10	2457		13.5
		11	2462	13.5	12.0
		13	2472	16.5	15.0
	40	3F	2422	12.0	10.0
		4F	2427	12.5	11.0
		5F	2432	15.0	13.0
		6F	2437	16.5	13.5
		7F	2442	15.5	14.5
		8F	2447	14.5	13.5

5 GHz (802.11a and 802.11n)

Mode	Tx BW (MHz)	Channel	Frequency (MHz)	Average Power Target (dBm)	
				Ch A	Ch B
5.2GHz					
802.11a 802.11n	20	36	5180	13.5	13.0
		40	5200	15.0	15.0
		44	5220		
		48	5240		
5.3GHz					
802.11a 802.11n	20	52	5260	16	16
		56	5280		
		60	5300		
		64	5320	13.5	13.0
5.6GHz					
802.11a 802.11n	20	100	5500	13.5	13.0
		104	5520	16.5	16.5
		108	5540		
		112	5560		
		116	5580		
		120	5600		
		124	5620		
		128	5640		
		132	5660		
		136	5680		
		140	5700	13.0	12.5
5.8GHz					
802.11n	40	149	5745	16.5	16.5
		153	5765		
		157	5785		
		161	5805		
		165	5825		
5.2 GHz					
802.11n	40	38	5190	9.5	10.0
		46	5230	15.5	15.5
5.3 GHz					
802.11n	40	54	5270	9.5	10.0
		62	5310	11.0	11.0
5.6 GHz					
802.11n	40	102	5510	10.5	10.5
		110	5550	16.5	16.5
		118	5590	15.5	
		126	5630	16.5	
		134	5670	15.5	15.5
5.8 GHz					
802.11n	40	151	5755	16.5	16.5
		159	5795		

The 7260HMW is capable of feeding two antennas simultaneously, in this configuration the power level is lower to each antenna port than if a single antenna was used.

2.2 EUT (Notebook PC) Details

NoteBook PC:	Portable Tablet PC LifeBook T series
*Model Name:	T904
Serial Number:	Pre-production Sample
Manufacturer:	FUJITSU LIMITED
CPU Type and Speed:	Core i7 3.3GHz
LCD:	13.3"QHD(2560x1440) : LQ133T1JW17
Graphics Chip:	None
Wired LAN:	Intel I218LM : 10 Base-T, 100 Base-TX, 1000Base-T
Modem:	None
Port Replicator Model:	FPCPR245
AC Adapter Model:	Green IT AC adaptor P/N CP483452-01
Voltage out:	19 V
Current out:	4.22A
Watts:	80W
Alternative Adapters: (Not tested)	90W: A13-090P1A(Chicony), A13-090P2A(Chicony) ADP-90BE A(Delta), ADP-90BE B(Delta) 80W: ADP-80SB A(Delta), ADP-80SB B(Delta) 65W: ADP-65MD A(Delta), ADP-65MD B(Delta), ADP-65YH A(Delta), ADP-65YH B(Delta), ADP-65JH AB(Delta), A11-065N5A(Chicony)

2.3 Test Configuration

The Intel WLAN test software "DRTU" was used to control the transmitter module enabling it to transmit continuously and with selected channels, modulation and data rates.

Radiated harmonics and spurious emissions were performed while the transmitter transmits continuously.

Power is provided via a Green IT AC adaptor P/N CP483452-01.

2.4 Test Procedure

Emissions measurements were performed in accordance with the procedures of ANSI C63.4-2009. Radiated emissions tests were performed at a distance of 1 and 3 metres from the EUT.

2.5 Test Facility

2.5.1 General

EMC Technologies Pty Ltd is listed by the FCC as a test laboratory able to perform compliance testing for the public. EMC Technologies is listed as an FCC part 47CFR2.948 test lab and may perform the testing required under Parts 15 and 18 – **FCC Registration Number 90560**

EMC Technologies Pty Ltd is accredited as a Conformity Assessment Body (CAB) by Australian Communications and Media Authority (ACMA) under the APECTEL MRA and is designated to perform compliance testing on equipment subject to Declaration of Conformity (DoC) and Certification under Parts 15 & 18 of the FCC Commission's rules – **Registration Number 494713 & Designation number AU0001.**

EMC Technologies is accredited by Industry Canada for the performance of radiated measurements in accordance with RSS 212, Issue 1 (Provisional) - **Industry Canada number 3569B.**

2.5.2 NATA Accreditation

EMC Technologies is accredited in Australia to test to the following standards by the National Association of Testing Authorities (NATA).

“FCC Part 15 unintentional and intentional emitters in the frequency range 9kHz to 18 GHz excluding TV receivers (15.117 and 15.119), TV interface devices (15.115), cable ready consumer electronic equipment (15.118), cable locating equipment (15.213) and unlicensed national information infrastructure devices (Sub part E).”

The current full scope of accreditation can be found on the NATA website: www.nata.asn.au
It also includes a large number of emissions, immunity, SAR, EMR and Safety standards.

NATA is the Australian national laboratory accreditation body and has accredited EMC Technologies to operate to the IEC/ISO17025 requirements. A major requirement for accreditation is the assessment of the company and its personnel as being technically competent in testing to the standards. This requires fully documented test procedures, continued calibration of all equipment to the National Standard at the National Measurements Institute (NMI) and an internal quality system to ISO 9002. NATA has mutual recognition agreements with the National Voluntary Laboratory Accreditation Program (NVLAP) and the American Association for Laboratory Accreditation (A²LA).

2.6 Test Equipment Calibration

Measurement instrumentation and transducers were calibrated in accordance with the applicable standards by an independent NATA registered laboratory such as Agilent Technologies (Australia) Pty Ltd or the National Measurement Institute (NMI). All equipment calibration is traceable to Australia national standards at the National Measurements Institute. The reference antenna calibration was performed by Liberty Laboratories in the USA and the working antennas (biconical and log-periodic) calibrated by EMC Technologies. The complete list of test equipment used for the measurements, including calibration dates and traceability is contained in Appendix A.

FCC 15.407 (U-NII) RESULTS

3.0 CONDUCTED EMISSION MEASUREMENTS

3.1 Test Procedure

The arrangement specified in ANSI C63.4-2009 was adhered to for the conducted EMI measurements. The EUT was placed in the RF screened enclosure and a CISPR EMI Receiver as defined in ANSI C63.2-2009 was used to perform the measurements.

The EMI Receiver was operated under program control using the Max-Hold function and automatic frequency scanning, measurement and data logging techniques. The specified 0.15 MHz to 30 MHz frequency range was sub-divided into sub-ranges to ensure that all short duration peaks were captured.

3.2 Peak Maximising Procedure

The various operating modes of the system were investigated, the transmit mode of the radio module did not produce any significant emissions. The test was performed with the module transmitting at the highest power: 802.11b Channel 11/ 2417MHz.

For each of the sub-ranges, the EMI receiver was set to continuous scan with the Peak detector set to Max-Hold mode. The Quasi-Peak detector and the Average detector were then invoked to measure the actual Quasi-Peak and Average level of the most significant peaks, which were detected.

3.3 Calculation of Voltage Levels

The voltage levels were automatically measured in software and compared to the test limit. The method of calculation was as follows:

$$V_{EMI} = VRx + LBPF$$

Where: **V_{EMI}** = the Measured EMI voltage in dB μ V to be compared to the limit.

VRx = the Voltage in dB μ V read directly at the EMI receiver.

LBPF = the insertion loss in dB of the cables and the Limiter and Pass Filter.

3.4 Plotting of Conducted Emission Measurement Data

The measurement data pertaining to each frequency sub-range were concatenated to form a single graph of (peak) amplitude versus frequency. This was performed for both Active and Neutral lines and the composite graph was subsequently plotted. A list of the highest relevant peaks and the respective Quasi-Peak and Average values were also plotted on the graph.


3.5 Results of Conducted Emission Measurement

Active Line

Fujitsu Australia Limited
T Series Convertible Tablet PC
Conducted emissions (0.15 - 30MHz)
Active Line
FCC Class B
Conducted Emissions (dB μ V)

Job No:M131103 Graph No. 1
Test Date: 27/11/13

Limit1: FCC_BQP
Limit2: FCC_BAVN
FCC PART 15 CLASS B CONDUCTED QP LIMITS (2002)
FCC PART 15 CLASS B CONDUCTED AVERAGE LIMIT (2002)

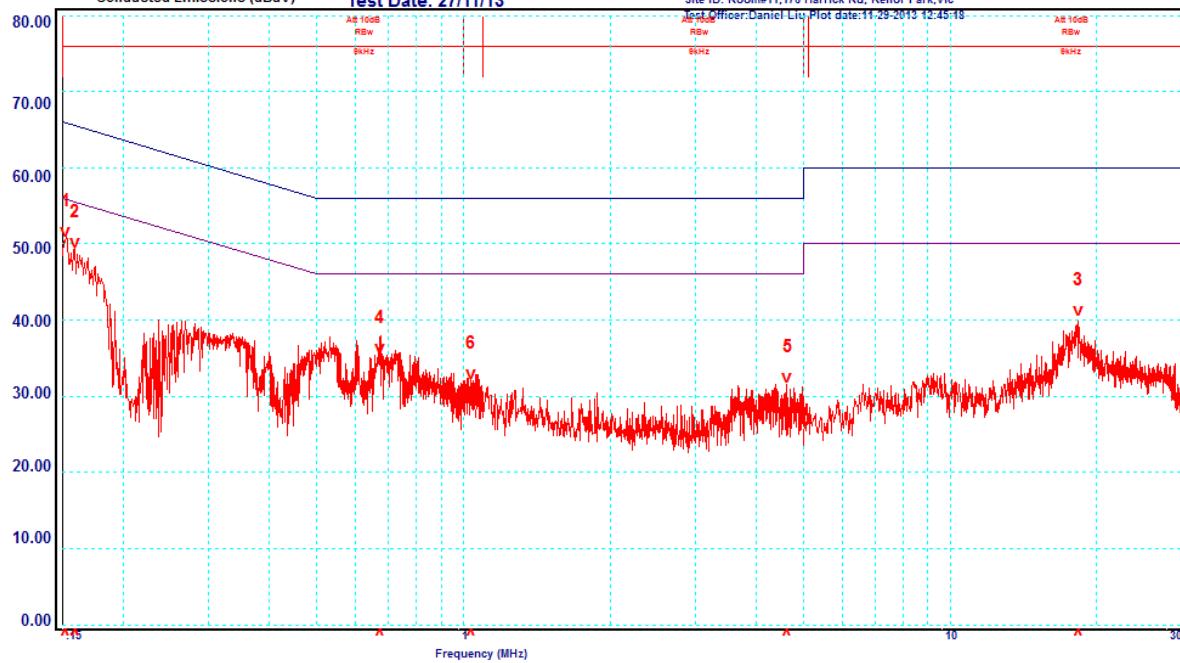

Frequency MHz	Line	Measured QP Level dB μ V	QP Limit dB μ V	Δ QP \pm dB	Measured AV Level dB μ V	AV Limit dB μ V	Δ AV \pm dB
0.153	Active	47.9	65.8	-17.9	32.7	55.8	-23.1
0.160	Active	46.4	65.5	-19.1	30.9	55.5	-24.6
18.31	Active	35.0	60.0	-25.0	29.2	50.0	-20.8
0.673	Active	29.7	56.0	-26.3	27.2	46.0	-18.8
4.624	Active	26.4	56.0	-29.6	21.2	46.0	-24.8
1.037	Active	25.0	56.0	-31.0	16.4	46.0	-29.6

Neutral Line

Fujitsu Australia Limited
T Series Convertible Tablet PC
Conducted emissions (0.15 - 30MHz)
Neutral Line

FCC Class B
Conducted Emissions (dBuV)

Job No: M131103 Graph No. 2

Test Date: 27/11/13

Limit1: FCC_BQPN FCC PART 15 CLASS B CONDUCTED QP LIMITS (2002)
Limit2: FCC_BAVN FCC PART 15 CLASS B CONDUCTED AVERAGE LIMIT (2002)


Trace 2: Neutral Line

R:FMELB/2013NOV/M131103/CONDUCTED FILES/M131103C/GraphN.bmp

t:LD1609145 c1:C4461044 c2: p: NONE a:LD170914

Site ID: Room#11.176 Harrick Rd, Keilor Park, Vic

Test Officer: Daniel Lin, Plot date: 11-28-2013 13:40:22

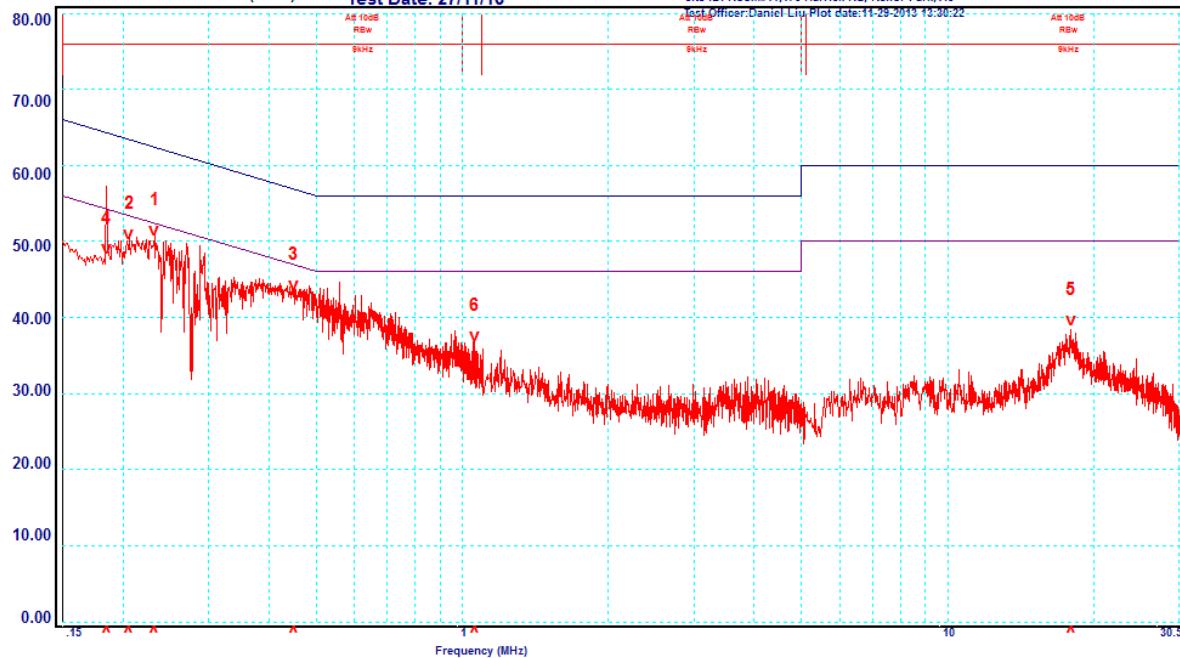

Frequency MHz	Line	Measured QP Level dB μ V	QP Limit dB μ V	Δ QP \pm dB	Measured AV Level dB μ V	AV Limit dB μ V	Δ AV \pm dB
0.233	Neutral	45.5	62.4	-16.9	30.9	52.4	-21.5
0.206	Neutral	46.2	63.4	-17.2	30.3	53.4	-23.1
0.450	Neutral	39.7	56.9	-17.2	28.2	46.9	-18.7
0.185	Neutral	44.8	64.2	-19.4	29.5	54.2	-24.7
17.98	Neutral	33.5	60.0	-26.5	27.9	50.0	-22.1
1.062	Neutral	28.9	56.0	-27.1	19.7	46.0	-26.3

4.0 RADIATED EMISSION MEASUREMENTS

4.1 Test Procedure

Testing was performed in accordance with the requirements of FCC Part 15.407(b).

Radiated emission measurements were performed to the limits as per section 15.209 and 15.407. Measurements above 1 GHz were made over a distance of 3 and 1 metres.

Calibrated EMCO 3115, EMCO 3116 and ETS standard gain horn antennas were used for measurements between 1 to 40 GHz.

The measurement of emissions above 1000 MHz was measured using a following setting:

Peak measurements setting: RBW = VBW = 1 MHz

Average measurements setting: RBW = 1 MHz and VBW = 10 Hz

The receiver bandwidth was set to 6 dB.

The EUT was slowly rotated with the Peak Detector set to Max-Hold. This was performed for two antenna heights. When an emission was located, it was positively identified and its maximum level found by rotating the automated turntable and by varying the antenna height. The procedure was repeated with the device orientated in three orthogonal axis to further maximise the emission. In this instance the device antennas are located in the swivel display, this was adjusted to give maximum emissions.

Each significant peak was investigated with the Peak and Average Detectors. The measurement data for each frequency range was corrected for cable losses, antenna factors and preamplifier gain. This process was performed for both horizontal and vertical antenna polarisations.

4.2 Calculation of field strength

The field strength was calculated automatically by the software using all the pre-stored calibration data. The method of calculation is shown below:

E = V + AF - G + L Where:

E = Radiated Field Strength in dB μ V/m.

V = EMI Receiver Voltage in dB μ V. (measured value)

AF = Antenna Factor in dB(m⁻¹). (stored as a data array)

G = Preamplifier Gain in dB. (stored as a data array)

L = Cable loss in dB. (stored as a data array of Insertion Loss versus frequency)

- Example Field Strength Calculation**

Assuming a receiver reading of 34.0 dB μ V is obtained at 90 MHz, the Antenna Factor at that frequency is 9.2 dB. The cable loss is 1.9 dB while the preamplifier gain is 20 dB. The resulting Field Strength is therefore as follows:

$$34.0 + 9.2 + 1.9 - 20 = 25.1 \text{ dB}\mu\text{V/m}$$

4.3 Results - Out of Band Emissions (Spurious and Harmonics)

This transmitter module was originally tested and certified by the manufacturer as a stand-alone module outside a laptop (host) with higher gain antennas.

To ensure the transmitter module installed in the T904 Tablet is still in compliance, verification tests were performed at selected transmit frequencies for harmonics and spurious emissions.

Initial investigations were performed with all data rates. Final testing was performed while the transmitter continuously operated in the worst case condition.


Refer to Intel radio module test report (FCC 15E) for full results showing compliance with the spurious and harmonics limits.

4.3.1 Frequency Band: 30 - 1000 MHz

After some investigation no significant sub harmonics or emissions were detected. The Intel module report also noted that "The spurious emissions below 1 GHz do not depend on either the operating channel or the modulation mode selected in the EUT."


It was decided to perform the test with the module drawing the most power so the 2.4GHz channel with the highest output power was chosen. The measurements were made at a distance of 10 metres.

Vertical Emissions:

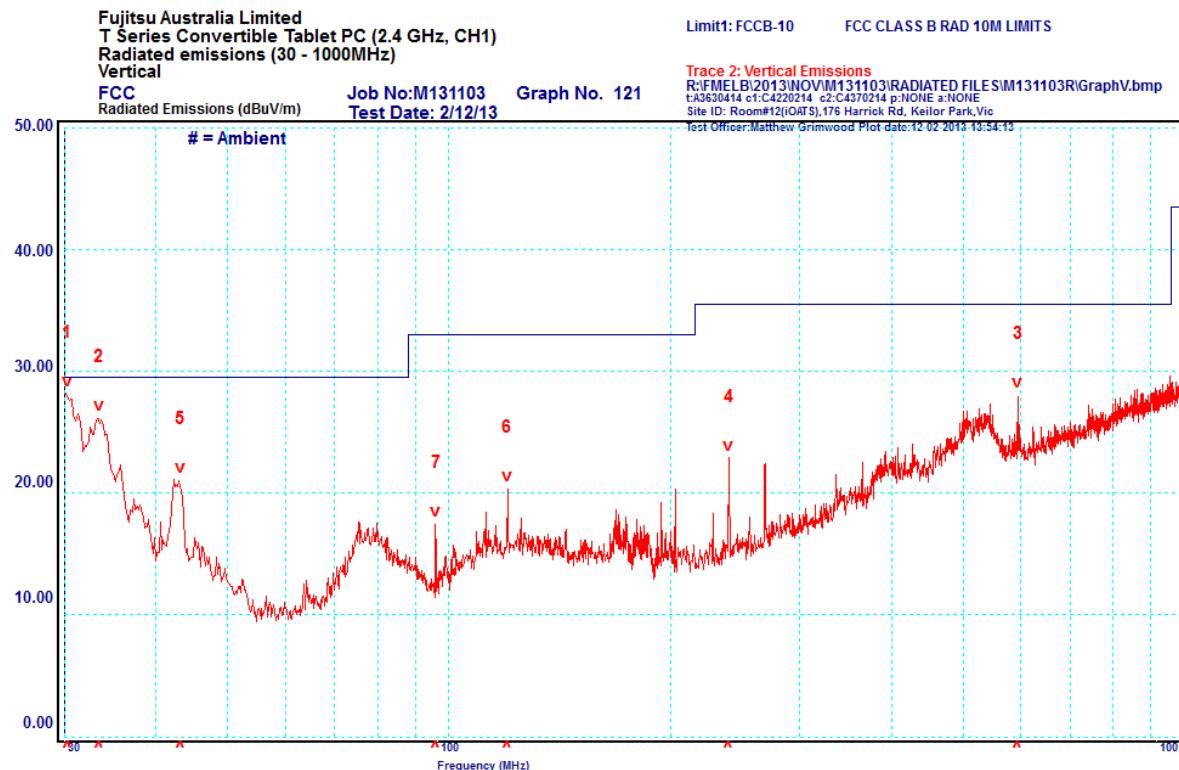

Peak	Frequency MHz	Polarisation	Quasi Peak dB μ V/m	Limit dB μ V/m	Margin dB
1	30.33	Vertical	24.4	29.5	-5.1
2	33.45	Vertical	21.3	29.5	-8.2
3	593.99	Vertical	25.6	35.5	-9.9
4	240.01	Vertical	22.3	35.5	-13.2
5	43.16	Vertical	14.0	29.5	-15.5
6	119.99	Vertical	17.1	33.0	-15.9
7	96.01	Vertical	12.4	33.0	-20.6

Horizontal Emissions:

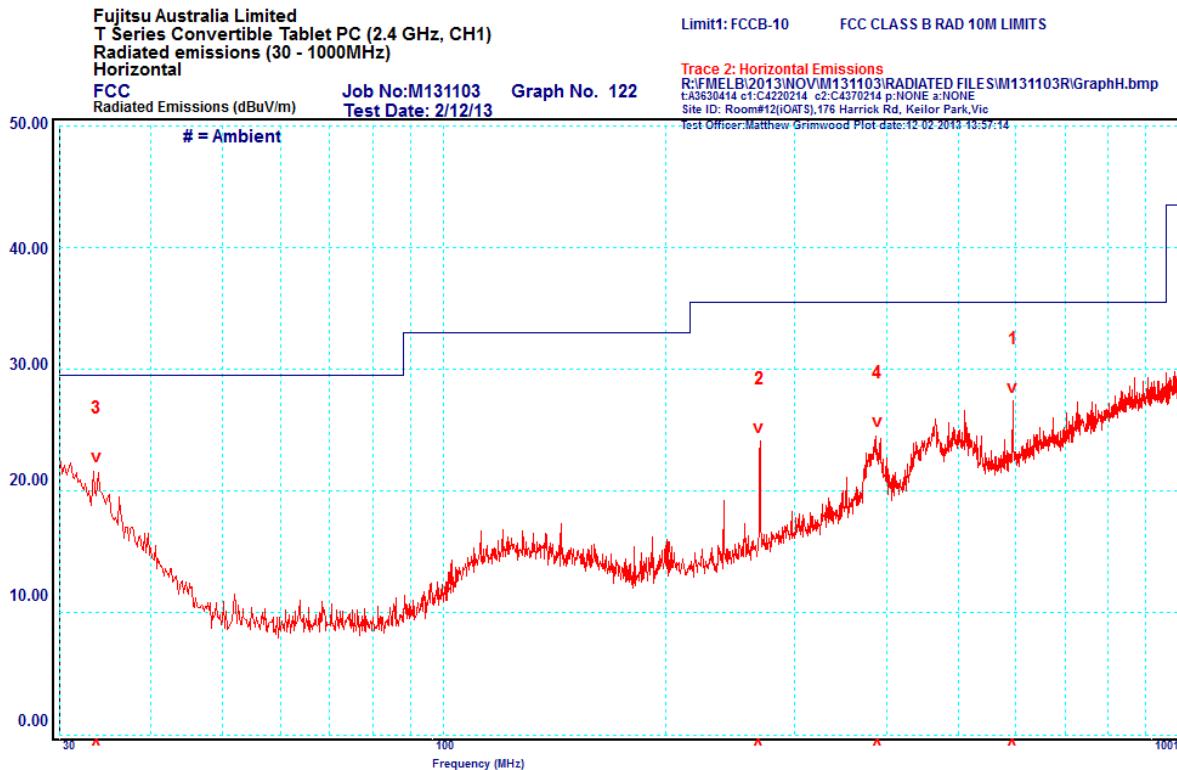

Peak	Frequency MHz	Polarisation	Quasi Peak dB μ V/m	Limit dB μ V/m	Margin dB
1	594.04	Horizontal	22.1	35.5	-13.4
2	268.42	Horizontal	20.5	35.5	-15.0
3	33.71	Horizontal	13.1	29.5	-16.4
4	388.95	Horizontal	18.4	35.5	-17.1

4.3.2 Frequency Band: 1 – 40 GHz

The 74 dB μ V/m @ 3m and 54 dB μ V/m @ 3m limits are applied for emissions falling in the restricted bands. The limits for emissions outside the restricted band are 20 dB below the fundamental field strength. The limits are adjusted by 10.5 dB when measurements perform at a distance of 1m.

Testing was performed while the WLAN transmitter continuously operated. Harmonics related to the WLAN transmitter operated in the frequency bands 5.15 – 5.35 GHz and 5.47 – 5.725 GHz are reported below. For spurious emissions in the frequency bands 2.4 – 2.4835 GHz and 5.725 – 5.850 GHz, refer to M131103_FCC_7260HMW_DTS.

Measurements were performed with the EUT operating in the worst case mode of single antenna transmitting. For multiple antennas transmitting the power level is lower with respect to single antenna mode.

Harmonics and spurious emissions were measured for channels where the RF output power was highest.


4.3.2.1 5.2 GHz Band with 20MHz Signal Bandwidth

Considering Intel's original antenna port conducted emissions and the antenna gain of this host it was determined to conduct the test with the configuration having the highest power to the antenna: 802.11a at 5200 MHz, refer to channel and power output table.

Frequency MHz	Peak Detector dB μ V/m	Average Detector dB μ V/m	Peak Limit dB μ V/m	Average Limit dB μ V/m	Result
5200 (802.11a)	Transmit Frequency				
10400	NF = 48.0	46.0	74.0	54.0	Complied
15600	NF = 53.0	NF = 44.0	74.0	54.0	Complied
20800	NF = 56.9	NF = 46.4	74.0	54.0	Complied


NF = instrumentation noise floor.

Peak emissions (1MHz RBW, 1MHz VBW), 1GHz to 40GHz

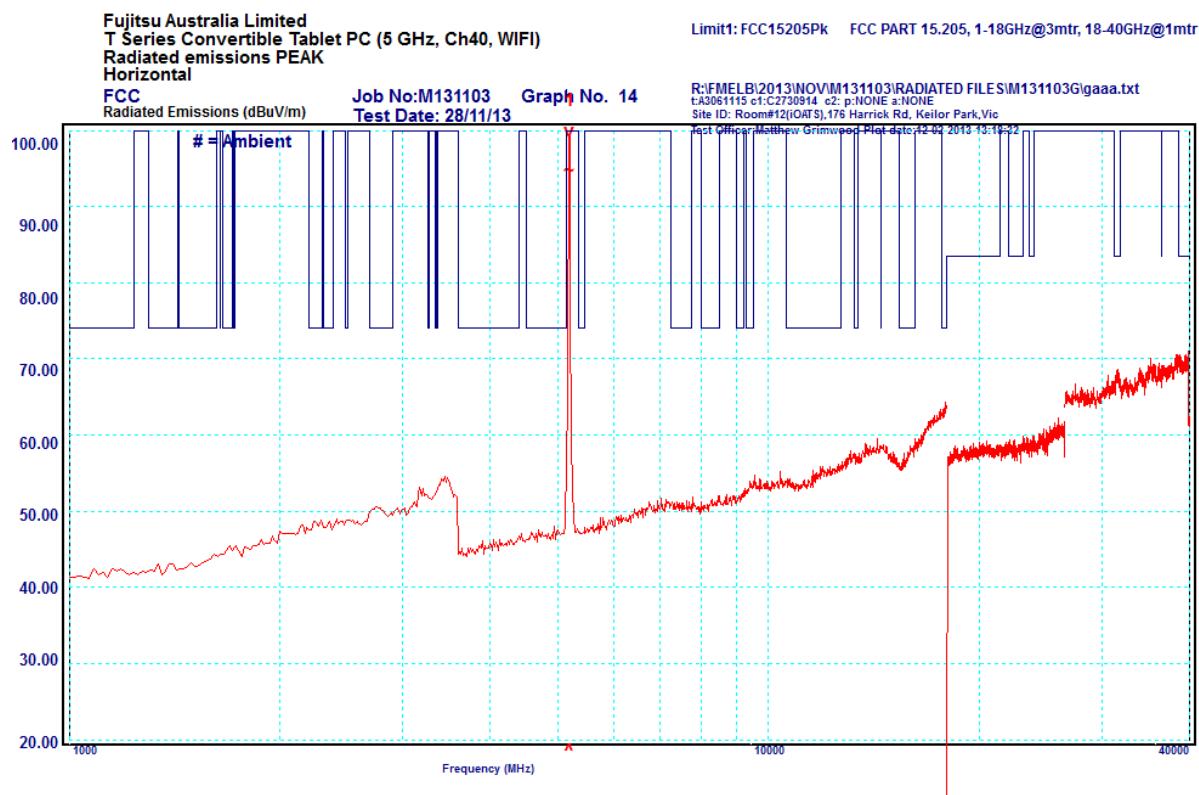


Result: Harmonics and spurious emissions were investigated between 1 and 40 GHz. Other emissions were confirmed low with both RBW and VBW reduced. The worst case emissions complied with the FCC limits of sections 15.209 and 15.247.

Average emissions (1MHz RBW, 10kHz VBW), 1GHz to 40GHz

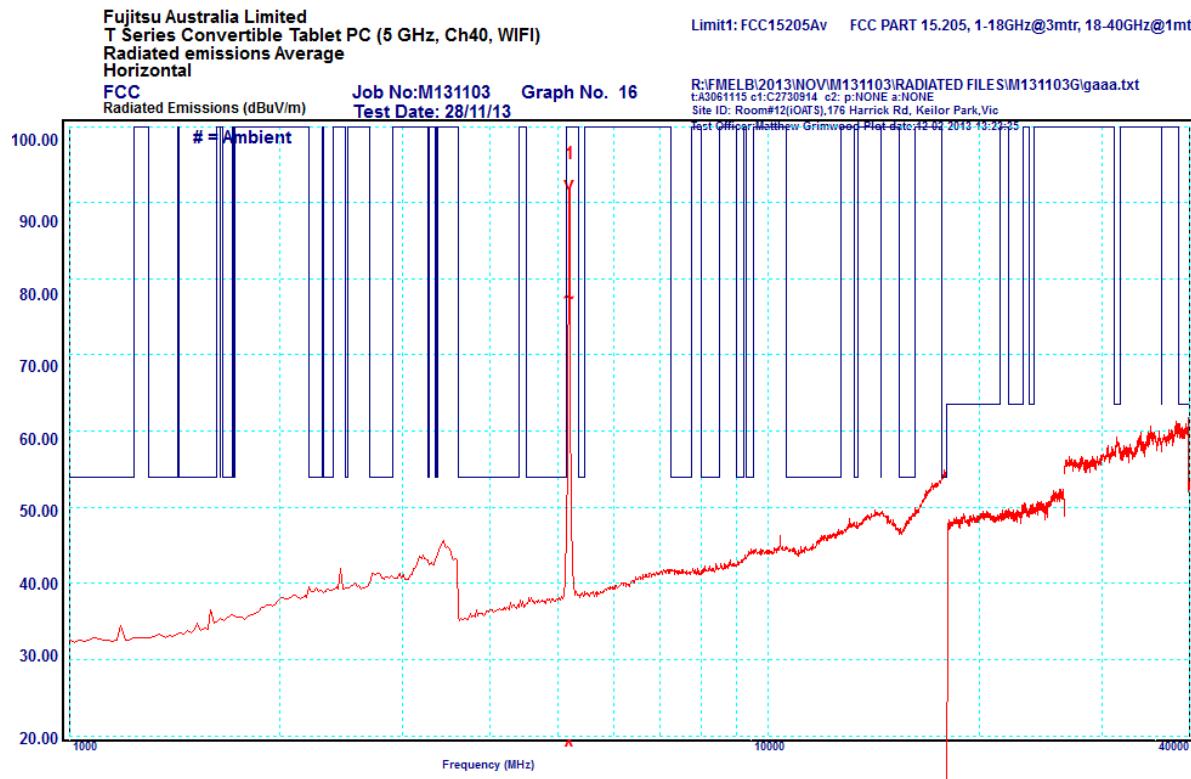

Result: Harmonics and spurious emissions were investigated between 1 and 40 GHz. Other emissions were confirmed low with both RBW and VBW reduced. The worst case emissions complied with the FCC limits of sections 15.209 and 15.247.

4500-5150MHz Restricted Band (802.11a)

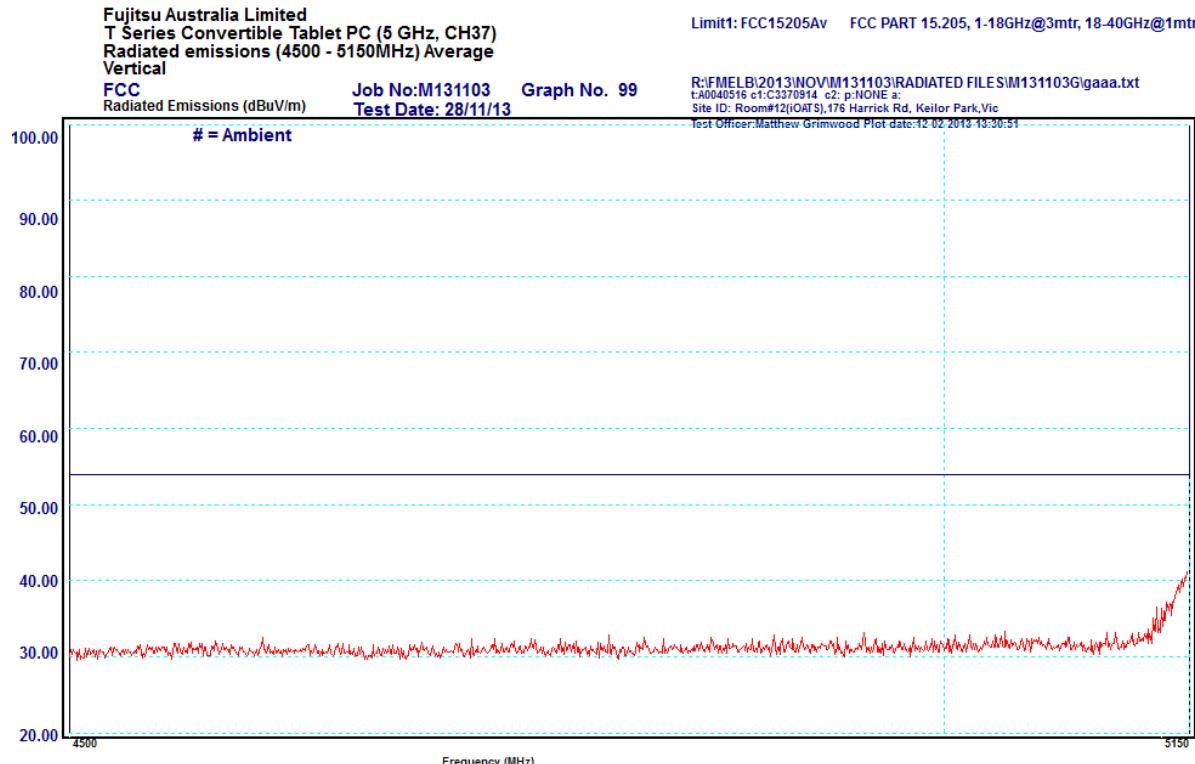


4.3.2.3 5.3 GHz Band

Considering Intel's original antenna port conducted emissions and the antenna gain of this host it was determined to conduct the test with the configuration having the highest power to the antenna: 802.11a at 5300 MHz, refer to channel and power output table.

Frequency MHz	Peak Detector dB μ V/m	Average Detector dB μ V/m	Peak Limit dB μ V/m	Average Limit dB μ V/m	Result
5300 (802.11a)	Transmit Frequency				
10600	NF = 48.0	NF = 39.0	74.0	54.0	Complied
15900	NF = 53.0	NF = 45.0	74.0	54.0	Complied
21200	NF = 57.0	NF = 46.1	74.0	54.0	Complied


NF = instrumentation noise floor.

Peak emissions (1MHz RBW, 1MHz VBW), 1GHz to 40GHz

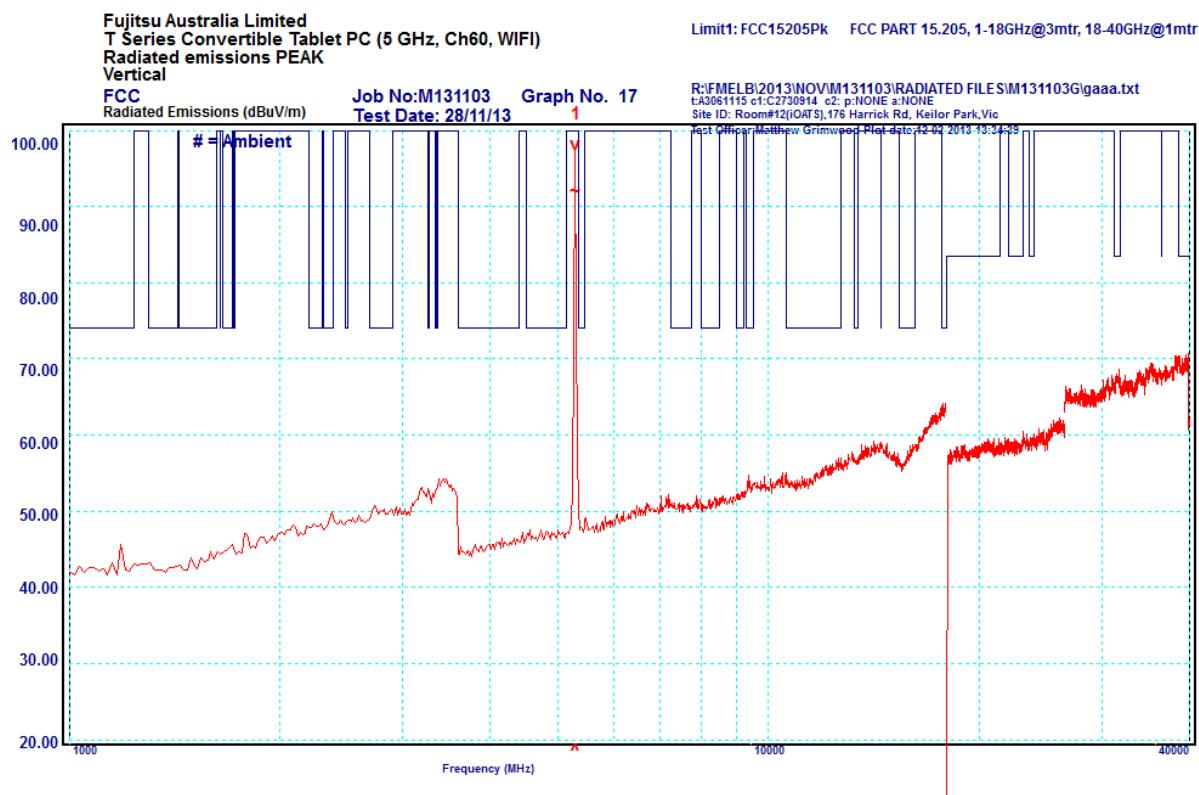


Result: Harmonics and spurious emissions were investigated between 1 and 40 GHz. Other emissions were confirmed low with both RBW and VBW reduced. The worst case emissions complied with the FCC limits of sections 15.209 and 15.247.

Average emissions (1MHz RBW, 10kHz VBW), 1GHz to 40GHz

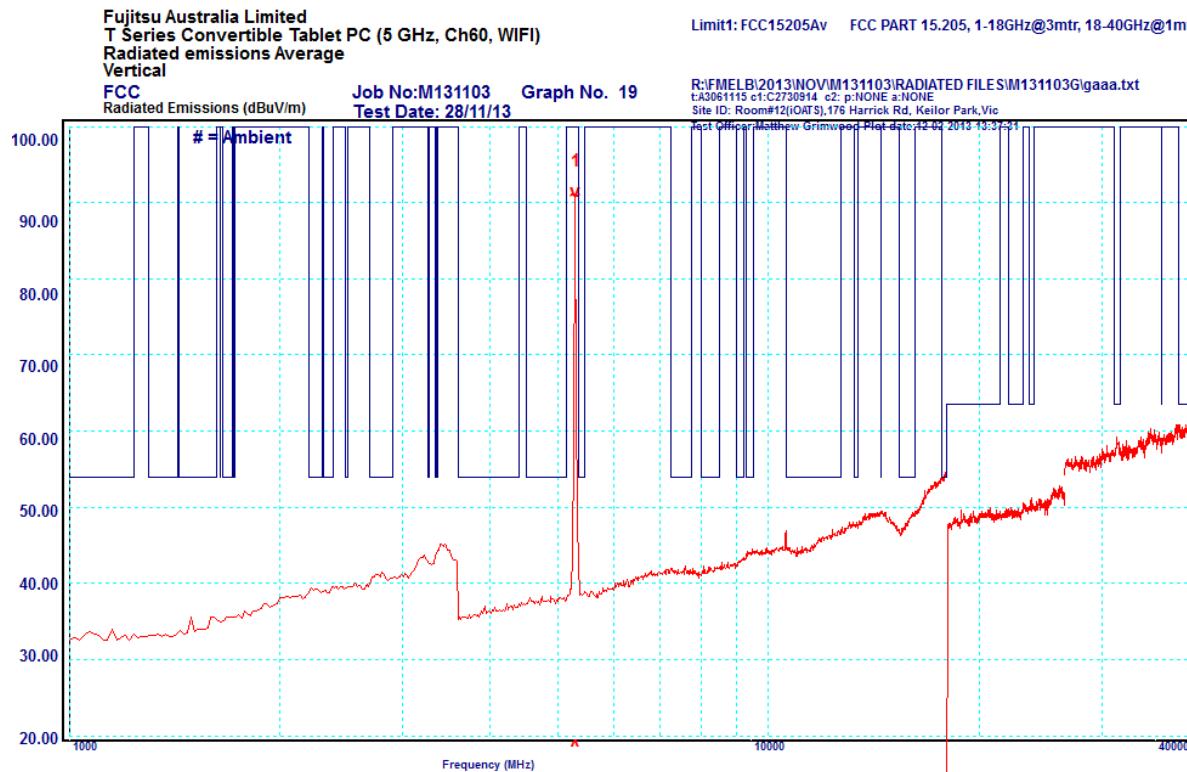

Result: Harmonics and spurious emissions were investigated between 1 and 40 GHz. Other emissions were confirmed low with both RBW and VBW reduced. The worst case emissions complied with the FCC limits of sections 15.209 and 15.247.

5350-5460MHz Restricted Band (802.11a)

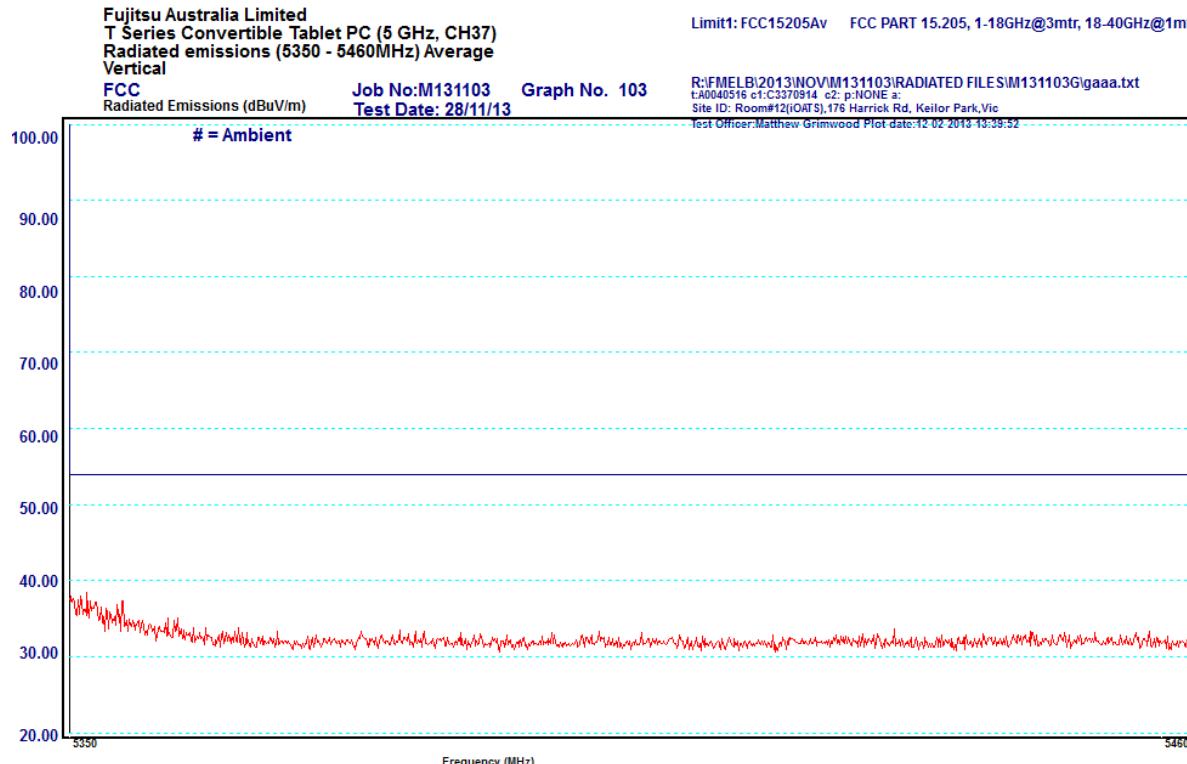


4.3.2.4 5.6 GHz Band

Considering Intel's original antenna port conducted emissions and the antenna gain of this host it was determined to conduct the test with the configuration having the highest power to the antenna: 802.11a at 5580 MHz, refer to channel and power output table.

Frequency MHz	Peak Detector dB μ V/m	Average Detector dB μ V/m	Peak Limit dB μ V/m	Average Limit dB μ V/m	Result
5580 (802.11a)	Transmit Frequency				
11160	NF = 48.0	47.0	74.0	54.0	Complied
16740	NF = 53.0	NF = 44.0	74.0	54.0	Complied
22320	NF = 57.0	NF = 46.6	74.0	54.0	Complied


NF = instrumentation noise floor.

Peak emissions (1MHz RBW, 1MHz VBW), 1GHz to 40GHz

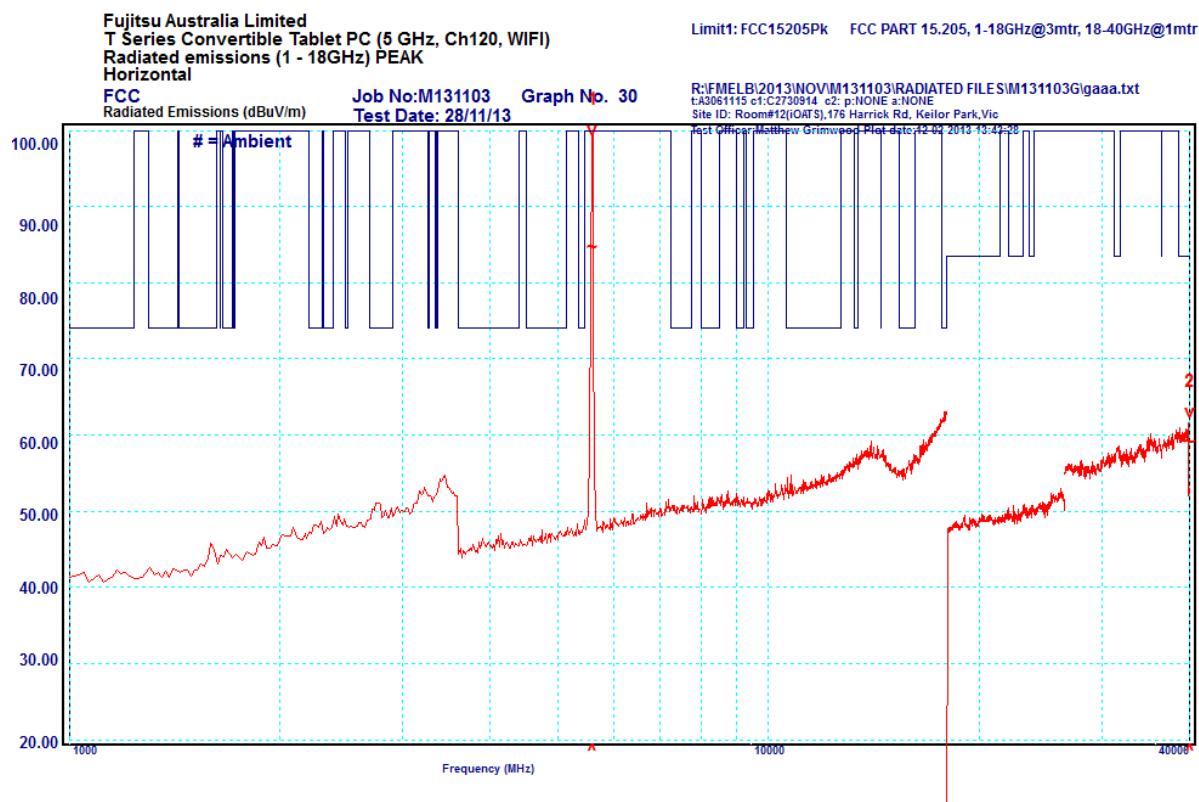


Result: Harmonics and spurious emissions were investigated between 1 and 40 GHz. Other emissions were confirmed low with both RBW and VBW reduced. The worst case emissions complied with the FCC limits of sections 15.209 and 15.247.

Average emissions (1MHz RBW, 10kHz VBW), 1GHz to 40GHz

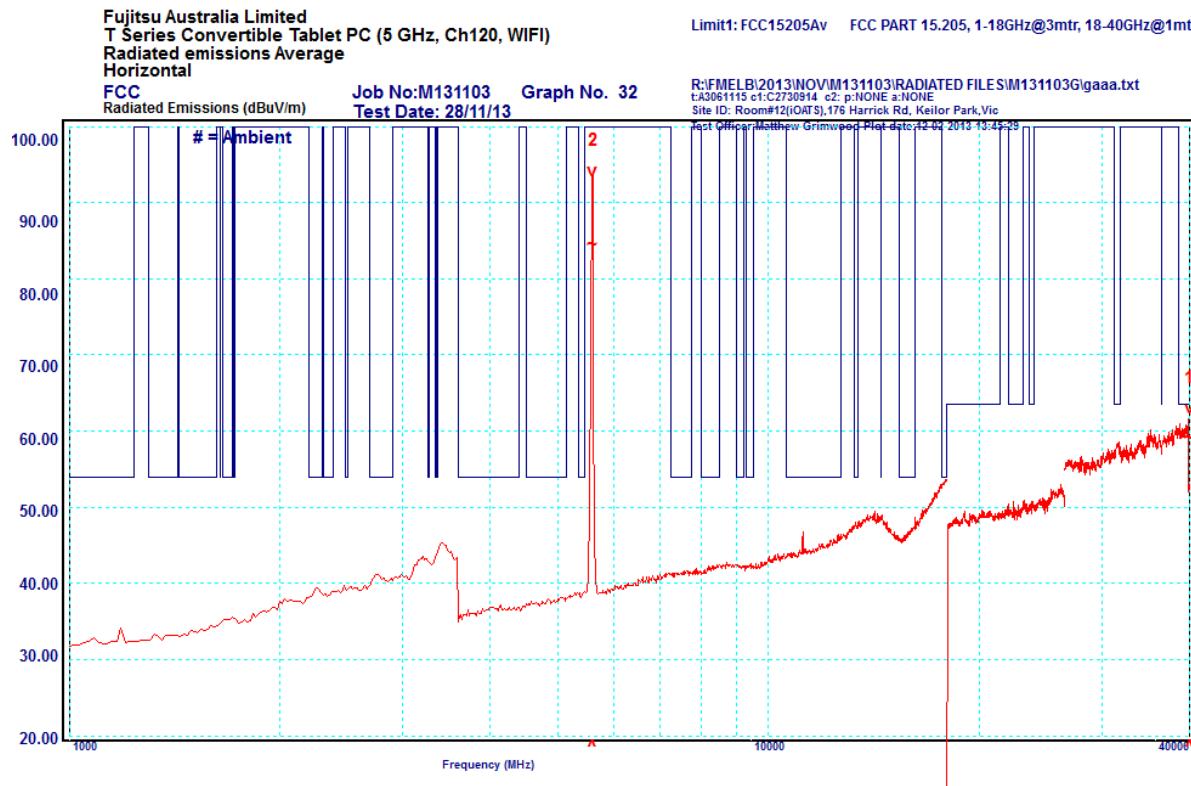

Result: Harmonics and spurious emissions were investigated between 1 and 40 GHz. Other emissions were confirmed low with both RBW and VBW reduced. The worst case emissions complied with the FCC limits of sections 15.209 and 15.247.

5350-5460MHz Restricted Band (802.11a)

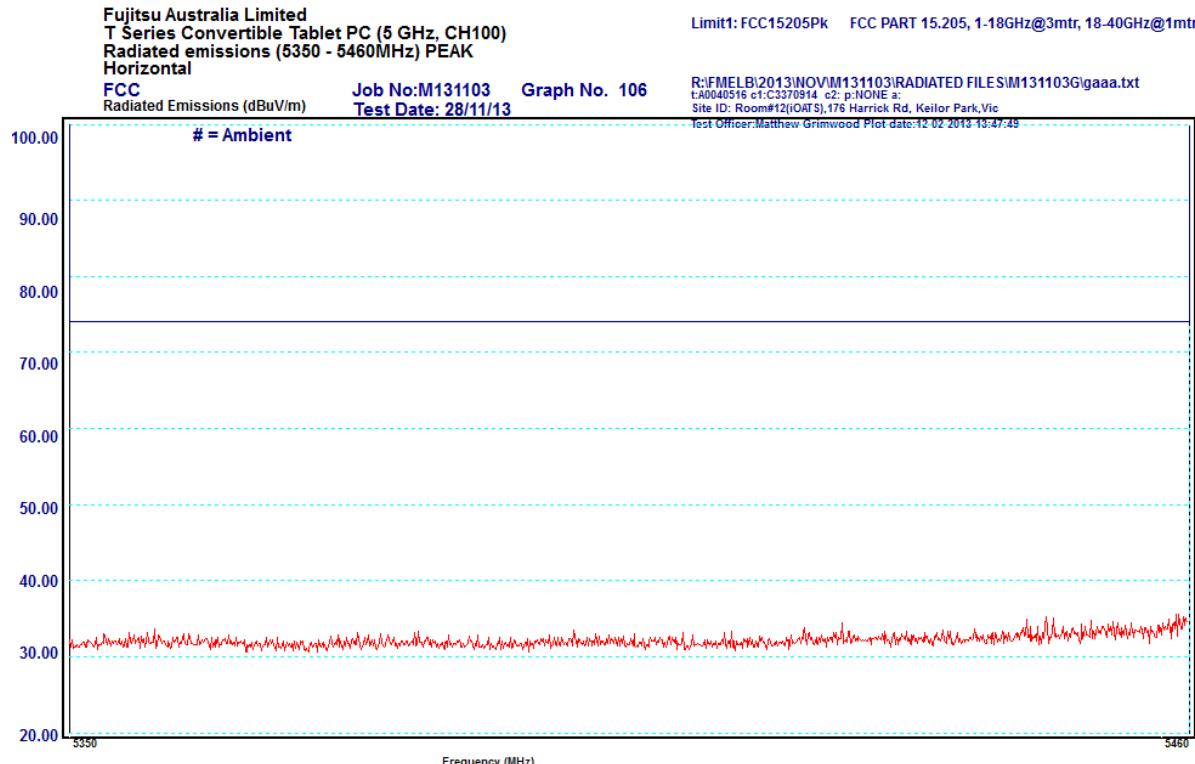

4.3.3 RF Conducted Measurements at the antenna terminal (including Band Edge)

Refer to original Intel module test report (submitted). Testing was performed by AT4 Wireless, S.A. with FCC registration number 905266 and Canadian Certification reference number IC 4621A-1. Report 30867RRF.002 and 30867RRF.003.

5.0 PEAK OUTPUT POWER - Section 15.407(a)

Refer to original Intel module test report (submitted). Testing was performed by AT4 Wireless, S.A. with FCC registration number 905266 and Canadian Certification reference number IC 4621A-1. Report 30867RRF.002 and 30867RRF.003.

It was not deemed likely that the host equipment will cause the output power to exceed the limits specified for the different bands.

6.0 CHANNEL BANDWIDTH

Refer to original Intel module test report (submitted). Testing was performed by AT4 Wireless, S.A. with FCC registration number 905266 and Canadian Certification reference number IC 4621A-1. Report 30867RRF.002 and 30867RRF.003.

It was not deemed likely that the host equipment will cause the 99% or 26dB bandwidth parameters to change.

7.0 PEAK POWER SPECTRAL DENSITY

Refer to original Intel module test report (submitted). Testing was performed by AT4 Wireless, S.A. with FCC registration number 905266 and Canadian Certification reference number IC 4621A-1. Report 30867RRF.002 and 30867RRF.003.

It was not deemed likely that the host equipment will cause the power spectral density to exceed the limits specified for the different bands.

8.0 PEAK EXCURSION

Refer to original Intel module test report (submitted). Testing was performed by AT4 Wireless, S.A. with FCC registration number 905266 and Canadian Certification reference number IC 4621A-1. Report 30867RRF.002 and 30867RRF.003.

9.0 FREQUENCY STABILITY

Refer to original Intel module test report (submitted). Testing was performed by AT4 Wireless, S.A. with FCC registration number 905266 and Canadian Certification reference number IC 4621A-1. Report 30867RRF.002 and 30867RRF.003.

10.0 DYNAMIC FREQUENCY SELECTION

The EUT is a Client Device without Radar Interference Detection Function.

Ad-hoc operation (not under control of a Master Device) is supported in the 2.4 GHz & 5.15 - 5.25 GHz bands only. This Ad-hoc capability is limited in hardware via factory programmed EEPROM settings that cannot be accessed or changed by end users. The Ad-hoc supported channels of operation cannot be modified – regardless of which client utility or operating system control is used.

Refer to original Intel module test report (submitted). Testing was performed by AT4 Wireless, S.A. with FCC registration number 905266 and Canadian Certification reference number IC 4621A-1. Report 30867RRF.002 and 30867RRF.003.

11.0 DISCONTINUOUS TRANSMISSION

Data Transmission is always initiated by software, which is then passed down through the MAC, through the digital and analog baseband, finally to the RF chip. Several special packets (ACKs, CTS, PSPoll, etc) are initiated by the MAC. These are the only ways the digital baseband portion will turn on the RF transmitter, which then turns off at the end of the packet. Therefore, the transmitter will be ON only while one of the four mentioned packets is being transmitted.

“While the EUT is not transmitting any information, the EUT can automatically discontinue transmission and go into standby mode for power saving. The EUT can detect the controlling signal of the ACK message transmitting from the remote device and verify whether it shall resend or discontinue transmission”

12.0 RADIO FREQUENCY EXPOSURE (HAZARD) INFORMATION

Testing was performed in accordance with the requirements of FCC Part 15.407(f)

Spread spectrum transmitters operating in the 5.15 – 5.35 GHz and 5.47 – 5.725 GHz are required to be operated in a manner that ensures that the public is not exposed to RF energy levels in accordance with CFR 47, Section 1.1307(b)(1).

In accordance with this section and also section 2.1093 this device has been defined as a portable device.

SAR testing was reported under EMC Technologies reports M131103_FCC_7260HMW_SAR_2.4 (2.4 GHz) and M131103_FCC_7260HMW_SAR_5.6 (5.18 – 5.825 GHz). SAR values of 0.757 mW/g (5GHz) and 0.355 mW/g (2.4GHz) were measured which complied with the FCC human exposure requirements of 47 CFR 2.1093 (d).

13.0 ANTENNA REQUIREMENT

This intentional radiator was designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

14.0 COMPLIANCE STATEMENT

The Portable Tablet PC Fujitsu LifeBook T Series, Model: T904 with Intel Centrino Advanced-N 7260 (Wilkins Peak2 802.11a/b/g/n), Model: 7260HMW AN, **complied** with the requirements of 47 CFR, Part 15 Subpart E -Section 15.407 (5.15-5.35 GHz and 5.47 – 5.725 GHz bands).

The test sample **complied** with the Industry Canada RSS-210 issue 8 - Low Power Licence-Exempt Radiocommunication Devices (All Frequency Bands): Category I Equipment, Annex 9 Local Area Network Devices requirements and the RF exposure requirements of RSS-102.

15.0 MEASUREMENT UNCERTAINTIES

EMC Technologies has evaluated the equipment and the methods used to perform the emissions testing. The estimated measurement uncertainties for emissions tests shown within this report are as follows:

Conducted Emissions:	9 kHz to 30 MHz	±3.2 dB
Radiated Emissions:	30 MHz to 300 MHz	±5.1 dB
	300 MHz to 1000 MHz	±4.7 dB
	1 GHz to 18 GHz	±4.6 dB

The above expanded uncertainties are based on standard uncertainties multiplied by a coverage factor of k=2, providing a level of confidence of approximately 95%.

16.0 TEST REPORT APPENDICES

APPENDIX A: MEASUREMENT INSTRUMENT DETAILS

APPENDIX B: PHOTOGRAPHS

APPENDIX C: OPERATIONAL DESCRIPTION

APPENDIX D: BLOCK DIAGRAM

APPENDIX E: SCHEMATIC

APPENDIX F: ANTENNA INFORMATION

APPENDIX G: FCC LABELLING DETAILS

APPENDIX H: USER MANUAL

Attachment – RF Exposure Information

Attachment – FCC DOC for Convertible Tablet Computer

Attachment – Intel FCC Part 15E Test Report