

FCC SAR Test Report

APPLICANT : FUJITSU LIMITED
EQUIPMENT : FUJITSU STYLISTIC Q series
BRAND NAME : FUJITSU
MODEL NAME : Q665
FCC ID : EJE-WB0093
STANDARD : FCC 47 CFR Part 2 (2.1093)
ANSI/IEEE C95.1-1992
IEEE 1528-2003

We, SPORTON INTERNATIONAL INC., would like to declare that the tested sample has been evaluated in accordance with the procedures and had been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL INC., the test report shall not be reproduced except in full.



Reviewed by: Eric Huang / Deputy Manager



Approved by: Jones Tsai / Manager



SPORTON INTERNATIONAL INC.

No.52, Hwa Ya 1st Rd., Hwa Ya Technology Park, Kwei-Shan District, Taoyuan City, Taiwan (R.O.C.)



Table of Contents

1. Statement of Compliance	4
2. Administration Data	4
3. Guidance Standard	5
4. Equipment Under Test (EUT)	5
4.1 General Information	5
4.2 Maximum Tune-up Limit.....	5
5. RF Exposure Limits.....	7
5.1 Uncontrolled Environment.....	7
5.2 Controlled Environment.....	7
6. Specific Absorption Rate (SAR).....	8
6.1 Introduction	8
6.2 SAR Definition.....	8
7. System Description and Setup	9
8. Measurement Procedures	10
8.1 Spatial Peak SAR Evaluation.....	10
8.2 Power Reference Measurement.....	11
8.3 Area Scan	11
8.4 Zoom Scan.....	12
8.5 Volume Scan Procedures.....	12
8.6 Power Drift Monitoring.....	12
9. Test Equipment List	13
10. System Verification	14
10.1 Tissue Verification	14
10.2 System Performance Check Results.....	15
11. RF Exposure Positions	15
11.1 SAR Testing for Tablet	15
12. Conducted RF Output Power (Unit: dBm).....	16
13. Antenna Location	27
14. SAR Test Results	29
14.1 Body SAR	29
14.2 Repeated SAR Measurement	31
15. Simultaneous Transmission Analysis	31
15.1 Body Exposure Conditions	32
16. Uncertainty Assessment	33
17. References	36
Appendix A. Plots of System Performance Check	
Appendix B. Plots of High SAR Measurement	
Appendix C. DASY Calibration Certificate	
Appendix D. Test Setup Photos	



Revision History

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FA532514	Rev. 01	Initial issue of report	May 05, 2015

1. Statement of Compliance

The maximum results of Specific Absorption Rate (SAR) found during testing for **FUJITSU LIMITED, FUJITSU STYLISTIC Q series, Q665**, are as follows.

Equipment Class	Frequency Band	Highest SAR Summary	
		Body 1g SAR (W/kg)	Simultaneous Transmission 1g SAR (W/kg)
DTS	2.4GHz WLAN	1.04	1.45
	5.8GHz WLAN	0.28	
NII	5.2GHz WLAN	0.31	0.68
	5.3GHz WLAN	0.63	
	5.5GHz WLAN	0.35	
Date of Testing:		2015/4/8 ~ 2015/04/22	

This device is in compliance with Specific Absorption Rate (SAR) for general population/uncontrolled exposure limits (1.6 W/kg) specified in FCC 47 CFR part 2 (2.1093) and ANSI/IEEE C95.1-1992, and had been tested in accordance with the measurement methods and procedures specified in IEEE 1528-2003.

2. Administration Data

Testing Laboratory	
Test Site	SPORTON INTERNATIONAL INC.
Test Site Location	No.52, Hwa Ya 1st Rd., Hwa Ya Technology Park, Kwei-Shan District, Taoyuan City, Taiwan (R.O.C.) TEL: +886-3-327-3456 FAX: +886-3-328-4978

Applicant	
Company Name	FUJITSU LIMITED
Address	1-1, Kamikodanaka 4-chome, Nakahara-ku, Kawasaki, 211-8588 Japan

Manufacturer	
Company Name	FUJITSU LIMITED
Address	1-1, Kamikodanaka 4-chome, Nakahara-ku, Kawasaki, 211-8588 Japan

3. Guidance Standard

The Specific Absorption Rate (SAR) testing specification, method, and procedure for this device is in accordance with the following standards:

- FCC 47 CFR Part 2 (2.1093)
- ANSI/IEEE C95.1-1992
- IEEE 1528-2003
- FCC KDB 865664 D01 SAR Measurement 100 MHz to 6 GHz v01r03
- FCC KDB 865664 D02 SAR Reporting v01r01
- FCC KDB 447498 D01 General RF Exposure Guidance v05r02
- FCC KDB 248227 D01 SAR meas for 802.11abg v01r02
- FCC KDB 616217 D04 SAR for laptop and tablets v01r01

4. Equipment Under Test (EUT)

4.1 General Information

Product Feature & Specification	
Equipment Name	FUJITSU STYLISTIC Q series
Brand Name	FUJITSU
Model Name	Q665
FCC ID	EJE-WB0093
Integrated WLAN Module	Brand name: Intel Model name: 7265NGW
Integrated NFC Module	Brand name: Sony EMCS Corporation Model name: RC-S650/IA
Wireless Technology and Frequency Range	WLAN 2.4GHz Band: 2412 MHz ~ 2462 MHz WLAN 5.2GHz Band: 5180 MHz ~ 5240 MHz WLAN 5.3GHz Band: 5260 MHz ~ 5320 MHz WLAN 5.5GHz Band: 5500 MHz ~ 5700 MHz WLAN 5.8GHz Band: 5745 MHz ~ 5825 MHz Bluetooth: 2402 MHz ~ 2480 MHz NFC : 13.56 MHz
Mode	• 802.11a/b/g/n/ac HT20/HT40/VHT20/VHT40/VHT80 • Bluetooth v3.0+EDR , Bluetooth v4.0-LE • NFC:ASK
EUT Stage	Pre-Production Unit

4.2 Maximum Tune-up Limit

Mode		Average Power (dBm)
Bluetooth v3.0	1Mbps	5.0
	2Mbps	5.0
	3Mbps	5.0
Bluetooth v4.0		4.0

Band / Frequency (MHz)		IEEE 802.11 Average Power (dBm)											
		WLAN Antenna A				WLAN Antenna B				WLAN Antenna A+B			
		11b	11g	HT20	HT40	11b	11g	HT20	HT40	11b	11g	HT20	HT40
2.4GHz Band	2412	14.5	12.5	12.5		14.5	13.0	13.0		14.5	13.5	13.5	
	2422				12.0				12.0				11.0
	2437	14.5	15.0	15.0	15.0	14.5	15.0	15.0	15.0	14.5	15.0	15.0	15.0
	2452				11.0				10.0				11.0
	2462	14.5	11.0	11.0		14.5	11.0	11.0		14.5	13.5	13.5	



Band / Frequency (MHz)		IEEE 802.11 Average Power (dBm)																	
		Antenna A						Antenna B						Antenna A+B					
		11a	HT20	HT40	VHT20	VHT40	VHT80	11a	HT20	HT40	VHT20	VHT40	VHT80	11a	HT20	HT40	VHT20	VHT40	VHT80
5.2GHz Band	5180	12.5	12.5		12.5			12.5	12.5		12.5			13.0	13.0		13.0		
	5190			10.5		10.5				12.0		12.0				11.5		11.5	
	5200	13.5	13.5		13.5			13.5	13.5		13.5			13.0	13.0		13.0		
	5210						12.0						12.0						13.0
	5220	13.5	13.5		13.5			13.5	13.5		13.5			13.0	13.0		13.0		
	5230			13.5		13.5				13.5		13.5				14.5		14.5	
	5240	13.5	13.5		13.5			13.5	13.5		13.5			13.0	13.0		13.0		
5.3GHz Band	5260	13.5	13.5		13.5			13.5	13.5		13.5			14.5	14.5		14.5		
	5270			13.5		13.5				13.5		13.5				14.5		14.5	
	5280	13.5	13.5		13.5			13.5	13.5		13.5			14.5	14.5		14.5		
	5290				1		12.0						12.0						13.0
	5300	13.5	13.5		13.5			13.5	13.5		13.5			14.5	14.5		14.5		
	5310			12		12				12		12				13.0		13.0	
	5320	12	12		13.5			12.0	12.0		12.0			13.0	13.0		13.0		
5.5GHz Band	5500	12.0	12.0		12.0			12.0	12.0		12.0			12.0	12.0		12.0		
	5510			12.0		12.0				12.5		12.5				13.0		13.0	
	5520	13.5	13.5		13.5			13.5	13.5		13.5			15.0	15.0		15.0		
	5530						12.0						12.0						13.0
	5540	13.5	13.5		13.5			13.5	13.5		13.5			15.0	15.0		15.0		
	5550			13.5		13.5				13.5		13.5				15.0		15.0	
	5560	13.5	13.5		13.5			13.5	13.5		13.5			15.0	15.0		15.0		
	5580	13.5	13.5		13.5			13.5	13.5		13.5			15.0	15.0		15.0		
	5600	13.5	13.5		13.5			13.5	13.5		13.5			15.0	15.0		15.0		
	5610						13.5						13.5						15.0
	5620	13.5	13.5		13.5			13.5	13.5		13.5			15.0	15.0		15.0		
	5630			13.5		13.5				13.5		13.5				15.0		15.0	
	5640	13.5	13.5		13.5			13.5	13.5		13.5			15.0	15.0		15.0		
	5660	13.5	13.5		13.5			13.5	13.5		13.5			15.0	15.0		15.0		
	5670			13.5		13.5				13.5		13.5				15.0		15.0	
	5680	13.5	13.5		13.5			13.5	13.5		13.5			15.0	15.0		15.0		
	5690						13.5						13.5						15.5
	5700	11.5	11.5		11.5			11.5	11.5		11.5			12.5	12.5		12.5		
	5710			13.5		13.5				13.5		13.5				15.5		15.5	
	5720	13.5	13.5		13.5			13.5	13.5		13.5			15.0	15.0		15.0		
5.8GHz Band	5745	13.5	13.5		13.5			13.5	13.5		13.5			15.0	15.0		15.0		
	5755			13.5		13.5				13.5		13.5				15.5		15.5	
	5765	13.5	13.5		13.5			13.5	13.5		13.5			15.0	15.0		15.0		
	5775						13.5						13.5						15.5
	5785	13.5	13.5		13.5			13.5	13.5		13.5			15.0	15.0		15.0		
	5795			13.5		13.5				13.5		13.5				15.5		15.5	
	5805	13.5	13.5		13.5			13.5	13.5		13.5			15.0	15.0		15.0		
	5825	13.5	13.5		13.5			13.5	13.5		13.5			15.0	15.0		15.0		

5. RF Exposure Limits

5.1 Uncontrolled Environment

Uncontrolled Environments are defined as locations where there is the exposure of individuals who have no knowledge or control of their exposure. The general population/uncontrolled exposure limits are applicable to situations in which the general public may be exposed or in which persons who are exposed as a consequence of their employment may not be made fully aware of the potential for exposure or cannot exercise control over their exposure. Members of the general public would come under this category when exposure is not employment-related; for example, in the case of a wireless transmitter that exposes persons in its vicinity.

5.2 Controlled Environment

Controlled Environments are defined as locations where there is exposure that may be incurred by persons who are aware of the potential for exposure, (i.e. as a result of employment or occupation). In general, occupational/controlled exposure limits are applicable to situations in which persons are exposed as a consequence of their employment, who have been made fully aware of the potential for exposure and can exercise control over their exposure. The exposure category is also applicable when the exposure is of a transient nature due to incidental passage through a location where the exposure levels may be higher than the general population/uncontrolled limits, but the exposed person is fully aware of the potential for exposure and can exercise control over his or her exposure by leaving the area or by some other appropriate means.

Limits for Occupational/Controlled Exposure (W/kg)

Whole-Body	Partial-Body	Hands, Wrists, Feet and Ankles
0.4	8.0	20.0

Limits for General Population/Uncontrolled Exposure (W/kg)

Whole-Body	Partial-Body	Hands, Wrists, Feet and Ankles
0.08	1.6	4.0

1. Whole-Body SAR is averaged over the entire body, partial-body SAR is averaged over any 1gram of tissue defined as a tissue volume in the shape of a cube. SAR for hands, wrists, feet and ankles is averaged over any 10 grams of tissue defined as a tissue volume in the shape of a cube.

6. Specific Absorption Rate (SAR)

6.1 Introduction

SAR is related to the rate at which energy is absorbed per unit mass in an object exposed to a radio field. The SAR distribution in a biological body is complicated and is usually carried out by experimental techniques or numerical modeling. The standard recommends limits for two tiers of groups, occupational/controlled and general population/uncontrolled, based on a person's awareness and ability to exercise control over his or her exposure. In general, occupational/controlled exposure limits are higher than the limits for general population/uncontrolled.

6.2 SAR Definition

The SAR definition is the time derivative (rate) of the incremental energy (dW) absorbed by (dissipated in) an incremental mass (dm) contained in a volume element (dv) of a given density (ρ). The equation description is as below:

$$SAR = \frac{d}{dt} \left(\frac{dW}{dm} \right) = \frac{d}{dt} \left(\frac{dW}{\rho dv} \right)$$


SAR is expressed in units of Watts per kilogram (W/kg)

$$SAR = \frac{\sigma |E|^2}{\rho}$$

Where: σ is the conductivity of the tissue, ρ is the mass density of the tissue and E is the RMS electrical field strength.

7. System Description and Setup

The DASY system used for performing compliance tests consists of the following items:

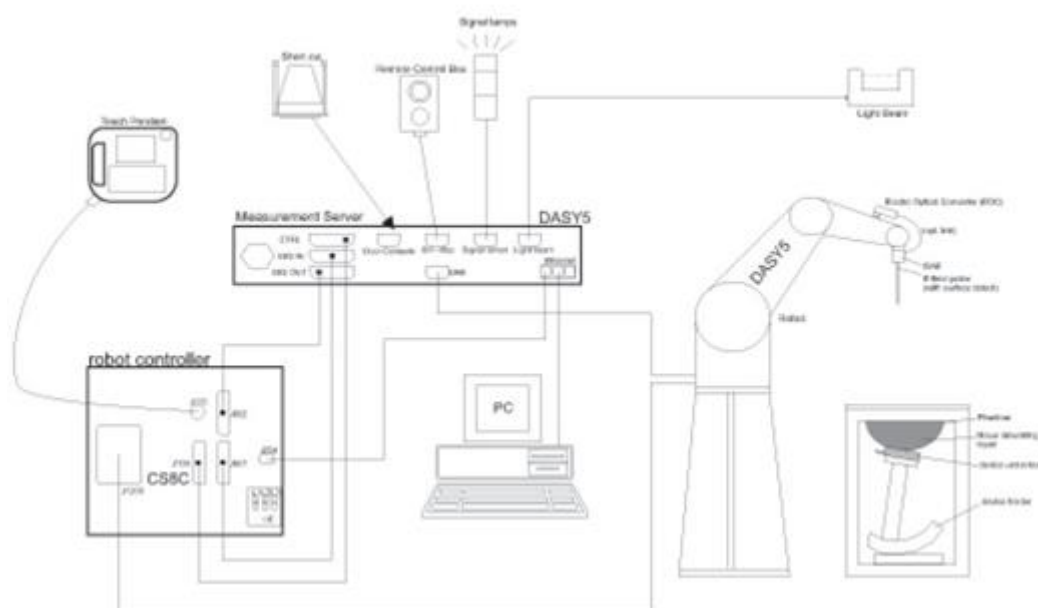

- A standard high precision 6-axis robot with controller, teach pendant and software. An arm extension for accommodating the data acquisition electronics (DAE).
- An isotropic Field probe optimized and calibrated for the targeted measurement.
- A data acquisition electronics (DAE) which performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. The unit is battery powered with standard or rechargeable batteries. The signal is optically transmitted to the EOC.
- The Electro-optical converter (EOC) performs the conversion from optical to electrical signals for the digital communication to the DAE. To use optical surface detection, a special version of the EOC is required. The EOC signal is transmitted to the measurement server.
- The function of the measurement server is to perform the time critical tasks such as signal filtering, control of the robot operation and fast movement interrupts.
- The Light Beam used is for probe alignment. This improves the (absolute) accuracy of the probe positioning.
- A computer running WinXP or Win7 and the DASY5 software.
- Remote control and teach pendant as well as additional circuitry for robot safety such as warning lamps, etc.
- The phantom, the device holder and other accessories according to the targeted measurement.

8. Measurement Procedures

The measurement procedures are as follows:

<Conducted power measurement>

- (a) For WWAN power measurement, use base station simulator to configure EUT WWAN transmission in conducted connection with RF cable, at maximum power in each supported wireless interface and frequency band.
- (b) Read the WWAN RF power level from the base station simulator.
- (c) For WLAN/BT power measurement, use engineering software to configure EUT WLAN/BT continuously transmission, at maximum RF power in each supported wireless interface and frequency band
- (d) Connect EUT RF port through RF cable to the power meter, and measure WLAN/BT output power

<SAR measurement>

- (a) Use base station simulator to configure EUT WWAN transmission in radiated connection, and engineering software to configure EUT WLAN/BT continuously transmission, at maximum RF power, in the highest power channel.
- (b) Place the EUT in the positions as Appendix D demonstrates.
- (c) Set scan area, grid size and other setting on the DASY software.
- (d) Measure SAR results for the highest power channel on each testing position.
- (e) Find out the largest SAR result on these testing positions of each band
- (f) Measure SAR results for other channels in worst SAR testing position if the reported SAR of highest power channel is larger than 0.8 W/kg

According to the test standard, the recommended procedure for assessing the peak spatial-average SAR value consists of the following steps:

- (a) Power reference measurement
- (b) Area scan
- (c) Zoom scan
- (d) Power drift measurement

8.1 Spatial Peak SAR Evaluation

The procedure for spatial peak SAR evaluation has been implemented according to the test standard. It can be conducted for 1g and 10g, as well as for user-specific masses. The DASY software includes all numerical procedures necessary to evaluate the spatial peak SAR value.

The base for the evaluation is a "cube" measurement. The measured volume must include the 1g and 10g cubes with the highest averaged SAR values. For that purpose, the center of the measured volume is aligned to the interpolated peak SAR value of a previously performed area scan.

The entire evaluation of the spatial peak values is performed within the post-processing engine (SEMCAD). The system always gives the maximum values for the 1g and 10g cubes. The algorithm to find the cube with highest averaged SAR is divided into the following stages:

- (a) Extraction of the measured data (grid and values) from the Zoom Scan
- (b) Calculation of the SAR value at every measurement point based on all stored data (A/D values and measurement parameters)
- (c) Generation of a high-resolution mesh within the measured volume
- (d) Interpolation of all measured values from the measurement grid to the high-resolution grid
- (e) Extrapolation of the entire 3-D field distribution to the phantom surface over the distance from sensor to surface
- (f) Calculation of the averaged SAR within masses of 1g and 10g

8.2 Power Reference Measurement

The Power Reference Measurement and Power Drift Measurements are for monitoring the power drift of the device under test in the batch process. The minimum distance of probe sensors to surface determines the closest measurement point to phantom surface. This distance cannot be smaller than the distance of sensor calibration points to probe tip as defined in the probe properties.

8.3 Area Scan

The area scan is used as a fast scan in two dimensions to find the area of high field values, before doing a fine measurement around the hot spot. The sophisticated interpolation routines implemented in DASY software can find the maximum found in the scanned area, within a range of the global maximum. The range (in dB0) is specified in the standards for compliance testing. For example, a 2 dB range is required in IEEE standard 1528 and IEC 62209 standards, whereby 3 dB is a requirement when compliance is assessed in accordance with the ARIB standard (Japan), if only one zoom scan follows the area scan, then only the absolute maximum will be taken as reference. For cases where multiple maximums are detected, the number of zoom scans has to be increased accordingly.

Area scan parameters extracted from FCC KDB 865664 D01v01r03 SAR measurement 100 MHz to 6 GHz.

	≤ 3 GHz	> 3 GHz
Maximum distance from closest measurement point (geometric center of probe sensors) to phantom surface	5 ± 1 mm	$\frac{1}{2} \cdot \delta \cdot \ln(2) \pm 0.5$ mm
Maximum probe angle from probe axis to phantom surface normal at the measurement location	$30^\circ \pm 1^\circ$	$20^\circ \pm 1^\circ$
Maximum area scan spatial resolution: Δx_{Area} , Δy_{Area}	≤ 2 GHz: ≤ 15 mm $2 - 3$ GHz: ≤ 12 mm	$3 - 4$ GHz: ≤ 12 mm $4 - 6$ GHz: ≤ 10 mm
	When the x or y dimension of the test device, in the measurement plane orientation, is smaller than the above, the measurement resolution must be $\leq$ the corresponding x or y dimension of the test device with at least one measurement point on the test device.	

8.4 Zoom Scan

Zoom scans are used to assess the peak spatial SAR values within a cubic averaging volume containing 1 gram and 10 gram of simulated tissue. The zoom scan measures points (refer to table below) within a cube whose base faces are centered on the maxima found in a preceding area scan job within the same procedure. When the measurement is done, the zoom scan evaluates the averaged SAR for 1 gram and 10 gram and displays these values next to the job's label.

Zoom scan parameters extracted from FCC KDB 865664 D01v01r03 SAR measurement 100 MHz to 6 GHz.

			≤ 3 GHz	> 3 GHz
Maximum zoom scan spatial resolution: $\Delta x_{\text{Zoom}}, \Delta y_{\text{Zoom}}$			≤ 2 GHz: ≤ 8 mm $2 - 3$ GHz: ≤ 5 mm*	$3 - 4$ GHz: ≤ 5 mm* $4 - 6$ GHz: ≤ 4 mm*
Maximum zoom scan spatial resolution, normal to phantom surface	uniform grid: $\Delta z_{\text{Zoom}}(n)$		≤ 5 mm	$3 - 4$ GHz: ≤ 4 mm $4 - 5$ GHz: ≤ 3 mm $5 - 6$ GHz: ≤ 2 mm
	graded grid	$\Delta z_{\text{Zoom}}(1)$: between 1 st two points closest to phantom surface	≤ 4 mm	$3 - 4$ GHz: ≤ 3 mm $4 - 5$ GHz: ≤ 2.5 mm $5 - 6$ GHz: ≤ 2 mm
		$\Delta z_{\text{Zoom}}(n>1)$: between subsequent points	$\leq 1.5 \cdot \Delta z_{\text{Zoom}}(n-1)$	
Minimum zoom scan volume	x, y, z		≥ 30 mm	$3 - 4$ GHz: ≥ 28 mm $4 - 5$ GHz: ≥ 25 mm $5 - 6$ GHz: ≥ 22 mm
Note: δ is the penetration depth of a plane-wave at normal incidence to the tissue medium; see draft standard IEEE P1528-2011 for details.				
* When zoom scan is required and the <i>reported</i> SAR from the <i>area scan based 1-g SAR estimation</i> procedures of KDB 447498 is ≤ 1.4 W/kg, ≤ 8 mm, ≤ 7 mm and ≤ 5 mm zoom scan resolution may be applied, respectively, for 2 GHz to 3 GHz, 3 GHz to 4 GHz and 4 GHz to 6 GHz.				

8.5 Volume Scan Procedures

The volume scan is used to assess overlapping SAR distributions for antennas transmitting in different frequency bands. It is equivalent to an oversized zoom scan used in standalone measurements. The measurement volume will be used to enclose all the simultaneous transmitting antennas. For antennas transmitting simultaneously in different frequency bands, the volume scan is measured separately in each frequency band. In order to sum correctly to compute the 1g aggregate SAR, the EUT remain in the same test position for all measurements and all volume scan use the same spatial resolution and grid spacing. When all volume scan were completed, the software, SEMCAD postprocessor can combine and subsequently superpose these measurement data to calculating the multiband SAR.

8.6 Power Drift Monitoring

All SAR testing is under the EUT install full charged battery and transmit maximum output power. In DASYS measurement software, the power reference measurement and power drift measurement procedures are used for monitoring the power drift of EUT during SAR test. Both these procedures measure the field at a specified reference position before and after the SAR testing. The software will calculate the field difference in dB. If the power drifts more than 5%, the SAR will be retested.



9. Test Equipment List

Manufacturer	Name of Equipment	Type/Model	Serial Number	Calibration	
				Last Cal.	Due Date
SPEAG	2450MHz System Validation Kit	D2450V2	924	Nov. 19, 2014	Nov. 18, 2015
SPEAG	5GHz System Validation Kit	D5GHzV2	1006	Sep. 25, 2014	Sep. 24, 2015
SPEAG	Data Acquisition Electronics	DAE3	577	Oct. 06, 2014	Oct. 05, 2015
SPEAG	Data Acquisition Electronics	DAE4	1399	Nov. 13, 2014	Nov. 12, 2015
SPEAG	Dosimetric E-Field Probe	EX3DV4	3931	Sep. 25, 2014	Sep. 24, 2015
SPEAG	Dosimetric E-Field Probe	EX3DV4	3955	Nov. 21, 2014	Nov. 20, 2015
H.M.IRIS	Thermometer	TH-08	TM658	Oct. 21, 2014	Oct. 20, 2015
Wisewind	Thermometer	ETP-101	TM225	Oct. 21, 2014	Oct. 20, 2015
SPEAG	Device Holder	N/A	N/A	N/A	N/A
R&S	Signal Generator	SMF100A	101107	May. 23, 2014	May. 22, 2015
Agilent	ENA Network Analyzer	E5071C	MY46316648	Feb. 11, 2015	Feb. 10, 2016
SPEAG	Dielectric Probe Kit	DAK-3.5	1138	Nov. 18, 2014	Nov. 17, 2015
Anritsu	Power Meter	ML2495A	1349001	Dec. 03, 2014	Dec. 02, 2015
Anritsu	Power Sensor	MA2411B	1306099	Dec. 03, 2014	Dec. 02, 2015
R&S	Spectrum Analyzer	FSP 7	101131	Jul. 10, 2014	Jul. 09, 2015
Agilent	Dual Directional Coupler	778D	50422	Note 1	
Woken	Attenuator 1	WK0602-XX	N/A	Note 1	
PE	Attenuator 2	PE7005-10	N/A	Note 1	
PE	Attenuator 3	PE7005- 3	N/A	Note 1	
AR	Power Amplifier	5S1G4M2	0328767	Note 1	
Mini-Circuits	Power Amplifier	ZVE-3W	162601250	Note 1	

General Note:

1. Prior to system verification and validation, the path loss from the signal generator to the system check source and the power meter, which includes the amplifier, cable, attenuator and directional coupler, was measured by the network analyzer. The reading of the power meter was offset by the path loss difference between the path to the power meter and the path to the system check source to monitor the actual power level fed to the system check source.

10. System Verification

10.1 Tissue Verification

The following tissue formulations are provided for reference only as some of the parameters have not been thoroughly verified. The composition of ingredients may be modified accordingly to achieve the desired target tissue parameters required for routine SAR evaluation.

Frequency (MHz)	Water (%)	Sugar (%)	Cellulose (%)	Salt (%)	Preventol (%)	DGBE (%)	Conductivity (σ)	Permittivity (ϵ_r)
For Head								
750	41.1	57.0	0.2	1.4	0.2	0	0.89	41.9
835	40.3	57.9	0.2	1.4	0.2	0	0.90	41.5
900	40.3	57.9	0.2	1.4	0.2	0	0.97	41.5
1800, 1900, 2000	55.2	0	0	0.3	0	44.5	1.40	40.0
2450	55.0	0	0	0	0	45.0	1.80	39.2
2600	54.8	0	0	0.1	0	45.1	1.96	39.0
For Body								
750	51.7	47.2	0	0.9	0.1	0	0.96	55.5
835	50.8	48.2	0	0.9	0.1	0	0.97	55.2
900	50.8	48.2	0	0.9	0.1	0	1.05	55.0
1800, 1900, 2000	70.2	0	0	0.4	0	29.4	1.52	53.3
2450	68.6	0	0	0	0	31.4	1.95	52.7
2600	68.1	0	0	0.1	0	31.8	2.16	52.5

Simulating Liquid for 5GHz, Manufactured by SPEAG

Ingredients	(% by weight)
Water	64~78%
Mineral oil	11~18%
Emulsifiers	9~15%
Additives and Salt	2~3%

<Tissue Dielectric Parameter Check Results>

Frequency (MHz)	Tissue Type	Liquid Temp. (°C)	Conductivity (σ)	Permittivity (ϵ_r)	Conductivity Target (σ)	Permittivity Target (ϵ_r)	Delta (σ) (%)	Delta (ϵ_r) (%)	Limit (%)	Date
2450	MSL	22.5	2.008	51.321	1.95	52.70	2.97	-2.62	±5	2015/4/8
2450	MSL	22.2	2.006	52.575	1.95	52.70	2.87	-0.24	±5	2015/4/22
5200	MSL	22.4	5.366	47.485	5.30	49.00	1.25	-3.09	±5	2015/4/9
5300	MSL	22.4	5.512	47.309	5.42	48.90	1.70	-3.25	±5	2015/4/9
5600	MSL	22.3	5.968	46.187	5.77	48.50	3.43	-4.77	±5	2015/4/10
5800	MSL	22.4	6.139	46.492	6.00	48.20	2.32	-3.54	±5	2015/4/9
5800	MSL	22.3	6.204	45.933	6.00	48.20	3.40	-4.70	±5	2015/4/10

10.2 System Performance Check Results

Comparing to the original SAR value provided by SPEAG, the verification data should be within its specification of 10 %. Below table shows the target SAR and measured SAR after normalized to 1W input power. The table below indicates the system performance check can meet the variation criterion and the plots can be referred to Appendix A of this report.

Date	Frequency (MHz)	Tissue Type	Input Power (mW)	Dipole S/N	Probe S/N	DAE S/N	Measured 1g SAR (W/kg)	Targeted 1g SAR (W/kg)	Normalized 1g SAR (W/kg)	Deviation (%)
2015/4/8	2450	MSL	250	D2450V2-924	EX3DV4 - SN3955	DAE4 Sn1399	12.10	51.40	48.40	-5.84
2015/4/22	2450	MSL	250	D2450V2-924	EX3DV4 - SN3931	DAE3 Sn577	12.60	51.40	50.40	-1.95
2015/4/9	5200	MSL	100	D5GHzV2-1006	EX3DV4 - SN3955	DAE4 Sn1399	8.36	77.50	83.60	7.87
2015/4/9	5300	MSL	100	D5GHzV2-1006	EX3DV4 - SN3955	DAE4 Sn1399	7.46	80.00	74.60	-6.75
2015/4/10	5600	MSL	100	D5GHzV2-1006	EX3DV4 - SN3955	DAE4 Sn1399	8.21	85.20	82.10	-3.64
2015/4/9	5800	MSL	100	D5GHzV2-1006	EX3DV4 - SN3955	DAE4 Sn1399	7.35	78.40	73.50	-6.25
2015/4/10	5800	MSL	100	D5GHzV2-1006	EX3DV4 - SN3955	DAE4 Sn1399	7.42	78.40	74.20	-5.36

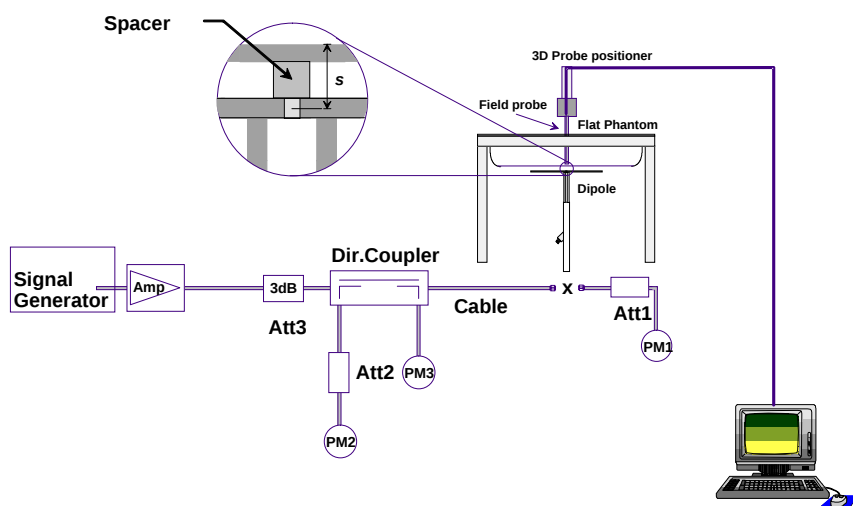


Fig 8.3.1 System Performance Check Setup



Fig 8.3.2 Setup Photo

11. RF Exposure Positions

11.1 SAR Testing for Tablet

This device can be used also in full sized tablet exposure conditions, due to its size. Per FCC KDB 616217, the back surface and edges of the tablet should be tested for SAR compliance with the tablet touching the phantom. The SAR exclusion threshold in KDB 447498 D01v05r02 can be applied to determine SAR test exclusion for adjacent edge configurations. The closest distance from the antenna to an adjacent tablet edge is used to determine if SAR testing is required for the adjacent edges, with the adjacent edge positioned against the phantom and the edge containing the antenna positioned perpendicular to the phantom.

12. Conducted RF Output Power (Unit: dBm)

<WLAN Conducted Power>

General Note:

1. For SAR testing was performed on single antenna RF power in SISO mode is larger or equal to the single antenna RF power in MIMO mode, and for RF exposure assessment of MIMO mode simultaneous transmission exclusion analysis was performed with SAR test results of each antenna in SISO mode.
2. Full SAR tests for SISO IEEE 802.11ac configurations were not required because the average output power was not more than 0.25 dB higher than IEEE 802.11a mode. IEEE 802.11ac was evaluated for the highest IEEE 802.11a position in each 5 GHz band and exposure condition.
3. For IEEE802.11a/b/g SAR testing, highest average RF output power channel for the lowest data rate for 802.11a/b were selected for SAR evaluation. 802.11g were not investigated since the average output powers over all channels and data rates were not more than 0.25 dB higher than the tested channel in the lowest data rate of 802.11b mode.
4. For IEEE802.11n/ac, SAR testing can be conducted on channel with the highest output power when taking into consideration tune-up tolerance for same test configuration that was identified during SAR evaluations for IEEE802.11a/b/g (as applicable) provided bandwidth and test position are the same.
5. For IEEE802.11n/ac with multiple channel BW configurations, highest channel BW configuration with highest output power limit shall be tested.
6. Testing of lower BW configurations is not required when the maximum average output of the default test channels in each lower BW configuration is less than 1/4dB higher than the default test channel in the highest BW configuration.

<2.4GHz WLAN>

<Antenna A>

WLAN 2.4GHz 802.11b Average Power (dBm)					
Power vs. Channel			Power vs. Data Rate		
Channel	Frequency (MHz)	Data Rate	2Mbps	5.5Mbps	11Mbps
		1Mbps			
CH 1	2412	14.36	14.38	14.44	14.41
CH 6	2437	14.48			
CH 11	2462	14.20			

WLAN 2.4GHz 802.11g Average Power (dBm)									
Power vs. Channel			Power vs. Data Rate						
Channel	Frequency (MHz)	Data Rate	9Mbps	12Mbps	18Mbps	24Mbps	36Mbps	48Mbps	54Mbps
		6Mbps							
CH 1	2412	12.44	14.75	14.64	14.84	14.77	14.90	14.78	14.88
CH 6	2437	14.94							
CH 11	2462	10.66							

WLAN 2.4GHz 802.11n-HT20 Average Power (dBm)									
Power vs. Channel			Power vs. MCS Index						
Channel	Frequency (MHz)	MCS Index	MCS1	MCS2	MCS3	MCS4	MCS5	MCS6	MCS7
		MCS0							
CH 1	2412	12.43	14.58	14.76	14.57	14.51	14.50	14.76	14.64
CH 6	2437	14.80							
CH 11	2462	10.92							

WLAN 2.4GHz 802.11n-HT40 Average Power (dBm)									
Power vs. Channel			Power vs. MCS Index						
Channel	Frequency (MHz)	MCS Index	MCS1	MCS2	MCS3	MCS4	MCS5	MCS6	MCS7
		MCS0							
CH 3	2422	11.60	14.63	14.75	14.52	14.68	14.69	14.72	14.69
CH 6	2437	14.78							
CH 9	2452	10.58							

<Antenna B>

WLAN 2.4GHz 802.11b Average Power (dBm)					
Power vs. Channel			Power vs. Data Rate		
Channel	Frequency (MHz)	Data Rate	2Mbps	5.5Mbps	11Mbps
		1Mbps			
CH 1	2412	14.34	14.40	14.31	14.35
CH 6	2437	14.44			
CH 11	2462	14.23			

WLAN 2.4GHz 802.11g Average Power (dBm)									
Power vs. Channel			Power vs. Data Rate						
Channel	Frequency (MHz)	Data Rate	9Mbps	12Mbps	18Mbps	24Mbps	36Mbps	48Mbps	54Mbps
		6Mbps							
CH 1	2412	12.83	14.47	14.44	14.55	14.62	14.67	14.64	14.51
CH 6	2437	14.72							
CH 11	2462	10.73							

WLAN 2.4GHz 802.11n-HT20 Average Power (dBm)									
Power vs. Channel			Power vs. MCS Index						
Channel	Frequency (MHz)	MCS Index	MCS1	MCS2	MCS3	MCS4	MCS5	MCS6	MCS7
		MCS0							
CH 1	2412	12.73	14.88	14.81	14.73	14.91	14.75	14.77	14.90
CH 6	2437	14.92							
CH 11	2462	10.94							

WLAN 2.4GHz 802.11n-HT40 Average Power (dBm)									
Power vs. Channel			Power vs. MCS Index						
Channel	Frequency (MHz)	MCS Index	MCS1	MCS2	MCS3	MCS4	MCS5	MCS6	MCS7
		MCS0							
CH 3	2422	11.55	14.63	14.62	14.45	14.51	14.43	14.59	14.56
CH 6	2437	14.70							
CH 9	2452	9.97							



<Antenna A+B>

WLAN 2.4GHz 802.11b Average Power (dBm)					
Power vs. Channel			Power vs. Data Rate		
Channel	Frequency (MHz)	Data Rate	2Mbps	5.5Mbps	11Mbps
		1Mbps			
CH 1	2412	14.04	14.21	14.19	14.30
CH 6	2437	14.12			
CH 11	2462	14.37			

WLAN 2.4GHz 802.11g Average Power (dBm)									
Power vs. Channel			Power vs. Data Rate						
Channel	Frequency (MHz)	Data Rate	9Mbps	12Mbps	18Mbps	24Mbps	36Mbps	48Mbps	54Mbps
		6Mbps							
CH 1	2412	13.04	14.36	14.35	14.55	14.56	14.41	14.34	14.44
CH 6	2437	14.61							
CH 11	2462	13.39							

WLAN 2.4GHz 802.11n-HT20 Average Power (dBm)									
Power vs. Channel			Power vs. MCS Index						
Channel	Frequency (MHz)	MCS Index	MCS1	MCS2	MCS3	MCS4	MCS5	MCS6	MCS7
		MCS0							
CH 1	2412	13.22	14.86	14.84	14.64	14.75	14.84	14.87	14.66
CH 6	2437	14.95							
CH 11	2462	13.32							

WLAN 2.4GHz 802.11n-HT40 Average Power (dBm)									
Power vs. Channel			Power vs. MCS Index						
Channel	Frequency (MHz)	MCS Index	MCS1	MCS2	MCS3	MCS4	MCS5	MCS6	MCS7
		MCS0							
CH 3	2422	10.80	14.48	14.48	14.52	14.54	14.49	14.74	14.56
CH 6	2437	14.78							
CH 9	2452	10.88							



<5GHz WLAN>

<Antenna A>

WLAN 5GHz 802.11a Average Power (dBm)									
Power vs. Channel			Power vs. Data Rate						
Channel	Frequency (MHz)	Data Rate 6Mbps	9Mbps	12Mbps	18Mbps	24Mbps	36Mbps	48Mbps	54Mbps
CH 36	5180	12.48	13.17	13.32	13.27	13.29	13.40	13.24	13.28
CH 40	5200	13.43							
CH 44	5220	13.48							
CH 48	5240	13.46							
CH 52	5260	13.22	13.01	13.15	13.06	12.97	13.16	13.06	13.14
CH 56	5280	13.12							
CH 60	5300	13.16							
CH 64	5320	11.81							
CH 100	5500	11.71	13.47	13.18	13.41	13.29	13.35	13.37	13.39
CH 104	5520	13.32							
CH 108	5540	13.21							
CH 112	5560	13.20							
CH 116	5580	13.49							
CH 132	5660	13.37							
CH 136	5680	13.23							
CH 140	5700	11.49							
CH 144	5720	13.24	13.24	13.15	13.37	13.23	13.20	13.13	13.31
CH 149	5745	13.43							
CH 153	5765	13.35							
CH 157	5785	13.27							
CH 161	5805	13.21							
CH 165	5825	13.22							

WLAN 5GHz 802.11n-HT20 Average Power (dBm)									
Power vs. Channel			Power vs. MCS Index						
Channel	Frequency (MHz)	Data Rate 6Mbps	9Mbps	12Mbps	18Mbps	24Mbps	36Mbps	48Mbps	54Mbps
CH 36	5180	12.35	13.45	13.31	13.36	13.24	13.35	13.33	13.36
CH 40	5200	13.32							
CH 44	5220	13.48							
CH 48	5240	13.49							
CH 52	5260	13.24	13.03	13.19	13.10	13.20	13.22	13.03	13.19
CH 56	5280	13.13							
CH 60	5300	13.11							
CH 64	5320	11.89							
CH 100	5500	11.82	13.06	13.08	13.01	13.00	13.28	13.10	13.08
CH 104	5520	13.29							
CH 108	5540	13.18							
CH 112	5560	13.20							
CH 116	5580	13.30							
CH 132	5660	13.09							
CH 136	5680	13.28							
CH 140	5700	11.13							
CH 144	5720	13.28	13.16	13.28	13.16	13.24	13.36	13.34	13.28
CH 149	5745	13.43							
CH 153	5765	13.26							
CH 157	5785	13.12							
CH 161	5805	13.15							
CH 165	5825	13.14							



WLAN 5GHz 802.11n-HT40 Average Power (dBm)									
Power vs. Channel			Power vs. MCS Index						
Channel	Frequency (MHz)	MCS Index MCS0	MCS1	MCS2	MCS3	MCS4	MCS5	MCS6	MCS7
CH 38	5190	10.16	13.01	13.16	13.24	13.26	13.06	13.18	13.10
CH 46	5230	13.29							
CH 54	5270	13.21							
CH 62	5310	11.91	13.15	13.14	13.02	13.12	13.10	13.01	12.94
CH 102	5510	11.71							
CH 110	5550	13.49							
CH 134	5670	13.26	13.20	13.48	13.39	13.30	13.21	13.36	13.37
CH 142	5710	13.41							
CH 151	5755	13.18							
CH 159	5795	13.25	12.96	13.20	13.02	13.04	13.13	12.95	13.14

WLAN 5GHz 802.11ac-VHT20 Average Power (dBm)										
Power vs. Channel			Power vs. MCS Index							
Channel	Frequency (MHz)	MCS Index MCS0	MCS1	MCS2	MCS3	MCS4	MCS5	MCS6	MCS7	MCS8
CH 36	5180	12.28	13.41	13.40	13.37	13.33	13.35	13.25	13.26	13.27
CH 40	5200	13.32								
CH 44	5220	13.46								
CH 48	5240	13.47								
CH 52	5260	13.11	12.97	12.88	12.93	12.85	12.91	13.08	13.06	13.00
CH 56	5280	13.13								
CH 60	5300	13.06								
CH 64	5320	11.86								
CH 100	5500	11.78	13.15	13.23	13.28	13.30	13.16	13.21	13.34	13.31
CH 104	5520	13.24								
CH 108	5540	13.15								
CH 112	5560	13.17								
CH 116	5580	13.28								
CH 132	5660	13.34								
CH 136	5680	13.19								
CH 140	5700	11.10								
CH 144	5720	13.40	13.26	13.14	13.31	13.16	13.11	13.29	13.04	13.07
CH 149	5745	13.34								
CH 153	5765	13.19								
CH 157	5785	13.30								
CH 161	5805	13.15								
CH 165	5825	13.08								

WLAN 5GHz 802.11ac-VHT40 Average Power (dBm)											
Power vs. Channel			Power vs. MCS Index								
Channel	Frequency (MHz)	MCS Index MCS0	MCS1	MCS2	MCS3	MCS4	MCS5	MCS6	MCS7	MCS8	MCS9
CH 38	5190	10.13	13.01	13.21	13.04	13.14	13.07	13.02	12.95	13.23	12.95
CH 46	5230	13.26									
CH 54	5270	13.12									
CH 62	5310	11.75	13.07	13.07	12.86	12.96	12.88	12.98	13.05	13.10	12.99
CH 102	5510	11.68									
CH 110	5550	13.26									
CH 134	5670	13.24	13.00	13.01	13.11	13.23	12.97	13.04	13.20	13.10	13.15
CH 142	5710	13.14									
CH 151	5755	13.46									
CH 159	5795	13.37	13.41	13.20	13.38	13.16	13.18	13.23	13.43	13.17	13.22

WLAN 5GHz 802.11ac-VHT80 Average Power (dBm)											
Power vs. Channel			Power vs. MCS Index								
Channel	Frequency (MHz)	MCS Index MCS0	MCS1	MCS2	MCS3	MCS4	MCS5	MCS6	MCS7	MCS8	MCS9
CH 42	5210	11.90	11.60	11.87	11.87	11.88	11.67	11.67	11.71	11.60	11.88
CH 58	5290	11.95	11.91	11.66	11.73	11.69	11.77	11.91	11.94	11.84	11.66
CH 106	5530	11.98	13.40	13.19	13.17	13.29	13.13	13.21	13.33	13.19	13.31
CH 138	5690	13.42									
CH 155	5775	13.41	13.22	13.38	13.10	13.21	13.24	13.23	13.19	13.26	13.18

<Antenna B>

WLAN 5GHz 802.11a Average Power (dBm)										
Power vs. Channel			Power vs. Data Rate							
Channel	Frequency (MHz)	Data Rate 6Mbps	9Mbps	12Mbps	18Mbps	24Mbps	36Mbps	48Mbps	54Mbps	
CH 36	5180	12.47	13.20	13.30	13.32	13.43	13.38	13.29	13.34	
CH 40	5200	13.27								
CH 44	5220	13.28								
CH 48	5240	13.46								
CH 52	5260	13.33	13.30	13.27	13.21	13.28	13.29	13.27	13.10	
CH 56	5280	13.20								
CH 60	5300	13.22								
CH 64	5320	11.39								
CH 100	5500	11.99	13.35	13.22	13.44	13.19	13.43	13.31	13.30	
CH 104	5520	13.42								
CH 108	5540	13.36								
CH 112	5560	13.10								
CH 116	5580	13.45								
CH 132	5660	13.33								
CH 136	5680	13.22								
CH 140	5700	11.26								
CH 144	5720	13.22	13.34	13.37	13.13	13.37	13.10	13.31	13.35	
CH 149	5745	13.36								
CH 153	5765	13.27								
CH 157	5785	13.15								
CH 161	5805	13.22								
CH 165	5825	13.39								

WLAN 5GHz 802.11n-HT20 Average Power (dBm)									
Power vs. Channel			Power vs. MCS Index						
Channel	Frequency (MHz)	Data Rate 6Mbps	9Mbps	12Mbps	18Mbps	24Mbps	36Mbps	48Mbps	54Mbps
CH 36	5180	12.28	13.27	13.36	13.39	13.42	13.32	13.27	13.31
CH 40	5200	13.45							
CH 44	5220	13.47							
CH 48	5240	13.42							
CH 52	5260	13.13	13.41	13.27	13.36	13.24	13.41	13.37	13.31
CH 56	5280	13.46							
CH 60	5300	13.47							
CH 64	5320	11.69							
CH 100	5500	11.81	13.45	13.19	13.44	13.22	13.22	13.24	13.41
CH 104	5520	13.21							
CH 108	5540	13.46							
CH 112	5560	13.31							
CH 116	5580	13.49							
CH 132	5660	13.38							
CH 136	5680	13.29							
CH 140	5700	11.33							
CH 144	5720	13.17	13.21	13.35	13.12	13.21	13.34	13.37	13.37
CH 149	5745	13.29							
CH 153	5765	13.15							
CH 157	5785	13.41							
CH 161	5805	13.21							
CH 165	5825	13.25							

WLAN 5GHz 802.11n-HT40 Average Power (dBm)									
Power vs. Channel			Power vs. MCS Index						
Channel	Frequency (MHz)	MCS Index MCS0	MCS1	MCS2	MCS3	MCS4	MCS5	MCS6	MCS7
CH 38	5190	11.78	13.15	13.10	13.25	13.15	13.39	13.12	13.25
CH 46	5230	13.41							
CH 54	5270	13.45	13.18	13.41	13.16	13.33	13.25	13.22	13.33
CH 62	5310	11.59							
CH 102	5510	12.46	13.45	13.35	13.24	13.26	13.32	13.22	13.37
CH 110	5550	13.49							
CH 134	5670	13.36							
CH 142	5710	13.35							
CH 151	5755	13.15	13.05	12.99	12.94	12.99	12.97	12.91	13.06
CH 159	5795	13.11							



WLAN 5GHz 802.11ac-VHT20 Average Power (dBm)										
Power vs. Channel			Power vs. MCS Index							
Channel	Frequency (MHz)	MCS Index MCS0	MCS1	MCS2	MCS3	MCS4	MCS5	MCS6	MCS7	MCS8
CH 36	5180	12.22	13.20	13.31	13.33	13.31	13.27	13.23	13.36	13.42
CH 40	5200	13.43								
CH 44	5220	13.38								
CH 48	5240	13.40								
CH 52	5260	13.09	13.33	13.19	13.15	13.25	13.20	13.40	13.23	13.38
CH 56	5280	13.42								
CH 60	5300	13.42								
CH 64	5320	11.64								
CH 100	5500	11.78	13.25	13.22	13.29	13.23	13.36	13.21	13.39	13.42
CH 104	5520	13.12								
CH 108	5540	13.43								
CH 112	5560	13.28								
CH 116	5580	13.46								
CH 132	5660	13.09								
CH 136	5680	13.25								
CH 140	5700	11.28								
CH 144	5720	13.40	13.10	13.12	13.10	13.05	13.28	13.12	13.09	13.30
CH 149	5745	13.11								
CH 153	5765	13.15								
CH 157	5785	13.33								
CH 161	5805	13.21								
CH 165	5825	13.29								

WLAN 5GHz 802.11ac-VHT40 Average Power (dBm)											
Power vs. Channel			Power vs. MCS Index								
Channel	Frequency (MHz)	MCS Index MCS0	MCS1	MCS2	MCS3	MCS4	MCS5	MCS6	MCS7	MCS8	MCS9
CH 38	5190	11.77	13.31	13.04	13.12	13.13	13.07	13.20	13.28	13.08	13.25
CH 46	5230	13.34									
CH 54	5270	13.25	13.00	13.24	13.07	13.10	13.22	13.06	12.94	12.95	13.06
CH 62	5310	11.70									
CH 102	5510	12.40	13.38	13.37	13.32	13.34	13.15	13.21	13.38	13.41	13.20
CH 110	5550	13.42									
CH 134	5670	13.32									
CH 142	5710	13.38									
CH 151	5755	13.37	13.11	13.35	13.11	13.20	13.27	13.35	13.17	13.23	13.28
CH 159	5795	13.24									

WLAN 5GHz 802.11ac-VHT80 Average Power (dBm)											
Power vs. Channel			Power vs. MCS Index								
Channel	Frequency (MHz)	MCS Index MCS0	MCS1	MCS2	MCS3	MCS4	MCS5	MCS6	MCS7	MCS8	MCS9
CH 42	5210	11.68	11.39	11.59	11.45	11.46	11.64	11.45	11.53	11.42	11.50
CH 58	5290	11.93									
CH 106	5530	11.96	12.96	13.16	12.94	13.12	13.20	13.08	12.91	13.17	13.15
CH 138	5690	13.13									
CH 155	5775	13.28	13.25	13.13	13.03	13.09	13.18	13.23	13.01	13.26	13.00



<Antenna A+B>

WLAN 5GHz 802.11a Average Power (dBm)									
Power vs. Channel			Power vs. Data Rate						
Channel	Frequency (MHz)	Data Rate 6Mbps	9Mbps	12Mbps	18Mbps	24Mbps	36Mbps	48Mbps	54Mbps
CH 36	5180	12.59	12.56	12.44	12.37	12.48	12.36	12.38	12.35
CH 40	5200	12.58							
CH 44	5220	12.59							
CH 48	5240	12.57							
CH 52	5260	14.37	14.35	14.16	14.14	14.06	14.14	14.22	14.08
CH 56	5280	14.22							
CH 60	5300	14.27							
CH 64	5320	12.95							
CH 100	5500	11.87	14.81	14.76	14.86	14.85	14.81	14.92	14.67
CH 104	5520	14.75							
CH 108	5540	14.58							
CH 112	5560	14.75							
CH 116	5580	14.93							
CH 132	5660	14.84							
CH 136	5680	14.79							
CH 140	5700	12.17							
CH 144	5720	14.75	14.86	14.95	14.96	14.95	14.69	14.87	14.73
CH 149	5745	14.95							
CH 153	5765	14.91							
CH 157	5785	14.89							
CH 161	5805	14.83							
CH 165	5825	14.97							

WLAN 5GHz 802.11n-HT20 Average Power (dBm)									
Power vs. Channel			Power vs. MCS Index						
Channel	Frequency (MHz)	Data Rate 6Mbps	9Mbps	12Mbps	18Mbps	24Mbps	36Mbps	48Mbps	54Mbps
CH 36	5180	12.73	12.66	12.72	12.56	12.81	12.54	12.79	12.62
CH 40	5200	12.72							
CH 44	5220	12.78							
CH 48	5240	12.85							
CH 52	5260	14.49	14.39	14.22	14.45	14.33	14.41	14.37	14.27
CH 56	5280	14.41							
CH 60	5300	14.47							
CH 64	5320	12.84							
CH 100	5500	11.57	14.70	14.86	14.71	14.68	14.72	14.88	14.69
CH 104	5520	14.77							
CH 108	5540	14.77							
CH 112	5560	14.93							
CH 116	5580	14.97							
CH 132	5660	14.81							
CH 136	5680	14.81							
CH 140	5700	12.22							
CH 144	5720	14.99	14.86	14.79	14.90	14.65	14.69	14.70	14.74
CH 149	5745	14.92							
CH 153	5765	14.80							
CH 157	5785	14.75							
CH 161	5805	14.55							
CH 165	5825	14.61							



WLAN 5GHz 802.11n-HT40 Average Power (dBm)									
Power vs. Channel			Power vs. MCS Index						
Channel	Frequency (MHz)	MCS Index MCS0	MCS1	MCS2	MCS3	MCS4	MCS5	MCS6	MCS7
CH 38	5190	11.20	13.92	14.01	14.00	13.98	14.14	14.08	13.94
CH 46	5230	14.23							
CH 54	5270	14.12							
CH 62	5310	12.87	13.93	13.89	13.86	14.00	13.84	13.90	14.06
CH 102	5510	12.74							
CH 110	5550	14.94							
CH 134	5670	14.73	15.38	15.27	15.25	15.27	15.14	15.37	15.38
CH 142	5710	15.40							
CH 151	5755	15.43							
CH 159	5795	15.45	15.39	15.23	15.20	15.19	15.41	15.37	15.44

WLAN 5GHz 802.11ac-VHT20 Average Power (dBm)										
Power vs. Channel			Power vs. MCS Index							
Channel	Frequency (MHz)	MCS Index MCS0	MCS1	MCS2	MCS3	MCS4	MCS5	MCS6	MCS7	MCS8
CH 36	5180	12.69	12.48	12.50	12.64	12.65	12.50	12.78	12.76	12.65
CH 40	5200	12.69								
CH 44	5220	12.76								
CH 48	5240	12.79								
CH 52	5260	14.46	14.29	14.20	14.45	14.19	14.36	14.17	14.32	14.28
CH 56	5280	14.34								
CH 60	5300	14.41								
CH 64	5320	12.77								
CH 100	5500	11.54	14.67	14.70	14.80	14.96	14.88	14.75	14.77	14.79
CH 104	5520	14.73								
CH 108	5540	14.72								
CH 112	5560	14.89								
CH 116	5580	14.93								
CH 132	5660	14.74								
CH 136	5680	14.74								
CH 140	5700	12.19								
CH 144	5720	14.98	14.74	14.89	14.90	14.81	14.92	14.66	14.91	14.67
CH 149	5745	14.95								
CH 153	5765	14.82								
CH 157	5785	14.87								
CH 161	5805	14.77								
CH 165	5825	14.92								

WLAN 5GHz 802.11ac-VHT40 Average Power (dBm)											
Power vs. Channel			Power vs. MCS Index								
Channel	Frequency (MHz)	MCS Index MCS0	MCS1	MCS2	MCS3	MCS4	MCS5	MCS6	MCS7	MCS8	MCS9
CH 38	5190	11.19	13.92	14.01	14.11	14.06	13.93	14.18	13.96	14.10	14.07
CH 46	5230	14.20									
CH 54	5270	14.05									
CH 62	5310	12.45	13.78	14.02	13.83	13.96	13.80	14.01	13.94	13.97	14.04
CH 102	5510	12.56									
CH 110	5550	14.89									
CH 134	5670	14.66	15.27	15.30	15.13	15.28	15.24	15.20	15.14	15.18	15.09
CH 142	5710	15.38									
CH 151	5755	15.23									
CH 159	5795	15.37	15.32	15.06	15.24	15.27	15.29	15.15	15.19	15.13	15.11

WLAN 5GHz 802.11ac-VHT80 Average Power (dBm)											
Power vs. Channel			Power vs. MCS Index								
Channel	Frequency (MHz)	MCS Index MCS0	MCS1	MCS2	MCS3	MCS4	MCS5	MCS6	MCS7	MCS8	MCS9
CH 42	5210	12.78	12.71	12.59	12.77	12.60	12.70	12.49	12.73	12.53	12.71
CH 58	5290	12.83	12.66	12.81	12.82	12.62	12.76	12.80	12.58	12.55	12.64
CH 106	5530	12.87	15.29	15.25	15.22	15.28	15.31	15.34	15.31	15.28	15.27
CH 138	5690	15.39									
CH 155	5775	15.07	14.79	14.93	14.87	15.00	14.77	14.78	14.82	14.80	14.93

<Bluetooth Power>

Mode Band	Average power(dBm)	
	Bluetooth v3.0+EDR	Bluetooth v4.0+LE
2.4GHz Bluetooth	5.0	4.0

Note:

- Per KDB 447498 D01v05r02, the 1-g and 10-g SAR test exclusion thresholds for 100 MHz to 6 GHz at *test separation distances* ≤ 50 mm are determined by:


$$[(\text{max. power of channel, including tune-up tolerance, mW})/(\text{min. test separation distance, mm})] \cdot [\sqrt{f(\text{GHz})}] \leq 3.0$$
for 1-g SAR and ≤ 7.5 for 10-g extremity SAR
 - f(GHz) is the RF channel transmit frequency in GHz
 - Power and distance are rounded to the nearest mW and mm before calculation
 - The result is rounded to one decimal place for comparison

Bluetooth Max Power (dBm)	Separation Distance (mm)	Frequency (GHz)	exclusion thresholds
5.0	< 5	2.48	0.94

Note:

Per KDB 447498 D01v05r02, when the minimum test separation distance is < 5 mm, a distance of 5 mm is applied to determine SAR test exclusion. The test exclusion threshold is 0.94 which is ≤ 3 , SAR testing is not required.

13. Antenna Location

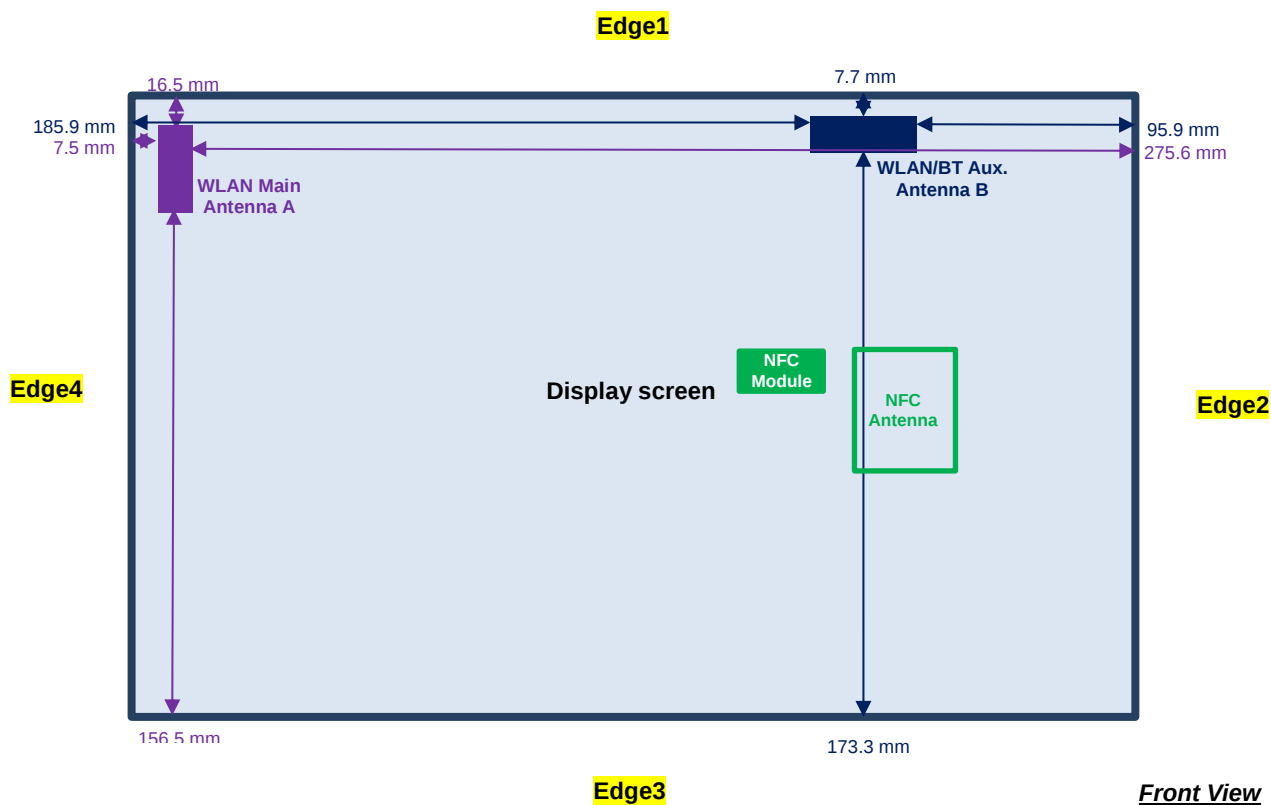



<SAR test exclusion table>

General Note:

1. The below table, when the distance is < 50 mm exclusion threshold is "Ratio", when the distance is > 50 mm exclusion threshold is "mW"
2. Maximum power is the source-based time-average power and represents the maximum RF output power among production units
3. Per KDB 447498 D01v05r02, for larger devices, the test separation distance of adjacent edge configuration is determined by the closest separation between the antenna and the user.
4. Per KDB 447498 D01v05r02, standalone SAR test exclusion threshold is applied; If the test separation distance is < 5mm, 5mm is used to determine SAR exclusion threshold.
5. Per KDB 447498 D01v05r02, the 1-g and 10-g SAR test exclusion thresholds for 100 MHz to 6 GHz at *test separation distances* ≤ 50 mm are determined by:

$$[(\text{max. power of channel, including tune-up tolerance, mW})/(\text{min. test separation distance, mm})] \cdot [\sqrt{f(\text{GHz})}] \leq 3.0 \text{ for 1-g SAR and } \leq 7.5 \text{ for 10-g extremity SAR}$$
 - f(GHz) is the RF channel transmit frequency in GHz
 - Power and distance are rounded to the nearest mW and mm before calculation
 - The result is rounded to one decimal place for comparison
6. Per KDB 447498 D01v05r02, at 100 MHz to 6 GHz and for *test separation distances* > 50 mm, the SAR test exclusion threshold is determined according to the following
 - a) [Threshold at 50 mm in step 1) + (test separation distance - 50 mm) · (f(MHz)/150)] mW, at 100 MHz to 1500 MHz
 - b) [Threshold at 50 mm in step 1) + (test separation distance - 50 mm) · 10] mW at > 1500 MHz and ≤ 6 GHz

Exposure Position	Wireless Interface	802.11g Ant A	802.11g Ant B	802.11a Ant A	802.11a Ant B
	Calculated Frequency	2462MHz	2462MHz	5825MHz	5825MHz
	Maximum power (dBm)	15	15	15	15
	Maximum rated power(mW)	32.0	32.0	32.0	32.0
Bottom Face	Separation distance(mm)	5.0	5.0	5.0	5.0
	exclusion threshold	10.0	10.0	15.5	15.5
	Testing required?	Yes	Yes	Yes	Yes
Edge 1	Separation distance(mm)	16.5	7.7	16.5	7.7
	exclusion threshold	3.0	6.5	4.7	10.0
	Testing required?	Yes	Yes	Yes	Yes
Edge 2	Separation distance(mm)	275.6	95.9	275.6	95.9
	exclusion threshold	2352.0	555.0	2318.0	521.0
	Testing required?	No	No	No	No
Edge 3	Separation distance(mm)	156.5	173.3	156.5	173.3
	exclusion threshold	1161.0	1329.0	1127.0	1295.0
	Testing required?	No	No	No	No
Edge 4	Separation distance(mm)	7.5	185.9	7.5	185.9
	exclusion threshold	6.7	1455.0	10.3	1421.0
	Testing required?	Yes	No	Yes	No



14. SAR Test Results

General Note:

- Per KDB 447498 D01v05r02, the reported SAR is the measured SAR value adjusted for maximum tune-up tolerance.
 - Tune-up scaling Factor = tune-up limit power (mW) / EUT RF power (mW), where tune-up limit is the maximum rated power among all production units.
 - For SAR testing of WLAN signal with non-100% duty cycle, the measured SAR is scaled-up by the duty cycle scaling factor which is equal to "1/(duty cycle)"
 - For WLAN: Reported SAR(W/kg)= Measured SAR(W/kg)* Duty Cycle scaling factor * Tune-up scaling factor
- Per KDB 447498 D01v05r02, for each exposure position, testing of other required channels within the operating mode of a frequency band is not required when the *reported* 1-g or 10-g SAR for the mid-band or highest output power channel is:
 - ≤ 0.8 W/kg or 2.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≤ 100 MHz
 - ≤ 0.6 W/kg or 1.5 W/kg, for 1-g or 10-g respectively, when the transmission band is between 100 MHz and 200 MHz
 - ≤ 0.4 W/kg or 1.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≥ 200 MHz
- During SAR testing the WLAN transmission was verified using a spectrum analyzer.

14.1 Body SAR

<WLAN SAR>

Plot No.	Band	Mode	Test Position	Gap (mm)	Antenna	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	WLAN2.4GHz	802.11b 1Mbps	Bottom Face	0mm	A	6	2437	14.48	14.50	1.006	98.96	1.011	-0.03	0.585	0.595
	WLAN2.4GHz	802.11g 6Mbps	Bottom Face	0mm	A	6	2437	14.94	15.00	1.013	98.57	1.015	-0.01	0.852	0.876
	WLAN2.4GHz	802.11g 6Mbps	Bottom Face	0mm	A	1	2412	12.44	12.50	1.013	98.57	1.015	-0.12	0.411	0.423
	WLAN2.4GHz	802.11g 6Mbps	Bottom Face	0mm	A	11	2462	10.66	11.00	1.081	98.57	1.015	-0.06	0.389	0.427
	WLAN2.4GHz	802.11n-HT20 MCS0	Bottom Face	0mm	A	6	2437	14.80	15.00	1.048	98.46	1.016	-0.04	0.831	0.885
	WLAN2.4GHz	802.11n-HT20 MCS0	Bottom Face	0mm	A	1	2412	12.43	12.50	1.017	98.46	1.016	0.01	0.396	0.409
	WLAN2.4GHz	802.11n-HT20 MCS0	Bottom Face	0mm	A	11	2462	10.92	11.00	1.019	98.46	1.016	0.03	0.372	0.385
1	WLAN2.4GHz	802.11n-HT40 MCS0	Bottom Face	0mm	A	6	2437	14.78	15.00	1.053	96.93	1.032	-0.02	0.953	1.036
	WLAN2.4GHz	802.11n-HT40 MCS0	Bottom Face	0mm	A	3	2422	11.60	12.00	1.098	96.93	1.032	-0.06	0.389	0.441
	WLAN2.4GHz	802.11n-HT40 MCS0	Bottom Face	0mm	A	9	2452	10.58	11.00	1.103	96.93	1.032	-0.04	0.363	0.413
	WLAN2.4GHz	802.11b 1Mbps	Edge 1	0mm	A	6	2437	14.48	14.50	1.006	98.96	1.011	-0.14	0.037	0.038
	WLAN2.4GHz	802.11b 1Mbps	Edge 4	0mm	A	6	2437	14.48	14.50	1.006	98.96	1.011	-0.15	0.124	0.126
	WLAN2.4GHz	802.11b 1Mbps	Bottom Face	0mm	B	6	2437	14.44	14.50	1.015	98.96	1.011	0	0.275	0.282
	WLAN2.4GHz	802.11g 6Mbps	Bottom Face	0mm	B	6	2437	14.72	15.00	1.066	98.57	1.015	0.06	0.312	0.338
	WLAN2.4GHz	802.11n-HT20 MCS0	Bottom Face	0mm	B	6	2437	14.92	15.00	1.017	98.97	1.010	-0.12	0.301	0.309
	WLAN2.4GHz	802.11n-HT40 MCS0	Bottom Face	0mm	B	6	2437	14.70	15.00	1.073	96.93	1.032	-0.07	0.370	0.410
	WLAN2.4GHz	802.11b 1Mbps	Edge 1	0mm	B	6	2437	14.44	14.50	1.015	98.96	1.011	-0.13	0.158	0.162



Plot No.	Band	Mode	Test Position	Gap (mm)	Antenna	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	WLAN5GHz	802.11a 6Mbps	Bottom Face	0mm	A	44	5220	13.48	13.50	1.004	98.57	1.015	0.18	0.083	0.085
	WLAN5GHz	802.11n-HT40 MCS0	Bottom Face	0mm	A	46	5230	13.29	13.50	1.051	96.93	1.032	-0.04	0.088	0.095
	WLAN5GHz	802.11ac-VHT20 MCS0	Bottom Face	0mm	A	48	5240	13.47	13.50	1.008	98.47	1.016	-0.05	0.082	0.084
	WLAN5GHz	802.11ac-VHT40 MCS0	Bottom Face	0mm	A	46	5230	13.26	13.50	1.056	96.95	1.031	-0.11	0.078	0.085
	WLAN5GHz	802.11ac-VHT80 MCS0	Bottom Face	0mm	A	42	5210	11.90	12.00	1.024	94.07	1.063	-0.11	0.062	0.068
	WLAN5GHz	802.11a 6Mbps	Edge 1	0mm	A	44	5220	13.48	13.50	1.004	98.57	1.015	-0.11	0.040	0.041
	WLAN5GHz	802.11a 6Mbps	Edge 4	0mm	A	44	5220	13.48	13.50	1.004	98.57	1.015	0.01	0.071	0.072
	WLAN5GHz	802.11a 6Mbps	Bottom Face	0mm	B	48	5240	13.46	13.50	1.009	98.57	1.015	-0.07	0.128	0.131
	WLAN5GHz	802.11a 6Mbps	Edge 1	0mm	B	48	5240	13.46	13.50	1.009	98.57	1.015	-0.09	0.233	0.239
	WLAN5GHz	802.11n-HT40 MCS0	Edge 1	0mm	B	46	5230	13.41	13.50	1.022	96.93	1.032	-0.18	0.216	0.228
	WLAN5GHz	802.11ac-VHT20 MCS0	Edge 1	0mm	B	40	5200	13.43	13.50	1.017	94.98	1.053	-0.09	0.222	0.238
2	WLAN5GHz	802.11ac-VHT40 MCS0	Edge 1	0mm	B	46	5230	13.34	13.50	1.038	97.56	1.025	-0.07	0.292	0.311
	WLAN5GHz	802.11ac-VHT40 MCS0	Edge 1	0mm	B	38	5190	11.77	12.00	1.055	97.56	1.025	-0.06	0.127	0.137
	WLAN5GHz	802.11ac-VHT80 MCS0	Edge 1	0mm	B	42	5210	11.68	12.00	1.078	94.07	1.063	-0.14	0.175	0.200
	WLAN5GHz	802.11a 6Mbps	Bottom Face	0mm	A	52	5260	13.22	13.50	1.066	98.57	1.015	0.04	0.058	0.063
	WLAN5GHz	802.11a 6Mbps	Edge 1	0mm	A	52	5260	13.22	13.50	1.066	98.57	1.015	-0.05	0.043	0.047
	WLAN5GHz	802.11a 6Mbps	Edge 4	0mm	A	52	5260	13.22	13.50	1.066	98.57	1.015	0.12	0.093	0.101
	WLAN5GHz	802.11n-HT40 MCS0	Edge 4	0mm	A	54	5270	13.21	13.50	1.070	96.93	1.032	0	0.076	0.084
	WLAN5GHz	802.11ac-VHT20 MCS0	Edge 4	0mm	A	56	5280	13.13	13.50	1.090	98.47	1.016	-0.12	0.077	0.085
	WLAN5GHz	802.11ac-VHT40 MCS0	Edge 4	0mm	A	54	5270	13.12	13.50	1.090	96.95	1.031	-0.13	0.071	0.080
	WLAN5GHz	802.11ac-VHT80 MCS0	Edge 4	0mm	A	58	5290	11.95	12.00	1.013	94.07	1.063	-0.11	0.047	0.051
	WLAN5GHz	802.11a 6Mbps	Bottom Face	0mm	B	52	5260	13.33	13.50	1.039	98.57	1.015	0.15	0.116	0.122
	WLAN5GHz	802.11a 6Mbps	Edge 1	0mm	B	52	5260	13.33	13.50	1.039	98.57	1.015	-0.16	0.324	0.342
	WLAN5GHz	802.11n-HT40 MCS0	Edge 1	0mm	B	54	5270	13.45	13.50	1.013	96.93	1.032	-0.1	0.403	0.421
	WLAN5GHz	802.11ac-VHT20 MCS0	Edge 1	0mm	B	56	5280	13.42	13.50	1.019	94.98	1.053	-0.12	0.474	0.509
3	WLAN5GHz	802.11ac-VHT20 MCS0	Edge 1	0mm	B	60	5300	13.42	13.50	1.019	94.98	1.053	-0.08	0.589	0.632
	WLAN5GHz	802.11ac-VHT40 MCS0	Edge 1	0mm	B	54	5270	13.25	13.50	1.060	97.56	1.025	-0.11	0.346	0.376
	WLAN5GHz	802.11ac-VHT80 MCS0	Edge 1	0mm	B	58	5290	11.93	12.00	1.017	94.07	1.063	-0.13	0.281	0.304
	WLAN5GHz	802.11a 6Mbps	Bottom Face	0mm	A	116	5580	13.49	13.50	1.002	98.57	1.015	0.13	0.158	0.161
	WLAN5GHz	802.11n-HT40 MCS0	Bottom Face	0mm	A	110	5550	13.49	13.50	1.003	96.93	1.032	-0.19	0.154	0.159
	WLAN5GHz	802.11ac-VHT80 MCS0	Bottom Face	0mm	A	138	5690	13.42	13.50	1.018	94.07	1.063	-0.1	0.192	0.208
	WLAN5GHz	802.11a 6Mbps	Edge 1	0mm	A	116	5580	13.49	13.50	1.002	98.57	1.015	-0.15	0.059	0.060
	WLAN5GHz	802.11a 6Mbps	Edge 4	0mm	A	116	5580	13.49	13.50	1.002	98.57	1.015	-0.19	0.110	0.112
	WLAN5GHz	802.11a 6Mbps	Bottom Face	0mm	B	116	5580	13.45	13.50	1.011	98.57	1.015	0.15	0.183	0.188
	WLAN5GHz	802.11a 6Mbps	Edge 1	0mm	B	116	5580	13.45	13.50	1.011	98.57	1.015	-0.12	0.310	0.318
4	WLAN5GHz	802.11n-HT40 MCS0	Edge 1	0mm	B	110	5550	13.49	13.50	1.003	96.93	1.032	0.09	0.334	0.346
	WLAN5GHz	802.11n-HT40 MCS0	Edge 1	0mm	B	102	5510	12.46	12.50	1.010	96.93	1.032	-0.13	0.188	0.196
	WLAN5GHz	802.11n-HT40 MCS0	Edge 1	0mm	B	134	5670	13.36	13.50	1.034	96.93	1.032	-0.16	0.269	0.287
	WLAN5GHz	802.11n-HT40 MCS0	Edge 1	0mm	B	142	5710	13.35	13.50	1.035	96.93	1.032	-0.13	0.279	0.298
	WLAN5GHz	802.11ac-VHT80 MCS0	Edge 1	0mm	B	138	5690	13.13	13.50	1.089	94.07	1.063	-0.09	0.263	0.305
	WLAN5GHz	802.11a 6Mbps	Bottom Face	0mm	A	149	5745	13.43	13.50	1.016	98.57	1.015	-0.13	0.260	0.268
	WLAN5GHz	802.11a 6Mbps	Edge 1	0mm	A	149	5745	13.43	13.50	1.016	98.57	1.015	-0.18	0.188	0.194
5	WLAN5GHz	802.11a 6Mbps	Edge 4	0mm	A	149	5745	13.43	13.50	1.016	98.57	1.015	-0.07	0.272	0.280
	WLAN5GHz	802.11a 6Mbps	Edge 4	0mm	A	157	5785	13.27	13.50	1.054	98.57	1.015	-0.1	0.199	0.213
	WLAN5GHz	802.11a 6Mbps	Edge 4	0mm	A	165	5825	13.22	13.50	1.066	98.57	1.015	-0.12	0.188	0.203
	WLAN5GHz	802.11n-HT40 MCS0	Edge 4	0mm	A	159	5795	13.25	13.50	1.060	96.93	1.032	-0.16	0.129	0.141
	WLAN5GHz	802.11ac-VHT80 MCS0	Edge 4	0mm	A	155	5775	13.41	13.50	1.022	94.07	1.063	-0.14	0.194	0.211
	WLAN5GHz	802.11a 6Mbps	Bottom Face	0mm	B	165	5825	13.39	13.50	1.025	98.57	1.015	0.14	0.107	0.111
	WLAN5GHz	802.11a 6Mbps	Edge 1	0mm	B	165	5825	13.39	13.50	1.025	98.57	1.015	-0.19	0.180	0.187
	WLAN5GHz	802.11n-HT40 MCS0	Edge 1	0mm	B	151	5755	13.15	13.50	1.085	96.93	1.032	-0.15	0.112	0.125
	WLAN5GHz	802.11ac-VHT80 MCS0	Edge 1	0mm	B	155	5775	13.28	13.50	1.053	94.07	1.063	-0.12	0.124	0.139

14.2 Repeated SAR Measurement

No.	Band	Mode	Test Position	Gap (mm)	Antenna	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Ratio	Reported 1g SAR (W/kg)
1st	WLAN2.4GHz	802.11n-HT40 MCS0	Bottom Face	0mm	A	6	2437	14.78	15.00	1.053	96.93	1.032	-0.02	0.953	-	1.036
2nd	WLAN2.4GHz	802.11n-HT40 MCS0	Bottom Face	0mm	A	6	2437	14.78	15.00	1.053	96.93	1.032	-0.09	0.913	1.04	0.992

General Note:

- Per KDB 865664 D01v01r03, for each frequency band, repeated SAR measurement is required only when the measured SAR is ≥ 0.8 W/kg.
- Per KDB 865664 D01v01r03, if the ratio among the repeated measurement is ≤ 1.2 and the measured SAR < 1.45 W/kg, only one repeated measurement is required.
- The ratio is the difference in percentage between original and repeated *measured SAR*.
- All measurement SAR result is scaled-up to account for tune-up tolerance and is compliant.

15. Simultaneous Transmission Analysis

NO.	Simultaneous Transmission Configurations	Supported
1.	WLAN Antenna A + WLAN Antenna B	Yes
2.	WLAN Antenna A + Bluetooth Antenna B	Yes

General Note:

- WLAN RF exposure assessment of MIMO mode simultaneous transmission exclusion analysis was performed with SAR test results of each antenna in SISO mode. Therefore SPLSR calculation was choose worst case with SAR test results of each antenna in SISO mode perform evaluation.
- WLAN and Bluetooth share the same antenna, and cannot transmit simultaneously.
- EUT will choose either WLAN 2.4GHz or WLAN 5GHz according to the network signal condition; therefore, 2.4GHz WLAN and 5GHz WLAN will not operate simultaneously at any moment.
- The Scaled SAR summation is calculated based on the same configuration and test position.
- Per KDB 447498 D01v05r02, simultaneous transmission SAR is compliant if,
 - Scalar SAR summation < 1.6 W/kg.
 - $SPLSR = (SAR1 + SAR2)^{1.5} / (\text{min. separation distance, mm})$, and the peak separation distance is determined from the square root of $[(x1-x2)^2 + (y1-y2)^2 + (z1-z2)^2]$, where $(x1, y1, z1)$ and $(x2, y2, z2)$ are the coordinates of the extrapolated peak SAR locations in the zoom scan.
 - If $SPLSR \leq 0.04$, simultaneously transmission SAR measurement is not necessary.
 - Simultaneously transmission SAR measurement, and the reported multi-band SAR < 1.6 W/kg.
- For simultaneous transmission analysis, Bluetooth SAR is estimated per KDB 447498 D01v05r02 based on the formula below.
 - $(\text{max. power of channel, including tune-up tolerance, mW}) / (\text{min. test separation distance, mm}) \cdot [\sqrt{f(\text{GHz})} / x] \text{ W/kg}$ for test separation distances ≤ 50 mm; where $x = 7.5$ for 1-g SAR, and $x = 18.75$ for 10-g SAR.
 - When the minimum separation distance is < 5 mm, the distance is used 5mm to determine SAR test exclusion.
 - 0.4 W/kg for 1-g SAR and 1.0 W/kg for 10-g SAR, when the test separation distances is > 50 mm.
 - Bluetooth estimated SAR is conservatively determined by 5mm separation, for all applicable exposure positions.

Bluetooth Max Power	Exposure Position	All Positions
5 dBm	Estimated SAR (W/kg)	0.126 W/kg

15.1 Body Exposure Conditions

Band	Exposure Position	1	2	3	1+2 Summed SAR (W/kg)	1+3 Summed SAR (W/kg)
		WLAN Ant A	WLAN Ant B	2.4GHz Bluetooth		
		SAR (W/kg)	SAR (W/kg)	Estimated SAR (W/kg)		
2.4GHz WLAN	Bottom Face	1.036	0.410	0.126	1.45	1.16
	Edge 1	0.038	0.162	0.126	0.20	0.16
	Edge 4	0.126		0.126	0.13	0.25
5.2GHz WLAN	Bottom Face	0.095	0.131	0.126	0.23	0.22
	Edge 1	0.041	0.311	0.126	0.35	0.17
	Edge 4	0.072		0.126	0.07	0.20
5.3GHz WLAN	Bottom Face	0.063	0.122	0.126	0.19	0.19
	Edge 1	0.047	0.632	0.126	0.68	0.17
	Edge 4	0.101		0.126	0.10	0.23
5.5GHz WLAN	Bottom Face	0.208	0.188	0.126	0.40	0.33
	Edge 1	0.060	0.346	0.126	0.41	0.19
	Edge 4	0.112		0.126	0.11	0.24
5.8GHz WLAN	Bottom Face	0.268	0.111	0.126	0.38	0.39
	Edge 1	0.194	0.187	0.126	0.38	0.32
	Edge 4	0.280		0.126	0.28	0.41

Test Engineer : Angelo Chang, Bevis Chang, Frank Wu, Galen Zhang, and Poa Pan

16. Uncertainty Assessment

The component of uncertainty may generally be categorized according to the methods used to evaluate them. The evaluation of uncertainty by the statistical analysis of a series of observations is termed a Type A evaluation of uncertainty. The evaluation of uncertainty by means other than the statistical analysis of a series of observation is termed a Type B evaluation of uncertainty. Each component of uncertainty, however evaluated, is represented by an estimated standard deviation, termed standard uncertainty, which is determined by the positive square root of the estimated variance.

A Type A evaluation of standard uncertainty may be based on any valid statistical method for treating data. This includes calculating the standard deviation of the mean of a series of independent observations; using the method of least squares to fit a curve to the data in order to estimate the parameter of the curve and their standard deviations; or carrying out an analysis of variance in order to identify and quantify random effects in certain kinds of measurement.

A type B evaluation of standard uncertainty is typically based on scientific judgment using all of the relevant information available. These may include previous measurement data, experience, and knowledge of the behavior and properties of relevant materials and instruments, manufacture's specification, data provided in calibration reports and uncertainties assigned to reference data taken from handbooks. Broadly speaking, the uncertainty is either obtained from an outdoor source or obtained from an assumed distribution, such as the normal distribution, rectangular or triangular distributions indicated in table below.

Uncertainty Distributions	Normal	Rectangular	Triangular	U-Shape
Multi-plying Factor ^(a)	$1/k^{(b)}$	$1/\sqrt{3}$	$1/\sqrt{6}$	$1/\sqrt{2}$

(a) standard uncertainty is determined as the product of the multiplying factor and the estimated range of variations in the measured quantity

(b) k is the coverage factor

Table 16.1. Standard Uncertainty for Assumed Distribution

The combined standard uncertainty of the measurement result represents the estimated standard deviation of the result. It is obtained by combining the individual standard uncertainties of both Type A and Type B evaluation using the usual "root-sum-squares" (RSS) methods of combining standard deviations by taking the positive square root of the estimated variances.

Expanded uncertainty is a measure of uncertainty that defines an interval about the measurement result within which the measured value is confidently believed to lie. It is obtained by multiplying the combined standard uncertainty by a coverage factor. Typically, the coverage factor ranges from 2 to 3. Using a coverage factor allows the true value of a measured quantity to be specified with a defined probability within the specified uncertainty range. For purpose of this document, a coverage factor two is used, which corresponds to confidence interval of about 95 %. The DASY uncertainty Budget is shown in the following tables.

Error Description	Uncertainty Value (±%)	Probability Distribution	Divisor	Ci (1g)	Ci (10g)	Standard Uncertainty (1g)	Standard Uncertainty (10g)
Measurement System							
Probe Calibration	6.0	Normal	1	1	1	± 6.0 %	± 6.0 %
Axial Isotropy	4.7	Rectangular	√3	0.7	0.7	± 1.9 %	± 1.9 %
Hemispherical Isotropy	9.6	Rectangular	√3	0.7	0.7	± 3.9 %	± 3.9 %
Boundary Effects	1.0	Rectangular	√3	1	1	± 0.6 %	± 0.6 %
Linearity	4.7	Rectangular	√3	1	1	± 2.7 %	± 2.7 %
System Detection Limits	1.0	Rectangular	√3	1	1	± 0.6 %	± 0.6 %
Readout Electronics	0.3	Normal	1	1	1	± 0.3 %	± 0.3 %
Response Time	0.8	Rectangular	√3	1	1	± 0.5 %	± 0.5 %
Integration Time	2.6	Rectangular	√3	1	1	± 1.5 %	± 1.5 %
RF Ambient Noise	3.0	Rectangular	√3	1	1	± 1.7 %	± 1.7 %
RF Ambient Reflections	3.0	Rectangular	√3	1	1	± 1.7 %	± 1.7 %
Probe Positioner	0.4	Rectangular	√3	1	1	± 0.2 %	± 0.2 %
Probe Positioning	2.9	Rectangular	√3	1	1	± 1.7 %	± 1.7 %
Max. SAR Eval.	1.0	Rectangular	√3	1	1	± 0.6 %	± 0.6 %
Test Sample Related							
Device Positioning	2.9	Normal	1	1	1	± 2.9 %	± 2.9 %
Device Holder	3.6	Normal	1	1	1	± 3.6 %	± 3.6 %
Power Drift	5.0	Rectangular	√3	1	1	± 2.9 %	± 2.9 %
Phantom and Setup							
Phantom Uncertainty	4.0	Rectangular	√3	1	1	± 2.3 %	± 2.3 %
Liquid Conductivity (Target)	5.0	Rectangular	√3	0.64	0.43	± 1.8 %	± 1.2 %
Liquid Conductivity (Meas.)	2.5	Normal	1	0.64	0.43	± 1.6 %	± 1.1 %
Liquid Permittivity (Target)	5.0	Rectangular	√3	0.6	0.49	± 1.7 %	± 1.4 %
Liquid Permittivity (Meas.)	2.5	Normal	1	0.6	0.49	± 1.5 %	± 1.2 %
Combined Standard Uncertainty						± 11.0 %	± 10.8 %
Coverage Factor for 95 %						K=2	
Expanded Uncertainty						± 22.0 %	± 21.5 %

Table 16.2. Uncertainty Budget for frequency range 300 MHz to 3 GHz

Error Description	Uncertainty Value (±%)	Probability Distribution	Divisor	Ci (1g)	Ci (10g)	Standard Uncertainty (1g)	Standard Uncertainty (10g)
Measurement System							
Probe Calibration	6.55	Normal	1	1	1	± 6.55 %	± 6.55 %
Axial Isotropy	4.7	Rectangular	$\sqrt{3}$	0.7	0.7	± 1.9 %	± 1.9 %
Hemispherical Isotropy	9.6	Rectangular	$\sqrt{3}$	0.7	0.7	± 3.9 %	± 3.9 %
Boundary Effects	2.0	Rectangular	$\sqrt{3}$	1	1	± 1.2 %	± 1.2 %
Linearity	4.7	Rectangular	$\sqrt{3}$	1	1	± 2.7 %	± 2.7 %
System Detection Limits	1.0	Rectangular	$\sqrt{3}$	1	1	± 0.6 %	± 0.6 %
Readout Electronics	0.3	Normal	1	1	1	± 0.3 %	± 0.3 %
Response Time	0.8	Rectangular	$\sqrt{3}$	1	1	± 0.5 %	± 0.5 %
Integration Time	2.6	Rectangular	$\sqrt{3}$	1	1	± 1.5 %	± 1.5 %
RF Ambient Noise	3.0	Rectangular	$\sqrt{3}$	1	1	± 1.7 %	± 1.7 %
RF Ambient Reflections	3.0	Rectangular	$\sqrt{3}$	1	1	± 1.7 %	± 1.7 %
Probe Positioner	0.8	Rectangular	$\sqrt{3}$	1	1	± 0.5 %	± 0.5 %
Probe Positioning	9.9	Rectangular	$\sqrt{3}$	1	1	± 5.7 %	± 5.7 %
Max. SAR Eval.	4.0	Rectangular	$\sqrt{3}$	1	1	± 2.3 %	± 2.3 %
Test Sample Related							
Device Positioning	2.9	Normal	1	1	1	± 2.9 %	± 2.9 %
Device Holder	3.6	Normal	1	1	1	± 3.6 %	± 3.6 %
Power Drift	5.0	Rectangular	$\sqrt{3}$	1	1	± 2.9 %	± 2.9 %
Phantom and Setup							
Phantom Uncertainty	4.0	Rectangular	$\sqrt{3}$	1	1	± 2.3 %	± 2.3 %
Liquid Conductivity (Target)	5.0	Rectangular	$\sqrt{3}$	0.64	0.43	± 1.8 %	± 1.2 %
Liquid Conductivity (Meas.)	2.5	Normal	1	0.64	0.43	± 1.6 %	± 1.1 %
Liquid Permittivity (Target)	5.0	Rectangular	$\sqrt{3}$	0.6	0.49	± 1.7 %	± 1.4 %
Liquid Permittivity (Meas.)	2.5	Normal	1	0.6	0.49	± 1.5 %	± 1.2 %
Combined Standard Uncertainty						± 12.8 %	± 12.6 %
Coverage Factor for 95 %						K=2	
Expanded Uncertainty						± 25.6 %	± 25.2 %

Table 16.3. Uncertainty Budget for frequency range 3 GHz to 6 GHz

17. References

- [1] FCC 47 CFR Part 2 "Frequency Allocations and Radio Treaty Matters; General Rules and Regulations"
- [2] ANSI/IEEE Std. C95.1-1992, "IEEE Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz", September 1992
- [3] IEEE Std. 1528-2003, "Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", December 2003
- [4] SPEAG DASY System Handbook
- [5] FCC KDB 248227 D01 v01r02, "SAR Measurement Procedures for 802.11 a/b/g Transmitters", May 2007
- [6] FCC KDB 447498 D01 v05r02, "Mobile and Portable Device RF Exposure Procedures and Equipment Authorization Policies", Feb 2014
- [7] FCC KDB 616217 D04 v01r01, "SAR Evaluation Considerations for Laptop, Notebook, Netbook and Tablet Computers", May 2013
- [8] FCC KDB 865664 D01 v01r03, "SAR Measurement Requirements for 100 MHz to 6 GHz", Feb 2014.
- [9] FCC KDB 865664 D02 v01r01, "RF Exposure Compliance Reporting and Documentation Considerations" May 2013.