

APPENDIX B PLOTS OF THE SAR MEASUREMENTS

Plots of the measured SAR distributions inside the phantom are given in this Appendix for all tested configurations.



Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

Test Lab: EMCTech

Test File: M150814 2450 MHz WLAN FCC.da52:0

DUT Name: Fujitsu Tablet with 11 abgn/ac WLAN, Type: 8260NGW, Serial: WFM (MAC):A4:34:D9:09:92:96**Configuration: Body Bystander ANT 1 (DSSS) 24-Aug-2015**

Communication System: 0 - DSSS 2450 MHz 1Mbps; Communication System Band: ISM 2.4 GHz; Frequency: 2442 MHz, Communication System PAR: 0.00 dB; PMF: 1.00; Duty Cycle: 1:1.00
 Medium Parameters used: $f=2442$ MHz; $\sigma = 1.94$ S/m; $\epsilon_r = 52.0$; $\rho = 1000.0$ g/cm³
 Phantom section: Flat Section

DASY Configuration:


Probe: ET3DV6 - SN1380; ConvF: (4.1,4.1,4.1); Calibrated: 11/12/2014;
 Sensor-Surface: 4 mm (Mechanical Surface Detection)
 Electronics: DAE3 Sn442; Calibrated: 3/12/2014
 Phantom: ELI v4.0 (30deg probe tilt); Type: QDOVA001BB; Serial: TP:1101
 DASY52 52.8.8(1222); SEMCAD X Version 14.6.10 (7331)

Body Bystander ANT 1 (DSSS) 24-Aug-2015/Channel 7 Test/Area Scan (51x71x1): Interpolated grid: dx=1.2 mm, dy=1.2 mm; Maximum value of SAR (interpolated) = 0.021 W/kg

Body Bystander ANT 1 (DSSS) 24-Aug-2015/Channel 7 Test/Zoom Scan (31x31x36)/Cube 0: Interpolated grid: dx=1.0 mm, dy=1.0 mm, dz=1.0 mm; Reference Value = 2.609 V/m; **Power Drift = -0.21 dB**

Averaged SAR: SAR(1g) = 0.021 W/kg; SAR(10g) = 0.012 W/kg

Maximum value of SAR (interpolated) = 0.052 W/kg

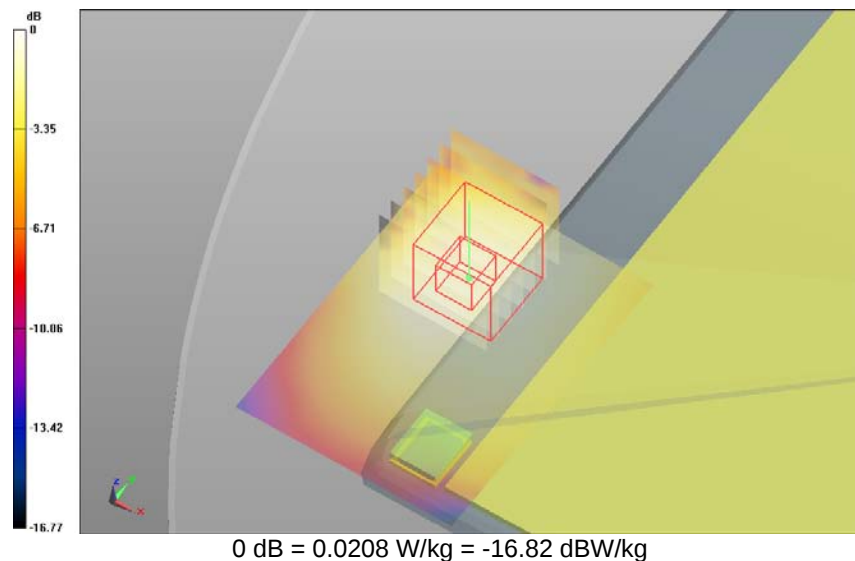


SAR Measurement Plot 1



Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

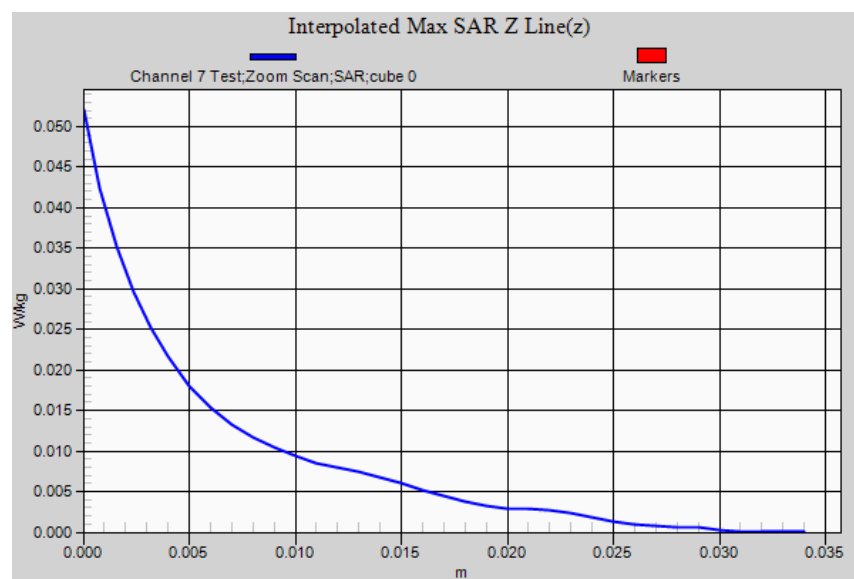

Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

Test Lab: EMCTech

Test File: M150814 2450 MHz WLAN FCC.da52:1

DUT Name: Fujitsu Tablet with 11 abgn/ac WLAN, Type: 8260NGW, Serial: WFM (MAC):A4:34:D9:09:92:96**Configuration: Body Bystander ANT 2 (DSSS) 24-Aug-2015**

Communication System: 0 - DSSS 2450 MHz 1Mbps; Communication System Band: ISM 2.4 GHz; Frequency: 2442 MHz, Communication System PAR: 0.00 dB; PMF: 1.00; Duty Cycle: 1:1.00
 Medium Parameters used: $f=2442$ MHz; $\sigma = 1.94$ S/m; $\epsilon_r = 52.0$; $\rho = 1000.0$ g/cm³
 Phantom section: Flat Section

DASY Configuration:


Probe: ET3DV6 - SN1380; ConvF: (4.1,4.1,4.1); Calibrated: 11/12/2014;
 Sensor-Surface: 4 mm (Mechanical Surface Detection)
 Electronics: DAE3 Sn442; Calibrated: 3/12/2014
 Phantom: ELI v4.0 (30deg probe tilt); Type: QDOVA001BB; Serial: TP:1101
 DASY52 52.8.8(1222); SEMCAD X Version 14.6.10 (7331)

Body Bystander ANT 2 (DSSS) 24-Aug-2015/Channel 7 Test/Area Scan (51x71x1): Interpolated grid: dx=1.2 mm, dy=1.2 mm; Maximum value of SAR (interpolated) = 0.013 W/kg

Body Bystander ANT 2 (DSSS) 24-Aug-2015/Channel 7 Test/Zoom Scan (31x31x36)/Cube 0: Interpolated grid: dx=1.0 mm, dy=1.0 mm, dz=1.0 mm; Reference Value = 2.276 V/m; **Power Drift = 0.09 dB**

Averaged SAR: SAR(1g) = 0.013 W/kg; SAR(10g) = 0.007 W/kg

Maximum value of SAR (interpolated) = 0.031 W/kg

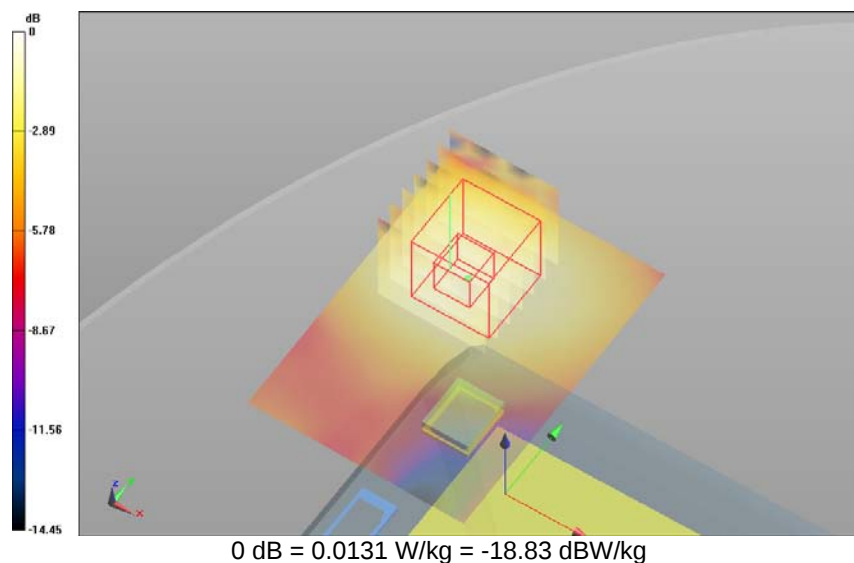


SAR Measurement Plot 2



Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

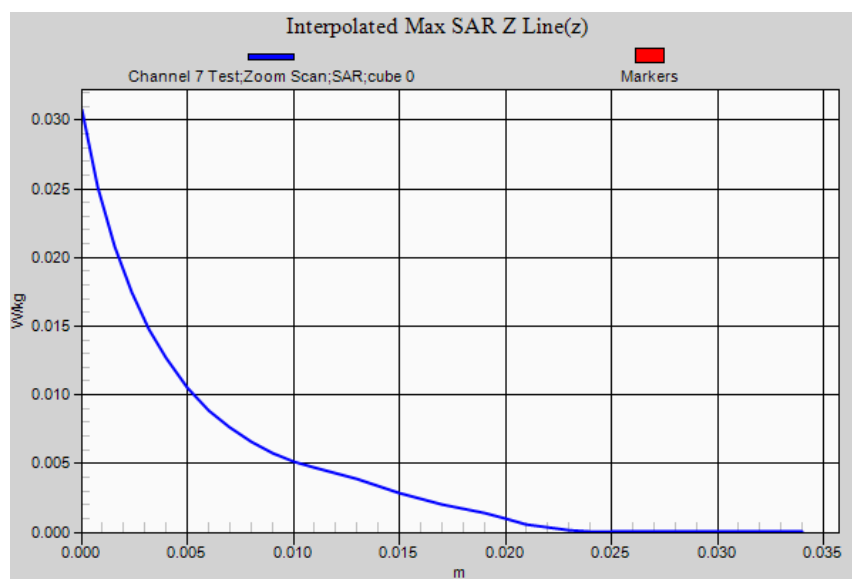

Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

Test Lab: EMCTech

Test File: M150814 2450 MHz WLAN FCC.da52:2

DUT Name: Fujitsu Tablet with 11 abgn/ac WLAN, Type: 8260NGW, Serial: WFM (MAC):A4:34:D9:09:92:96**Configuration: Body Lap Held ANT 1 (DSSS) 24-Aug-2015**

Communication System: 0 - DSSS 2450 MHz 1Mbps; Communication System Band: ISM 2.4 GHz; Frequency: 2412 MHz, Communication System PAR: 0.00 dB; PMF: 1.00; Duty Cycle: 1:1.00
 Medium Parameters used: $f=2412$ MHz; $\sigma = 1.89$ S/m; $\epsilon_r = 52.2$; $\rho = 1000.0$ g/cm³
 Phantom section: Flat Section

DASY Configuration:


Probe: ET3DV6 - SN1380; ConvF: (4.1,4.1,4.1); Calibrated: 11/12/2014;
 Sensor-Surface: 4 mm (Mechanical Surface Detection)
 Electronics: DAE3 Sn442; Calibrated: 3/12/2014
 Phantom: ELI v4.0 (30deg probe tilt); Type: QDOVA001BB; Serial: TP:1101
 DASY52 52.8.8(1222); SEMCAD X Version 14.6.10 (7331)

Body Lap Held ANT 1 (DSSS) 24-Aug-2015/Channel 1 Test/Area Scan (51x71x1): Interpolated grid: dx=1.2 mm, dy=1.2 mm; Maximum value of SAR (interpolated) = 0.083 W/kg

Body Lap Held ANT 1 (DSSS) 24-Aug-2015/Channel 1 Test/Zoom Scan (31x31x36)/Cube 0: Interpolated grid: dx=1.0 mm, dy=1.0 mm, dz=1.0 mm; Reference Value = 6.183 V/m; **Power Drift = -0.11 dB**

Averaged SAR: SAR(1g) = 0.074 W/kg; SAR(10g) = 0.043 W/kg

Maximum value of SAR (interpolated) = 0.162 W/kg

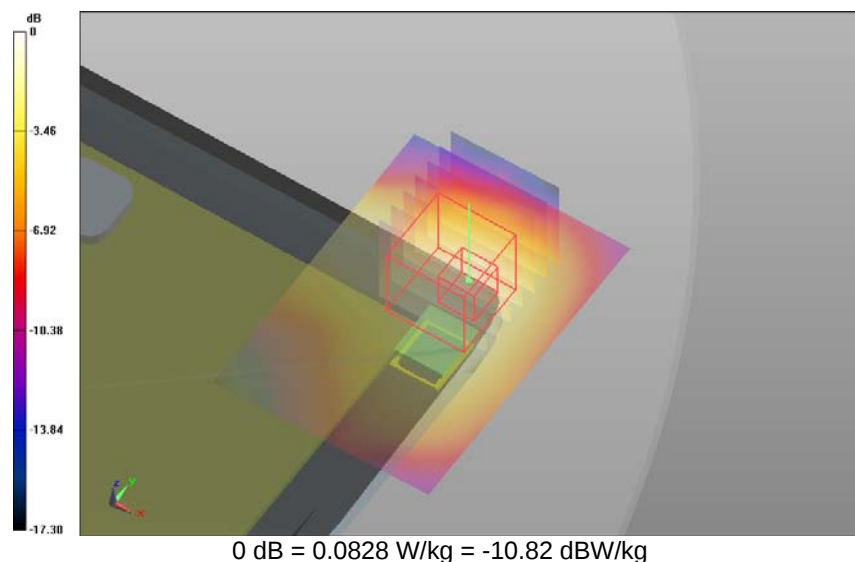


SAR Measurement Plot 3



Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

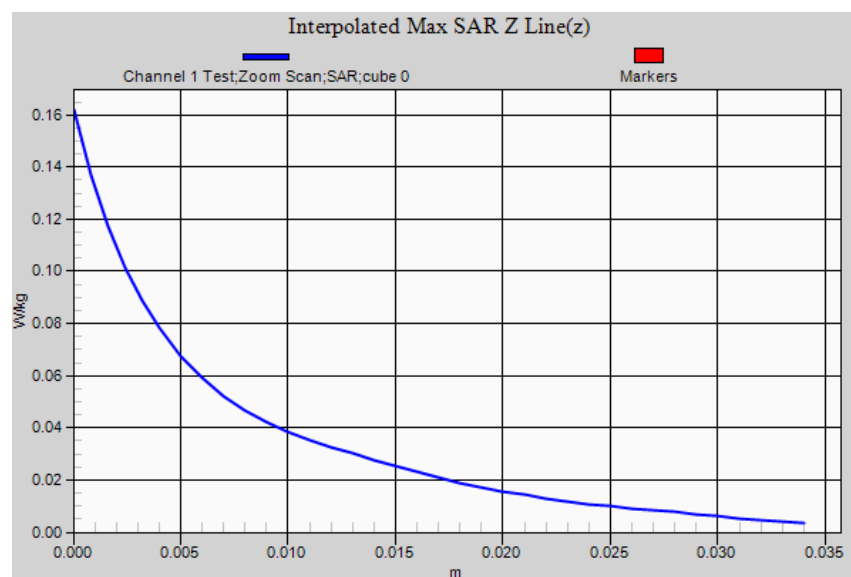

Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

Test Lab: EMCTech

Test File: M150814 2450 MHz WLAN FCC.da52:2

DUT Name: Fujitsu Tablet with 11 abgn/ac WLAN, Type: 8260NGW, Serial: WFM (MAC):A4:34:D9:09:92:96**Configuration: Body Lap Held ANT 1 (DSSS) 24-Aug-2015**

Communication System: 0 - DSSS 2450 MHz 1Mbps; Communication System Band: ISM 2.4 GHz; Frequency: 2437 MHz, Communication System PAR: 0.00 dB; PMF: 1.00; Duty Cycle: 1:1.00
 Medium Parameters used: $f=2437$ MHz; $\sigma = 1.93$ S/m; $\epsilon_r = 52.0$; $\rho = 1000.0\text{g/cm}^3$
 Phantom section: Flat Section

DASY Configuration:


Probe: ET3DV6 - SN1380; ConvF: (4.1,4.1,4.1); Calibrated: 11/12/2014;
 Sensor-Surface: 4 mm (Mechanical Surface Detection)
 Electronics: DAE3 Sn442; Calibrated: 3/12/2014
 Phantom: ELI v4.0 (30deg probe tilt); Type: QDOVA001BB; Serial: TP:1101
 DASY52 52.8.8(1222); SEMCAD X Version 14.6.10 (7331)

Body Lap Held ANT 1 (DSSS) 24-Aug-2015/Channel 6 Test/Area Scan (51x71x1): Interpolated grid: $dx=1.2$ mm, $dy=1.2$ mm; Maximum value of SAR (interpolated) = 0.083 W/kg

Body Lap Held ANT 1 (DSSS) 24-Aug-2015/Channel 6 Test/Zoom Scan (31x31x36)/Cube 0: Interpolated grid: $dx=1.0$ mm, $dy=1.0$ mm, $dz=1.0$ mm; Reference Value = 5.977 V/m; **Power Drift = -0.06 dB**

Averaged SAR: SAR(1g) = 0.073 W/kg; SAR(10g) = 0.042 W/kg

Maximum value of SAR (interpolated) = 0.151 W/kg

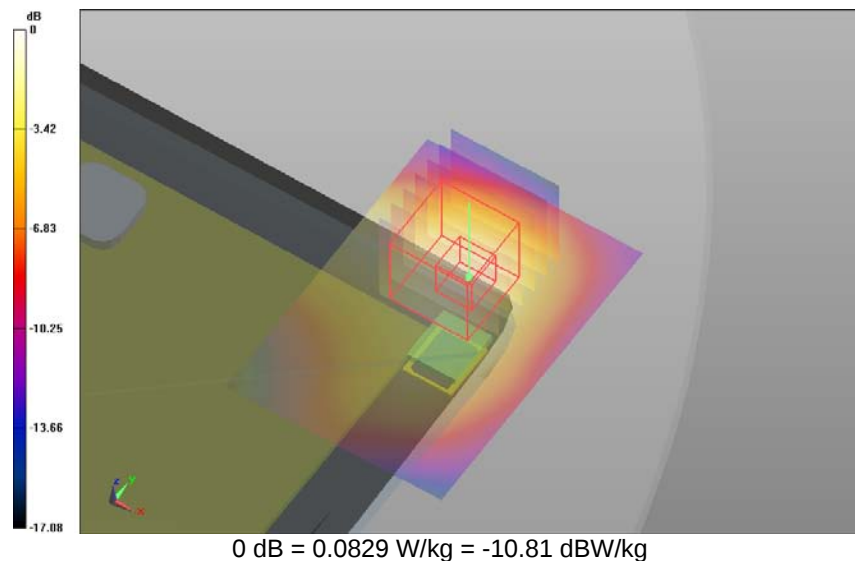


SAR Measurement Plot 4



Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

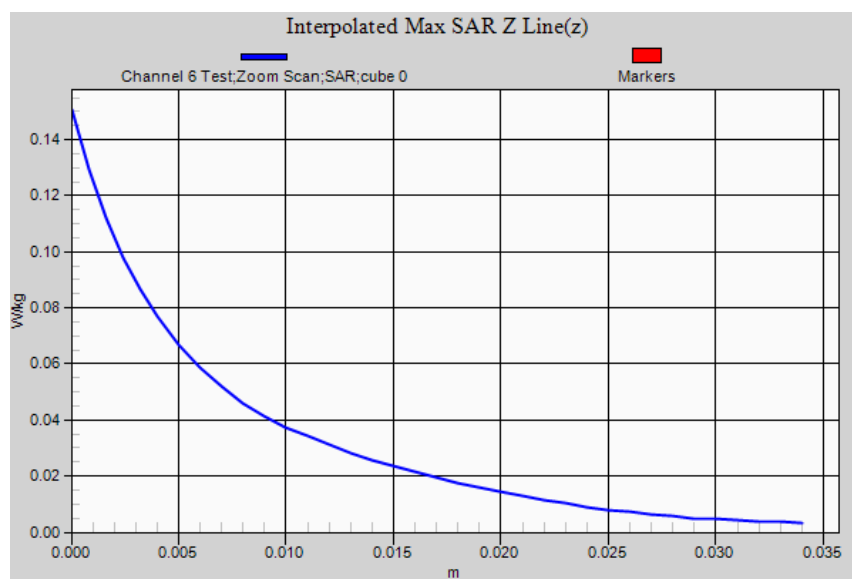

Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

Test Lab: EMCTech

Test File: M150814 2450 MHz WLAN FCC.da52:2

DUT Name: Fujitsu Tablet with 11 abgn/ac WLAN, Type: 8260NGW, Serial: WFM (MAC):A4:34:D9:09:92:96**Configuration: Body Lap Held ANT 1 (DSSS) 24-Aug-2015**

Communication System: 0 - DSSS 2450 MHz 1Mbps; Communication System Band: ISM 2.4 GHz; Frequency: 2442 MHz, Communication System PAR: 0.00 dB; PMF: 1.00; Duty Cycle: 1:1.00
 Medium Parameters used: $f=2442$ MHz; $\sigma = 1.94$ S/m; $\epsilon_r = 52.0$; $\rho = 1000.0$ g/cm³
 Phantom section: Flat Section

DASY Configuration:


Probe: ET3DV6 - SN1380; ConvF: (4.1,4.1,4.1); Calibrated: 11/12/2014;
 Sensor-Surface: 4 mm (Mechanical Surface Detection)
 Electronics: DAE3 Sn442; Calibrated: 3/12/2014
 Phantom: ELI v4.0 (30deg probe tilt); Type: QDOVA001BB; Serial: TP:1101
 DASY52 52.8.8(1222); SEMCAD X Version 14.6.10 (7331)

Body Lap Held ANT 1 (DSSS) 24-Aug-2015/Channel 7 Test/Area Scan (51x71x1): Interpolated grid: dx=1.2 mm, dy=1.2 mm; Maximum value of SAR (interpolated) = 0.069 W/kg

Body Lap Held ANT 1 (DSSS) 24-Aug-2015/Channel 7 Test/Zoom Scan (31x31x36)/Cube 0: Interpolated grid: dx=1.0 mm, dy=1.0 mm, dz=1.0 mm; Reference Value = 5.540 V/m; **Power Drift = -0.06 dB**

Averaged SAR: SAR(1g) = 0.061 W/kg; SAR(10g) = 0.033 W/kg

Maximum value of SAR (interpolated) = 0.137 W/kg

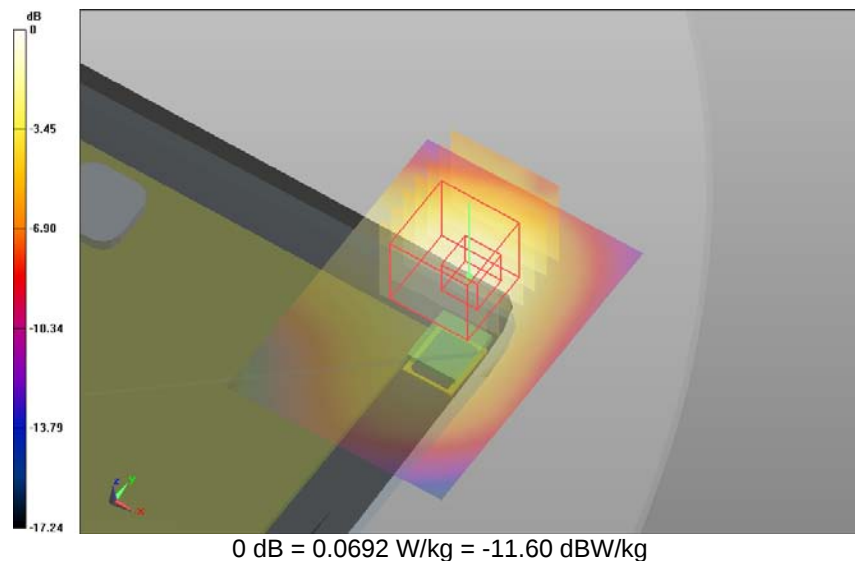


SAR Measurement Plot 5



Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

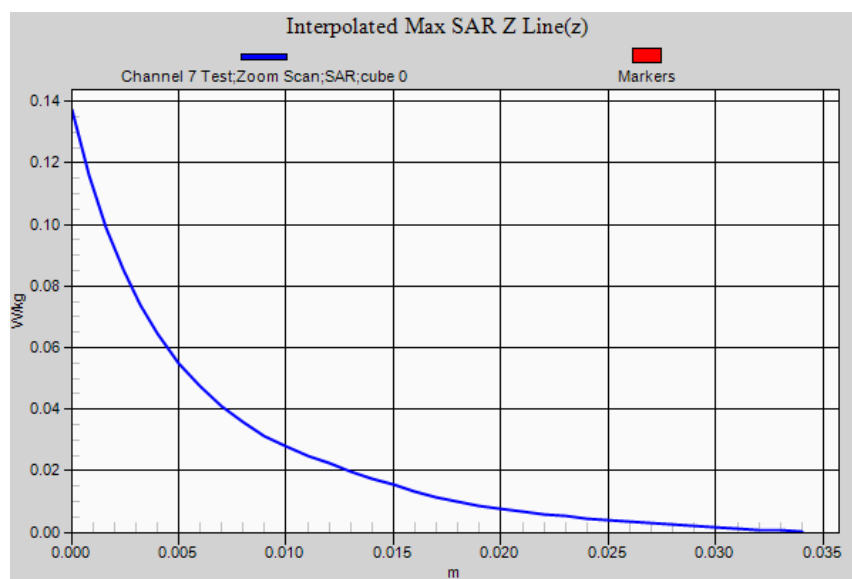

Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

Test Lab: EMCTech

Test File: M150814 2450 MHz WLAN FCC.da52:2

DUT Name: Fujitsu Tablet with 11 abgn/ac WLAN, Type: 8260NGW, Serial: WFM (MAC):A4:34:D9:09:92:96**Configuration: Body Lap Held ANT 1 (DSSS) 24-Aug-2015**

Communication System: 0 - DSSS 2450 MHz 1Mbps; Communication System Band: ISM 2.4 GHz; Frequency: 2467 MHz, Communication System PAR: 0.00 dB; PMF: 1.00; Duty Cycle: 1:1.00
 Medium Parameters used: $f=2467$ MHz; $\sigma = 1.97$ S/m; $\epsilon_r = 51.9$; $\rho = 1000.0$ g/cm³
 Phantom section: Flat Section

DASY Configuration:


Probe: ET3DV6 - SN1380; ConvF: (4.1,4.1,4.1); Calibrated: 11/12/2014;
 Sensor-Surface: 4 mm (Mechanical Surface Detection)
 Electronics: DAE3 Sn442; Calibrated: 3/12/2014
 Phantom: ELI v4.0 (30deg probe tilt); Type: QDOVA001BB; Serial: TP:1101
 DASY52 52.8.8(1222); SEMCAD X Version 14.6.10 (7331)

Body Lap Held ANT 1 (DSSS) 24-Aug-2015/Channel 12 Test/Area Scan (51x71x1): Interpolated grid: dx=1.2 mm, dy=1.2 mm; Maximum value of SAR (interpolated) = 0.063 W/kg

Body Lap Held ANT 1 (DSSS) 24-Aug-2015/Channel 12 Test/Zoom Scan (31x31x36)/Cube 0: Interpolated grid: dx=1.0 mm, dy=1.0 mm, dz=1.0 mm; Reference Value = 5.096 V/m; **Power Drift = -0.14 dB**

Averaged SAR: SAR(1g) = 0.057 W/kg; SAR(10g) = 0.032 W/kg

Maximum value of SAR (interpolated) = 0.123 W/kg

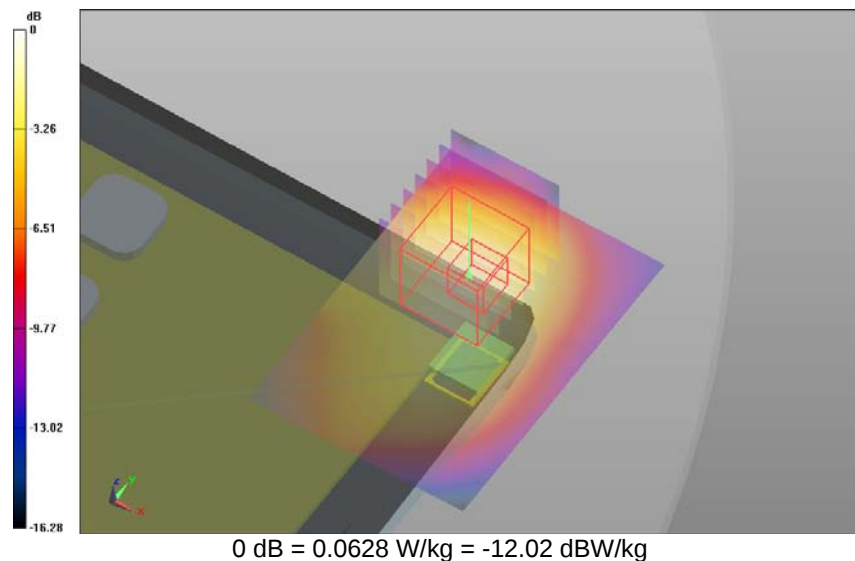


SAR Measurement Plot 6



Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

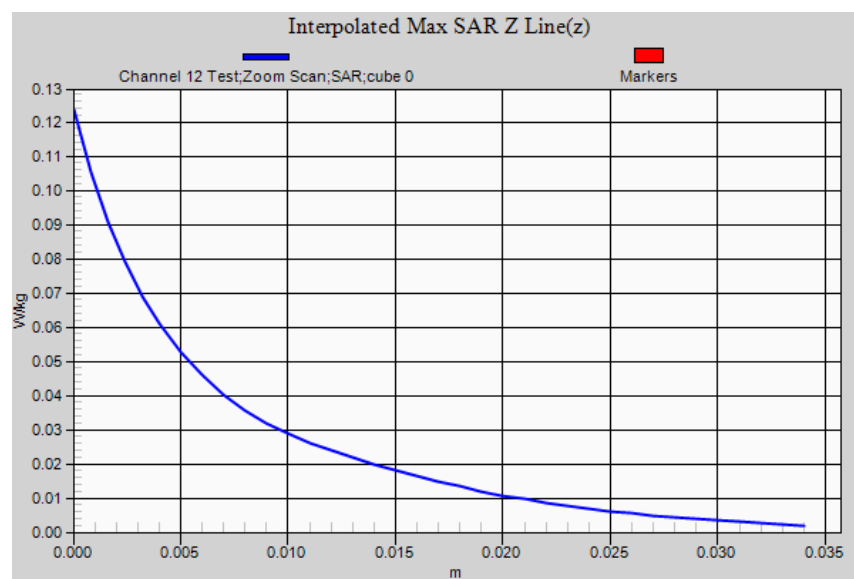

Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

Test Lab: EMCTech

Test File: M150814 2450 MHz WLAN FCC.da52:2

DUT Name: Fujitsu Tablet with 11 abgn/ac WLAN, Type: 8260NGW, Serial: WFM (MAC):A4:34:D9:09:92:96**Configuration: Body Lap Held ANT 1 (DSSS) 24-Aug-2015**

Communication System: 0 - DSSS 2450 MHz 1Mbps (0); Communication System Band: ISM 2.4 GHz; Frequency: 2472 MHz, Communication System PAR: 0.00 dB; PMF: 1.00; Duty Cycle: 1:1.00
 Medium Parameters used: $f=2472$ MHz; $\sigma = 1.97$ S/m; $\epsilon_r = 51.8$; $\rho = 1000.0$ g/cm³
 Phantom section: Flat Section

DASY Configuration:


Probe: ET3DV6 - SN1380; ConvF: (4.1,4.1,4.1); Calibrated: 11/12/2014;
 Sensor-Surface: 4 mm (Mechanical Surface Detection)
 Electronics: DAE3 Sn442; Calibrated: 3/12/2014
 Phantom: ELI v4.0 (30deg probe tilt); Type: QDOVA001BB; Serial: TP:1101
 DASY52 52.8.8(1222); SEMCAD X Version 14.6.10 (7331)

Body Lap Held ANT 1 (DSSS) 24-Aug-2015/Channel 13 Test/Area Scan (51x71x1): Interpolated grid: dx=1.2 mm, dy=1.2 mm; Maximum value of SAR (interpolated) = 0.019 W/kg

Body Lap Held ANT 1 (DSSS) 24-Aug-2015/Channel 13 Test/Zoom Scan (31x31x36)/Cube 0: Interpolated grid: dx=1.0 mm, dy=1.0 mm, dz=1.0 mm; Reference Value = 2.393 V/m; **Power Drift = 0.08 dB**

Averaged SAR: SAR(1g) = 0.016 W/kg; SAR(10g) = 0.009 W/kg

Maximum value of SAR (interpolated) = 0.040 W/kg

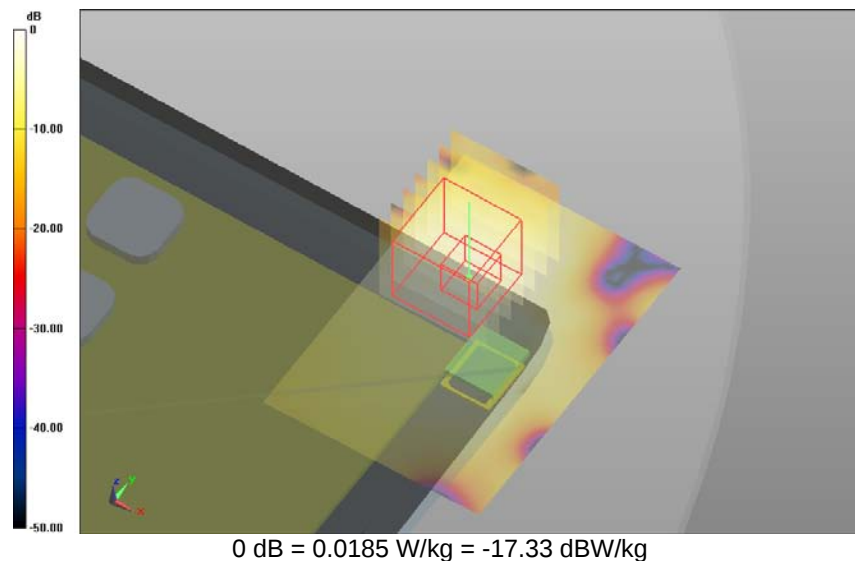


SAR Measurement Plot 7



Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

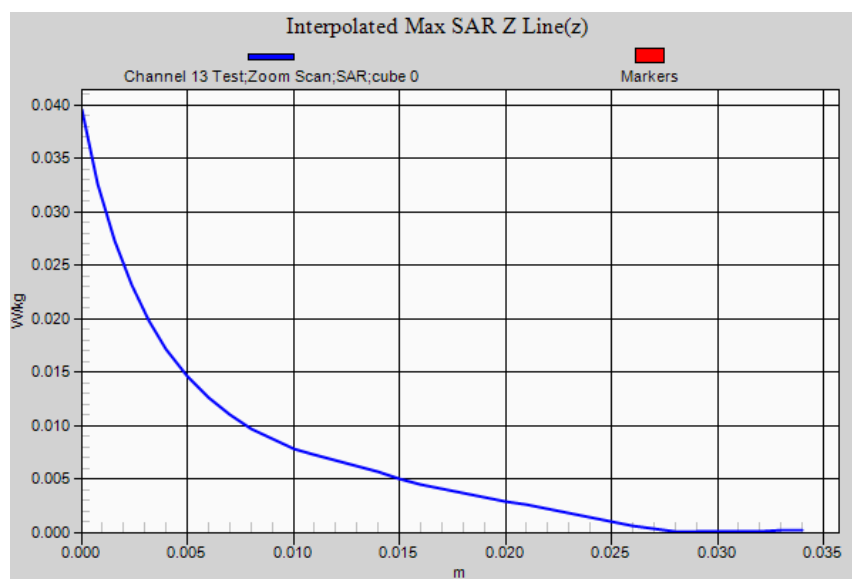

Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

Test Lab: EMCTech

Test File: M150814 2450 MHz WLAN FCC.da52:4

DUT Name: Fujitsu Tablet with 11 abgn/ac WLAN, Type: 8260NGW, Serial: WFM (MAC):A4:34:D9:09:92:96**Configuration: Body Lap Held ANT 2 (DSSS) 24-Aug-2015**

Communication System: 0 - DSSS 2450 MHz 1Mbps; Communication System Band: ISM 2.4 GHz; Frequency: 2412 MHz, Communication System PAR: 0.00 dB; PMF: 1.00; Duty Cycle: 1:1.00
 Medium Parameters used: $f=2412$ MHz; $\sigma = 1.89$ S/m; $\epsilon_r = 52.2$; $\rho = 1000.0$ g/cm³
 Phantom section: Flat Section

DASY Configuration:


Probe: ET3DV6 - SN1380; ConvF: (4.1,4.1,4.1); Calibrated: 11/12/2014;
 Sensor-Surface: 4 mm (Mechanical Surface Detection)
 Electronics: DAE3 Sn442; Calibrated: 3/12/2014
 Phantom: ELI v4.0 (30deg probe tilt); Type: QDOVA001BB; Serial: TP:1101
 DASY52 52.8.8(1222); SEMCAD X Version 14.6.10 (7331)

Body Lap Held ANT 2 (DSSS) 24-Aug-2015/Channel 1 Test/Area Scan (51x71x1): Interpolated grid: $dx=1.2$ mm, $dy=1.2$ mm; Maximum value of SAR (interpolated) = 0.102 W/kg

Body Lap Held ANT 2 (DSSS) 24-Aug-2015/Channel 1 Test/Zoom Scan (31x31x36)/Cube 0: Interpolated grid: $dx=1.0$ mm, $dy=1.0$ mm, $dz=1.0$ mm; Reference Value = 6.986 V/m; **Power Drift = -0.03 dB**

Averaged SAR: SAR(1g) = 0.098 W/kg; SAR(10g) = 0.052 W/kg

Maximum value of SAR (interpolated) = 0.236 W/kg

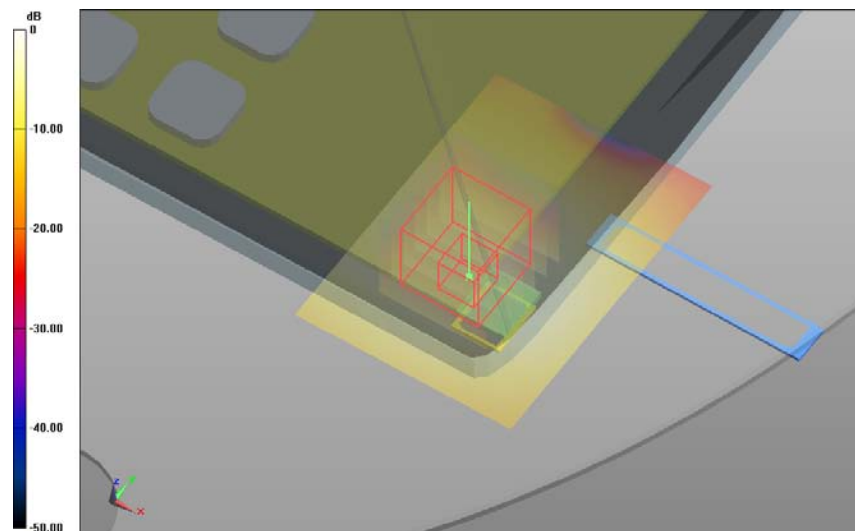


0 dB = 0.102 W/kg = -9.91 dBW/kg

SAR Measurement Plot 8



Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

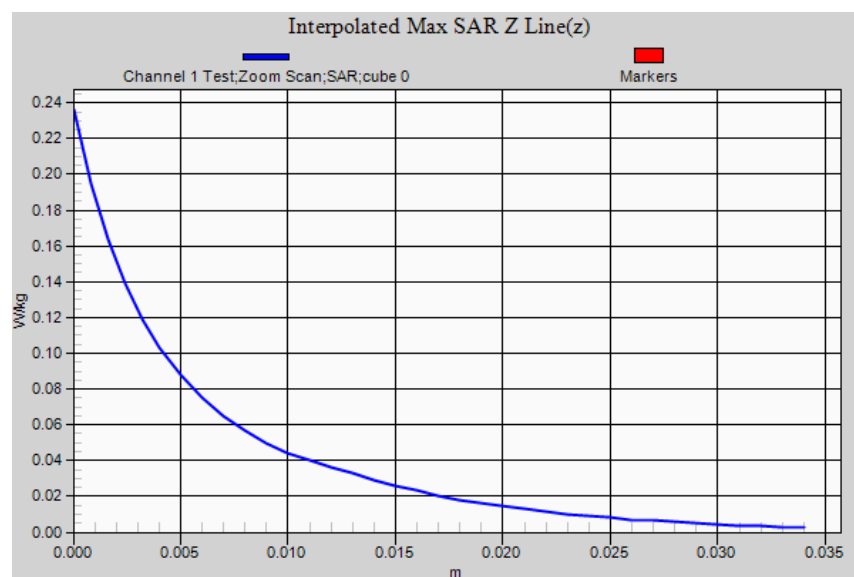

Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

Test Lab: EMCTech

Test File: M150814 2450 MHz WLAN FCC.da52:4

DUT Name: Fujitsu Tablet with 11 abgn/ac WLAN, Type: 8260NGW, Serial: WFM (MAC):A4:34:D9:09:92:96**Configuration: Body Lap Held ANT 2 (DSSS) 24-Aug-2015**

Communication System: 0 - DSSS 2450 MHz 1Mbps; Communication System Band: ISM 2.4 GHz; Frequency: 2437 MHz, Communication System PAR: 0.00 dB; PMF: 1.00; Duty Cycle: 1:1.00
 Medium Parameters used: $f=2437$ MHz; $\sigma = 1.93$ S/m; $\epsilon_r = 52.0$; $\rho = 1000.0$ g/cm³
 Phantom section: Flat Section

DASY Configuration:


Probe: ET3DV6 - SN1380; ConvF: (4.1,4.1,4.1); Calibrated: 11/12/2014;
 Sensor-Surface: 4 mm (Mechanical Surface Detection)
 Electronics: DAE3 Sn442; Calibrated: 3/12/2014
 Phantom: ELI v4.0 (30deg probe tilt); Type: QDOVA001BB; Serial: TP:1101
 DASY52 52.8.8(1222); SEMCAD X Version 14.6.10 (7331)

Body Lap Held ANT 2 (DSSS) 24-Aug-2015/Channel 6 Test/Area Scan (51x71x1): Interpolated grid: $dx=1.2$ mm, $dy=1.2$ mm; Maximum value of SAR (interpolated) = 0.130 W/kg

Body Lap Held ANT 2 (DSSS) 24-Aug-2015/Channel 6 Test/Zoom Scan (31x31x36)/Cube 0: Interpolated grid: $dx=1.0$ mm, $dy=1.0$ mm, $dz=1.0$ mm; Reference Value = 7.783 V/m; **Power Drift = -0.08 dB**

Averaged SAR: SAR(1g) = 0.127 W/kg; SAR(10g) = 0.066 W/kg

Maximum value of SAR (interpolated) = 0.317 W/kg

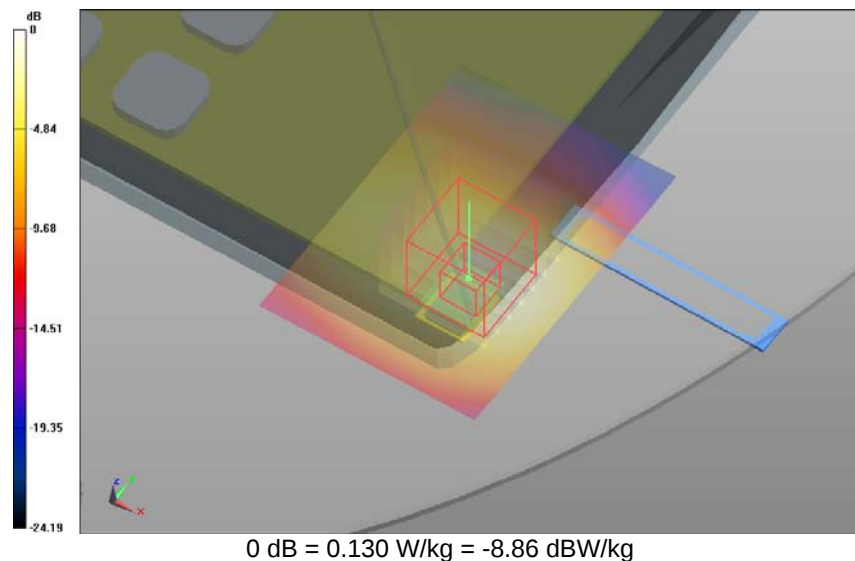


SAR Measurement Plot 9



Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

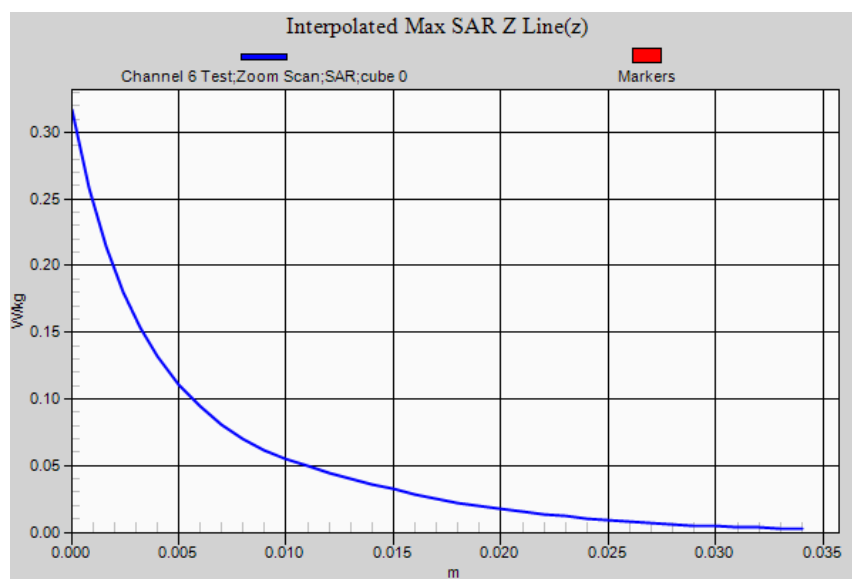

Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

Test Lab: EMCTech

Test File: M150814 2450 MHz WLAN FCC.da52:4

DUT Name: Fujitsu Tablet with 11 abgn/ac WLAN, Type: 8260NGW, Serial: WFM (MAC):A4:34:D9:09:92:96**Configuration: Body Lap Held ANT 2 (DSSS) 24-Aug-2015**

Communication System: 0 - DSSS 2450 MHz 1Mbps; Communication System Band: ISM 2.4 GHz; Frequency: 2442 MHz, Communication System PAR: 0.00 dB; PMF: 1.00; Duty Cycle: 1:1.00
 Medium Parameters used: $f=2442$ MHz; $\sigma = 1.94$ S/m; $\epsilon_r = 52.0$; $\rho = 1000.0$ g/cm³
 Phantom section: Flat Section

DASY Configuration:


Probe: ET3DV6 - SN1380; ConvF: (4.1,4.1,4.1); Calibrated: 11/12/2014;
 Sensor-Surface: 4 mm (Mechanical Surface Detection)
 Electronics: DAE3 Sn442; Calibrated: 3/12/2014
 Phantom: ELI v4.0 (30deg probe tilt); Type: QDOVA001BB; Serial: TP:1101
 DASY52 52.8.8(1222); SEMCAD X Version 14.6.10 (7331)

Body Lap Held ANT 2 (DSSS) 24-Aug-2015/Channel 7 Test/Area Scan (51x71x1): Interpolated grid: dx=1.2 mm, dy=1.2 mm; Maximum value of SAR (interpolated) = 0.138 W/kg

Body Lap Held ANT 2 (DSSS) 24-Aug-2015/Channel 7 Test/Zoom Scan (31x31x36)/Cube 0: Interpolated grid: dx=1.0 mm, dy=1.0 mm, dz=1.0 mm; Reference Value = 6.791 V/m; **Power Drift = -0.07 dB**


Averaged SAR: SAR(1g) = 0.131 W/kg; SAR(10g) = 0.069 W/kg

Maximum value of SAR (interpolated) = 0.329 W/kg

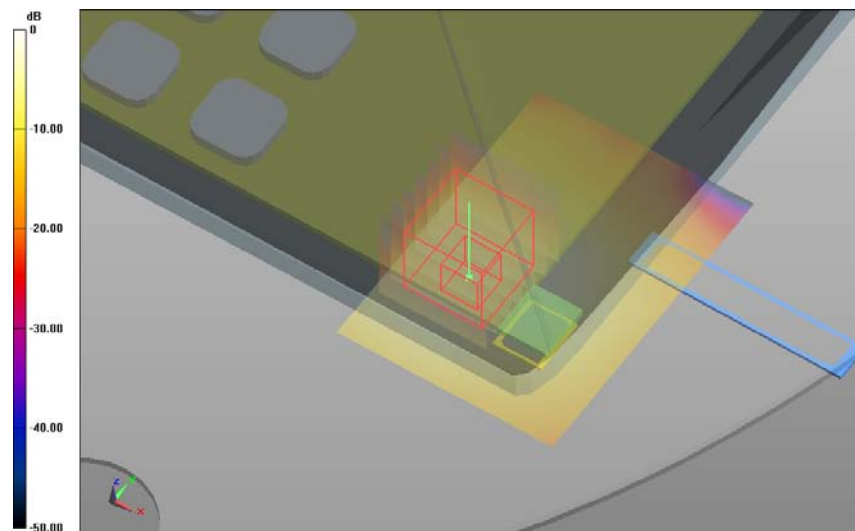

0 dB = 0.138 W/kg = -8.60 dBW/kg

SAR Measurement Plot 10

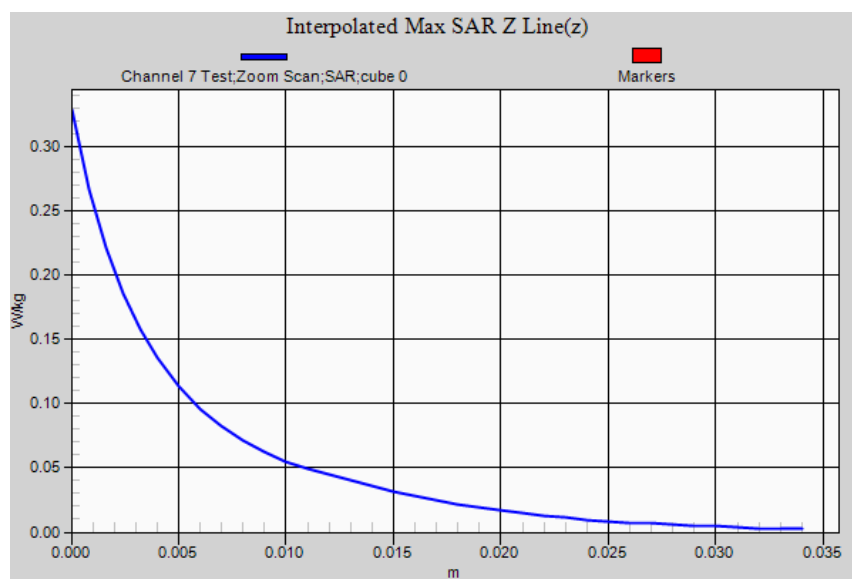

Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

Test Lab: EMCTech

Test File: M150814 2450 MHz WLAN FCC.da52:4

DUT Name: Fujitsu Tablet with 11 abgn/ac WLAN, Type: 8260NGW, Serial: WFM (MAC):A4:34:D9:09:92:96**Configuration: Body Lap Held ANT 2 (DSSS) 24-Aug-2015**

Communication System: 0 - DSSS 2450 MHz 1Mbps; Communication System Band: ISM 2.4 GHz; Frequency: 2467 MHz, Communication System PAR: 0.00 dB; PMF: 1.00; Duty Cycle: 1:1.00
 Medium Parameters used: $f=2467$ MHz; $\sigma = 1.97$ S/m; $\epsilon_r = 51.9$; $\rho = 1000.0$ g/cm³
 Phantom section: Flat Section

DASY Configuration:


Probe: ET3DV6 - SN1380; ConvF: (4.1,4.1,4.1); Calibrated: 11/12/2014;
 Sensor-Surface: 4 mm (Mechanical Surface Detection)
 Electronics: DAE3 Sn442; Calibrated: 3/12/2014
 Phantom: ELI v4.0 (30deg probe tilt); Type: QDOVA001BB; Serial: TP:1101
 DASY52 52.8.8(1222); SEMCAD X Version 14.6.10 (7331)

Body Lap Held ANT 2 (DSSS) 24-Aug-2015/Channel 12 Test/Area Scan (51x71x1): Interpolated grid: dx=1.2 mm, dy=1.2 mm; Maximum value of SAR (interpolated) = 0.161 W/kg

Body Lap Held ANT 2 (DSSS) 24-Aug-2015/Channel 12 Test/Zoom Scan (31x31x36)/Cube 0: Interpolated grid: dx=1.0 mm, dy=1.0 mm, dz=1.0 mm; Reference Value = 8.945 V/m; **Power Drift = -0.15 dB**

Averaged SAR: SAR(1g) = 0.147 W/kg; SAR(10g) = 0.076 W/kg

Maximum value of SAR (interpolated) = 0.366 W/kg

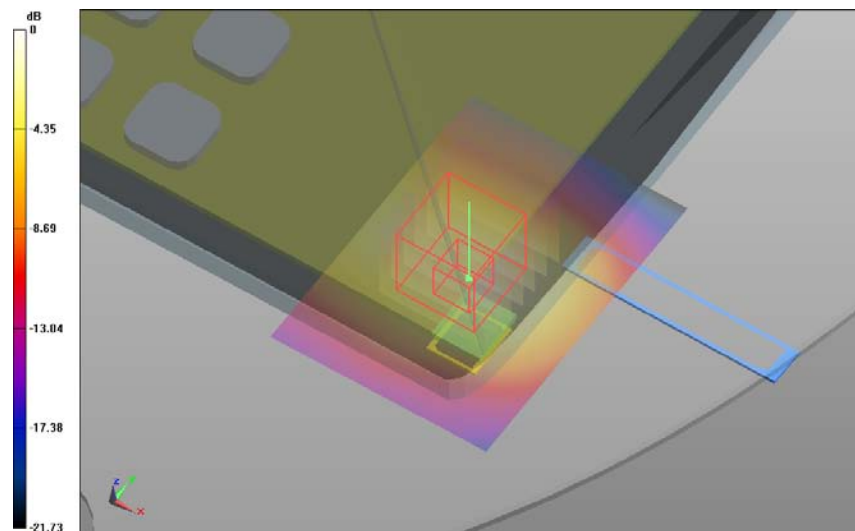


0 dB = 0.161 W/kg = -7.93 dBW/kg

SAR Measurement Plot 11



Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

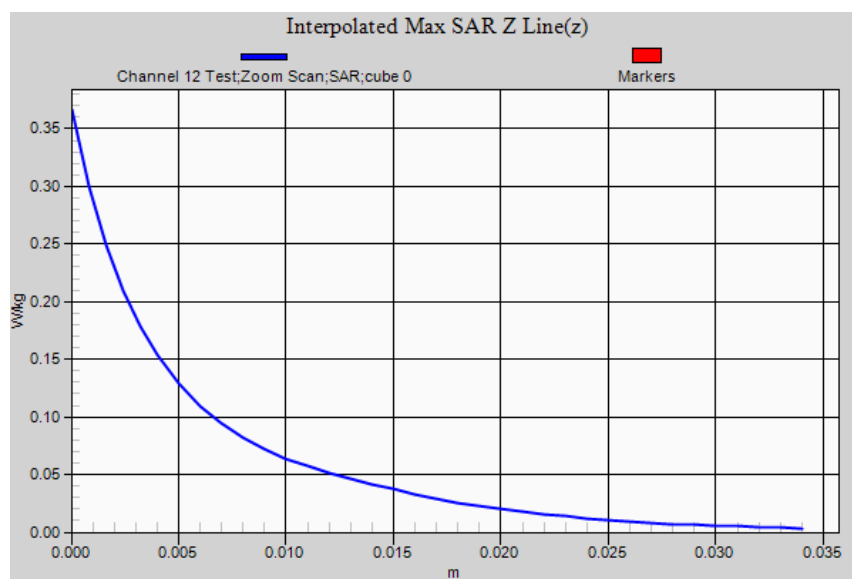

Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

Test Lab: EMCTech

Test File: M150814 2450 MHz WLAN FCC.da52:4

DUT Name: Fujitsu Tablet with 11 abgn/ac WLAN, Type: 8260NGW, Serial: WFM (MAC):A4:34:D9:09:92:96**Configuration: Body Lap Held ANT 2 (DSSS) 24-Aug-2015**

Communication System: 0 - DSSS 2450 MHz 1Mbps (0); Communication System Band: ISM 2.4 GHz; Frequency: 2472 MHz, Communication System PAR: 0.00 dB; PMF: 1.00; Duty Cycle: 1:1.00
 Medium Parameters used: $f=2472$ MHz; $\sigma = 1.97$ S/m; $\epsilon_r = 51.8$; $\rho = 1000.0$ g/cm³
 Phantom section: Flat Section

DASY Configuration:


Probe: ET3DV6 - SN1380; ConvF: (4.1,4.1,4.1); Calibrated: 11/12/2014;
 Sensor-Surface: 4 mm (Mechanical Surface Detection)
 Electronics: DAE3 Sn442; Calibrated: 3/12/2014
 Phantom: ELI v4.0 (30deg probe tilt); Type: QDOVA001BB; Serial: TP:1101
 DASY52 52.8.8(1222); SEMCAD X Version 14.6.10 (7331)

Body Lap Held ANT 2 (DSSS) 24-Aug-2015/Channel 13 Test/Area Scan (51x71x1): Interpolated grid: dx=1.2 mm, dy=1.2 mm; Maximum value of SAR (interpolated) = 0.050 W/kg

Body Lap Held ANT 2 (DSSS) 24-Aug-2015/Channel 13 Test/Zoom Scan (31x31x36)/Cube 0: Interpolated grid: dx=1.0 mm, dy=1.0 mm, dz=1.0 mm; Reference Value = 4.260 V/m; **Power Drift = 0.18 dB**

Averaged SAR: SAR(1g) = 0.046 W/kg; SAR(10g) = 0.025 W/kg

Maximum value of SAR (interpolated) = 0.113 W/kg

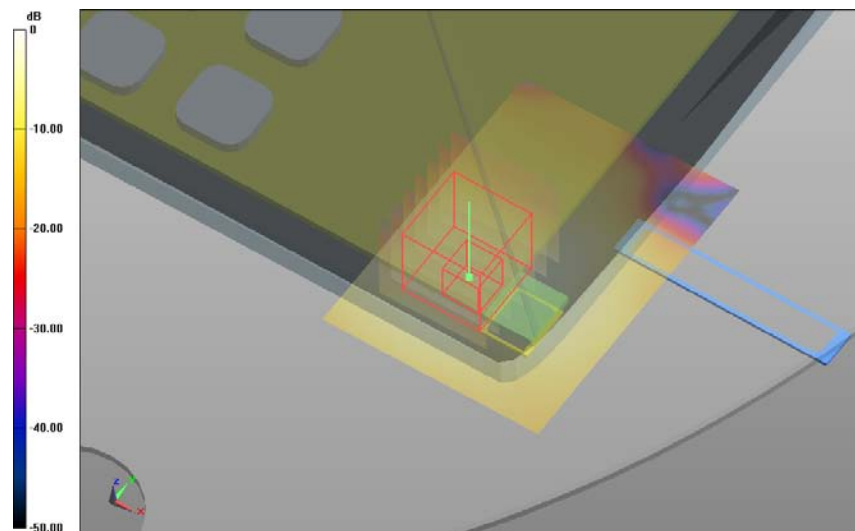


0 dB = 0.0502 W/kg = -12.99 dBW/kg

SAR Measurement Plot 12



Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

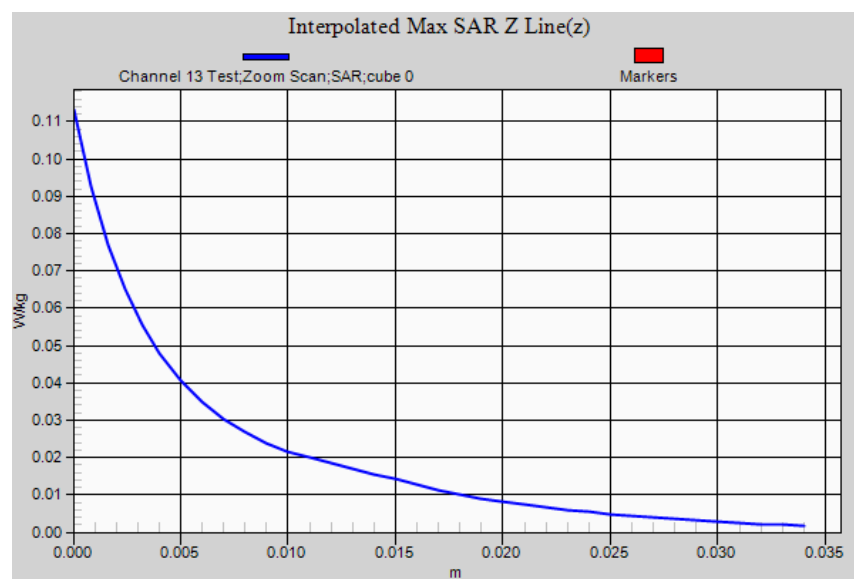

Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

Test Lab: EMCTech

Test File: M150814 2450 MHz WLAN FCC.da52:5

DUT Name: Fujitsu Tablet with 11 abgn/ac WLAN, Type: 8260NGW, Serial: WFM (MAC):A4:34:D9:09:92:96**Configuration: Body Edge 1 ANT 1 (DSSS) 24-Aug-2015**

Communication System: 0 - DSSS 2450 MHz 1Mbps; Communication System Band: ISM 2.4 GHz; Frequency: 2412 MHz, Communication System PAR: 0.00 dB; PMF: 1.00; Duty Cycle: 1:1.00
 Medium Parameters used: $f=2412$ MHz; $\sigma = 1.89$ S/m; $\epsilon_r = 52.2$; $\rho = 1000.0$ g/cm³
 Phantom section: Flat Section

DASY Configuration:


Probe: ET3DV6 - SN1380; ConvF: (4.1,4.1,4.1); Calibrated: 11/12/2014;
 Sensor-Surface: 4 mm (Mechanical Surface Detection)
 Electronics: DAE3 Sn442; Calibrated: 3/12/2014
 Phantom: ELI v4.0 (30deg probe tilt); Type: QDOVA001BB; Serial: TP:1101
 DASY52 52.8.8(1222); SEMCAD X Version 14.6.10 (7331)

Body Edge 1 ANT 1 (DSSS) 24-Aug-2015/Channel 1 Test/Area Scan (51x71x1): Interpolated grid: $dx=1.2$ mm, $dy=1.2$ mm; Maximum value of SAR (interpolated) = 0.408 W/kg

Body Edge 1 ANT 1 (DSSS) 24-Aug-2015/Channel 1 Test/Zoom Scan (31x31x36)/Cube 0: Interpolated grid: $dx=1.0$ mm, $dy=1.0$ mm, $dz=1.0$ mm; Reference Value = 13.688 V/m; **Power Drift = -0.08 dB**

Averaged SAR: SAR(1g) = 0.355 W/kg; SAR(10g) = 0.147 W/kg

Maximum value of SAR (interpolated) = 1.060 W/kg

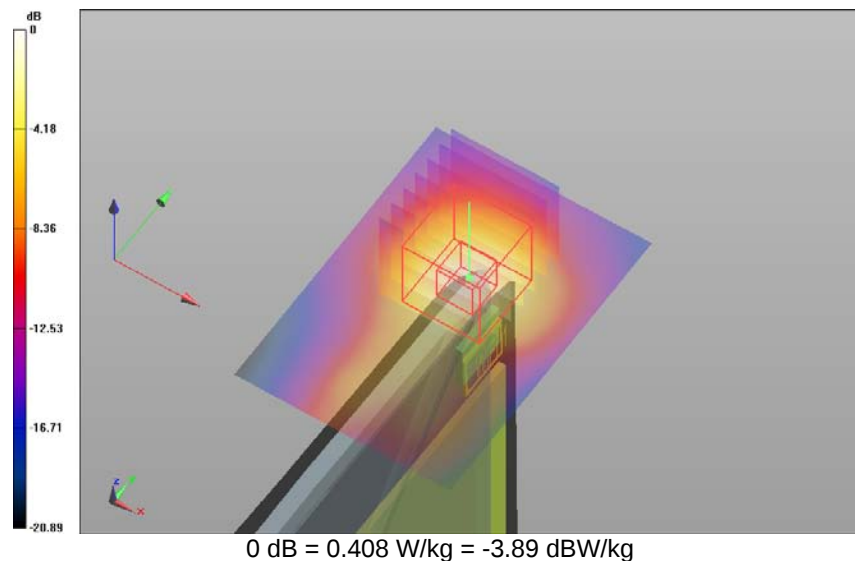


SAR Measurement Plot 13



Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

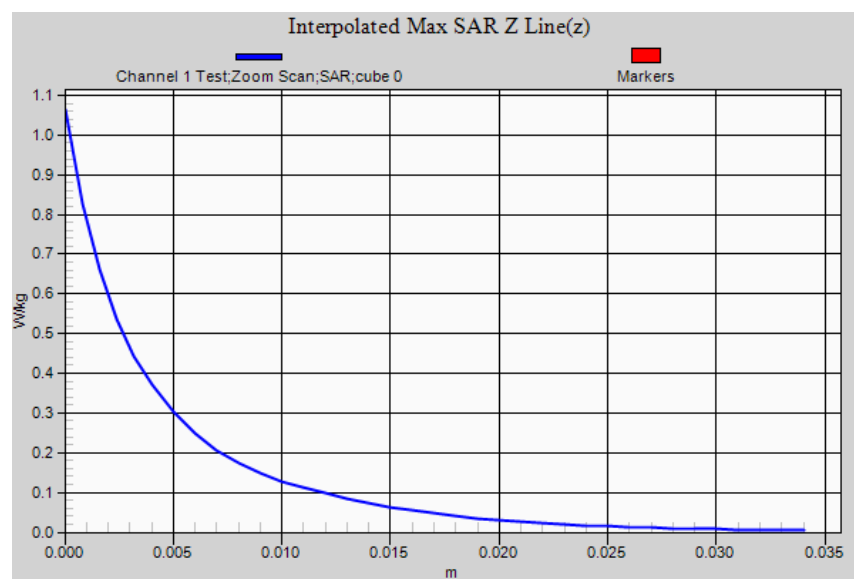

Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

Test Lab: EMCTech

Test File: M150814 2450 MHz WLAN FCC.da52:5

DUT Name: Fujitsu Tablet with 11 abgn/ac WLAN, Type: 8260NGW, Serial: WFM (MAC):A4:34:D9:09:92:96**Configuration: Body Edge 1 ANT 1 (DSSS) 24-Aug-2015**

Communication System: 0 - DSSS 2450 MHz 1Mbps; Communication System Band: ISM 2.4 GHz; Frequency: 2437 MHz, Communication System PAR: 0.00 dB; PMF: 1.00; Duty Cycle: 1:1.00
 Medium Parameters used: $f=2437$ MHz; $\sigma = 1.93$ S/m; $\epsilon_r = 52.0$; $\rho = 1000.0$ g/cm³
 Phantom section: Flat Section

DASY Configuration:


Probe: ET3DV6 - SN1380; ConvF: (4.1,4.1,4.1); Calibrated: 11/12/2014;
 Sensor-Surface: 4 mm (Mechanical Surface Detection)
 Electronics: DAE3 Sn442; Calibrated: 3/12/2014
 Phantom: ELI v4.0 (30deg probe tilt); Type: QDOVA001BB; Serial: TP:1101
 DASY52 52.8.8(1222); SEMCAD X Version 14.6.10 (7331)

Body Edge 1 ANT 1 (DSSS) 24-Aug-2015/Channel 6 Test/Area Scan (51x71x1): Interpolated grid: $dx=1.2$ mm, $dy=1.2$ mm; Maximum value of SAR (interpolated) = 0.400 W/kg

Body Edge 1 ANT 1 (DSSS) 24-Aug-2015/Channel 6 Test/Zoom Scan (31x31x36)/Cube 0: Interpolated grid: $dx=1.0$ mm, $dy=1.0$ mm, $dz=1.0$ mm; Reference Value = 13.366 V/m; **Power Drift = -0.04 dB**

Averaged SAR: SAR(1g) = 0.345 W/kg; SAR(10g) = 0.143 W/kg

Maximum value of SAR (interpolated) = 1.010 W/kg

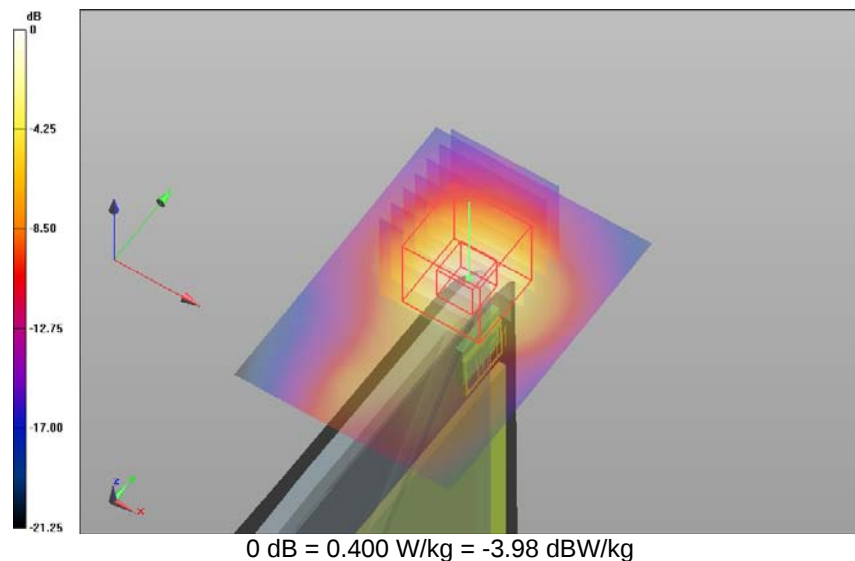


SAR Measurement Plot 14



Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

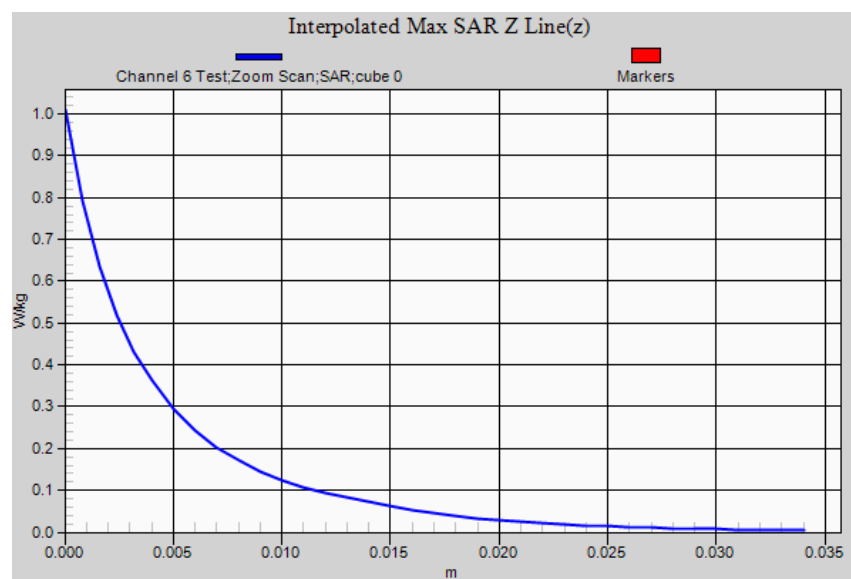

Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

Test Lab: EMCTech

Test File: M150814 2450 MHz WLAN FCC.da52:5

DUT Name: Fujitsu Tablet with 11 abgn/ac WLAN, Type: 8260NGW, Serial: WFM (MAC):A4:34:D9:09:92:96**Configuration: Body Edge 1 ANT 1 (DSSS) 24-Aug-2015**

Communication System: 0 - DSSS 2450 MHz 1Mbps; Communication System Band: ISM 2.4 GHz; Frequency: 2442 MHz, Communication System PAR: 0.00 dB; PMF: 1.00; Duty Cycle: 1:1.00
 Medium Parameters used: $f=2442$ MHz; $\sigma = 1.94$ S/m; $\epsilon_r = 52.0$; $\rho = 1000.0$ g/cm³
 Phantom section: Flat Section

DASY Configuration:


Probe: ET3DV6 - SN1380; ConvF: (4.1,4.1,4.1); Calibrated: 11/12/2014;
 Sensor-Surface: 4 mm (Mechanical Surface Detection)
 Electronics: DAE3 Sn442; Calibrated: 3/12/2014
 Phantom: ELI v4.0 (30deg probe tilt); Type: QDOVA001BB; Serial: TP:1101
 DASY52 52.8.8(1222); SEMCAD X Version 14.6.10 (7331)

Body Edge 1 ANT 1 (DSSS) 24-Aug-2015/Channel 7 Test/Area Scan (51x71x1): Interpolated grid: dx=1.2 mm, dy=1.2 mm; Maximum value of SAR (interpolated) = 0.343 W/kg

Body Edge 1 ANT 1 (DSSS) 24-Aug-2015/Channel 7 Test/Zoom Scan (31x31x36)/Cube 0: Interpolated grid: dx=1.0 mm, dy=1.0 mm, dz=1.0 mm; Reference Value = 7.688 V/m; **Power Drift = 0.03 dB**

Averaged SAR: SAR(1g) = 0.312 W/kg; SAR(10g) = 0.128 W/kg

Maximum value of SAR (interpolated) = 0.938 W/kg

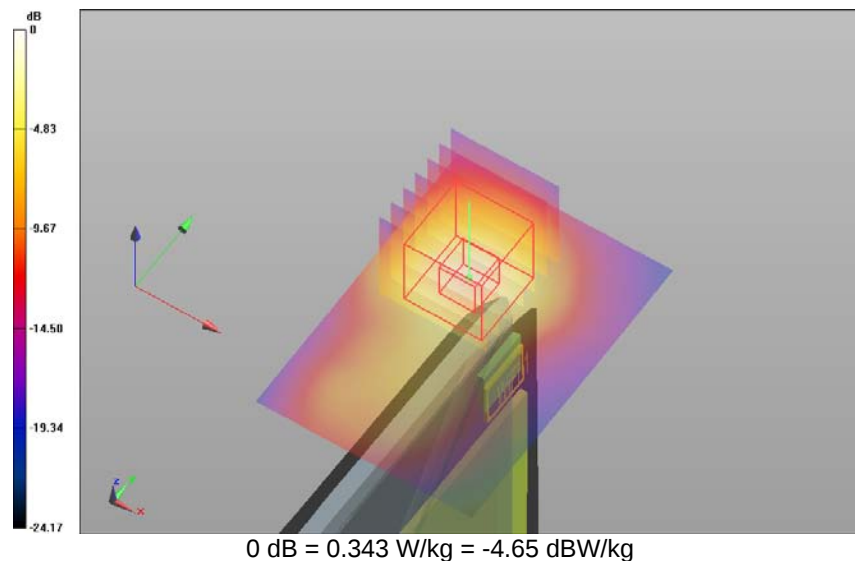


SAR Measurement Plot 15



Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

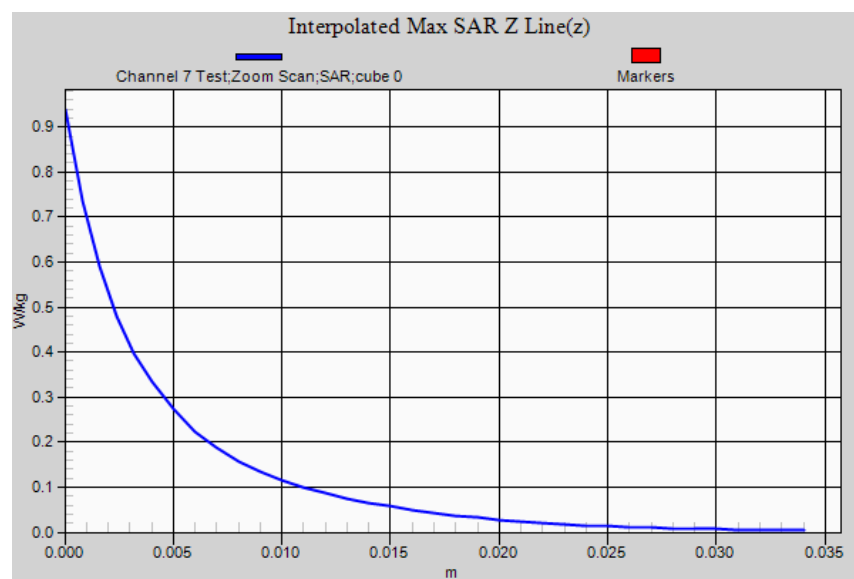

Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

Test Lab: EMCTech

Test File: M150814 2450 MHz WLAN FCC.da52:5

DUT Name: Fujitsu Tablet with 11 abgn/ac WLAN, Type: 8260NGW, Serial: WFM (MAC):A4:34:D9:09:92:96**Configuration: Body Edge 1 ANT 1 (DSSS) 24-Aug-2015**

Communication System: 0 - DSSS 2450 MHz 1Mbps; Communication System Band: ISM 2.4 GHz; Frequency: 2467 MHz, Communication System PAR: 0.00 dB; PMF: 1.00; Duty Cycle: 1:1.00
 Medium Parameters used: $f=2467$ MHz; $\sigma = 1.97$ S/m; $\epsilon_r = 51.9$; $\rho = 1000.0$ g/cm³
 Phantom section: Flat Section

DASY Configuration:


Probe: ET3DV6 - SN1380; ConvF: (4.1,4.1,4.1); Calibrated: 11/12/2014;
 Sensor-Surface: 4 mm (Mechanical Surface Detection)
 Electronics: DAE3 Sn442; Calibrated: 3/12/2014
 Phantom: ELI v4.0 (30deg probe tilt); Type: QDOVA001BB; Serial: TP:1101
 DASY52 52.8.8(1222); SEMCAD X Version 14.6.10 (7331)

Body Edge 1 ANT 1 (DSSS) 24-Aug-2015/Channel 12 Test/Area Scan (51x71x1): Interpolated grid: $dx=1.2$ mm, $dy=1.2$ mm; Maximum value of SAR (interpolated) = 0.344 W/kg

Body Edge 1 ANT 1 (DSSS) 24-Aug-2015/Channel 12 Test/Zoom Scan (31x31x36)/Cube 0: Interpolated grid: $dx=1.0$ mm, $dy=1.0$ mm, $dz=1.0$ mm; Reference Value = 12.272 V/m; **Power Drift = 0.01 dB**

Averaged SAR: SAR(1g) = 0.303 W/kg; SAR(10g) = 0.126 W/kg

Maximum value of SAR (interpolated) = 0.887 W/kg

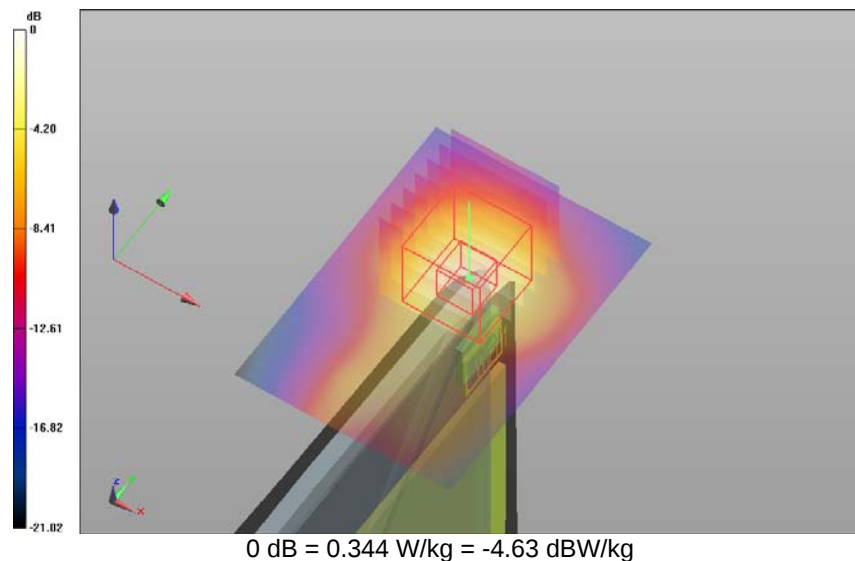


SAR Measurement Plot 16



Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

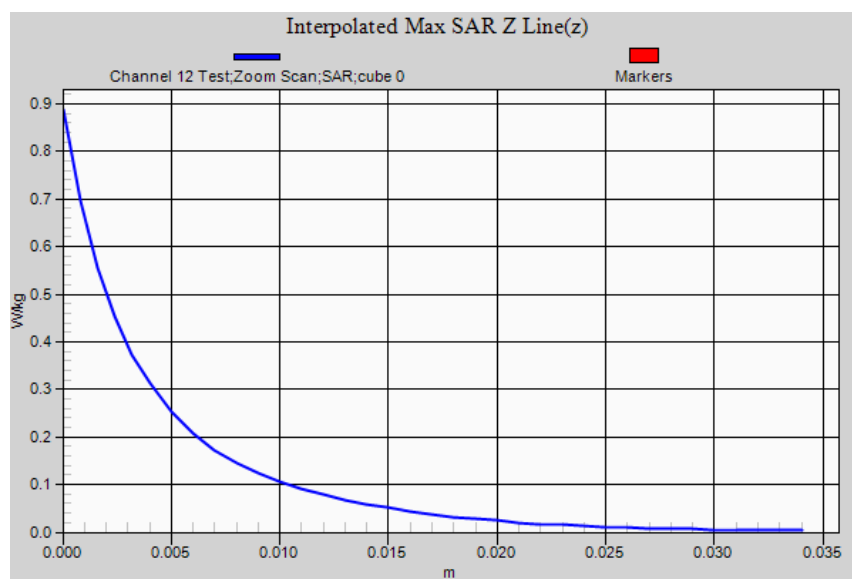

Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

Test Lab: EMCTech

Test File: M150814 2450 MHz WLAN FCC.da52:5

DUT Name: Fujitsu Tablet with 11 abgn/ac WLAN, Type: 8260NGW, Serial: WFM (MAC):A4:34:D9:09:92:96**Configuration: Body Edge 1 ANT 1 (DSSS) 24-Aug-2015**

Communication System: 0 - DSSS 2450 MHz 1Mbps (0); Communication System Band: ISM 2.4 GHz; Frequency: 2472 MHz, Communication System PAR: 0.00 dB; PMF: 1.00; Duty Cycle: 1:1.00
 Medium Parameters used: $f=2472$ MHz; $\sigma = 1.97$ S/m; $\epsilon_r = 51.8$; $\rho = 1000.0$ g/cm³
 Phantom section: Flat Section

DASY Configuration:


Probe: ET3DV6 - SN1380; ConvF: (4.1,4.1,4.1); Calibrated: 11/12/2014;
 Sensor-Surface: 4 mm (Mechanical Surface Detection)
 Electronics: DAE3 Sn442; Calibrated: 3/12/2014
 Phantom: ELI v4.0 (30deg probe tilt); Type: QDOVA001BB; Serial: TP:1101
 DASY52 52.8.8(1222); SEMCAD X Version 14.6.10 (7331)

Body Edge 1 ANT 1 (DSSS) 24-Aug-2015/Channel 13 Test/Area Scan (51x71x1): Interpolated grid: $dx=1.2$ mm, $dy=1.2$ mm; Maximum value of SAR (interpolated) = 0.078 W/kg

Body Edge 1 ANT 1 (DSSS) 24-Aug-2015/Channel 13 Test/Zoom Scan (31x31x36)/Cube 0: Interpolated grid: $dx=1.0$ mm, $dy=1.0$ mm, $dz=1.0$ mm; Reference Value = 5.098 V/m; **Power Drift = 0.07 dB**

Averaged SAR: SAR(1g) = 0.069 W/kg; SAR(10g) = 0.030 W/kg

Maximum value of SAR (interpolated) = 0.184 W/kg

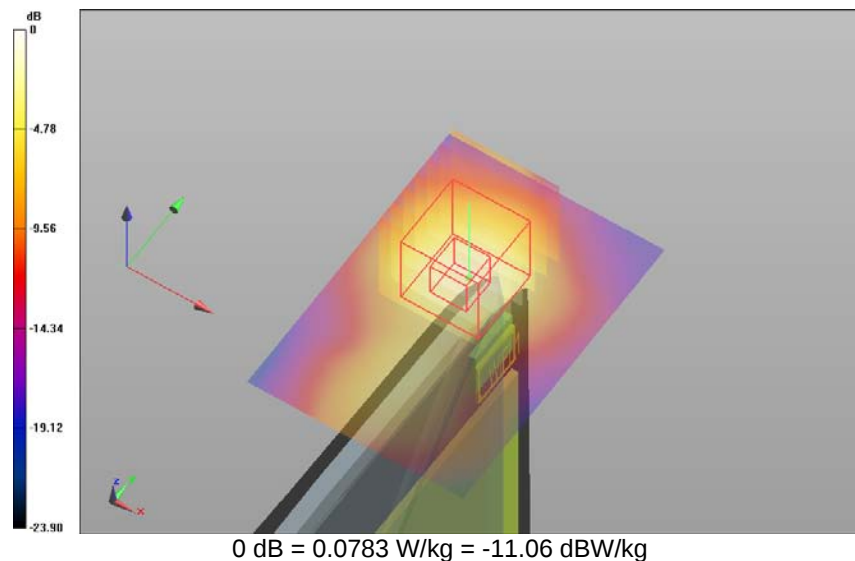


SAR Measurement Plot 17



Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

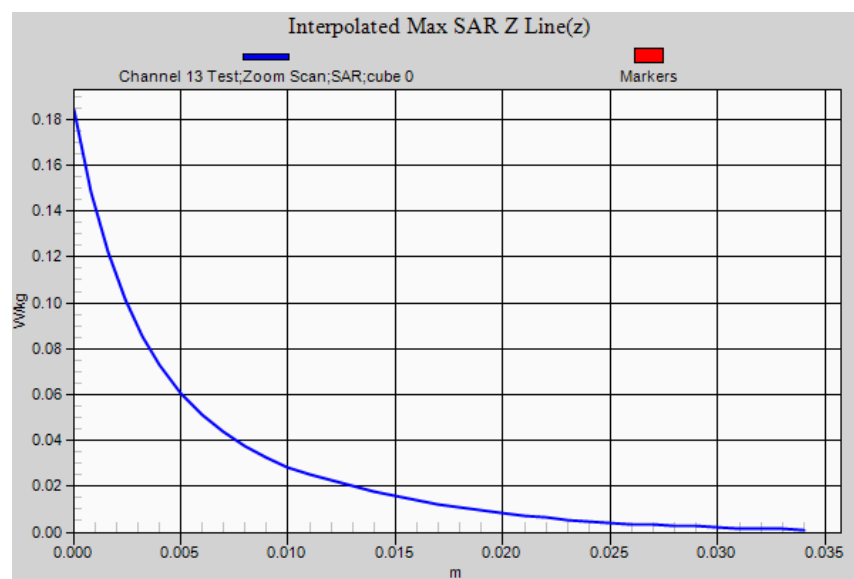

Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

Test Lab: EMCTech

Test File: M150814 2450 MHz WLAN FCC.da52:6

DUT Name: Fujitsu Tablet with 11 abgn/ac WLAN, Type: 8260NGW, Serial: WFM (MAC):A4:34:D9:09:92:96**Configuration: Body Edge 1 ANT 2 (DSSS) 24-Aug-2015**

Communication System: 0 - DSSS 2450 MHz 1Mbps; Communication System Band: ISM 2.4 GHz; Frequency: 2412 MHz, Communication System PAR: 0.00 dB; PMF: 1.00; Duty Cycle: 1:1.00
 Medium Parameters used: $f=2412$ MHz; $\sigma = 1.89$ S/m; $\epsilon_r = 52.2$; $\rho = 1000.0$ g/cm³
 Phantom section: Flat Section

DASY Configuration:


Probe: ET3DV6 - SN1380; ConvF: (4.1,4.1,4.1); Calibrated: 11/12/2014;
 Sensor-Surface: 4 mm (Mechanical Surface Detection)
 Electronics: DAE3 Sn442; Calibrated: 3/12/2014
 Phantom: ELI v4.0 (30deg probe tilt); Type: QDOVA001BB; Serial: TP:1101
 DASY52 52.8.8(1222); SEMCAD X Version 14.6.10 (7331)

Body Edge 1 ANT 2 (DSSS) 24-Aug-2015/Channel 1 Test/Area Scan (51x71x1): Interpolated grid: $dx=1.2$ mm, $dy=1.2$ mm; Maximum value of SAR (interpolated) = 0.156 W/kg

Body Edge 1 ANT 2 (DSSS) 24-Aug-2015/Channel 1 Test/Zoom Scan (31x31x36)/Cube 0: Interpolated grid: $dx=1.0$ mm, $dy=1.0$ mm, $dz=1.0$ mm; Reference Value = 8.706 V/m; **Power Drift = -0.01 dB**

Averaged SAR: SAR(1g) = 0.146 W/kg; SAR(10g) = 0.075 W/kg

Maximum value of SAR (interpolated) = 0.389 W/kg

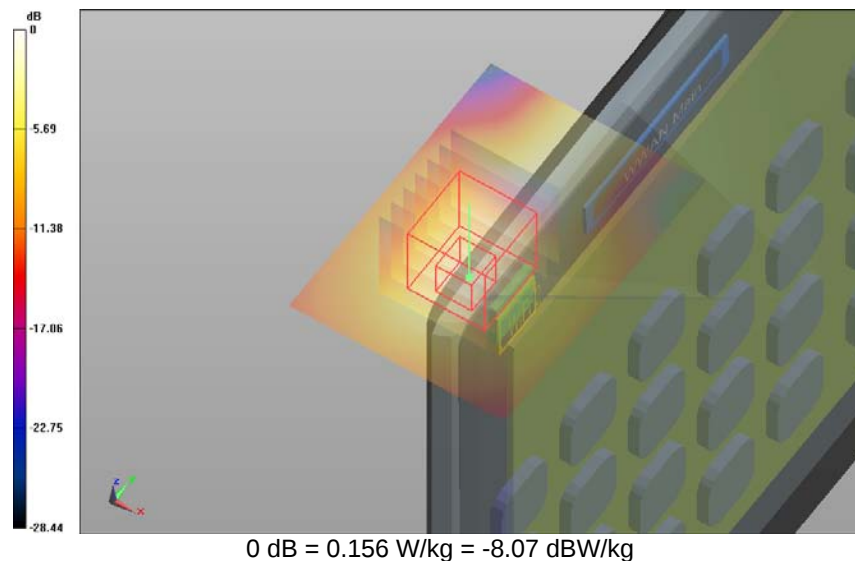


SAR Measurement Plot 18



Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

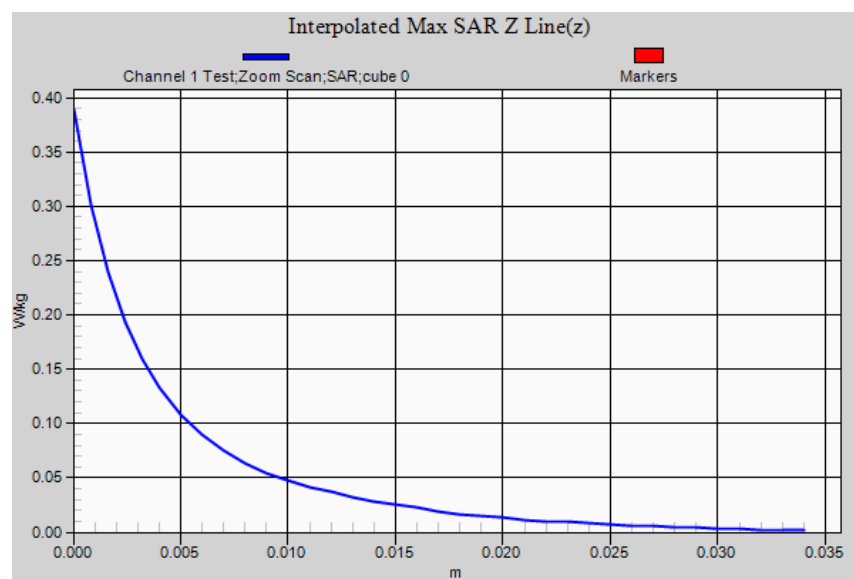

Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

Test Lab: EMCTech

Test File: M150814 2450 MHz WLAN FCC.da52:6

DUT Name: Fujitsu Tablet with 11 abgn/ac WLAN, Type: 8260NGW, Serial: WFM (MAC):A4:34:D9:09:92:96**Configuration: Body Edge 1 ANT 2 (DSSS) 24-Aug-2015**

Communication System: 0 - DSSS 2450 MHz 1Mbps; Communication System Band: ISM 2.4 GHz; Frequency: 2437 MHz, Communication System PAR: 0.00 dB; PMF: 1.00; Duty Cycle: 1:1.00
 Medium Parameters used: $f=2437$ MHz; $\sigma = 1.93$ S/m; $\epsilon_r = 52.0$; $\rho = 1000.0\text{g/cm}^3$
 Phantom section: Flat Section

DASY Configuration:


Probe: ET3DV6 - SN1380; ConvF: (4.1,4.1,4.1); Calibrated: 11/12/2014;
 Sensor-Surface: 4 mm (Mechanical Surface Detection (Locations From Previous Scan Used))
 Electronics: DAE3 Sn442; Calibrated: 3/12/2014
 Phantom: ELI v4.0 (30deg probe tilt); Type: QDOVA001BB; Serial: TP:1101
 DASY52 52.8.8(1222); SEMCAD X Version 14.6.10 (7331)

Body Edge 1 ANT 2 (DSSS) 24-Aug-2015/Channel 6 Test/Area Scan (51x71x1): Interpolated grid: $dx=1.2$ mm, $dy=1.2$ mm; Maximum value of SAR (interpolated) = 0.173 W/kg

Body Edge 1 ANT 2 (DSSS) 24-Aug-2015/Channel 6 Test/Zoom Scan (31x31x36)/Cube 0: Interpolated grid: $dx=1.0$ mm, $dy=1.0$ mm, $dz=1.0$ mm; Reference Value = 9.019 V/m; **Power Drift = 0.01 dB**

Averaged SAR: SAR(1g) = 0.165 W/kg; SAR(10g) = 0.083 W/kg

Maximum value of SAR (interpolated) = 0.435 W/kg

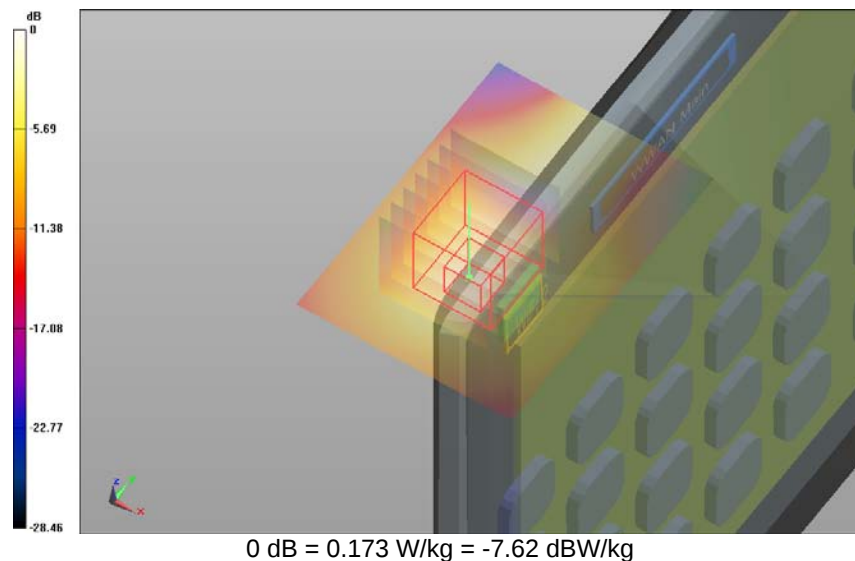


SAR Measurement Plot 19



Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

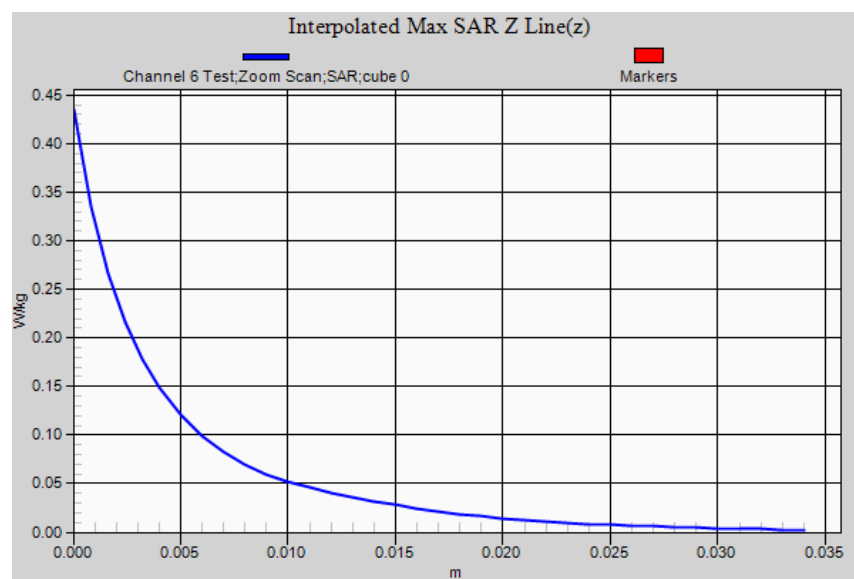

Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

Test Lab: EMCTech

Test File: M150814 2450 MHz WLAN FCC.da52:6

DUT Name: Fujitsu Tablet with 11 abgn/ac WLAN, Type: 8260NGW, Serial: WFM (MAC):A4:34:D9:09:92:96**Configuration: Body Edge 1 ANT 2 (DSSS) 24-Aug-2015**

Communication System: 0 - DSSS 2450 MHz 1Mbps; Communication System Band: ISM 2.4 GHz; Frequency: 2442 MHz, Communication System PAR: 0.00 dB; PMF: 1.00; Duty Cycle: 1:1.00
 Medium Parameters used: $f=2442$ MHz; $\sigma = 1.94$ S/m; $\epsilon_r = 52.0$; $\rho = 1000.0$ g/cm³
 Phantom section: Flat Section

DASY Configuration:


Probe: ET3DV6 - SN1380; ConvF: (4.1,4.1,4.1); Calibrated: 11/12/2014;
 Sensor-Surface: 4 mm (Mechanical Surface Detection)
 Electronics: DAE3 Sn442; Calibrated: 3/12/2014
 Phantom: ELI v4.0 (30deg probe tilt); Type: QDOVA001BB; Serial: TP:1101
 DASY52 52.8.8(1222); SEMCAD X Version 14.6.10 (7331)

Body Edge 1 ANT 2 (DSSS) 24-Aug-2015/Channel 7 Test/Area Scan (51x71x1): Interpolated grid: $dx=1.2$ mm, $dy=1.2$ mm; Maximum value of SAR (interpolated) = 0.167 W/kg

Body Edge 1 ANT 2 (DSSS) 24-Aug-2015/Channel 7 Test/Zoom Scan (31x31x36)/Cube 0: Interpolated grid: $dx=1.0$ mm, $dy=1.0$ mm, $dz=1.0$ mm; Reference Value = 9.239 V/m; **Power Drift = -0.04 dB**

Averaged SAR: SAR(1g) = 0.162 W/kg; SAR(10g) = 0.078 W/kg

Maximum value of SAR (interpolated) = 0.434 W/kg

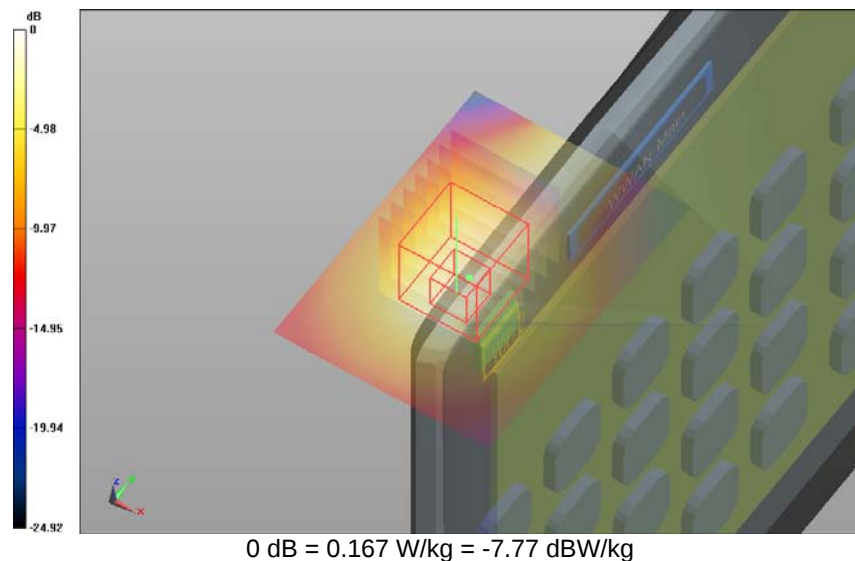


SAR Measurement Plot 20



Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

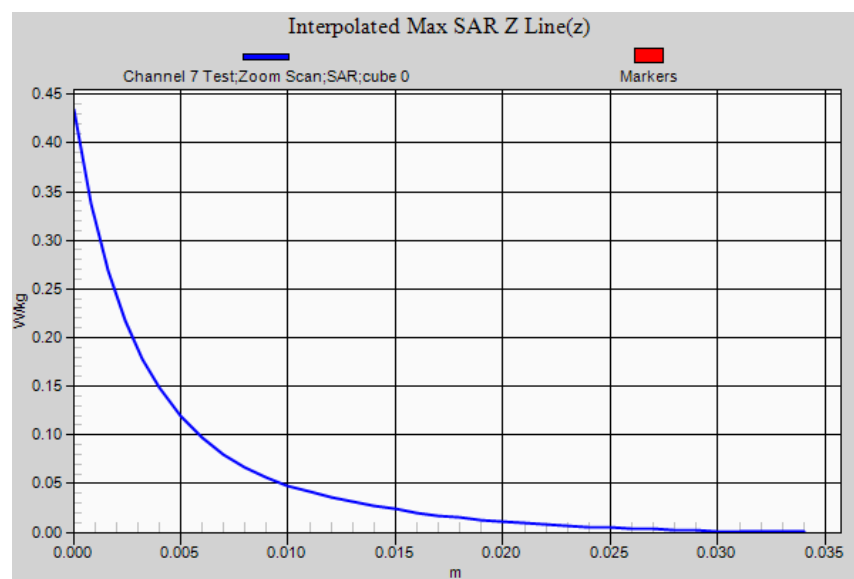

Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

Test Lab: EMCTech

Test File: M150814 2450 MHz WLAN FCC.da52:6

DUT Name: Fujitsu Tablet with 11 abgn/ac WLAN, Type: 8260NGW, Serial: WFM (MAC):A4:34:D9:09:92:96**Configuration: Body Edge 1 ANT 2 (DSSS) 24-Aug-2015**

Communication System: 0 - DSSS 2450 MHz 1Mbps; Communication System Band: ISM 2.4 GHz; Frequency: 2467 MHz, Communication System PAR: 0.00 dB; PMF: 1.00; Duty Cycle: 1:1.00
 Medium Parameters used: $f=2467$ MHz; $\sigma = 1.97$ S/m; $\epsilon_r = 51.9$; $\rho = 1000.0$ g/cm³
 Phantom section: Flat Section

DASY Configuration:


Probe: ET3DV6 - SN1380; ConvF: (4.1,4.1,4.1); Calibrated: 11/12/2014;
 Sensor-Surface: 4 mm (Mechanical Surface Detection (Locations From Previous Scan Used))
 Electronics: DAE3 Sn442; Calibrated: 3/12/2014
 Phantom: ELI v4.0 (30deg probe tilt); Type: QDOVA001BB; Serial: TP:1101
 DASY52 52.8.8(1222); SEMCAD X Version 14.6.10 (7331)

Body Edge 1 ANT 2 (DSSS) 24-Aug-2015/Channel 12 Test/Area Scan (51x71x1): Interpolated grid: $dx=1.2$ mm, $dy=1.2$ mm; Maximum value of SAR (interpolated) = 0.186 W/kg

Body Edge 1 ANT 2 (DSSS) 24-Aug-2015/Channel 12 Test/Zoom Scan (31x31x36)/Cube 0: Interpolated grid: $dx=1.0$ mm, $dy=1.0$ mm, $dz=1.0$ mm; Reference Value = 9.078 V/m; **Power Drift = 0.04 dB**

Averaged SAR: SAR(1g) = 0.174 W/kg; SAR(10g) = 0.087 W/kg

Maximum value of SAR (interpolated) = 0.440 W/kg

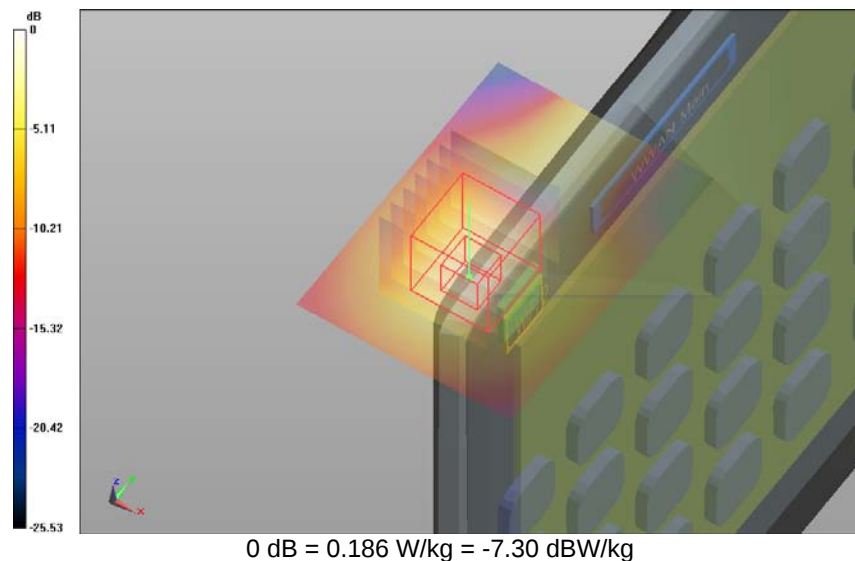


SAR Measurement Plot 21



Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

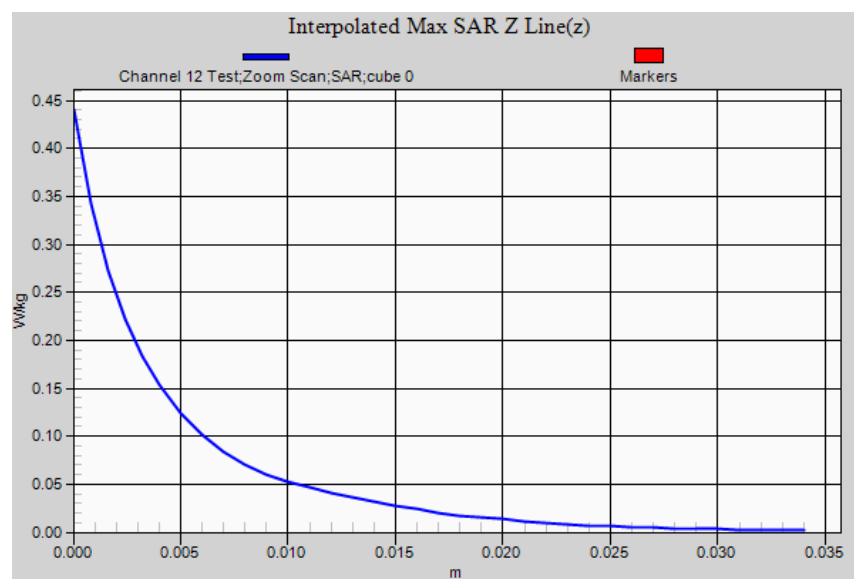

Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

Test Lab: EMCTech

Test File: M150814 2450 MHz WLAN FCC.da52:6

DUT Name: Fujitsu Tablet with 11 abgn/ac WLAN, Type: 8260NGW, Serial: WFM (MAC):A4:34:D9:09:92:96**Configuration: Body Edge 1 ANT 2 (DSSS) 24-Aug-2015**

Communication System: 0 - DSSS 2450 MHz 1Mbps (0); Communication System Band: ISM 2.4 GHz; Frequency: 2472 MHz, Communication System PAR: 0.00 dB; PMF: 1.00; Duty Cycle: 1:1.00
 Medium Parameters used: $f=2472$ MHz; $\sigma = 1.97$ S/m; $\epsilon_r = 51.8$; $\rho = 1000.0\text{g/cm}^3$
 Phantom section: Flat Section

DASY Configuration:


Probe: ET3DV6 - SN1380; ConvF: (4.1,4.1,4.1); Calibrated: 11/12/2014;
 Sensor-Surface: 4 mm (Mechanical Surface Detection (Locations From Previous Scan Used))
 Electronics: DAE3 Sn442; Calibrated: 3/12/2014
 Phantom: ELI v4.0 (30deg probe tilt); Type: QDOVA001BB; Serial: TP:1101
 DASY52 52.8.8(1222); SEMCAD X Version 14.6.10 (7331)

Body Edge 1 ANT 2 (DSSS) 24-Aug-2015/Channel 13 Test/Area Scan (51x71x1): Interpolated grid: $dx=1.2$ mm, $dy=1.2$ mm; Maximum value of SAR (interpolated) = 0.055 W/kg

Body Edge 1 ANT 2 (DSSS) 24-Aug-2015/Channel 13 Test/Zoom Scan (31x31x36)/Cube 0: Interpolated grid: $dx=1.0$ mm, $dy=1.0$ mm, $dz=1.0$ mm; Reference Value = 5.000 V/m; **Power Drift = -0.03 dB**

Averaged SAR: SAR(1g) = 0.052 W/kg; SAR(10g) = 0.026 W/kg

Maximum value of SAR (interpolated) = 0.130 W/kg

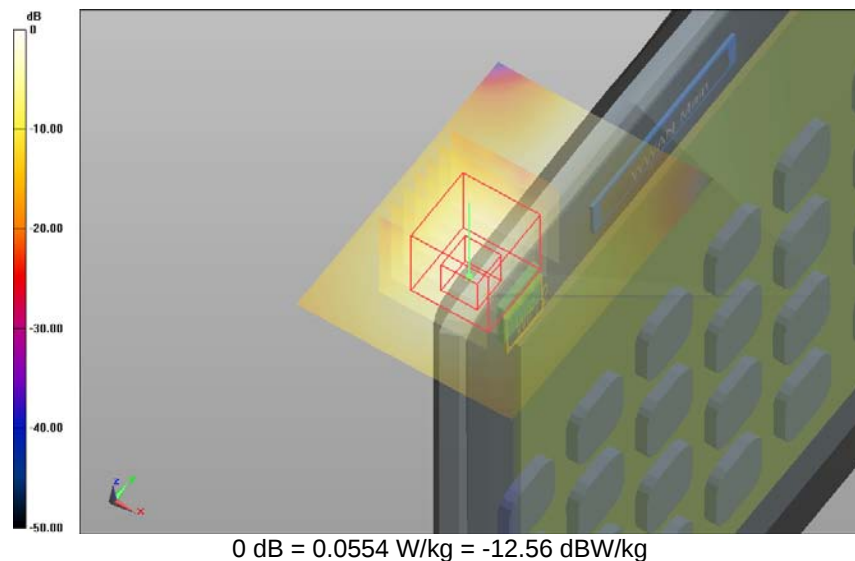


SAR Measurement Plot 22



Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

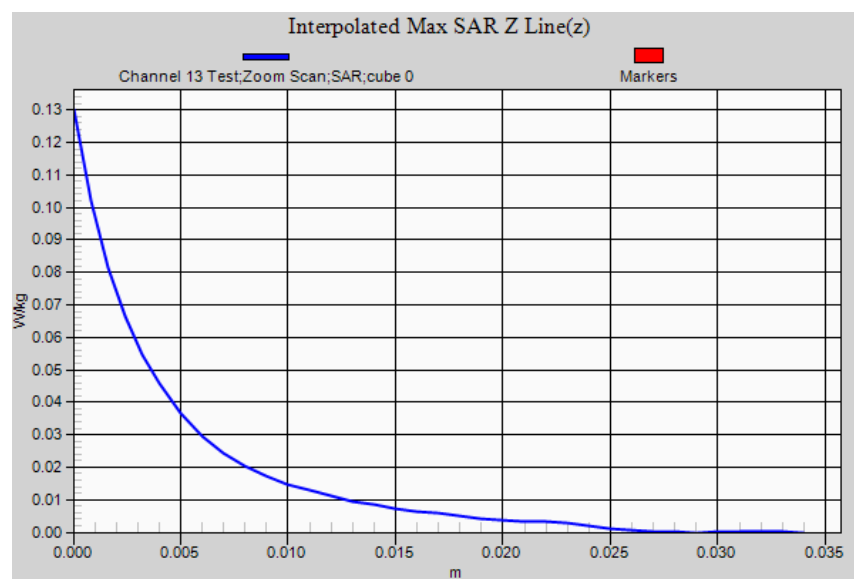

Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

Test Lab: EMCTech

Test File: M150814 2450 MHz WLAN FCC.da52:7

DUT Name: Fujitsu Tablet with 11 abgn/ac WLAN, Type: 8260NGW, Serial: WFM (MAC):A4:34:D9:09:92:96**Configuration: Body Edge 2 ANT 1 (DSSS) 24-Aug-2015**

Communication System: 0 - DSSS 2450 MHz 1Mbps; Communication System Band: ISM 2.4 GHz; Frequency: 2442 MHz, Communication System PAR: 0.00 dB; PMF: 1.00; Duty Cycle: 1:1.00
 Medium Parameters used: $f=2442$ MHz; $\sigma = 1.94$ S/m; $\epsilon_r = 52.0$; $\rho = 1000.0$ g/cm³
 Phantom section: Flat Section

DASY Configuration:


Probe: ET3DV6 - SN1380; ConvF: (4.1,4.1,4.1); Calibrated: 11/12/2014;
 Sensor-Surface: 4 mm (Mechanical Surface Detection)
 Electronics: DAE3 Sn442; Calibrated: 3/12/2014
 Phantom: ELI v4.0 (30deg probe tilt); Type: QDOVA001BB; Serial: TP:1101
 DASY52 52.8.8(1222); SEMCAD X Version 14.6.10 (7331)

Body Edge 2 ANT 1 (DSSS) 24-Aug-2015/Channel 7 Test/Area Scan (51x71x1): Interpolated grid: $dx=1.2$ mm, $dy=1.2$ mm; Maximum value of SAR (interpolated) = 0.256 W/kg

Body Edge 2 ANT 1 (DSSS) 24-Aug-2015/Channel 7 Test/Zoom Scan (31x31x36)/Cube 0: Interpolated grid: $dx=1.0$ mm, $dy=1.0$ mm, $dz=1.0$ mm; Reference Value = 10.410 V/m; **Power Drift = -0.10 dB**

Averaged SAR: SAR(1g) = 0.205 W/kg; SAR(10g) = 0.088 W/kg

Maximum value of SAR (interpolated) = 0.535 W/kg

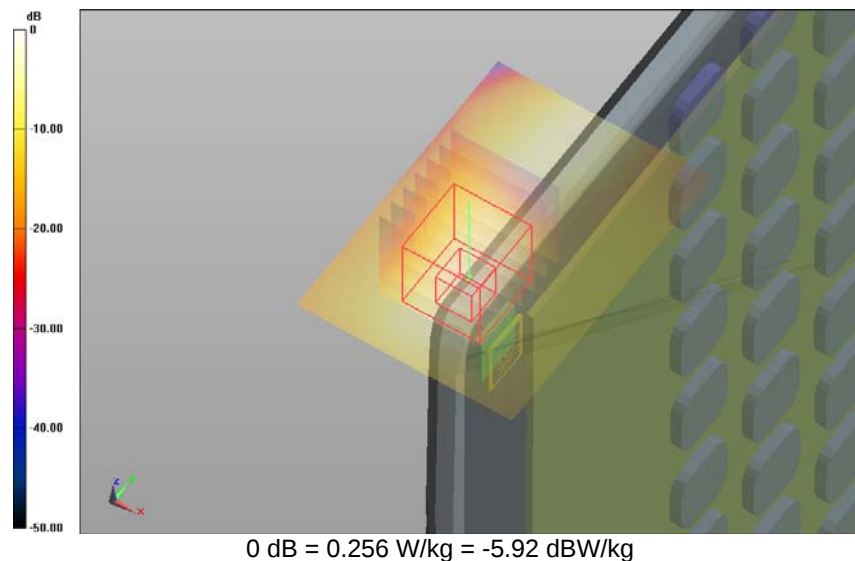


SAR Measurement Plot 23



Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

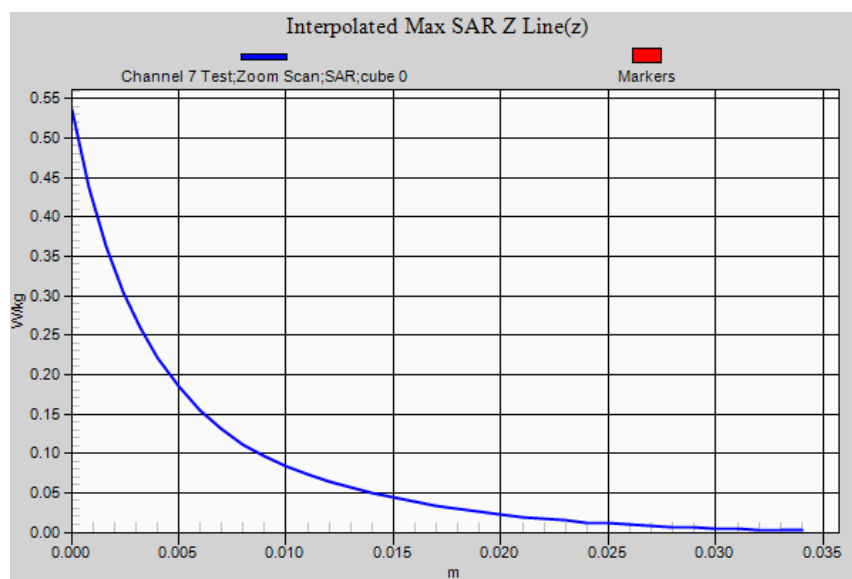

Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

Test Lab: EMCTech

Test File: M150814 2450 MHz WLAN FCC.da52:9

DUT Name: Fujitsu Tablet with 11 abgn/ac WLAN, Type: 8260NGW, Serial: WFM (MAC):A4:34:D9:09:92:96**Configuration: Body Edge 4 ANT 2 (DSSS) 24-Aug-2015**

Communication System: 0 - DSSS 2450 MHz 1Mbps; Communication System Band: ISM 2.4 GHz; Frequency: 2412 MHz, Communication System PAR: 0.00 dB; PMF: 1.00; Duty Cycle: 1:1.00
 Medium Parameters used: $f=2412$ MHz; $\sigma = 1.89$ S/m; $\epsilon_r = 52.2$; $\rho = 1000.0$ g/cm³
 Phantom section: Flat Section

DASY Configuration:


Probe: ET3DV6 - SN1380; ConvF: (4.1,4.1,4.1); Calibrated: 11/12/2014;
 Sensor-Surface: 4 mm (Mechanical Surface Detection)
 Electronics: DAE3 Sn442; Calibrated: 3/12/2014
 Phantom: ELI v4.0 (30deg probe tilt); Type: QDOVA001BB; Serial: TP:1101
 DASY52 52.8.8(1222); SEMCAD X Version 14.6.10 (7331)

Body Edge 4 ANT 2 (DSSS) 24-Aug-2015/Channel 1 Test/Area Scan (51x71x1): Interpolated grid: $dx=1.2$ mm, $dy=1.2$ mm; Maximum value of SAR (interpolated) = 0.273 W/kg

Body Edge 4 ANT 2 (DSSS) 24-Aug-2015/Channel 1 Test/Zoom Scan (31x31x36)/Cube 0: Interpolated grid: $dx=1.0$ mm, $dy=1.0$ mm, $dz=1.0$ mm; Reference Value = 9.324 V/m; **Power Drift = 0.03 dB**

Averaged SAR: SAR(1g) = 0.244 W/kg; SAR(10g) = 0.106 W/kg

Maximum value of SAR (interpolated) = 0.647 W/kg

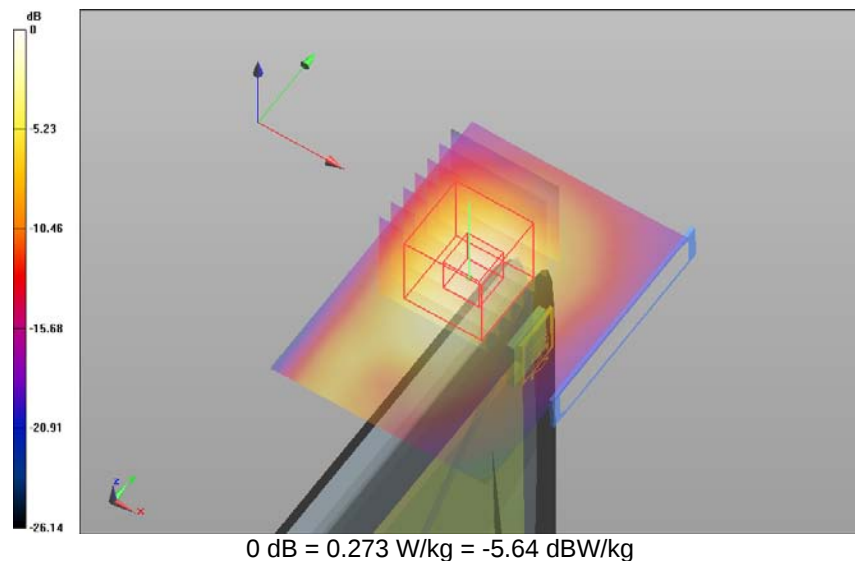


SAR Measurement Plot 24



Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

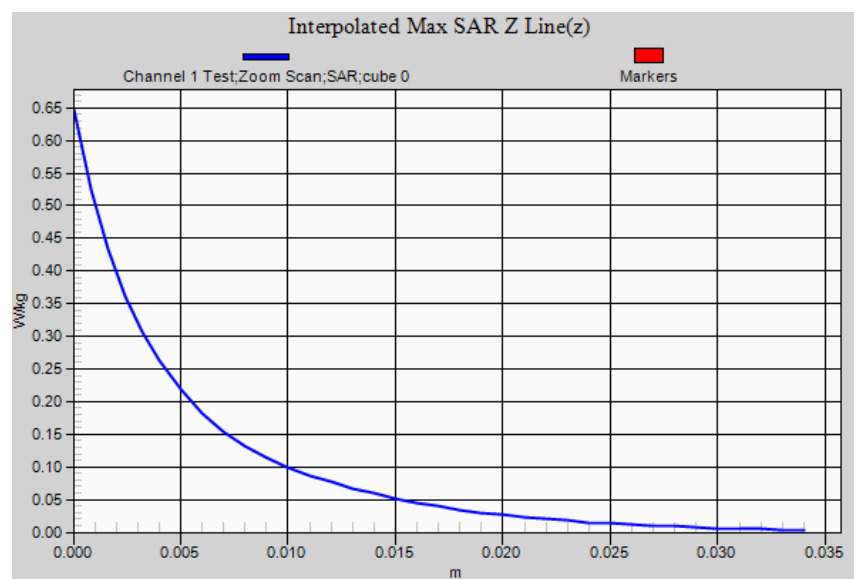

Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

Test Lab: EMCTech

Test File: M150814 2450 MHz WLAN FCC.da52:9

DUT Name: Fujitsu Tablet with 11 abgn/ac WLAN, Type: 8260NGW, Serial: WFM (MAC):A4:34:D9:09:92:96**Configuration: Body Edge 4 ANT 2 (DSSS) 24-Aug-2015**

Communication System: 0 - DSSS 2450 MHz 1Mbps; Communication System Band: ISM 2.4 GHz; Frequency: 2437 MHz, Communication System PAR: 0.00 dB; PMF: 1.00; Duty Cycle: 1:1.00
 Medium Parameters used: $f=2437$ MHz; $\sigma = 1.93$ S/m; $\epsilon_r = 52.0$; $\rho = 1000.0\text{g/cm}^3$
 Phantom section: Flat Section

DASY Configuration:


Probe: ET3DV6 - SN1380; ConvF: (4.1,4.1,4.1); Calibrated: 11/12/2014;
 Sensor-Surface: 4 mm (Mechanical Surface Detection)
 Electronics: DAE3 Sn442; Calibrated: 3/12/2014
 Phantom: ELI v4.0 (30deg probe tilt); Type: QDOVA001BB; Serial: TP:1101
 DASY52 52.8.8(1222); SEMCAD X Version 14.6.10 (7331)

Body Edge 4 ANT 2 (DSSS) 24-Aug-2015/Channel 6 Test/Area Scan (51x71x1): Interpolated grid: $dx=1.2$ mm, $dy=1.2$ mm; Maximum value of SAR (interpolated) = 0.344 W/kg

Body Edge 4 ANT 2 (DSSS) 24-Aug-2015/Channel 6 Test/Zoom Scan (31x31x36)/Cube 0: Interpolated grid: $dx=1.0$ mm, $dy=1.0$ mm, $dz=1.0$ mm; Reference Value = 10.009 V/m; **Power Drift = 0.01 dB**

Averaged SAR: SAR(1g) = 0.308 W/kg; SAR(10g) = 0.132 W/kg

Maximum value of SAR (interpolated) = 0.858 W/kg

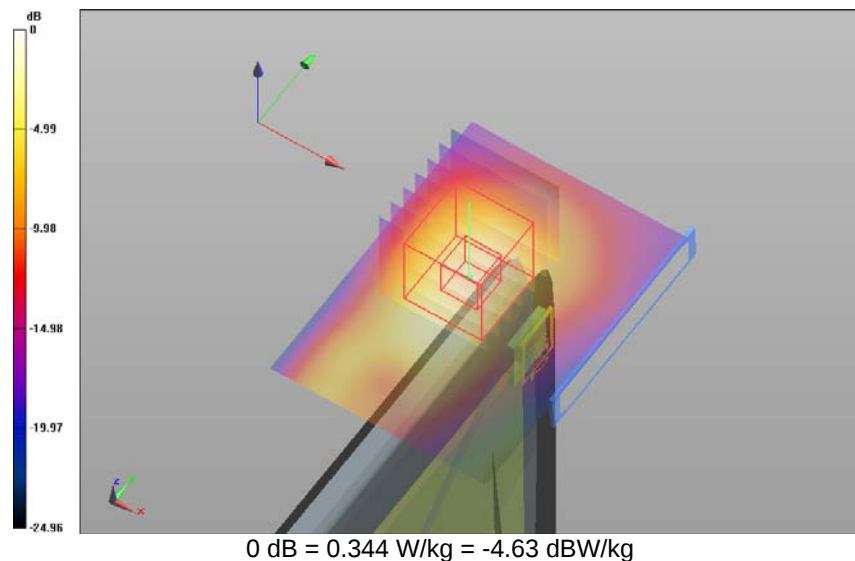


SAR Measurement Plot 25



Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

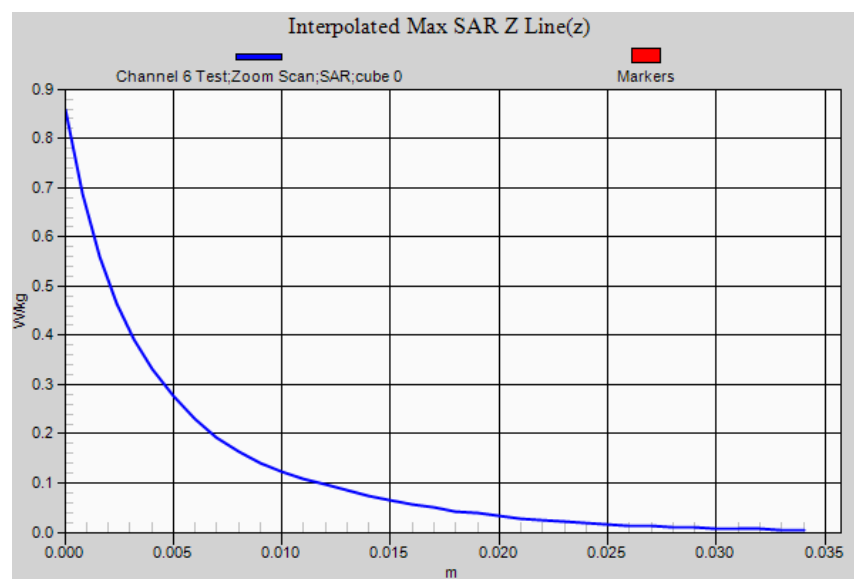

Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

Test Lab: EMCTech

Test File: M150814 2450 MHz WLAN FCC.da52:9

DUT Name: Fujitsu Tablet with 11 abgn/ac WLAN, Type: 8260NGW, Serial: WFM (MAC):A4:34:D9:09:92:96**Configuration: Body Edge 4 ANT 2 (DSSS) 24-Aug-2015**

Communication System: 0 - DSSS 2450 MHz 1Mbps; Communication System Band: ISM 2.4 GHz; Frequency: 2442 MHz, Communication System PAR: 0.00 dB; PMF: 1.00; Duty Cycle: 1:1.00
 Medium Parameters used: $f=2442$ MHz; $\sigma = 1.94$ S/m; $\epsilon_r = 52.0$; $\rho = 1000.0$ g/cm³
 Phantom section: Flat Section

DASY Configuration:


Probe: ET3DV6 - SN1380; ConvF: (4.1,4.1,4.1); Calibrated: 11/12/2014;
 Sensor-Surface: 4 mm (Mechanical Surface Detection)
 Electronics: DAE3 Sn442; Calibrated: 3/12/2014
 Phantom: ELI v4.0 (30deg probe tilt); Type: QDOVA001BB; Serial: TP:1101
 DASY52 52.8.8(1222); SEMCAD X Version 14.6.10 (7331)

Body Edge 4 ANT 2 (DSSS) 24-Aug-2015/Channel 7 Test/Area Scan (51x71x1): Interpolated grid: dx=1.2 mm, dy=1.2 mm; Maximum value of SAR (interpolated) = 0.339 W/kg

Body Edge 4 ANT 2 (DSSS) 24-Aug-2015/Channel 7 Test/Zoom Scan (31x31x36)/Cube 0: Interpolated grid: dx=1.0 mm, dy=1.0 mm, dz=1.0 mm; Reference Value = 10.426 V/m; **Power Drift = 0.16 dB**

Averaged SAR: SAR(1g) = 0.303 W/kg; SAR(10g) = 0.129 W/kg

Maximum value of SAR (interpolated) = 0.786 W/kg

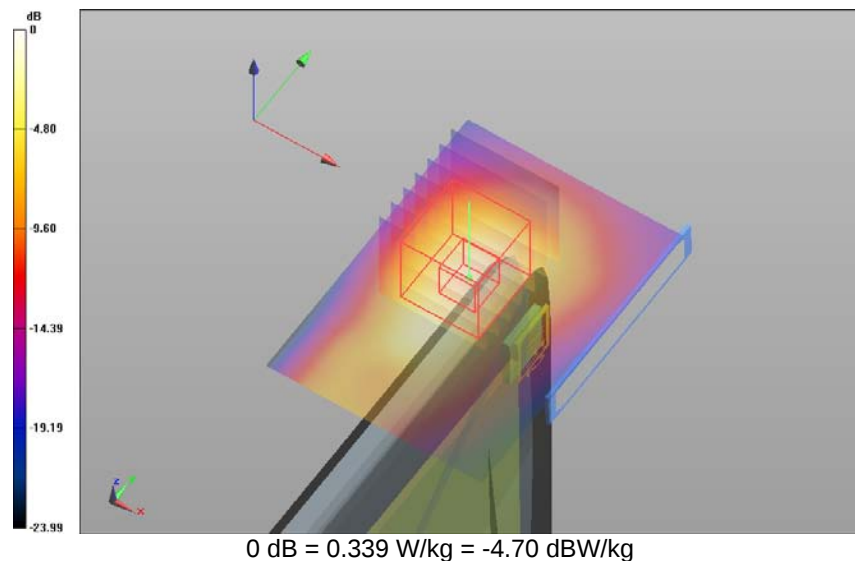


SAR Measurement Plot 26



Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

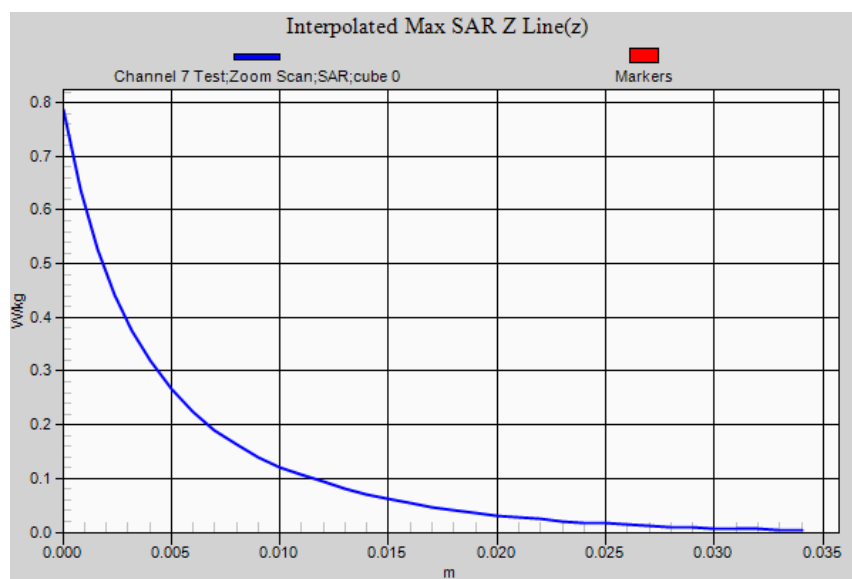

Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

Test Lab: EMCTech

Test File: M150814 2450 MHz WLAN FCC.da52:9

DUT Name: Fujitsu Tablet with 11 abgn/ac WLAN, Type: 8260NGW, Serial: WFM (MAC):A4:34:D9:09:92:96**Configuration: Body Edge 4 ANT 2 (DSSS) 24-Aug-2015**

Communication System: 0 - DSSS 2450 MHz 1Mbps; Communication System Band: ISM 2.4 GHz; Frequency: 2467 MHz, Communication System PAR: 0.00 dB; PMF: 1.00; Duty Cycle: 1:1.00
 Medium Parameters used: $f=2467$ MHz; $\sigma = 1.97$ S/m; $\epsilon_r = 51.9$; $\rho = 1000.0$ g/cm³
 Phantom section: Flat Section

DASY Configuration:


Probe: ET3DV6 - SN1380; ConvF: (4.1,4.1,4.1); Calibrated: 11/12/2014;
 Sensor-Surface: 4 mm (Mechanical Surface Detection)
 Electronics: DAE3 Sn442; Calibrated: 3/12/2014
 Phantom: ELI v4.0 (30deg probe tilt); Type: QDOVA001BB; Serial: TP:1101
 DASY52 52.8.8(1222); SEMCAD X Version 14.6.10 (7331)

Body Edge 4 ANT 2 (DSSS) 24-Aug-2015/Channel 12 Test/Area Scan (51x71x1): Interpolated grid: $dx=1.2$ mm, $dy=1.2$ mm; Maximum value of SAR (interpolated) = 0.390 W/kg

Body Edge 4 ANT 2 (DSSS) 24-Aug-2015/Channel 12 Test/Zoom Scan (31x31x36)/Cube 0: Interpolated grid: $dx=1.0$ mm, $dy=1.0$ mm, $dz=1.0$ mm; Reference Value = 10.038 V/m; **Power Drift = 0.00 dB**

Averaged SAR: SAR(1g) = 0.338 W/kg; SAR(10g) = 0.142 W/kg

Maximum value of SAR (interpolated) = 0.945 W/kg

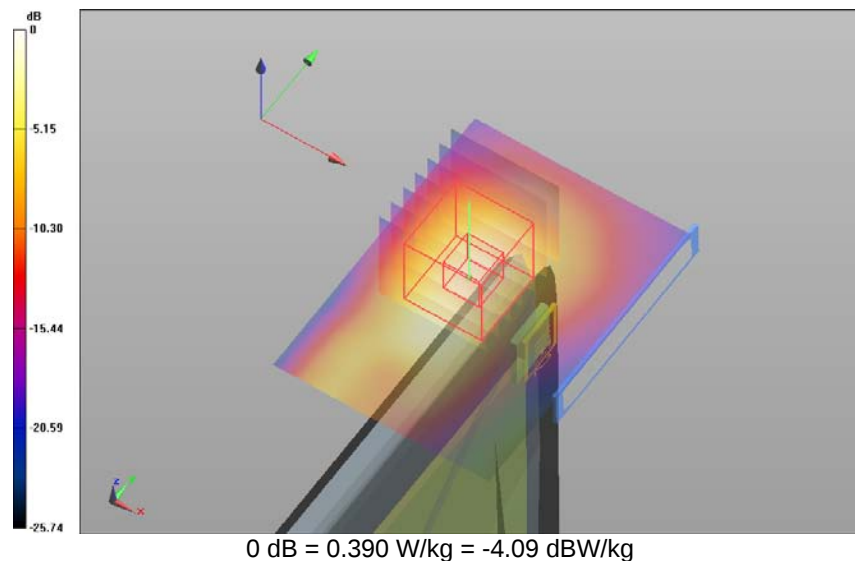


SAR Measurement Plot 27



Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

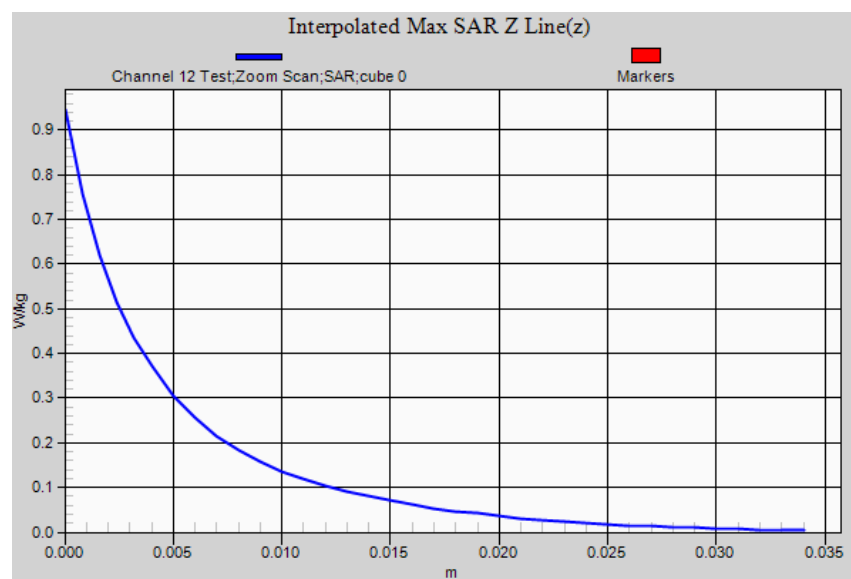

Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

Test Lab: EMCTech

Test File: M150814 2450 MHz WLAN FCC.da52:9

DUT Name: Fujitsu Tablet with 11 abgn/ac WLAN, Type: 8260NGW, Serial: WFM (MAC):A4:34:D9:09:92:96**Configuration: Body Edge 4 ANT 2 (DSSS) 24-Aug-2015**

Communication System: 0 - DSSS 2450 MHz 1Mbps (0); Communication System Band: ISM 2.4 GHz; Frequency: 2472 MHz, Communication System PAR: 0.00 dB; PMF: 1.00; Duty Cycle: 1:1.00
 Medium Parameters used: $f=2472$ MHz; $\sigma = 1.97$ S/m; $\epsilon_r = 51.8$; $\rho = 1000.0$ g/cm³
 Phantom section: Flat Section

DASY Configuration:


Probe: ET3DV6 - SN1380; ConvF: (4.1,4.1,4.1); Calibrated: 11/12/2014;
 Sensor-Surface: 4 mm (Mechanical Surface Detection)
 Electronics: DAE3 Sn442; Calibrated: 3/12/2014
 Phantom: ELI v4.0 (30deg probe tilt); Type: QDOVA001BB; Serial: TP:1101
 DASY52 52.8.8(1222); SEMCAD X Version 14.6.10 (7331)

Body Edge 4 ANT 2 (DSSS) 24-Aug-2015/Channel 13 Test/Area Scan (51x71x1): Interpolated grid: $dx=1.2$ mm, $dy=1.2$ mm; Maximum value of SAR (interpolated) = 0.112 W/kg

Body Edge 4 ANT 2 (DSSS) 24-Aug-2015/Channel 13 Test/Zoom Scan (31x31x36)/Cube 0: Interpolated grid: $dx=1.0$ mm, $dy=1.0$ mm, $dz=1.0$ mm; Reference Value = 7.596 V/m; **Power Drift = 0.01 dB**

Averaged SAR: SAR(1g) = 0.106 W/kg; SAR(10g) = 0.047 W/kg

Maximum value of SAR (interpolated) = 0.266 W/kg

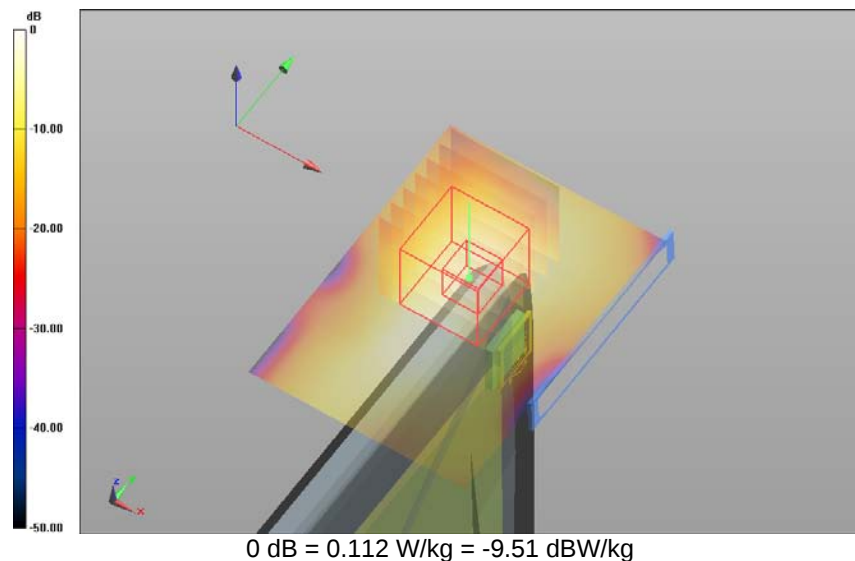


SAR Measurement Plot 28



Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

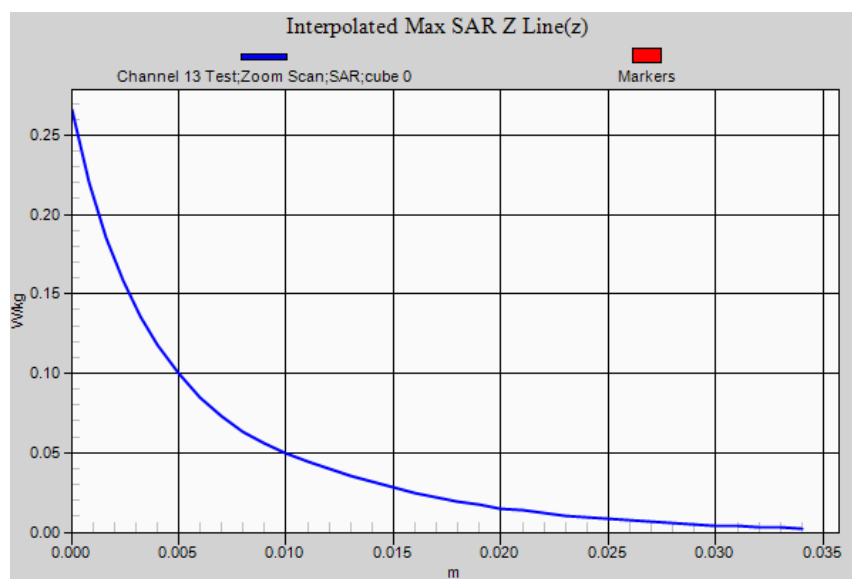

Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

Test Lab: EMCTech

Test File: M150814 2450 MHz WLAN FCC.da52:10

DUT Name: Dipole 2450 MHz, Type: DV2450V2, Serial: 724**Configuration: System Check 24-Aug-2015**

Communication System: 0 - CW; Communication System Band: 2450 MHz; Frequency: 2450 MHz,

Communication System PAR: 0.00 dB; PMF: 0.00; Duty Cycle: 1:1.00

Medium Parameters used: $f=2450$ MHz; $\sigma = 1.95$ S/m; $\epsilon_r = 52.0$; $\rho = 1000.0$ g/cm³

Phantom section: Flat Section

DASY Configuration:

Probe: ET3DV6 - SN1380; ConvF: (4.1,4.1,4.1); Calibrated: 11/12/2014;

Sensor-Surface: 4 mm (Mechanical Surface Detection)


Electronics: DAE3 Sn442; Calibrated: 3/12/2014

Phantom: ELI v4.0 (30deg probe tilt); Type: QDOVA001BB; Serial: TP:1101

DASY52 52.8.8(1222); SEMCAD X Version 14.6.10 (7331)

System Check 24-Aug-2015/Channel 1 Test/Area Scan (61x61x1): Interpolated grid: $dx=1.2$ mm, $dy=1.2$ mm; Maximum value of SAR (interpolated) = 16.100 W/kg**System Check 24-Aug-2015/Channel 1 Test/Zoom Scan (31x31x36)/Cube 0:** Interpolated grid: $dx=1.0$ mm, $dy=1.0$ mm, $dz=1.0$ mm; Reference Value = 80.434 V/m; **Power Drift = -0.10 dB****Averaged SAR: SAR(1g) = 13.400 W/kg; SAR(10g) = 6.170 W/kg**

Maximum value of SAR (interpolated) = 34.700 W/kg

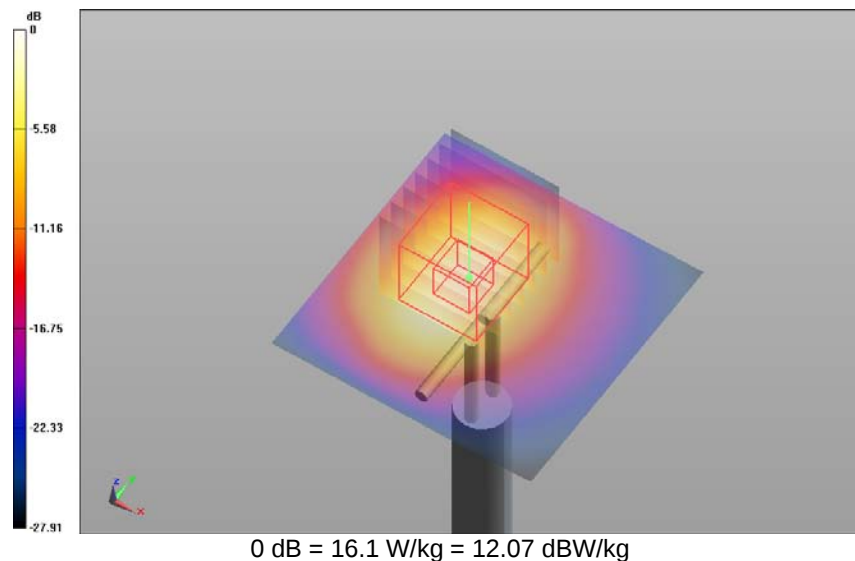


SAR Measurement Plot 29



Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

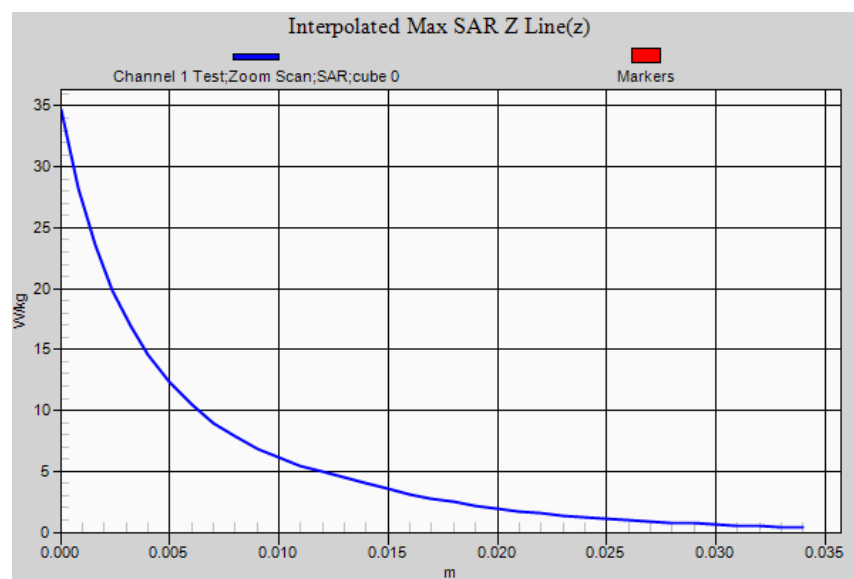

Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.