



FCC RF Test Report

APPLICANT : FUJITSU LIMITED
EQUIPMENT : STYLISTIC Q series Tablet PC
BRAND NAME : FUJITSU
MODEL NAME : Q738
FCC ID : EJE-WB0104
STANDARD : FCC Part 15 Subpart C §15.247
CLASSIFICATION : (DTS) Digital Transmission System

This is a partial report. The product was received on Nov. 18, 2017 and testing was completed on Nov. 30, 2017. We, SPORTON INTERNATIONAL INC., would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL INC., the test report shall not be reproduced except in full.

Reviewed by: Joseph Lin / Supervisor

Approved by: Jones Tsai / Manager



SPORTON INTERNATIONAL INC.

No. 52, Hwa Ya 1st Rd., Hwa Ya Technology Park, Kwei-Shan District, Tao Yuan City, Taiwan, R.O.C.

SPORTON INTERNATIONAL INC.

TEL : 886-3-327-3456

FAX : 886-3-328-4978

FCC ID : EJE-WB0104

Page Number : 1 of 16

Report Issued Date : Jan. 11, 2018

Report Version : Rev. 01

Report Template No.: BU5-FR15CWLAC MA Version 2.0



TABLE OF CONTENTS

REVISION HISTORY..... 3

SUMMARY OF TEST RESULT 4

1 GENERAL DESCRIPTION 5

 1.1 Applicant 5

 1.2 Manufacturer 5

 1.3 Product Feature of Equipment Under Test..... 5

 1.4 Modification of EUT 5

 1.5 Testing Location 6

 1.6 Applicable Standards 6

2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST 7

 2.1 Carrier Frequency and Channel 7

 2.2 Test Mode 7

 2.3 Connection Diagram of Test System 8

 2.4 Support Unit used in test configuration and system 8

 2.5 EUT Operation Test Setup 8

3 TEST RESULT 9

 3.1 Output Power Measurement 9

 3.2 Radiated Band Edges and Spurious Emission Measurement 10

 3.3 Antenna Requirements 14

4 LIST OF MEASURING EQUIPMENT 15

5 UNCERTAINTY OF EVALUATION 16

APPENDIX A. CONDUCTED TEST RESULTS

APPENDIX B. RADIATED SPURIOUS EMISSION

APPENDIX C. RADIATED SPURIOUS EMISSION PLOTS

APPENDIX D. DUTY CYCLE PLOTS

APPENDIX E. SETUP PHOTOGRAPHS



REVISION HISTORY

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FR7N1801C	Rev. 01	Initial issue of report	Jan. 11, 2018



SUMMARY OF TEST RESULT

Report Section	FCC Rule	Description	Limit	Result	Remark
3.1	15.247(b)	Power Output Measurement	$\leq 30\text{dBm}$	Pass	-
3.2	15.247(d)	Radiated Band Edges and Radiated Spurious Emission	15.209(a) & 15.247(d)	Pass	Under limit 2.96 dB at 2388.400 MHz
3.3	15.203 & 15.247(b)	Antenna Requirement	N/A	Pass	-



1 General Description

1.1 Applicant

FUJITSU LIMITED

1-1, Kamikonadaka 4-chome, Nakahara-ku, Kawasaki, 211-8588 Japan

1.2 Manufacturer

FUJITSU LIMITED

1-1, Kamikodanaka 4-chome, Nakahara-ku, Kawasaki, 211-8588 Japan

1.3 Product Feature of Equipment Under Test

Bluetooth, Wi-Fi 2.4GHz 802.11b/g/n, Wi-Fi 5GHz 802.11a/n and 60GHz

Product Specification subjective to this standard	
Integrated WLAN Module	Brand Name: Intel Model Name: 8265NGW
Antenna Type	WLAN: <Ant. 1>: PIFA Antenna <Ant. 2>: PIFA Antenna Bluetooth: PIFA Antenna 60GHz: Integral Antenna

1.4 Modification of EUT

No modifications are made to the EUT during all test items.



1.5 Testing Location

Sporton Lab is accredited to ISO 17025 by Taiwan Accreditation Foundation (TAF code : 1190) and the FCC designation No. TW1190 under the FCC 2.948(e) by Mutual Recognition Agreement (MRA) in FCC Test.

Test Site	SPORTON INTERNATIONAL INC.	
Test Site Location	No. 52, Hwa Ya 1 st Rd., Hwa Ya Technology Park, Kwei-Shan District, Tao Yuan City, Taiwan, R.O.C. TEL: +886-3-327-3456 FAX: +886-3-328-4978	
Test Site No.	Sporton Site No.	
	TH05-HY	03CH07-HY

Note: The test site complies with ANSI C63.4 2014 requirement.

1.6 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ FCC Part 15 Subpart C §15.247
- ♦ FCC KDB Publication No. 558074 D01 DTS Meas. Guidance v04
- ♦ FCC KDB 662911 D01 Multiple Transmitter Output v02r01.
- ♦ ANSI C63.10-2013

Remark: All test items were verified and recorded according to the standards and without any deviation during the test.



2 Test Configuration of Equipment Under Test

- a. The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: radiation emission (9 kHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower). For radiated measurement, pre-scanned in three orthogonal panels, X, Y, Z. The worst cases (X plane) were recorded in this report.

2.1 Carrier Frequency and Channel

Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)
2400-2483.5 MHz	1	2412	7	2442
	2	2417	8	2447
	3	2422	9	2452
	4	2427	10	2457
	5	2432	11	2462
	6	2437		

2.2 Test Mode

Final test mode of conducted test items and radiated spurious emissions are considering the modulation and worse data rates as below table.


Single Antenna

Modulation	Data Rate
802.11b	1 Mbps
802.11g	6 Mbps
802.11n HT20	MCS0
802.11n HT40	MCS0

MIMO Antenna

Modulation	Data Rate
802.11n HT20	MCS0
802.11n HT40	MCS0

2.3 Connection Diagram of Test System

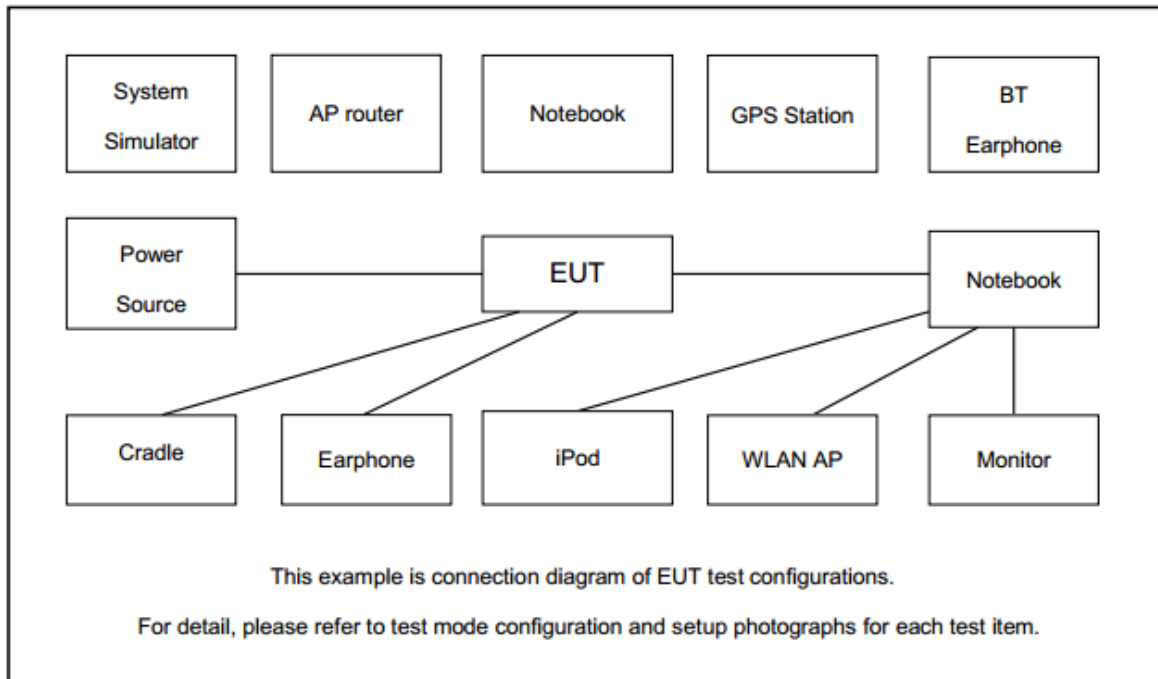

2.4 Support Unit used in test configuration and system

Item	Equipment	Trade Name	Model Name	FCC ID	Data Cable	Power Cord
1.	iPod Earphone	Apple	N/A	Verification	N/A	N/A

2.5 EUT Operation Test Setup

The RF test items, an engineering test program “Tool” was provided and enabled to make EUT continuous transmit/receive.

3 Test Result

3.1 Output Power Measurement

3.1.1 Limit of Output Power

For systems using digital modulation in the 2400-2483.5MHz, the limit for peak output power is 30dBm. If transmitting antenna with directional gain greater than 6dBi is used, the peak output power from the intentional radiator shall be reduced below the above stated value by the amount in dB that the directional gain of the antenna exceeds 6 dBi. In case of point-to-point operation, the limit has to be reduced by 1dB for every 3dB that the directional gain of the antenna exceeds 6dBi.


3.1.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.1.3 Test Procedures

1. The testing follows the Measurement Procedure of FCC KDB No. 558074 DTS D01 Meas. Guidance v04 section 9.1.2 PKPM1 Peak power meter method.
2. The RF output of EUT was connected to the power meter by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Measure the conducted output power and record the results in the test report.
5. For MIMO mode, calculation method follows FCC KDB 662911 D01 Multiple Transmitter Output v02r01.

3.1.4 Test Setup

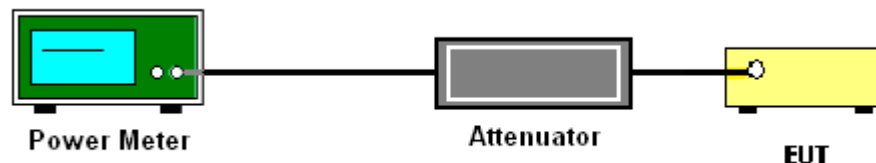

3.1.5 Test Result of Peak Output Power

Please refer to Appendix A.

3.1.6 Test Result of Average output Power (Reporting Only)

Please refer to Appendix A.



3.2 Radiated Band Edges and Spurious Emission Measurement

3.2.1 Limit of Radiated band edge and Spurious Emission Measurement

In any 100 kHz bandwidth outside the intentional radiator frequency band, all harmonics/spurious must be at least 20 dB below the highest emission level within the authorized band. If the output power of this device was measured by spectrum analyzer, the attenuation under this paragraph shall be 30 dB instead of 20 dB. In addition, radiated emissions which fall in the restricted bands must also comply with the limits as below.

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

3.2.2 Measuring Instruments


The measuring equipment is listed in the section 4 of this test report.

3.2.3 Test Procedures


1. The testing follows FCC KDB Publication No. 558074 D01 DTS Meas. Guidance v04.
2. The EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level.
3. The EUT was placed on a turntable with 0.8 meter for frequency below 1GHz and 1.5 meter for frequency above 1GHz respectively above ground.
4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
5. Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level
6. For measurement below 1GHz, If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported. Otherwise, the emission measurement will be repeated using the quasi-peak detector and reported.
7. Use the following spectrum analyzer settings:
 - (1) Span shall wide enough to fully capture the emission being measured;
 - (2) Set RBW=100 kHz for $f < 1$ GHz; VBW \geq RBW; Sweep = auto; Detector function = peak; Trace = max hold;
 - (3) Set RBW = 1 MHz, VBW= 3MHz for $f \geq 1$ GHz for peak measurement.For average measurement:
 - VBW = 10 Hz, when duty cycle is no less than 98 percent.
 - VBW $\geq 1/T$, when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.

3.2.4 Test Setup


For radiated emissions below 30MHz

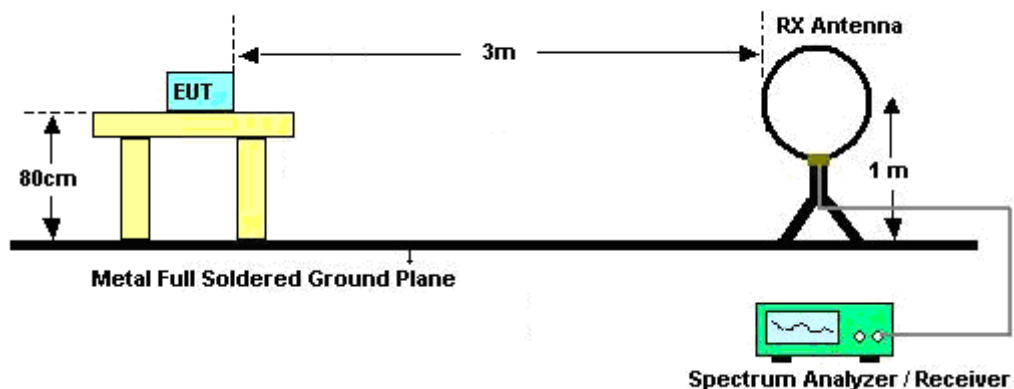

For radiated emissions from 30MHz to 1GHz

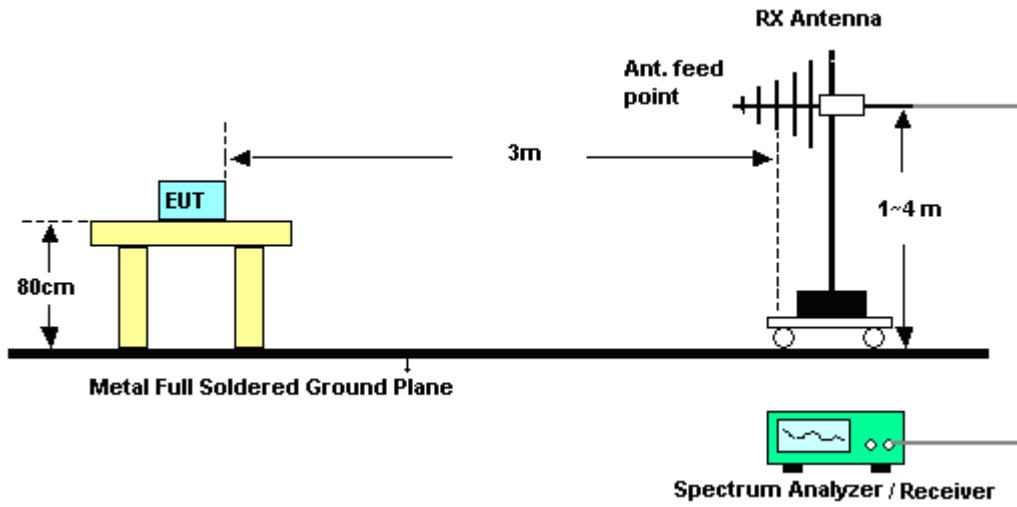

For radiated emissions above 1GHz

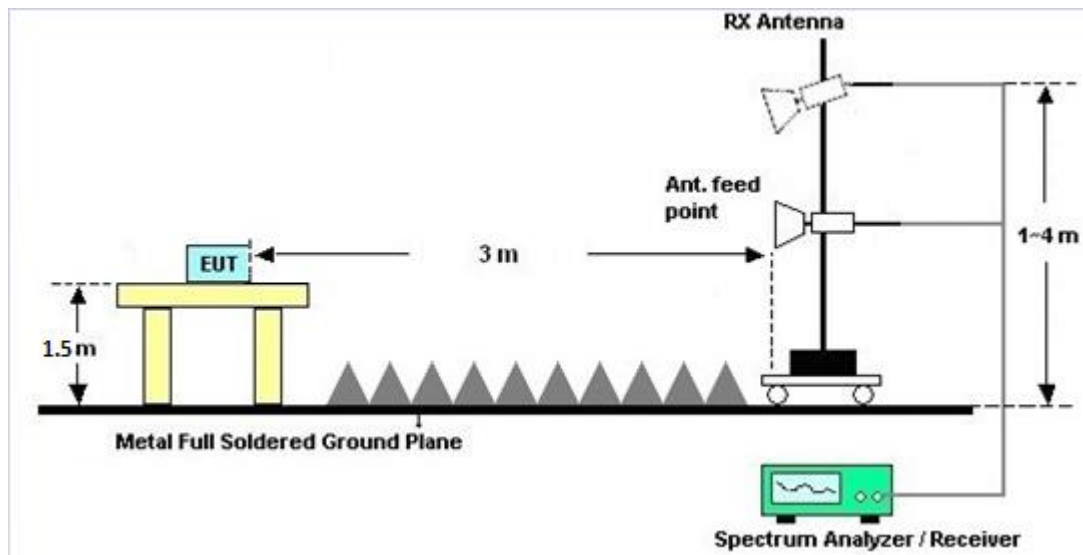



3.2.5 Test Results of Radiated Spurious Emissions (9kHz ~ 30MHz)

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line was not reported.

3.2.6 Test Result of Radiated Spurious at Band Edges

Please refer to Appendix B and C.

3.2.7 Duty Cycle

Please refer to Appendix D.

3.2.8 Test Result of Radiated Spurious Emission (30MHz ~ 10th Harmonic)

Please refer to Appendix B and C.



3.3 Antenna Requirements

3.3.1 Standard Applicable

If directional gain of transmitting Antennas is greater than 6dBi, the power shall be reduced by the same level in dB comparing to gain minus 6dBi. The use of a permanently attached Antenna or of an Antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the rule.

3.3.2 Antenna Anti-Replacement Construction

An embedded-in antenna design is used.

3.3.3 Antenna Gain

FCC KDB 662911 D01 Multiple Transmitter Output v02r01

For CDD transmissions, directional gain is calculated as

Directional gain = $G_{ANT} + \text{Array Gain}$, where Array Gain is as follows.

For power spectral density (PSD) measurements on all devices,

Array Gain = $10 \log(N_{ANT}/N_{SS}=1)$ dB.

For power measurements on IEEE 802.11 devices,

Array Gain = 0 dB (i.e., no array gain) for $N_{ANT} \leq 4$.

Directional gain may be calculated by using the formulas applicable to equal gain antennas with G_{ANT} set equal to the gain of the antenna having the highest gain;

The EUT supports CDD mode.

For power, the directional gain G_{ANT} is set equal to the antenna having the highest gain, i.e., F)2)f)i).

For PSD, the directional gain calculation is following F)2)f)ii) of KDB 662911 D01 v02r01.

The power and PSD limit should be modified if the directional gain of EUT is over 6 dBi,

The directional gain "DG" is calculated as following table.

			DG for Power (dBi)	DG for PSD (dBi)	Power Limit Reduction (dB)	PSD Limit Reduction (dB)
	Ant. 1 (dBi)	Ant. 2 (dBi)				
2.4 GHz	1.18	-0.73	1.18	3.29	0.00	0.00

$Power\ Limit\ Reduction = DG(Power) - 6dBi, (min = 0)$

$PSD\ Limit\ Reduction = DG(PSD) - 6dBi, (min = 0)$



4 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Power Meter	Anritsu	ML2495A	0932001	N/A	Sep. 26, 2017	Nov. 21, 2017	Sep. 25, 2018	Conducted (TH05-HY)
Power Sensor	Anritsu	MA2411B	0846202	300MHz~40GHz	Sep. 26, 2017	Nov. 21, 2017	Sep. 25, 2018	Conducted (TH05-HY)
Spectrum Analyzer	Rohde & Schwarz	FSP40	100057	9kHz-40GHz	Nov. 25, 2016	Nov. 21, 2017	Nov. 24, 2017	Conducted (TH05-HY)
Bilog Antenna	TESEQ	CBL 6111D&00800 N1D01N-06	35419&03	30MHz to 1GHz	Jan. 07, 2017	Nov. 22, 2017~ Nov. 29, 2017	Jan. 06, 2018	Radiation (03CH07-HY)
Double Ridge Horn Antenna	ESCO	3117	00075962	1GHz ~ 18GHz	Aug. 23, 2017	Nov. 22, 2017~ Nov. 29, 2017	Aug. 22, 2018	Radiation (03CH07-HY)
Preamplifier	MITEQ	AMF-7D-0010 1800-30-10P	1590075	1GHz ~ 18GHz	Apr. 25, 2017	Nov. 22, 2017~ Nov. 29, 2017	Apr. 24, 2018	Radiation (03CH07-HY)
Preamplifier	COM-POWER	PA-103A	161241	10MHz-1GHz	Mar. 14, 2017	Nov. 22, 2017~ Nov. 29, 2017	Mar. 13, 2018	Radiation (03CH07-HY)
Spectrum Analyzer	Agilent	N9010A	MY534701 18	10Hz~44GHz	Apr. 17, 2017	Nov. 22, 2017~ Nov. 29, 2017	Apr. 16, 2018	Radiation (03CH07-HY)
Antenna Mast	Max-Full	MFA520BS	N/A	1m~4m	N/A	Nov. 22, 2017~ Nov. 29, 2017	N/A	Radiation (03CH07-HY)
Turn Table	ChainTek	Chaintek 3000	N/A	0~360 Degree	N/A	Nov. 22, 2017~ Nov. 29, 2017	N/A	Radiation (03CH07-HY)
Amplifier	MITEQ	TTA1840-35- HG	1871923	18GHz~40GHz, VSWR : 2.5:1 max	Jul. 18, 2017	Nov. 22, 2017 Nov. 29, 2017	Jul. 17, 2018	Radiation (03CH07-HY)
Loop Antenna	Rohde & Schwarz	HFH2-Z2	100488	9 kHz~30 MHz	Oct. 20, 2016	Nov. 22, 2017~ Nov. 29, 2017	Oct. 19, 2018	Radiation (03CH07-HY)
SHF-EHF Horn Antenna	SCHWARZBE CK	BBHA 9170	BBHA9170 251	18GHz- 40GHz	Nov. 10, 2017	Nov. 22, 2017~ Nov. 29, 2017	Nov. 09, 2018	Radiation (03CH07-HY)
EMI Test Receiver	Agilent	N9038A(MXE)	MY532900 53	20Hz to 26.5GHz	Jan. 12, 2017	Nov. 22, 2017~ Nov. 29, 2017	Jan. 11, 2018	Radiation (03CH07-HY)
Preamplifier	Agilent	8449B	3008A023 62	1GHz~26.5GHz	Oct. 30, 2017	Nov. 22, 2017~ Nov. 29, 2017	Oct. 29, 2018	Radiation (03CH07-HY)



5 Uncertainty of Evaluation

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	5.70
---	------

Uncertainty of Radiated Emission Measurement (1000 MHz ~ 18000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	5.50
---	------

Uncertainty of Radiated Emission Measurement (18000 MHz ~ 40000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	5.20
---	------

Appendix A. Test Result of Conducted Test Items

Test Engineer:	Allen Lin	Temperature:	21~25	°C
Test Date:	2017/11/21	Relative Humidity:	51~54	%

TEST RESULTS DATA
Peak Output Power

2.4GHz Band																
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Peak Conducted Power (dBm)			Conducted Power Limit (dBm)		DG (dBi)		EIRP Power (dBm)		EIRP Power Limit (dBm)		Pass /Fail
					Ant 1	Ant 2	SUM	Ant 1	Ant 2	Ant 1	Ant 2	Ant 1	Ant 2	Ant 1	Ant 2	
11b	1Mbps	1	1	2412	17.65	17.51		30.00	30.00	1.18	-0.73	18.83	16.78	36.00	36.00	Pass
11b	1Mbps	1	6	2437	17.61	17.38		30.00	30.00	1.18	-0.73	18.79	16.65	36.00	36.00	Pass
11b	1Mbps	1	11	2462	17.59	17.58		30.00	30.00	1.18	-0.73	18.77	16.85	36.00	36.00	Pass
11b	1Mbps	1	12	2467	15.93	15.73		30.00	30.00	1.18	-0.73	17.11	15.00	36.00	36.00	Pass
11b	1Mbps	1	13	2472	12.21	12.08		30.00	30.00	1.18	-0.73	13.39	11.35	36.00	36.00	Pass
11g	6Mbps	1	1	2412	20.12	19.85		30.00	30.00	1.18	-0.73	21.30	19.12	36.00	36.00	Pass
11g	6Mbps	1	6	2437	20.06	19.90		30.00	30.00	1.18	-0.73	21.24	19.17	36.00	36.00	Pass
11g	6Mbps	1	11	2462	20.04	19.91		30.00	30.00	1.18	-0.73	21.22	19.18	36.00	36.00	Pass
11g	6Mbps	1	12	2467	16.78	16.63		30.00	30.00	1.18	-0.73	17.96	15.90	36.00	36.00	Pass
11g	6Mbps	1	13	2472	4.22	4.14		30.00	30.00	1.18	-0.73	5.40	3.41	36.00	36.00	Pass
HT20	MCS0	1	1	2412	20.29	20.20		30.00	30.00	1.18	-0.73	21.47	19.47	36.00	36.00	Pass
HT20	MCS0	1	6	2437	20.42	20.36		30.00	30.00	1.18	-0.73	21.60	19.63	36.00	36.00	Pass
HT20	MCS0	1	11	2462	20.37	19.96		30.00	30.00	1.18	-0.73	21.55	19.23	36.00	36.00	Pass
HT20	MCS0	1	12	2467	16.65	16.56		30.00	30.00	1.18	-0.73	17.83	15.83	36.00	36.00	Pass
HT20	MCS0	1	13	2472	4.92	4.61		30.00	30.00	1.18	-0.73	6.10	3.88	36.00	36.00	Pass
HT40	MCS0	1	3	2422	16.95	19.42		30.00	30.00	1.18	-0.73	18.13	18.69	36.00	36.00	Pass
HT40	MCS0	1	6	2437	19.35	19.04		30.00	30.00	1.18	-0.73	20.53	18.31	36.00	36.00	Pass
HT40	MCS0	1	9	2452	17.45	19.17		30.00	30.00	1.18	-0.73	18.63	18.44	36.00	36.00	Pass
HT40	MCS0	1	10	2457	13.80	13.79		30.00	30.00	1.18	-0.73	14.98	13.06	36.00	36.00	Pass
HT40	MCS0	1	11	2462	4.14	4.11		30.00	30.00	1.18	-0.73	5.32	3.38	36.00	36.00	Pass
HT20	MCS0	2	1	2412	20.01	20.00	23.02	30.00		1.18		24.20		36.00		Pass
HT20	MCS0	2	6	2437	20.40	20.23	23.33	30.00		1.18		24.51		36.00		Pass
HT20	MCS0	2	11	2462	20.22	20.20	23.22	30.00		1.18		24.40		36.00		Pass
HT20	MCS0	2	12	2467	16.87	16.79	19.84	30.00		1.18		21.02		36.00		Pass
HT20	MCS0	2	13	2472	4.06	3.98	7.03	30.00		1.18		8.21		36.00		Pass
HT40	MCS0	2	3	2422	15.56	15.50	18.54	30.00		1.18		19.72		36.00		Pass
HT40	MCS0	2	6	2437	19.33	19.27	22.31	30.00		1.18		23.49		36.00		Pass
HT40	MCS0	2	9	2452	16.63	16.60	19.63	30.00		1.18		20.81		36.00		Pass
HT40	MCS0	2	10	2457	13.76	13.75	16.77	30.00		1.18		17.95		36.00		Pass
HT40	MCS0	2	11	2462	3.19	3.08	6.15	30.00		1.18		7.33		36.00		Pass

TEST RESULTS DATA
Average Output Power

2.4GHz Band									
Mod.	Data Rate	N _{TX}	CH.	Freq. (MHz)	Duty Factor (dB)		Average Conducted Power (dBm)		
					Ant 1	Ant 2	Ant 1	Ant 2	SUM
11b	1Mbps	1	1	2412	0.06	0.06	14.97	14.78	
11b	1Mbps	1	6	2437	0.06	0.06	14.87	14.87	
11b	1Mbps	1	11	2462	0.06	0.06	14.93	14.87	
11b	1Mbps	1	12	2467	0.06	0.06	13.34	13.13	
11b	1Mbps	1	13	2472	0.06	0.06	9.46	9.21	
11g	6Mbps	1	1	2412	0.06	0.08	14.82	14.57	
11g	6Mbps	1	6	2437	0.06	0.08	14.66	14.58	
11g	6Mbps	1	11	2462	0.06	0.08	14.74	14.68	
11g	6Mbps	1	12	2467	0.06	0.08	11.44	11.37	
11g	6Mbps	1	13	2472	0.06	0.08	-5.82	-5.99	
HT20	MCS0	1	1	2412	0.09	0.07	14.82	14.78	
HT20	MCS0	1	6	2437	0.09	0.07	14.97	14.88	
HT20	MCS0	1	11	2462	0.09	0.07	14.94	14.68	
HT20	MCS0	1	12	2467	0.09	0.07	11.50	11.26	
HT20	MCS0	1	13	2472	0.09	0.07	-4.70	-5.61	
HT40	MCS0	1	3	2422	0.14	0.14	12.71	14.99	
HT40	MCS0	1	6	2437	0.14	0.14	14.95	14.87	
HT40	MCS0	1	9	2452	0.14	0.14	13.70	14.78	
HT40	MCS0	1	10	2457	0.14	0.14	9.99	9.97	
HT40	MCS0	1	11	2462	0.14	0.14	-4.21	-4.28	
HT20	MCS0	2	1	2412	0.18	0.18	14.71	14.68	17.71
HT20	MCS0	2	6	2437	0.18	0.18	14.98	14.89	17.95
HT20	MCS0	2	11	2462	0.18	0.18	14.68	14.66	17.68
HT20	MCS0	2	12	2467	0.18	0.18	11.35	11.20	14.29
HT20	MCS0	2	13	2472	0.18	0.18	-7.26	-7.96	-4.59
HT40	MCS0	2	3	2422	0.25	0.34	11.85	11.84	14.86
HT40	MCS0	2	6	2437	0.25	0.34	14.85	14.84	17.86
HT40	MCS0	2	9	2452	0.25	0.34	12.85	12.84	15.86
HT40	MCS0	2	10	2457	0.25	0.34	10.03	10.09	13.07
HT40	MCS0	2	11	2462	0.25	0.34	-8.71	-8.79	-5.74



Appendix B. Radiated Spurious Emission

Test Engineer :	Jesse Wang, Stan Hsieh and James Chiu	Temperature :	21~23°C
		Relative Humidity :	51~53%

2.4GHz 2400~2483.5MHz

WIFI 802.11b (Band Edge @ 3m)

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
1		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
802.11b CH 06 2437MHz		2341.22	55.56	-18.44	74	50.5	31.83	8.26	35.03	137	70	P	H
		2386.16	45.28	-8.72	54	40.13	31.95	8.24	35.04	137	70	A	H
	*	2437	104.94	-	-	99.65	32.08	8.27	35.06	137	70	P	H
	*	2437	99.69	-	-	94.4	32.08	8.27	35.06	137	70	A	H
		2483.69	55.9	-18.1	74	50.51	32.16	8.3	35.07	137	70	P	H
		2491.32	46.29	-7.71	54	40.86	32.2	8.3	35.07	137	70	A	H
		2347.8	55.41	-18.59	74	50.35	31.83	8.26	35.03	264	113	P	V
		2371.88	44.91	-9.09	54	39.78	31.91	8.26	35.04	264	113	A	V
	*	2437	102.69	-	-	97.4	32.08	8.27	35.06	264	113	P	V
	*	2437	98.01	-	-	92.72	32.08	8.27	35.06	264	113	A	V
		2486.56	55.83	-18.17	74	50.44	32.16	8.3	35.07	264	113	P	V
		2485.58	46.26	-7.74	54	40.87	32.16	8.3	35.07	264	113	A	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



2.4GHz 2400~2483.5MHz

WIFI 802.11b (Harmonic @ 3m)

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)	
802.11b CH 06 2437MHz		4874	45.58	-28.42	74	58.75	34.22	11.9	59.29	100	0	P	H	
		7311	50.47	-23.53	74	57.87	35.71	14.94	58.05	100	0	P	H	
													H	
													H	
			4874	46.43	-27.57	74	59.6	34.22	11.9	59.29	100	0	P	V
			7311	45.92	-28.08	74	53.32	35.71	14.94	58.05	100		P	V
														V
														V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.													



**2.4GHz 2400~2483.5MHz
WIFI 802.11g (Band Edge @ 3m)**

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11g CH 11 2462MHz	*	2462	106.57	-	-	101.21	32.12	8.3	35.06	139	65	P	H
	*	2462	98.5	-	-	93.14	32.12	8.3	35.06	139	65	A	H
		2486.84	59.94	-14.06	74	54.55	32.16	8.3	35.07	139	65	P	H
		2483.52	49.06	-4.94	54	43.67	32.16	8.3	35.07	139	65	A	H
													H
													H
	*	2462	105.04	-	-	99.68	32.12	8.3	35.06	333	127	P	V
	*	2462	97.21	-	-	91.85	32.12	8.3	35.06	333	127	A	V
		2490.08	57.45	-16.55	74	52.02	32.2	8.3	35.07	333	127	P	V
		2483.52	46.8	-7.2	54	41.41	32.16	8.3	35.07	333	127	A	V
													V
													V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



**2.4GHz 2400~2483.5MHz
WIFI 802.11g (Harmonic @ 3m)**

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)	
802.11g CH 11 2462MHz		4924	41.11	-32.89	74	54.24	34.21	11.87	59.21	100	0	P	H	
		7386	48.82	-25.18	74	56.2	35.66	15.08	58.12	100	0	P	H	
													H	
													H	
			4924	42	-32	74	55.13	34.21	11.87	59.21	100	0	P	V
			7386	44.4	-29.6	74	51.78	35.66	15.08	58.12	100	0	P	V
														V
														V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.													



**2.4GHz 2400~2483.5MHz
WIFI 802.11n HT40 (Band Edge @ 3m)**

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11n HT40 CH 03 2422MHz		2378.74	60.52	-13.48	74	55.39	31.91	8.26	35.04	125	70	P	H
		2388.4	51.04	-2.96	54	45.89	31.95	8.24	35.04	125	70	A	H
	*	2422	99.56	-	-	94.32	32.03	8.27	35.06	125	70	P	H
	*	2422	92.1	-	-	86.86	32.03	8.27	35.06	125	70	A	H
		2498.81	56.25	-17.75	74	50.83	32.2	8.3	35.08	125	70	P	H
		2486.77	46.75	-7.25	54	41.36	32.16	8.3	35.07	125	70	A	H
		2389.66	58.65	-15.35	74	53.5	31.95	8.24	35.04	308	123	P	V
		2389.52	50.71	-3.29	54	45.56	31.95	8.24	35.04	308	123	A	V
	*	2422	99.48	-	-	94.24	32.03	8.27	35.06	308	123	P	V
	*	2422	91.72	-	-	86.48	32.03	8.27	35.06	308	123	A	V
		2488.17	55.1	-18.9	74	49.67	32.2	8.3	35.07	308	123	P	V
		2493.56	46.39	-7.61	54	40.97	32.2	8.3	35.08	308	123	A	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



**2.4GHz 2400~2483.5MHz
WIFI 802.11n HT40 (Harmonic @ 3m)**

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11n HT40 CH 03		4844	43.08	-30.92	74	56.27	34.23	11.93	59.35	100	0	P	H
		7266	48.75	-25.25	74	56.17	35.73	14.87	58.02	100	0	P	H
													H
													H
2422MHz		4844	41.8	-32.2	74	54.99	34.23	11.93	59.35	100	0	P	V
		7266	43.7	-30.3	74	51.12	35.73	14.87	58.02	100	0	P	V
													V
													V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Emission below 1GHz

2.4GHz WIFI 802.11n HT40 (LF)

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.	
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.		
1		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)	
2.4GHz 802.11n HT40 LF		74.28	28.28	-11.72	40	45.28	12.48	2.11	31.59	-	-	P	H	
		202.53	39.19	-4.31	43.5	52.96	14.96	2.72	31.45	100	55	P	H	
		240.06	37.47	-8.53	46	48.64	17.19	3.03	31.39	-	-	P	H	
		355.3	39.07	-6.93	46	46.22	20.49	3.57	31.21	-	-	P	H	
		456.1	31.71	-14.29	46	35.77	23.11	3.88	31.05	-	-	P	H	
		960.1	34.49	-19.51	54	28.6	31	5.4	30.51	-	-	P	H	
														H
														H
														H
														H
														H
														H
														H
														H
			30.27	26.29	-13.71	40	31.21	24.72	1.71	31.35	-	-	P	V
			153.39	36.62	-6.88	43.5	48.63	16.87	2.62	31.5	100	178	P	V
			224.94	32.33	-13.67	46	45.01	15.7	3.03	31.41	-	-	P	V
			343.4	29.55	-16.45	46	37.11	20.1	3.57	31.23	-	-	P	V
			790.7	31.5	-14.5	46	29.13	27.99	4.98	30.6	-	-	P	V
			990.9	35.08	-18.92	54	29.51	30.54	5.54	30.51	-	-	P	V
													V	
													V	
													V	
													V	
													V	
													V	
Remark	1. No other spurious found. 2. All results are PASS against limit line.													



2.4GHz 2400~2483.5MHz

WIFI 802.11n HT20 (Band Edge @ 3m)

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.	
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.		
1+2		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)	
802.11n HT20 CH 01 2412MHz		2389.485	57.85	-16.15	74	52.7	31.95	8.24	35.04	102	68	P	H	
		2389.905	50.16	-3.84	54	45.02	31.95	8.24	35.05	102	68	A	H	
	*	2412	104.85	-	-	99.67	31.99	8.24	35.05	102	68	P	H	
	*	2412	97.5	-	-	92.32	31.99	8.24	35.05	102	68	A	H	
													H	
														H
			2388.225	57.53	-16.47	74	52.38	31.95	8.24	35.04	307	122	P	V
			2389.8	49.03	-4.97	54	43.89	31.95	8.24	35.05	307	122	A	V
	*		2412	104.76	-	-	99.58	31.99	8.24	35.05	307	122	P	V
	*		2412	97.49	-	-	92.31	31.99	8.24	35.05	307	122	A	V
														V
														V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.													



**2.4GHz 2400~2483.5MHz
WIFI 802.11n HT20 (Harmonic @ 3m)**

WIFI Ant. 1+2	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11n HT20 CH 01		4824	44.09	-29.91	74	57.31	34.23	11.93	59.38	100	0	P	H
													H
													H
													H
2412MHz		4824	43.55	-30.45	74	56.77	34.23	11.93	59.38	100	0	P	V
													V
													V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



**2.4GHz 2400~2483.5MHz
WIFI 802.11n HT40 (Band Edge @ 3m)**

WIFI Ant. 1+2	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11n HT40 CH 03 2422MHz		2389.1	58.87	-15.13	74	53.72	31.95	8.24	35.04	100	68	P	H
		2389.52	50.09	-3.91	54	44.94	31.95	8.24	35.04	100	68	A	H
	*	2422	98.82	-	-	93.58	32.03	8.27	35.06	100	68	P	H
	*	2422	90.79	-	-	85.55	32.03	8.27	35.06	100	68	A	H
		2490.9	55.72	-18.28	74	50.29	32.2	8.3	35.07	100	68	P	H
		2484.53	46.63	-7.37	54	41.24	32.16	8.3	35.07	100	68	A	H
		2383.78	58.16	-15.84	74	53.05	31.91	8.24	35.04	301	124	P	V
		2389.38	50.63	-3.37	54	45.48	31.95	8.24	35.04	301	124	A	V
	*	2422	98.46	-	-	93.22	32.03	8.27	35.06	301	124	P	V
	*	2422	90.95	-	-	85.71	32.03	8.27	35.06	301	124	A	V
		2492.51	55.9	-18.1	74	50.48	32.2	8.3	35.08	301	124	P	V
		2491.81	46.58	-7.42	54	41.16	32.2	8.3	35.08	301	124	A	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



**2.4GHz 2400~2483.5MHz
WIFI 802.11n HT40 (Harmonic @ 3m)**

WIFI Ant. 1+2	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11n HT40 CH 03		4844	43.79	-30.21	74	56.98	34.23	11.93	59.35	100	0	P	H
		7266	47.78	-26.22	74	55.2	35.73	14.87	58.02	100	0	P	H
													H
													H
2422MHz		4844	41.59	-32.41	74	54.78	34.23	11.93	59.35	100	0	P	V
		7266	43.3	-30.7	74	50.72	35.73	14.87	58.02	100	0	P	V
													V
													V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Emission below 1GHz

2.4GHz WIFI 802.11n HT40 (LF)

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.	
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.		
1+2		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)	
2.4GHz 802.11n HT40 LF		159.06	37.31	-6.19	43.5	49.66	16.52	2.62	31.49	-	-	P	H	
		204.42	39.09	-4.41	43.5	52.82	14.99	2.72	31.44	100	59	P	H	
		223.59	40.85	-5.15	46	53.62	15.61	3.03	31.41	-	-	P	H	
		351.1	39.1	-6.9	46	46.38	20.36	3.57	31.21	-	-	P	H	
		456.1	31.79	-14.21	46	35.85	23.11	3.88	31.05	-	-	P	H	
		956.6	34.49	-11.51	46	28.79	30.81	5.4	30.51	-	-	P	H	
														H
														H
														H
														H
														H
														H
			88.86	27.02	-16.48	43.5	42.11	14.37	2.11	31.57	-	-	P	V
			155.55	37.16	-6.34	43.5	49.32	16.72	2.62	31.5	100	111	P	V
			227.37	32.69	-13.31	46	45.19	15.88	3.03	31.41	-	-	P	V
			347.6	30.4	-15.6	46	37.82	20.23	3.57	31.22	-	-	P	V
			766.9	31.85	-14.15	46	29.57	28.02	4.88	30.62	-	-	P	V
			988.1	35.18	-18.82	54	29.55	30.6	5.54	30.51	-	-	P	V
													V	
													V	
													V	
													V	
													V	
													V	
													V	
													V	
Remark	1. No other spurious found. 2. All results are PASS against limit line.													



Note symbol

*	Fundamental Frequency which can be ignored. However, the level of any unwanted emissions shall not exceed the level of the fundamental frequency.
!	Test result is over limit line.
P/A	Peak or Average
H/V	Horizontal or Vertical



A calculation example for radiated spurious emission is shown as below:

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
1		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
802.11b		2390	55.45	-18.55	74	54.51	32.22	4.58	35.86	103	308	P	H
CH 01													
2412MHz		2390	43.54	-10.46	54	42.6	32.22	4.58	35.86	103	308	A	H

- Level(dBμV/m) =
Antenna Factor(dB/m) + Cable Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)
- Over Limit(dB) = Level(dBμV/m) – Limit Line(dBμV/m)

For Peak Limit @ 2390MHz:

- Level(dBμV/m)
= Antenna Factor(dB/m) + Cable Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)
= 32.22(dB/m) + 4.58(dB) + 54.51(dBμV) – 35.86 (dB)
= 55.45 (dBμV/m)
- Over Limit(dB)
= Level(dBμV/m) – Limit Line(dBμV/m)
= 55.45(dBμV/m) – 74(dBμV/m)
= -18.55(dB)

For Average Limit @ 2390MHz:

- Level(dBμV/m)
= Antenna Factor(dB/m) + Cable Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)
= 32.22(dB/m) + 4.58(dB) + 42.6(dBμV) – 35.86 (dB)
= 43.54 (dBμV/m)
- Over Limit(dB)
= Level(dBμV/m) – Limit Line(dBμV/m)
= 43.54(dBμV/m) – 54(dBμV/m)
= -10.46(dB)

Both peak and average measured complies with the limit line, so test result is “PASS”.



Appendix C. Radiated Spurious Emission Plots

Test Engineer :	Jesse Wang, Stan Hsieh and James Chiu	Temperature :	21~23°C
		Relative Humidity :	51~53%

Note symbol

-L	Low channel location
-R	High channel location





2.4GHz 2400~2483.5MHz





WIFI 802.11b (Band Edge @ 3m)

WIFI	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	802.11b CH06 2437MHz - L	
1	Horizontal	Fundamental
Peak	<p>Site : 03CH07-HY Condition : PEAK_BE_74 3m HF_ANT_00075962 HORIZONTAL Detector : Peak Project : 7N1801 Mode : 10</p>	<p>Site : 03CH07-HY Condition : PEAK_74 3m HF_ANT_00075962 HORIZONTAL Detector : Peak Project : 7N1801 Mode : 10</p>
Avg.	<p>Site : 03CH07-HY Condition : AVG_BE_54 3m HF_ANT_00075962 HORIZONTAL Detector : Peak Project : 7N1801 Mode : 10</p>	<p>Site : 03CH07-HY Condition : AVG_54 3m HF_ANT_00075962 HORIZONTAL Detector : Peak Project : 7N1801 Mode : 10</p>

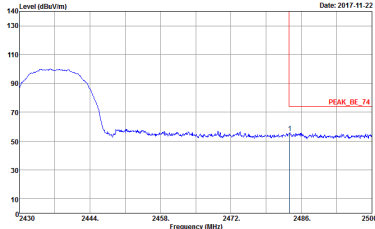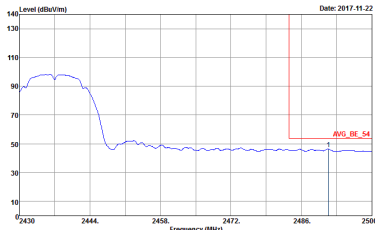

WIFI	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	802.11b CH06 2437MHz - R	
1	Horizontal	Fundamental
<p>Peak</p>	 <p>Site : 03CH07-HY Condition : PEAK_BE_74 3m HF_ANT_00075962 HORIZONTAL RBW:1000.000kHz VBW:3000.000kHz SWF:Auto Detector : Peak Project : 7N1801 Mode : ID</p>	<p>Left blank</p>
<p>Avg.</p>	 <p>Site : 03CH07-HY Condition : AVG_BE_54 3m HF_ANT_00075962 HORIZONTAL RBW:1000.000kHz VBW:0.010kHz SWF:Auto Detector : Peak Project : 7N1801 Mode : ID</p>	<p>Left blank</p>

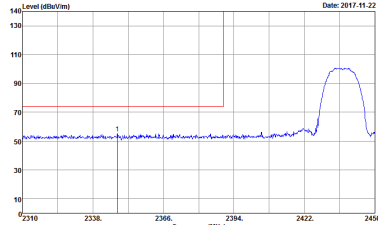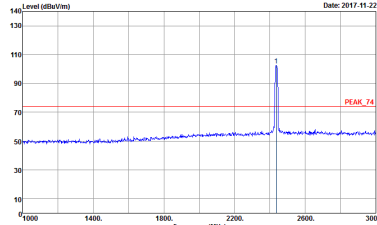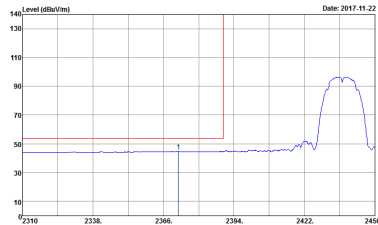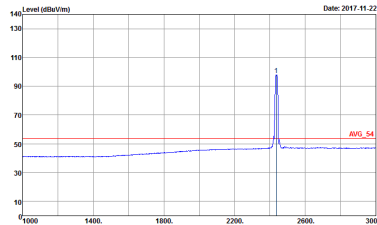





WIFI	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	802.11b CH06 2437MHz - L	
1	Vertical	Fundamental
Peak	 <p>Site : 03CH07-4Y Condition : PEAK_BE_74 3m HF_ANT_00075962 VERTICAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak Project : 7N1801 Mode : 10</p>	 <p>Site : 03CH07-4Y Condition : PEAK_74 3m HF_ANT_00075962 VERTICAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak Project : 7N1801 Mode : 10</p>
Avg.	 <p>Site : 03CH07-4Y Condition : AVG_BE_54 3m HF_ANT_00075962 VERTICAL RBW:1000.000KHz VBW:0.010KHz SWT:Auto Detector : Peak Project : 7N1801 Mode : 10</p>	 <p>Site : 03CH07-4Y Condition : AVG_54 3m HF_ANT_00075962 VERTICAL RBW:1000.000KHz VBW:0.010KHz SWT:Auto Detector : Peak Project : 7N1801 Mode : 10</p>







WIFI	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	802.11b CH06 2437MHz - R	
1	Vertical	Fundamental
Peak	<p>Site : 03CH07-HY Condition : PEAK_BE_74 3m HF_ANT_00075962 VERTICAL RBW:1000.000kHz VBW:3000.000kHz SWF:Auto Detector : Peak Project : 7N1801 Mode : ID</p>	Left blank
Avg.	<p>Site : 03CH07-HY Condition : AVG_BE_54 3m HF_ANT_00075962 VERTICAL RBW:1000.000kHz VBW:0.010kHz SWF:Auto Detector : Peak Project : 7N1801 Mode : ID</p>	Left blank



2.4GHz 2400~2483.5MHz
WIFI 802.11g (Band Edge @ 3m)

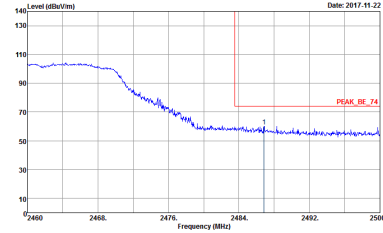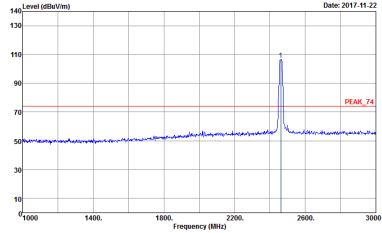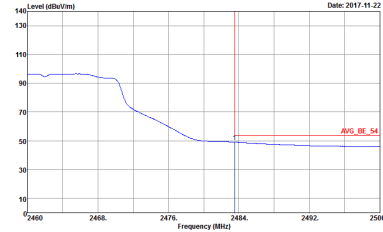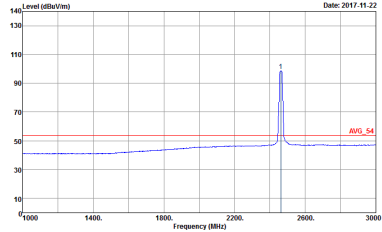WIFI	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	802.11g CH11 2462MHz	
1	Horizontal	Fundamental
Peak	 <p>Site : 03CH07-HY Condition : PEAK_BE_74 3m HF_ANT_00075962 HORIZONTAL Detector : Peak Project : 7N1801 Mode : 16</p>	 <p>Site : 03CH07-HY Condition : PEAK_74 3m HF_ANT_00075962 HORIZONTAL Detector : Peak Project : 7N1801 Mode : 16</p>
Avg.	 <p>Site : 03CH07-HY Condition : AVG_BE_54 3m HF_ANT_00075962 HORIZONTAL Detector : Peak Project : 7N1801 Mode : 16</p>	 <p>Site : 03CH07-HY Condition : AVG_54 3m HF_ANT_00075962 HORIZONTAL Detector : Peak Project : 7N1801 Mode : 16</p>

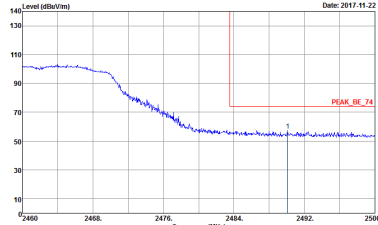
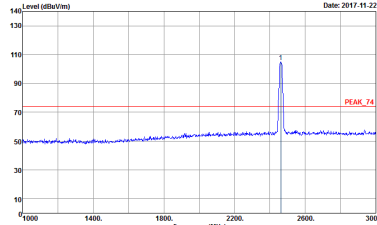
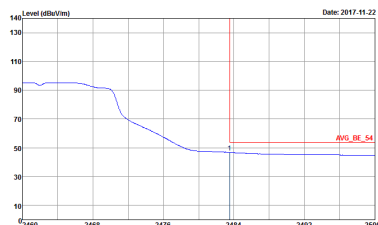
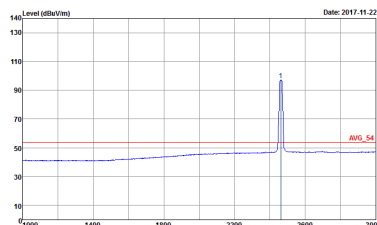


WIFI	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	802.11g CH11 2462MHz	
1	Vertical	Fundamental
Peak	 <p>Site : 03CH07-4Y Condition : PEAK_BE_74 3m HF_ANT_00075962 VERTICAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak Project : 7N1801 Mode : 16</p>	 <p>Site : 03CH07-4Y Condition : PEAK_74 3m HF_ANT_00075962 VERTICAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak Project : 7N1801 Mode : 16</p>
Avg.	 <p>Site : 03CH07-4Y Condition : AVG_BE_54 3m HF_ANT_00075962 VERTICAL RBW:1000.000KHz VBW:0.010KHz SWT:Auto Detector : Peak Project : 7N1801 Mode : 16</p>	 <p>Site : 03CH07-4Y Condition : AVG_54 3m HF_ANT_00075962 VERTICAL RBW:1000.000KHz VBW:0.010KHz SWT:Auto Detector : Peak Project : 7N1801 Mode : 16</p>





2.4GHz 2400~2483.5MHz





WIFI 802.11n HT40 (Band Edge @ 3m)

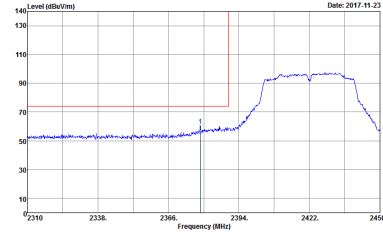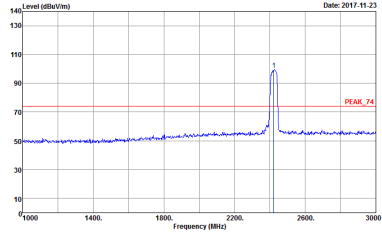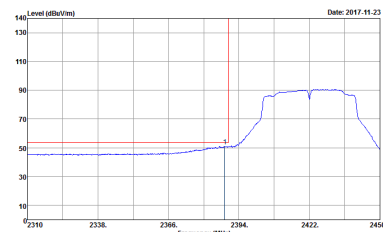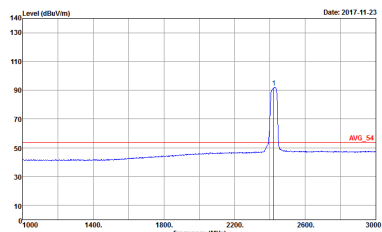WIFI	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	802.11n HT40 CH03 2422MHz - L	
1	Horizontal	Fundamental
Peak	 <p>Site : 03CH07-HY Condition : PEAK_BE_74 3m HF_ANT_00075962 HORIZONTAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak Project : 7N1801 Mode : Z4</p>	 <p>Site : 03CH07-HY Condition : PEAK_74 3m HF_ANT_00075962 HORIZONTAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak Project : 7N1801 Mode : Z4</p>
Avg.	 <p>Site : 03CH07-HY Condition : AVG_BE_54 3m HF_ANT_00075962 HORIZONTAL RBW:1000.000KHz VBW:3000KHz SWT:Auto Detector : Peak Project : 7N1801 Mode : Z4</p>	 <p>Site : 03CH07-HY Condition : AVG_54 3m HF_ANT_00075962 HORIZONTAL RBW:1000.000KHz VBW:3000KHz SWT:Auto Detector : Peak Project : 7N1801 Mode : Z4</p>

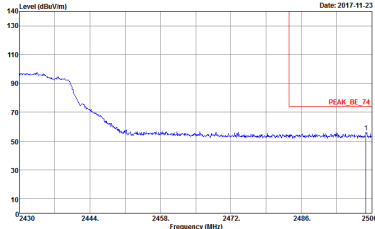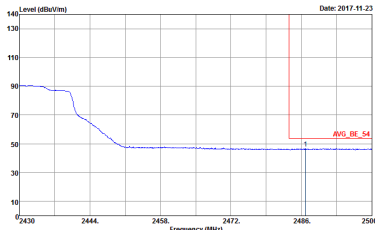

WIFI	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	802.11n HT40 CH03 2422MHz - R	
1	Horizontal	Fundamental
Peak	 <p>Site : 03CH07-HY Condition : PEAK_BE_74 3m HF_ANT_00075962 HORIZONTAL RBW:1000.000kHz VBW:3000.000kHz SWF:Auto Detector : Peak Project : 7N1801 Mode : 24</p>	Left Blank
Avg.	 <p>Site : 03CH07-HY Condition : AVG_BE_54 3m HF_ANT_00075962 HORIZONTAL RBW:1000.000kHz VBW:3.000kHz SWF:Auto Detector : Peak Project : 7N1801 Mode : 24</p>	Left Blank

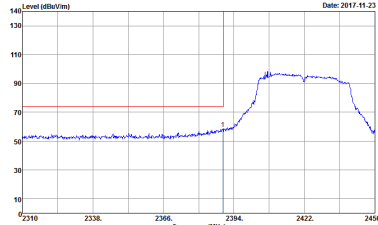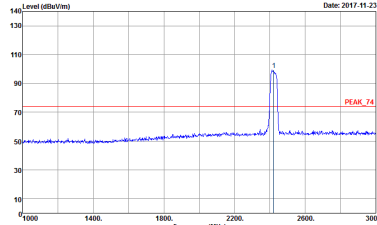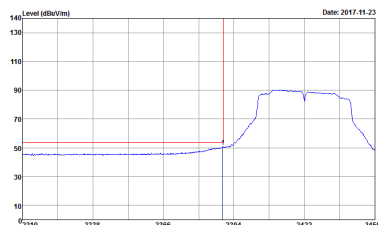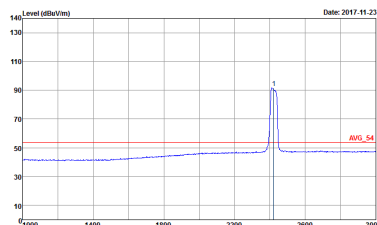

WIFI	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	802.11n HT40 CH03 2422MHz - L	
1	Vertical	Fundamental
Peak	 <p>Site : 03CH07-1HY Condition : PEAK_BE_74 3m HF_ANT_00075962 VERTICAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak Project : 7N1801 Mode : 24</p>	 <p>Site : 03CH07-1HY Condition : PEAK_74 3m HF_ANT_00075962 VERTICAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak Project : 7N1801 Mode : 24</p>
Avg.	 <p>Site : 03CH07-1HY Condition : AVG_BE_54 3m HF_ANT_00075962 VERTICAL RBW:1000.000KHz VBW:3.000KHz SWT:Auto Detector : Peak Project : 7N1801 Mode : 24</p>	 <p>Site : 03CH07-1HY Condition : AVG_54 3m HF_ANT_00075962 VERTICAL RBW:1000.000KHz VBW:3.000KHz SWT:Auto Detector : Peak Project : 7N1801 Mode : 24</p>



WIFI	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	802.11n HT40 CH03 2422MHz - R	
1	Vertical	Fundamental
Peak	<p>Site : 03CH07-HY Condition : PEAK_BE_74 3m HF_ANT_00075962 VERTICAL RBW:1000.000kHz VBW:3000.000kHz SWF:Auto Detector : Peak Project : 7N1801 Mode : 24</p>	Left blank
Avg.	<p>Site : 03CH07-HY Condition : AVG_BE_54 3m HF_ANT_00075962 VERTICAL RBW:1000.000kHz VBW:3.000kHz SWF:Auto Detector : Peak Project : 7N1801 Mode : 24</p>	Left blank



**2.4GHz 2400~2483.5MHz
WIFI 802.11b (Harmonic @ 3m)**

WIFI	2.4GHz 2400~2483.5MHz Harmonic @ 3m	
ANT	802.11b CH06 2437MHz	
1	Horizontal	Vertical
Peak Avg.	<p>Site : 03CH07-11Y Condition : PEAK_74 3m SHF-EHF_131029 HORIZONTAL Detector : Peak Project : 7N1801 Mode : 10</p>	<p>Site : 03CH07-11Y Condition : PEAK_74 3m SHF-EHF_131029 VERTICAL Detector : Peak Project : 7N1801 Mode : 10</p>



2.4GHz 2400~2483.5MHz

WIFI 802.11g (Harmonic @ 3m)

WIFI	2.4GHz 2400~2483.5MHz Harmonic @ 3m	
ANT	802.11g CH11 2462MHz	
1	Horizontal	Vertical
Peak Avg.	<p>Site : 03CH07-11Y Condition : PEAK_74 3m SHF-EHF_131029 HORIZONTAL Detector : Peak Project : 7N1801 Mode : 15</p>	<p>Site : 03CH07-11Y Condition : PEAK_74 3m SHF-EHF_131029 VERTICAL Detector : Peak Project : 7N1801 Mode : 16</p>



2.4GHz 2400~2483.5MHz
WIFI 802.11n HT40 (Harmonic @ 3m)

WIFI	2.4GHz 2400~2483.5MHz Harmonic @ 3m	
ANT	802.11n HT40 CH03 2422MHz	
1	Horizontal	Vertical
Peak Avg.	<p>Site : 03CH07-11Y Condition : PEAK_74 3m SHF-EHF_131029 HORIZONTAL Detector : Peak Project : 7N1801 Mode : 24</p>	<p>Site : 03CH07-11Y Condition : PEAK_74 3m SHF-EHF_131029 VERTICAL Detector : Peak Project : 7N1801 Mode : 24</p>







Emission below 1GHz
2.4GHz WIFI 802.11n HT40 (LF)





Table with 3 columns: WIFI (2.4GHz 2400~2483.5MHz), ANT (802.11n HT40 LF), and 1 (Horizontal/Vertical). It contains two spectral plots showing Level (dBuV/m) vs Frequency (MHz) for QP / Peak detection.



2.4GHz 2400~2483.5MHz
WIFI 802.11n HT20 (Band Edge @ 3m)

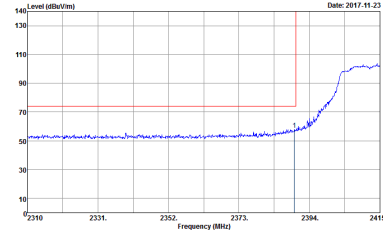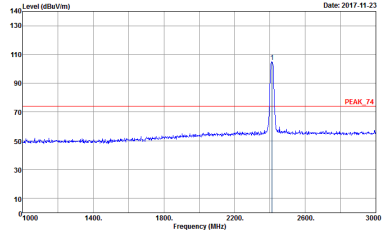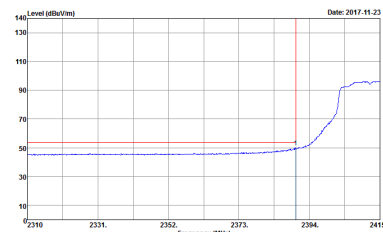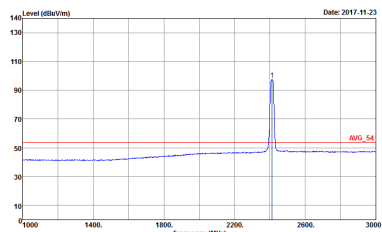WIFI	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	802.11n HT20 CH01 2412MHz	
1+2	Horizontal	Fundamental
Peak	 <p>Site : 03CH07-HY Condition : PEAK_BE_74 3m HF_ANT_00075962 HORIZONTAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak Project : 7N1801 Mode : 30</p>	 <p>Site : 03CH07-HY Condition : PEAK_74 3m HF_ANT_00075962 HORIZONTAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak Project : 7N1801 Mode : 30</p>
Avg.	 <p>Site : 03CH07-HY Condition : AVG_BE_54 3m HF_ANT_00075962 HORIZONTAL RBW:1000.000KHz VBW:3000KHz SWT:Auto Detector : Peak Project : 7N1801 Mode : 30</p>	 <p>Site : 03CH07-HY Condition : AVG_54 3m HF_ANT_00075962 HORIZONTAL RBW:1000.000KHz VBW:3000KHz SWT:Auto Detector : Peak Project : 7N1801 Mode : 30</p>

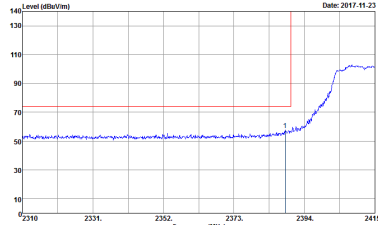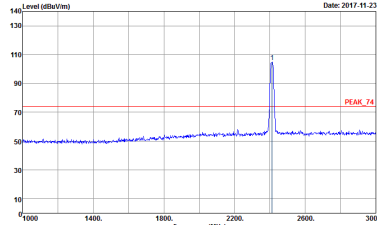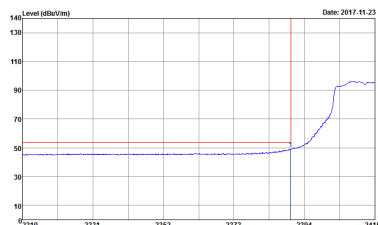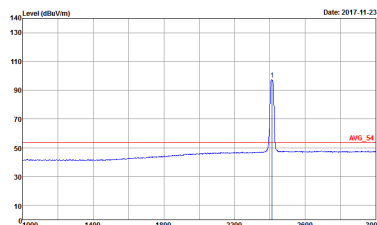



WIFI	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	802.11n HT20 CH01 2412MHz	
1+2	Vertical	Fundamental
Peak	 <p>Site : 03CH07-4Y Condition : PEAK_BE_74 3m HF_ANT_00075962 VERTICAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak Project : 7N1801 Mode : 30</p>	 <p>Site : 03CH07-4Y Condition : PEAK_74 3m HF_ANT_00075962 VERTICAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak Project : 7N1801 Mode : 30</p>
Avg.	 <p>Site : 03CH07-4Y Condition : AVG_BE_54 3m HF_ANT_00075962 VERTICAL RBW:1000.000KHz VBW:3.000KHz SWT:Auto Detector : Peak Project : 7N1801 Mode : 30</p>	 <p>Site : 03CH07-4Y Condition : AVG_54 3m HF_ANT_00075962 VERTICAL RBW:1000.000KHz VBW:3.000KHz SWT:Auto Detector : Peak Project : 7N1801 Mode : 30</p>







2.4GHz 2400~2483.5MHz
WIFI 802.11n HT40 (Band Edge @ 3m)

WIFI	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	802.11n HT40 CH03 2422MHz - L	
1+2	Horizontal	Fundamental
Peak	<p>Site : 03CH07-HY Condition : PEAK_BE_74 3m HF_ANT_00075962 HORIZONTAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak Project : 7N1801 Mode : 35</p>	<p>Site : 03CH07-HY Condition : PEAK_74 3m HF_ANT_00075962 HORIZONTAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak Project : 7N1801 Mode : 35</p>
Avg.	<p>Site : 03CH07-HY Condition : AVG_BE_54 3m HF_ANT_00075962 HORIZONTAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak Project : 7N1801 Mode : 35</p>	<p>Site : 03CH07-HY Condition : AVG_54 3m HF_ANT_00075962 HORIZONTAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak Project : 7N1801 Mode : 35</p>

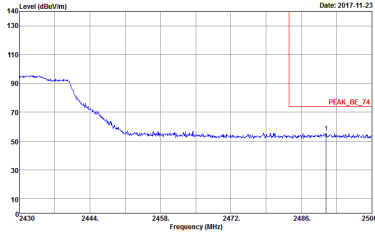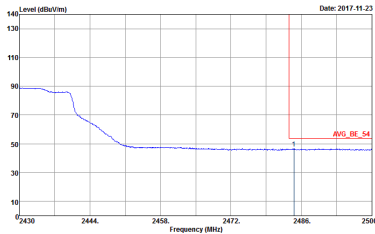

WIFI	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	802.11n HT40 CH03 2422MHz - R	
1+2	Horizontal	Fundamental
<p>Peak</p>	 <p>Site : 03CH07-HY Condition : PEAK_BE_74 3m HF_ANT_00075962 HORIZONTAL RBW:1000.000kHz VBW:3000.000kHz SWF:Auto Detector : Peak Project : 7N1801 Mode : 35</p>	<p>Left Blank</p>
<p>Avg.</p>	 <p>Site : 03CH07-HY Condition : AVG_BE_54 3m HF_ANT_00075962 HORIZONTAL RBW:1000.000kHz VBW:3.000kHz SWF:Auto Detector : Peak Project : 7N1801 Mode : 35</p>	<p>Left Blank</p>

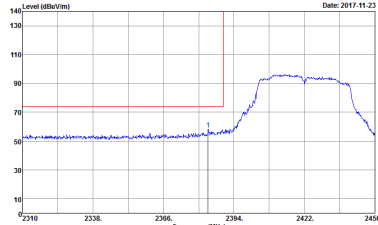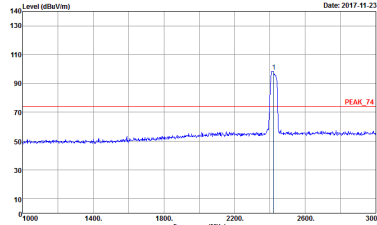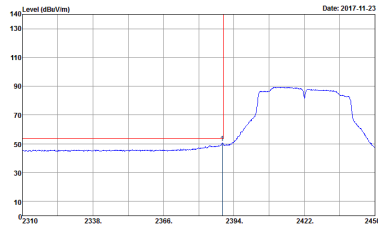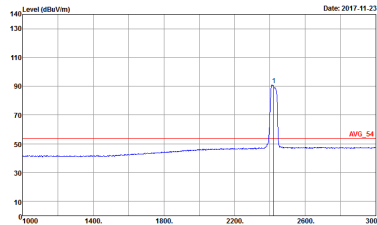

WIFI	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	802.11n HT40 CH03 2422MHz - L	
1+2	Vertical	Fundamental
Peak	 <p>Site : 03CH07-4Y Condition : PEAK_BE_74 3m HF_ANT_00075962 VERTICAL RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Detector : Peak Project : 7N1801 Mode : 35</p>	 <p>Site : 03CH07-4Y Condition : PEAK_74 3m HF_ANT_00075962 VERTICAL RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Detector : Peak Project : 7N1801 Mode : 35</p>
Avg.	 <p>Site : 03CH07-4Y Condition : AVG_BE_54 3m HF_ANT_00075962 VERTICAL RBW:1000.000kHz VBW:3.000kHz SWT:Auto Detector : Peak Project : 7N1801 Mode : 35</p>	 <p>Site : 03CH07-4Y Condition : AVG_54 3m HF_ANT_00075962 VERTICAL RBW:1000.000kHz VBW:3.000kHz SWT:Auto Detector : Peak Project : 7N1801 Mode : 35</p>



WIFI	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	802.11n HT40 CH03 2422MHz - R	
1+2	Vertical	Fundamental
Peak	<p>Site : 03CH07-HY Condition : PEAK_BE_74 3m HF_ANT_00075962 VERTICAL RBW:1000.000kHz VBW:3000.000kHz SWF:Auto Detector : Peak Project : 7N1801 Mode : 35</p>	Left blank
Avg.	<p>Site : 03CH07-HY Condition : AVG_BE_54 3m HF_ANT_00075962 VERTICAL RBW:1000.000kHz VBW:3.000kHz SWF:Auto Detector : Peak Project : 7N1801 Mode : 35</p>	Left blank



**2.4GHz 2400~2483.5MHz
WIFI 802.11n HT20 (Harmonic @ 3m)**

WIFI	2.4GHz 2400~2483.5MHz Harmonic @ 3m	
ANT	802.11n HT20 CH01 2412MHz	
1+2	Horizontal	Vertical
Peak Avg.	<p>Site : 03CH07-11Y Condition : PEAK_74 3m SHF-EHF_131029 HORIZONTAL Detector : Peak Project : 7N1801 Mode : 30</p>	<p>Site : 03CH07-11Y Condition : PEAK_74 3m SHF-EHF_131029 VERTICAL Detector : Peak Project : 7N1801 Mode : 30</p>



**2.4GHz 2400~2483.5MHz
WIFI 802.11n HT40 (Harmonic @ 3m)**

WIFI	2.4GHz 2400~2483.5MHz Harmonic @ 3m	
ANT	802.11n HT40 CH03 2422MHz	
1+2	Horizontal	Vertical
Peak Avg.	<p>Site : 03CH07-11Y Condition : PEAK_74 3m SHF-EHF_131029 HORIZONTAL Detector : Peak Project : 7N1801 Mode : 35</p>	<p>Site : 03CH07-11Y Condition : PEAK_74 3m SHF-EHF_131029 VERTICAL Detector : Peak Project : 7N1801 Mode : 35</p>



Emission below 1GHz
2.4GHz WIFI 802.11n HT40 (LF)

WIFI	2.4GHz 2400~2483.5MHz	
ANT	802.11n HT40 LF	
1+2	Horizontal	Vertical
QP / Peak	<p>Site : 03CH07-4FY Condition : QP 3m LF-ANT-35419(6) HORIZONTAL Detector : Peak Project : 7N1801 Mode : 40</p>	<p>Site : 03CH07-4FY Condition : QP 3m LF-ANT-35419(6) VERTICAL Detector : Peak Project : 7N1801 Mode : 40</p>


Appendix D. Duty Cycle Plots

Antenna	Band	Duty Cycle(%)	T(us)	1/T(kHz)	VBW Setting
1	802.11b	98.56	-	-	10Hz
2	802.11b	98.56	-	-	10Hz
1	802.11g	98.57	-	-	10Hz
2	802.11g	98.09	-	-	10Hz
1	2.4GHz 802.11n HT20	97.95	1910	0.52	1kHz
2	2.4GHz 802.11n HT20	98.46	-	-	10Hz
1+2	2.4GHz 802.11n HT20 for Ant. 1	95.86	972	1.03	3kHz
1+2	2.4GHz 802.11n HT20 for Ant. 2	95.86	972	1.03	3kHz
1	2.4GHz 802.11n HT40	96.89	936	1.07	3kHz
2	2.4GHz 802.11n HT40	96.89	936	1.07	3kHz
1+2	2.4GHz 802.11n HT40 for Ant. 1	94.42	488	2.05	3kHz
1+2	2.4GHz 802.11n HT40 for Ant. 2	92.42	488	2.05	3kHz




<Ant. 1>

802.11b

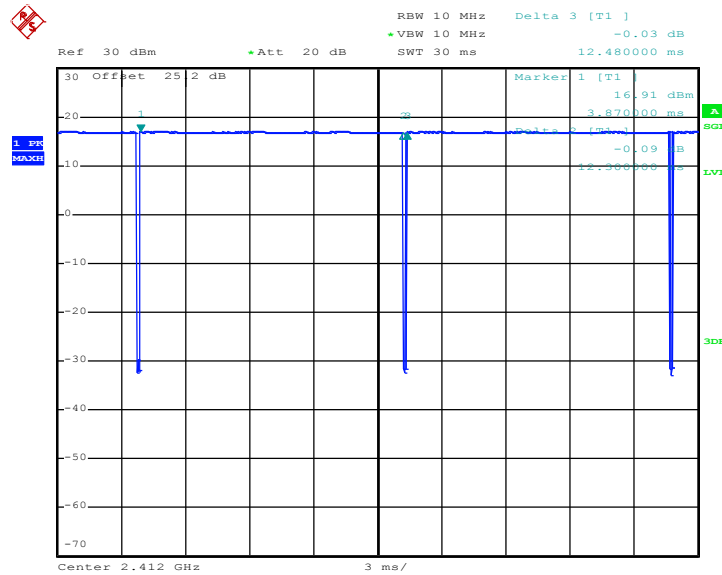

Date: 21.NOV.2017 11:19:13


802.11g

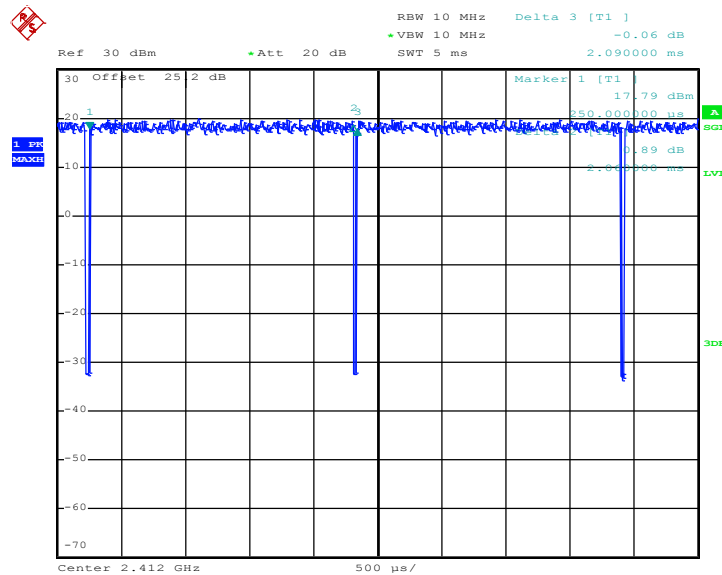

Date: 21.NOV.2017 11:21:37




802.11n HT20

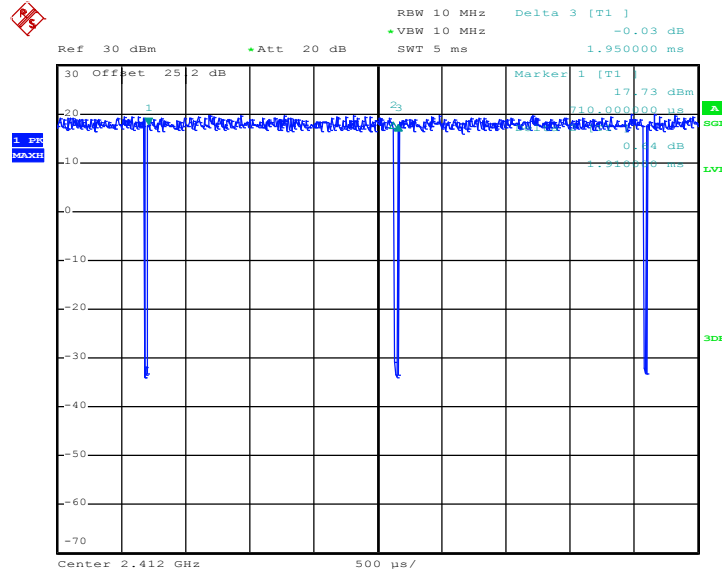

Date: 21.NOV.2017 11:23:05


802.11n HT40

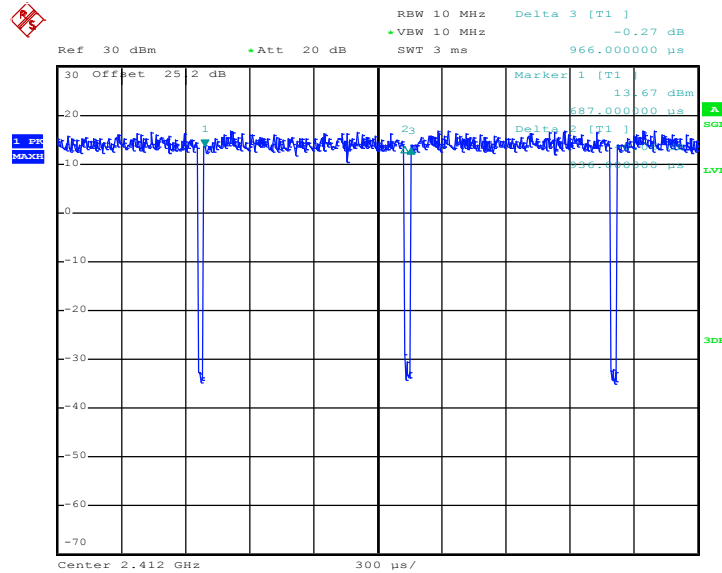

Date: 21.NOV.2017 11:27:52


<Ant. 2>

802.11b

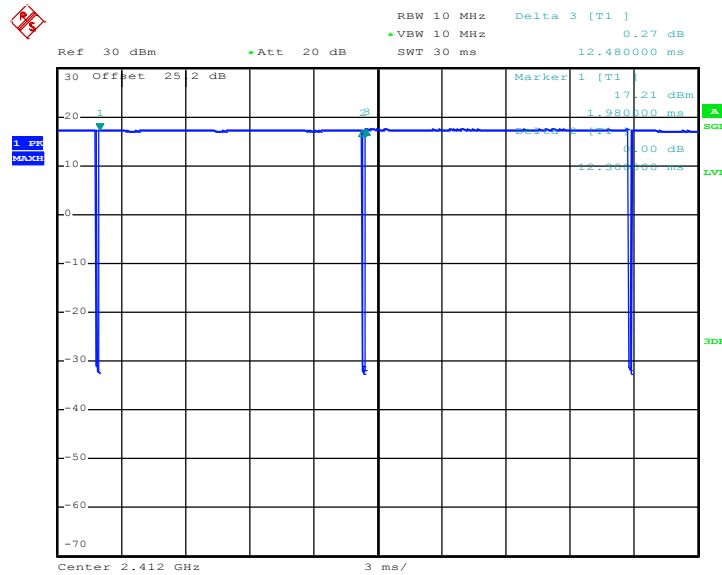

Date: 21.NOV.2017 11:20:15


802.11g

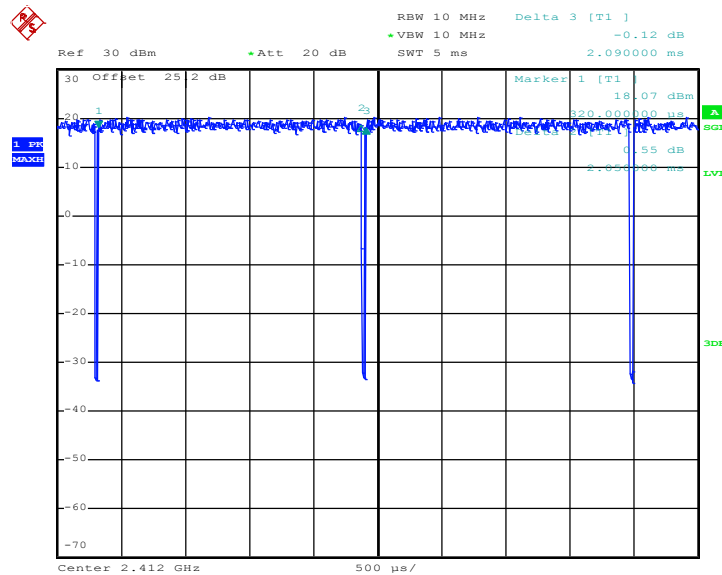

Date: 21.NOV.2017 11:22:18




802.11n HT20

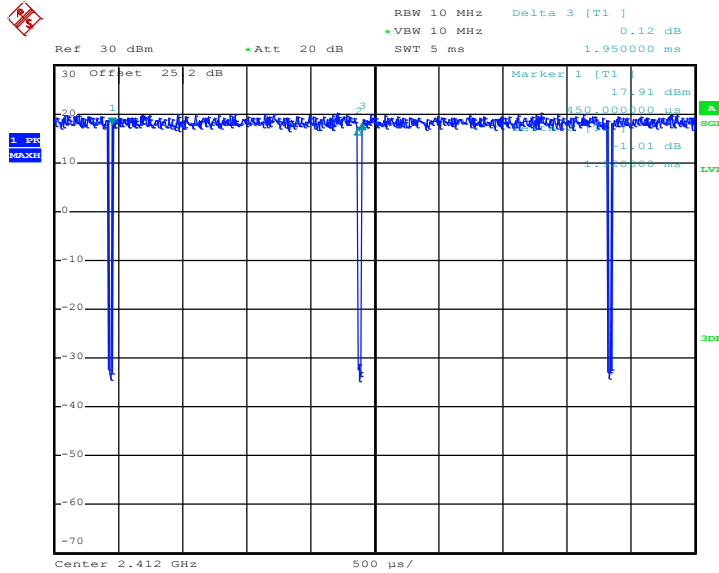

Date: 21.NOV.2017 11:23:39

802.11n HT40

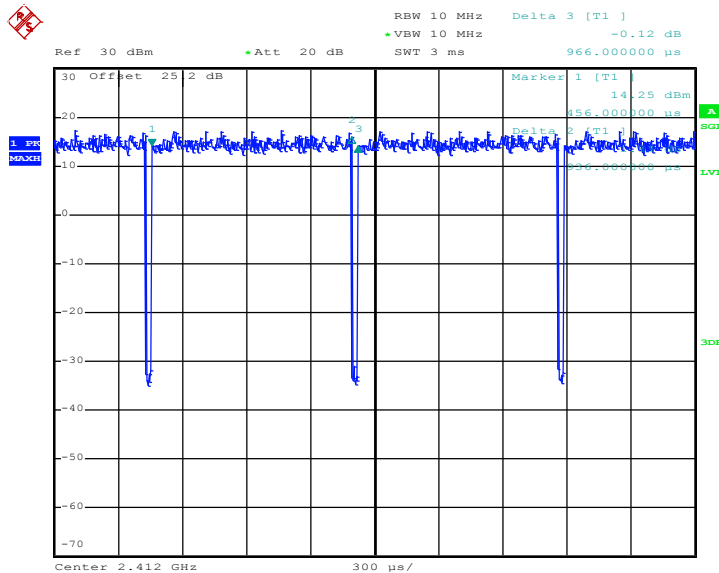


Date: 21.NOV.2017 11:28:34




<MIMO Ant. 1>

802.11n HT20

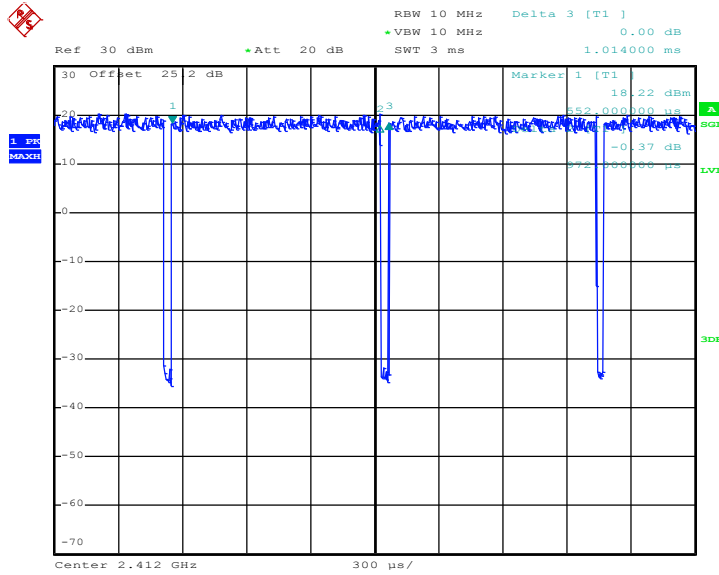

Date: 21.NOV.2017 11:24:31

802.11n HT40

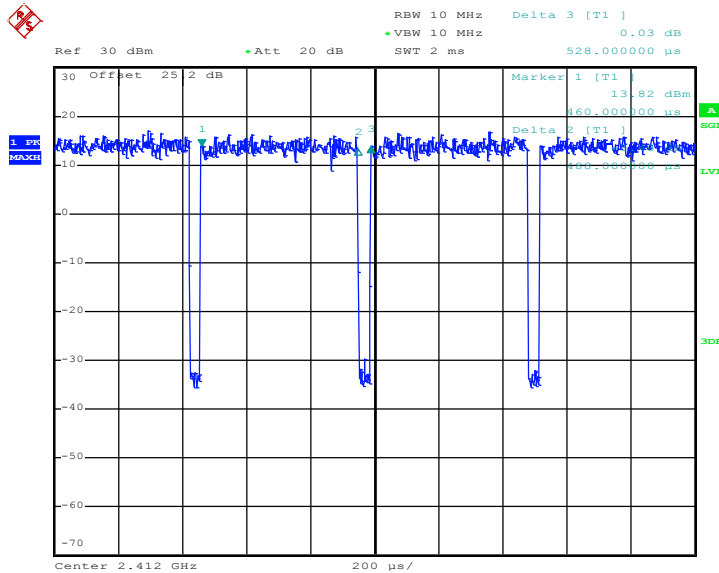


Date: 21.NOV.2017 11:26:14




<MIMO Ant. 2>

802.11n HT20

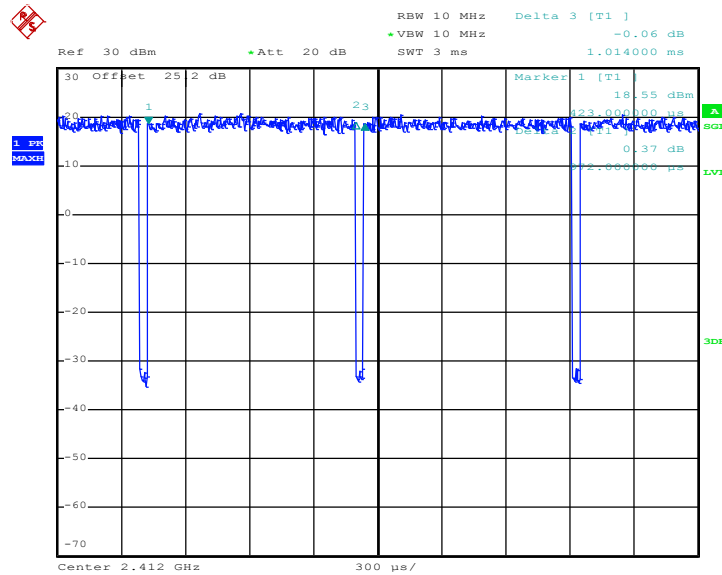

Date: 21.NOV.2017 11:25:11

802.11n HT40

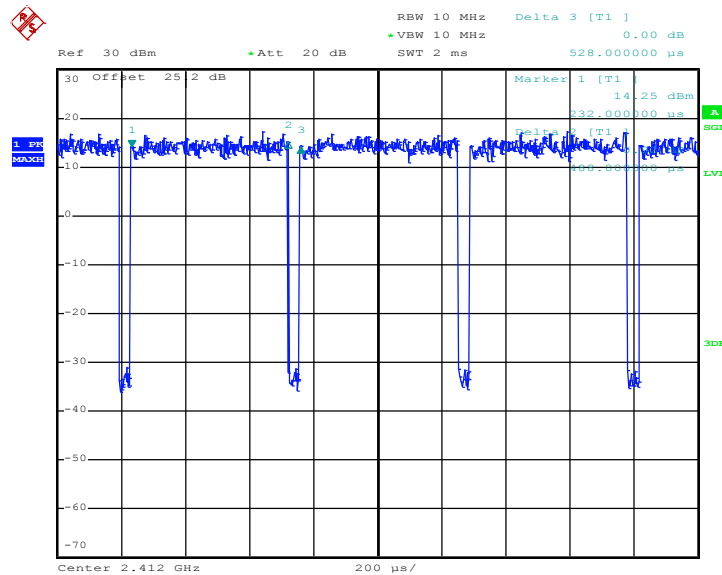

Date: 21.NOV.2017 11:26:55