


APPENDIX A TEST SETUP PHOTOGRAPHS

Tablet Position

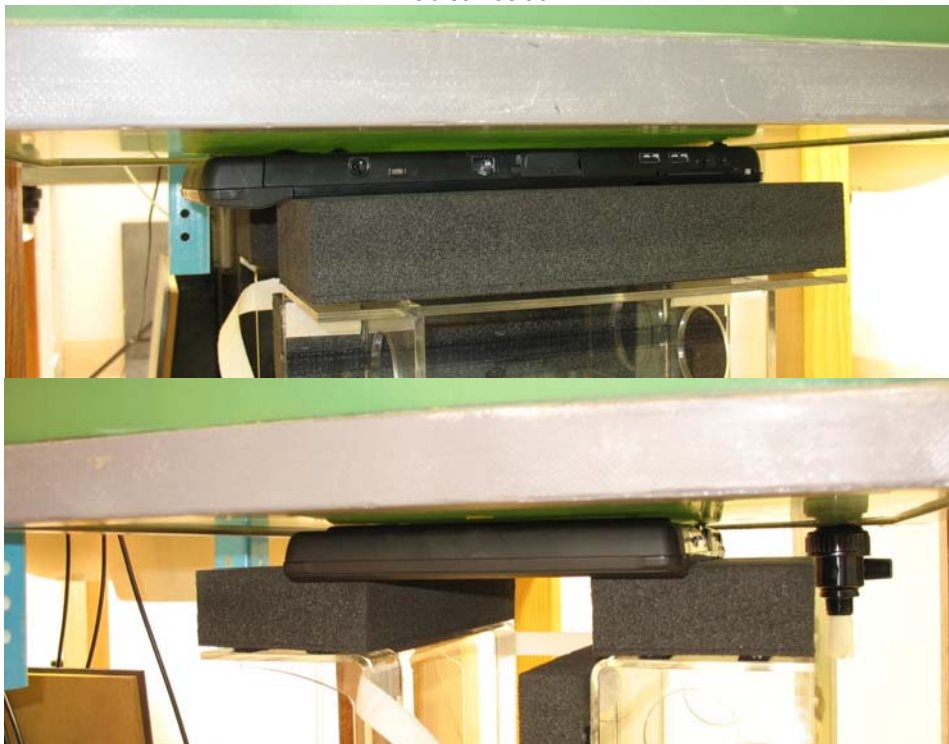

APPENDIX B PLOTS OF THE SAR MEASUREMENTS

Plots of the measured SAR distributions inside the phantom are given in this Appendix for all tested configurations. The spatial peak SAR values were assessed with the procedure described in this report.

Table: 5200 MHz Band SAR Measurement Plot Numbers

Test Position	Plot No.	Ant	Bit rate Mode (Mbps)	Channel Bandwidth (MHz)	Test Channel
Tablet	1	A	6	-	36
	2		6	-	52
	3		6	-	64
	4	B	6	-	52
	5	C	6	-	52
Z-Axis graphs for Plots 1 to 5					

Table: 5600 MHz Band SAR Measurement Plot Numbers

Test Position	Plot No.	Ant	Bit rate Mode (Mbps)	Channel Bandwidth (MHz)	Test Channel
Tablet	6	A	6	-	120
	7	B	6	-	100
	8		6	-	120
	9		6	-	140
	10	C	6	-	120
Z-Axis graphs for Plots 6 to 10					

Table: 5800 MHz Band SAR Measurement Plot Numbers

Test Position	Plot No.	Ant	Bit rate Mode (Mbps)	Channel Bandwidth (MHz)	Test Channel
Tablet	11	A	6	-	157
	12	B	6	-	149
	13		6	-	157
	14		6	-	165
	15	C	6	-	157
Z-Axis graphs for Plots 11 to 15					

Table: Validation Plots

Plot 16	Validation 5200 MHz 6 th September 2008
Plot 17	Validation 5500 MHz 4 th September 2008
Plot 18	Validation 5800 MHz 3 rd September 2008
Z-Axis graphs for Plots 16 to 18	



Test Date: 06 September 2008


File Name: Tablet OFDM 5.2 GHz Antenna A 06-09-08.da4

DUT: **Fujitsu Tablet Oneya with SP 3x3 abgn; Type: HMW_533AN; Serial: MAC: 0016EA16277E**

- * Communication System: OFDM 5250 MHz; Frequency: 5180 MHz; Duty Cycle: 1:1
- * Medium parameters used: $f = 5173$ MHz; $\sigma = 5.43$ mho/m; $\epsilon_r = 44.9$; $\rho = 1000$ kg/m³
- Electronics: DAE3 Sn442; Probe: EX3DV4 - SN3563; ConvF(3.72, 3.72, 3.72)
- Phantom: Flat Phantom 10.1; Serial: P 10.1; Phantom section: Flat 2.2 Section

Channel 36 Test/Area Scan (71x101x1): Measurement grid: dx=10mm, dy=10mm
Maximum value of SAR (interpolated) = 2.23 mW/g

Channel 36 Test/Zoom Scan (7x7x9)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2.5mm
Reference Value = 7.98 V/m; Power Drift = 0.052 dB
Peak SAR (extrapolated) = 3.34 W/kg
SAR(1 g) = 1.07 mW/g; SAR(10 g) = 0.407 mW/g
Maximum value of SAR (measured) = 1.94 mW/g

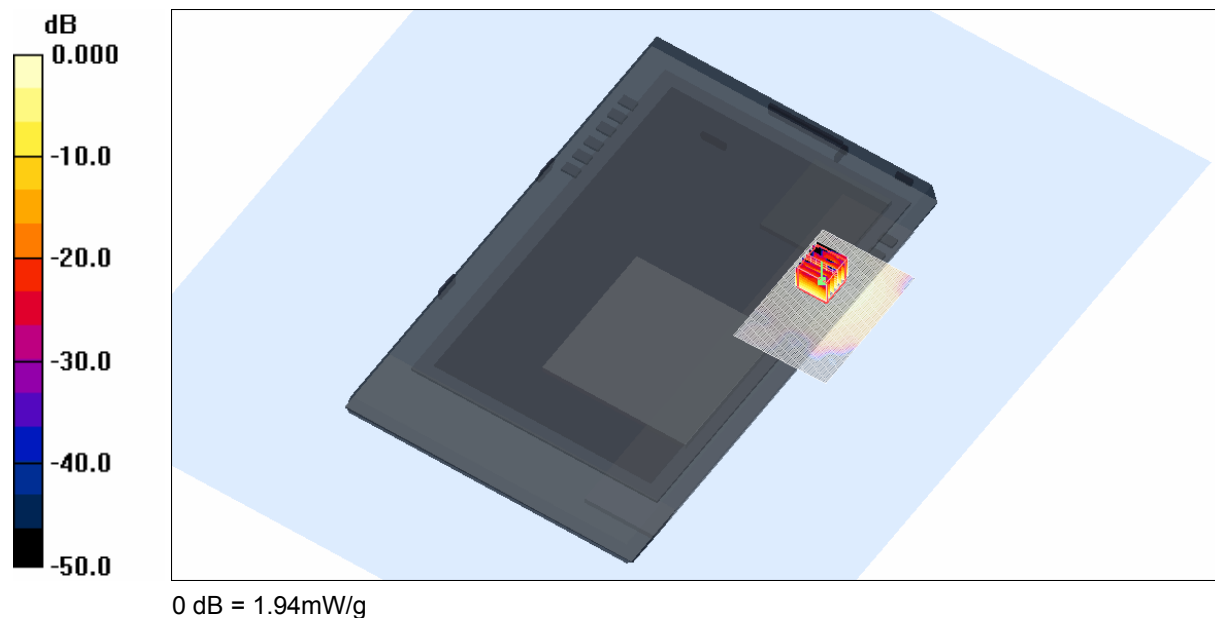

SAR MEASUREMENT PLOT 1

Ambient Temperature
Liquid Temperature
Humidity

20.3 Degrees Celsius
20.1 Degrees Celsius
39.0 %



Test Date: 06 September 2008


File Name: Tablet OFDM 5.2 GHz Antenna A 06-09-08.da4

DUT: **Fujitsu Tablet Oneya with SP 3x3 abgn; Type: HMW_533AN; Serial: MAC: 0016EA16277E**

- * Communication System: OFDM 5250 MHz; Frequency: 5260 MHz; Duty Cycle: 1:1
- * Medium parameters used: $f = 5260.6$ MHz; $\sigma = 5.6$ mho/m; $\epsilon_r = 44.7$; $\rho = 1000$ kg/m³
- Electronics: DAE3 Sn442; Probe: EX3DV4 - SN3563; ConvF(3.72, 3.72, 3.72)
- Phantom: Flat Phantom 10.1; Serial: P 10.1; Phantom section: Flat 2.2 Section

Channel 52 Test/Area Scan (71x101x1): Measurement grid: dx=10mm, dy=10mm
Maximum value of SAR (interpolated) = 2.17 mW/g

Channel 52 Test/Zoom Scan (7x7x9)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2.5mm
Reference Value = 6.07 V/m; Power Drift = 0.196 dB
Peak SAR (extrapolated) = 3.45 W/kg
SAR(1 g) = 1.07 mW/g; SAR(10 g) = 0.415 mW/g
Maximum value of SAR (measured) = 1.97 mW/g

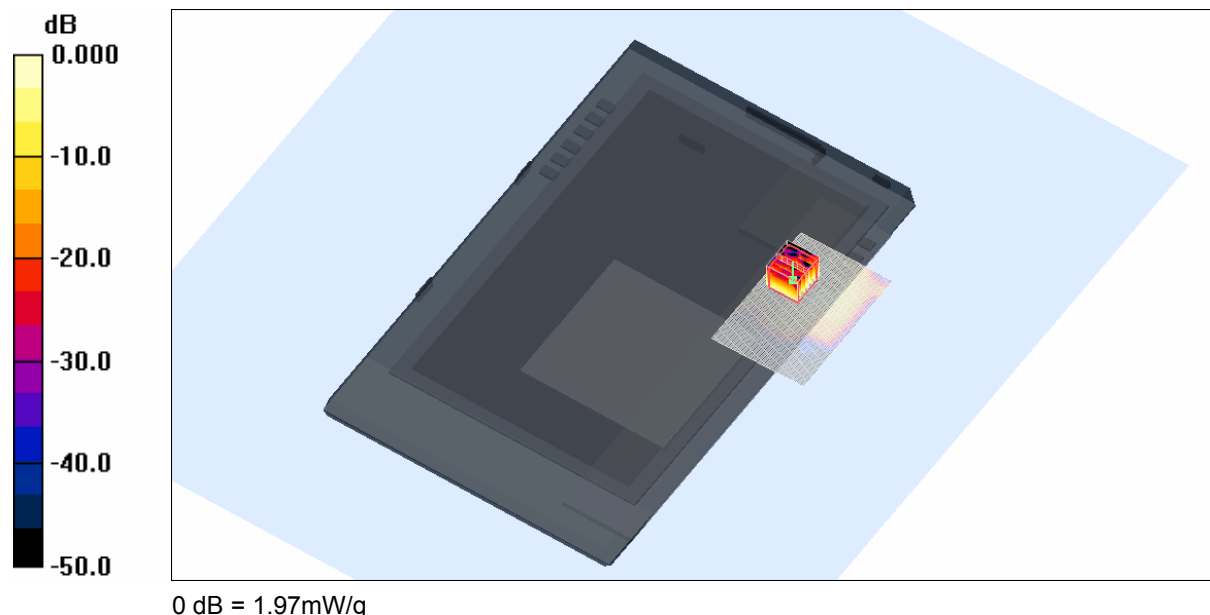

SAR MEASUREMENT PLOT 2

Ambient Temperature
Liquid Temperature
Humidity

20.3 Degrees Celsius
20.1 Degrees Celsius
39.0 %



Test Date: 06 September 2008

File Name: Tablet OFDM 5.2 GHz Antenna A 06-09-08.da4

DUT: **Fujitsu Tablet Oneya with SP 3x3 abgn; Type: HMW_533AN; Serial: MAC: 0016EA16277E**

* Communication System: OFDM 5250 MHz; Frequency: 5320 MHz; Duty Cycle: 1:1

* Medium parameters used: $f = 5319$ MHz; $\sigma = 5.7$ mho/m; $\epsilon_r = 44.4$; $\rho = 1000$ kg/m³

- Electronics: DAE3 Sn442; Probe: EX3DV4 - SN3563; ConvF(3.72, 3.72, 3.72)

- Phantom: Flat Phantom 10.1; Serial: P 10.1; Phantom section: Flat 2.2 Section

Channel 64 Test/Area Scan (71x101x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 2.25 mW/g


Channel 64 Test/Zoom Scan (7x7x9)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2.5mm

Reference Value = 7.10 V/m; Power Drift = -0.201 dB

Peak SAR (extrapolated) = 3.35 W/kg

SAR(1 g) = 1.07 mW/g; SAR(10 g) = 0.420 mW/g

Maximum value of SAR (measured) = 1.95 mW/g

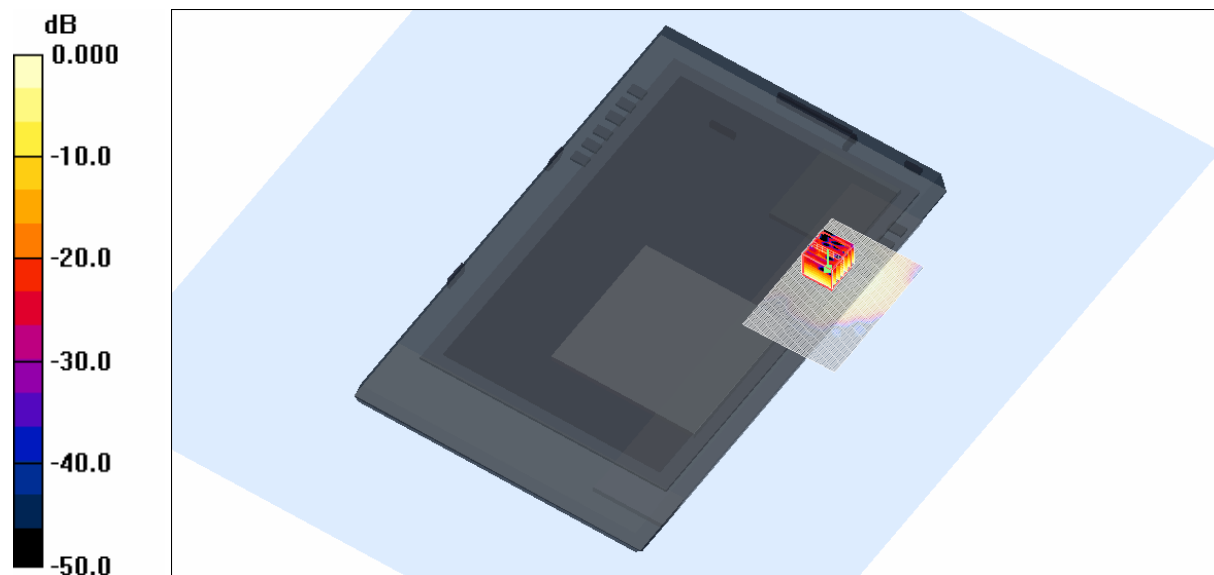

0 dB = 1.95mW/g

SAR MEASUREMENT PLOT 3

Ambient Temperature
Liquid Temperature
Humidity

20.3 Degrees Celsius
20.1 Degrees Celsius
39.0 %



This document must not be copied or reproduced, except in full without the written permission of the Manager, EMC Technologies Pty Ltd. The certificate on page 3 may be reproduced in full.
www.emctech.com.au

Test Date: 06 September 2008


File Name: Tablet OFDM 5.2 GHz Antenna B 06-09-08.da4

DUT: **Fujitsu Tablet Oneya with SP 3x3 abgn; Type: HMW_533AN; Serial: MAC: 0016EA16277E**

- * Communication System: OFDM 5250 MHz; Frequency: 5260 MHz; Duty Cycle: 1:1
- * Medium parameters used: $f = 5260.6$ MHz; $\sigma = 5.6$ mho/m; $\epsilon_r = 44.7$; $\rho = 1000$ kg/m³
- Electronics: DAE3 Sn442; Probe: EX3DV4 - SN3563; ConvF(3.72, 3.72, 3.72)
- Phantom: Flat Phantom 10.1; Serial: P 10.1; Phantom section: Flat 2.2 Section

Channel 52 Test/Area Scan (71x101x1): Measurement grid: dx=10mm, dy=10mm
Maximum value of SAR (interpolated) = 1.31 mW/g

Channel 52 Test/Zoom Scan (7x7x9)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2.5mm
Reference Value = 10.2 V/m; Power Drift = -0.054 dB
Peak SAR (extrapolated) = 2.24 W/kg
SAR(1 g) = 0.708 mW/g; SAR(10 g) = 0.268 mW/g
Maximum value of SAR (measured) = 1.30 mW/g

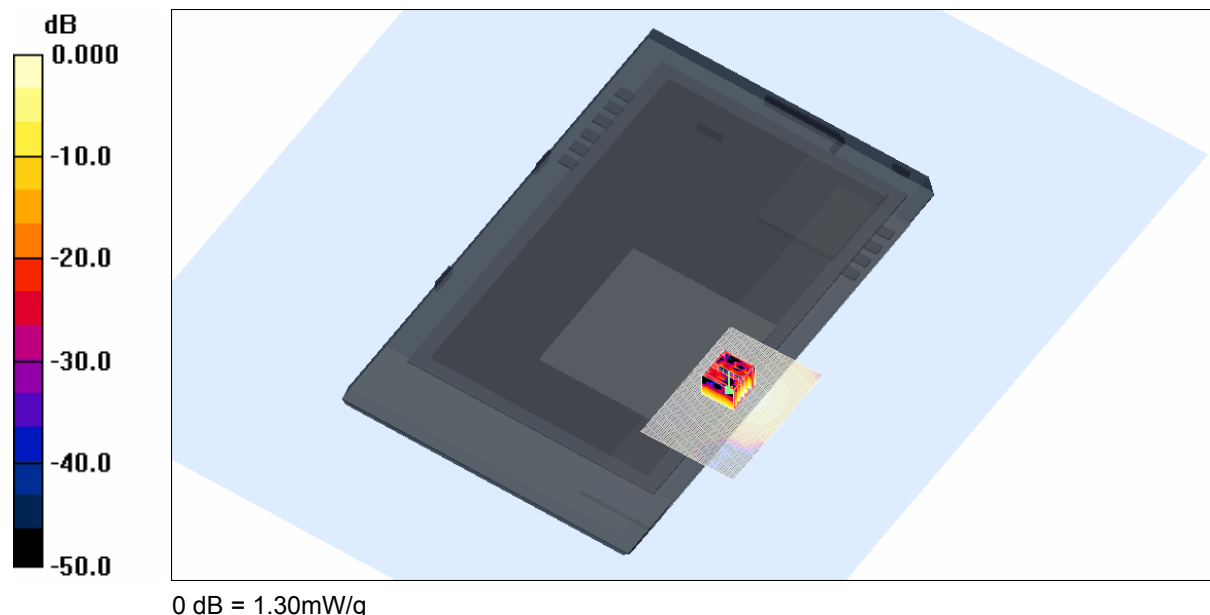

SAR MEASUREMENT PLOT 4

Ambient Temperature
Liquid Temperature
Humidity

20.3 Degrees Celsius
20.1 Degrees Celsius
39.0 %



This document must not be copied or reproduced, except in full without the written permission of the Manager, EMC Technologies Pty Ltd. The certificate on page 3 may be reproduced in full.
www.emctech.com.au

Test Date: 06 September 2008


File Name: Tablet OFDM 5.2 GHz Antenna C 06-09-08.da4

DUT: **Fujitsu Tablet Oneya with SP 3x3 abgn; Type: HMW_533AN; Serial: MAC: 0016EA16277E**

- * Communication System: OFDM 5250 MHz; Frequency: 5260 MHz; Duty Cycle: 1:1
- * Medium parameters used: $f = 5260.6$ MHz; $\sigma = 5.6$ mho/m; $\epsilon_r = 44.7$; $\rho = 1000$ kg/m³
- Electronics: DAE3 Sn442; Probe: EX3DV4 - SN3563; ConvF(3.72, 3.72, 3.72)
- Phantom: Flat Phantom 10.1; Serial: P 10.1; Phantom section: Flat 2.2 Section

Channel 52 Test/Area Scan (101x71x1): Measurement grid: dx=10mm, dy=10mm
Maximum value of SAR (interpolated) = 0.149 mW/g

Channel 52 Test/Zoom Scan (7x7x9)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2.5mm
Reference Value = 2.23 V/m; Power Drift = 0.249 dB
Peak SAR (extrapolated) = 0.202 W/kg
SAR(1 g) = 0.061 mW/g; SAR(10 g) = 0.019 mW/g
Maximum value of SAR (measured) = 0.122 mW/g

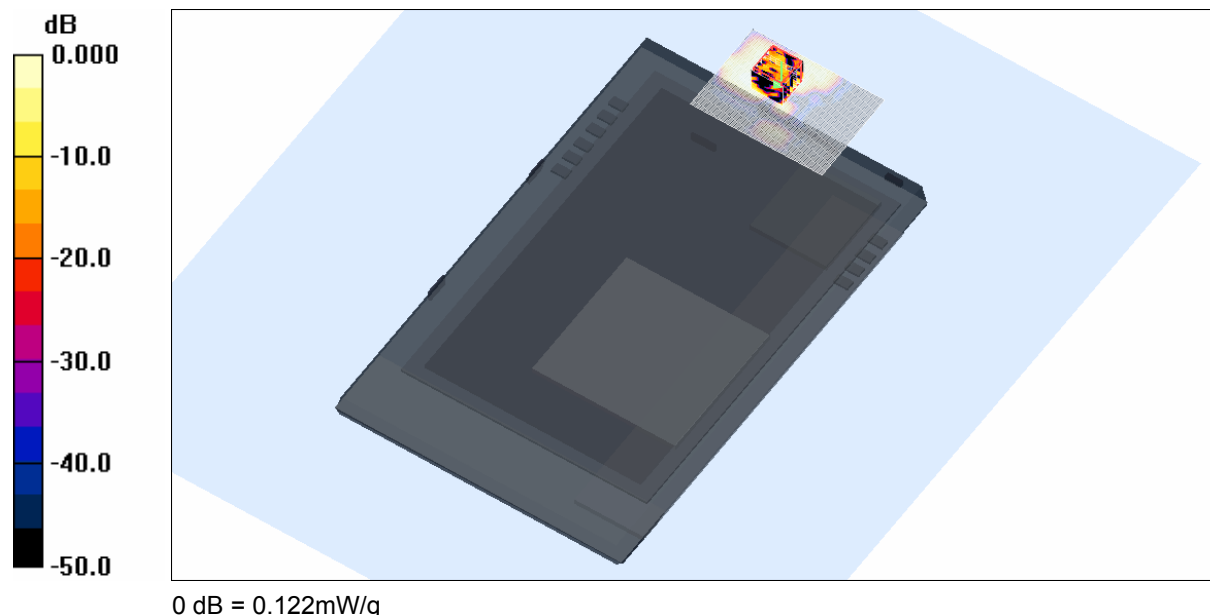



SAR MEASUREMENT PLOT 5


Ambient Temperature
Liquid Temperature
Humidity

20.3 Degrees Celsius
20.1 Degrees Celsius
39.0 %



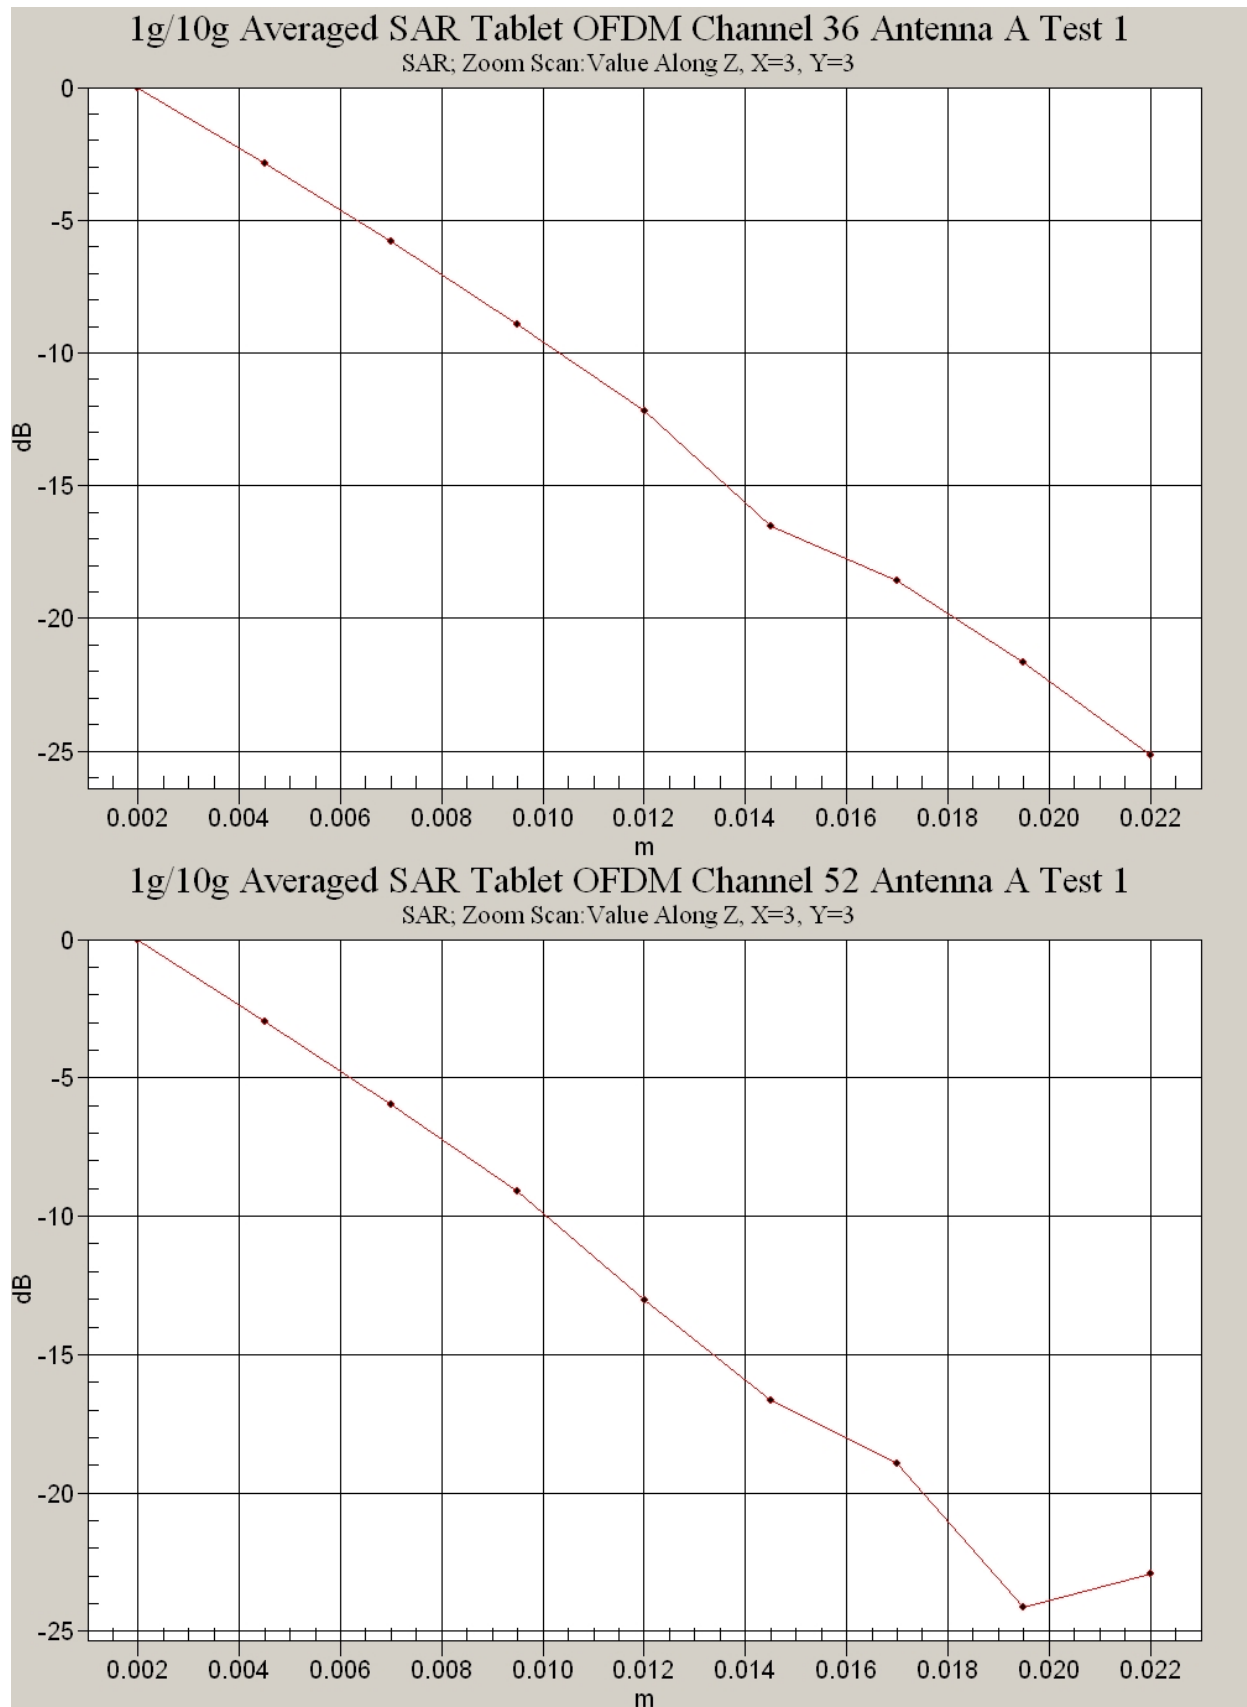

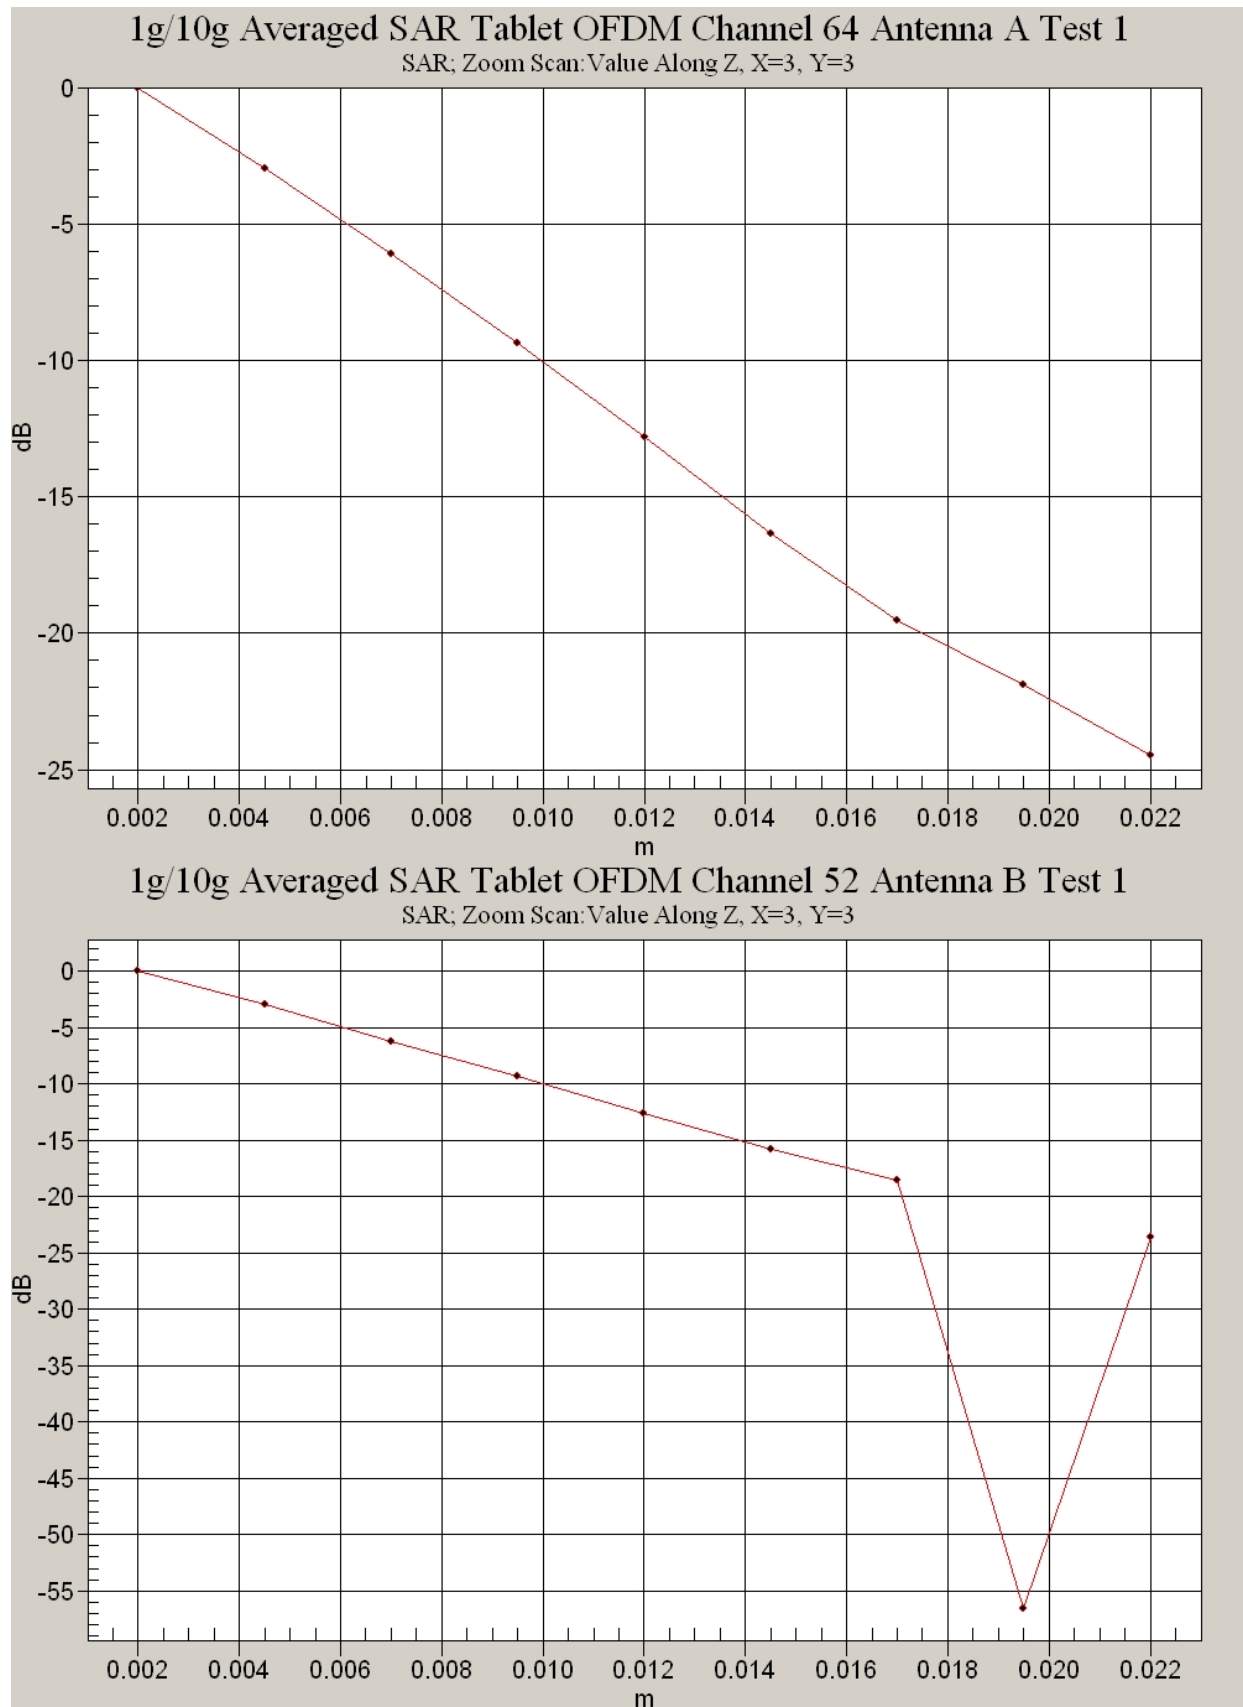

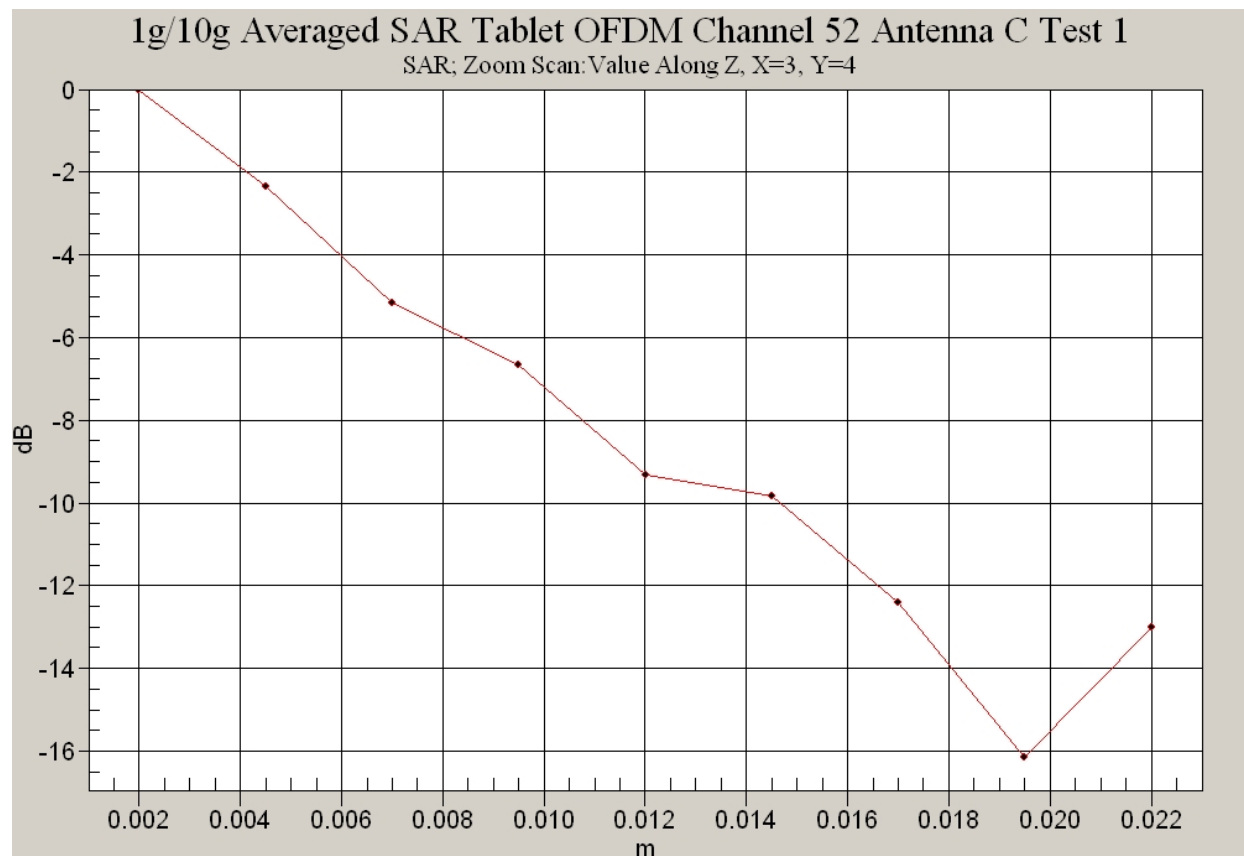

Test Date: 03 September 2008


File Name: Tablet OFDM 5.6 GHz Antenna A 03-09-08.da4

DUT: **Fujitsu Tablet Oneya with SP 3x3 abgn; Type: HMW_533AN; Serial: MAC: 0016EA16277E**

- * Communication System: OFDM 5770 MHz; Frequency: 5600 MHz; Duty Cycle: 1:1
- * Medium parameters used: $f = 5596.4$ MHz; $\sigma = 5.92$ mho/m; $\epsilon_r = 44.3$; $\rho = 1000$ kg/m³
- Electronics: DAE3 Sn442; Probe: EX3DV4 - SN3563; ConvF(3.75, 3.75, 3.75)
- Phantom: Flat Phantom 10.1; Serial: P 10.1; Phantom section: Flat 2.2 Section

Channel 120 Test/Area Scan (71x101x1): Measurement grid: dx=10mm, dy=10mm
Maximum value of SAR (interpolated) = 0.900 mW/g

Channel 120 Test/Zoom Scan (7x7x9)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2.5mm
Reference Value = 4.68 V/m; Power Drift = 0.415 dB
Peak SAR (extrapolated) = 1.90 W/kg
SAR(1 g) = 0.480 mW/g; SAR(10 g) = 0.179 mW/g
Maximum value of SAR (measured) = 0.939 mW/g

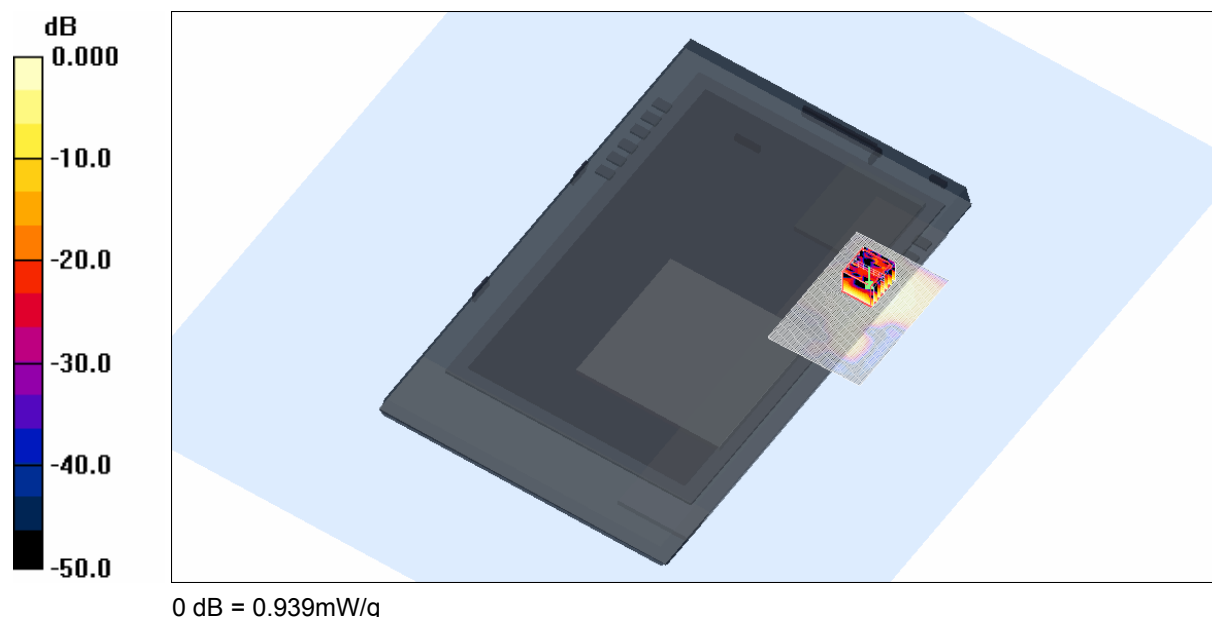

SAR MEASUREMENT PLOT 6

Ambient Temperature
Liquid Temperature
Humidity

20.1 Degrees Celsius
19.8 Degrees Celsius
47.0 %



Test Date: 03 September 2008


File Name: Tablet OFDM 5.6 GHz Antenna B 03-09-08.da4

DUT: Fujitsu Tablet Oneya with SP 3x3 abgn; Type: HMW_533AN; Serial: MAC: 0016EA16277E

- * Communication System: OFDM 5770 MHz; Frequency: 5500 MHz; Duty Cycle: 1:1
- * Medium parameters used: $f = 5494.2$ MHz; $\sigma = 5.75$ mho/m; $\epsilon_r = 44.6$; $\rho = 1000$ kg/m³
- Electronics: DAE3 Sn442; Probe: EX3DV4 - SN3563; ConvF(3.75, 3.75, 3.75)
- Phantom: Flat Phantom 10.1; Serial: P 10.1; Phantom section: Flat 2.2 Section

Channel 100 Test/Area Scan (71x101x1): Measurement grid: dx=10mm, dy=10mm
Maximum value of SAR (interpolated) = 1.81 mW/g

Channel 100 Test/Zoom Scan (7x7x9)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2.5mm
Reference Value = 11.8 V/m; Power Drift = -0.243 dB
Peak SAR (extrapolated) = 3.66 W/kg
SAR(1 g) = 0.966 mW/g; SAR(10 g) = 0.356 mW/g
Maximum value of SAR (measured) = 1.81 mW/g

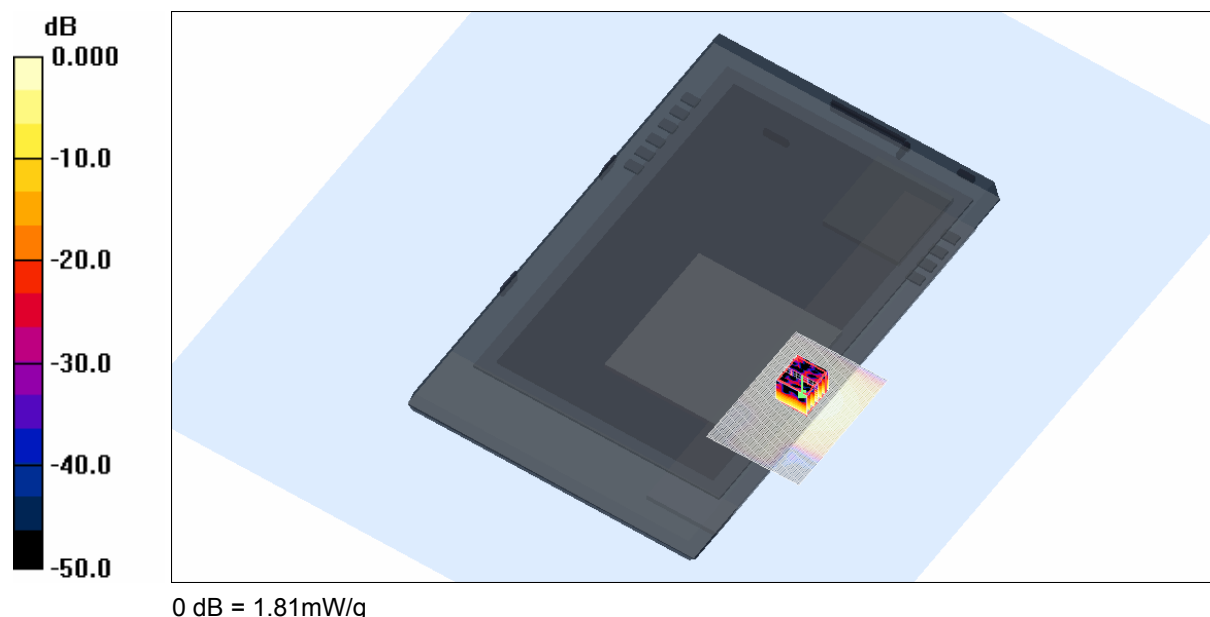

SAR MEASUREMENT PLOT 7

Ambient Temperature
Liquid Temperature
Humidity

20.1 Degrees Celsius
19.8 Degrees Celsius
47.0 %



Test Date: 03 September 2008


File Name: Tablet OFDM 5.6 GHz Antenna B 03-09-08.da4

DUT: Fujitsu Tablet Oneya with SP 3x3 abgn; Type: HMW_533AN; Serial: MAC: 0016EA16277E

- * Communication System: OFDM 5770 MHz; Frequency: 5600 MHz; Duty Cycle: 1:1
- * Medium parameters used: $f = 5596.4$ MHz; $\sigma = 5.92$ mho/m; $\epsilon_r = 44.3$; $\rho = 1000$ kg/m³
- Electronics: DAE3 Sn442; Probe: EX3DV4 - SN3563; ConvF(3.75, 3.75, 3.75)
- Phantom: Flat Phantom 10.1; Serial: P 10.1; Phantom section: Flat 2.2 Section

Channel 120 Test/Area Scan (71x101x1): Measurement grid: dx=10mm, dy=10mm
Maximum value of SAR (interpolated) = 1.52 mW/g

Channel 120 Test/Zoom Scan (7x7x9)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2.5mm
Reference Value = 11.2 V/m; Power Drift = -0.260 dB
Peak SAR (extrapolated) = 3.22 W/kg
SAR(1 g) = 0.837 mW/g; SAR(10 g) = 0.302 mW/g
Maximum value of SAR (measured) = 1.61 mW/g

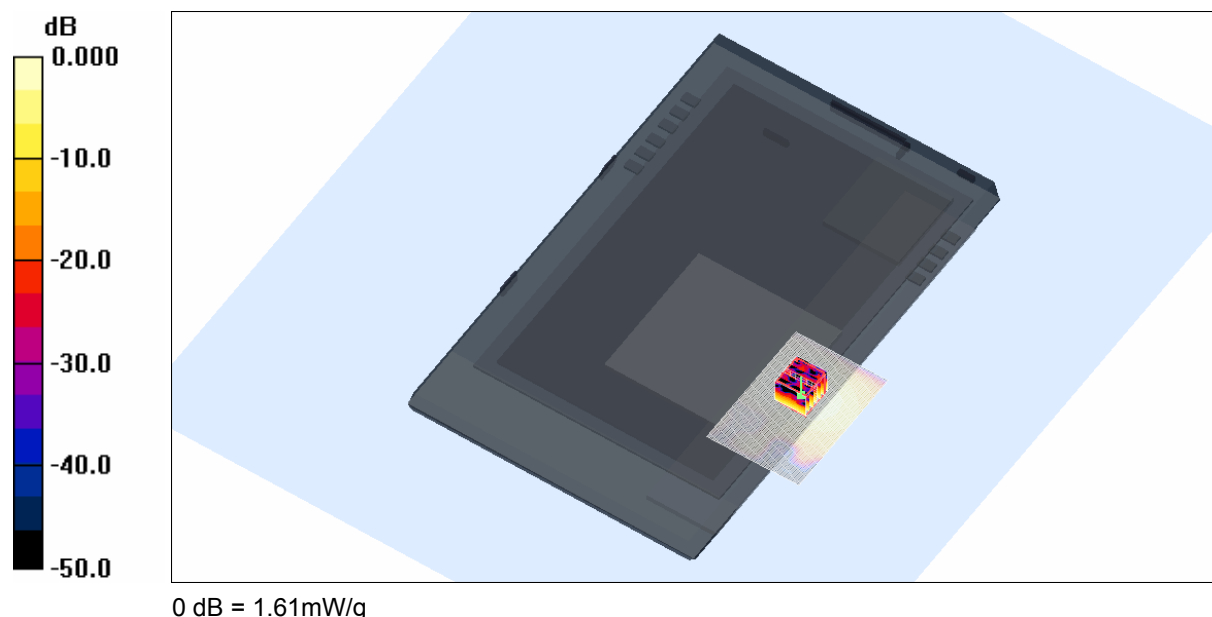

SAR MEASUREMENT PLOT 8

Ambient Temperature
Liquid Temperature
Humidity

20.1 Degrees Celsius
19.8 Degrees Celsius
47.0 %



Test Date: 03 September 2008


File Name: Tablet OFDM 5.6 GHz Antenna B 03-09-08.da4

DUT: Fujitsu Tablet Oneya with SP 3x3 abgn; Type: HMW_533AN; Serial: MAC: 0016EA16277E

- * Communication System: OFDM 5770 MHz; Frequency: 5700 MHz; Duty Cycle: 1:1
- * Medium parameters used: $f = 5698.6$ MHz; $\sigma = 6.09$ mho/m; $\epsilon_r = 44$; $\rho = 1000$ kg/m³
- Electronics: DAE3 Sn442; Probe: EX3DV4 - SN3563; ConvF(3.75, 3.75, 3.75)
- Phantom: Flat Phantom 10.1; Serial: P 10.1; Phantom section: Flat 2.2 Section

Channel 140 Test/Area Scan (71x101x1): Measurement grid: dx=10mm, dy=10mm
Maximum value of SAR (interpolated) = 1.60 mW/g

Channel 140 Test/Zoom Scan (7x7x9)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2.5mm
Reference Value = 10.2 V/m; Power Drift = 0.190 dB
Peak SAR (extrapolated) = 3.22 W/kg
SAR(1 g) = 0.817 mW/g; SAR(10 g) = 0.292 mW/g
Maximum value of SAR (measured) = 1.61 mW/g

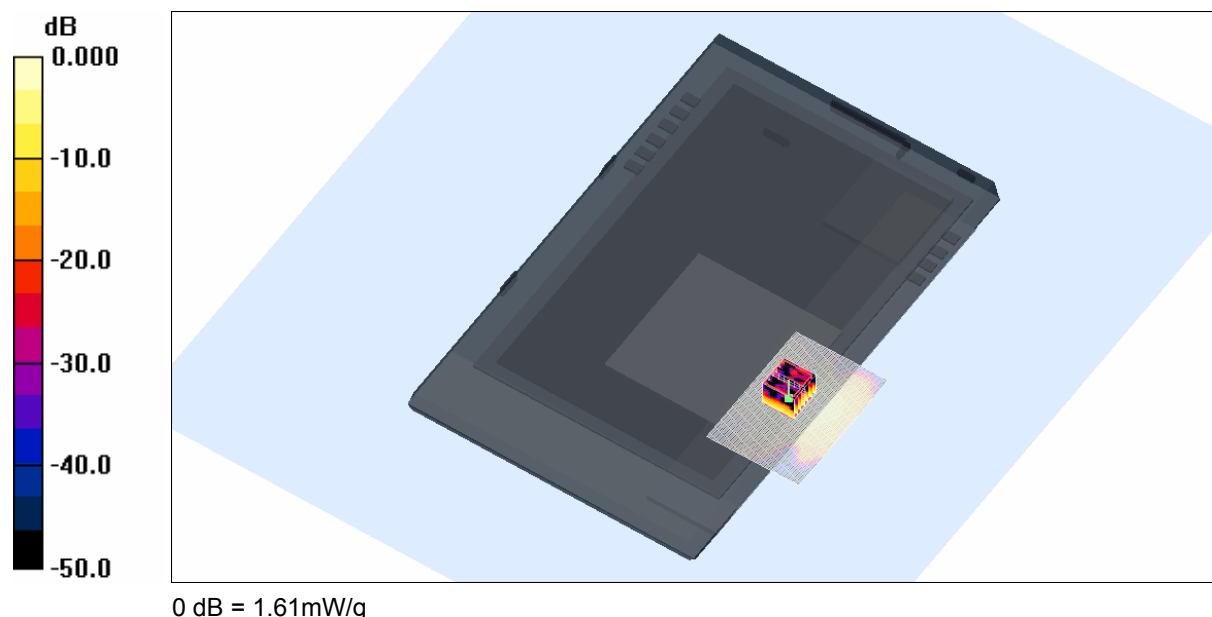

SAR MEASUREMENT PLOT 9

Ambient Temperature
Liquid Temperature
Humidity

20.1 Degrees Celsius
19.8 Degrees Celsius
47.0 %



This document must not be copied or reproduced, except in full without the written permission of the Manager, EMC Technologies Pty Ltd. The certificate on page 3 may be reproduced in full.
www.emctech.com.au

Test Date: 03 September 2008


File Name: Tablet OFDM 5.6 GHz Antenna C 03-09-08.da4

DUT: **Fujitsu Tablet Oneya with SP 3x3 abgn; Type: HMW_533AN; Serial: MAC: 0016EA16277E**

- * Communication System: OFDM 5770 MHz; Frequency: 5600 MHz; Duty Cycle: 1:1
- * Medium parameters used: $f = 5596.4$ MHz; $\sigma = 5.92$ mho/m; $\epsilon_r = 44.3$; $\rho = 1000$ kg/m³
- Electronics: DAE3 Sn442; Probe: EX3DV4 - SN3563; ConvF(3.75, 3.75, 3.75)
- Phantom: Flat Phantom 10.1; Serial: P 10.1; Phantom section: Flat 2.2 Section

Channel 120 Test/Area Scan (101x71x1): Measurement grid: dx=10mm, dy=10mm
Maximum value of SAR (interpolated) = 0.167 mW/g

Channel 120 Test/Zoom Scan (7x7x9)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2.5mm
Reference Value = 2.76 V/m; Power Drift = -0.215 dB
Peak SAR (extrapolated) = 0.454 W/kg
SAR(1 g) = 0.052 mW/g; SAR(10 g) = 0.017 mW/g
Maximum value of SAR (measured) = 0.109 mW/g

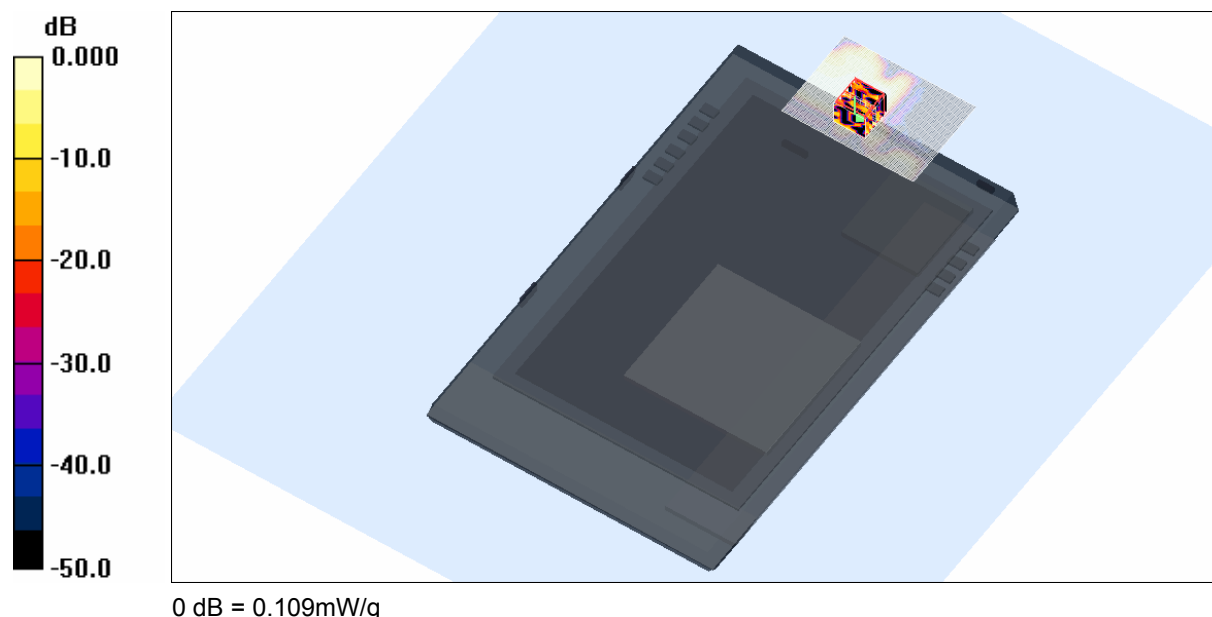

SAR MEASUREMENT PLOT 10

Ambient Temperature
Liquid Temperature
Humidity

20.1 Degrees Celsius
19.8 Degrees Celsius
47.0 %



