



Global Product Certification  
EMC-EMF-Safety Approvals

**EMC Technologies Pty Ltd**  
ABN 82 057 105 549  
176 Harrick Road  
Keilor Park  
Victoria Australia 3042

Ph: + 613 9365 1000  
Fax: + 613 9331 7455  
email: melb@emctech.com.au

## SAR Test Report

Report Number: M090733\_CERT\_533AN\_HMW\_SAR\_5.6

Test Sample: Portable TABLET Computer  
Host PC Model Number: T4310  
Radio Modules: WLAN 533AN\_HMW

PC System FCC ID: EJE-WL0017  
PC System IC: 337J-WL0017  
Date of Issue: 20<sup>th</sup> September 2009

EMC Technologies Pty Ltd reports apply only to the specific samples tested under stated test conditions. It is the manufacturer's responsibility to assure that additional production units of this model are manufactured with identical electrical and mechanical components. EMC Technologies Pty Ltd shall have no liability for any deductions, inferences or generalisations drawn by the client or others from EMC Technologies Pty Ltd issued reports. This report shall not be used to claim, constitute or imply product endorsement by EMC Technologies Pty Ltd.



Accreditation No. 5292

This document must not be copied or reproduced, except in full without the written permission of the Manager, EMC Technologies Pty Ltd. The certificate on page 3 may be reproduced in full.  
[www.emctech.com.au](http://www.emctech.com.au)

## CONTENTS

<b>1.0 GENERAL INFORMATION.....</b>	<b>3</b>
<b>2.0 INTRODUCTION.....</b>	<b>4</b>
<b>3.0 TEST SAMPLE TECHNICAL INFORMATION.....</b>	<b>4</b>
3.1 EUT (WLAN) Details .....	4
3.2 EUT (Notebook PC) Details .....	5
3.3 Test sample Accessories .....	5
3.3.1 <i>Battery Types</i> .....	5
<b>4.0 TEST SIGNAL, FREQUENCY AND OUTPUT POWER.....</b>	<b>6</b>
4.1 Battery Status.....	6
<b>5.0 DETAILS OF TEST LABORATORY.....</b>	<b>7</b>
5.1 Location .....	7
5.2 Accreditations.....	7
5.3 Environmental Factors .....	7
<b>6.0 DESCRIPTION OF SAR MEASUREMENT SYSTEM.....</b>	<b>8</b>
6.1 Probe Positioning System .....	8
6.2 E-Field Probe Type and Performance .....	8
6.3 Data Acquisition Electronics .....	8
6.4 Validation .....	8
6.4.1 <i>Validation Results @ 5GHz</i> .....	8
6.4.2 <i>Deviation from reference validation values</i> .....	8
6.4.3 <i>Liquid Depth 15cm</i> .....	9
6.5 Phantom Properties (Size, Shape, Shell Thickness) .....	10
6.6 Tissue Material Properties.....	11
6.6.1 <i>Liquid Temperature and Humidity</i> .....	12
6.7 Simulated Tissue Composition Used for SAR Test .....	12
6.8 Device Holder for Laptops and P 10.1 Phantom .....	12
<b>7.0 SAR MEASUREMENT PROCEDURE USING DASY4.....</b>	<b>13</b>
<b>8.0 MEASUREMENT UNCERTAINTY.....</b>	<b>14</b>
<b>9.0 EQUIPMENT LIST AND CALIBRATION DETAILS.....</b>	<b>16</b>
<b>10.0 OET BULLETIN 65 – SUPPLEMENT C TEST METHOD.....</b>	<b>17</b>
10.0 Position .....	17
10.1.1 <i>“Tablet” Position Definition (0mm spacing)</i> .....	17
10.1.2 <i>“Edge On” Position (Portrait or Landscape)</i> .....	17
10.2 List of All Test Cases (Antenna In/Out, Test Frequencies, User Modes).....	17
10.3 FCC RF Exposure Limits for Occupational/ Controlled Exposure.....	18
10.4 FCC RF Exposure Limits for Un-controlled/Non-occupational .....	18
<b>11.0 SAR MEASUREMENT RESULTS .....</b>	<b>18</b>
11.1 5GHz Band SAR Results .....	18
<b>12.0 COMPLIANCE STATEMENT .....</b>	<b>20</b>
<b>APPENDIX A1 TEST SAMPLE PHOTOGRAPHS .....</b>	<b>21</b>
<b>APPENDIX A2 TEST SAMPLE PHOTOGRAPHS .....</b>	<b>22</b>
<b>APPENDIX A3 TEST SAMPLE PHOTOGRAPHS .....</b>	<b>23</b>
<b>APPENDIX A4 TEST SETUP PHOTOGRAPHS .....</b>	<b>24</b>
<b>APPENDIX A5 TEST SETUP PHOTOGRAPHS .....</b>	<b>25</b>
<b>APPENDIX A6 TEST SETUP PHOTOGRAPHS .....</b>	<b>26</b>
<b>APPENDIX A7 TEST SETUP PHOTOGRAPHS .....</b>	<b>27</b>
<b>APPENDIX A8 TEST SETUP PHOTOGRAPHS .....</b>	<b>28</b>
<b>APPENDIX B PLOTS OF THE SAR MEASUREMENTS .....</b>	<b>29</b>
<b>APPENDIX C CALIBRATION DOCUMENTS .....</b>	<b>117</b>



## SAR TEST REPORT

**Report Number: M090733\_CERT\_533AN\_HMW\_SAR\_5.6**  
**PC System FCC ID: EJE-WL0017 PC System IC: 337J-WL0017**

### 1.0 GENERAL INFORMATION

**Test Sample:** Portable TABLET Computer  
**Model Name:** T4310  
**Radio Modules:** WLAN 533AN\_HMW  
**Interface Type:** Mini-PCI Module  
**Device Category:** Portable Transmitter  
**Test Device:** Pre-Production Unit  
**FCC System ID:** EJE-WL0017  
**PC System IC:** 337J-WL0017  
**RF exposure Category:** General Population/Uncontrolled

**Manufacturer:** Fujitsu Limited

**Test Standard/s:**

1. Evaluating Compliance with FCC Guidelines For Human Exposure to Radiofrequency Electromagnetic Fields, Supplement C (Edition 01-01) to OET Bulletin 65 (Edition 97-01)
2. Radio Frequency Exposure Compliance of Radiocommunication Apparatus (All Frequency Bands), RSS-102 Issue 2 November 2005

**Statement Of Compliance:** The Fujitsu TABLET Computer T4310 with Wireless LAN model 533AN\_HMW complied\* with the FCC General public/uncontrolled RF exposure limits of 1.6mW/g per requirements of 47CFR2.1093(d). It also complied with IC RSS-102 requirements.

**Test Dates:** 3<sup>rd</sup> to 19<sup>th</sup> August 2009

**Test Officer:**



---

Peter Jakubiec

**Authorised Signature:**



---

Peter Jakubiec

This document is issued in accordance with NATA's accreditation requirements. The results of tests, calibration and/or measurements included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing and calibration reports.



This document must not be copied or reproduced, except in full without the written permission of the Manager, EMC Technologies Pty Ltd. The certificate on page 3 may be reproduced in full.  
[www.emctech.com.au](http://www.emctech.com.au)

**SAR TEST REPORT**  
**Portable TABLET Computer, Model: T4310**  
**Report Number: M090733\_CERT\_533AN\_HMW\_SAR\_5.6**

## 2.0 INTRODUCTION

Testing was performed on the Fujitsu TABLET PC, Model: T4310 with INTEL Mini-PCI Wireless LAN Module (WIFI LINK 5300 (SHIRLEY PEAK) 802.11 a/b/g/n), Model: 533AN\_HMW. The WIFI LINK 5300 (SHIRLEY PEAK) module is an OEM product. The Mini-PCI Wireless LAN (WLAN) was tested in the dedicated host – LIFEBOOK T-SERIES, Model T4310.

The measurement test results mentioned here on only apply to the 5GHz frequency band; an additional report titled “M090733\_CERT\_533AN\_HMW\_SAR\_2.4” applies to the 2450MHz frequency range.

## 3.0 TEST SAMPLE TECHNICAL INFORMATION

(Information supplied by the client)

### 3.1 EUT (WLAN) Details

<b>Transmitter:</b>	Half Mini-Card Wireless LAN Module
<b>Wireless Module:</b>	Shirley Peak 3x3 (11a/b/g/n)
<b>Model Number:</b>	533AN_HMW
<b>Manufacturer:</b>	Intel Corporation
<b>Modulation Type:</b>	Direct Sequence Spread Spectrum (DSSS for 802.11b) Orthogonal Frequency Division Multiplexing (OFDM for 802.11a/g/n)
<b>2.4 GHz (802.11b/g/n):</b>	DBPSK, DQPSK, CCK, 16QAM and 64QAM
<b>5 GHz (802.11a/n):</b>	BPSK, QPSK, 16QAM and 64QAM
<b>Maximum Data Rate:</b>	802.11b = 11Mbps, 802.11g and 802.11a = 54Mbps 802.11n = 450 Mbps
<b>Frequency Ranges:</b>	2.412 – 2.462 GHz for 11b/g/n 5.18 - 5.32 GHz, 5.5 – 5.7 GHz and 5.745 - 5.825 GHz for 11a/n
<b>Number of Channels:</b>	11 channels for 11b/g/n 24 channels for 11a/n with 20 MHz bandwidth 18 channels for 11n with 40 MHz bandwidth
<b>Antenna Types:</b>	Nissei Inverted F (1st , 2nd ) and Yokowa Monopole (3rd) Locations: Left Top edge of LCD screen(1st) Right lower edge of LCD screen(2nd) Right side of hinge (3rd)
<b>Antenna gain:</b>	Max antenna gain is less than 6 dBi.
<b>Power Supply:</b>	3.3 VDC from PCI bus

**Channels and Output power setting:**

<b>Modes</b>	<b>Channels</b>	<b>Frequency MHz</b>	<b>Average Output Power (dBm)</b>
<b>802.11b/g</b>	1, 6 and 11	2412, 2437 and 2462	16.5
	36, 40 and 48	5180, 5200 and 5240	
	52, 60 and 64	5260, 5300 and 5320	
	100, 120 and 140	5500, 5600 and 5700	16.5
	149, 157 and 165	5745, 5785 and 5825	
<b>802.11n 20MHz Bandwidth</b>	1	2412	14.5
	6	2437	16.5
	11	2462	14.5
	36, 40 and 48	5180, 5200 and 5240	
	52, 60 and 64	5260, 5300 and 5320	
	100, 120 and 140	5500, 5600 and 5700	16.5
	149, 157 and 165	5745, 5785 and 5825	
	3, 6 and 9	2422, 2437 and 2452	14.5
<b>802.11n 40MHz Bandwidth</b>	38, 54 and 62	5190, 5270 and 5310	
	102, 118 and 134	5510, 5590 and 5670	16.5
	151 and 159	5755 and 5795	

NOTE: For 2450 MHz SAR results refer to report titled "M090733\_CERT\_533AN\_HMW\_SAR\_2.4".

### 3.2 EUT (Notebook PC) Details

<b>Host:</b>	LifeBook T series
<b>Model Name:</b>	T4310
<b>Serial Number:</b>	Pre-production Sample
<b>Manufacturer:</b>	FUJITSU LIMITED
<b>CPU Type and Speed:</b>	Core2 Duo T9600 2.8GHz
<b>LCD:</b>	12.1"WXGA
<b>Wired LAN:</b>	Broadcom BCM57780 : 10 Base-T/100 Base-TX/1000Base-T
<b>Modem:</b>	None
<b>Port Replicator Model:</b>	FPCPR94
<b>AC Adapter Model:</b>	80W: SEE100P2-19.0 (Sanken), ADP-80NB A(Delta)
<b>Voltage:</b>	19 V
<b>Current Specs:</b>	4.22A
<b>Watts:</b>	80W

### 3.3 Test sample Accessories

#### 3.3.1 Battery Types

Two types of Fujitsu Lithium Ion Battery are used to power the Portable TABLET Computer Wireless LAN Model: 533AN\_HMW. SAR measurements were performed with the battery as shown below.

#### Standard Battery

<b>Battery #1</b>	<b>Battery #2</b>
P/N CP422590-02 (Extended Battery)	P/N CP302296-01 (FPCBP200)
V/mAh 10.8V/5800mAh	V/mAh 10.8V/5200mAh
S/N 01-Z090604000159Z	S/N 01A-W090623000736WE



This document must not be copied or reproduced, except in full without the written permission of the Manager, EMC Technologies Pty Ltd. The certificate on page 3 may be reproduced in full.  
[www.emctech.com.au](http://www.emctech.com.au)

Accreditation No. 5292

## 4.0 TEST SIGNAL, FREQUENCY AND OUTPUT POWER

INTEL's CRTU test tool was used to configure the WLAN for testing. The Portable Tablet Computer Wireless LAN had a total of 11 channels (USA model) within the 2412 to 2462 MHz frequency band and 24 channels within the frequency range 5180 – 5825 MHz. In The frequency range 2412 MHz to 2462 MHz the device operates in 2 modes, OFDM and DSSS. Within the 5180 – 5825 MHz frequency range the device operates in OFDM mode only. For the SAR measurements the device was operating in continuous transmit mode using programming codes supplied by Fujitsu.

The test results mentioned in this report only apply to the 5200/5800MHz frequency range. An additional report titled 'M090733\_CERT\_533AN\_HMW\_SAR\_2.4" is specific to the 2450MHz range.

The WLAN modules can be configured in a number of different data rates. It was found that the highest source based time averaged power was measured when using the lowest data rates available in each mode. This lowest data rate corresponds to 6Mbps in OFDM mode and 1Mbps in DSSS mode.

The frequency span of the 2450 MHz range and 5600MHz Bands was more than 10MHz consequently; the SAR levels of the test sample were measured for lowest, centre and highest channels in the applicable modes. The EUT is capable of using two antennas transmitting simultaneously (MCS8 DATA mode) the power level is 3dB lower (50%) than if a single antenna was transmitting, and also the EUT is capable of using three antennas transmitting simultaneously (MCS16 DATA mode) the power level is 5dB lower than if a single antenna was transmitting. There were no wires or other connections to the Portable TABLET Computer during the SAR measurements.

At the beginning and at the completion of the SAR tests, the conducted power of the device was measured after temporary modification of antenna connector inside the device's TX RX compartment. Measurements were performed with a calibrated Power Meter. The Transmitter power was set to be equal or higher than power specified by the manufacturer.

### 4.1 Battery Status

The device battery was fully charged prior to commencement of measurement. Each SAR test was completed within 30 minutes. The battery condition was monitored by measuring the RF field at a defined position inside the phantom before the commencement of each test and again after the completion of the test. It was not possible to perform conducted power measurements at the output of the device, at the beginning and end of each scan due to lack of a suitable antenna port. The uncertainty associated with the power drift was less than 12% and was assessed in the uncertainty budget.

## 5.0 DETAILS OF TEST LABORATORY

### 5.1 Location

EMC Technologies Pty Ltd  
176 Harrick Road  
Keilor Park, (Melbourne) Victoria  
Australia 3042

**Telephone:** +61 3 9365 1000  
**Facsimile:** +61 3 9331 7455  
**email:** [melb@emctech.com.au](mailto:melb@emctech.com.au)  
**website:** [www.emctech.com.au](http://www.emctech.com.au)

### 5.2 Accreditations

EMC Technologies Pty. Ltd. is accredited by the National Association of Testing Authorities, Australia (NATA).  
**NATA Accredited Laboratory Number: 5292**

EMC Technologies Pty Ltd is NATA accredited for the following standards:

<b>AS/NZS 2772.1:</b>	RF and microwave radiation hazard measurement
<b>ACA:</b>	Radio communications (Electromagnetic Radiation - Human Exposure) Standard 2003
<b>FCC:</b>	Guidelines for Human Exposure to RF Electromagnetic Field OET65C 01/01
<b>EN 50360: 2001</b>	Product standard to demonstrate the compliance of mobile phones with the basic restrictions related to human exposure to electromagnetic fields (300 MHz – 3 GHz)
<b>EN 62209-1:2006</b>	Human Exposure to radio frequency fields from hand-held and body-mounted wireless communication devices - Human models instrumentation and procedures. <b>Part 1:</b> Procedure to determine the specific absorption rate (SAR) for hand-held devices used in close proximity to the ear (300 MHz to 3 GHz)
<b>IEEE 1528: 2003</b>	Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head Due to Wireless Communications Devices: Measurement Techniques.

Refer to NATA website [www.nata.asn.au](http://www.nata.asn.au) for the full scope of accreditation.

### 5.3 Environmental Factors

The measurements were performed in a shielded room with no background RF signals. The temperature in the laboratory was controlled to within  $21\pm1^{\circ}\text{C}$ , the humidity was in the range 42% to 46%. The liquid parameters are measured daily prior to the commencement of each test. Tests were performed to check that reflections within the environment did not influence the SAR measurements. The noise floor of the DASY4 SAR measurement system using the SN3563 probe was less than  $5\mu\text{V}$  in both air and liquid mediums.

## 6.0 DESCRIPTION OF SAR MEASUREMENT SYSTEM

Applicable Head Configurations	: None
Applicable Body Configurations	: Tablet Position
	: Edge On Position

### 6.1 Probe Positioning System

The measurements were performed with the state-of-the-art automated near-field scanning system **DASY4 V4.7 Build 53** from Schmid & Partner Engineering AG (SPEAG). The system is based on a high precision 6-axis robot (working range greater than 1.1m), which positions the SAR measurement probes with a positional repeatability of better than  $\pm 0.02$  mm. The DASY4 fully complies with the OET65 C (01-01), IEEE 1528 and EN62209-1 SAR measurement requirements.

### 6.2 E-Field Probe Type and Performance

The SAR measurements were conducted with SPEAG dosimetric probe EX3DV4 Serial: 3563 (5.6 GHz) designed in the classical triangular configuration and optimised for dosimetric evaluation. The probe has been calibrated and found to be accurate to better than  $\pm 0.25$  dB. The probe is suitable for measurements close to material discontinuity at the surface of the phantom. The sensors of the probe are directly loaded with Schottky diodes and connected via highly resistive lines (length = 300 mm) to the data acquisition unit.

### 6.3 Data Acquisition Electronics

The data acquisition electronics (DAE3) consists of a highly sensitive electrometer-grade preamplifier with auto-zeroing, a channel and gain switching multiplexer, a fast 16 bit AD-converter and a command decoder and control logic unit. The input impedance of the DAE3 box is  $200\text{ M}\Omega$ ; the inputs are symmetrical and floating. Common mode rejection is above 80dB. Transmission to the PC-card is accomplished through an optical downlink for data and status information as well as an optical uplink for commands and the clock.

The mechanical probe-mounting device includes two different sensor systems for frontal and sideways probe contacts. They are used for mechanical surface detection and probe collision detection.

### 6.4 Validation

#### 6.4.1 Validation Results @ 5GHz

The following table lists the dielectric properties of the tissue simulating liquid measured prior to SAR validation. The results of the validation are listed in columns 4 and 5. The forward power into the reference dipole for SAR validation was adjusted to 250 mW.

Table: Validation Results (Dipole: SPEAG D5GHzV2 SN: 1008)

1. Validation Date	2. $\epsilon_r$ (measured)	3. $\sigma$ (mho/m) (measured)	4. Measured SAR 1g (mW/g)	5. Measured SAR 10g (mW/g)
3 <sup>rd</sup> August 2009	36.0	5.43	22.0	6.26
5 <sup>th</sup> August 2009	36.70	4.92	20.7	5.88
7 <sup>th</sup> August 2009	37.20	4.90	21.8	6.23
18 <sup>th</sup> August 2009	37.60	4.66	20.9	5.91
19 <sup>th</sup> August 2009	36.80	5.10	21.9	6.17
19 <sup>th</sup> August 2009	35.40	5.32	22.0	6.21

#### 6.4.2 Deviation from reference validation values

The reference SAR value is the SAR validation result obtained in a specific dielectric liquid using the validation dipole (D5GHzV2) after system component calibration. The measured one-gram SAR should be within 10% of the expected target reference values shown in table below.



This document must not be copied or reproduced, except in full without the written permission of the Manager, EMC Technologies Pty Ltd. The certificate on page 3 may be reproduced in full.  
[www.emctech.com.au](http://www.emctech.com.au)

Accreditation No. 5292

**Table: Deviation from reference validation values in 5.6 GHz band.**

Frequency and Date	Measured SAR 1g (mW/g)	Measured SAR 1g (Normalized to 1W)	EMCT Reference SAR Value 1g (mW/g)	Deviation From EMCT Reference 1g (%)
5200MHz 18 <sup>th</sup> August 2009	20.9	83.60	89.6	-6.70
5200MHz 7 <sup>th</sup> August 2009	21.8	87.20	89.6	-2.68
5500MHz 5 <sup>th</sup> August 2009	20.7	82.80	85.2	-2.82
5500MHz 19 <sup>th</sup> August 2009	21.9	87.60	85.2	2.82
5800MHz 3 <sup>rd</sup> August 2009	22.0	88.00	89.2	-1.35
5800MHz 19 <sup>th</sup> August 2009	22.0	88.00	89.2	-1.35

NOTE: All reference validation values are referenced to 1W input power.

#### 6.4.3 Liquid Depth 15cm

During the SAR measurement process the liquid level was maintained to a level of a least 15cm with a tolerance of 0.5cm.

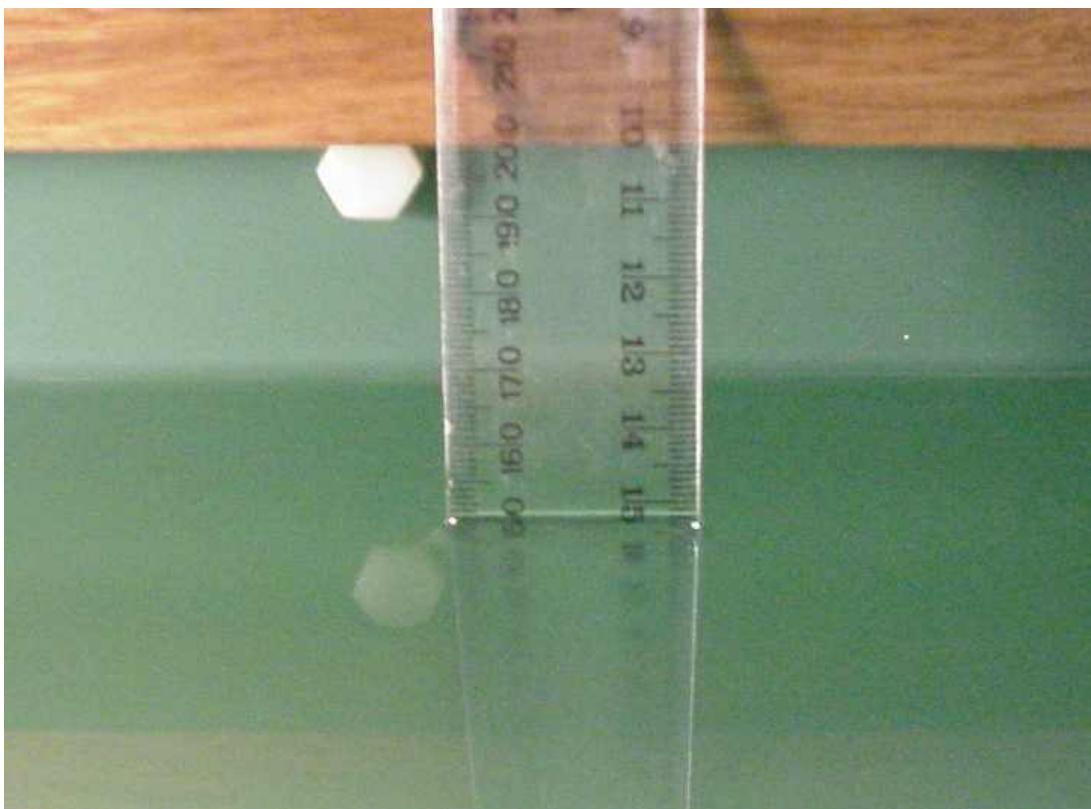


Photo of liquid Depth in Flat Phantom

## 6.5 Phantom Properties (Size, Shape, Shell Thickness)

The phantom used during the validations was the SAM Phantom model: TP - 1260 from SPEAG. It is a phantom with a single thickness of 2 mm and was filled with the required tissue simulating liquid. The SAM phantom support structures were all non-metallic and spaced more than one device width away in transverse directions.

For SAR testing in the body worn positions an AndreT Flat phantom P 10.1 was used. The phantom thickness is 2.0mm+/-0.2 mm and was filled with the required tissue simulating liquid. Table below provides a summary of the measured phantom properties.

**Table: Phantom Properties**


Phantom Properties	Required	Measured
Thickness of flat section	2.0mm ± 0.2mm (bottom section)	2.12-2.20mm
Dielectric Constant	<5.0	4.603
Loss Tangent	<0.05	0.0379

Depth of Phantom 200mm  
Length of Flat Section 620mm  
Width of Flat Section 540mm

P 10.1 Flat Phantom



P 10.1 Flat Phantom

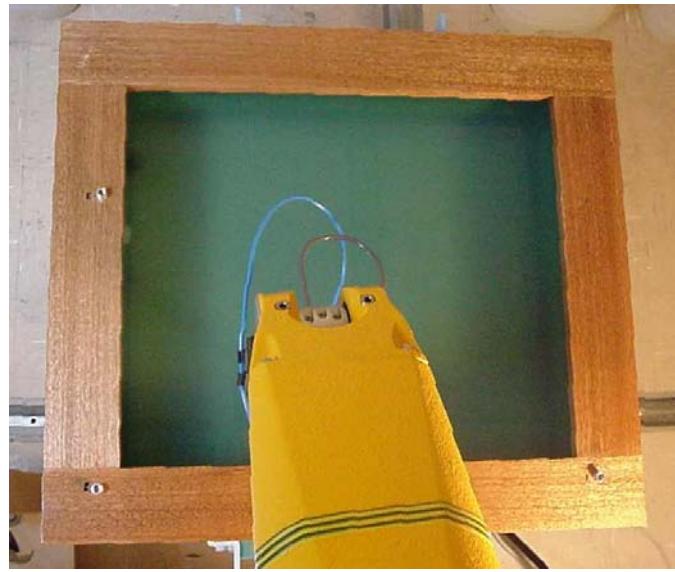

## 6.6 Tissue Material Properties

The dielectric parameters of the brain simulating liquid were measured prior to SAR assessment using the HP85070A dielectric probe kit and HP8753ES Network Analyser. The actual dielectric parameters are shown in the following table.

**Table: Measured Brain Simulating Liquid Dielectric Values for Validations**

Frequency Band	$\epsilon_r$ (measured range)	$\epsilon_r$ (target)	$\sigma$ (mho/m) (measured range)	$\sigma$ (target)	$\rho$ kg/m <sup>3</sup>
5200 MHz Brain	37.2 - 37.6	36.0 $\pm$ 5% (34.2 to 37.8)	4.66 - 4.90	4.76 $\pm$ 5% (4.43 to 4.90)	1000
5500 MHz Brain	36.7 - 36.8	35.6 $\pm$ 5% (33.8 to 37.4)	4.92 - 5.10	4.96 $\pm$ 5% (4.71 to 5.21)	1000
5800 MHz Brain	35.4 - 36.0	35.3 $\pm$ 5% (33.5 to 37.1)	5.32 - 5.43	5.27 $\pm$ 5% (5.01 to 5.53)	1000

NOTE: The brain liquid parameters were within the required tolerances of  $\pm$ 5%.

**Table: Measured Body Simulating Liquid Dielectric Values for 5200MHz range**

Frequency Band	$\epsilon_r$ (measured range)	$\epsilon_r$ (target)	$\sigma$ (mho/m) (measured range)	$\sigma$ (target)	$\rho$ kg/m <sup>3</sup>
5180 MHz Muscle	47.2 - 48.2	49.0 $\pm$ 10% (44.1 to 53.9)	5.23 - 5.35	5.3 $\pm$ 10% (4.77 to 5.83)	1000
5260 MHz Muscle	47.0	48.9 $\pm$ 10% (44.0 to 53.8)	5.51	5.4 $\pm$ 10% (4.86 to 5.94)	1000
5320 MHz Muscle	46.8 - 47.8	48.8 $\pm$ 10% (43.9 to 53.7)	5.54 - 5.62	5.4 $\pm$ 10% (4.86 to 5.94)	1000

**Table: Measured Body Simulating Liquid Dielectric Values for 5600MHz range**

Frequency Band	$\epsilon_r$ (measured range)	$\epsilon_r$ (target)	$\sigma$ (mho/m) (measured range)	$\sigma$ (target)	$\rho$ kg/m <sup>3</sup>
5500 MHz Muscle	47.2 - 47.4	48.6 $\pm$ 10% (43.7 to 53.4)	5.89 - 5.93	5.6 $\pm$ 10% (5.04 to 6.16)	1000
5600 MHz Muscle	47.0	48.5 $\pm$ 10% (43.8 to 53.5)	6.12	5.77 $\pm$ 10% (5.20 to 6.34)	1000
5700 MHz Muscle	46.4 - 46.7	48.4 $\pm$ 10% (43.6 to 53.2)	6.26 - 6.28	5.9 $\pm$ 10% (5.31 to 6.49)	1000

**Table: Measured Body Simulating Liquid Dielectric Values for 5800MHz range**

Frequency Band	$\epsilon_r$ (measured range)	$\epsilon_r$ (target)	$\sigma$ (mho/m) (measured range)	$\sigma$ (target)	$\rho$ kg/m <sup>3</sup>
5745 MHz Muscle	46.2 - 46.3	48.3 $\pm$ 10% (43.47 to 53.13)	6.35 - 6.43	5.9 $\pm$ 10% (5.31 to 6.49)	1000
5785 MHz Muscle	46.1	48.2 $\pm$ 10% (43.38 to 53.02)	6.43 - 6.51	6.0 $\pm$ 10% (5.4 to 6.60)	1000
5825 MHz Muscle	45.9 - 46.0	48.2 $\pm$ 10% (43.38 to 53.02)	6.47 - 6.56	6.0 $\pm$ 10% (5.4 to 6.60)	1000

NOTE: The muscle liquid parameters were within the required tolerances of  $\pm$ 10%.



### 6.6.1 Liquid Temperature and Humidity

The humidity and dielectric/ambient temperatures were recorded during the assessment of the tissue material dielectric parameters. The difference between the ambient temperature of the liquid during the dielectric measurement and the temperature during tests was less than  $|2|^\circ\text{C}$ .

**Table: Temperature and Humidity recorded for each day**

Date	Ambient Temperature (°C)	Liquid Temperature (°C)	Humidity (%)
3 <sup>rd</sup> August 2009	20.2	20.0	43
5 <sup>th</sup> August 2009	20.9	20.5	42
7 <sup>th</sup> August 2009	20.8	20.6	46
18 <sup>th</sup> August 2009	20.5	20.3	43
19 <sup>th</sup> August 2009	20.3	20.0	42

### 6.7 Simulated Tissue Composition Used for SAR Test

A low loss clamp was used to position the TABLET underneath the phantom surface. Small pieces of foam were then used to press the TABLET flush against the phantom surface.

**Table: Tissue Type: Muscle @ 5600MHz**

Volume of Liquid: 60 Litres

EMCT Liquid

Composition
Distilled Water
Salt
Triton X-100

### 6.8 Device Holder for Laptops and P 10.1 Phantom

A low loss clamp was used to position the Laptop underneath the phantom surface. Small pieces of foam were then used to press the laptop flush against the phantom surface.

*Refer to Appendix A for photographs of device positioning*



This document must not be copied or reproduced, except in full without the written permission of the Manager, EMC Technologies Pty Ltd. The certificate on page 3 may be reproduced in full.  
[www.emctech.com.au](http://www.emctech.com.au)

Accreditation No. 5292

## 7.0 SAR MEASUREMENT PROCEDURE USING DASY4

The SAR evaluation was performed with the SPEAG DASY4 system. A summary of the procedure follows:

- a) A measurement of the SAR value at a fixed location is used as a reference value for assessing the power drop of the EUT. The SAR at this point is measured at the start of the test, and then again at the end of the test.
- b) The SAR distribution at the exposed flat section of the flat phantom is measured at a distance of 2.0 mm from the inner surface of the shell. The area covers the entire dimension of the EUT and the horizontal grid spacing is 10 mm x 10 mm. The actual Area Scan has dimensions of 75 mm x 120 mm surrounding the test device. Based on this data, the area of the maximum absorption is determined by Spline interpolation.
- c) Around this point, a volume of 24 mm x 24 mm x 20 mm is assessed by measuring 7 x 7 x 9 points. On the basis of this data set, the spatial peak SAR value is evaluated with the following procedure:
  - (i) The data at the surface are extrapolated, since the centre of the dipoles is 1.0 mm away from the tip of the probe and the distance between the surface and the lowest measuring point is 2.0 mm. The extrapolation is based on a least square algorithm. A polynomial of the fourth order is calculated through the points in z-axes. This polynomial is then used to evaluate the points between the surface and the probe tip.
  - (ii) The maximum interpolated value is searched with a straightforward algorithm. Around this maximum the SAR values averaged over the spatial volumes (1 g and 10 g) are computed using the 3D-Spline interpolation algorithm. The 3D-Spline is composed of three one-dimensional splines with the "Not a knot"- condition (in x, y and z-direction). The volume is integrated with the trapezoidal – algorithm. One thousand points (10 x 10 x 10) are interpolated to calculate the averages.
  - (iii) All neighbouring volumes are evaluated until no neighbouring volume with a higher average value is found.
  - (iv) The SAR value at the same location as in Step (a) is again measured to evaluate the actual power drift.

## 8.0 MEASUREMENT UNCERTAINTY

The uncertainty analysis is based on the template listed in the IEEE Std 1528-2003 for both device SAR tests and Validation uncertainty. The measurement uncertainty of a specific device is evaluated independently.

**Table: Uncertainty Budget for DASY4 V4.7 Build 53 – EUT SAR test 5GHz**

Uncertainty Component	Tol. (6%)	Prob. Dist.	Div.	C <sub>i</sub> (1g)	C <sub>i</sub> (10g)	1g u <sub>i</sub> (6%)	10g u <sub>i</sub> (6%)	v <sub>i</sub>
<b>Measurement System</b>								
Probe Calibration	6.55	N	1	1	1	6.6	6.6	$\infty$
Axial Isotropy	4.7	R	1.73	0.707	0.707	1.9	1.9	$\infty$
Hemispherical Isotropy	9.6	R	1.73	0.707	0.707	3.9	3.9	$\infty$
Boundary Effects	2	R	1.73	1	1	1.2	1.2	$\infty$
Linearity	4.7	R	1.73	1	1	2.7	2.7	$\infty$
System Detection Limits	1	R	1.73	1	1	0.6	0.6	$\infty$
Readout Electronics	0.3	N	1	1	1	0.3	0.3	$\infty$
Response Time	0.8	R	1.73	1	1	0.5	0.5	$\infty$
Integration Time	2.6	R	1.73	1	1	1.5	1.5	$\infty$
RF Ambient Noise	3	R	1.73	1	1	1.7	1.7	$\infty$
RF Ambient Reflections	3	R	1.73	1	1	1.7	1.7	$\infty$
Probe Positioner	0.8	R	1.73	1	1	0.5	0.5	$\infty$
Probe Positioning	9.9	R	1.73	1	1	5.7	5.7	$\infty$
Max. SAR Eval.	4	R	1.73	1	1	2.3	2.3	$\infty$
<b>Test Sample Related</b>								
Test Sample Positioning	1.61	N	1	1	1	1.6	1.6	11
Device Holder Uncertainty	3.6	N	1	1	1	3.6	3.6	7
Output Power Variation – SAR Drift Measurement	12.00	R	1.73	1	1	6.9	6.9	$\infty$
<b>Phantom and Setup</b>								
Phantom Uncertainty	4	R	1.73	1	1	2.3	2.3	$\infty$
Liquid Conductivity – Deviation from target values	10	R	1.73	0.64	0.43	3.7	2.5	$\infty$
Liquid Conductivity – Measurement uncertainty	5	N	1.00	0.64	0.43	3.2	2.2	5
Liquid Permittivity – Deviation from target values	10	R	1.73	0.6	0.49	3.5	2.8	$\infty$
Liquid Permittivity – Measurement uncertainty	5	N	1.00	0.6	0.49	3.0	2.5	5
Combined standard Uncertainty		RSS				14.9	14.3	154
Expanded Uncertainty (95% CONFIDENCE LEVEL)		k=2				29.8	28.66	

Estimated total measurement uncertainty for the DASY4 measurement system was  $\pm 14.9\%$ . The extended uncertainty ( $K = 2$ ) was assessed to be  $\pm 29.8\%$  based on 95% confidence level. The uncertainty is not added to the measurement result.



This document must not be copied or reproduced, except in full without the written permission of the Manager, EMC Technologies Pty Ltd. The certificate on page 3 may be reproduced in full.

[www.emctech.com.au](http://www.emctech.com.au)

Accreditation No. 5292

**Table: Uncertainty Budget for DASY4 V4.7 Build 53 – Validation 5GHz**

Uncertainty Component	Tol. (6%)	Prob. Dist.	Div.	C <sub>i</sub> (1g)	C <sub>i</sub> (10g)	1g u <sub>i</sub> (6%)	10g u <sub>i</sub> (6%)	v <sub>i</sub>
<b>Measurement System</b>								
Probe Calibration	6.55	N	1	1	1	6.6	6.6	$\infty$
Axial Isotropy	4.7	R	1.73	1	1	2.7	2.7	$\infty$
Hemispherical Isotropy	9.6	R	1.73	0	0	0.0	0.0	$\infty$
Boundary Effects	2	R	1.73	1	1	1.2	1.2	$\infty$
Linearity	4.7	R	1.73	1	1	2.7	2.7	$\infty$
System Detection Limits	1	R	1.73	1	1	0.6	0.6	$\infty$
Readout Electronics	0.3	N	1	1	1	0.3	0.3	$\infty$
Response Time	0	R	1.73	1	1	0.0	0.0	$\infty$
Integration Time	0	R	1.73	1	1	0.0	0.0	$\infty$
RF Ambient Noise	3	R	1.73	1	1	1.7	1.7	$\infty$
RF Ambient Reflections	3	R	1.73	1	1	1.7	1.7	$\infty$
Probe Positioner	0.8	R	1.73	1	1	0.5	0.5	$\infty$
Probe Positioning	9.9	R	1.73	1	1	5.7	5.7	$\infty$
Max. SAR Eval.	4	R	1.73	1	1	2.3	2.3	$\infty$
<b>Dipole</b>								
Dipole Axis to Liquid Distance	2	N	1.73	1	1	1.2	1.2	11
Input Power and SAR drift meas.	4.7	R	1.73	1	1	2.7	2.7	$\infty$
<b>Phantom and Tissue Param.</b>								
Phantom Uncertainty	4	R	1.73	1	1	2.3	2.3	$\infty$
Liquid Conductivity – Deviation from target values	5	R	1.73	0.64	0.43	1.8	1.2	$\infty$
Liquid Conductivity – Measurement uncertainty	2.5	N	1.00	0.64	0.43	1.6	1.1	5
Liquid Permittivity – Deviation from target values	5	R	1.73	0.6	0.49	1.7	1.4	$\infty$
Liquid Permittivity – Measurement uncertainty	2.5	N	1.00	0.6	0.49	1.5	1.2	5
Combined standard Uncertainty		RSS				11.4	11.1	154
Expanded Uncertainty (95% CONFIDENCE LEVEL)		k=2				22.7	22.26	

Estimated total measurement uncertainty for the DASY4 measurement system was  $\pm 11.4\%$ . The extended uncertainty (K = 2) was assessed to be  $\pm 22.7\%$  based on 95% confidence level. The uncertainty is not added to the measurement result.



## 9.0 EQUIPMENT LIST AND CALIBRATION DETAILS

Table: SPEAG DASY4 V4.7 Build 53

Equipment Type	Manufacturer	Model Number	Serial Number	Calibration Due	Used For this Test?
Robot - Six Axes	Staubli	RX90BL	N/A	Not applicable	✓
Robot Remote Control	SPEAG	CS7MB	RX90B	Not applicable	✓
SAM Phantom	SPEAG	N/A	1260	Not applicable	✓
SAM Phantom	SPEAG	N/A	1060	Not applicable	
Flat Phantom	AndreT	10.1	P 10.1	Not Applicable	✓
Flat Phantom	AndreT	9.1	P 9.1	Not Applicable	
Flat Phantom	SPEAG	PO1A 6mm	1003	Not Applicable	
Data Acquisition Electronics	SPEAG	DAE3 V1	359	08-July-2010	
Data Acquisition Electronics	SPEAG	DAE3 V1	442	10-Dec-2009	✓
Probe E-Field - Dummy	SPEAG	DP1	N/A	Not applicable	
Probe E-Field	SPEAG	ET3DV6	1380	18-Dec-2009	
Probe E-Field	SPEAG	ET3DV6	1377	14-July-2010	
Probe E-Field	SPEAG	ES3DV6	3029	Not Used	
Probe E-Field	SPEAG	EX3DV4	3563	16-July-2010	✓
Antenna Dipole 300 MHz	SPEAG	D300V2	1005	14-Dec-2009	
Antenna Dipole 450 MHz	SPEAG	D450V2	1009	17-Dec-2010	
Antenna Dipole 900 MHz	SPEAG	D900V2	047	7-July-2010	
Antenna Dipole 1640 MHz	SPEAG	D1640V2	314	16-July-2010	
Antenna Dipole 1800 MHz	SPEAG	D1800V2	242	8-July-2010	
Antenna Dipole 1950 MHz	SPEAG	D1950V3	1113	12-Dec-2010	
Antenna Dipole 3500 MHz	SPEAG	D3500V2	1002	17-July-2010	
Antenna Dipole 2450 MHz	SPEAG	D2450V2	724	10-Dec-2010	
Antenna Dipole 5600 MHz	SPEAG	D5GHzV2	1008	07-Dec-2009	✓
RF Amplifier	EIN	603L	N/A	*In test	
RF Amplifier	Mini-Circuits	ZHL-42	N/A	*In test	✓
RF Amplifier	Mini-Circuits	ZVE-8G	N/A	*In test	
Synthesized signal generator	Hewlett Packard	ESG-D3000A	GB37420238	*In test	
RF Power Meter Dual	Hewlett Packard	437B	3125012786	29-June-2010	✓
RF Power Sensor 0.01 - 18 GHz	Hewlett Packard	8481H	1545A01634	01-July-2010	✓
RF Power Meter Dual	Gigatronics	8542B	1830125	26-Mar-2010	
RF Power Sensor	Gigatronics	80301A	1828805	26-Mar-2010	
RF Power Meter Dual	Hewlett Packard	435A	1733A05847	*In test	✓
RF Power Sensor	Hewlett Packard	8482A	2349A10114	*In test	✓
Network Analyser	Hewlett Packard	8714B	GB3510035	18-Sept-2009	
Network Analyser	Hewlett Packard	8753ES	JP39240130	11-Nov-2009	✓
Dual Directional Coupler	Hewlett Packard	778D	1144 04700	*In test	
Dual Directional Coupler	NARDA	3022	75453	*In test	✓

\* Calibrated during the test for the relevant parameters.



This document must not be copied or reproduced, except in full without the written permission of the Manager, EMC Technologies Pty Ltd. The certificate on page 3 may be reproduced in full.  
[www.emctech.com.au](http://www.emctech.com.au)

Accreditation No. 5292

## 10.0 OET BULLETIN 65 – SUPPLEMENT C TEST METHOD

Notebooks should be evaluated in normal use positions, typical for lap-held bottom-face only. However the number of positions will depend on the number of configurations the laptop can be operated in. The “LIFEBOOK T-SERIES” can be used in either a conventional laptop position (see Appendix A1) or a Tablet configuration. The antenna A and B location in the “LIFEBOOK T-SERIES” is closest to the top of the screen when used in a conventional laptop configuration and due to the separation distances involved between the phantom and the laptop antenna, testing is not required in this position.

### 10.0 Position

#### 10.1.1 “Tablet” Position Definition (0mm spacing)

The device was tested in the 2.00 mm flat section of the AndreT Flat phantom P 10.1 for the “Tablet” position. The Transceiver was placed at the bottom of the phantom and suspended in such way that the back of the device was touching the phantom. This device orientation simulates the PC’s normal use – being held on the lap of the user. A spacing of 0mm ensures that the SAR results are conservative and represent a worst-case position.

#### 10.1.2 “Edge On” Position (Portrait or Landscape)

The device was tested in the (2.00 mm) flat section of the AndreT phantom for the “Edge On” position. The Antenna edge of the Transceiver was placed underneath the flat section of the phantom and suspended until the edge touched the phantom. *Refer to Appendix A for photos of measurement positions.*


### 10.2 List of All Test Cases (Antenna In/Out, Test Frequencies, User Modes)


The device has a fixed antenna. Depending on the measured SAR level up to three test channels with the test sample operating at maximum power were recorded. The following table represents the matrix used to determine what testing was required.

Table: Testing configurations

Phantom Configuration	*Device Mode	Antenna	Test Configurations		
			Channel (Low)	Channel (Middle)	Channel (High)
Tablet	OFDM 5GHz All Bands	A		X	
		B		X	
		C		X	
Edge On	OFDM 5GHz All Bands	A		X	
		B		X	
		C		X	

#### Legend

 Testing Required in this configuration

 Testing required in this configuration only if SAR of middle channel is more than 3dB below the SAR limit or it is the worst case.

*NOTE: Throughout this report, Antenna A, B and C refer to Tx1, Tx2 and Tx3 in the host respectively.*



This document must not be copied or reproduced, except in full without the written permission of the Manager, EMC Technologies Pty Ltd. The certificate on page 3 may be reproduced in full.  
[www.emctech.com.au](http://www.emctech.com.au)

Accreditation No. 5292

### 10.3 FCC RF Exposure Limits for Occupational/ Controlled Exposure

Spatial Peak SAR Limits For:	
Partial-Body:	8.0 mW/g (averaged over any 1g cube of tissue)
Hands, Wrists, Feet and Ankles:	20.0 mW/g (averaged over 10g cube of tissue)

### 10.4 FCC RF Exposure Limits for Un-controlled/Non-occupational

Spatial Peak SAR Limits For:	
Partial-Body:	1.6 mW/g (averaged over any 1g cube of tissue)
Hands, Wrists, Feet and Ankles:	4.0 mW/g (averaged over 10g cube of tissue)

## 11.0 SAR MEASUREMENT RESULTS

The SAR values averaged over 1g tissue masses were determined for the sample device for all test configurations listed in section 10.2.

Note that the Secondary Portrait screen orientation has been disabled.

### 11.1 5GHz Band SAR Results

Table: SAR MEASUREMENT RESULTS Lower Band – OFDM Mode

Test Position	Plot No.	Ant.	Bit rate Mode (Mbps)	Channel Bandwidth (MHz)	Test Channel	Test Freq (MHz)	Measured 1g SAR Results (mW/g)	Measured Drift (dB)
Primary Portrait	1	A	6	-	52	5260	0.238	-0.186
	-	C	6	-	52	5260	N/F	N/A
Secondary Landscape	2	A	6	-	36	5180	1.44	-0.070
	3	A	6	-	52	5260	1.35	-0.324
	4	A	6	-	64	5320	1.20	-0.055
	5	B	6	-	36	5180	0.932	0.042
	6	B	6	-	52	5260	0.992	-0.492
	7	B	6	-	64	5320	0.869	-0.182
Tablet	8	A	6	-	52	5260	0.189	-0.315
	9	B	6	-	52	5260	0.039	0.133
	-	C	6	-	52	5260	N/F	N/A
Primary Landscape	10	C	6	-	52	5260	0.260	0.079

NOTE: The measurement uncertainty of 29.8% for 5GHz testing is not added to the result.

The highest SAR level recorded in the 5.2 GHz band was 1.44 mW/g as evaluated in a 1g cube of averaging mass. This value was obtained in Secondary Landscape position in OFDM mode, utilizing channel 36 (5180 MHz) and antenna A.



**Table: SAR MEASUREMENT RESULTS Middle Band – OFDM Mode**

Test Position	Plot No.	Ant.	Bit rate Mode (Mbps)	Channel Bandwidth (MHz)	Test Channel	Test Freq (MHz)	Measured 1g SAR Results (mW/g)	Measured Drift (dB)
Primary Portrait	11	A	6	-	120	5600	0.351	0.321
	-	C	6	-	120	5600	N/F	N/A
Secondary Landscape	12	A	6	-	100	5500	1.54	-0.176
	13	A	6	-	120	5600	1.18	-0.337
	14	A	6	-	140	5700	0.890	0.001
	15	B	6	-	100	5500	0.901	-0.209
	16	B	6	-	120	5600	0.811	-0.477
	17	B	6	-	140	5700	0.705	-0.462
	18	A	6	-	120	5600	1.07	-0.114
Tablet	19	A	6	-	120	5600	0.199	-0.474
	-	B	6	-	120	5600	N/F	N/A
	-	C	6	-	120	5600	N/F	N/A
Primary Landscape	20	C	6	-	100	5500	0.309	-0.289
	21	C	6	-	120	5600	0.351	-0.200
	22	C	6	-	140	5700	0.349	-0.328

NOTE: The measurement uncertainty of 29.8% for 5GHz testing is not added to the result.

The highest SAR level recorded in the 5.6 GHz band was 1.54 mW/g as evaluated in a 1g cube of averaging mass. This value was obtained in Secondary Landscape position in OFDM mode, utilizing channel 100 (5500MHz) and antenna A.



Accreditation No. 5292

This document must not be copied or reproduced, except in full without the written permission of the Manager, EMC Technologies Pty Ltd. The certificate on page 3 may be reproduced in full.  
[www.emctech.com.au](http://www.emctech.com.au)

Table: SAR MEASUREMENT RESULTS Upper Band – OFDM Mode

Test Position	Plot No.	Ant.	Bit rate Mode (Mbps)	Channel Bandwidth (MHz)	Test Channel	Test Freq (MHz)	Measured 1g SAR Results (mW/g)	Measured Drift (dB)
Primary Portrait	23	A	6	-	157	5785	0.332	-0.048
	24	A	-	20	157	5785	0.309	-0.144
	25	A	-	40	157	5785	0.320	-0.118
	26	C	6	-	157	5785	0.064	-0.191
Secondary Landscape	27	A	6	-	149	5745	0.963	-0.001
	28	A	6	-	157	5785	0.923	-0.258
	29	A	6	-	165	5805	0.953	-0.215
	30	B	6	-	149	5745	0.741	-0.187
	31	B	6	-	157	5785	0.897	-0.271
	32	B	6	-	165	5805	0.661	-0.071
Tablet	33	A	6	-	157	5785	0.172	-0.260
	-	B	6	-	157	5785	N/F	N/A
	34	C	6	-	157	5785	0.023	0.201
Primary Landscape	35	C	6	-	149	5745	0.495	-0.068
	36	C	6	-	157	5785	0.425	-0.057
	37	C	6	-	165	5805	0.505	-0.258

NOTE: The measurement uncertainty of 29.8% for 5GHz testing is not added to the result.

The highest SAR level recorded in the 5.8 GHz band was 0.963 mW/g as evaluated in a 1g cube of averaging mass. This value was obtained in Secondary Landscape position in OFDM mode, utilizing channel 149 (5745 MHz) and antenna A.

## 12.0 COMPLIANCE STATEMENT

The Fujitsu TABLET PC, Model: T4310 with INTEL Mini-PCI Wireless LAN Module (WIFI LINK 5300 (SHIRLEY PEAK) 802.11a/b/g/n), Model: 533AN\_HMW was found to comply with the FCC and RSS-102 SAR requirements.

The highest SAR level recorded was 1.54 mW/g for a 1g cube. This value was measured at 5500 MHz (channel 100) in the "Secondary Landscape" position in OFDM modulation mode at the antenna A. This was below the limit of 1.6 mW/g for uncontrolled exposure, but was within the band of measurement uncertainty of 29.8 % around the limit.

This document is issued in accordance with NATA's accreditation requirements. The results of tests, calibration and/or measurements included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing and calibration reports.



This document must not be copied or reproduced, except in full without the written permission of the Manager, EMC Technologies Pty Ltd. The certificate on page 3 may be reproduced in full.  
[www.emctech.com.au](http://www.emctech.com.au)

Accreditation No. 5292