

APPENDIX B PLOTS OF THE SAR MEASUREMENTS

Plots of the measured SAR distributions inside the phantom are given in this Appendix for all tested configurations. The spatial peak SAR values were assessed with the procedure described in this report.

Table: 5200 MHz Band SAR Measurement Plot Numbers

Test Position	Plot No.	Ant	Bit rate Mode (Mbps)	Channel Bandwidth (MHz)	Test Channel
Tablet	1	Aux	HT0	40	54
Tablet	2	Main	HT0	40	54
Primary Portrait	3	Aux	HT0	40	54
Z-Axis graphs for Plots 1 to 3					

Table: 5600 MHz Band SAR Measurement Plot Numbers

Test Position	Plot No.	Ant	Bit rate Mode (Mbps)	Channel Bandwidth (MHz)	Test Channel
Tablet	4	Aux	HT0	40	118
Tablet	5	Main	HT0	40	118
Primary Portrait	6	Aux	HT0	40	118
Z-Axis graphs for Plots 4 to 6					

Table: 5800 MHz Band SAR Measurement Plot Numbers

Test Position	Plot No.	Ant	Bit rate Mode (Mbps)	Channel Bandwidth (MHz)	Test Channel
Tablet	7	Aux	HT0	40	159
Tablet	8	Main	HT0	40	159
Primary Portrait	9	Aux	HT0	40	159
Z-Axis graphs for Plots 7 to 9					
Secondary Landscape	10	Main	OFDM	-	157
	11	Main	HT0	20	157
	12	Main	HT0	40	159
Z-Axis graphs for Plots 10 to 12					
Secondary Landscape	13	Aux	HT0	40	151
	14	Aux	HT0	40	159
Z-Axis graphs for Plots 13 to 14					

Table: Validation Plots

Plot 15	Validation 5200 MHz 12 th April 2008
Plot 16	Validation 5200 MHz 17 th April 2008
Z-Axis graphs for Plots 15 to 16	
Plot 17	Validation 5500 MHz 18 th April 2008
Plot 18	Validation 5800 MHz 21 st April 2008
Z-Axis graphs for Plots 17 to 18	

Test Date: 17 April 2008


File Name: Tablet OFDM HT0 (40MHz) 5.2 GHz Ant Aux Bluetooth Off 17-04-08.da4

DUT: Fujitsu Notebook Seneca with Atheros 11abgn and Bluetooth; Type: HB92; Serial: MAC: 001B9E-C850F4

- * Communication System: OFDM 5250 MHz; Frequency: 5270 MHz; Duty Cycle: 1:1
- * Medium parameters used: $\sigma = 5.34282$ mho/m, $\epsilon_r = 48.3576$; $\rho = 1000$ kg/m³
- Electronics: DAE3 Sn442; Probe: EX3DV4 - SN3563; ConvF(3.79, 3.79, 3.79)
- Phantom: Flat Phantom 10.1; Serial: P 10.1; Phantom section: Flat 2.2 Section

Channel 054 Test/Area Scan (101x141x1): Measurement grid: dx=10mm, dy=10mm
 Maximum value of SAR (interpolated) = 0.147 mW/g

Channel 054 Test/Zoom Scan (7x7x9)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2.5mm
 Reference Value = 3.20 V/m; Power Drift = -0.107 dB
 Peak SAR (extrapolated) = 0.351 W/kg
SAR(1 g) = 0.034 mW/g; SAR(10 g) = 0.014 mW/g
 Maximum value of SAR (measured) = 0.069 mW/g

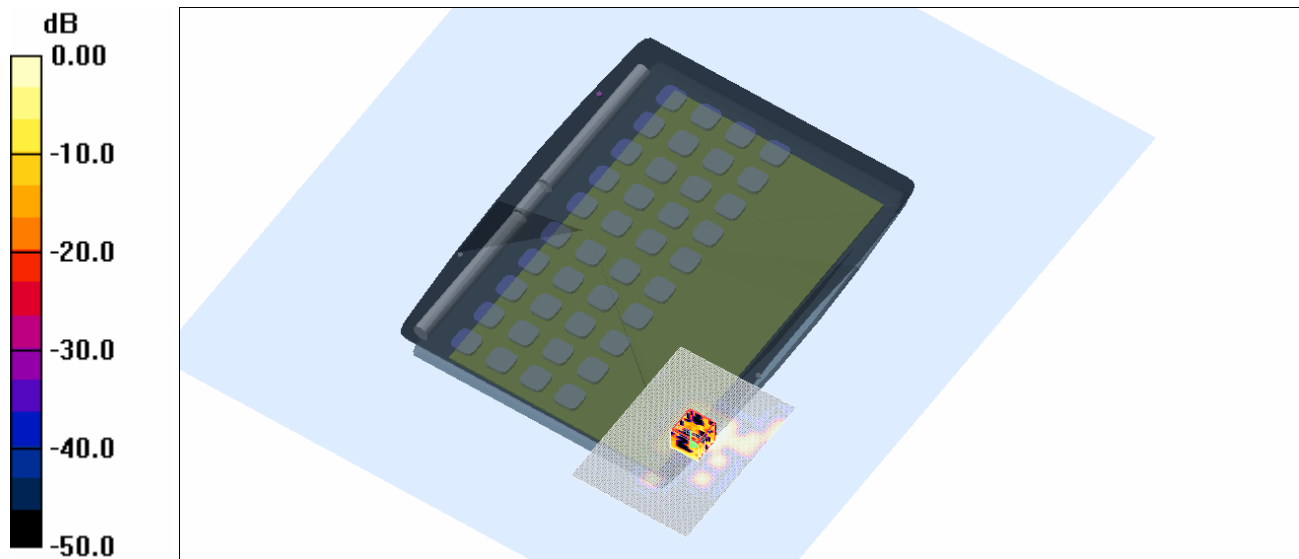

SAR MEASUREMENT PLOT 1

Ambient Temperature	20.5 Degrees Celsius
Liquid Temperature	20.2 Degrees Celsius
Humidity	53.0 %



Test Date: 17 April 2008


File Name: Tablet OFDM HT0 (40MHz) 5.2 GHz Ant Main Bluetooth Off 17-04-08.da4

DUT: Fujitsu Notebook Seneca with Atheros 11abgn and Bluetooth; Type: HB92; Serial: MAC: 001B9E-C850F4

- * Communication System: OFDM 5250 MHz; Frequency: 5270 MHz; Duty Cycle: 1:1
- * Medium parameters used: $\sigma = 5.34282$ mho/m, $\epsilon_r = 48.3576$; $\rho = 1000$ kg/m³
- Electronics: DAE3 Sn442; Probe: EX3DV4 - SN3563; ConvF(3.79, 3.79, 3.79)
- Phantom: Flat Phantom 10.1; Serial: P 10.1; Phantom section: Flat 2.2 Section

Channel 054 Test/Area Scan (101x141x1): Measurement grid: dx=10mm, dy=10mm
 Maximum value of SAR (interpolated) = 0.039 mW/g

Channel 054 Test/Zoom Scan (7x7x9)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2.5mm
 Reference Value = 1.68 V/m; Power Drift = 0.180 dB
 Peak SAR (extrapolated) = 0.149 W/kg
SAR(1 g) = 0.00897 mW/g; SAR(10 g) = 0.00206 mW/g
 Maximum value of SAR (measured) = 0.037 mW/g

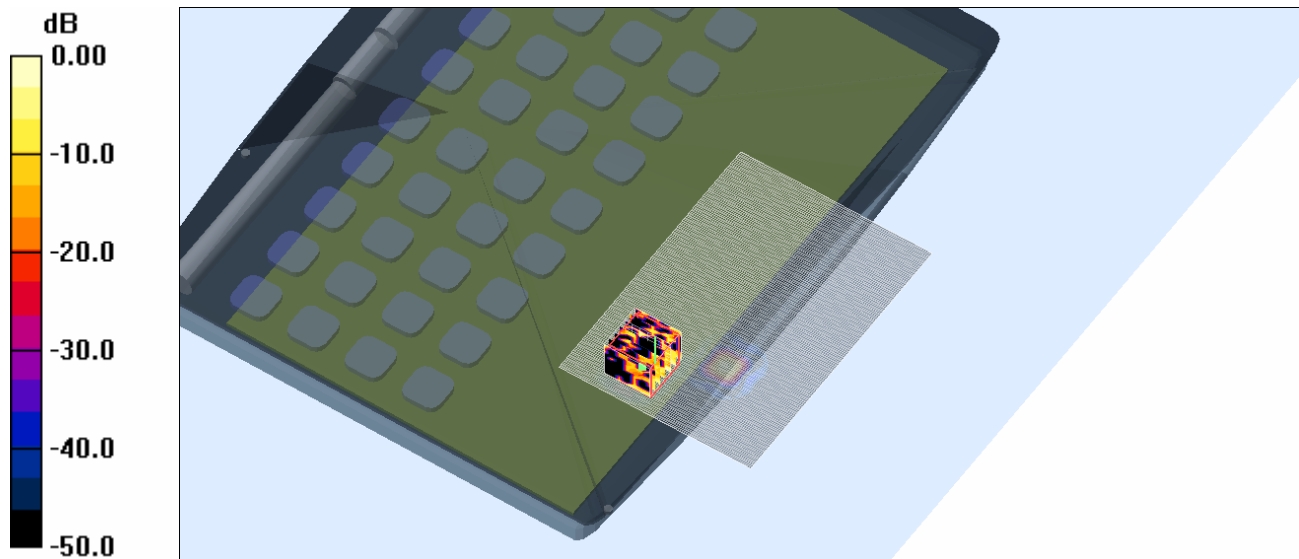

SAR MEASUREMENT PLOT 2

Ambient Temperature	20.5 Degrees Celsius
Liquid Temperature	20.2 Degrees Celsius
Humidity	53.0 %



Test Date: 17 April 2008

File Name: Primary Portrait OFDM HT0 (40MHz) 5.2 GHz Ant Aux Bluetooth Off 17-04-08.da4

DUT: Fujitsu Notebook Seneca with Atheros 11abgn and Bluetooth; Type: HB92; Serial: MAC: 001B9E-C850F4

- * Communication System: OFDM 5250 MHz; Frequency: 5270 MHz; Duty Cycle: 1:1
- * Medium parameters used: $\sigma = 5.34282$ mho/m, $\epsilon_r = 48.3576$; $\rho = 1000$ kg/m³
- Electronics: DAE3 Sn442; Probe: EX3DV4 - SN3563; ConvF(3.79, 3.79, 3.79)
- Phantom: Flat Phantom 10.1; Serial: P 10.1; Phantom section: Flat 2.2 Section

Channel 054 Test/Area Scan (101x141x1): Measurement grid: dx=10mm, dy=10mm
 Maximum value of SAR (interpolated) = 0.070 mW/g


Channel 054 Test/Zoom Scan (7x7x9)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2.5mm

Reference Value = 1.66 V/m; Power Drift = 0.055 dB

Peak SAR (extrapolated) = 0.180 W/kg

SAR(1 g) = 0.019 mW/g; SAR(10 g) = 0.00521 mW/g

Maximum value of SAR (measured) = 0.046 mW/g

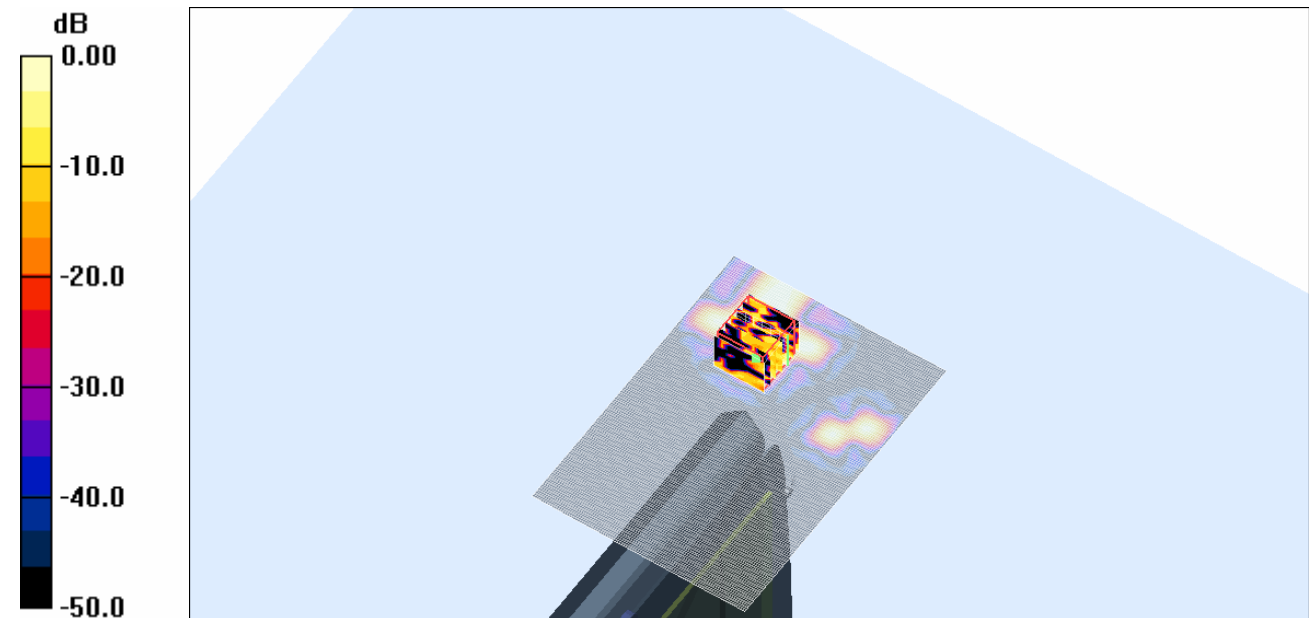


SAR MEASUREMENT PLOT 3

Ambient Temperature
Liquid Temperature
Humidity

20.5 Degrees Celsius
20.2 Degrees Celsius
53.0 %



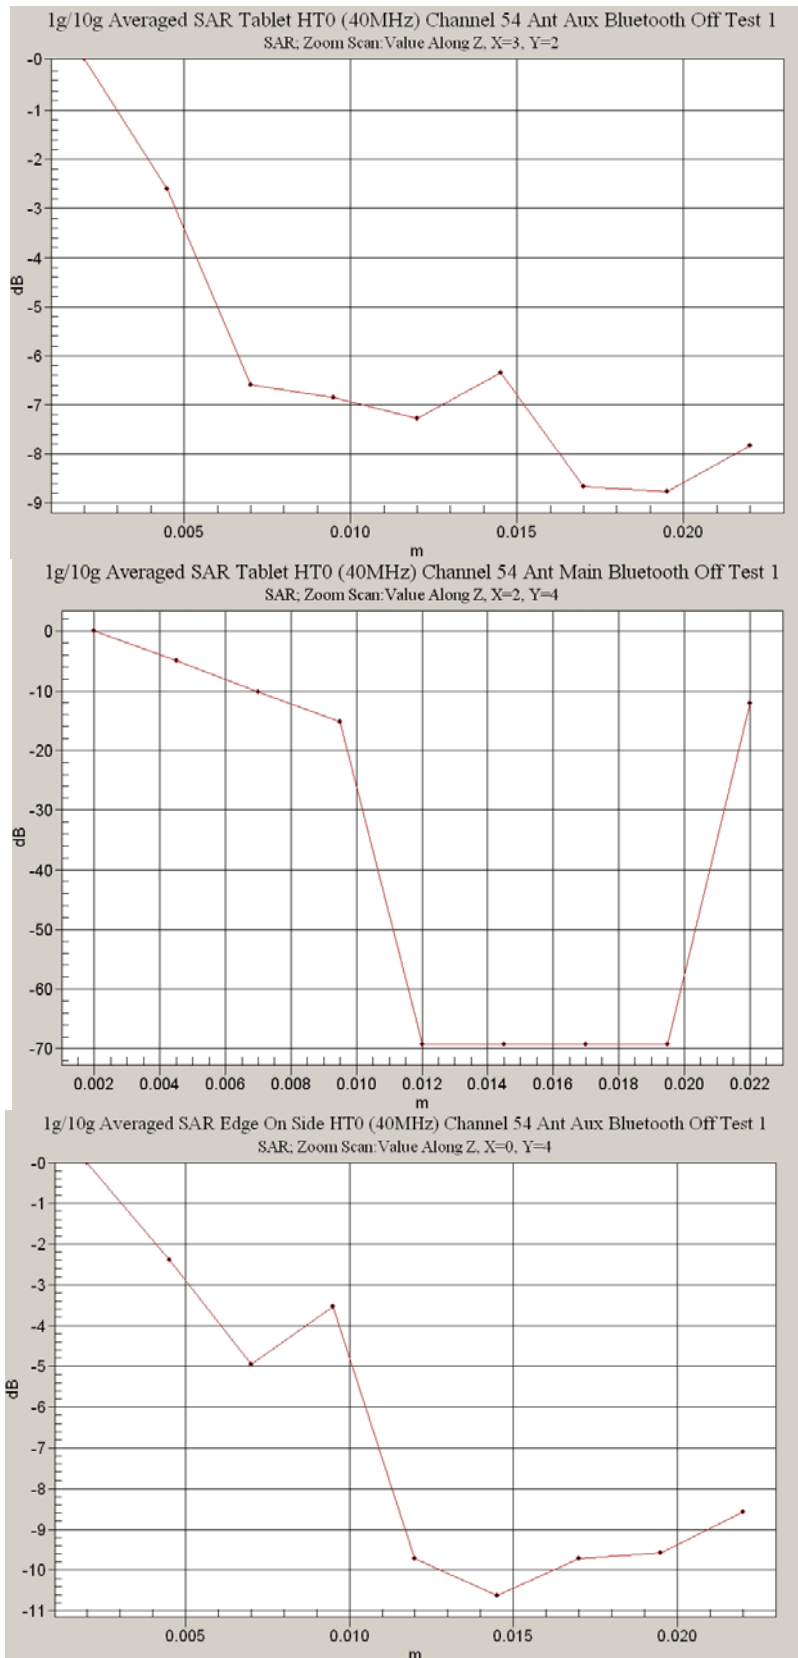

Test Date: 18 April 2008


File Name: Tablet OFDM HT0(40MHz) 5.6 GHz Ant Aux Bluetooth Off 18-04-08.da4

DUT: Fujitsu Notebook Seneca with Atheros 11abgn and Bluetooth; Type: HB92; Serial: MAC: 001B9E-C850F4

- * Communication System: OFDM 5590 MHz; Frequency: 5590 MHz; Duty Cycle: 1:1
- * Medium parameters used: $\sigma = 5.97991$ mho/m, $\epsilon_r = 45.9583$; $\rho = 1000$ kg/m³
- Electronics: DAE3 Sn442; Probe: EX3DV4 - SN3563; ConvF(3.68, 3.68, 3.68)
- Phantom: Flat Phantom 10.1; Serial: P 10.1; Phantom section: Flat 2.2 Section

Channel 118 Test/Area Scan (101x141x1): Measurement grid: dx=10mm, dy=10mm
 Maximum value of SAR (interpolated) = 0.055 mW/g

Channel 118 Test/Zoom Scan (7x7x9)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2.5mm
 Reference Value = 1.56 V/m; Power Drift = 0.408 dB
 Peak SAR (extrapolated) = 0.338 W/kg
SAR(1 g) = 0.035 mW/g; SAR(10 g) = 0.013 mW/g
 Maximum value of SAR (measured) = 0.075 mW/g

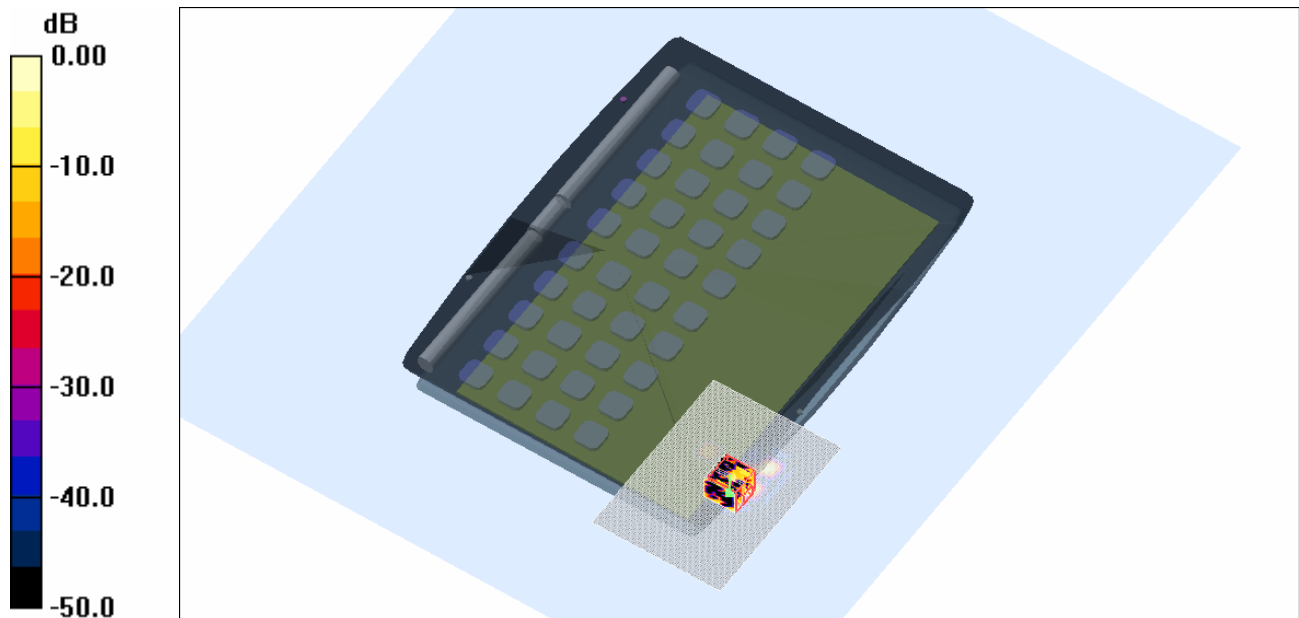

SAR MEASUREMENT PLOT 4

Ambient Temperature
Liquid Temperature
Humidity

21.0 Degrees Celsius
20.9 Degrees Celsius
53.0 %



Test Date: 18 April 2008


File Name: Tablet OFDM HT0(40MHz) 5.6 GHz Ant Main Bluetooth Off 18-04-08.da4

DUT: Fujitsu Notebook Seneca with Atheros 11abgn and Bluetooth; Type: HB92; Serial: MAC: 001B9E-C850F4

- * Communication System: OFDM 5590 MHz; Frequency: 5590 MHz; Duty Cycle: 1:1
- * Medium parameters used: $\sigma = 5.97991$ mho/m, $\epsilon_r = 45.9583$; $\rho = 1000$ kg/m³
- Electronics: DAE3 Sn442; Probe: EX3DV4 - SN3563; ConvF(3.68, 3.68, 3.68)
- Phantom: Flat Phantom 10.1; Serial: P 10.1; Phantom section: Flat 2.2 Section

Channel 118 Test/Area Scan (101x141x1): Measurement grid: dx=10mm, dy=10mm
 Maximum value of SAR (interpolated) = 0.044 mW/g

Channel 118 Test/Zoom Scan (7x7x9)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2.5mm
 Reference Value = 1.19 V/m; Power Drift = 0.209 dB
 Peak SAR (extrapolated) = 0.237 W/kg
SAR(1 g) = 0.012 mW/g; SAR(10 g) = 0.00139 mW/g
 Maximum value of SAR (measured) = 0.053 mW/g

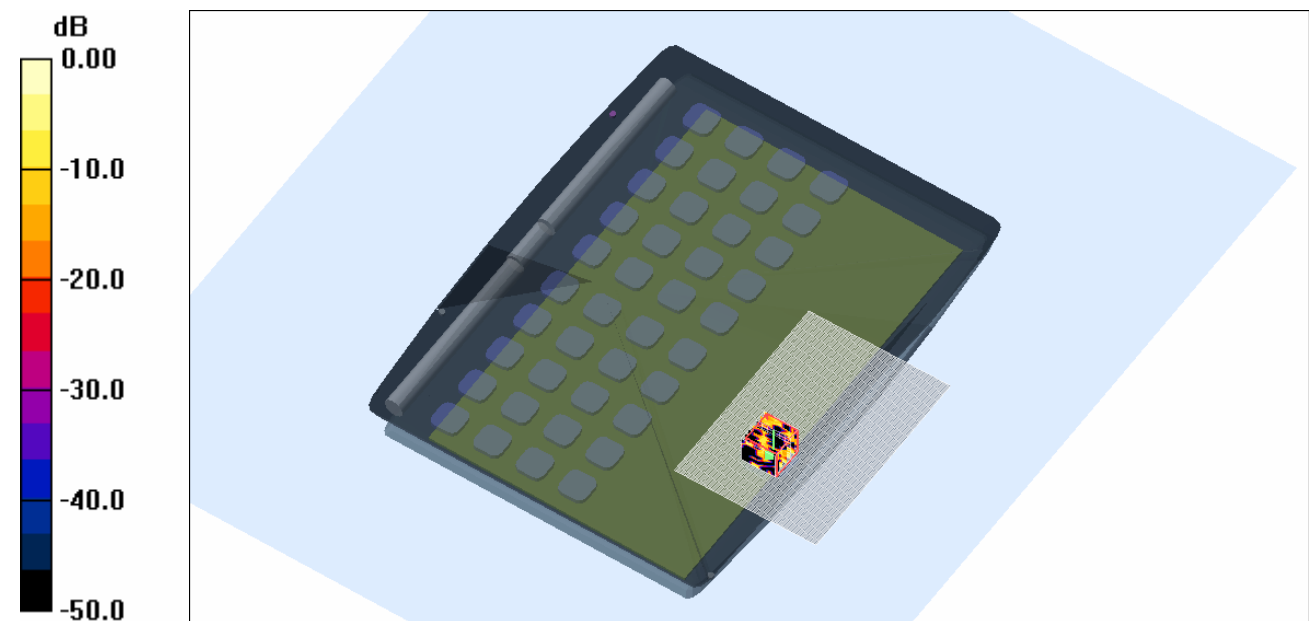

SAR MEASUREMENT PLOT 5

Ambient Temperature
Liquid Temperature
Humidity

21.0 Degrees Celsius
20.9 Degrees Celsius
53.0 %



Test Date: 18 April 2008


File Name: Primary Portrait OFDM HT0(40MHz) 5.6 GHz Ant Aux Bluetooth Off 18-04-08.da4

DUT: Fujitsu Notebook Seneca with Atheros 11abgn and Bluetooth; Type: HB92; Serial: MAC: 001B9E-C850F4

- * Communication System: OFDM 5590 MHz; Frequency: 5590 MHz; Duty Cycle: 1:1
- * Medium parameters used: $\sigma = 5.97991$ mho/m, $\epsilon_r = 45.9583$; $\rho = 1000$ kg/m³
- Electronics: DAE3 Sn442; Probe: EX3DV4 - SN3563; ConvF(3.68, 3.68, 3.68)
- Phantom: Flat Phantom 10.1; Serial: P 10.1; Phantom section: Flat 2.2 Section

Channel 118 Test/Area Scan (101x141x1): Measurement grid: dx=10mm, dy=10mm
 Maximum value of SAR (interpolated) = 0.184 mW/g

Channel 118 Test/Zoom Scan (7x7x9)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2.5mm
 Reference Value = 1.90 V/m; Power Drift = -0.304 dB
 Peak SAR (extrapolated) = 0.223 W/kg
SAR(1 g) = 0.021 mW/g; SAR(10 g) = 0.00586 mW/g
 Maximum value of SAR (measured) = 0.069 mW/g

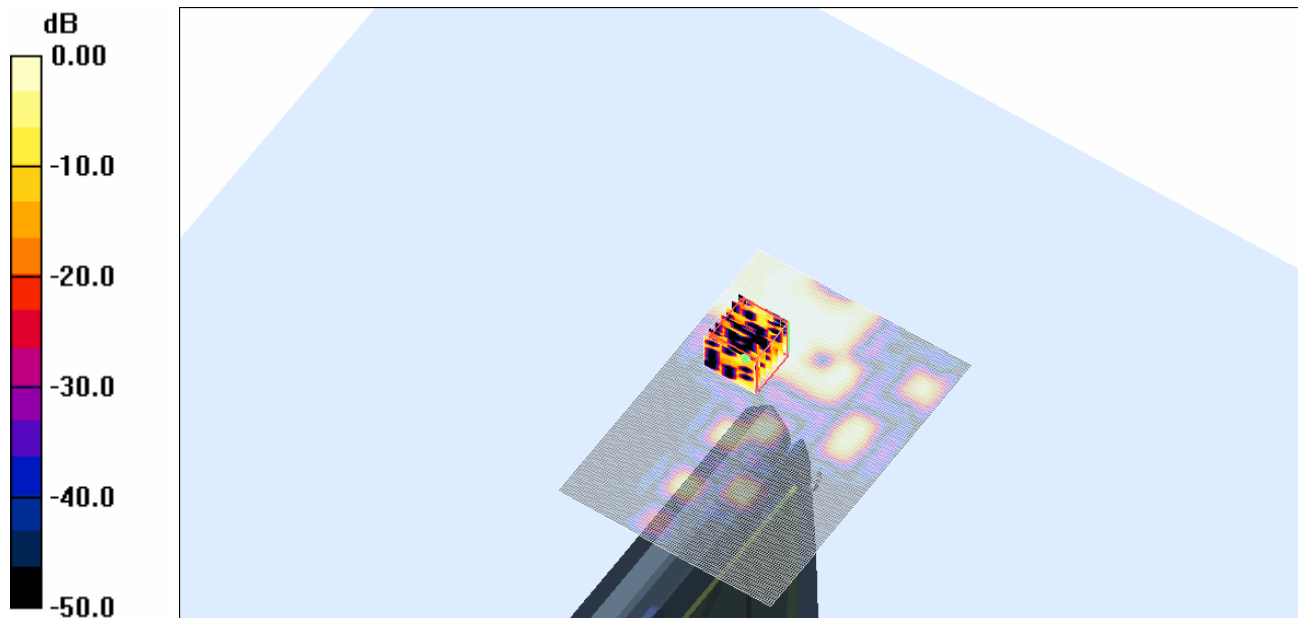


0 dB = 0.069mW/g

SAR MEASUREMENT PLOT 6

Ambient Temperature
Liquid Temperature
Humidity

21.0 Degrees Celsius
20.9 Degrees Celsius
53.0 %



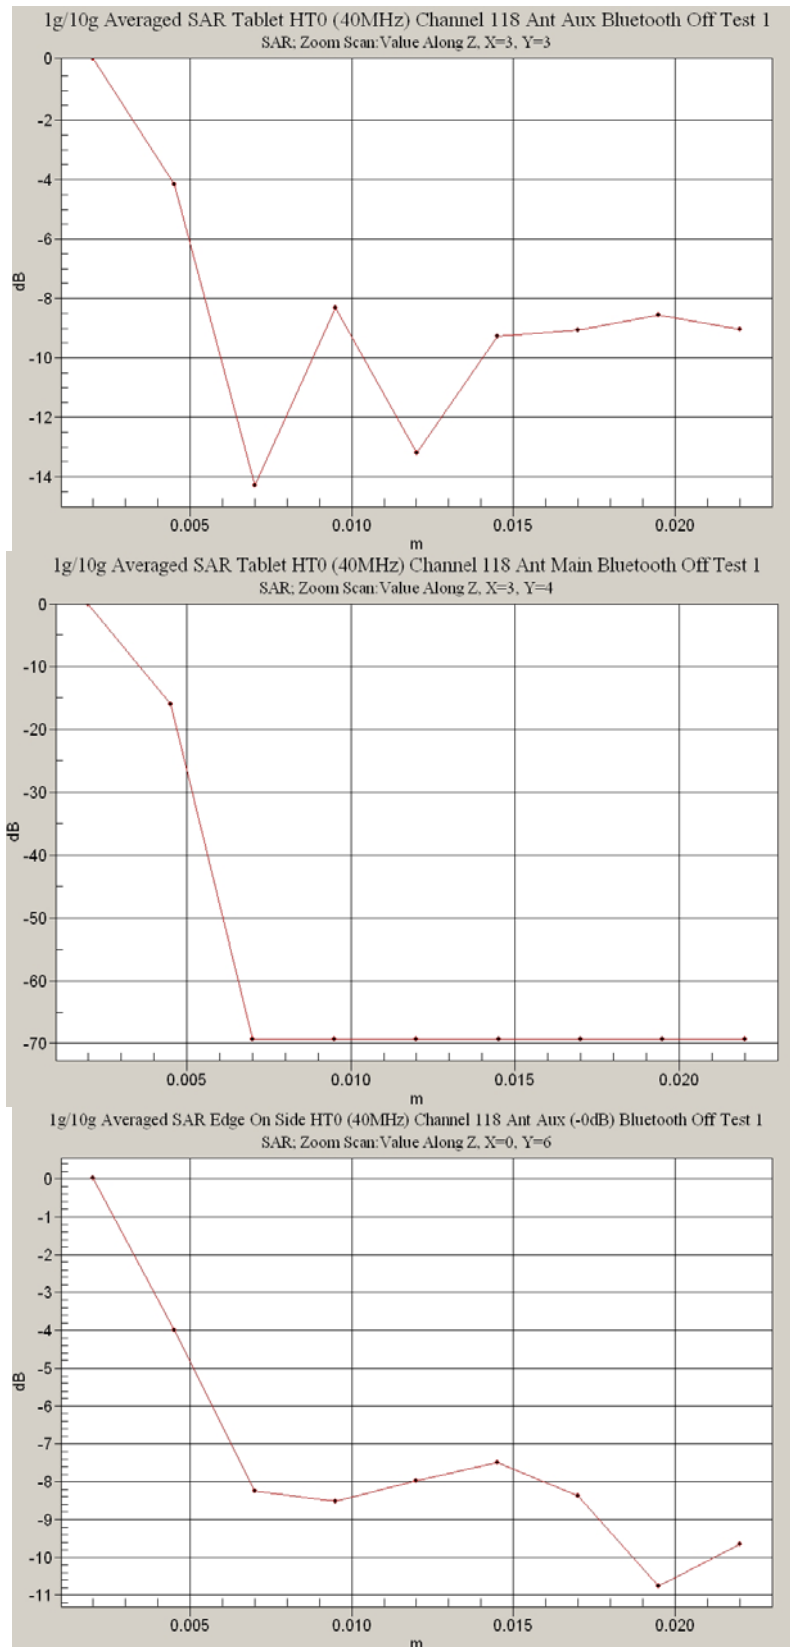

Test Date: 21 April 2008


File Name: Tablet OFDM HT0(40MHz) 5.8 GHz Ant Aux Bluetooth Off 21-04-08.da4

DUT: Fujitsu Notebook Seneca with Atheros 11abgn and Bluetooth; Type: HB92; Serial: MAC: 001B9E-C850F4

- * Communication System: OFDM 5775 MHz; Frequency: 5795 MHz; Duty Cycle: 1:1
- * Medium parameters used: $\sigma = 6.17405$ mho/m, $\epsilon_r = 45.296$; $\rho = 1000$ kg/m³
- Electronics: DAE3 Sn442; Probe: EX3DV4 - SN3563; ConvF(3.72, 3.72, 3.72)
- Phantom: Flat Phantom 10.1; Serial: P 10.1; Phantom section: Flat 2.2 Section

Channel 159 Test/Area Scan (101x141x1): Measurement grid: dx=10mm, dy=10mm
 Maximum value of SAR (interpolated) = 0.037 mW/g

Channel 159 Test/Zoom Scan (7x7x9)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2.5mm
 Reference Value = 2.59 V/m; Power Drift = 0.360 dB
 Peak SAR (extrapolated) = 0.319 W/kg
SAR(1 g) = 0.030 mW/g; SAR(10 g) = 0.00781 mW/g
 Maximum value of SAR (measured) = 0.055 mW/g

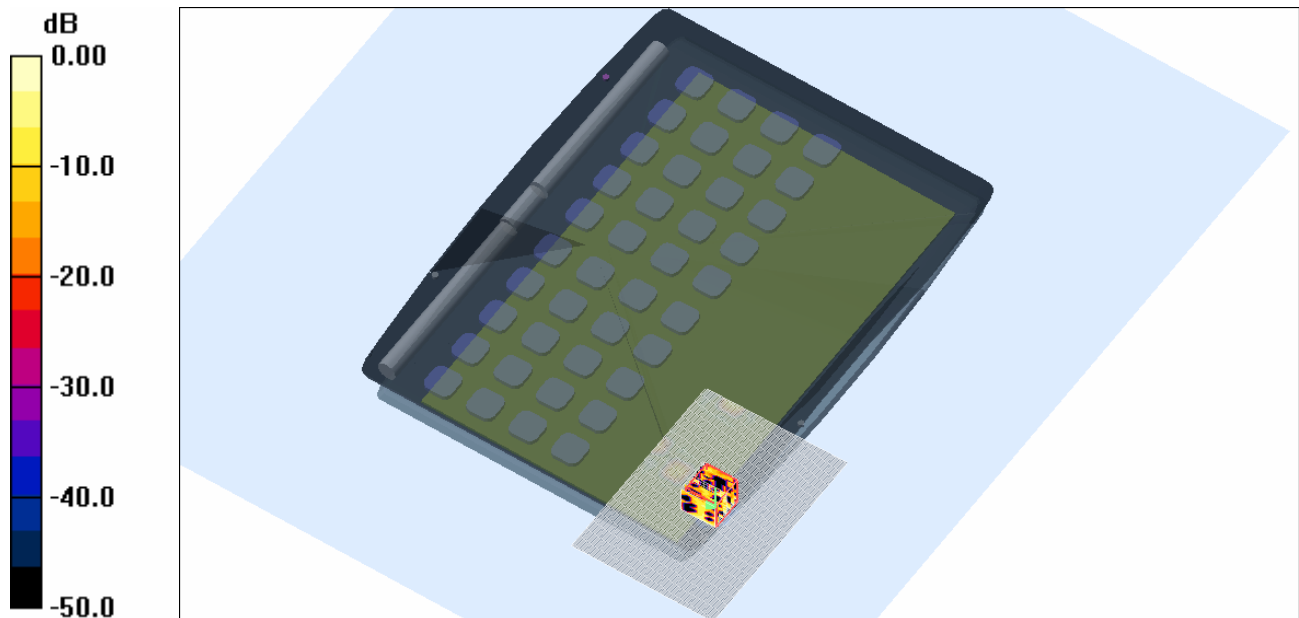

SAR MEASUREMENT PLOT 7

Ambient Temperature
Liquid Temperature
Humidity

20.8 Degrees Celsius
20.7 Degrees Celsius
51.0 %



Test Date: 21 April 2008


File Name: Tablet OFDM HT0(40MHz) 5.8 GHz Ant Main Bluetooth Off 21-04-08.da4

DUT: Fujitsu Notebook Seneca with Atheros 11abgn and Bluetooth; Type: HB92; Serial: MAC: 001B9E-C850F4

- * Communication System: OFDM 5775 MHz; Frequency: 5795 MHz; Duty Cycle: 1:1
- * Medium parameters used: $\sigma = 6.17405$ mho/m, $\epsilon_r = 45.296$; $\rho = 1000$ kg/m³
- Electronics: DAE3 Sn442; Probe: EX3DV4 - SN3563; ConvF(3.72, 3.72, 3.72)
- Phantom: Flat Phantom 10.1; Serial: P 10.1; Phantom section: Flat 2.2 Section

Channel 159 Test/Area Scan (101x141x1): Measurement grid: dx=10mm, dy=10mm
 Maximum value of SAR (interpolated) = 0.022 mW/g

Channel 159 Test/Zoom Scan (7x7x9)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2.5mm
 Reference Value = 0.777 V/m; Power Drift = 0.477 dB
 Peak SAR (extrapolated) = 0.129 W/kg
SAR(1 g) = 0.00548 mW/g; SAR(10 g) = 0.000785 mW/g
 Maximum value of SAR (measured) = 0.026 mW/g

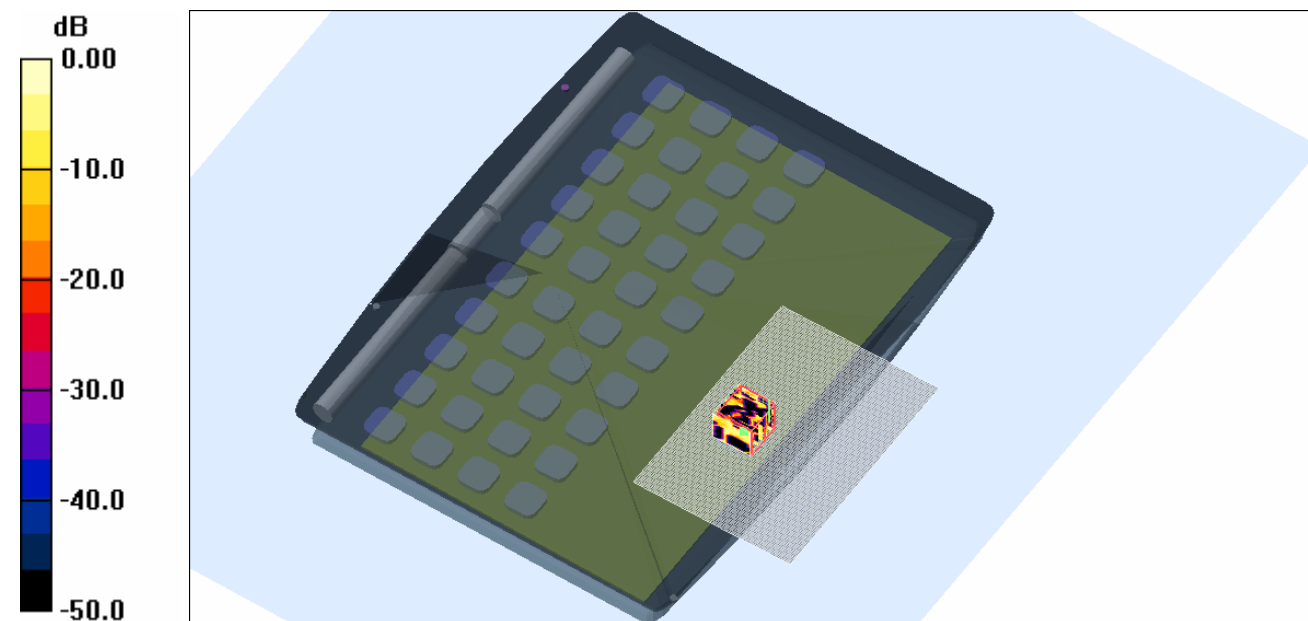

SAR MEASUREMENT PLOT 8

Ambient Temperature
Liquid Temperature
Humidity

20.8 Degrees Celsius
20.7 Degrees Celsius
51.0 %



Test Date: 21 April 2008


File Name: Primary Portrait OFDM HT0(40MHz) 5.8 GHz Ant Aux Bluetooth Off 21-04-08.da4

DUT: Fujitsu Notebook Seneca with Atheros 11abgn and Bluetooth; Type: HB92; Serial: MAC: 001B9E-C850F4

- * Communication System: OFDM 5775 MHz; Frequency: 5795 MHz; Duty Cycle: 1:1
- * Medium parameters used: $\sigma = 6.17405$ mho/m, $\epsilon_r = 45.296$; $\rho = 1000$ kg/m³
- Electronics: DAE3 Sn442; Probe: EX3DV4 - SN3563; ConvF(3.72, 3.72, 3.72)
- Phantom: Flat Phantom 10.1; Serial: P 10.1; Phantom section: Flat 2.2 Section

Channel 159 Test/Area Scan (101x141x1): Measurement grid: dx=10mm, dy=10mm
 Maximum value of SAR (interpolated) = 0.084 mW/g

Channel 159 Test/Zoom Scan (7x7x9)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2.5mm
 Reference Value = 1.26 V/m; Power Drift = -0.105 dB
 Peak SAR (extrapolated) = 0.108 W/kg
SAR(1 g) = 0.012 mW/g; SAR(10 g) = 0.00329 mW/g
 Maximum value of SAR (measured) = 0.035 mW/g

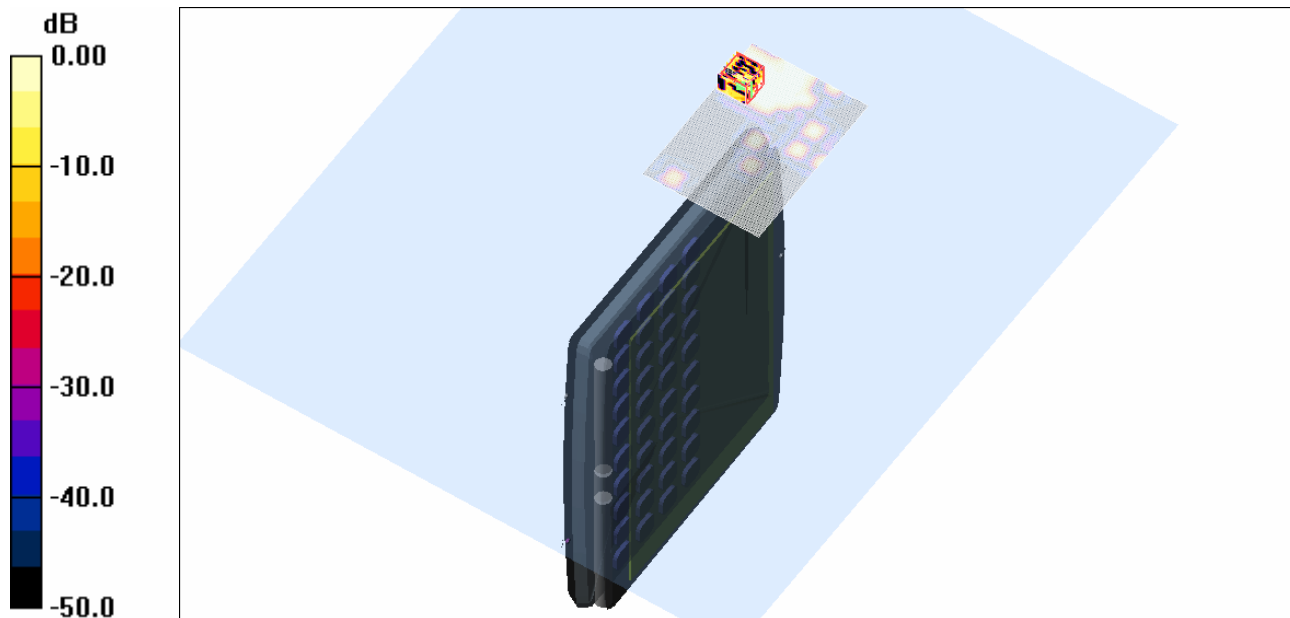


SAR MEASUREMENT PLOT 9

Ambient Temperature
Liquid Temperature
Humidity

20.8 Degrees Celsius
20.7 Degrees Celsius
51.0 %



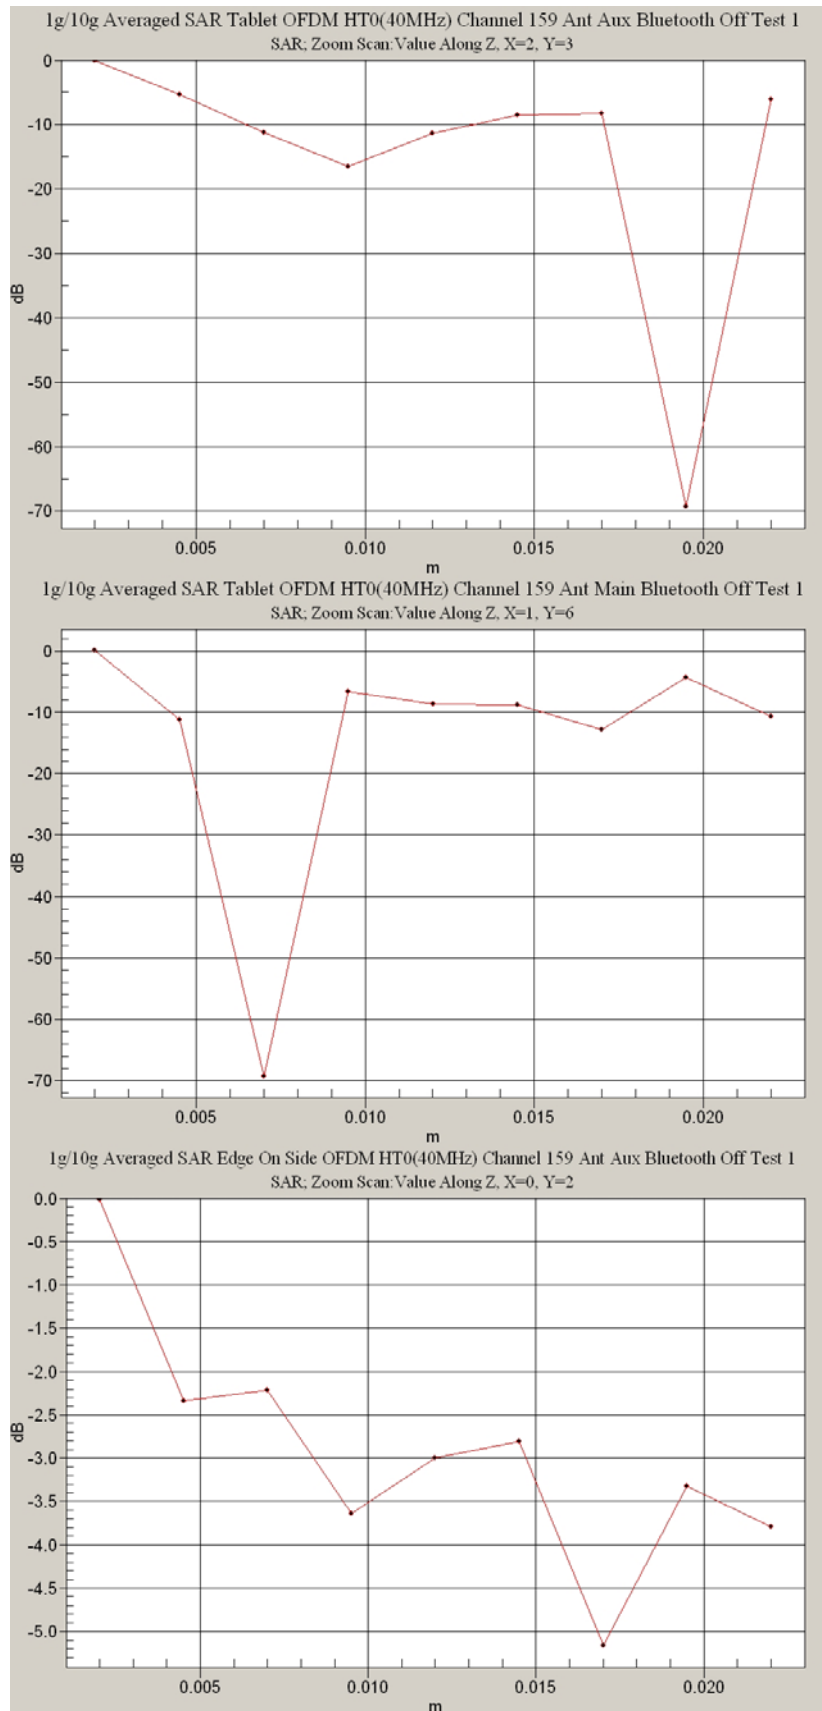

Test Date: 21 April 2008


File Name: Edge On Top OFDM 5.8 GHz Ant Main Bluetooth Off 21-04-08.da4

DUT: Fujitsu Notebook Seneca with Atheros 11abgn and Bluetooth; Type: HB92; Serial: MAC: 001B9E-C850F4

- * Communication System: OFDM 5770 MHz; Frequency: 5785 MHz; Duty Cycle: 1:1
- * Medium parameters used: $\sigma = 6.15165$ mho/m, $\epsilon_r = 45.3234$; $\rho = 1000$ kg/m³
- Electronics: DAE3 Sn442; Probe: EX3DV4 - SN3563; ConvF(3.72, 3.72, 3.72)
- Phantom: Flat Phantom 10.1; Serial: P 10.1; Phantom section: Flat 2.2 Section

Channel 157 Test/Area Scan (81x121x1): Measurement grid: dx=10mm, dy=10mm
 Maximum value of SAR (interpolated) = 1.30 mW/g

Channel 157 Test/Zoom Scan (7x7x9)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2.5mm
 Reference Value = 6.16 V/m; Power Drift = -0.299 dB
 Peak SAR (extrapolated) = 2.67 W/kg
SAR(1 g) = 0.524 mW/g; SAR(10 g) = 0.121 mW/g
 Maximum value of SAR (measured) = 1.23 mW/g

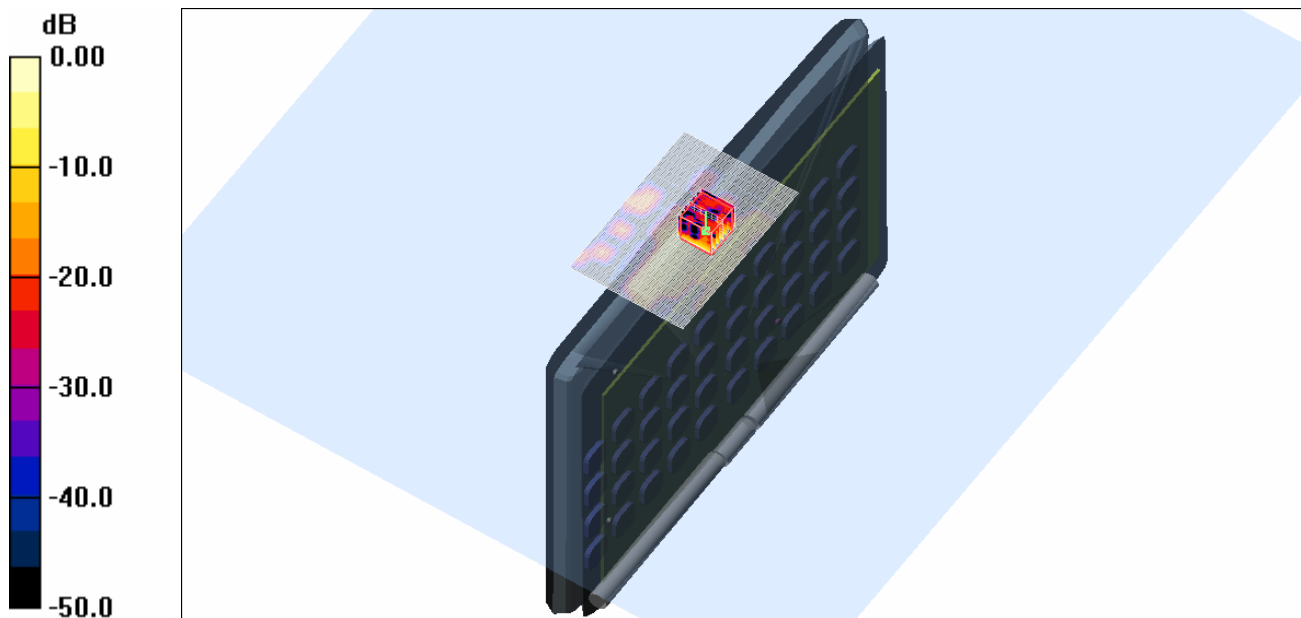

SAR MEASUREMENT PLOT 10

Ambient Temperature
 Liquid Temperature
 Humidity

20.8 Degrees Celsius
 20.7 Degrees Celsius
 51.0 %



Test Date: 21 April 2008


File Name: Edge On Top OFDM HT0(20MHz) 5.8 GHz Ant Main Bluetooth Off 21-04-08.da4

DUT: Fujitsu Notebook Seneca with Atheros 11abgn and Bluetooth; Type: HB92; Serial: MAC: 001B9E-C850F4

- * Communication System: OFDM 5770 MHz; Frequency: 5785 MHz; Duty Cycle: 1:1
- * Medium parameters used: $\sigma = 6.15165 \text{ mho/m}$, $\epsilon_r = 45.3234$; $\rho = 1000 \text{ kg/m}^3$
- Electronics: DAE3 Sn442; Probe: EX3DV4 - SN3563; ConvF(3.72, 3.72, 3.72)
- Phantom: Flat Phantom 10.1; Serial: P 10.1; Phantom section: Flat 2.2 Section

Channel 157 Test/Area Scan (81x121x1): Measurement grid: dx=10mm, dy=10mm
 Maximum value of SAR (interpolated) = 1.27 mW/g

Channel 157 Test/Zoom Scan (7x7x9)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2.5mm
 Reference Value = 5.59 V/m; Power Drift = -0.085 dB
 Peak SAR (extrapolated) = 2.77 W/kg
SAR(1 g) = 0.496 mW/g; SAR(10 g) = 0.116 mW/g
 Maximum value of SAR (measured) = 1.15 mW/g

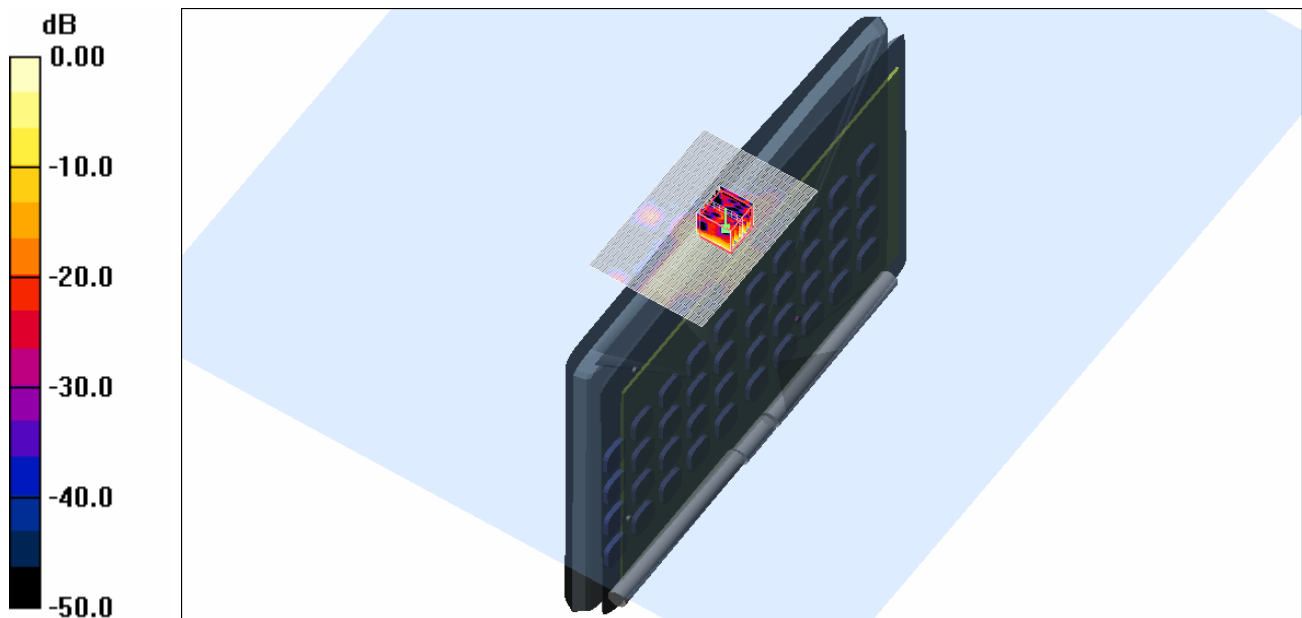

SAR MEASUREMENT PLOT 11

Ambient Temperature
 Liquid Temperature
 Humidity

20.8 Degrees Celsius
 20.7 Degrees Celsius
 51.0 %



Test Date: 21 April 2008


File Name: Edge On Top OFDM HT0(40MHz) 5.8 GHz Ant Main Bluetooth Off 21-04-08.da4

DUT: Fujitsu Notebook Seneca with Atheros 11abgn and Bluetooth; Type: HB92; Serial: MAC: 001B9E-C850F4

- * Communication System: OFDM 5775 MHz; Frequency: 5795 MHz; Duty Cycle: 1:1
- * Medium parameters used: $\sigma = 6.17405 \text{ mho/m}$, $\epsilon_r = 45.296$; $\rho = 1000 \text{ kg/m}^3$
- Electronics: DAE3 Sn442; Probe: EX3DV4 - SN3563; ConvF(3.72, 3.72, 3.72)
- Phantom: Flat Phantom 10.1; Serial: P 10.1; Phantom section: Flat 2.2 Section

Channel 159 Test/Area Scan (81x121x1): Measurement grid: dx=10mm, dy=10mm
 Maximum value of SAR (interpolated) = 1.17 mW/g

Channel 159 Test/Zoom Scan (7x7x9)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2.5mm
 Reference Value = 9.20 V/m; Power Drift = -0.082 dB
 Peak SAR (extrapolated) = 3.27 W/kg
SAR(1 g) = 0.604 mW/g; SAR(10 g) = 0.132 mW/g
 Maximum value of SAR (measured) = 1.27 mW/g

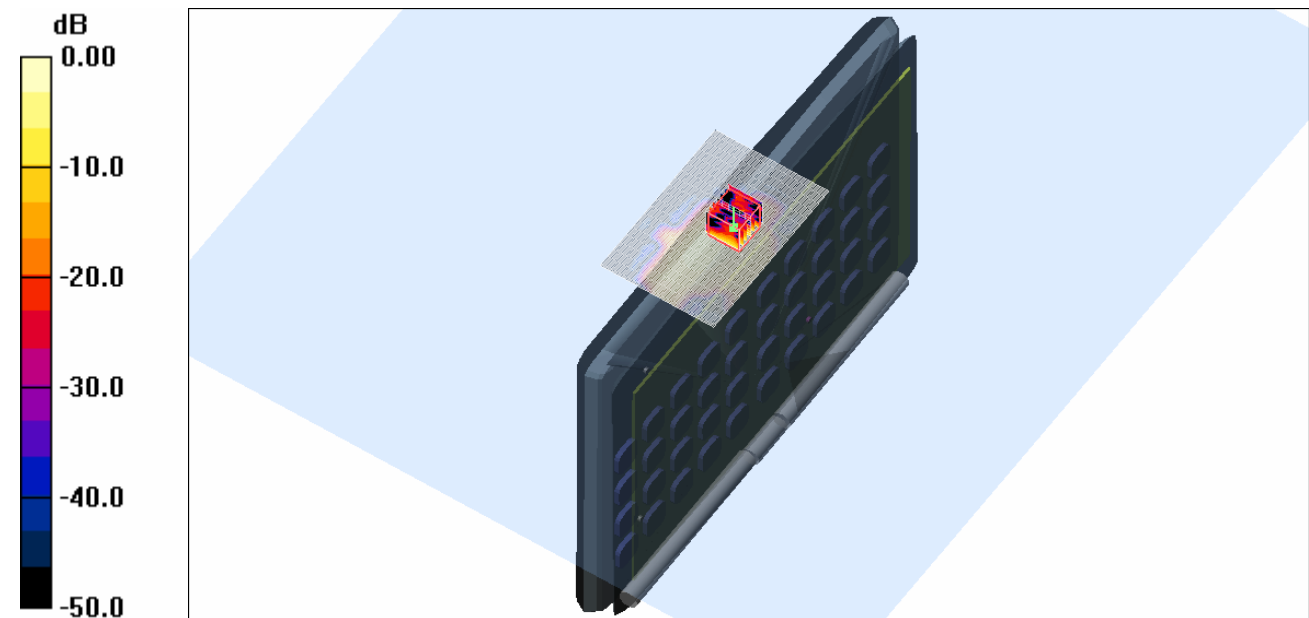


SAR MEASUREMENT PLOT 12

Ambient Temperature
 Liquid Temperature
 Humidity

20.8 Degrees Celsius
 20.7 Degrees Celsius
 51.0 %



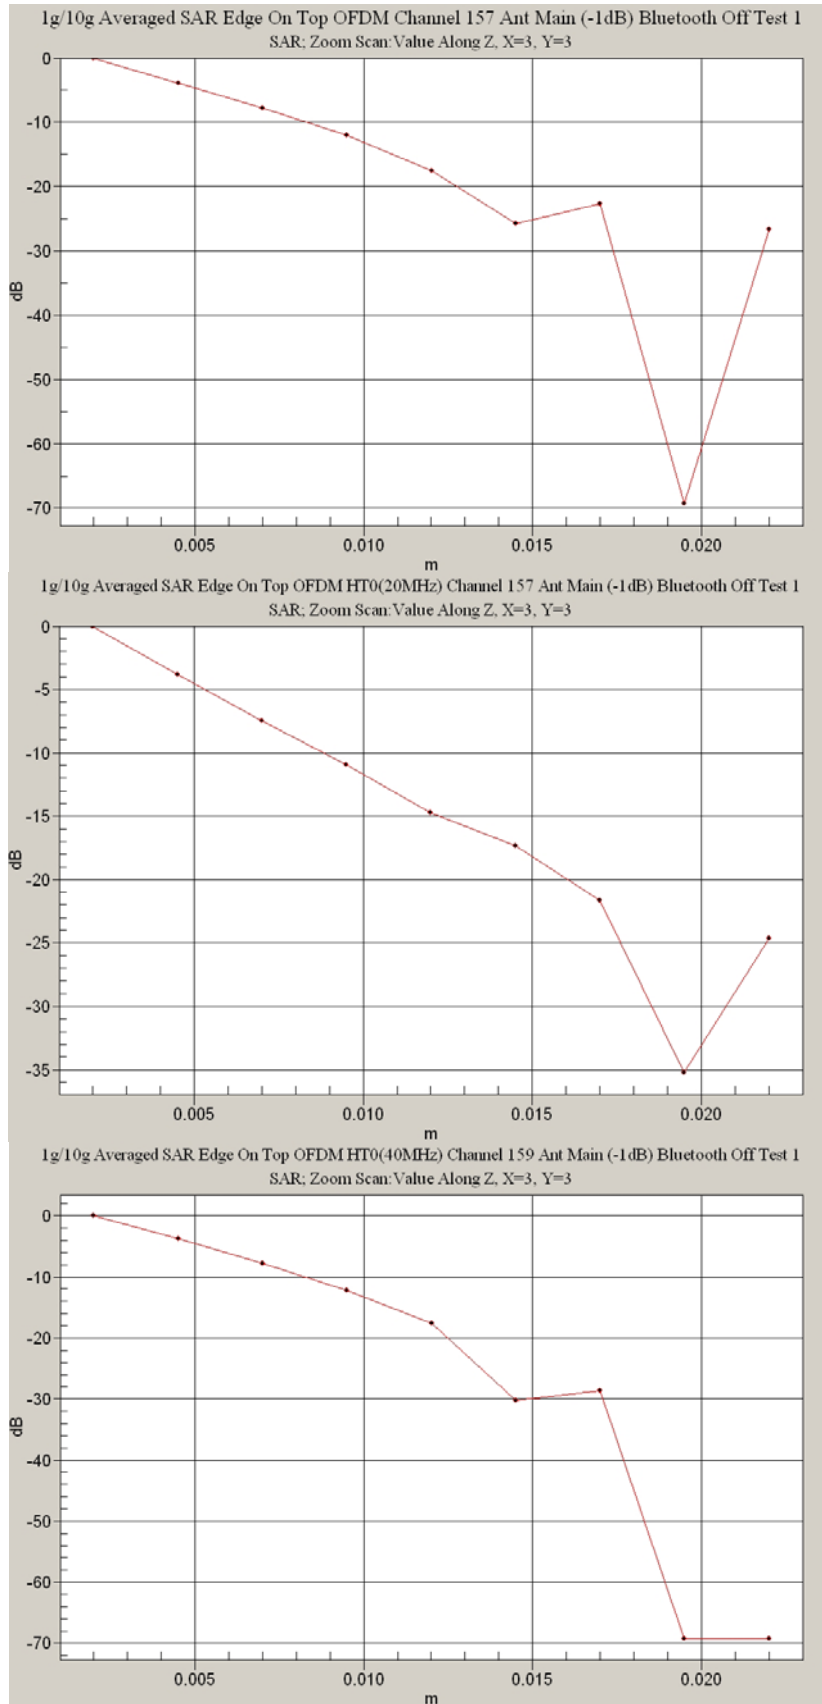

Test Date: 21 April 2008


File Name: Edge On Top OFDM HT0(40MHz) 5.8 GHz Ant Aux Bluetooth Off 21-04-08.da4

DUT: Fujitsu Notebook Seneca with Atheros 11abgn and Bluetooth; Type: HB92; Serial: MAC: 001B9E-C850F4

- * Communication System: OFDM 5775 MHz; Frequency: 5755 MHz; Duty Cycle: 1:1
- * Medium parameters used: $\sigma = 6.09556$ mho/m, $\epsilon_r = 45.4025$; $\rho = 1000$ kg/m³
- Electronics: DAE3 Sn442; Probe: EX3DV4 - SN3563; ConvF(3.72, 3.72, 3.72)
- Phantom: Flat Phantom 10.1; Serial: P 10.1; Phantom section: Flat 2.2 Section

Channel 151 Test/Area Scan (81x121x1): Measurement grid: dx=10mm, dy=10mm
 Maximum value of SAR (interpolated) = 1.35 mW/g

Channel 151 Test/Zoom Scan (7x7x9)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2.5mm
 Reference Value = 9.03 V/m; Power Drift = -0.175 dB
 Peak SAR (extrapolated) = 2.65 W/kg
SAR(1 g) = 0.558 mW/g; SAR(10 g) = 0.135 mW/g
 Maximum value of SAR (measured) = 1.24 mW/g

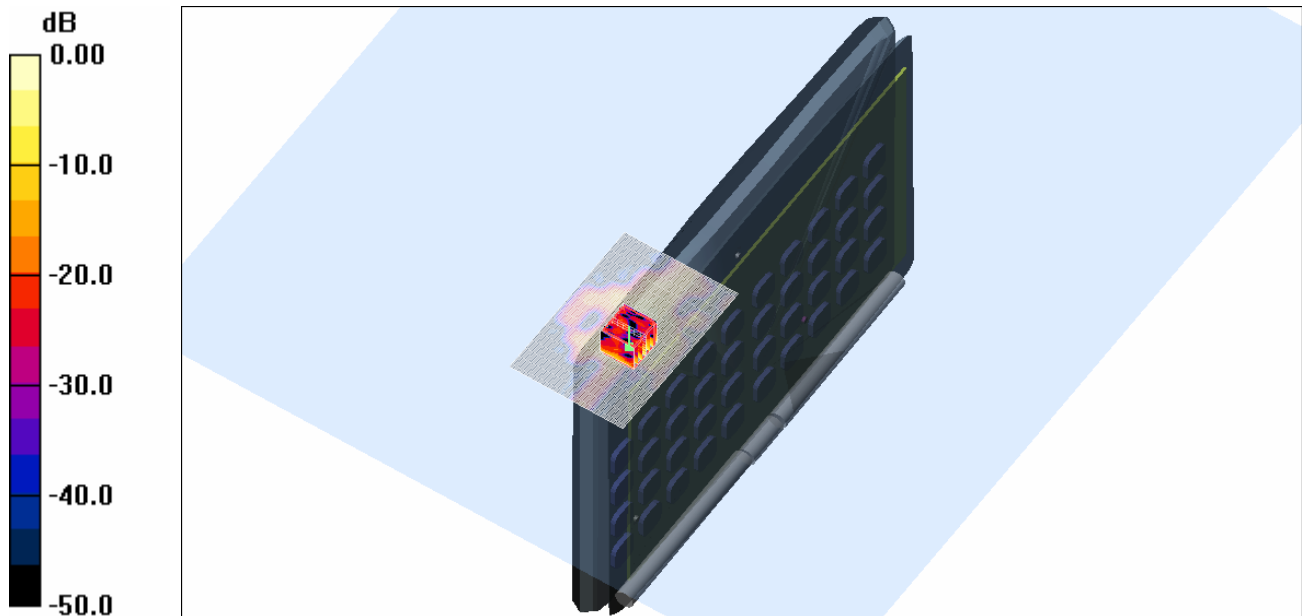

SAR MEASUREMENT PLOT 13

Ambient Temperature
Liquid Temperature
Humidity

20.8 Degrees Celsius
20.7 Degrees Celsius
51.0 %



Test Date: 21 April 2008


File Name: Edge On Top OFDM HT0(40MHz) 5.8 GHz Ant Aux Bluetooth Off 21-04-08.da4

DUT: Fujitsu Notebook Seneca with Atheros 11abgn and Bluetooth; Type: HB92; Serial: MAC: 001B9E-C850F4

- * Communication System: OFDM 5775 MHz; Frequency: 5795 MHz; Duty Cycle: 1:1
- * Medium parameters used: $\sigma = 6.17405 \text{ mho/m}$, $\epsilon_r = 45.296$; $\rho = 1000 \text{ kg/m}^3$
- Electronics: DAE3 Sn442; Probe: EX3DV4 - SN3563; ConvF(3.72, 3.72, 3.72)
- Phantom: Flat Phantom 10.1; Serial: P 10.1; Phantom section: Flat 2.2 Section

Channel 159 Test/Area Scan (81x121x1): Measurement grid: dx=10mm, dy=10mm
 Maximum value of SAR (interpolated) = 1.69 mW/g

Channel 159 Test/Zoom Scan (7x7x9)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2.5mm
 Reference Value = 9.95 V/m; Power Drift = 0.076 dB
 Peak SAR (extrapolated) = 3.59 W/kg
SAR(1 g) = 0.733 mW/g; SAR(10 g) = 0.177 mW/g
 Maximum value of SAR (measured) = 1.63 mW/g

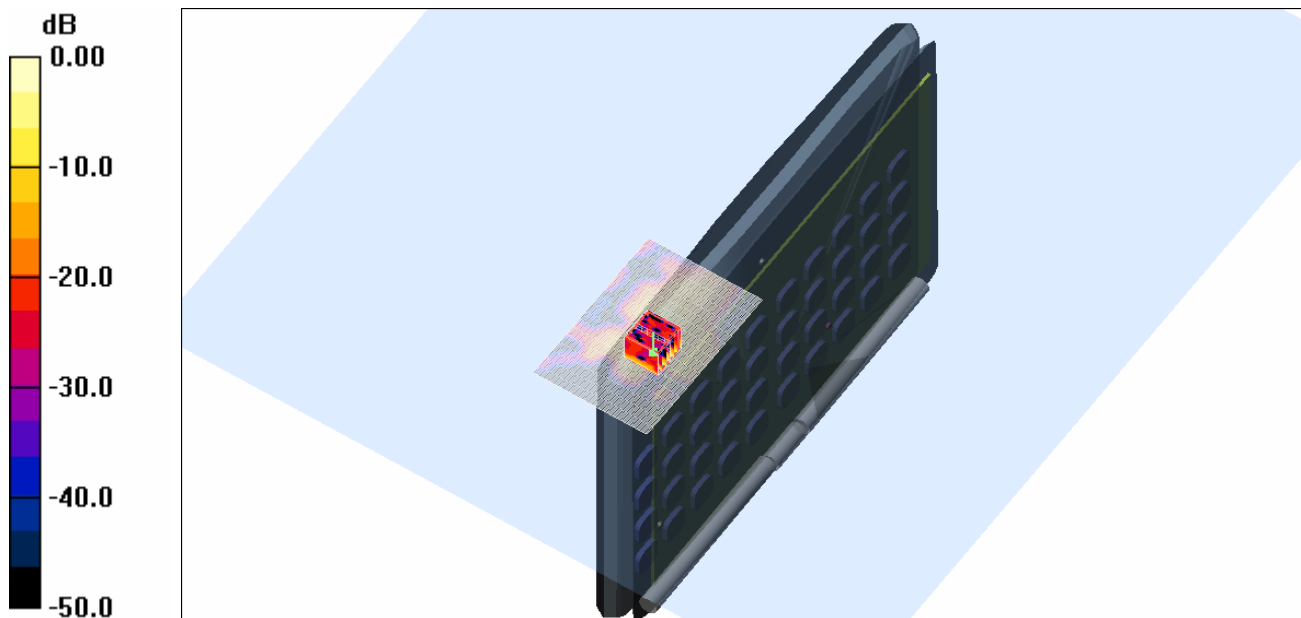


0 dB = 1.63mW/g

SAR MEASUREMENT PLOT 14

Ambient Temperature
Liquid Temperature
Humidity

20.8 Degrees Celsius
20.7 Degrees Celsius
51.0 %



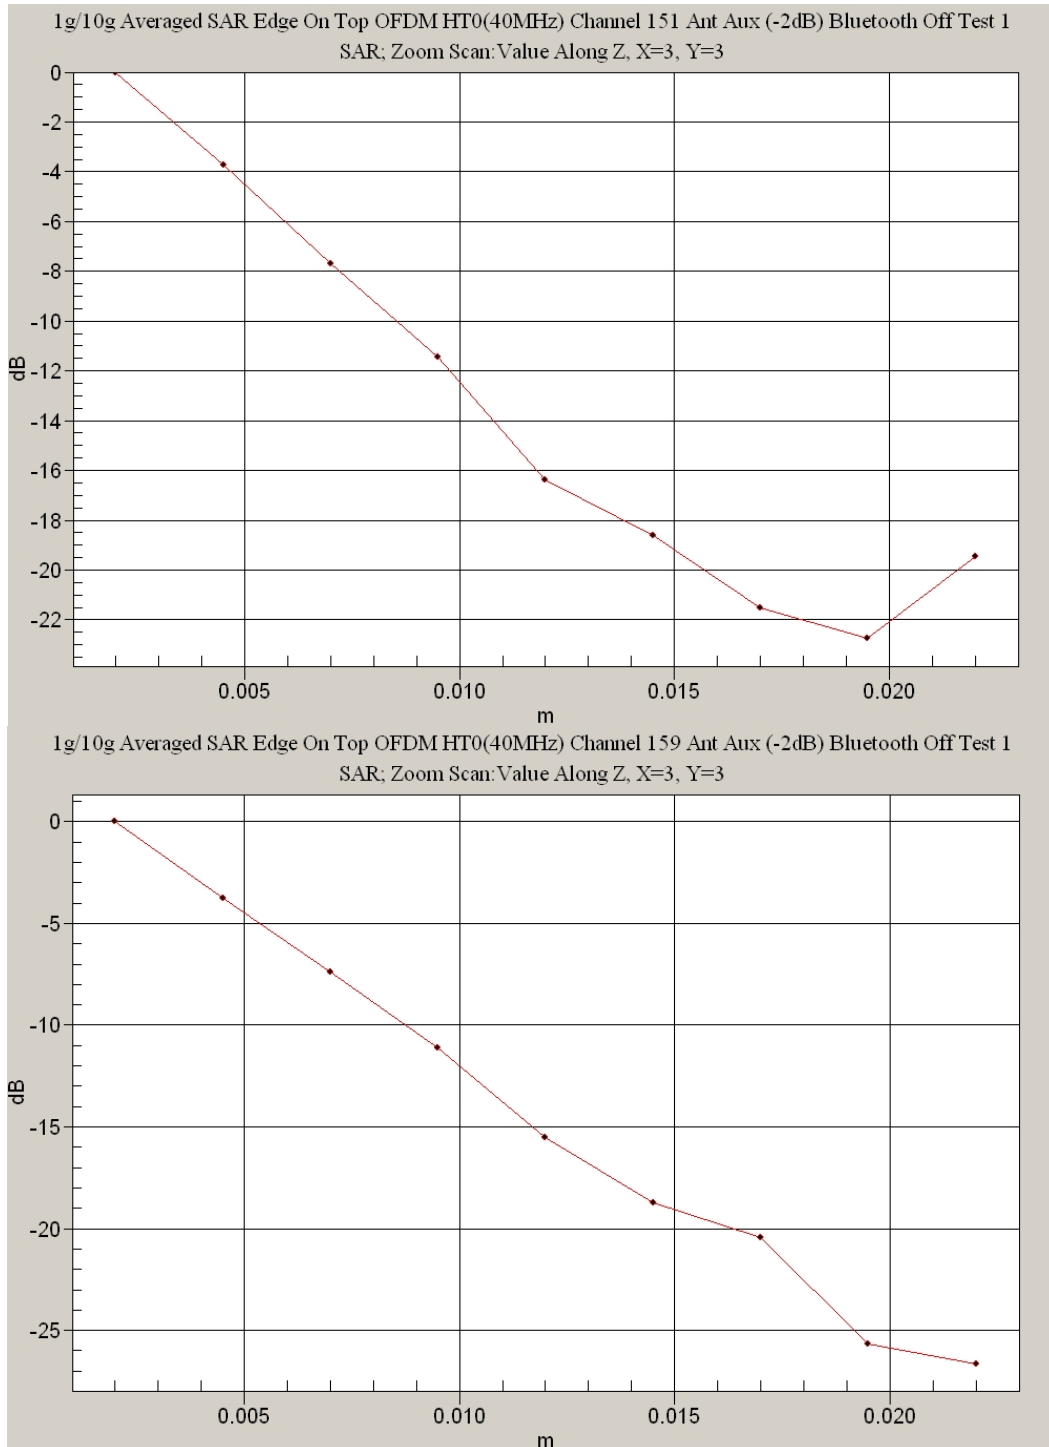

Test Date: 12 April 2008

File Name: Validation 5200MHz (DAE 442 Probe EX3DV4) 12-04-08.da4

DUT: Dipole 5200_5800 MHz; Type: D5GHzV2; Serial: 1008

* Communication System: CW 5200 MHz; Frequency: 5200 MHz; Duty Cycle: 1:1

* Medium parameters used: $\sigma = 4.56962$ mho/m, $\epsilon_r = 35.8508$; $\rho = 1000$ kg/m³

- Electronics: DAE3 Sn442; Probe: EX3DV4 - SN3563; ConvF(4.25, 4.25, 4.25)

- Phantom: SAM 22; Serial: 1260; Phantom section: Flat Section

Channel 1 Test/Area Scan (91x91x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 42.4 mW/g

Channel 1 Test/Zoom Scan (7x7x9)/Cube 0: Measurement grid: dx=4mm, dy=4mm,


dz=2.5mm

Reference Value = 99.0 V/m; Power Drift = -0.062 dB

Peak SAR (extrapolated) = 74.5 W/kg

SAR(1 g) = 19.5 mW/g; SAR(10 g) = 5.53 mW/g

Maximum value of SAR (measured) = 40.4 mW/g

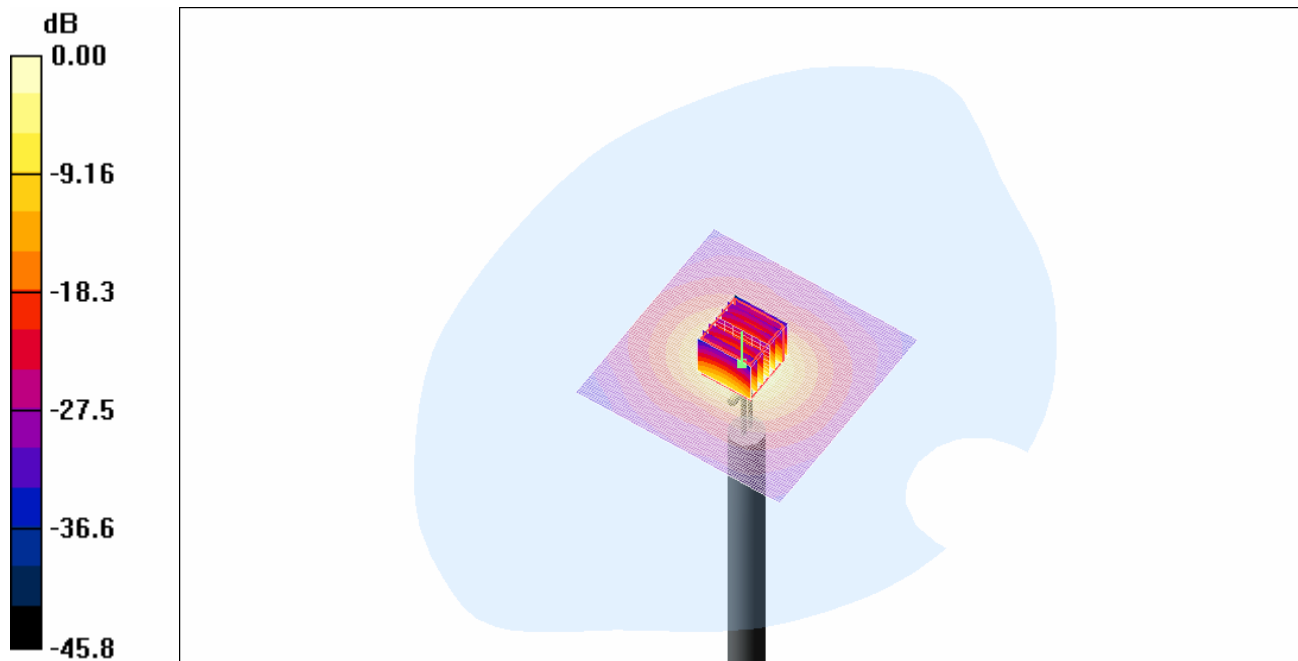

0 dB = 40.4mW/g

SAR MEASUREMENT PLOT 15

Ambient Temperature
Liquid Temperature
Humidity

21.4 Degrees Celsius
21.1 Degrees Celsius
54.0 %



Test Date: 17 April 2008

File Name: Validation 5200MHz (DAE 442 Probe EX3DV4) 17-04-08.da4

DUT: Dipole 5200_5800 MHz; Type: D5GHzV2; Serial: 1008

* Communication System: CW 5200 MHz; Frequency: 5200 MHz; Duty Cycle: 1:1

* Medium parameters used: $\sigma = 4.59793$ mho/m, $\epsilon_r = 35.749$; $\rho = 1000$ kg/m³

- Electronics: DAE3 Sn442; Probe: EX3DV4 - SN3563; ConvF(4.25, 4.25, 4.25)

- Phantom: SAM 22; Serial: 1260; Phantom section: Flat Section

Channel 1 Test/Area Scan (91x91x1): Measurement grid: dx=10mm, dy=10mm
Maximum value of SAR (interpolated) = 41.5 mW/g


Channel 1 Test/Zoom Scan (7x7x9)/Cube 0: Measurement grid: dx=4mm, dy=4mm,
dz=2.5mm

Reference Value = 96.0 V/m; Power Drift = 0.190 dB

Peak SAR (extrapolated) = 75.2 W/kg

SAR(1 g) = 19.8 mW/g; SAR(10 g) = 5.63 mW/g


Maximum value of SAR (measured) = 40.8 mW/g

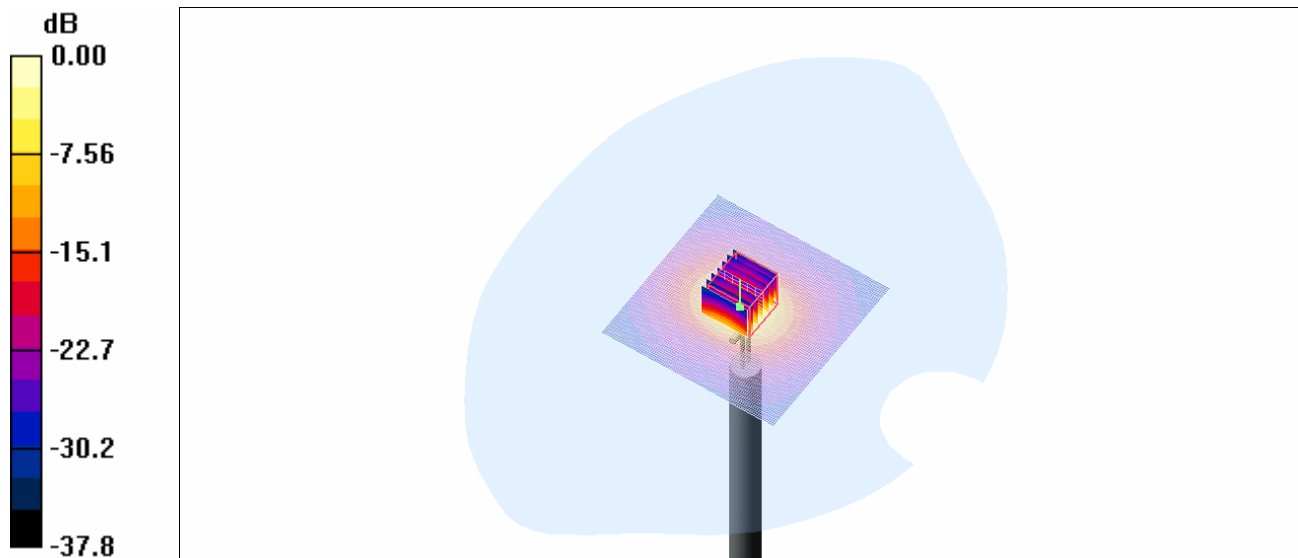

SAR MEASUREMENT PLOT 16

Ambient Temperature
Liquid Temperature
Humidity

20.5 Degrees Celsius
20.2 Degrees Celsius
53.0 %

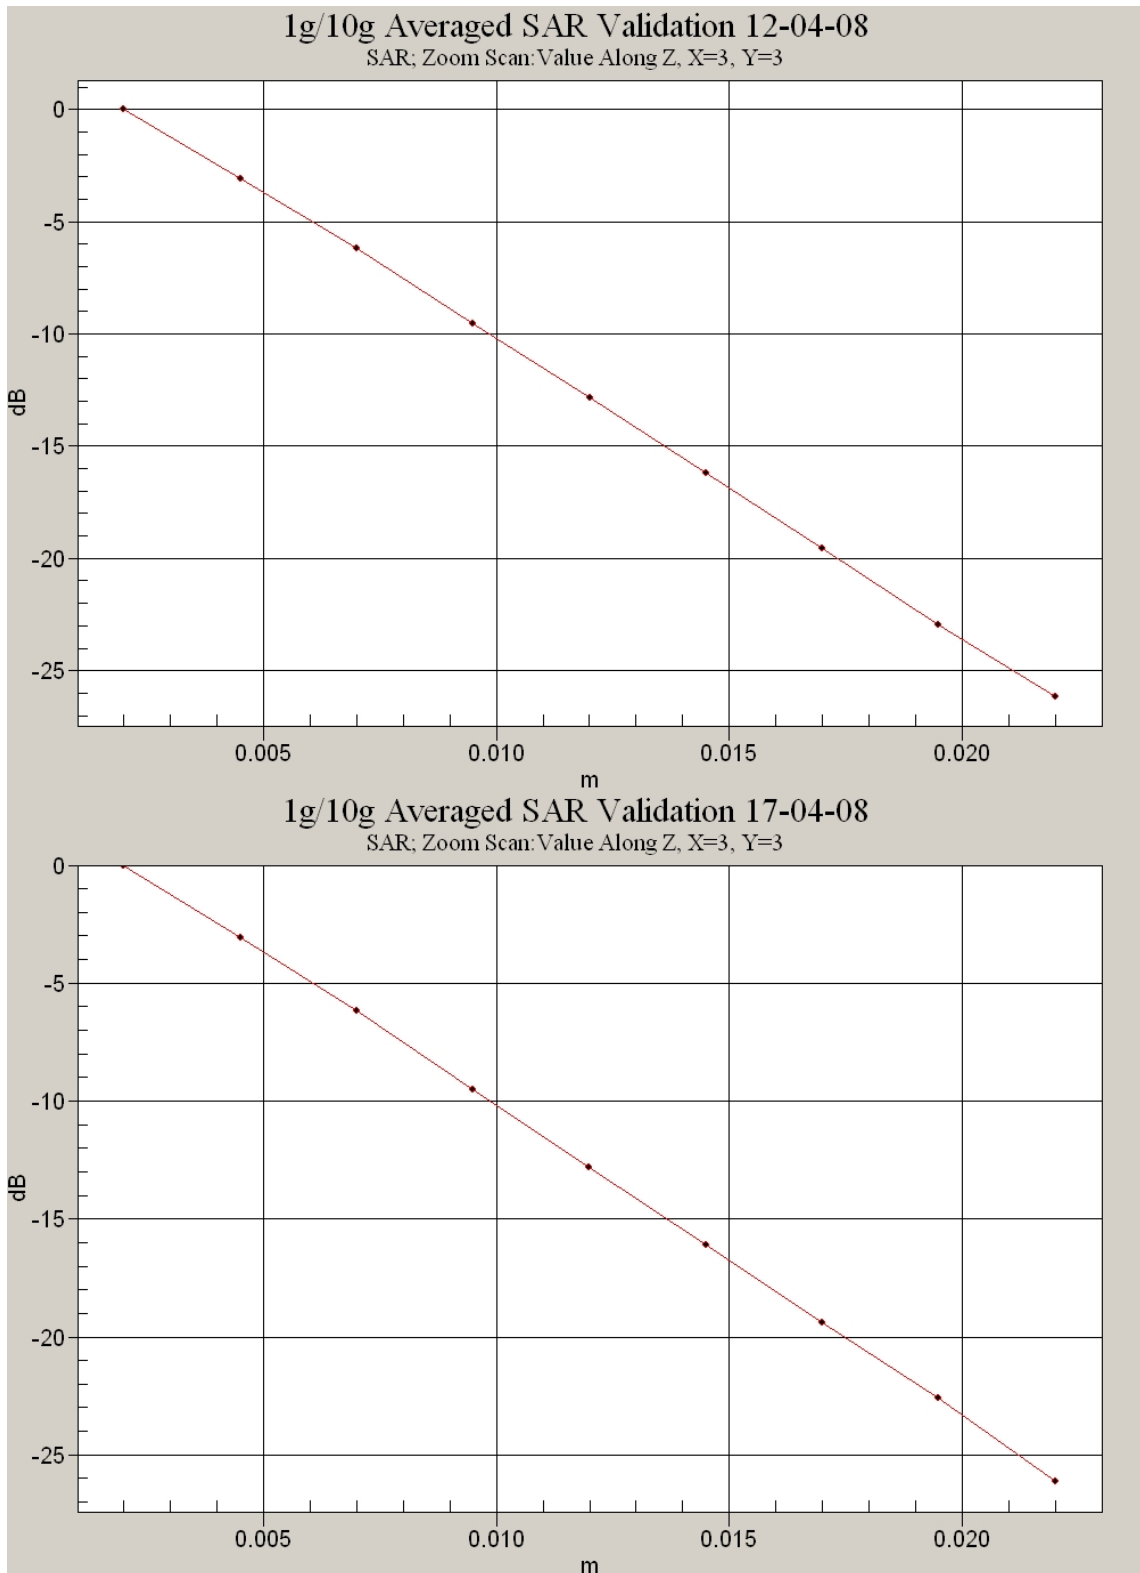

Test Date: 18 April 2008


File Name: Validation 5500MHz (DAE 442 Probe EX3DV4) 18-04-08.da4

DUT: Dipole 5200_5800 MHz; Type: D5GHzV2; Serial: 1008

- * Communication System: CW 5500 MHz; Frequency: 5500 MHz; Duty Cycle: 1:1
- * Medium parameters used: $\sigma = 5.08702$ mho/m, $\epsilon_r = 35.1237$; $\rho = 1000$ kg/m³
- Electronics: DAE3 Sn442; Probe: EX3DV4 - SN3563; ConvF(4.03, 4.03, 4.03)
- Phantom: SAM 22; Serial: 1260; Phantom section: Flat Section

Channel 1 Test/Area Scan (91x91x1): Measurement grid: dx=10mm, dy=10mm
Maximum value of SAR (interpolated) = 46.2 mW/g

Channel 1 Test/Zoom Scan (7x7x9)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2.5mm
Reference Value = 98.6 V/m; Power Drift = 0.202 dB
Peak SAR (extrapolated) = 87.5 W/kg
SAR(1 g) = 21.6 mW/g; SAR(10 g) = 6.12 mW/g
Maximum value of SAR (measured) = 44.4 mW/g

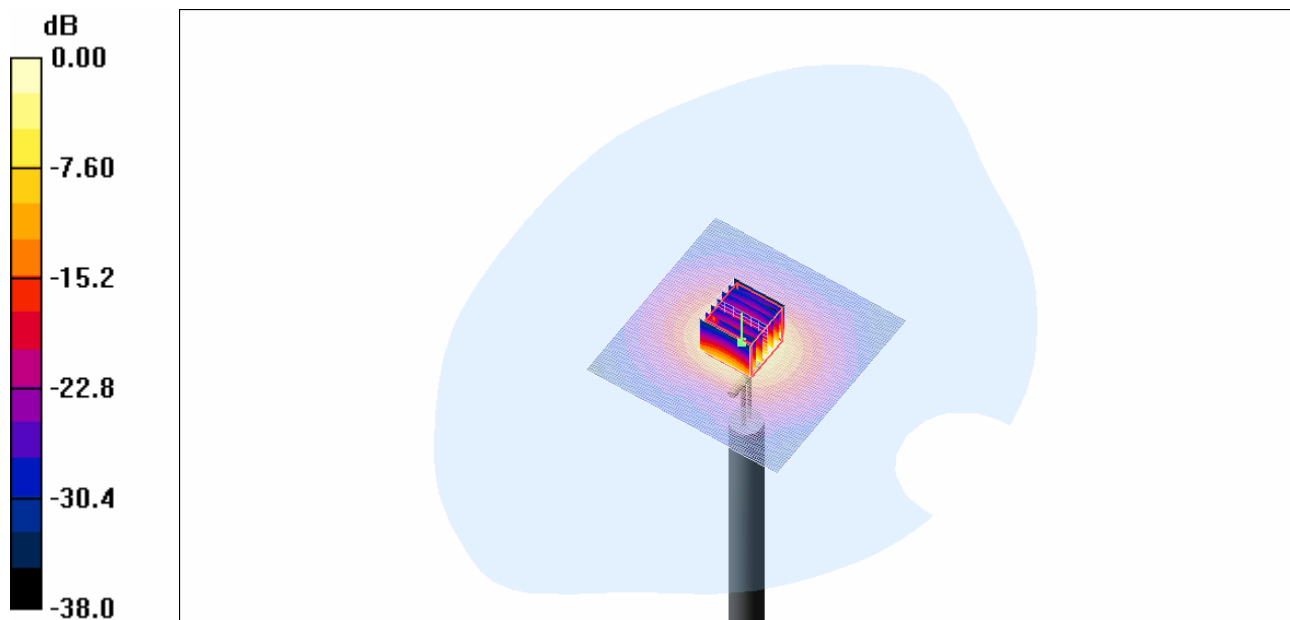

0 dB = 44.4mW/g

SAR MEASUREMENT PLOT 17

Ambient Temperature
Liquid Temperature
Humidity

21.0 Degrees Celsius
20.9 Degrees Celsius
53.0 %



Test Date: 21 April 2008

File Name: Validation 5800MHz (DAE 442 Probe EX3DV4) 21-04-08.da4

DUT: Dipole 5200_5800 MHz; Type: D5GHzV2; Serial: 1008

* Communication System: CW 5800 MHz; Frequency: 5800 MHz; Duty Cycle: 1:1

* Medium parameters used: $\sigma = 5.32462$ mho/m, $\epsilon_r = 33.9092$; $\rho = 1000$ kg/m³

- Electronics: DAE3 Sn442; Probe: EX3DV4 - SN3563; ConvF(3.65, 3.65, 3.65)

- Phantom: SAM 22; Serial: 1260; Phantom section: Flat Section

Channel 1 Test/Area Scan (91x91x1): Measurement grid: dx=10mm, dy=10mm
 Maximum value of SAR (interpolated) = 44.9 mW/g


Channel 1 Test/Zoom Scan (7x7x9)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2.5mm

Reference Value = 95.7 V/m; Power Drift = 0.139 dB

Peak SAR (extrapolated) = 89.3 W/kg

SAR(1 g) = 20.6 mW/g; SAR(10 g) = 5.83 mW/g

Maximum value of SAR (measured) = 44.2 mW/g

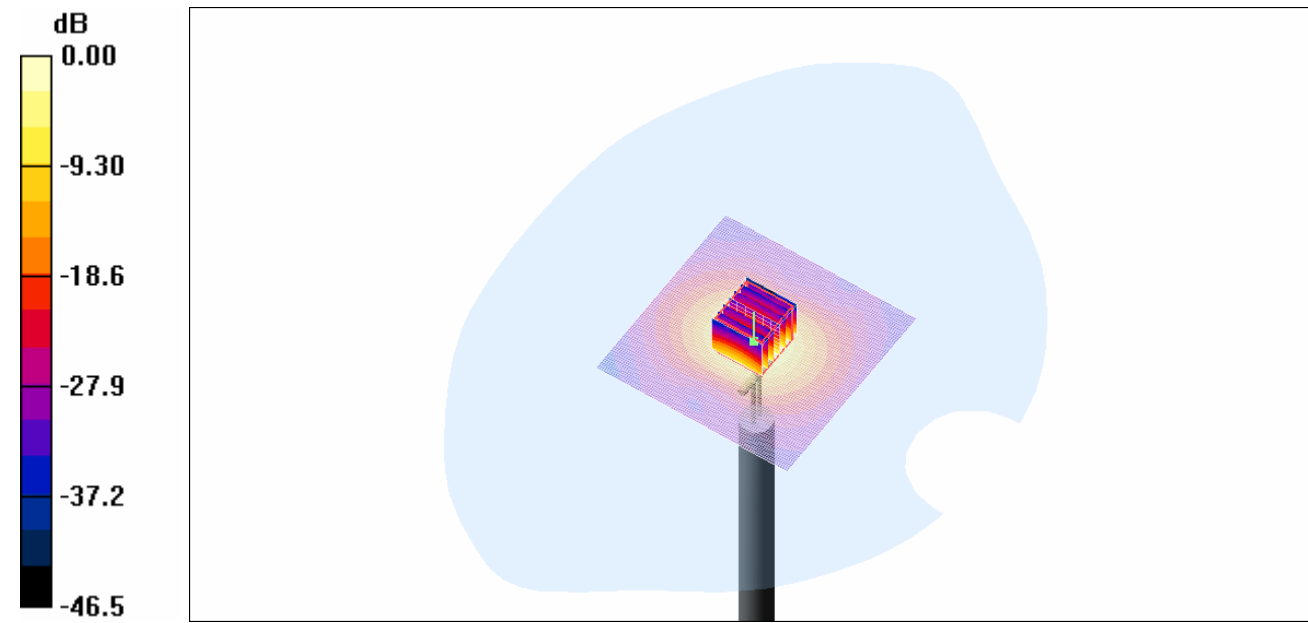

0 dB = 44.2mW/g

SAR MEASUREMENT PLOT 18

Ambient Temperature
Liquid Temperature
Humidity

20.8 Degrees Celsius
20.7 Degrees Celsius
51.0 %



