

**EMC Technologies Pty Ltd**

ABN 82 057 105 549  
176 Harrick Road  
Keilor Park  
Victoria Australia 3042

Ph: + 613 9365 1000  
Fax: + 613 9331 7455  
email: melb@emctech.com.au

## SAR Test Report

Report Number: M100859\_FCC\_622ANHMW\_SAR\_2.4

Test Sample: Portable TABLET Computer  
Radio Modules: WLAN INTEL CENTRINO  
ADVANCED-N 6200(PUMA PEAK)  
622ANHMW & Bluetooth BSMAN3  
Host PC Model Number: T580 / TH550  
PC System FCC ID: EJE-WB0083 (with Bluetooth variant)  
EJE-WL0023 (with No Bluetooth variant)  
PC System IC: 337J-WB0083 (with Bluetooth variant)  
337J-WL0023 (with No Bluetooth variant)  
Date of Issue: 29<sup>th</sup> September 2010

EMC Technologies Pty Ltd reports apply only to the specific samples tested under stated test conditions. It is the manufacturer's responsibility to assure that additional production units of this model are manufactured with identical electrical and mechanical components. EMC Technologies Pty Ltd shall have no liability for any deductions, inferences or generalisations drawn by the client or others from EMC Technologies Pty Ltd issued reports. This report shall not be used to claim, constitute or imply product endorsement by EMC Technologies Pty Ltd.



This document must not be copied or reproduced, except in full without the written permission of the Manager, EMC Technologies Pty Ltd. The certificate on page 3 may be reproduced in full.  
[www.emctech.com.au](http://www.emctech.com.au)



## CONTENTS

|   |           |
|---|-----------|
| <b>1.0 GENERAL INFORMATION.....</b>   | <b>3</b>  |
| <b>2.0 INTRODUCTION .....</b>   | <b>4</b>  |
| <b>3.0 TEST SAMPLE TECHNICAL INFORMATION.....</b>                               | <b>4</b>  |
| 3.1 DUT (WLAN) Details .....  | 4         |
| 3.2 DUT (Bluetooth) Details .....   | 6         |
| 3.3 DUT (Notebook PC) Details (client supplied info):.....                      | 6         |
| 3.4 Test sample Accessories .....   | 7         |
| 3.4.1 Battery Types .....   | 7         |
| <b>4.0 TEST SIGNAL, FREQUENCY AND OUTPUT POWER.....</b>                         | <b>7</b>  |
| 4.1 Battery Status.....   | 8         |
| <b>5.0 DETAILS OF TEST LABORATORY .....</b>                                     | <b>8</b>  |
| 5.1 Location .....  | 8         |
| 5.2 Accreditations.....   | 8         |
| 5.3 Environmental Factors .....   | 8         |
| <b>6.0 DESCRIPTION OF SAR MEASUREMENT SYSTEM.....</b>                           | <b>9</b>  |
| 6.1 Probe Positioning System .....  | 9         |
| 6.2 E-Field Probe Type and Performance .....                                    | 9         |
| 6.4 System verification .....   | 9         |
| 6.4.1 System verification Results @ 2450MHz.....                                | 9         |
| 6.4.2 Deviation from reference system verification values.....                  | 9         |
| 6.4.3 Liquid Depth 15cm.....  | 10        |
| 6.5 Phantom Properties .....  | 10        |
| 6.6 Tissue Material Properties.....   | 11        |
| 6.6.1 Liquid Temperature and Humidity.....                                      | 11        |
| 6.7 Simulated Tissue Composition Used for SAR Test .....                        | 11        |
| 6.8 Device Holder for Laptops and P 10.1 Phantom .....                          | 11        |
| <b>7.0 SAR MEASUREMENT PROCEDURE USING DASY4.....</b>                           | <b>12</b> |
| <b>8.0 MEASUREMENT UNCERTAINTY.....</b>   | <b>13</b> |
| <b>9.0 EQUIPMENT LIST AND CALIBRATION DETAILS.....</b>                          | <b>15</b> |
| <b>10.0 OET BULLETIN 65 – SUPPLEMENT C TEST METHOD .....</b>                    | <b>16</b> |
| 10.1 Positions .....  | 16        |
| 10.1.1 “Tablet” Position Definition (0mm spacing) .....                         | 16        |
| 10.1.2 “Edge On” Position (Portrait or Landscape).....                          | 16        |
| 10.1.3 “Lap Held” Position (0mm spacing).....                                   | 16        |
| 10.2 List of All Test Cases (Antenna In/Out, Test Frequencies, User Modes)..... | 16        |
| <b>11.0 SAR MEASUREMENT RESULTS .....</b>                                       | <b>17</b> |
| 11.1 2450MHz SAR Results.....   | 17        |
| <b>12.0 COMPLIANCE STATEMENT .....</b>  | <b>18</b> |
| <b>13.0 MULTIBAND EVALUATION CONSIDERATIONS.....</b>                            | <b>19</b> |
| <b>APPENDIX A1 TEST SAMPLE PHOTOGRAPHS .....</b>                                | <b>20</b> |
| <b>APPENDIX A2 TEST SAMPLE PHOTOGRAPHS .....</b>                                | <b>21</b> |
| <b>APPENDIX A3 TEST SAMPLE PHOTOGRAPHS .....</b>                                | <b>22</b> |
| <b>APPENDIX A4 TEST SETUP PHOTOGRAPHS .....</b>                                 | <b>23</b> |
| <b>APPENDIX A5 TEST SETUP PHOTOGRAPHS .....</b>                                 | <b>24</b> |
| <b>APPENDIX A6 TEST SETUP PHOTOGRAPHS .....</b>                                 | <b>25</b> |
| <b>APPENDIX A7 TEST SETUP PHOTOGRAPHS .....</b>                                 | <b>26</b> |
| <b>APPENDIX A8 TEST SAMPLE PHOTOGRAPHS .....</b>                                | <b>27</b> |
| <b>APPENDIX B PLOTS OF THE SAR MEASUREMENTS .....</b>                           | <b>28</b> |
| <b>APPENDIX C CALIBRATION DOCUMENTS .....</b>                                   | <b>47</b> |



**SAR TEST REPORT****Report Number: M100859\_FCC\_622ANHMW\_SAR\_2.4****PC System FCC ID:** EJE-WB0083 (with Bluetooth variant), EJE-WL0023 (with No Bluetooth variant)**PC System IC:** 337J-WB0083 (with Bluetooth variant), 337J-WL0023 (with No Bluetooth variant)**1.0 GENERAL INFORMATION**

Table 1

|                                 |   |
|---------------------------------|---|
| <b>Test Sample:</b>             | Portable TABLET Computer  |
| <b>Model Name:</b>              | T580 / TH550  |
| <b>Radio Modules:</b>           | WLAN 622ANHMW & Bluetooth BSMAN3  |
| <b>Interface Type:</b>          | Half Mini-Card Module   |
| <b>Device Category:</b>         | Portable Transmitter  |
| <b>Test Device:</b>             | Pre-Production Unit   |
| <b>PC System FCC ID:</b>        | <u>EJE-WB0083 (with Bluetooth variant)</u><br><u>EJE-WL0023 (with No Bluetooth variant)</u>   |
| <b>PC System IC:</b>            | <u>337J-WB0083 (with Bluetooth variant)</u><br><u>337J-WL0023 (with No Bluetooth variant)</u>   |
| <b>RF exposure Category:</b>    | General Population/Uncontrolled   |
| <b>Manufacturer:</b>            | Fujitsu Limited   |
| <b>Test Standard/s:</b>         | <ol style="list-style-type: none"> <li>1. Evaluating Compliance with FCC Guidelines For Human Exposure to Radiofrequency Electromagnetic Fields Supplement C (Edition 01-01) to OET Bulletin 65 (Edition 97-01)</li> <li>2. Radio Frequency Exposure Compliance of Radiocommunication Apparatus (All Frequency Bands), RSS-102</li> </ol> |
| <b>Statement Of Compliance:</b> | The Fujitsu TABLET Computer T580 / TH550 with Wireless LAN model 622ANHMW and Bluetooth module BSMAN3 complied with the FCC General public/uncontrolled RF exposure limits of 1.6mW/g per requirements of 47CFR2.1093(d). It also complied with IC RSS-102 requirements.  |
| <b>Test Date:</b>               | 10 <sup>th</sup> September 2010   |
| <b>Test Officer:</b>            | <br><hr/> <b>Peter Jakubiec</b>  |
| <b>Authorised Signature:</b>    | <br><hr/> <b>Chris Zombolas</b><br><b>Technical Director</b>   |

This document is issued in accordance with NATA's accreditation requirements. The results of tests, calibration and/or measurements included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing and calibration reports.



**SAR TEST REPORT**  
**Portable TABLET Computer**  
**Model: T580 / TH550**  
**Report Number: M100859\_FCC\_622ANHMW\_SAR\_2.4**

## 2.0 INTRODUCTION

SAR testing was performed on the Fujitsu TABLET PC, Model: T580 / TH550 with INTEL Half Mini-Card Wireless LAN Module (INTEL CENTRINO ADVANCED-N 6200(PUMA PEAK) 802.11a/b/g/n), Model: 622ANHMW & CSR Bluetooth Module, Model: BSMAN3. The INTEL CENTRINO ADVANCED-N 6200(PUMA PEAK) module is an OEM product. The Half Mini-Card Wireless LAN (WLAN) was tested in the dedicated host – LIFEBOOK T SERIES, Model T580 / TH550. The system tested will be referred to as the DUT throughout this report.

There are two variants of the Fujitsu Tablet PC, Model: T580 / TH550 one that is equipped with the Bluetooth transmitter and Bluetooth antenna FCC ID: [EJE-WB0083](#) IC: [337J-WB0083](#), and one variant that does not contain Bluetooth transmitter or Bluetooth antenna FCC ID: [EJE-WL0023](#) IC: [337J-WL0023](#).

SAR testing was conducted on the sample that is equipped with the Bluetooth transmitter and Bluetooth antenna.

The measurement test results mentioned hereon only apply to the 2450MHz frequency band; an additional report titled "M100859\_FCC\_622ANHMW\_SAR\_5.6" applies to the 5GHz range.

## 3.0 TEST SAMPLE TECHNICAL INFORMATION

(Information supplied by the client)

### 3.1 DUT (WLAN) Details

Table 2

|                             |   |
|-----------------------------|---|
| <b>Transmitter:</b>         | Half Mini-Card Wireless LAN Module  |
| <b>Wireless Module:</b>     | Intel Centrino Advanced-N 6200(Puma Peak) (11a/b/g/n)   |
| <b>Model Number:</b>        | 622ANHMW  |
| <b>Manufacturer:</b>        | Intel Corporation   |
| <b>Modulation Type:</b>     | DSSS for 802.11b<br>OFDM for 802.11g<br>OFDM for 802.11a<br>OFDM for 802.11n                                      |
| <b>5GHz (802.11a/n)</b>     | BPSK, QPSK, 16QAM, 64QAM  |
| <b>2.4GHz (802.11b/g/n)</b> | CCK, DQPSK, DBPSK, 16QAM, 64QAM   |
| <b>Maximum Data Rate:</b>   | 802.11b = 11 Mbps, 802.11g and 802.11a = 54 Mbps<br>802.11n = 450 Mbps  |
| <b>Frequency Range:</b>     | 2.412–2.462 GHz for 11b/g/n<br>5.18-5.32 GHz and 5.745-5.825 GHz for 11a/n  |
| <b>Number of Channels:</b>  | 11 channels for 11b/g/n<br>24 channels for 11a/n with 20MHz Bandwidth<br>18 channels for 11n with 40MHz Bandwidth |
| <b>Antenna Types:</b>       | Nissei Electric Inverted F Antenna<br>Model: Tx1 Antenna: CP492575<br>Tx2 (or Rx2) Antenna: CP492575              |
| <b>Power Supply:</b>        | Location: Top edge of LCD screen<br>3.3 VDC from PCI bus  |



**Table 3 Channels and Output power setting**  
**2.4 GHz (802.11b, 802.11g and 802.11n)**

| Mode               | Channel | Frequency (MHz) | Data Rate (Mbps) | Tx BW (MHz) | Average Power Target (dBm) | Power Control - PCDAC Setting |                   | Average Power Measured (dBm) |       |
|--------------------|---------|-----------------|------------------|-------------|----------------------------|-------------------------------|-------------------|------------------------------|-------|
|                    |         |                 |                  |             |                            | Gain Control Tx A             | Gain Control Tx B | Tx A                         | Tx B  |
| 802.11b<br>2.4 GHz | 1       | 2412            | 1                | -           | 16.5                       | 27.5                          | 30.0              | 16.57                        | 16.77 |
|                    | 2       | 2417            |                  |             |                            | -                             | -                 | -                            | -     |
|                    | 3       | 2422            |                  |             |                            | -                             | -                 | -                            | -     |
|                    | 4       | 2427            |                  |             |                            | -                             | -                 | -                            | -     |
|                    | 5       | 2432            |                  |             |                            | -                             | -                 | -                            | -     |
|                    | 6       | 2437            |                  |             |                            | 28.0                          | 30.0              | 16.69                        | 16.60 |
|                    | 7       | 2442            |                  |             |                            | -                             | -                 | -                            | -     |
|                    | 8       | 2447            |                  |             |                            | -                             | -                 | -                            | -     |
|                    | 9       | 2452            |                  |             |                            | -                             | -                 | -                            | -     |
|                    | 10      | 2457            |                  |             |                            | -                             | -                 | -                            | -     |
|                    | 11      | 2462            |                  |             |                            | 28.5                          | 30.5              | 16.83                        | 16.77 |
| 802.11g<br>2.4 GHz | 1       | 2412            | 6                | -           | 15.5                       | -                             | -                 | -                            | -     |
|                    | 2       | 2417            |                  |             | 16.5                       | -                             | -                 | -                            | -     |
|                    | 3       | 2422            |                  |             |                            | -                             | -                 | -                            | -     |
|                    | 4       | 2427            |                  |             |                            | -                             | -                 | -                            | -     |
|                    | 5       | 2432            |                  |             |                            | -                             | -                 | -                            | -     |
|                    | 6       | 2437            |                  |             |                            | -                             | -                 | -                            | -     |
|                    | 7       | 2442            |                  |             |                            | -                             | -                 | -                            | -     |
|                    | 8       | 2447            |                  |             |                            | -                             | -                 | -                            | -     |
|                    | 9       | 2452            |                  |             |                            | -                             | -                 | -                            | -     |
|                    | 10      | 2457            |                  |             |                            | -                             | -                 | -                            | -     |
|                    | 11      | 2462            |                  |             |                            | 15.5                          | -                 | -                            | -     |
| 802.11n<br>2.4 GHz | 1       | 2412            | HT0              | 20          | 15.5                       | -                             | -                 | -                            | -     |
|                    | 2       | 2417            |                  |             | 16.5                       | -                             | -                 | -                            | -     |
|                    | 3       | 2422            |                  |             |                            | -                             | -                 | -                            | -     |
|                    | 4       | 2427            |                  |             |                            | -                             | -                 | -                            | -     |
|                    | 5       | 2432            |                  |             |                            | -                             | -                 | -                            | -     |
|                    | 6       | 2437            |                  |             |                            | -                             | -                 | -                            | -     |
|                    | 7       | 2442            |                  |             |                            | -                             | -                 | -                            | -     |
|                    | 8       | 2447            |                  |             |                            | -                             | -                 | -                            | -     |
|                    | 9       | 2452            |                  |             |                            | -                             | -                 | -                            | -     |
|                    | 10      | 2457            |                  |             |                            | -                             | -                 | -                            | -     |
|                    | 11      | 2462            |                  |             |                            | 15.5                          | -                 | -                            | -     |
|                    |         |                 |                  |             |                            |                               |                   |                              |       |
|                    |         | 3               | 2422             | 40 Wide     | 12.0                       | -                             | -                 | -                            | -     |
|                    |         | 4               | 2427             |             | 16.5                       | -                             | -                 | -                            | -     |
|                    |         | 6               | 2437             |             |                            | -                             | -                 | -                            | -     |
|                    |         | 8               | 2447             |             |                            | -                             | -                 | -                            | -     |
|                    |         | 9               | 2452             |             |                            | 12.0                          | -                 | -                            | -     |

NOTE: For 5GHz SAR results refer to report titled "M100860\_FCC\_AR5BHB92\_SAR\_5.6".



### 3.2 DUT (Bluetooth) Details

Table 4

|                              |  |
|------------------------------|--|
| <b>Transmitter:</b>          | Bluetooth  |
| <b>Model Number:</b>         | BSMAN3   |
| <b>Manufacturer:</b>         | CSR  |
| <b>Network Standard:</b>     | Bluetooth™ RF Test Specification   |
| <b>Modulation Type:</b>      | Frequency Hopping Spread Spectrum (FHSS)                                   |
| <b>Frequency Range:</b>      | 2402 MHz to 2480 MHz   |
| <b>Number of Channels:</b>   | 79   |
| <b>Carrier Spacing:</b>      | 1.0 MHz  |
| <b>Antenna Types:</b>        | Monopole Antenna included in module<br>Module location: Left side of hinge |
| <b>Max. Output Power:</b>    | 4 dBm  |
| <b>Reference Oscillator:</b> | 16 MHz (Built-in)  |
| <b>Power Supply:</b>         | 3.3 VDC from host.   |

Table 5 Frequency allocation

| Channel Number | Frequency (MHz) | Bluetooth Utility power setting |
|----------------|-----------------|---------------------------------|
| 1              | 2402            | Power (Ext, Int) = 0, 56        |
| 2              | 2403            |                                 |
| 3              | 2404            |                                 |
| .              | .               |                                 |
| .              | .               |                                 |
| 39             | 2440            |                                 |
| 40             | 2441            |                                 |
| 41             | 2442            |                                 |
| .              | .               |                                 |
| .              | .               |                                 |
| 77             | 2478            |                                 |
| 78             | 2479            |                                 |
| 79             | 2480            |                                 |

### 3.3 DUT (Notebook PC) Details (client supplied info):

Table 6

|                               |  |
|-------------------------------|--|
| <b>Host notebook :</b>        | LifeBook T series                                  |
| <b>Model Name:</b>            | T580 / TH550                                       |
| <b>Serial Number:</b>         | Pre-production Sample                              |
| <b>Manufacturer:</b>          | FUJITSU LIMITED                                    |
| <b>CPU Type and Speed:</b>    | Core i7-620M 1.47GHz                               |
| <b>LCD</b>                    | <b>10.1"HD</b>                                     |
| <b>Wired LAN:</b>             | Realtek RTL8111E: 10 Base-T/100 Base-TX/1000Base-T |
| <b>Modem:</b>                 | No   |
| <b>Port Replicator Model:</b> | <b>No</b>  |
| <b>AC Adapter Model:</b>      | PXW1931N(Tamura), ADP-60ZH A (Delta)               |
| <b>Voltage:</b>               | 19V  |
| <b>Current Specs:</b>         | 3.16A  |
| <b>Watts:</b>                 | 60W  |



There are 2 models T580/TH550.

Both are identical except for the colour and target market and model designation.

The DUT is a notebook convertible tablet PC. When the external power supply is connected, the device is a mobile notebook PC. When the external power supply is disconnected and is in battery operation the device is a portable tablet PC.

### 3.4 Test sample Accessories

#### 3.4.1 Battery Types

One type of Fujitsu Lithium Ion battery is used to power the DUT.

Table 7 Battery Details

|             |                    |                    |
|-------------|--------------------|--------------------|
| Battery S/N | 01A-Z100702001792Z | 01A-Z091026000648Z |
| Model       | FPCB219            | FPCB219            |
| V/mAh       | 10.8V/5800mAh      | 10.8V/5800mAh      |

## 4.0 TEST SIGNAL, FREQUENCY AND OUTPUT POWER

INTEL's CRTU test tool was used to configure the WLAN for testing. The Portable Tablet Computer Wireless LAN had a total of 11 channels (USA model) within the 2412 to 2462 MHz frequency band and 12 channels within the frequency range 5180 to 5825 MHz. In The frequency range 2412 MHz to 2462 MHz the device operates in 2 modes, OFDM and DSSS. Within the 5180 to 5825 MHz frequency range the device operates in OFDM mode only. For the SAR measurements the device was operating in continuous transmit mode using programming codes supplied by Fujitsu.

The Bluetooth module operates over 79 channels within the frequency range 2402 to 2480 MHz. It is possible for the Bluetooth module to operate simultaneously with the WLAN module (co-transmission). However, due to low output power of Bluetooth module (less than 5mW), standalone SAR measurement for Bluetooth module was not conducted (as per "**Supplement to the KDB 616217**"). The Bluetooth interface utilizes dedicated antenna, for the purpose of this report labelled antenna "D".

The test results mentioned in this report only apply to the 2450MHz frequency range. An additional report titled "M100859\_FCC\_622ANHMW\_SAR\_5.6" is specific to the 5GHz range.

The WLAN modules can be configured in a number of different data rates. It was found that the highest source based time averaged power was measured when using the lowest data rates available in each mode. This lowest data rate corresponds to 6Mbps in OFDM mode and 1Mbps in DSSS mode.

The frequency span of the 2450 MHz range Band was more than 10MHz consequently; the SAR levels of the test sample were measured for lowest, centre and highest channels in the applicable modes. The DUT is capable of using two antennas transmitting simultaneously (HT8 DATA mode) the power level is 3dB lower (50%) than if a single antenna was transmitting. There were no wires or other connections to the DUT during the SAR measurements.

At the beginning of the SAR tests, the conducted power of the device was measured after temporary modification of antenna connector inside the device's TX RX compartment. Measurements were performed with a calibrated Power Meter. The Transmitter power was set to be equal or higher than power specified by the manufacturer.

Table 8 Frequency and Conducted Power Results Bluetooth

| Channel    | Channel Frequency MHz | *Data Rate (Mbps) | Maximum Conducted Output Power Measured (dBm) |
|------------|-----------------------|-------------------|---|
| Channel 40 | 2441                  | N/A               | 3.9   |





#### 4.1 Battery Status

The device battery was fully charged prior to commencement of measurement. Each SAR test was completed within 30 minutes. The battery condition was monitored by measuring the RF field at a defined position inside the phantom before the commencement of each test and again after the completion of the test. It was not possible to perform conducted power measurements at the output of the device, at the beginning and end of each scan due to lack of a suitable antenna port. The uncertainty associated with the power drift was less than 12% and was assessed in the uncertainty budget.

### 5.0 DETAILS OF TEST LABORATORY

#### 5.1 Location

EMC Technologies Pty Ltd  
176 Harrick Road  
Keilor Park, (Melbourne) Victoria  
Australia 3042

**Telephone:** +61 3 9365 1000  
**Facsimile:** +61 3 9331 7455  
**email:** [melb@emctech.com.au](mailto:melb@emctech.com.au)  
**website:** [www.emctech.com.au](http://www.emctech.com.au)

#### 5.2 Accreditations

EMC Technologies Pty. Ltd. is accredited by the National Association of Testing Authorities, Australia (NATA).  
**NATA Accredited Laboratory Number: 5292**

EMC Technologies Pty Ltd is NATA accredited for the following standards:

**Table 9**

|                        |   |
|------------------------|---|
| <b>AS/NZS 2772.1:</b>  | RF and microwave radiation hazard measurement   |
| <b>ACMA:</b>           | Radio communications (Electromagnetic Radiation - Human Exposure) Standard 2003 + Amdt (No. 1):2007   |
| <b>FCC:</b>            | Guidelines for Human Exposure to RF Electromagnetic Field OET65C 01/01  |
| <b>EN 50360: 2001</b>  | Product standard to demonstrate the compliance of mobile phones with the basic restrictions related to human exposure to electromagnetic fields (300 MHz – 3 GHz)   |
| <b>EN 62209-1:2006</b> | Human Exposure to radio frequency fields from hand-held and body-mounted wireless communication devices - Human models instrumentation and procedures.<br><b>Part 1:</b> Procedure to determine the specific absorption rate (SAR) for hand-held devices used in close proximity to the ear (300 MHz to 3 GHz)                                      |
| <b>*EN62209-2:2010</b> | Human Exposure to radio frequency fields from hand-held and body-mounted wireless communication devices - Human models instrumentation and procedures<br><b>Part 2:</b> Procedure to determine the specific absorption rate (SAR) for wireless communication devices used in close proximity to the human body (frequency range of 30 MHz to 6 GHz) |
| <b>IEEE 1528: 2003</b> | Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head Due to Wireless Communications Devices: Measurement Techniques.  |

\*NATA accreditation pending

Refer to NATA website [www.nata.asn.au](http://www.nata.asn.au) for the full scope of accreditation.

#### 5.3 Environmental Factors

The measurements were performed in a shielded room with no background RF signals. The temperature in the laboratory was controlled to within  $21\pm 1^\circ\text{C}$ , the humidity was 43%. The liquid parameters are measured daily prior to the commencement of each test. Tests were performed to check that reflections within the environment did not influence the SAR measurements. The noise floor of the DASY4 SAR measurement system using the SN1380 probe was less than  $5\mu\text{V}$  in both air and liquid mediums.





## 6.0 DESCRIPTION OF SAR MEASUREMENT SYSTEM

**Table 10**

|                                |                    |
|--------------------------------|--------------------|
| Applicable Head Configurations | : None             |
| Applicable Body Configurations | : Tablet Position  |
|                                | : Edge On Position |

### 6.1 Probe Positioning System

The measurements were performed with the state-of-the-art automated near-field scanning system **DASY4 V4.7 Build 80** from Schmid & Partner Engineering AG (SPEAG). The DASY4 fully complies with the OET65 C (01-01), IEEE 1528, EN62209-1 and EN62209-2 SAR measurement requirements.

### 6.2 E-Field Probe Type and Performance

The SAR measurements were conducted with SPEAG dosimetric probe ET3DV6 Serial: 1380 (2.45 GHz). Please refer to appendix C for detailed information.

### 6.4 System verification

#### 6.4.1 System verification Results @ 2450MHz

The following tables lists the dielectric properties of the tissue simulating liquid measured prior to SAR system verification. The results of the system verification are listed in columns 4 and 5. The forward power into the reference dipole for SAR system verification was adjusted to 250 mW.

**Table 11 System verification Results (Dipole: SPEAG D2450V2 SN: 724)**

| 1. System Frequency and verification Date | 2. $\epsilon_r$ (measured) | 3. $\sigma$ (mho/m) (measured) | 4. Measured SAR 1g (mW/g) | 5. Measured SAR 10g (mW/g) |
|---|----------------------------|--------------------------------|---------------------------|----------------------------|
| 2450 MHz<br>10 <sup>th</sup> Sept 2010    | 39.6                       | 1.77                           | 13.4                      | 6.27                       |

#### 6.4.2 Deviation from reference system verification values

The reference SAR values are derived using a reference dipole and flat section of the SAM phantom suitable for a centre frequency of 2450MHz. These reference SAR values are obtained from the IEEE Std 1528-2003 and are normalized to 1W.

The SPEAG calibration reference SAR value is the SAR system verification result obtained in a specific dielectric liquid using the validation dipole (D2450V2) during calibration. The measured one-gram SAR should be within 10% of the expected target reference values shown in table below (2450MHz) below.

**Table 12 Deviation from reference system verification values @ 2450MHz**

| Frequency and Date                    | Measured SAR 1g (mW/g) | Measured SAR 1g (Normalized to 1W) | SPEAG Calibration reference SAR Value 1g (mW/g) | Deviation From SPEAG Reference 1g (%) | IEEE Std 1528 reference SAR value 1g (mW/g) | Deviation From IEEE 1g (%) |
|---------------------------------------|------------------------|------------------------------------|---|---------------------------------------|---|----------------------------|
| 2450MHz<br>10 <sup>th</sup> Sept 2010 | 13.4                   | 53.60                              | 52  | 3.08                                  | 52.4  | 2.29                       |

NOTE: All reference system verification values are referenced to 1W input power.



### 6.4.3 Liquid Depth 15cm

During the SAR measurement process the liquid level was maintained to a level of 15cm with a tolerance of 0.5cm.

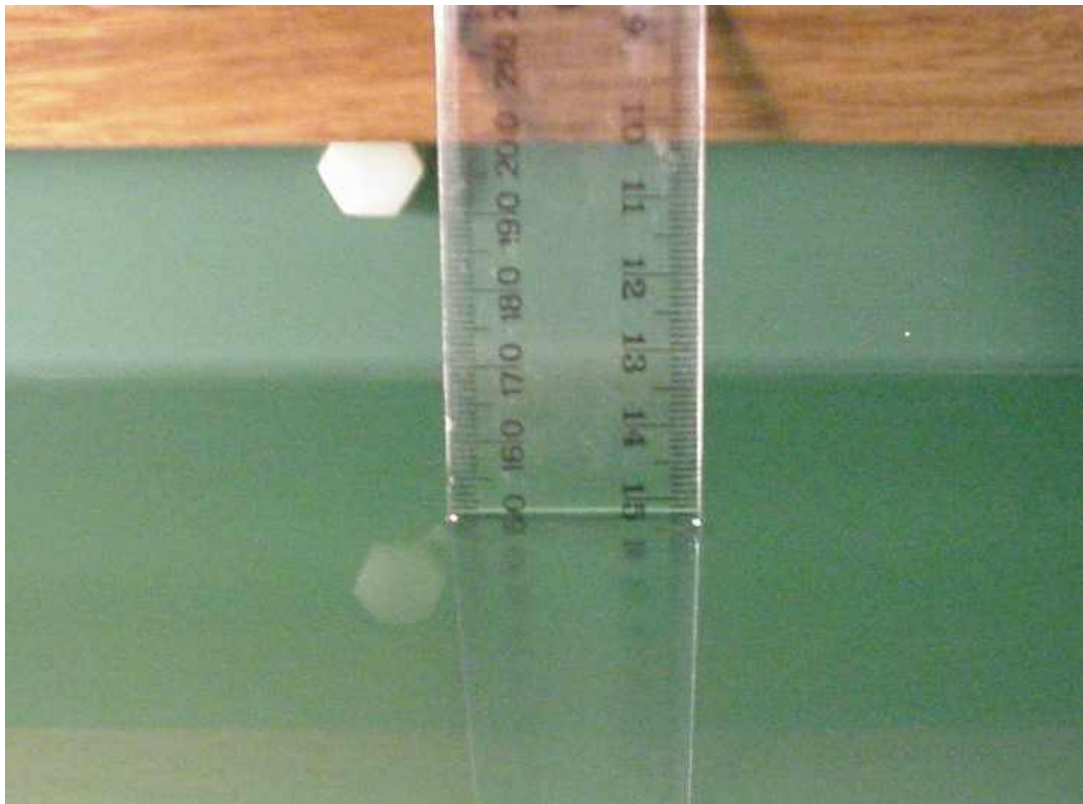


Photo of liquid Depth in Flat Phantom

### 6.5 Phantom Properties

The phantoms used during the testing comply with the OET65 C (01-01), IEEE 1528, EN62209-1 and EN62209-2 SAR measurement requirements.



## 6.6 Tissue Material Properties

The dielectric parameters of the brain simulating liquid were measured prior to SAR assessment using the HP85070A dielectric probe kit and HP8753ES Network Analyser. The actual dielectric parameters are shown in the following table.

**Table 13 Measured Brain Simulating Liquid Dielectric Values for System verifications**

| Frequency Band | $\epsilon_r$ (measured range) | $\epsilon_r$ (target)        | $\sigma$ (mho/m) (measured range) | $\sigma$ (target)            | $\rho$ kg/m <sup>3</sup> |
|----------------|-------------------------------|------------------------------|-----------------------------------|------------------------------|--------------------------|
| 2450 MHz Brain | 39.6                          | 39.2 $\pm$ 5% (37.2 to 41.2) | 1.77                              | 1.80 $\pm$ 5% (1.71 to 1.89) | 1000                     |

NOTE: The brain liquid parameters were within the required tolerances of  $\pm$ 5%.

**Table 14 Measured Body Simulating Liquid Dielectric Values**

| Frequency Band  | $\epsilon_r$ (measured range) | $\epsilon_r$ (target)        | $\sigma$ (mho/m) (measured range) | $\sigma$ (target)            | $\rho$ kg/m <sup>3</sup> |
|-----------------|-------------------------------|------------------------------|-----------------------------------|------------------------------|--------------------------|
| 2412 MHz Muscle | 53.7                          | 52.7 $\pm$ 5% (50.1 to 55.3) | 1.90                              | 1.95 $\pm$ 5% (1.85 to 2.05) | 1000                     |
| 2437 MHz Muscle | 53.5                          | 52.7 $\pm$ 5% (50.1 to 55.3) | 1.94                              | 1.95 $\pm$ 5% (1.85 to 2.05) | 1000                     |
| 2462 MHz Muscle | 53.3                          | 52.7 $\pm$ 5% (50.1 to 55.3) | 1.97                              | 1.95 $\pm$ 5% (1.85 to 2.05) | 1000                     |

NOTE: The brain and muscle liquid parameters were within the required tolerances of  $\pm$ 5%.

### 6.6.1 Liquid Temperature and Humidity

The humidity and dielectric/ambient temperatures were recorded during the assessment of the tissue material dielectric parameters. The difference between the ambient temperature of the liquid during the dielectric measurement and the temperature during tests was less than  $|2|^\circ\text{C}$ .

**Table 15 Temperature and Humidity recorded for each day**

| Date                       | Ambient Temperature ( $^\circ\text{C}$ ) | Liquid Temperature ( $^\circ\text{C}$ ) | Humidity (%) |
|----------------------------|--|---|--------------|
| 10 <sup>th</sup> Sept 2010 | 21.6                                     | 21.3                                    | 43.0         |

## 6.7 Simulated Tissue Composition Used for SAR Test

The tissue simulating liquids are created prior to the SAR evaluation and often require slight modification each day to obtain the correct dielectric parameters.

**Table 16 Tissue Type: Brain @ 2450MHz**

Volume of Liquid: 30 Litres

| Approximate Composition | % By Weight |
|-------------------------|-------------|
| Distilled Water         | 62.7        |
| Salt                    | 0.5         |
| Triton X-100            | 36.8        |

\*Refer "OET Bulletin 65 97/01 P38"

**Table 17 Tissue Type: Muscle @ 2450MHz**

Volume of Liquid: 60 Litres

| Approximate Composition | % By Weight |
|-------------------------|-------------|
| Distilled Water         | 73.2        |
| Salt                    | 0.04        |
| DGBE                    | 26.7        |

## 6.8 Device Holder for Laptops and P 10.1 Phantom

A low loss clamp was used to position the TABLET underneath the phantom surface.

Refer to Appendix A for photographs of device positioning



## 7.0 SAR MEASUREMENT PROCEDURE USING DASY4

The SAR evaluation was performed with the SPEAG DASY4 system. A summary of the procedure follows:

- a) A measurement of the SAR value at a fixed location is used as a reference value for assessing the power drop of the DUT. The SAR at this point is measured at the start of the test, and then again at the end of the test.
- b) The SAR distribution at the exposed flat section of the flat phantom is measured at a distance of 4 mm from the inner surface of the shell. The area covers the entire dimension of the DUT and the horizontal grid spacing is 15 mm x 15 mm. The actual Area Scan has dimensions of 120mm x 75mm surrounding the test device. Based on this data, the area of the maximum absorption is determined by Spline interpolation.
- c) Around this point, a volume of 30 mm x 30 mm x 30 mm is assessed by measuring 7 x 7 x 7 points. On the basis of this data set, the spatial peak SAR value is evaluated with the following procedure:
  - (i) The data at the surface are extrapolated, since the centre of the dipoles is 2.7 mm away from the tip of the probe and the distance between the surface and the lowest measuring point is 4 mm. The extrapolation is based on a least square algorithm. A polynomial of the fourth order is calculated through the points in z-axis. This polynomial is then used to evaluate the points between the surface and the probe tip.
  - (ii) The maximum interpolated value is searched with a straightforward algorithm. Around this maximum the SAR values averaged over the spatial volumes (1 g and 10 g) are computed using the 3D-Spline interpolation algorithm. The 3D-Spline is composed of three one-dimensional splines with the "Not a knot"- condition (in x, y and z-direction). The volume is integrated with the trapezoidal – algorithm. One thousand points (10 x 10 x 10) are interpolated to calculate the averages.
  - (iii) All neighbouring volumes are evaluated until no neighbouring volume with a higher average value is found.
  - (iv) The SAR value at the same location as in Step (a) is again measured to evaluate the actual power drift.



## 8.0 MEASUREMENT UNCERTAINTY

The uncertainty analysis is based on the template listed in the IEEE Std 1528-2003 for both device SAR tests and System verification uncertainty. The measurement uncertainty of a specific device is evaluated independently and the total uncertainty for both evaluations (95% confidence level) must be less than 30%.

**Table 18 Uncertainty Budget for DASY4 V4.7 Build 80 – DUT SAR test 2450MHz**

| Uncertainty Component                              | Tol. (6%) | Prob. Dist. | Div. | C <sub>i</sub> (1g) | C <sub>i</sub> (10g) | 1g u <sub>i</sub> (6%) | 10g u <sub>i</sub> (6%) | v <sub>i</sub> |
|--|-----------|-------------|------|---------------------|----------------------|------------------------|-------------------------|----------------|
| <b>Measurement System</b>                          |           |             |      |                     |                      |                        |                         |                |
| Probe Calibration                                  | 5.5       | N           | 1    | 1                   | 1                    | 5.5                    | 5.5                     | ∞              |
| Axial Isotropy                                     | 4.7       | R           | 1.73 | 0.707               | 0.707                | 1.9                    | 1.9                     | ∞              |
| Hemispherical Isotropy                             | 9.6       | R           | 1.73 | 0.707               | 0.707                | 3.9                    | 3.9                     | ∞              |
| Boundary Effects                                   | 1         | R           | 1.73 | 1                   | 1                    | 0.6                    | 0.6                     | ∞              |
| Linearity  | 4.7       | R           | 1.73 | 1                   | 1                    | 2.7                    | 2.7                     | ∞              |
| System Detection Limits                            | 1         | R           | 1.73 | 1                   | 1                    | 0.6                    | 0.6                     | ∞              |
| Readout Electronics                                | 0.3       | N           | 1    | 1                   | 1                    | 0.3                    | 0.3                     | ∞              |
| Response Time                                      | 0.8       | R           | 1.73 | 1                   | 1                    | 0.5                    | 0.5                     | ∞              |
| Integration Time                                   | 2.6       | R           | 1.73 | 1                   | 1                    | 1.5                    | 1.5                     | ∞              |
| RF Ambient Noise                                   | 3         | R           | 1.73 | 1                   | 1                    | 1.7                    | 1.7                     | ∞              |
| RF Ambient Reflections                             | 3         | R           | 1.73 | 1                   | 1                    | 1.7                    | 1.7                     | ∞              |
| Probe Positioner                                   | 0.4       | R           | 1.73 | 1                   | 1                    | 0.2                    | 0.2                     | ∞              |
| Probe Positioning                                  | 2.9       | R           | 1.73 | 1                   | 1                    | 1.7                    | 1.7                     | ∞              |
| Max. SAR Eval.                                     | 1         | R           | 1.73 | 1                   | 1                    | 0.6                    | 0.6                     | ∞              |
| <b>Test Sample Related</b>                         |           |             |      |                     |                      |                        |                         |                |
| Test Sample Positioning                            | 1.61      | N           | 1    | 1                   | 1                    | 1.6                    | 1.6                     | 11             |
| Device Holder Uncertainty                          | 3.6       | N           | 1    | 1                   | 1                    | 3.6                    | 3.6                     | 7              |
| Output Power Variation – SAR Drift Measurement     | 10.82     | R           | 1.73 | 1                   | 1                    | 6.2                    | 6.2                     | ∞              |
| <b>Phantom and Setup</b>                           |           |             |      |                     |                      |                        |                         |                |
| Phantom Uncertainty                                | 4         | R           | 1.73 | 1                   | 1                    | 2.3                    | 2.3                     | ∞              |
| Liquid Conductivity – Deviation from target values | 5         | R           | 1.73 | 0.64                | 0.43                 | 1.8                    | 1.2                     | ∞              |
| Liquid Conductivity – Measurement uncertainty      | 2.5       | N           | 1.00 | 0.64                | 0.43                 | 1.6                    | 1.1                     | 5              |
| Liquid Permittivity – Deviation from target values | 5         | R           | 1.73 | 0.6                 | 0.49                 | 1.7                    | 1.4                     | ∞              |
| Liquid Permittivity – Measurement uncertainty      | 2.5       | N           | 1.00 | 0.6                 | 0.49                 | 1.5                    | 1.2                     | 5              |
| Combined standard Uncertainty                      |           | RSS         |      |                     |                      | <b>11.7</b>            | <b>11.6</b>             | 154            |
| Expanded Uncertainty (95% CONFIDENCE LEVEL)        |           | k=2         |      |                     |                      | <b>23.5</b>            | <b>23.12</b>            |                |

Estimated total measurement uncertainty for the DASY4 measurement system was  $\pm 11.7\%$ . The extended uncertainty ( $K = 2$ ) was assessed to be  $\pm 23.5\%$  based on 95% confidence level. The uncertainty is not added to the measurement result.



**Table 19 Uncertainty Budget for DASY4 V4.7 Build 80 – System verification 2450MHz**

| Uncertainty Component                              | Tol. (6%) | Prob. Dist. | Div. | C <sub>i</sub> (1g) | C <sub>i</sub> (10g) | 1g u <sub>i</sub> (6%) | 10g u <sub>i</sub> (6%) | v <sub>i</sub> |
|--|-----------|-------------|------|---------------------|----------------------|------------------------|-------------------------|----------------|
| <b>Measurement System</b>                          |           |             |      |                     |                      |                        |                         |                |
| Probe Calibration                                  | 5.5       | N           | 1    | 1                   | 1                    | 5.5                    | 5.5                     | ∞              |
| Axial Isotropy                                     | 4.7       | R           | 1.73 | 1                   | 1                    | 2.7                    | 2.7                     | ∞              |
| Hemispherical Isotropy                             | 9.6       | R           | 1.73 | 0                   | 0                    | 0.0                    | 0.0                     | ∞              |
| Boundary Effects                                   | 1         | R           | 1.73 | 1                   | 1                    | 0.6                    | 0.6                     | ∞              |
| Linearity  | 4.7       | R           | 1.73 | 1                   | 1                    | 2.7                    | 2.7                     | ∞              |
| System Detection Limits                            | 1         | R           | 1.73 | 1                   | 1                    | 0.6                    | 0.6                     | ∞              |
| Readout Electronics                                | 0.3       | N           | 1    | 1                   | 1                    | 0.3                    | 0.3                     | ∞              |
| Response Time                                      | 0         | R           | 1.73 | 1                   | 1                    | 0.0                    | 0.0                     | ∞              |
| Integration Time                                   | 0         | R           | 1.73 | 1                   | 1                    | 0.0                    | 0.0                     | ∞              |
| RF Ambient Noise                                   | 3         | R           | 1.73 | 1                   | 1                    | 1.7                    | 1.7                     | ∞              |
| RF Ambient Reflections                             | 3         | R           | 1.73 | 1                   | 1                    | 1.7                    | 1.7                     | ∞              |
| Probe Positioner                                   | 0.4       | R           | 1.73 | 1                   | 1                    | 0.2                    | 0.2                     | ∞              |
| Probe Positioning                                  | 2.9       | R           | 1.73 | 1                   | 1                    | 1.7                    | 1.7                     | ∞              |
| Max. SAR Eval.                                     | 1         | R           | 1.73 | 1                   | 1                    | 0.6                    | 0.6                     | ∞              |
| <b>Dipole</b>                                      |           |             |      |                     |                      |                        |                         |                |
| Dipole Axis to Liquid Distance                     | 2         | N           | 1.73 | 1                   | 1                    | 1.2                    | 1.2                     | 11             |
| Input Power and SAR drift meas.                    | 4.7       | R           | 1.73 | 1                   | 1                    | 2.7                    | 2.7                     | ∞              |
| <b>Phantom and Tissue Param.</b>                   |           |             |      |                     |                      |                        |                         |                |
| Phantom Uncertainty                                | 4         | R           | 1.73 | 1                   | 1                    | 2.3                    | 2.3                     | ∞              |
| Liquid Conductivity – Deviation from target values | 5         | R           | 1.73 | 0.64                | 0.43                 | 1.8                    | 1.2                     | ∞              |
| Liquid Conductivity – Measurement uncertainty      | 2.5       | N           | 1.00 | 0.64                | 0.43                 | 1.6                    | 1.1                     | 5              |
| Liquid Permittivity – Deviation from target values | 5         | R           | 1.73 | 0.6                 | 0.49                 | 1.7                    | 1.4                     | ∞              |
| Liquid Permittivity – Measurement uncertainty      | 2.5       | N           | 1.00 | 0.6                 | 0.49                 | 1.5                    | 1.2                     | 5              |
| Combined standard Uncertainty                      |           | RSS         |      |                     |                      | <b>9.0</b>             | <b>8.7</b>              | 154            |
| Expanded Uncertainty (95% CONFIDENCE LEVEL)        |           | k=2         |      |                     |                      | 17.9                   | 17.34                   |                |

Estimated total measurement uncertainty for the DASY4 measurement system was  $\pm 9.0\%$ . The extended uncertainty ( $K = 2$ ) was assessed to be  $\pm 17.9\%$  based on 95% confidence level. The uncertainty is not added to the System verification measurement result.



## 9.0 EQUIPMENT LIST AND CALIBRATION DETAILS

**Table 20 SPEAG DASY4 Version V4.7 Build 80**

| Equipment Type                | Manufacturer    | Model Number | Serial Number | Calibration Due | Used For this Test? |
|-------------------------------|-----------------|--------------|---------------|-----------------|---------------------|
| Robot - Six Axes              | Staubli         | RX90BL       | N/A           | Not applicable  | ✓                   |
| Robot Remote Control          | SPEAG           | CS7MB        | RX90B         | Not applicable  | ✓                   |
| SAM Phantom                   | SPEAG           | N/A          | 1260          | Not applicable  | ✓                   |
| SAM Phantom                   | SPEAG           | N/A          | 1060          | Not applicable  |                     |
| Flat Phantom                  | AndreT          | 10.1         | P 10.1        | Not Applicable  | ✓                   |
| Flat Phantom                  | AndreT          | 9.1          | P 9.1         | Not Applicable  |                     |
| Flat Phantom                  | SPEAG           | PO1A 6mm     | 1003          | Not Applicable  |                     |
| Data Acquisition Electronics  | SPEAG           | DAE3 V1      | 359           | 07-July-2011    |                     |
| Data Acquisition Electronics  | SPEAG           | DAE3 V1      | 442           | 08-Dec-2010     | ✓                   |
| Probe E-Field - Dummy         | SPEAG           | DP1          | N/A           | Not applicable  |                     |
| Probe E-Field                 | SPEAG           | ET3DV6       | 1380          | 11-Dec-2010     | ✓                   |
| Probe E-Field                 | SPEAG           | ET3DV6       | 1377          | 7-July-2011     |                     |
| Probe E-Field                 | SPEAG           | ES3DV6       | 3029          | Not Used        |                     |
| Probe E-Field                 | SPEAG           | EX3DV4       | 3563          | 16-July-2011    |                     |
| Probe E-Field                 | SPEAG           | EX3DV4       | 3657          | 15-July-2011    |                     |
| Antenna Dipole 300 MHz        | SPEAG           | D300V2       | 1005          | 15-Dec-2011     |                     |
| Antenna Dipole 450 MHz        | SPEAG           | D450V2       | 1009          | 17-Dec-2010     |                     |
| Antenna Dipole 900 MHz        | SPEAG           | D900V2       | 047           | 5-July-2012     |                     |
| Antenna Dipole 1640 MHz       | SPEAG           | D1640V2      | 314           | 9-July-2012     |                     |
| Antenna Dipole 1800 MHz       | SPEAG           | D1800V2      | 242           | 13-July-2012    |                     |
| Antenna Dipole 1950 MHz       | SPEAG           | D1950V3      | 1113          | 12-Dec -2010    |                     |
| Antenna Dipole 3500 MHz       | SPEAG           | D3500V2      | 1002          | 17-July-2010    |                     |
| Antenna Dipole 2450 MHz       | SPEAG           | D2450V2      | 724           | 10-Dec-2010     | ✓                   |
| Antenna Dipole 5600 MHz       | SPEAG           | D5GHzV2      | 1008          | 16-Dec-2011     |                     |
| RF Amplifier                  | EIN             | 603L         | N/A           | *In test        |                     |
| RF Amplifier                  | Mini-Circuits   | ZHL-42       | N/A           | *In test        | ✓                   |
| RF Amplifier                  | Mini-Circuits   | ZVE-8G       | N/A           | *In test        |                     |
| Synthesized signal generator  | Hewlett Packard | ESG-D3000A   | GB37420238    | *In test        |                     |
| RF Power Meter                | Hewlett Packard | 437B         | 3125012786    | 9-Aug-2011      |                     |
| RF Power Sensor 0.01 - 18 GHz | Hewlett Packard | 8481H        | 1545A01634    | 13-Aug-2011     |                     |
| RF Power Meter                | Rohde & Schwarz | NRP          | 101415        | 5-May-2011      | ✓                   |
| RF Power Sensor               | Rohde & Schwarz | NRP - Z81    | 100174        | 16-July-2011    | ✓                   |
| RF Power Meter Dual           | Hewlett Packard | 435A         | 1733A05847    | *In test        | ✓                   |
| RF Power Sensor               | Hewlett Packard | 8482A        | 2349A10114    | *In test        | ✓                   |
| Network Analyser              | Hewlett Packard | 8714B        | GB3510035     | 30-Sept-2010    |                     |
| Network Analyser              | Hewlett Packard | 8753ES       | JP39240130    | 24-Nov-2010     | ✓                   |
| Dual Directional Coupler      | Hewlett Packard | 778D         | 1144 04700    | *In test        |                     |
| Dual Directional Coupler      | NARDA           | 3022         | 75453         | *In test        | ✓                   |

\* Calibrated during the test for the relevant parameters.





## 10.0 OET BULLETIN 65 – SUPPLEMENT C TEST METHOD

Notebooks should be evaluated in normal use positions, typical for lap-held bottom-face only. However the number of positions will depend on the number of configurations the laptop can be operated in. The “LIFEBOOK T SERIES” can be used in either a conventional laptop position (see Appendix A1) or a Tablet configuration. The antenna location in the “LifeBook T series” is closest to the top of the screen when used in a conventional laptop configuration.

### 10.1 Positions

#### 10.1.1 “Tablet” Position Definition (0mm spacing)

The DUT was tested in the 2.00 mm flat section of the AndreT Flat phantom P 10.1 for the “Tablet” position. The Transceiver was placed at the bottom of the phantom and suspended in such way that the back of the device was touching the phantom. This device orientation simulates the PC’s normal use – being held on the lap of the user. A spacing of 0mm ensures that the SAR results are conservative and represent a worst-case position.

#### 10.1.2 “Edge On” Position (Portrait or Landscape)

The device was tested in the (2.00 mm) flat section of the AndreT phantom for the “Edge On” position. The Antenna edge of the Transceiver was placed underneath the flat section of the phantom and suspended until the edge touched the phantom. *Refer to Appendix A for photos of measurement positions.*

#### 10.1.3 “Lap Held” Position (0mm spacing)

The DUT was tested in the 2.00 mm flat section of the AndreT Flat phantom P 10.1 for the “Lap Held” position. The DUT was placed at the bottom of the phantom and suspended in such way that the back of the device was touching the phantom. The LCD screen was angled at 90 degrees to the base of the Tablet. This device orientation simulates the PC’s normal use – being held on the lap of the user. A spacing of 0mm ensures that the SAR results are conservative and represent a worst-case position.


### 10.2 List of All Test Cases (Antenna In/Out, Test Frequencies, User Modes)

The device has a fixed antenna. Depending on the measured SAR level up to three test channels with the test sample operating at maximum power were recorded. The following table represents the matrix used to determine what testing was required. All relevant provisions of KDB 447498 are applied for SAR measurements of the host system. Due to the screen size <12 inches, KDB 616217 was not used in the SAR evaluation instead “Supplement to the KDB 616217” was followed.


**Table 21 Testing configurations**

| Phantom Configuration | *Device Mode | Antenna | Test Configurations |                  |                |
|-----------------------|--------------|---------|---------------------|------------------|----------------|
|                       |              |         | Channel (Low)       | Channel (Middle) | Channel (High) |
| Lap Held              | DSSS 2.4GHz  | A       |                     | X                |                |
|                       |              | B       |                     | X                |                |
| Tablet                | DSSS 2.4GHz  | A       |                     | X                |                |
|                       |              | B       |                     | X                |                |
| Edge On               | DSSS 2.4GHz  | A       |                     | X                |                |
|                       |              | B       |                     | X                |                |

**Legend**



Testing Required in this configuration



Testing required in this configuration only if SAR of middle channel is more than 3dB below the SAR limit or it is the worst case.

*NOTE: Throughout this report, Antenna A and B refer to Tx1 and Tx2 in the host respectively.*



## 11.0 SAR MEASUREMENT RESULTS

The SAR values averaged over 1g tissue masses were determined for the sample device for all test configurations listed in section 10.2.

### 11.1 2450MHz SAR Results

There are two modes of operation within the 2450MHz band, they include OFDM and DSSS modulations. Refer to section 10.2 for selection of all device test configurations. Table below displays the SAR results.

**Table 22 SAR MEASUREMENT RESULTS – DSSS Mode**

| Test Position       | Plot No. | Ant | Bit rate Mode (Mbps) | Channel Bandwidth (MHz) | Test Channel | Test Freq (MHz) | Measured 1g SAR Results (mW/g) | Measured Drift (dB) |
|---------------------|----------|-----|----------------------|-------------------------|--------------|-----------------|--------------------------------|---------------------|
| Tablet              | 1        | A   | 1                    | -                       | 06           | 2437            | 0.092                          | -0.011              |
|                     | 2        | B   | 1                    | -                       | 06           | 2437            | 0.137                          | -0.252              |
| Lap Held            | -        | A   | 1                    | -                       | 06           | 2437            | Noise Floor                    | N/A                 |
|                     | -        | B   | 1                    | -                       | 06           | 2437            | Noise Floor                    | N/A                 |
| Secondary Portrait  | 3        | A   | 1                    | -                       | 06           | 2437            | 0.031                          | -0.149              |
| Primary Portrait    | 4        | B   | 1                    | -                       | 01           | 2412            | <b>0.852</b>                   | 0.446               |
|                     | 5        | B   | 1                    | -                       | 06           | 2437            | 0.734                          | -0.200              |
|                     | 6        | B   | 1                    | -                       | 11           | 2462            | 0.725                          | -0.246              |
| Secondary Landscape | 7        | A   | 1                    | -                       | 06           | 2437            | 0.278                          | -0.009              |
|                     | 8        | B   | 1                    | -                       | 06           | 2437            | 0.227                          | 0.313               |

NOTE: The measurement uncertainty of 23.5% for 2.45GHz was not added to the result.

The highest SAR level recorded in the 2450MHz band was 0.852 mW/g as evaluated in a 1g cube of averaging mass. This value was obtained in Primary Portrait position in DSSS mode, utilizing channel 01 (2412 MHz) and antenna B.



## 12.0 COMPLIANCE STATEMENT

The Fujitsu TABLET PC, Model: T580 / TH550 with INTEL Mini-Card Wireless LAN Module (INTEL CENTRINO ADVANCED-N 6200(PUMA PEAK) 802.11a/b/g/n), Model: 622ANHMW & CSR Bluetooth Module, Model: BSMAN3 was found to comply with the FCC and RSS-102 SAR requirements.

The highest SAR level recorded was 0.852 mW/g for a 1g cube. This value was measured at 2412 MHz (channel 01) in the "Primary Portrait" position in DSSS modulation mode at the antenna B. This was below the limit of 1.6 mW/g for uncontrolled exposure, even taking into account the measurement uncertainty of 23.5 %.

This document is issued in accordance with NATA's accreditation requirements. The results of tests, calibration and/or measurements included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing and calibration reports.



This document must not be copied or reproduced, except in full without the written permission of the Manager, EMC Technologies Pty Ltd. The certificate on page 3 may be reproduced in full.  
[www.emctech.com.au](http://www.emctech.com.au)

### 13.0 MULTIBAND EVALUATION CONSIDERATIONS



Fujitsu TABLET PC, Model: T580/TH550 is equipped with WLAN (622ANMHW) and Bluetooth (BSMAN3).

According to the FCC SAR evaluation procedures mentioned in “**Supplement to the KDB 616217**” (for Tablet PC with the LCD size < 12), stand-alone SAR evaluation is NOT required when the maximum transmitter and antenna output power is less than or equal to  $60/f_{(GHz)} (P_{ref})$ . The Bluetooth module in the DUT operates in the 2.4GHz range. It has a maximum output power of 2.5mW (4dBm) which is less than  $P_{ref} (=60/2.4=25mW)$ .

The shortest distance between the BT module and any other transmitting antenna was 21.5cm.

Because  $21.5cm > 5cm$ , and  $2.5mW < 25mW$ , the Bluetooth module was not considered for SAR evaluation. This is in accordance with the test reduction methods detailed in “**Supplement to the KDB 616217**” and KDB 447498.

Diagram Showing distance between Antenna Locations

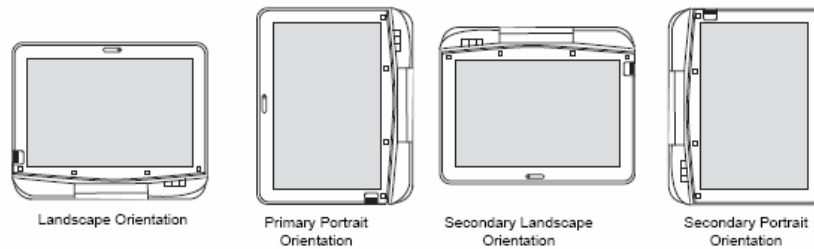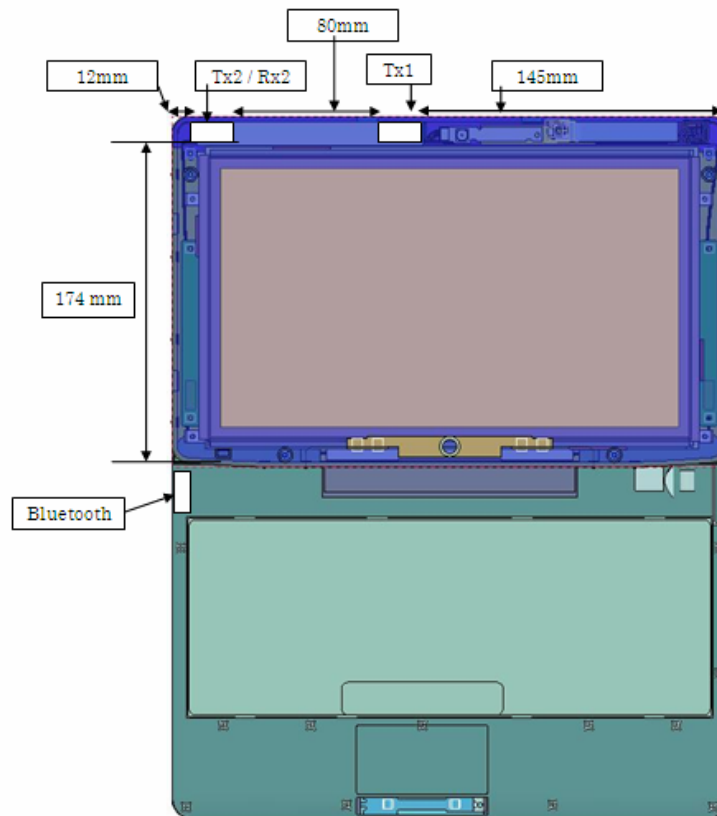

NOTE: Throughout this report, Antenna A and B refer to Tx1 and Tx2 in the host.