



**EMC Technologies Pty Ltd**

ABN 82 057 105 549  
176 Harrick Road  
Keilor Park  
Victoria Australia 3042

Ph: + 613 9365 1000  
Fax: + 613 9331 7455  
email: melb@emctech.com.au

## SAR Test Report

Report Number: M101142\_FCC\_62205ANHWMW\_SAR\_2.4

Test Sample: Portable TABLET Computer  
Radio Modules: WLAN INTEL CENTRINO  
ADVANCED-N 6205(TAYLOR  
PEAK) (11A/B/G/N) 62205ANHWMW  
Host PC Model Number: T901  
  
PC System FCC ID: EJE-WL0024  
PC System IC: 337J-WL0024  
Date of Issue: 17<sup>th</sup> February 2011

EMC Technologies Pty Ltd reports apply only to the specific samples tested under stated test conditions. It is the manufacturer's responsibility to assure that additional production units of this model are manufactured with identical electrical and mechanical components. EMC Technologies Pty Ltd shall have no liability for any deductions, inferences or generalisations drawn by the client or others from EMC Technologies Pty Ltd issued reports. This report shall not be used to claim, constitute or imply product endorsement by EMC Technologies Pty Ltd.



This document must not be copied or reproduced, except in full without the written permission of the Manager, EMC Technologies Pty Ltd. The certificate on page 3 may be reproduced in full.  
[www.emctech.com.au](http://www.emctech.com.au)

## CONTENTS

<b>1.0 GENERAL INFORMATION.....</b>	<b>4</b>
<b>2.0 INTRODUCTION .....</b>	<b>5</b>
<b>3.0 TEST SAMPLE TECHNICAL INFORMATION.....</b>	<b>5</b>
3.1 EUT (WLAN) Details .....	5
3.2 EUT (Bluetooth) Details.....	8
3.3 EUT (Notebook PC) Details .....	9
3.4 Test sample Accessories .....	9
3.4.1 Battery Types .....	9
<b>4.0 TEST SIGNAL, FREQUENCY AND OUTPUT POWER.....</b>	<b>10</b>
4.1 Battery Status.....	10
<b>5.0 DETAILS OF TEST LABORATORY .....</b>	<b>11</b>
5.1 Location .....	11
5.2 Accreditations.....	11
5.3 Environmental Factors .....	11
<b>6.0 DESCRIPTION OF SAR MEASUREMENT SYSTEM .....</b>	<b>12</b>
6.1 Probe Positioning System .....	12
6.2 E-Field Probe Type and Performance .....	12
6.3 System Verification .....	12
6.3.1 System Verification Results @ 2450MHz .....	12
6.3.2 Deviation from reference system verification values .....	12
6.3.3 Liquid Depth 15cm.....	13
6.4 Phantom Properties .....	13
6.5 Tissue Material Properties.....	14
6.5.1 Liquid Temperature and Humidity.....	14
6.6 Simulated Tissue Composition Used for SAR Test .....	14
6.7 Device Holder for Laptops and P 10.1 Phantom .....	14
<b>7.0 SAR MEASUREMENT PROCEDURE USING DASY4 .....</b>	<b>15</b>
<b>8.0 MEASUREMENT UNCERTAINTY.....</b>	<b>16</b>
<b>9.0 EQUIPMENT LIST AND CALIBRATION DETAILS.....</b>	<b>18</b>
<b>10.0 TEST METHODOLOGY .....</b>	<b>19</b>
10.1 Positions .....	19
10.1.1 "Tablet" Position Definition (0mm spacing) .....	19
10.1.2 "Edge On" Position (Portrait or Landscape).....	19
10.1.3 "Bystander" Position .....	19
10.2 List of All Test Cases (Antenna In/Out, Test Frequencies, User Modes) .....	20
<b>11.0 SAR MEASUREMENT RESULTS .....</b>	<b>21</b>
11.1 2450MHz SAR Results.....	21
<b>12.0 COMPLIANCE STATEMENT .....</b>	<b>22</b>
<b>13.0 MULTIBAND EVALUATION CONSIDERATIONS.....</b>	<b>23</b>
<b>APPENDIX A1 TEST SAMPLE PHOTOGRAPHS .....</b>	<b>24</b>
<b>APPENDIX A2 TEST SAMPLE PHOTOGRAPHS .....</b>	<b>25</b>
<b>APPENDIX A3 TEST SAMPLE PHOTOGRAPHS .....</b>	<b>26</b>
<b>APPENDIX A4 TEST SETUP PHOTOGRAPHS .....</b>	<b>27</b>
<b>APPENDIX A5 TEST SAMPLE PHOTOGRAPHS .....</b>	<b>28</b>
<b>APPENDIX A6 TEST SAMPLE PHOTOGRAPHS .....</b>	<b>29</b>
<b>APPENDIX A7 TEST SAMPLE PHOTOGRAPHS .....</b>	<b>30</b>
<b>APPENDIX A8 TEST SAMPLE PHOTOGRAPHS .....</b>	<b>31</b>
<b>APPENDIX B PLOTS OF THE SAR MEASUREMENTS .....</b>	<b>32</b>
<b>APPENDIX C CALIBRATION DOCUMENTS .....</b>	<b>58</b>





---

This document must not be copied or reproduced, except in full without the written permission of the Manager, EMC Technologies Pty Ltd. The certificate on page 3 may be reproduced in full.  
[www.emctech.com.au](http://www.emctech.com.au)

**SAR TEST REPORT****Report Number: M101142\_FCC\_62205ANHWMW\_SAR\_2.4****PC System FCC ID:** EJE-WL0024**PC System IC:** 337J-WL0024**1.0 GENERAL INFORMATION****Table 1**

<b>Test Sample:</b>	Portable TABLET Computer
<b>Model Name:</b>	T901
<b>Radio Modules:</b>	WLAN 62205ANHWMW
<b>Interface Type:</b>	Half Mini-Card Module
<b>Device Category:</b>	Portable Transmitter
<b>Test Device:</b>	Pre-Production Unit
<b>PC System FCC ID:</b>	<u>EJE-WL0024</u>
<b>PC System IC:</b>	<u>337J-WL0024</u>
<b>RF exposure Category:</b>	General Population/Uncontrolled
<b>Manufacturer:</b>	Fujitsu Limited
<b>Test Standard/s:</b>	<ol style="list-style-type: none"><li>1. Evaluating Compliance with FCC Guidelines For Human Exposure to Radiofrequency Electromagnetic Fields Supplement C (Edition 01-01) to OET Bulletin 65 (Edition 97-01)</li><li>2. Radio Frequency Exposure Compliance of Radiocommunication Apparatus (All Frequency Bands), RSS-102</li></ol>
<b>Statement Of Compliance:</b>	The Fujitsu TABLET Computer T901 with Wireless LAN model 62205ANHWMW complied with the FCC General public/uncontrolled RF exposure limits of 1.6mW/g per requirements of 47CFR2.1093(d). It also complied with IC RSS-102 requirements.
<b>Test Date:</b>	24 <sup>th</sup> January 2011

**Test Officer:**

---

**Jason Cameron****Authorised Signature:**

---

**Chris Zombolas**  
**Technical Director**

This document is issued in accordance with NATA's accreditation requirements. The results of tests, calibration and/or measurements included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing and calibration reports.



This document must not be copied or reproduced, except in full without the written permission of the Manager, EMC Technologies Pty Ltd. The certificate on page 3 may be reproduced in full.  
[www.emctech.com.au](http://www.emctech.com.au)

**SAR TEST REPORT**  
**Portable TABLET Computer**  
**Model: T901**  
**Report Number: M101142\_FCC\_62205ANHWMW\_SAR\_2.4**

## 2.0 INTRODUCTION

Testing was performed on the Fujitsu TABLET PC, Model: T901 with INTEL Half Mini-PCI Wireless LAN Module (INTEL CENTRINO ADVANCED-N 6205(TAYLOR PEAK) (11a/b/g/n)), Model: 62205ANHWMW. The INTEL CENTRINO ADVANCED-N 6205(TAYLOR PEAK) (11a/b/g/n) module is an OEM product. The Half Mini-PCI Wireless LAN (WLAN) was tested in the dedicated host – LIFEBOOK T SERIES, Model T901. The system tested will be referred to as the equipment under test (EUT) throughout this report.

There are two variants of the Fujitsu Tablet PC, Model: T901 covered in this report. One that is equipped with the modular certified low power Bluetooth transmitter with built-in antenna, and one variant that does not contain Bluetooth transmitter or Bluetooth antenna FCC ID: EJE-WL0024 IC: 337J-WL0024.

SAR testing was conducted on the sample that is equipped with the Bluetooth transmitter and Bluetooth antenna.

The measurement test results herein only apply to the 2450MHz frequency band; an additional report titled "M101142\_FCC\_62205ANHWMW\_SAR\_5.6" applies to the 5GHz range.

## 3.0 TEST SAMPLE TECHNICAL INFORMATION

(Information supplied by the client)

### 3.1 EUT (WLAN) Details

**Table 2**

<b>Transmitter:</b>	Half Mini-Card Wireless LAN Module
<b>Wireless Module:</b>	Intel Centrino Advanced-N 6205(Taylor Peak) (11a/b/g/n)
<b>Model Number:</b>	62205ANHWMW
<b>Manufacturer:</b>	Intel Corporation
<b>Modulation Type:</b>	DSSS for 802.11b OFDM for 802.11g OFDM for 802.11a OFDM for 802.11n
<b>5GHz (802.11a/n)</b>	BPSK, QPSK, 16QAM, 64QAM
<b>2.4GHz (802.11b/g/n)</b>	CCK, DQPSK, DBPSK, 16QAM, 64QAM
<b>Maximum Data Rate:</b>	802.11b = 11 Mbps, 802.11g and 802.11a = 54 Mbps 802.11n = 450 Mbps
<b>Frequency Range:</b>	2.412–2.462 GHz for 11b/g/n 5.18-5.32 GHz and 5.745-5.825 GHz for 11a/n
<b>Number of Channels:</b>	11 channels for 11b/g/n 24 channels for 11a/n with 20MHz Bandwidth 18 channels for 11n with 40MHz Bandwidth
<b>Antenna Types:</b>	Nissei Inverted F (1 <sup>st</sup> , 2 <sup>nd</sup> ), Yokowo Monopole (3 <sup>rd</sup> ) Model: refer to WLAN antenna data Location: Left Top edge of LCD screen(1 <sup>st</sup> ), Right Top edge of LCD screen(2 <sup>nd</sup> )
<b>Power Supply:</b>	3.3 VDC from PCI bus



**Table 3: Channels and Output power setting**

Mode	Channel	Frequency (MHz)	Data Rate (Mbps)	Tx BW (MHz)	Average Power Target (dBm)		
					Tx A		Tx B
802.11a	36	5180	6	-	15		15
	40	5200					
	44	5220					
	48	5240					
	52	5260					
	56	5280					
	60	5300					
	64	5320					
	100	5500					
	104	5520					
	108	5540					
	112	5560					
	116	5580					
	120	5600					
	124	5620					
	128	5640					
	132	5660					
	136	5680					
	140	5700					
	149	5745					
153	5765						
157	5785						
161	5805						
165	5825						
802.11b	1	2412	1	-	15.5		15.5
	6	2437					
	11	2462					
	13	2472					
802.11g	1	2412	6	-	14		14
	2	2417			16		16.5
	6	2437					
	10	2457			14		14
	11	2462					
	13	2472			15		15

Mode	Channel	Frequency (MHz)	Data Rate (Mbps)	Tx BW (MHz)	Average Power Target (dBm)		
					Tx A		Tx B
802.11n	1	2412	HT0	20	13		13
	2	2417			16		16.5
	6	2437					
	10	2457			12.5		13
	11	2462					
	13	2472			14.5		14.5
	36	5180			15.5		15.5
	40	5200			15		15
	44	5220					
	48	5240					
	52	5260					
	56	5280					
	60	5300					
	64	5320					
	100	5500					
	104	5520					
	108	5540					
	112	5560					
	116	5580					
	120	5600			14.5		
	124	5620			15		
	128	5640					
	132	5660			14.5		
	136	5680					
	140	5700			15		
	149	5745					
	153	5765			15		
	157	5785					
	161	5805			15		
	165	5825					
	3F	2422		40 Wide	9		9.5
	4F	2427			10.5		11
	5F	2432			12.5		13
	6F	2437			16		16
	7F	2442			12.5		13
	8F	2447			10.5		11.5
	9F	2452			9.5		10
	38	5190			10		10
	46	5230			15		15
	54	5270					
	62	5310			10		10
	102	5510			12.5		12.5
	110	5550			15		15
	118	5590					
	126	5630					
	134	5670					
	151	5755					
	159	5795					

NOTE: For 5GHz SAR results refer to report titled "M101142\_FCC\_62205ANHMMW\_SAR\_5.6".



### 3.2 EUT (Bluetooth) Details

Table 4

<b>Transmitter:</b>	Bluetooth
<b>Model Number:</b>	BCM92070MD_REF6
<b>Manufacturer:</b>	Broadcom
<b>Network Standard:</b>	Bluetooth™ RF Test Specification
<b>Modulation Type:</b>	Frequency Hopping Spread Spectrum (FHSS)
<b>Frequency Range:</b>	2402 MHz to 2480 MHz
<b>Number of Channels:</b>	79
<b>Carrier Spacing:</b>	1.0 MHz
<b>Antenna Types:</b>	Monopole Antenna included in module Module location: Left upper corner of base unit
<b>Max. Output Power:</b>	4 dBm
<b>Reference Oscillator:</b>	16 MHz (Built-in)
<b>Power Supply:</b>	3.3 VDC from host.





### 3.3 EUT (Notebook PC) Details

Table 5

<b>Host notebook :</b>	LifeBook T series
<b>Model Name:</b>	T901
<b>Serial Number:</b>	Pre-production Sample
<b>Manufacturer:</b>	FUJITSU LIMITED
<b>CPU Type and Speed:</b>	Core i7-2620M 2.7GHz
<b>LCD</b>	13.3"WXGA(1280x800 : HV133WX1
<b>Graphics chip</b>	Non
<b>Wired LAN:</b>	Intel 82579LM : 10 Base-T/100 Base-TX/1000Base-T
<b>Modem:</b>	Agere MDC1.5 modem Model: D40
<b>Port Replicator Model:</b>	FPCPR105
<b>AC Adapter Model:</b>	80W: ADP-80NB A(Delta), SEE100P2-19.0(Sanken), PJW1942N(Tamura), PJW1942NA(Tamura)
<b>Voltage:</b>	19 V
<b>Current Specs:</b>	4.22A
<b>Watts:</b>	80W
<b>Radio Modules:</b>	WLAN (Taylor Peak IEEE802.11a/b/g/n, 2x2)
<b>WLAN Model Number:</b>	62205ANHMMW
<b>WLAN Manufacturer:</b>	Intel Corp.
<b>Interface Type:</b>	Half Mini-Card Wireless LAN Module
<b>Radio Modules:</b>	Bluetooth module
<b>Model Number:</b>	BCM92070MD_REF6
<b>Manufacturer:</b>	Broadcom
<b>Interface Type:</b>	USB

### 3.4 Test sample Accessories

#### 3.4.1 Battery Types

One type of Fujitsu Lithium Ion battery is used to power the EUT.

Table 6 Battery Details

Model	CP422590-02
V/mAh	10.8V/5800mAh



## 4.0 TEST SIGNAL, FREQUENCY AND OUTPUT POWER

INTEL's DRTU test tool was used to configure the WLAN for testing. The EUT Wireless LAN had a total of 11 channels (USA model) within the 2412 to 2462 MHz frequency band and 24 channels within the frequency range 5180 to 5825 MHz. In The frequency range 2412 MHz to 2462 MHz the EUT operates in 2 modes, OFDM and DSSS. Within the 5180 to 5825 MHz frequency range the device operates in OFDM mode only. For the SAR measurements the device was operating in continuous transmit mode using programming codes supplied by Fujitsu. The fixed frequency channels used in the testing are shown in Table Below.

The Bluetooth module operates over 79 channels within the frequency range 2402 to 2480 MHz. It is possible for the Bluetooth module to operate simultaneously with the WLAN module (co-transmission). However, due to low output power of Bluetooth module (less than 5mW), standalone SAR measurement for Bluetooth module was not conducted (as per **KDB 616217**). The Bluetooth interface utilizes dedicated antenna, for the purpose of this report labelled antenna "D".

The test results mentioned in this report only apply to the 2450MHz frequency range. An additional report titled 'M101142\_FCC\_62205ANHMMW\_SAR\_5.6' is specific to the 5GHz range.

The WLAN modules can be configured in a number of different data rates. It was found that the highest source based time averaged power was measured when using the lowest data rates available in each mode. This lowest data rate corresponds to 6Mbps in OFDM mode and 1Mbps in DSSS mode.

The frequency span of the 2450 MHz range Band was more than 10MHz consequently; the SAR levels of the test sample were measured for lowest, centre and highest channels in the applicable modes. The EUT is capable of using two antennas transmitting simultaneously (HT8 DATA mode) the power level is lower than if a single antenna was transmitting. There were no wires or other connections to the EUT during the SAR measurements.

At the beginning of the SAR tests, the conducted power of the device was measured after temporary modification of antenna connector inside the device's TX RX compartment. Measurements were performed with a calibrated Power Meter. The Transmitter power was set to be equal or higher than power specified by the manufacturer.

### 4.1 Battery Status

The device battery was fully charged prior to commencement of measurement. Each SAR test was completed within 30 minutes. The battery condition was monitored by measuring the RF field at a defined position inside the phantom before the commencement of each test and again after the completion of the test. It was not possible to perform conducted power measurements at the output of the device, at the beginning and end of each scan due to lack of a suitable antenna port. The uncertainty associated with the power drift was less than 12% and was assessed in the uncertainty budget.



## 5.0 DETAILS OF TEST LABORATORY

### 5.1 Location

EMC Technologies Pty Ltd  
176 Harrick Road  
Keilor Park, (Melbourne) Victoria  
Australia 3042

**Telephone:** +61 3 9365 1000  
**Facsimile:** +61 3 9331 7455  
**email:** [melb@emctech.com.au](mailto:melb@emctech.com.au)  
**website:** [www.emctech.com.au](http://www.emctech.com.au)

### 5.2 Accreditations

EMC Technologies Pty. Ltd. is accredited by the National Association of Testing Authorities, Australia (NATA).  
**NATA Accredited Laboratory Number: 5292**

EMC Technologies Pty Ltd is NATA accredited for the following standards:

**Table 7**

<b>AS/NZS 2772.1:</b>	RF and microwave radiation hazard measurement
<b>ACMA:</b>	Radio communications (Electromagnetic Radiation - Human Exposure) Standard 2003 + Amdt (No. 1):2007
<b>FCC:</b>	Guidelines for Human Exposure to RF Electromagnetic Field OET65C 01/01
<b>EN 50360: 2001</b>	Product standard to demonstrate the compliance of mobile phones with the basic restrictions related to human exposure to electromagnetic fields (300 MHz – 3 GHz)
<b>EN 62209-1:2006</b>	Human Exposure to radio frequency fields from hand-held and body-mounted wireless communication devices - Human models instrumentation and procedures. <b>Part 1:</b> Procedure to determine the specific absorption rate (SAR) for hand-held devices used in close proximity to the ear (300 MHz to 3 GHz)
<b>*EN62209-2:2010</b>	Human Exposure to radio frequency fields from hand-held and body-mounted wireless communication devices - Human models instrumentation and procedures <b>Part 2:</b> Procedure to determine the specific absorption rate (SAR) for wireless communication devices used in close proximity to the human body (frequency range of 30 MHz to 6 GHz)
<b>IEEE 1528: 2003</b>	Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head Due to Wireless Communications Devices: Measurement Techniques.

\*NATA accreditation pending – standard to be adopted by ACMA.

Refer to NATA website [www.nata.asn.au](http://www.nata.asn.au) for the full scope of accreditation.

### 5.3 Environmental Factors

The measurements were performed in a shielded room with no background RF signals. The temperature in the laboratory was controlled to within  $21 \pm 1^\circ\text{C}$ , the humidity was 63%. The liquid parameters are measured daily prior to the commencement of each test. Tests were performed to check that reflections within the environment did not influence the SAR measurements. The noise floor of the DASY4 SAR measurement system using the SN1380 probe was less than  $5\mu\text{V}$  in both air and liquid mediums.



## 6.0 DESCRIPTION OF SAR MEASUREMENT SYSTEM

**Table 8**

Applicable Head Configurations	: None
Applicable Body Configurations	: Tablet Position : Edge On Position : Bystander Position

### 6.1 Probe Positioning System

The measurements were performed with the state-of-the-art automated near-field scanning system **DASY4 V4.7 Build 80** from Schmid & Partner Engineering AG (SPEAG). The DASY4 fully complies with the OET65 C (01-01), IEEE 1528 and EN62209-1 SAR measurement requirements.

### 6.2 E-Field Probe Type and Performance

The SAR measurements were conducted with SPEAG dosimetric probe ET3DV6 Serial: 1380 (2.45 GHz). Refer to appendix C for detailed information.

### 6.3 System Verification

#### 6.3.1 System Verification Results @ 2450MHz

The following tables lists the dielectric properties of the tissue simulating liquid measured prior to SAR system verification. The results of the system verification are listed in columns 4 and 5. The forward power into the reference dipole for SAR system verification was adjusted to 250 mW.

**Table 9 System Verification Results (Dipole: SPEAG D2450V2 SN: 724)**

1. System Frequency and Verification Date	2. $\epsilon_r$ (measured)	3. $\sigma$ (mho/m) (measured)	4. Measured SAR 1g (mW/g)	5. Measured SAR 10g (mW/g)
2450 MHz 24 <sup>th</sup> Jan 2011	51.3	1.90	13.1	6.21

#### 6.3.2 Deviation from reference system verification values

The reference SAR values are derived using a reference dipole and flat section of the SAM phantom suitable for a centre frequency of 2450MHz. These reference SAR values are obtained from the IEEE Std 1528-2003 and are normalized to 1W.

The SPEAG calibration reference SAR value is the SAR system verification result obtained in a specific dielectric liquid using the validation dipole (D2450V2) during calibration. The measured one-gram SAR should be within 10% of the expected target reference values shown in table below (2450MHz) below.

**Table 10 Deviation from reference system verification values @ 2450MHz**

Frequency and Date	Measured SAR 1g (mW/g)	Measured SAR 1g (Normalized to 1W)	SPEAG Calibration reference SAR Value 1g (mW/g)	Deviation From SPEAG Reference 1g (%)
2450MHz	13.1	52.40	52.3	0.19

NOTE: All reference system verification values are referenced to 1W input power.



### 6.3.3 Liquid Depth 15cm

During the SAR measurement process the liquid level was maintained to a level of 15cm with a tolerance of 0.5cm.

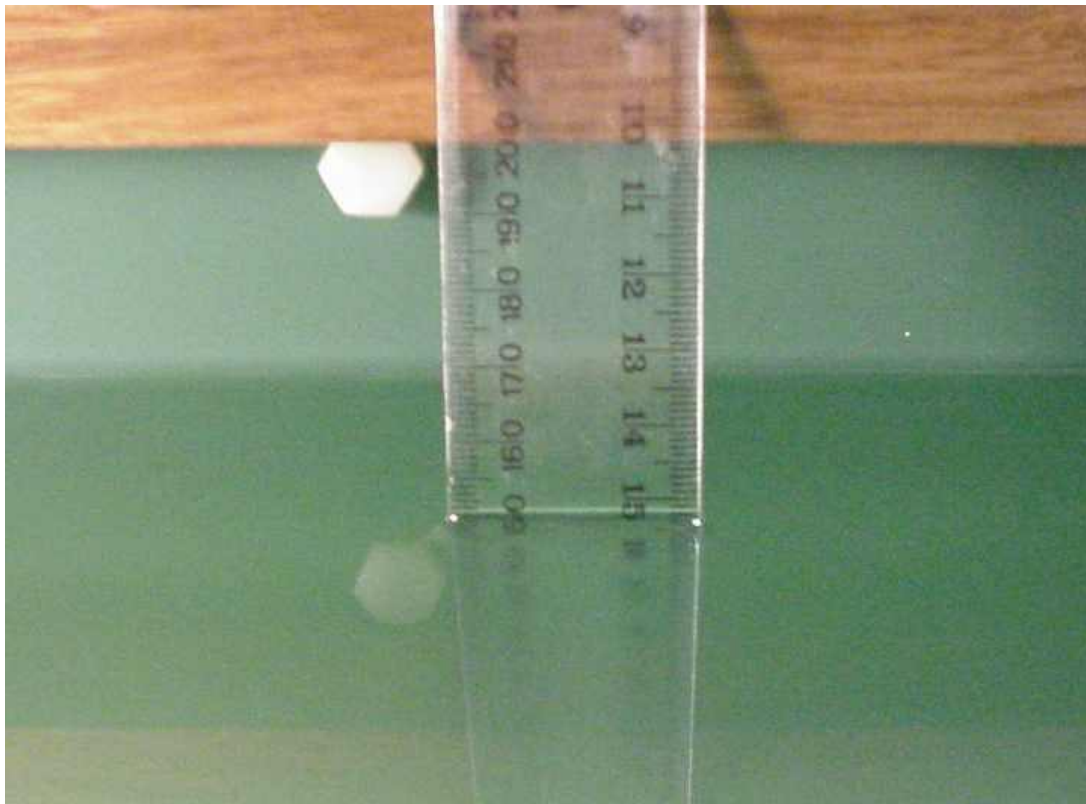


Photo of liquid Depth in Flat Phantom

### 6.4 Phantom Properties

The phantoms used during the testing comply with the OET65 C (01-01), IEEE 1528 and EN62209-1 SAR measurement requirements.

## 6.5 Tissue Material Properties

The dielectric parameters of the brain simulating liquid were measured prior to SAR assessment using the HP85070A dielectric probe kit and HP8753ES Network Analyser. The actual dielectric parameters are shown in the following table.

**Table 11 Measured Body Simulating Liquid Dielectric Values for System verifications**

Frequency Band	$\epsilon_r$ (measured range)	$\epsilon_r$ (target)	$\sigma$ (mho/m) (measured range)	$\sigma$ (target)	$\rho$ kg/m <sup>3</sup>
2450 MHz Muscle	51.3	52.7 $\pm$ 5% (50.1 to 55.3)	1.90	1.95 $\pm$ 5% (1.85 to 2.05)	1000

NOTE: The body liquid parameters were within the required tolerances of  $\pm$ 5%.

**Table 12 Measured Body Simulating Liquid Dielectric Values**

Frequency Band	$\epsilon_r$ (measured range)	$\epsilon_r$ (target)	$\sigma$ (mho/m) (measured range)	$\sigma$ (target)	$\rho$ kg/m <sup>3</sup>
2417 MHz Muscle	51.5	52.7 $\pm$ 5% (50.1 to 55.3)	1.86	1.95 $\pm$ 5% (1.85 to 2.05)	1000
2437 MHz Muscle	51.4	52.7 $\pm$ 5% (50.1 to 55.3)	1.89	1.95 $\pm$ 5% (1.85 to 2.05)	1000
2457 MHz Muscle	51.3	52.7 $\pm$ 5% (50.1 to 55.3)	1.91	1.95 $\pm$ 5% (1.85 to 2.05)	1000

NOTE: The body liquid parameters were within the required tolerances of  $\pm$ 5%.

### 6.5.1 Liquid Temperature and Humidity

The humidity and dielectric/ambient temperatures were recorded during the assessment of the tissue material dielectric parameters. The difference between the ambient temperature of the liquid during the dielectric measurement and the temperature during tests was less than  $|2|^\circ\text{C}$ .

**Table 13 Temperature and Humidity recorded for each day**

Date	Ambient Temperature ( $^\circ\text{C}$ )	Liquid Temperature ( $^\circ\text{C}$ )	Humidity (%)
24 <sup>th</sup> January 2011	21.1	20.9	63.0

## 6.6 Simulated Tissue Composition Used for SAR Test

The tissue simulating liquids are created prior to the SAR evaluation and often require slight modification each day to obtain the correct dielectric parameters.

**Table 14 Tissue Type: Muscle @ 2450MHz**

Volume of Liquid: 60 Litres

Approximate Composition	% By Weight
Distilled Water	73.2
Salt	0.04
DGBE	26.7

\*Refer "OET Bulletin 65 97/01 P38"

## 6.7 Device Holder for Laptops and P 10.1 Phantom

A low loss clamp was used to position the EUT underneath the phantom surface.

Refer to Appendix A for photographs of device positioning



## 7.0 SAR MEASUREMENT PROCEDURE USING DASY4

The SAR evaluation was performed with the SPEAG DASY4 system. A summary of the procedure follows:

- a) A measurement of the SAR value at a fixed location is used as a reference value for assessing the power drop of the EUT. The SAR at this point is measured at the start of the test, and then again at the end of the test.
- b) The SAR distribution at the exposed flat section of the flat phantom is measured at a distance of 4 mm from the inner surface of the shell. The area covers the entire dimension of the EUT and the horizontal grid spacing is 15 mm x 15 mm. The actual Area Scan has dimensions of 105mm x 120mm surrounding the test device. Based on this data, the area of the maximum absorption is determined by Spline interpolation.
- c) Around this point, a volume of 30 mm x 30 mm x 30 mm is assessed by measuring 7 x 7 x 7 points. On the basis of this data set, the spatial peak SAR value is evaluated with the following procedure:
  - (i) The data at the surface are extrapolated, since the centre of the dipoles is 2.7 mm away from the tip of the probe and the distance between the surface and the lowest measuring point is 4 mm. The extrapolation is based on a least square algorithm. A polynomial of the fourth order is calculated through the points in z-axes. This polynomial is then used to evaluate the points between the surface and the probe tip.
  - (ii) The maximum interpolated value is searched with a straightforward algorithm. Around this maximum the SAR values averaged over the spatial volumes (1 g and 10 g) are computed using the 3D-Spline interpolation algorithm. The 3D-Spline is composed of three one-dimensional splines with the "Not a knot"- condition (in x, y and z-direction). The volume is integrated with the trapezoidal – algorithm. One thousand points (10 x 10 x 10) are interpolated to calculate the averages.
  - (iii) All neighbouring volumes are evaluated until no neighbouring volume with a higher average value is found.
  - (iv) The SAR value at the same location as in Step (a) is again measured to evaluate the actual power drift.





## 8.0 MEASUREMENT UNCERTAINTY

The uncertainty analysis is based on the template listed in the IEEE Std 1528-2003 for both device SAR tests and System verification uncertainty. The measurement uncertainty of a specific device is evaluated independently and the total uncertainty for both evaluations (95% confidence level) must be less than 30%.

**Table 15 Uncertainty Budget for DASY4 V4.7 Build 80 – EUT SAR test 2450MHz**

Uncertainty Component	Tol. (6%)	Prob. Dist.	Div.	C <sub>i</sub> (1g)	C <sub>i</sub> (10g)	1g u <sub>i</sub> (6%)	10g u <sub>i</sub> (6%)	v <sub>i</sub>
<b>Measurement System</b>								
Probe Calibration	5.5	N	1	1	1	5.5	5.5	∞
Axial Isotropy	4.7	R	1.73	0.707	0.707	1.9	1.9	∞
Hemispherical Isotropy	9.6	R	1.73	0.707	0.707	3.9	3.9	∞
Boundary Effects	1	R	1.73	1	1	0.6	0.6	∞
Linearity	4.7	R	1.73	1	1	2.7	2.7	∞
System Detection Limits	1	R	1.73	1	1	0.6	0.6	∞
Readout Electronics	0.3	N	1	1	1	0.3	0.3	∞
Response Time	0.8	R	1.73	1	1	0.5	0.5	∞
Integration Time	2.6	R	1.73	1	1	1.5	1.5	∞
RF Ambient Noise	3	R	1.73	1	1	1.7	1.7	∞
RF Ambient Reflections	3	R	1.73	1	1	1.7	1.7	∞
Probe Positioner	0.4	R	1.73	1	1	0.2	0.2	∞
Probe Positioning	2.9	R	1.73	1	1	1.7	1.7	∞
Max. SAR Eval.	1	R	1.73	1	1	0.6	0.6	∞
<b>Test Sample Related</b>								
Test Sample Positioning	1.61	N	1	1	1	1.6	1.6	11
Device Holder Uncertainty	3.6	N	1	1	1	3.6	3.6	7
Output Power Variation – SAR Drift Measurement	10.13	R	1.73	1	1	5.9	5.9	∞
<b>Phantom and Setup</b>								
Phantom Uncertainty	4	R	1.73	1	1	2.3	2.3	∞
Liquid Conductivity – Deviation from target values	5	R	1.73	0.64	0.43	1.8	1.2	∞
Liquid Conductivity – Measurement uncertainty	2.5	N	1.00	0.64	0.43	1.6	1.1	5
Liquid Permittivity – Deviation from target values	5	R	1.73	0.6	0.49	1.7	1.4	∞
Liquid Permittivity – Measurement uncertainty	2.5	N	1.00	0.6	0.49	1.5	1.2	5
Combined standard Uncertainty		RSS				11.5	11.4	154
Expanded Uncertainty (95% CONFIDENCE LEVEL)		k=2				23.1	22.70	

Estimated total measurement uncertainty for the DASY4 measurement system was  $\pm 11.5\%$ . The extended uncertainty ( $K = 2$ ) was assessed to be  $\pm 23.1\%$  based on 95% confidence level. The uncertainty is not added to the measurement result.





**Table 16 Uncertainty Budget for DASY4 V4.7 Build 80 – System Verification 2450MHz**

Uncertainty Component	Tol. (6%)	Prob. Dist.	Div.	C <sub>i</sub> (1g)	C <sub>i</sub> (10g)	1g u <sub>i</sub> (6%)	10g u <sub>i</sub> (6%)	v <sub>i</sub>
<b>Measurement System</b>								
Probe Calibration	5.5	N	1	1	1	5.5	5.5	∞
Axial Isotropy	4.7	R	1.73	1	1	2.7	2.7	∞
Hemispherical Isotropy	9.6	R	1.73	0	0	0.0	0.0	∞
Boundary Effects	1	R	1.73	1	1	0.6	0.6	∞
Linearity	4.7	R	1.73	1	1	2.7	2.7	∞
System Detection Limits	1	R	1.73	1	1	0.6	0.6	∞
Readout Electronics	0.3	N	1	1	1	0.3	0.3	∞
Response Time	0	R	1.73	1	1	0.0	0.0	∞
Integration Time	0	R	1.73	1	1	0.0	0.0	∞
RF Ambient Noise	3	R	1.73	1	1	1.7	1.7	∞
RF Ambient Reflections	3	R	1.73	1	1	1.7	1.7	∞
Probe Positioner	0.4	R	1.73	1	1	0.2	0.2	∞
Probe Positioning	2.9	R	1.73	1	1	1.7	1.7	∞
Max. SAR Eval.	1	R	1.73	1	1	0.6	0.6	∞
<b>Dipole</b>								
Dipole Axis to Liquid Distance	2	N	1.73	1	1	1.2	1.2	11
Input Power and SAR drift meas.	4.7	R	1.73	1	1	2.7	2.7	∞
<b>Phantom and Tissue Param.</b>								
Phantom Uncertainty	4	R	1.73	1	1	2.3	2.3	∞
Liquid Conductivity – Deviation from target values	5	R	1.73	0.64	0.43	1.8	1.2	∞
Liquid Conductivity – Measurement uncertainty	2.5	N	1.00	0.64	0.43	1.6	1.1	5
Liquid Permittivity – Deviation from target values	5	R	1.73	0.6	0.49	1.7	1.4	∞
Liquid Permittivity – Measurement uncertainty	2.5	N	1.00	0.6	0.49	1.5	1.2	5
Combined standard Uncertainty		RSS				<b>9.0</b>	<b>8.7</b>	154
Expanded Uncertainty (95% CONFIDENCE LEVEL)		k=2				17.9	17.34	

Estimated total measurement uncertainty for the DASY4 measurement system was  $\pm 9.0\%$ . The extended uncertainty ( $K = 2$ ) was assessed to be  $\pm 17.9\%$  based on 95% confidence level. The uncertainty is not added to the System verification measurement result.



## 9.0 EQUIPMENT LIST AND CALIBRATION DETAILS

**Table 17 SPEAG DASY4 Version V4.7 Build 80**

Equipment Type	Manufacturer	Model Number	Serial Number	Calibration Due	Used For this Test?
Robot - Six Axes	Staubli	RX90BL	N/A	Not applicable	✓
Robot Remote Control	SPEAG	CS7MB	RX90B	Not applicable	✓
SAM Phantom	SPEAG	N/A	1260	Not applicable	
SAM Phantom	SPEAG	N/A	1060	Not applicable	
Flat Phantom	AndreT	10.1	P 10.1	Not Applicable	
Flat Phantom	AndreT	9.1	P 9.1	Not Applicable	✓
Flat Phantom	SPEAG	PO1A 6mm	1003	Not Applicable	
Data Acquisition Electronics	SPEAG	DAE3 V1	359	07-July-2011	
Data Acquisition Electronics	SPEAG	DAE3 V1	442	09-Dec-2011	✓
Probe E-Field - Dummy	SPEAG	DP1	N/A	Not applicable	
Probe E-Field	SPEAG	ET3DV6	1380	09-Dec-2011	✓
Probe E-Field	SPEAG	ET3DV6	1377	7-July-2011	
Probe E-Field	SPEAG	ES3DV6	3029	Not Used	
Probe E-Field	SPEAG	EX3DV4	3563	16-July-2011	
Probe E-Field	SPEAG	EX3DV4	3657	13-Dec-2011	
Antenna Dipole 300 MHz	SPEAG	D300V2	1005	15-Dec-2011	
Antenna Dipole 450 MHz	SPEAG	D450V2	1009	17-Dec-2010	
Antenna Dipole 900 MHz	SPEAG	D900V2	047	5-July-2012	
Antenna Dipole 1640 MHz	SPEAG	D1640V2	314	9-July-2012	
Antenna Dipole 1800 MHz	SPEAG	D1800V2	242	13-July-2012	
Antenna Dipole 1950 MHz	SPEAG	D1950V3	1113	10-Dec -2012	
Antenna Dipole 3500 MHz	SPEAG	D3500V2	1002	17-July-2010	
Antenna Dipole 2450 MHz	SPEAG	D2450V2	724	09-Dec-2012	✓
Antenna Dipole 5600 MHz	SPEAG	D5GHzV2	1008	16-Dec-2011	
RF Amplifier	EIN	603L	N/A	*In test	
RF Amplifier	Mini-Circuits	ZHL-42	N/A	*In test	✓
RF Amplifier	Mini-Circuits	ZVE-8G	N/A	*In test	
Synthesized signal generator	Hewlett Packard	ESG-D3000A	GB37420238	*In test	✓
RF Power Meter	Hewlett Packard	437B	3125012786	9-Aug-2011	✓
RF Power Sensor 0.01 - 18 GHz	Hewlett Packard	8481H	1545A01634	13-Aug-2011	✓
RF Power Meter	Rohde & Schwarz	NRP	101415	5-May-2011	
RF Power Sensor	Rohde & Schwarz	NRP - Z81	100174	16-July-2011	
RF Power Meter Dual	Hewlett Packard	435A	1733A05847	*In test	✓
RF Power Sensor	Hewlett Packard	8482A	2349A10114	*In test	✓
Network Analyser	Hewlett Packard	8714B	GB3510035	22-Sept-2011	
Network Analyser	Hewlett Packard	8753ES	JP39240130	10-Nov-2011	✓
Dual Directional Coupler	Hewlett Packard	778D	1144 04700	*In test	
Dual Directional Coupler	NARDA	3022	75453	*In test	✓

\* Calibrated during the test for the relevant parameters.



This document must not be copied or reproduced, except in full without the written permission of the Manager, EMC Technologies Pty Ltd. The certificate on page 3 may be reproduced in full.  
www.emctech.com.au

## 10.0 TEST METHODOLOGY

Notebooks should be evaluated in normal use positions, typical for lap-held bottom-face only. However the number of positions will depend on the number of configurations the laptop can be operated in. The “LIFEBOOK T SERIES” can be used in either a conventional laptop position (see Appendix A1) or a Tablet configuration. The antenna location in the “LIFEBOOK T SERIES” is closest to the top of the screen when used in a conventional laptop configuration and due to the separation distances involved between the phantom and the laptop antenna, testing is not required in this position.

### 10.1 Positions

#### 10.1.1 “Tablet” Position Definition (0mm spacing)

The EUT was tested in the 2.00 mm flat section of the AndreT Flat phantom P 9.1 for the “Tablet” position. The Transceiver was placed at the bottom of the phantom and suspended in such way that the back of the EUT was touching the phantom. This device orientation simulates the PC’s normal use – being held on the lap of the user. A spacing of 0mm ensures that the SAR results are conservative and represent a worst-case position.

#### 10.1.2 “Edge On” Position (Portrait or Landscape)

The EUT was tested in the (2.00 mm) flat section of the AndreT phantom for the “Edge On” position. The Antenna edge of the Transceiver was placed underneath the flat section of the phantom and suspended until the edge touched the phantom.

#### 10.1.3 “Bystander” Position

The EUT was tested in a notebook configuration with the back of the screen facing the flat phantom. This orientation simulates normal use of the device in the vicinity of other people, (bystanders).

For this position, the EUT was placed at the bottom of the P 9.1 phantom and suspended in such a way that the base of the EUT was touching the phantom. The spacing was determined by the physical restrictions of the EUT, and did not exceed 25mm.

*Refer to Appendix A for photos of measurement positions.*



## 10.2 List of All Test Cases (Antenna In/Out, Test Frequencies, User Modes)

The EUT has a fixed antenna. Depending on the measured SAR level up to three test channels with the test sample operating at maximum power were recorded. The following table represents the matrix used to determine what testing was required. All relevant provisions of KDB 447498 are applied for SAR measurements of the host system.

**Table 18 Testing configurations**

Phantom Configuration	*Device Mode	Antenna	Test Configurations		
			Channel (Low)	Channel (Middle)	Channel (High)
Bystander	OFDM 2.4GHz	A		X	
		B		X	
Tablet	OFDM 2.4GHz	A		X	
		B		X	
Edge On	OFDM 2.4GHz	A		X	
		B		X	

### Legend

X	Testing Required in this configuration
	Testing required in this configuration only if SAR of middle channel is more than 3dB below the SAR limit or it is the worst case.

*NOTE: Throughout this report, Antenna A and B refer to Tx1 and Tx2 in the host respectively.*



## 11.0 SAR MEASUREMENT RESULTS

The SAR values averaged over 1g tissue masses were determined for the sample EUT for all test configurations listed in section 10.2.

### 11.1 2450MHz SAR Results

There are two modes of operation within the 2450MHz band. Refer to section 10.2 for selection of all device test configurations. Table below displays the SAR results.

**Table 19 SAR MEASUREMENT RESULTS – OFDM Mode**

Test Position	Plot No.	Ant	Bit rate Mode (Mbps)	Channel Bandwidth (MHz)	Test Channel	Test Freq (MHz)	Measured 1g SAR Results (mW/g)	Measured Drift (dB)
Tablet	1	A	6	-	06	2437	0.069	-0.194
	2	B	6	-	06	2437	0.066	0.021
Edge On Secondary Landscape	3	A	6	-	06	2437	0.212	-0.107
	4	B	6	-	06	2437	0.340	-0.061
	5		HT0	20	06	2437	0.328	-0.006
Edge On Primary Portrait	6	A	6	-	02	2417	0.404	-0.171
	7				06	2437	0.398	-0.017
	8				10	2452	0.394	-0.168
	9				06	2437	0.381	-0.464
	10	B	6	-	06	2437	0.028	0.083
Edge On Secondary Portrait	-	B	6	-	06	2437	Noise Floor	N/A
Bystander	11	A	6	-	06	2437	0.029	0.083
	12	B	6	-	06	2437	0.039	0.191

NOTE: The measurement uncertainty of 23.1% for 2.45GHz was not added to the result.

The highest SAR level recorded in the 2450MHz band was 0.404 mW/g as evaluated in a 1g cube of averaging mass. This value was obtained in the Edge On Primary Portrait position in OFDM mode, utilizing channel 2 (2417 MHz) and antenna A.



## 12.0 COMPLIANCE STATEMENT

The Fujitsu TABLET PC, Model: T901 with INTEL Half Mini-PCI Wireless LAN Module (INTEL CENTRINO ADVANCED-N 6205(TAYLOR PEAK) (11a/b/g/n)), Model: 62205ANHMMW & BROADCOM Bluetooth Module, Model: BCM92070MD\_REF6 was found to comply with the FCC and RSS-102 SAR requirements.

The highest SAR level recorded was 0.404 mW/g for a 1g cube. This value was measured at 2417 MHz (channel 2) in the "Edge On Primary Portrait" position in OFDM modulation mode at antenna A. This was below the limit of 1.6 mW/g for uncontrolled exposure, even taking into account the measurement uncertainty of 23.1%.

This document is issued in accordance with NATA's accreditation requirements. The results of tests, calibration and/or measurements included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing and calibration reports.



This document must not be copied or reproduced, except in full without the written permission of the Manager, EMC Technologies Pty Ltd. The certificate on page 3 may be reproduced in full.  
[www.emctech.com.au](http://www.emctech.com.au)

### 13.0 MULTIBAND EVALUATION CONSIDERATIONS

Fujitsu **TABLET** PC, Model: **T901** is equipped with WLAN (62205ANHMMW) and Bluetooth (BCM92070MD\_REF6).

According to the FCC SAR evaluation procedures mentioned in **KDB 616217**, stand-alone SAR evaluation is NOT required when the maximum transmitter and antenna output power is less than or equal to  $60/f_{\text{(GHz)}} (P_{\text{ref}})$ . The Bluetooth module in the EUT operates in the 2.4GHz range. It has a maximum output power of 2.5mW (4dBm) which is less than  $P_{\text{ref}} (=60/2.4=25\text{mW})$ .

The shortest distance between the BT module and any other transmitting antenna was 23.6cm.

Because  $23.6\text{cm} > 5\text{cm}$ , and  $2.5\text{mW} < 25\text{mW}$ , the Bluetooth module was not considered for SAR evaluation. This is in accordance with the test reduction methods detailed in **KDB 616217** and **KDB 447498**.

**DIAGRAM SHOWING DISTANCE BETWEEN ANTENNAS**

