

**EMC Technologies Pty Ltd**

ABN 82 057 105 549
176 Harrick Road
Keilor Park
Victoria Australia 3042

Ph: + 613 9365 1000
Fax: + 613 9331 7455
email: melb@emctech.com.au

SAR Test Report

Report Number: M120603_FCC_62205ANHMW_SAR_5.6

Test Sample: Portable TABLET Computer
PC Model Number: T902
Radio Modules: WLAN INTEL CENTRINO
ADVANCED-N 6205(TAYLOR
PEAK) 62205ANHMW & Bluetooth
BCM92070MD_REF6

PC System FCC ID: EJE-WL0027
PC System IC: 337J-WL0027
Date of Issue: 27th June 2012

EMC Technologies Pty Ltd reports apply only to the specific samples tested under stated test conditions. It is the manufacturer's responsibility to assure that additional production units of this model are manufactured with identical electrical and mechanical components. EMC Technologies Pty Ltd shall have no liability for any deductions, inferences or generalisations drawn by the client or others from EMC Technologies Pty Ltd issued reports. This report shall not be used to claim, constitute or imply product endorsement by EMC Technologies Pty Ltd.



Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

CONTENTS

1.0 GENERAL INFORMATION	3
2.0 INTRODUCTION.....	4
3.0 TEST SAMPLE TECHNICAL INFORMATION	5
3.1 DUT (WLAN) Details.....	5
3.2 DUT (Bluetooth) Details.....	7
3.3 DUT (Notebook PC) Details.....	8
3.4 Test sample Accessories.....	8
3.4.1 Battery Types.....	8
4.0 TEST SIGNAL, FREQUENCY AND OUTPUT POWER	9
4.1 Battery Status	9
5.0 DETAILS OF TEST LABORATORY	10
5.1 Location	10
5.2 Accreditations	10
5.3 Environmental Factors.....	10
6.0 DESCRIPTION OF SAR MEASUREMENT SYSTEM.....	11
6.1 Probe Positioning System.....	11
6.2 E-Field Probe Type and Performance	11
6.3 System verification.....	11
6.3.1 System verification Results @ 5GHz.....	11
6.3.2 Deviation from reference system verification values	11
6.3.3 Liquid Depth 15cm	12
6.4 Phantom Properties	12
6.5 Tissue Material Properties.....	13
6.5.1 Liquid Temperature and Humidity.....	14
6.6 Simulated Tissue Composition Used for SAR Test.....	14
6.7 Device Holder for Laptops and P 10.1 Phantom	14
7.0 SAR MEASUREMENT PROCEDURE USING DASY5.....	15
8.0 MEASUREMENT UNCERTAINTY	16
9.0 EQUIPMENT LIST AND CALIBRATION DETAILS.....	18
10.0 TEST METHODOLOGY	19
10.1 Positions	19
10.1.1 "Lap Held" Position Definition (0mm spacing)	19
10.1.2 "Edge On" Position (Portrait or Landscape).....	19
10.1.3 "Bystander" Position (25mm spacing).....	19
10.2 List of All Test Cases (Antenna In/Out, Test Frequencies, User Modes).....	19
11.0 SAR MEASUREMENT RESULTS	20
11.1 5GHz Band SAR Results.....	20
12.0 COMPLIANCE STATEMENT	23
13.0 MULTIBAND EVALUATION CONSIDERATIONS	24
APPENDIX A1 TEST SAMPLE PHOTOGRAPHS	25
APPENDIX A2 TEST SAMPLE PHOTOGRAPHS	26
APPENDIX A3 TEST SAMPLE PHOTOGRAPHS	27
APPENDIX A4 TEST SETUP PHOTOGRAPHS	28
APPENDIX A5 TEST SETUP PHOTOGRAPHS	29
APPENDIX A6 TEST SETUP PHOTOGRAPHS	30
APPENDIX A7 TEST SETUP PHOTOGRAPHS	31
APPENDIX A8 TEST SETUP PHOTOGRAPHS	32
APPENDIX B PLOTS OF THE SAR MEASUREMENTS.....	33
APPENDIX C CALIBRATION DOCUMENTS	137



Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

SAR TEST REPORT**Report Number: M120603_FCC_62205ANHWMW_SAR_5.6****PC System FCC ID: EJE-WL0027****PC System IC: 337J-WL0027****1.0 GENERAL INFORMATION****Table 1**

Test Sample: Portable TABLET Computer
Model Name: T902
Radio Modules: WLAN 62205ANHWMW & Bluetooth BCM92070MD_REF6
Interface Type: Half Mini-PCI Module
Device Category: Portable Transmitter
Test Device: Pre-Production Unit
FCC System ID: EJE-WL0027
PC System IC: 337J-WL0027
RF exposure Category: General Population/Uncontrolled

Manufacturer: Fujitsu Limited

Test Standard/s:

1. Evaluating Compliance with FCC Guidelines For Human Exposure to Radiofrequency Electromagnetic Fields Supplement C (Edition 01-01) to OET Bulletin 65 (Edition 97-01)
2. Radio Frequency Exposure Compliance of Radiocommunication Apparatus (All Frequency Bands), RSS-102
3. **EN 62209-2:2010**
Human exposure to radio frequency fields from hand-held and bodymounted wireless communication devices. Human models, instrumentation, and procedures.
Part 2: Procedure to determine the specific absorption rate (SAR) for wireless communication devices used in close proximity to the human body (frequency range of 30 MHz to 6 GHz)

Statement Of Compliance: The Fujitsu TABLET Computer T902 with Wireless LAN model 62205ANHWMW and Bluetooth module BCM92070MD_REF6 complied* with the FCC General public/uncontrolled RF exposure limits of 1.6mW/g per requirements of 47CFR2.1093(d). It also complied with IC RSS-102 requirements.

Test Dates: 19th - 23rd June 2012

Test Officer:



Peter Jakubiec

Authorised Signature:



Peter Jakubiec

Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

SAR TEST REPORT
Portable TABLET Computer
Model: T902
Report Number: M120603_FCC_62205ANHWMW_SAR_5.6

2.0 INTRODUCTION

Testing was performed on the Fujitsu TABLET PC, Model: T902 with INTEL Half Mini-PCI Wireless LAN Module (INTEL CENTRINO ADVANCED-N 6205(TAYLOR PEAK) 802.11a/b/g/n), Model: 62205ANHWMW & Broadcom Bluetooth Module, Model: BCM92070MD_REF6. The INTEL CENTRINO ADVANCED-N 6205(TAYLOR PEAK) module is an OEM product. The Half Mini-PCI Wireless LAN (WLAN) was tested in the dedicated host – LIFEBOOK T SERIES, Model T902. The system tested will be referred to as the DUT throughout this report.

There are two variants of the Fujitsu Tablet PC, Model: T902 one that is equipped with the Bluetooth transmitter and Bluetooth antenna and one variant that does not contain Bluetooth transmitter or Bluetooth antenna FCC ID: EJE-WL0027 IC: 337J-WL0027. SAR testing was conducted on the sample that is equipped with the Bluetooth transmitter and Bluetooth antenna.

The measurement test results mentioned herein only apply to the 5GHz frequency band; an additional report titled "M120603_FCC_62205ANHWMW_SAR_2.4" applies to the 2450MHz frequency range.



Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

3.0 TEST SAMPLE TECHNICAL INFORMATION

(Information supplied by the client)

3.1 DUT (WLAN) Details

Table 2

Transmitter:	Half Mini-Card Wireless LAN Module
Wireless Module:	Intel Centrino Advanced-N 6205(Taylor Peak) (11a/b/g/n)
Model Number:	62205ANHMMW
Manufacturer:	Intel Corporation
Modulation Type:	DSSS for 802.11b OFDM for 802.11g OFDM for 802.11a OFDM for 802.11n
5GHz (802.11a/n)	BPSK, QPSK, 16QAM, 64QAM
2.4GHz (802.11b/g/n)	CCK, DQPSK, DBPSK, 16QAM, 64QAM
Maximum Data Rate:	802.11b = 11 Mbps, 802.11g and 802.11a = 54 Mbps 802.11n = 450 Mbps
Frequency Range:	2.412–2.462 GHz for 11b/g/n 5.18–5.32 GHz and 5.745–5.825 GHz for 11a/n
Number of Channels:	11 channels for 11b/g/n 24 channels for 11a/n with 20MHz Bandwidth 18 channels for 11n with 40MHz Bandwidth
Antenna Types:	Nissei Inverted F (1 st , 2 nd), Model: refer to WLAN antenna data Location: Left Top edge of LCD screen(1 st), Right Top edge of LCD screen(2 nd)
Power Supply:	3.3 VDC from PCI bus



Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

Table 3 Channels and Output power setting

Mode	Channel	Frequency (MHz)	Data Rate (Mbps)	Tx BW (MHz)	Average Power Target (dBm)	
					Ch A	Ch B
802.11a 5.2 GHz	36	5180	6	-	16.0	16.0
	48	5240				
802.11a 5.3 GHz	52	5260				
	64	5320				
802.11a 5.6 GHz	104	5520				
	116	5580				
	124	5620				
	136	5680				
802.11a 5.8 GHz	149	5745				
	157	5785				
	165	5825				
802.11n 5.2 GHz	36	5180	HT0	20	15.5	15.5
	48	5240			16.0	16.0
802.11n 5.3 GHz	52	5260				
	64	5320				
802.11n 5.6 GHz	104	5520				
	116	5580				
	120	5600				
	124	5620				
	136	5680				
802.11n 5.8 GHz	149	5745			15.5	
	157	5785			16.0	
	165	5825				
802.11n 5.2 GHz	38	5190	HT0	40 (Wide)	11.0	11.0
	46	5230			16.0	16.0
802.11n 5.3 GHz	54	5270			11.0	11.0
	62	5310			13.5	13.5
802.11n 5.6 GHz	102	5510			16.0	16.0
	110	5550				
	118	5590				
	126	5630				
	134	5670				
802.11n 5.8 GHz	151	5755				
	159	5795				

NOTE: For 2450 MHz SAR results refer to report titled "M120603_FCC_62205ANHMMW_SAR_2.4".



Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

3.2 DUT (Bluetooth) Details

Table 4

Transmitter:	Bluetooth
Model Number:	BCM92070MD_REF6
Manufacturer:	Broadcom
Network Standard:	Bluetooth TM RF Test Specification
Modulation Type:	Frequency Hopping Spread Spectrum (FHSS)
Frequency Range:	2402 MHz to 2480 MHz
Number of Channels:	79
Carrier Spacing:	1.0 MHz
Antenna Types:	Monopole Antenna included in module Module location: Left side of hinge of base unit
Max. Output Power:	4 dBm
Reference Oscillator:	16 MHz (Built-in)
Power Supply:	3.3 VDC from host.

Table 5

Channel Number	Frequency (MHz)	Bluetooth Utility power setting
1	2402	4dBm
2	2403	
3	2404	
.	.	
.	.	
39	2440	
40	2441	
41	2442	
.	.	
.	.	
77	2478	
78	2479	
79	2480	



3.3 DUT (Notebook PC) Details

Table 6

Host notebook :	LifeBook T series
Model Name:	T902
Serial Number:	Pre-production Sample
Manufacturer:	FUJITSU LIMITED
CPU Type and Speed:	Core i7 2.9GHz
LCD	13.3" WXGA(1280x800 : LP133WD2
Graphics chip	Non
Wired LAN:	Intel 82579LM : 10 Base-T/100 Base-TX/1000Base-T
Modem:	None
Port Replicator Model:	FPCPR132
AC Adapter Model:	65W: PXW1934N 80W: ADP-80NB A(Delta), SEE100P2-19.0(Sanken), PJW1942N(Tamura), PJW1942NA(Tamura)
Voltage:	19 V
Current Specs:	4.22A / 3.42A
Watts:	80W / 65W
Radio Modules:	WLAN (Taylor Peak IEEE802.11a/b/g/n, 2x2)
WLAN Model Number:	62205ANHMMW
WLAN Manufacturer:	Intel Corp.
Interface Type:	Half Mini-Card Wireless LAN Module
Radio Modules:	Bluetooth module
Model Number:	BCM92070MD_REF6
Manufacturer:	Broadcom
Interface Type:	USB

3.4 Test sample Accessories

3.4.1 Battery Types

One type of Fujitsu Lithium Ion battery is used to power the DUT.

Table 7 Battery Details

Model	FPCBP373
Rating	10.8V/6700mAh (72Wh)



Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

4.0 TEST SIGNAL, FREQUENCY AND OUTPUT POWER

INTEL's DRTU test tool was used to configure the WLAN for testing. The DUT Wireless LAN had a total of 11 channels (USA model) within the 2412 to 2462 MHz frequency band and 24 channels within the frequency range 5180 to 5825 MHz. In the frequency range 2412 MHz to 2462 MHz the DUT operates in 2 modes, OFDM and DSSS. Within the 5180 to 5825 MHz frequency range the device operates in OFDM mode only. For the SAR measurements the device was operating in continuous transmit mode using programming codes supplied by Fujitsu.

The Bluetooth module operates over 79 channels within the frequency range 2402 to 2480 MHz. It is possible for the Bluetooth module to operate simultaneously with the WLAN module (co-transmission). However, due to low output power of Bluetooth module (less than 5mW), standalone SAR measurement for Bluetooth module was not conducted (as per KDB 616217).

The test results mentioned in this report only apply to the 5.6 GHz frequency range. An additional report titled 'M120603_FCC_62205ANHWMW_SAR_2.4' is specific to the 2450MHz range.

The WLAN modules can be configured in a number of different data rates. It was found that the highest source based time averaged power was measured when using the lowest data rates available in each mode. This lowest data rate corresponds to 6Mbps in OFDM mode and 1Mbps in DSSS mode.

The DUT is capable of using two antennas transmitting simultaneously (HT8 DATA mode) the power level is 3dB lower (50%) than if a single antenna was transmitting. There were no wires or other connections to the DUT during the SAR measurements.

At the beginning of the SAR tests, the conducted power of the DUT was measured after temporary modification of antenna connector inside the DUT's TX RX compartment. Measurements were performed with a calibrated Power Meter. The Transmitter power was set to be equal or higher than power specified by the manufacturer.

4.1 Battery Status

The DUT battery was fully charged prior to commencement of measurement. Each SAR test was completed within 30 minutes. The battery condition was monitored by measuring the RF field at a defined position inside the phantom before the commencement of each test and again after the completion of the test. It was not possible to perform conducted power measurements at the output of the DUT, at the beginning and end of each scan due to lack of a suitable antenna port. The uncertainty associated with the power drift was less than 5% and was assessed in the uncertainty budget.

5.0 DETAILS OF TEST LABORATORY

5.1 Location

EMC Technologies Pty Ltd
176 Harrick Road
Keilor Park, (Melbourne) Victoria
Australia 3042

Telephone: +61 3 9365 1000
Facsimile: +61 3 9331 7455
email: melb@emctech.com.au
website: www.emctech.com.au

5.2 Accreditations

EMC Technologies Pty. Ltd. is accredited by the National Association of Testing Authorities, Australia (NATA).

NATA Accredited Laboratory Number: 5292

EMC Technologies Pty Ltd is NATA accredited for the following standards:

Table 8

AS/NZS 2772.1:	RF and microwave radiation hazard measurement
ACMA:	Radio communications (Electromagnetic Radiation - Human Exposure) Standard 2003, Amdt (No. 1):2007
FCC:	Guidelines for Human Exposure to RF Electromagnetic Field OET65C 01/01
EN 50360: 2001	Product standard to demonstrate the compliance of mobile phones with the basic restrictions related to human exposure to electromagnetic fields (300 MHz – 3 GHz)
EN 62209-1:2006	Human Exposure to radio frequency fields from hand-held and body-mounted wireless communication devices - Human models instrumentation and procedures. Part 1: Procedure to determine the specific absorption rate (SAR) for hand-held devices used in close proximity to the ear (300 MHz to 3 GHz)
EN 62209-2:2010	Human Exposure to radio frequency fields from hand-held and body-mounted wireless communication devices - Human models instrumentation and procedures Part 2: Procedure to determine the specific absorption rate (SAR) for wireless communication devices used in close proximity to the human body (frequency range of 30 MHz to 6 GHz)
IEEE 1528: 2003	Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head Due to Wireless Communications Devices: Measurement Techniques.

Refer to NATA website www.nata.asn.au for the full scope of accreditation.

5.3 Environmental Factors

The measurements were performed in a shielded room with no background RF signals. The temperature in the laboratory was controlled to within $21 \pm 1^\circ\text{C}$, the humidity was in the range 38% to 43%. The liquid parameters are measured daily prior to the commencement of each test. Tests were performed to check that reflections within the environment did not influence the SAR measurements. The noise floor of the DASY5 SAR measurement system using the SN3657 probe was less than $5\mu\text{V}$ in both air and liquid mediums.

6.0 DESCRIPTION OF SAR MEASUREMENT SYSTEM

Table 9

Applicable Head Configurations	: None
Applicable Body Configurations	: Lap Held Position
	: Edge On Position
	: Bystander Position

6.1 Probe Positioning System

The measurements were performed with the state-of-the-art automated near-field scanning system **DASY5 Version 52** from Schmid & Partner Engineering AG (SPEAG). The DASY5 fully complies with the OET65 C (01-01), IEEE 1528 and EN62209-1 and EN62209-2 SAR measurement requirements.

6.2 E-Field Probe Type and Performance

The SAR measurements were conducted with SPEAG dosimetric probe EX3DV4 Serial: 3657. Please refer to appendix C for detailed information.

6.3 System verification

6.3.1 System verification Results @ 5GHz

The following table lists the dielectric properties of the tissue simulating liquid measured prior to SAR system verification. The results of the system verification are listed in columns 4 and 5. The forward power into the reference dipole for SAR system verification was adjusted to 100 mW.

Table 10 System verification Results (Dipole: SPEAG D5GHzV2 SN: 1008)

1. System Frequency and Verification Date	2. ϵ_r (measured)	3. σ (mho/m) (measured)	4. Measured SAR 1g (mW/g)	5. Measured SAR 10g (mW/g)
5200 MHz 19 th Jun 2012	48.8	5.40	9.29	2.72
5200 MHz 20 th Jun 2012	48.4	5.36	8.58	2.52
5500 MHz 21 st Jun 2012	47.8	5.81	9.59	2.79
5800 MHz 23 rd June 2012	46.6	6.12	9.06	2.63

6.3.2 Deviation from reference system verification values

Currently no IEEE Std 1528-2003 OR EN 62209-2 SAR reference values are available in 5.6 GHz band, as a consequence all system verification results were compared against the SPEAG calibration reference SAR values.

The reference SAR value is the SAR system verification result obtained in a specific dielectric liquid using the validation dipole (D5GHzV2) after system component calibration. The measured one-gram SAR should be within 10% of the expected target reference values shown in table below.

Table 11 Deviation from reference system verification values in 5.6 GHz band

Frequency and Date	Measured SAR 1g (mW/g)	Measured SAR 1g (Normalized to 1W)	EMCT Calibration reference SAR Value 1g (mW/g)	Deviation From EMCT Reference 1g (%)
5200MHz 19 th June 2012	9.29	92.90	94.0	-1.17
5200MHz 20 th June 2012	8.58	85.80	94.0	-8.72
5500MHz 21 st June 2012	9.59	95.90	97.3	-1.44
5800MHz 23 rd June 2012	9.06	90.60	87.6	3.42

NOTE: All reference system verification values are referenced to 1W input power.

6.3.3 Liquid Depth 15cm

During the SAR measurement process the liquid level was maintained to a level of a least 15cm with a tolerance of 0.5cm.

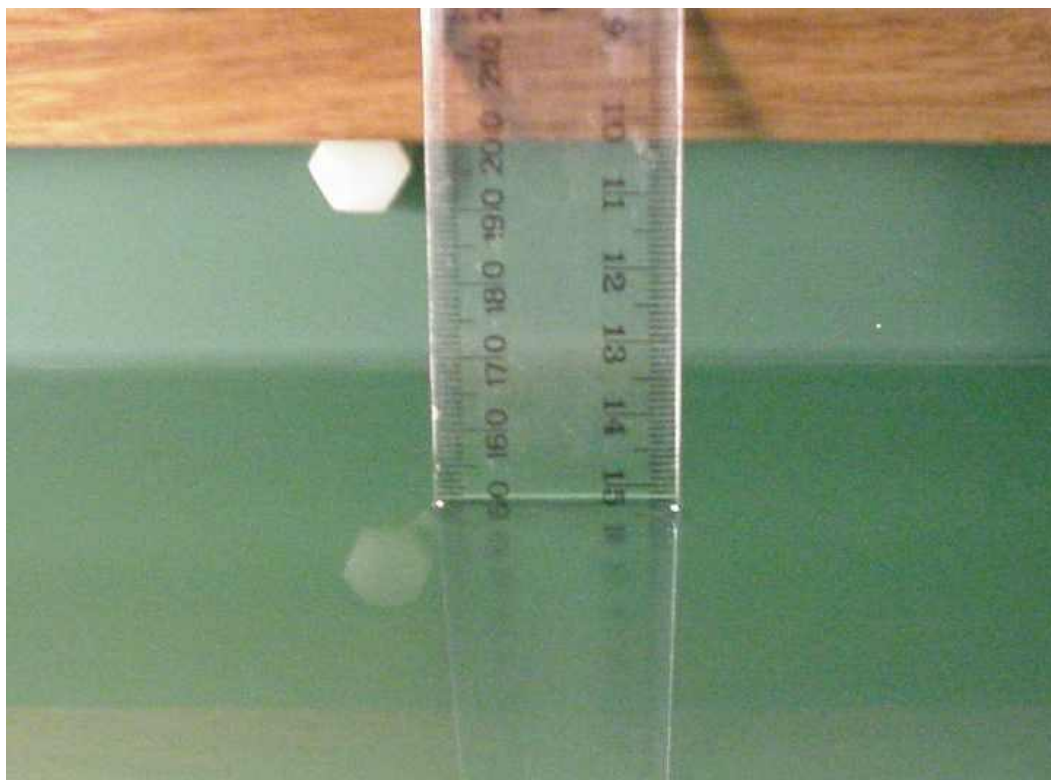


Photo of liquid Depth in Flat Phantom

6.4 Phantom Properties

The phantoms used during the testing comply with the OET65 C (01-01), IEEE 1528 and EN62209-1 and EN62209-2 SAR measurement requirements.

Table 12

Phantom Properties	Required	Measured
Thickness of flat section	2.0mm \pm 0.2mm (bottom section)	2.12-2.20mm

6.5 Tissue Material Properties

The dielectric parameters of the brain simulating liquid were measured prior to SAR assessment using the HP85070A dielectric probe kit and HP8753ES Network Analyser. The actual dielectric parameters are shown in the following table.

Table 13 Measured Body Simulating Liquid Dielectric Values for 5200MHz range

Frequency Band	ϵ_r (measured range)	ϵ_r (target)	σ (mho/m) (measured range)	σ (target)	ρ kg/m ³
5180 MHz Body	48.4 - 48.8	49.0 \pm 5% (46.55 to 51.45)	5.33 - 5.36	5.3 \pm 5% (5.04 to 5.57)	1000
5240 MHz Body	48.4 - 48.6	48.9 \pm 5% (46.46 to 51.35)	5.42 - 5.47	5.4 \pm 5% (5.13 to 5.67)	1000
5260 MHz Body	48.3 - 48.6	48.9 \pm 5% (46.46 to 51.35)	5.46 - 5.50	5.4 \pm 5% (5.13 to 5.67)	1000
5320 MHz Body	48.1 - 48.4	48.8 \pm 5% (46.36 to 51.24)	5.55 - 5.62	5.4 \pm 5% (5.13 to 5.67)	1000

Table 14 Measured Body Simulating Liquid Dielectric Values for 5600MHz range

Frequency Band	ϵ_r (measured range)	ϵ_r (target)	σ (mho/m) (measured range)	σ (target)	ρ kg/m ³
5520 MHz Body	47.7	48.6 \pm 5% (46.17 to 51.03)	5.84	5.6 \pm 5% (5.32 to 5.88)	1000
5580 MHz Body	47.5	48.5 \pm 5% (46.08 to 50.93)	5.94	5.77 \pm 5% (5.48 to 6.06)	1000
5620 MHz Body	47.4	48.5 \pm 5% (46.08 to 50.93)	6.01	5.77 \pm 5% (5.48 to 6.06)	1000
5680 MHz Body	47.2	48.4 \pm 5% (45.98 to 50.82)	6.10	5.9 \pm 5% (5.61 to 6.20)	1000

Table 15 Measured Body Simulating Liquid Dielectric Values for 5800MHz range

Frequency Band	ϵ_r (measured range)	ϵ_r (target)	σ (mho/m) (measured range)	σ (target)	ρ kg/m ³
5745 MHz Body	46.7	48.3 \pm 5% (45.89 to 50.72)	6.01	5.9 \pm 5% (5.61 to 6.20)	1000
5785 MHz Body	46.6	48.2 \pm 5% (45.79 to 50.61)	6.09	6.0 \pm 5% (5.7 to 6.3)	1000
5825 MHz Body	46.6	48.2 \pm 5% (45.79 to 50.61)	6.15	6.0 \pm 5% (5.7 to 6.3)	1000

NOTE: The muscle liquid parameters were within the required tolerances of \pm 5% for σ for ϵ_r .

6.5.1 Liquid Temperature and Humidity

The humidity and dielectric/ambient temperatures were recorded during the assessment of the tissue material dielectric parameters. The difference between the ambient temperature of the liquid during the dielectric measurement and the temperature during tests was less than $|2|^\circ\text{C}$.

Table 16 Temperature and Humidity Recorded for Each Day

Date	Ambient Temperature ($^\circ\text{C}$)	Liquid Temperature ($^\circ\text{C}$)	Humidity (%)
19 th June 2012	20.5	20.2	43
20 th June 2012	20.9	20.7	38
21 st June 2012	21.0	20.8	39
23 rd June 2012	20.8	20.4	38

6.6 Simulated Tissue Composition Used for SAR Test

A low loss clamp was used to position the TABLET underneath the phantom surface. Small pieces of foam were then used to press the TABLET flush against the phantom surface.

Table 17 Tissue Type: Muscle @ 5600MHz

EMCT Liquid, Volume of Liquid: 60 Litres

Composition
Distilled Water
Salt
Triton X-100

6.7 Device Holder for Laptops and P 10.1 Phantom

A low loss clamp was used to position the DUT underneath the phantom surface.

Refer to Appendix A for photographs of device positioning



7.0 SAR MEASUREMENT PROCEDURE USING DASY5

The SAR evaluation was performed with the SPEAG DASY5 system. A summary of the procedure follows:

- a) A measurement of the SAR value at a fixed location is used as a reference value for assessing the power drop of the DUT. The SAR at this point is measured at the start of the test, and then again at the end of the test.
- b) The SAR distribution at the exposed flat section of the flat phantom is measured at a distance of 2.0 mm from the inner surface of the shell. The area covers the entire dimension of the DUT and the horizontal grid spacing is 10 mm x 10 mm. The actual Area Scan has dimensions of 80 mm x 100 mm surrounding the test device. Based on this data, the area of the maximum absorption is determined by Spline interpolation.
- c) Around this point, a volume of 24 mm x 24 mm x 22 mm is assessed by measuring 7 x 7 x 12 points. On the basis of this data set, the spatial peak SAR value is evaluated with the following procedure:
 - (i) The data at the surface are extrapolated, since the centre of the dipoles is 1.0 mm away from the tip of the probe and the distance between the surface and the lowest measuring point is 2.0 mm. The extrapolation is based on a least square algorithm. A polynomial of the fourth order is calculated through the points in z-axes. This polynomial is then used to evaluate the points between the surface and the probe tip.
 - (ii) The maximum interpolated value is searched with a straightforward algorithm. Around this maximum the SAR values averaged over the spatial volumes (1 g and 10 g) are computed using the 3D-Spline interpolation algorithm. The 3D-Spline is composed of three one-dimensional splines with the "Not a knot"- condition (in x, y and z-direction). The volume is integrated with the trapezoidal – algorithm. One thousand points (10 x 10 x 10) are interpolated to calculate the averages.
 - (iii) All neighbouring volumes are evaluated until no neighbouring volume with a higher average value is found.
 - (iv) The SAR value at the same location as in Step (a) is again measured to evaluate the actual power drift.



8.0 MEASUREMENT UNCERTAINTY

The uncertainty analysis is based on the template listed in the IEEE Std 1528-2003 for both device SAR tests and Validation uncertainty. The measurement uncertainty of a specific device is evaluated independently.

Table 18 Uncertainty Budget for DASY5 Version 52 – DUT SAR test 5GHz

Error Description	Uncert. Value	Prob. Dist.	Div.	C _i (1g)	C _i (10g)	1g u _i	10g u _i	v _i
Measurement System								
Probe Calibration	6.55	N	1.00	1	1	6.55	6.55	∞
Axial Isotropy	4.7	R	1.73	0.7	0.7	1.90	1.90	∞
Hemispherical Isotropy	9.6	R	1.73	0.7	0.7	3.88	3.88	∞
Boundary Effects	1	R	1.73	1	1	0.58	0.58	∞
Linearity	4.7	R	1.73	1	1	2.71	2.71	∞
System Detection Limits	1	R	1.73	1	1	0.58	0.58	∞
Readout Electronics	0.3	N	1.00	1	1	0.30	0.30	∞
Response Time	0.8	R	1.73	1	1	0.46	0.46	∞
Integration Time	2.6	R	1.73	1	1	1.50	1.50	∞
RF Ambient Noise	3	R	1.73	1	1	1.73	1.73	∞
RF Ambient Reflections	3	R	1.73	1	1	1.73	1.73	∞
Probe Positioner	0.4	R	1.73	1	1	0.23	0.23	∞
Probe Positioning	2.9	R	1.73	1	1	1.67	1.67	∞
Max. SAR Eval.	1	R	1.73	1	1	0.58	0.58	∞
Test Sample Related								
Test Sample Positioning	2.9	N	1.00	1	1	2.90	2.90	145
Device Holder Uncertainty	3.6	N	1.00	1	1	3.60	3.60	5
Output Power Variation – SAR Drift Measurement	4.71	R	1.73	1	1	2.72	2.72	∞
Phantom and Setup								
Phantom Uncertainty	4	R	1.73	1	1	2.31	2.31	∞
Liquid Conductivity – Deviation from target values	5	R	1.73	0.64	0.43	1.85	1.24	∞
Liquid Conductivity – Measurement uncertainty	2.5	N	1.00	0.64	0.43	1.60	1.08	∞
Liquid Permittivity – Deviation from target values	5	R	1.73	0.6	0.49	1.73	1.41	∞
Liquid Permittivity – Measurement uncertainty	2.5	N	1.00	0.6	0.49	1.50	1.23	∞
Combined standard Uncertainty (u _c)						11.3	11.0	
Expanded Uncertainty (95% CONFIDENCE LEVEL)			k= 2			22.5	22.1	

Estimated total measurement uncertainty for the DASY5 measurement system was $\pm 11.3\%$. The extended uncertainty (K = 2) was assessed to be $\pm 22.5\%$ based on 95% confidence level. The uncertainty is not added to the measurement result.

Table 19 Uncertainty Budget for DASY5 Version 52 – System Verification 5GHz

Error Description	Uncert. Value	Prob. Dist.	Div.	C _i (1g)	C _i (10g)	1g u _i	10g u _i	v _i
Measurement System								
Probe Calibration	6.55	N	1.00	1	1	6.55	6.55	∞
Axial Isotropy	4.7	R	1.73	1	1	2.71	2.71	∞
Hemispherical Isotropy	9.6	R	1.73	0	0	0.00	0.00	∞
Boundary Effects	1	R	1.73	1	1	0.58	0.58	∞
Linearity	4.7	R	1.73	1	1	2.71	2.71	∞
System Detection Limits	1	R	1.73	1	1	0.58	0.58	∞
Readout Electronics	0.3	N	1.00	1	1	0.30	0.30	∞
Response Time	0	R	1.73	1	1	0.00	0.00	∞
Integration Time	0	R	1.73	1	1	0.00	0.00	∞
RF Ambient Noise	1	R	1.73	1	1	0.58	0.58	∞
RF Ambient Reflections	1	R	1.73	1	1	0.58	0.58	∞
Probe Positioner	0.8	R	1.73	1	1	0.46	0.46	∞
Probe Positioning	6.7	R	1.73	1	1	3.87	3.87	∞
Max. SAR Eval.	2	R	1.73	1	1	1.15	1.15	∞
Dipole Related								
Deviation of exp. dipole	5.5	R	1.73	1	1	3.18	3.18	∞
Dipole Axis to Liquid Dist.	2	R	1.73	1	1	1.15	1.15	∞
Input power & SAR drift	5.00	R	1.73	1	1	2.89	2.89	∞
Phantom and Setup								
Phantom Uncertainty	4	R	1.73	1	1	2.31	2.31	∞
SAR Correction	1.9	R	1.73	1	0.84	1.10	0.92	∞
Liquid Conductivity (meas.)	2.5	N	1.00	0.78	0.71	1.95	1.78	∞
Liquid Permittivity (meas.)	2.5	N	1.00	0.26	0.26	0.65	0.65	∞
Temp.unc. - Conductivity	1.7	R	1.73	0.78	0.71	0.77	0.70	∞
Temp. unc. - Permittivity	0.3	R	1.73	0.23	0.26	0.04	0.05	∞
Combined standard Uncertainty (u _c)						10.3	10.3	
Expanded Uncertainty (95% CONFIDENCE LEVEL)			k= 2			20.7	20.5	

Estimated total measurement uncertainty for the DASY5 measurement system was $\pm 10.3\%$. The extended uncertainty ($K = 2$) was assessed to be $\pm 20.7\%$ based on 95% confidence level. The uncertainty is not added to the measurement result.



Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

9.0 EQUIPMENT LIST AND CALIBRATION DETAILS

Table 20 SPEAG DASY5 Version 52

Equipment Type	Manufacturer	Model Number	Serial Number	Calibration Due	Used For this Test?
Robot - Six Axes	Staubli	RX90BL	N/A	Not applicable	✓
Robot Remote Control	SPEAG	CS7MB	RX90B	Not applicable	✓
SAM Phantom	SPEAG	N/A	1260	Not applicable	
SAM Phantom	SPEAG	N/A	1060	Not applicable	
Flat Phantom	AndreT	10.1	P 10.1	Not Applicable	✓
Flat Phantom	AndreT	9.1	P 9.1	Not Applicable	
Flat Phantom	SPEAG	ELI 4.0	1101	Not Applicable	
Data Acquisition Electronics	SPEAG	DAE3 V1	359	11-July-2012	
Data Acquisition Electronics	SPEAG	DAE3 V1	442	05-Dec-2012	✓
Probe E-Field - Dummy	SPEAG	DP1	N/A	Not applicable	
Probe E-Field	SPEAG	ET3DV6	1380	12-Dec-2012	
Probe E-Field	SPEAG	ET3DV6	1377	8-July-2012	
Probe E-Field	SPEAG	ES3DV6	3029	Not Used	
Probe E-Field	SPEAG	EX3DV4	3563	21-July-2012	
Probe E-Field	SPEAG	EX3DV4	3657	14-Dec-2012	✓
Antenna Dipole 300 MHz	SPEAG	D300V3	1012	30-Nov-2012	
Antenna Dipole 450 MHz	SPEAG	D450V3	1074	30-Nov-2012	
Antenna Dipole 750 MHz	SPEAG	D750V2	1051	9-Jan-2014	
Antenna Dipole 900 MHz	SPEAG	D900V2	047	5-July-2012	
Antenna Dipole 1640 MHz	SPEAG	D1640V2	314	9-July-2012	
Antenna Dipole 1800 MHz	SPEAG	D1800V2	242	13-July-2012	
Antenna Dipole 1950 MHz	SPEAG	D1950V3	1113	10-Dec -2012	
Antenna Dipole 2450 MHz	SPEAG	D2450V2	724	09-Dec-2012	
Antenna Dipole 2600 MHz	SPEAG	D2600V2	1044	10-Jan-2014	
Antenna Dipole 3500 MHz	SPEAG	D3500V2	1002	13-July-2013	
Antenna Dipole 5600 MHz	SPEAG	D5GHzV2	1008	14-Dec-2013	✓
RF Amplifier	EIN	603L	N/A	*In test	
RF Amplifier	Mini-Circuits	ZHL-42	N/A	*In test	
RF Amplifier	Mini-Circuits	ZVE-8G	N/A	*In test	✓
Synthesized signal generator	Hewlett Packard	ESG-D3000A	GB37420238	*In test	
RF Power Meter	Hewlett Packard	437B	3125012786	23-Aug-2012	✓
RF Power Sensor 0.01 - 18 GHz	Hewlett Packard	8481H	1545A01634	23-Aug-2012	✓
RF Power Meter	Rohde & Schwarz	NRP	101415	18-Aug-2012	
RF Power Sensor	Rohde & Schwarz	NRP - Z81	100174	21-Sept-2012	
RF Power Meter Dual	Hewlett Packard	435A	1733A05847	*In test	✓
RF Power Sensor	Hewlett Packard	8482A	2349A10114	*In test	✓
Network Analyser	Hewlett Packard	8714B	GB3510035	27-Sept-2012	
Network Analyser	Hewlett Packard	8753ES	JP39240130	7-Nov-2012	✓
Dual Directional Coupler	Hewlett Packard	778D	1144 04700	*In test	
Dual Directional Coupler	NARDA	3022	75453	*In test	✓
Radio Communication Test Set	Rohde & Schwarz	CMU200	101573	Not Applicable	
Radio Communication Test Set	Anritsu	MT8820A	6200240559	Not Applicable	
Radio Communication Test Set	Agilent	PXT E6621A	MY51100168	Not Applicable	

* Calibrated during the test for the relevant parameters.

10.0 TEST METHODOLOGY

Notebooks should be evaluated in normal use positions, typical for lap-held bottom-face only. However the number of positions will depend on the number of configurations the laptop can be operated in. The “LIFEBOOK T SERIES” can be used in either a conventional laptop position (see Appendix A) or a Tablet configuration. The antenna location in the “LIFEBOOK T SERIES” is closest to the top of the screen when used in a conventional laptop configuration and due to the separation distances involved between the phantom and the laptop antenna, testing is not required in this position.

10.1 Positions

10.1.1 “Lap Held” Position Definition (0mm spacing)

The DUT was tested in the 2.00 mm flat section of the AndreT Flat phantom for the “Lap Held” position. The Transceiver was placed at the bottom of the phantom and suspended in such way that the back of the DUT was touching the phantom. This device orientation simulates the PC’s normal use – being held on the lap of the user. A spacing of 0mm ensures that the SAR results are conservative and represent a worst-case position.

10.1.2 “Edge On” Position (Portrait or Landscape)

The DUT was tested in the (2.00 mm) flat section of the AndreT Flat phantom for the “Edge On” position. The Antenna edge of the Transceiver was placed underneath the flat section of the phantom and suspended until the edge touched the phantom. *Refer to Appendix A for photos of measurement positions.*

10.1.3 “Bystander” Position (25mm spacing)

The DUT was tested in the 2.00 mm flat section of the AndreT Flat phantom for the “Bystander” position. The Transceiver was placed at the bottom of the phantom and suspended in such way that the back of the LCD screen was parallel to phantom and at 25mm distance. This orientation simulates use of the device in a way that allows occasional RF exposure of the nearby person (Bystander).

10.2 List of All Test Cases (Antenna In/Out, Test Frequencies, User Modes)

The DUT has a fixed antenna. Depending on the measured SAR level up to three test channels with the test sample operating at maximum power were recorded. The following table represents the matrix used to determine what testing was required. All relevant provisions of KDB 447498 are applied for SAR measurements of the host system.

Table 21 Testing configurations

Phantom Configuration	*Device Mode	Antenna	Test Configurations		
			Channel (Low)	Channel (Middle)	Channel (High)
Lap Held	OFDM 5GHz All Bands	A		X	
		B		X	
Bystander	OFDM 5GHz All Bands	A		X	
		B		X	
Edge On	OFDM 5GHz All Bands	A		X	
		B		X	

Legend

X	Testing Required in this configuration
	Testing required in this configuration only if SAR of middle channel is more than 3dB below the SAR limit or it is the worst case.

NOTE: Throughout this report, Antenna A and B refer to Tx1 and Tx2 in the host respectively.



Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

11.0 SAR MEASUREMENT RESULTS

The SAR values averaged over 1g tissue masses were determined for the sample DUT for all test configurations listed in section 10.2.

11.1 5GHz Band SAR Results

Table 22 SAR MEASUREMENT RESULTS Lower Band – OFDM Mode

Test Position	Plot No.	Ant	Bit rate Mode (Mbps)	Channel Bandwidth (MHz)	Test Channel	Test Freq (MHz)	Measured 1g SAR Results (mW/g)	Measured Drift (dB)
Lap Held	1	A	6	-	48	5240	0.112	-0.16
	2	B	6	-	36	5180	0.072	0.07
	3		6	-	48	5240	0.068	-0.13
	4		6	-	52	5260	0.066	0.02
	5		6	-	64	5320	0.081	0.03
Edge On Secondary Landscape	6	A	6	-	36	5180	0.900	-0.17
	7		6	-	48	5240	0.938	0.17
	8		6	-	52	5260	1.06	0.16
	9		6	-	64	5320	0.613	-0.14
	10	B	6	-	36	5180	0.888	0.17
	11		6	-	48	5240	0.704	0.01
	12		6	-	52	5260	0.710	-0.12
	13		6	-	64	5320	1.22	-0.09
Edge On Primary Portrait	14	A	6	-	48	5240	0.125	0.15
	15	B	6	-	48	5240	0.166	-0.12
Edge On Secondary Portrait	-	B	6	-	48	5240	Noise Floor	-
Bystander	16	A	6	-	48	5240	0.094	0.02
	17	B	6	-	48	5240	0.086	0.09

NOTE: The measurement uncertainty of 22.5% for 5GHz testing is not added to the result.

The highest SAR level recorded in the 5.2 GHz band was 1.22 mW/g as evaluated in a 1g cube of averaging mass. This value was obtained in the Edge On Secondary Landscape position in OFDM mode, utilizing channel 64 (5320MHz) and antenna B.



Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

Table 23 SAR MEASUREMENT RESULTS Middle Band – OFDM Mode

Test Position	Plot No.	Ant	Bit rate Mode (Mbps)	Channel Bandwidth (MHz)	Test Channel	Test Freq (MHz)	Measured 1g SAR Results (mW/g)	Measured Drift (dB)
Lap Held	18	A	6	-	116	5580	0.113	0.18
Lap Held	19	B	6	-	104	5520	0.076	0.05
	20		6	-	116	5580	0.068	0.14
	21		6	-	124	5620	0.113	-0.19
	22		6	-	136	5680	0.104	-0.04
Edge On Secondary Landscape	23	A	6	-	104	5520	1.01	0.04
	24		6	-	116	5580	1.10	-0.19
	25		6	-	124	5620	0.742	0.17
	26		6	-	136	5680	0.915	0.00
Edge On Secondary Landscape	27	B	6	-	104	5520	1.09	-0.08
	28		6	-	116	5580	1.15	-0.02
	29		6	-	124	5620	1.36	-0.14
	30		6	-	136	5680	1.15	0.04
Edge On Primary Portrait	31	A	6	-	116	5580	0.063	-0.01
	32	B	6	-	116	5580	0.248	0.00
Edge On Secondary Portrait	-	B	6	-	116	5580	Noise Floor	-
Bystander	-	A	6	-	116	5580	Noise Floor	-
Bystander	33	B	6	-	116	5580	0.085	-0.15

NOTE: The measurement uncertainty of 22.5% for 5GHz testing is not added to the result.

The highest SAR level recorded in the 5.6 GHz band was 1.36 mW/g as evaluated in a 1g cube of averaging mass. This value was obtained in the Edge On Secondary Landscape position in OFDM mode, utilizing channel 124 (5620 MHz) and antenna B.



Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

Table 24 SAR MEASUREMENT RESULTS Upper Band – OFDM Mode

Test Position	Plot No.	Ant	Bit rate Mode (Mbps)	Channel Bandwidth (MHz)	Test Channel	Test Freq (MHz)	Measured 1g SAR Results (mW/g)	Measured Drift (dB)
Lap Held	34	A	6	-	157	5785	0.115	-0.01
Lap Held	35	B	6	-	149	5745	0.082	0.08
	36	B	6	-	157	5785	0.086	-0.06
	37	B	6	-	165	5825	0.080	0.17
Edge On Secondary Landscape	38	A	6	-	149	5745	1.03	-0.05
	39		6	-	157	5785	1.06	-0.17
	40		6	-	165	5825	0.955	-0.09
Edge On Secondary Landscape	41	B	6	-	149	5745	0.984	0.11
	42		6	-	157	5785	1.10	0.15
	43		6	-	165	5825	0.832	-0.15
Edge On Primary Portrait	44	A	6	-	157	5785	0.098	-0.15
	45	B	6	-	157	5785	0.197	0.16
Edge On Secondary Portrait	-	B	6	-	157	5785	Noise Floor	-
Bystander	46	A	6	-	157	5785	0.071	0.20
	47	B	6	-	157	5785	0.077	-0.16

NOTE: The measurement uncertainty of 22.5% for 5GHz testing is not added to the result.

The highest SAR level recorded in the 5.8 GHz band was 1.10 mW/g as evaluated in a 1g cube of averaging mass. This value was obtained in the Edge On Secondary Landscape position in OFDM mode, utilizing channel 157 (5785 MHz) and antenna B.



Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

12.0 COMPLIANCE STATEMENT

The Fujitsu TABLET PC, Model: T902 with INTEL Mini-PCI Wireless LAN Module (INTEL CENTRINO ADVANCED-N 6205(TAYLOR PEAK) 802.11a/b/g/n), Model: 62205ANHWMW & Broadcom Bluetooth Module, Model: BCM92070MD_REF6 was found to comply with the FCC and RSS-102 SAR requirements.

The highest SAR level recorded was 1.36 mW/g for a 1g cube. This value was measured at 5620 MHz (channel 124) in the “Edge On Secondary Landscape” position in OFDM modulation mode at the antenna B. This was below the limit of 1.6 mW/g for uncontrolled exposure, but was within the band of measurement uncertainty around the limit.



Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.


This document shall not be reproduced except in full.

13.0 MULTIBAND EVALUATION CONSIDERATIONS

According to the FCC SAR evaluation procedures mentioned in KDB 616217, stand-alone SAR evaluation is NOT required when the maximum transmitter and antenna output power is less than or equal to $60/f_{\text{(GHz)}} (P_{\text{ref}})$. The Bluetooth module in the DUT operates in the 2.4GHz range. It has a maximum output power of 5mW which is $< P_{\text{ref}} (=60/2.4=25\text{mW})$.

The shortest distance between the BT module and any other transmitting antenna was more than 20cm. Because $20\text{cm} > 5\text{cm}$, and $5\text{mW} < 25\text{mW}$, the Bluetooth module was not considered for SAR evaluation. This is in accordance with the test reduction methods detailed in KDB 616217 and KDB 447498

Diagram Showing Antenna Positions (provided by client)

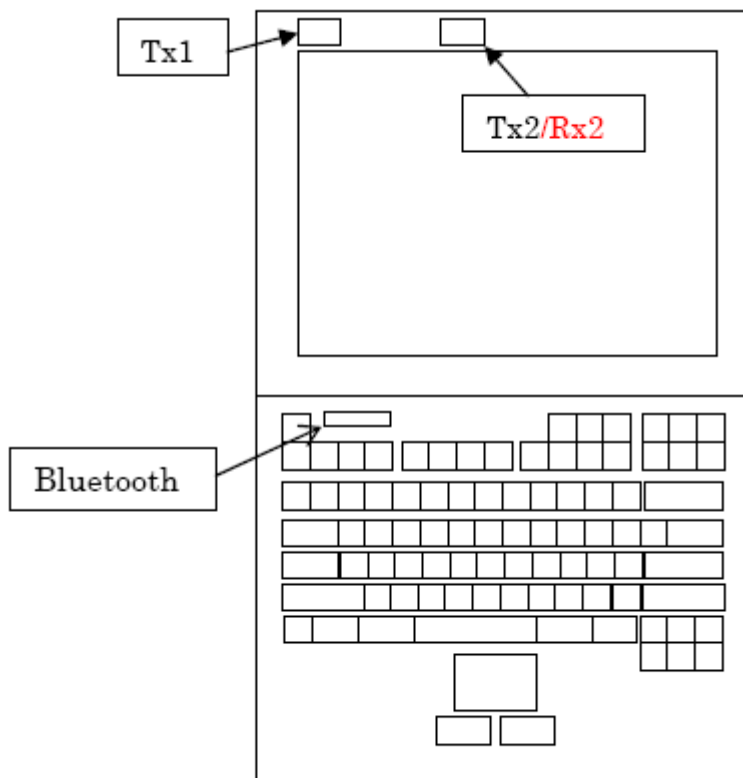

WLAN Ant Length = 20mm

WLAN Tx 1 Ant to Primary Portrait Edge = 11mm

WLAN Tx 2 Ant to Primary Portrait Edge = 122mm

WLAN Tx 1 Ant to 2nd Portrait Edge = 288mm

WLAN Tx 2 Ant to 2nd Portrait Edge = 177mm

Bluetooth Ant to Base Rear Edge = 7mm

Bluetooth Ant to Base Left Edge = 34.2mm

NOTE: Throughout this report, Antenna A and B refer to Tx1 and Tx2 in the host.