

APPENDIX B PLOTS OF THE SAR MEASUREMENTS

Plots of the measured SAR distributions inside the phantom are given in this Appendix for all tested configurations.



Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

Test Lab: EMCTech

Test File: M150814 5200 MHz WLAN FCC.da52:0

DUT Name: Fujitsu Tablet with 11 abgn/ac WLAN, Type: 8260NGW, Serial: WFM (MAC):A4:34:D9:09:92:96**Configuration: Body Bystander ANT 1 WWAN Ant. IN (OFDM) 25-Aug-2015**

Communication System: 0 - OFDM 5 GHz HT0 (20 MHz); Communication System Band: 5.2 GHz; Frequency: 5300 MHz; Communication System PAR: 0.00 dB; PMF: 0.00; Duty Cycle: 1:1.00

Medium Parameters used: $f=5300.35$ MHz; $\sigma = 5.50$ S/m; $\epsilon_r = 48.1$; $\rho = 1000.0$ g/cm³

Phantom section: Flat Section

DASY Configuration:

Probe: EX3DV4 - SN7358; ConvF: (4.67,4.67,4.67); Calibrated: 21/04/2015;

Sensor-Surface: 1.4 mm (Mechanical Surface Detection)


Electronics: DAE3 Sn442; Calibrated: 3/12/2014

Phantom: ELI v4.0 (30deg probe tilt); Type: QDOVA001BB; Serial: TP:1101

DASY52 52.8.8(1222); SEMCAD X Version 14.6.10 (7331)


Body Bystander ANT 1 WWAN Ant. IN (OFDM) 25-Aug-2015/Channel 60 Test/Area Scan (61x91x1): Interpolated grid: $dx=1.0$ mm, $dy=1.0$ mm; Maximum value of SAR (interpolated) = 0.105 W/kg**Body Bystander ANT 1 WWAN Ant. IN (OFDM) 25-Aug-2015/Channel 60 Test/Zoom Scan (31x31x61)/Cube 0:** Interpolated grid: $dx=0.8$ mm, $dy=0.8$ mm, $dz=0.4$ mm; Reference Value = 3.604 V/m; **Power Drift = 0.11 dB****Averaged SAR: SAR(1g) = 0.037 W/kg; SAR(10g) = 0.013 W/kg**

Maximum value of SAR (interpolated) = 0.197 W/kg

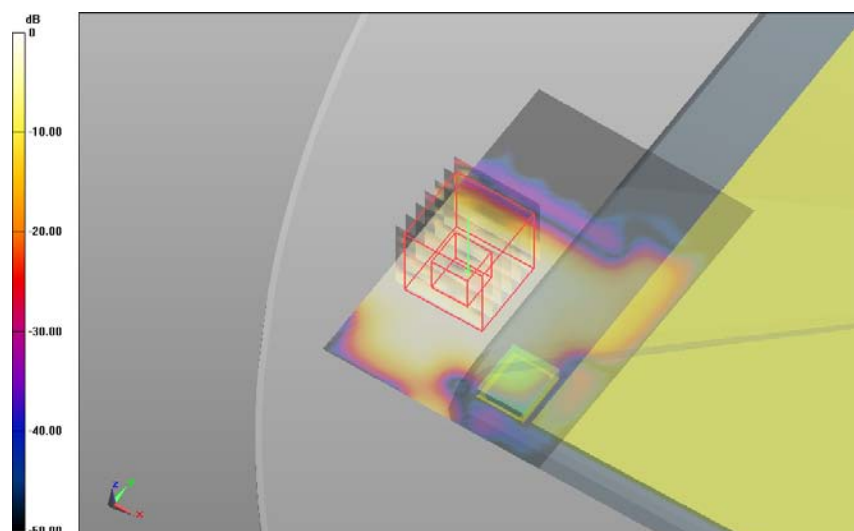

0 dB = 0.105 W/kg = -9.79 dBW/kg

SAR Measurement Plot 1

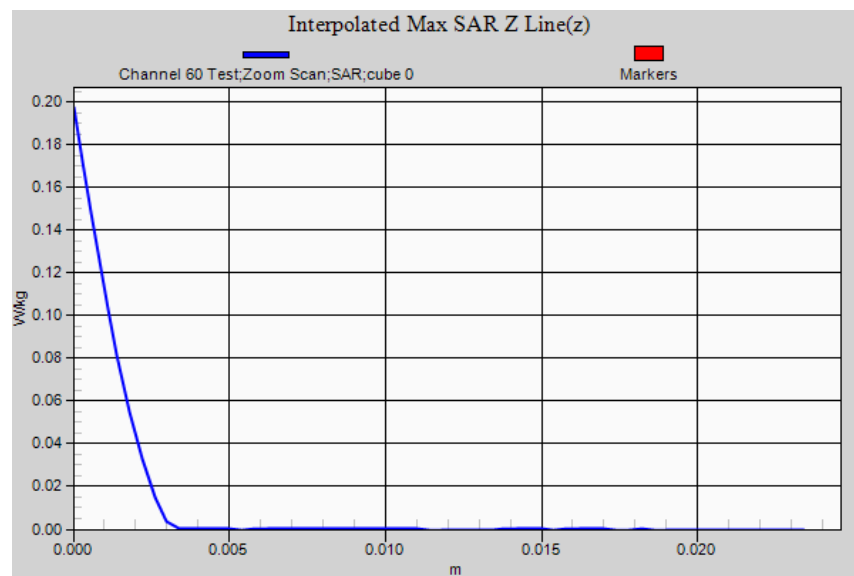

Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

Test Lab: EMCTech

Test File: M150814 5200 MHz WLAN FCC.da52:1

DUT Name: Fujitsu Tablet with 11 abgn/ac WLAN, Type: 8260NGW, Serial: WFM (MAC):A4:34:D9:09:92:96**Configuration: Body Bystander ANT 2 WWAN Ant. IN (OFDM) 25-Aug-2015**

Communication System: 0 - OFDM 5 GHz HT0 (40 MHz); Communication System Band: 5.2 GHz Band;

Frequency: 5270 MHz, Communication System PAR: 0.00 dB; PMF: 1.00; Duty Cycle: 1:1.00

Medium Parameters used: $f=5270.65$ MHz; $\sigma = 5.46$ S/m; $\epsilon_r = 48.2$; $\rho = 1000.0$ g/cm³

Phantom section: Flat Section

DASY Configuration:

Probe: EX3DV4 - SN7358; ConvF: (4.67,4.67,4.67); Calibrated: 21/04/2015;

Sensor-Surface: 1.4 mm (Mechanical Surface Detection)


Electronics: DAE3 Sn442; Calibrated: 3/12/2014

Phantom: ELI v4.0 (30deg probe tilt); Type: QDOVA001BB; Serial: TP:1101

DASY52 52.8.8(1222); SEMCAD X Version 14.6.10 (7331)


Body Bystander ANT 2 WWAN Ant. IN (OFDM) 25-Aug-2015/Channel 54 Test/Area Scan (61x91x1):Interpolated grid: $dx=1.0$ mm, $dy=1.0$ mm; Maximum value of SAR (interpolated) = 0.085 W/kg**Body Bystander ANT 2 WWAN Ant. IN (OFDM) 25-Aug-2015/Channel 54 Test/Zoom Scan (31x31x61)/Cube****0:** Interpolated grid: $dx=0.8$ mm, $dy=0.8$ mm, $dz=0.4$ mm; Reference Value = 2.569 V/m; **Power Drift = 0.13 dB****Averaged SAR: SAR(1g) = 0.019 W/kg; SAR(10g) = 0.007 W/kg**

Maximum value of SAR (interpolated) = 0.225 W/kg

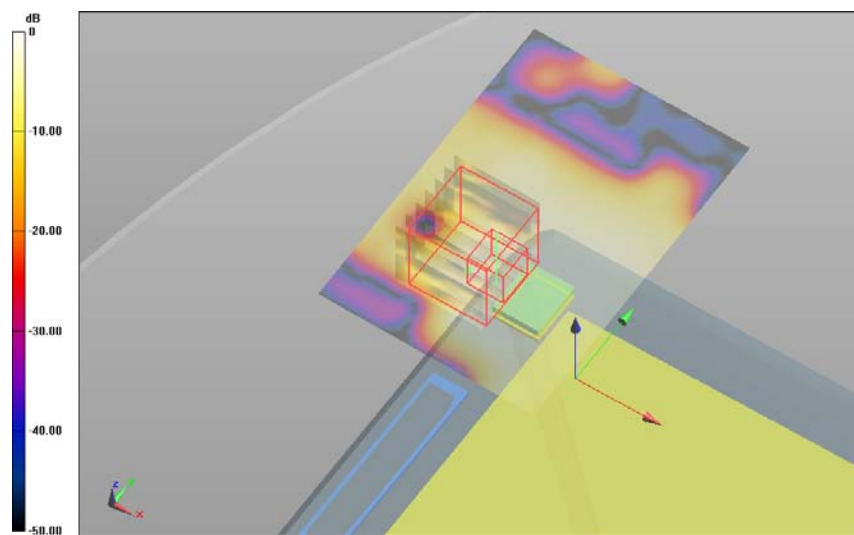

0 dB = 0.0853 W/kg = -10.69 dBW/kg

SAR Measurement Plot 2

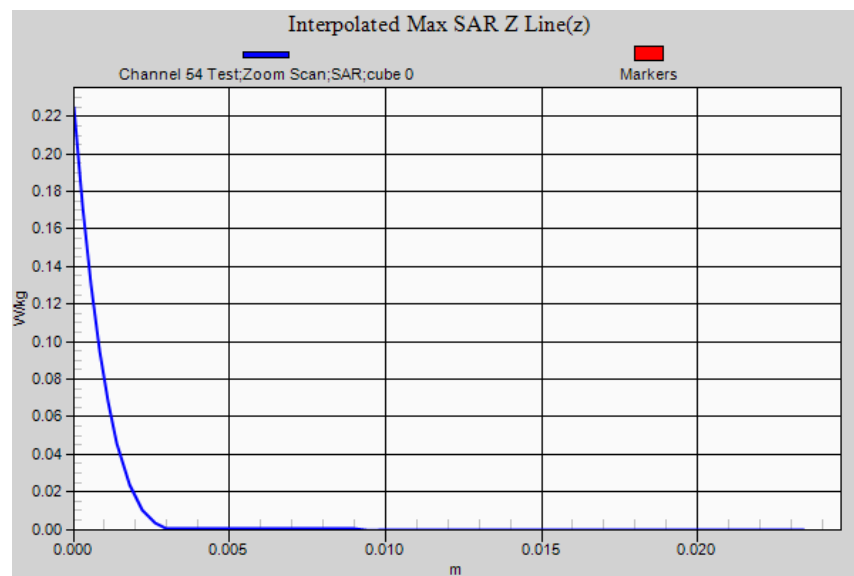

Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

Test Lab: EMCTech

Test File: M150814 5200 MHz WLAN FCC.da52:2

DUT Name: Fujitsu Tablet with 11 abgn/ac WLAN, Type: 8260NGW, Serial: WFM (MAC):A4:34:D9:09:92:96**Configuration: Body Lap Held ANT 1 WWAN Ant. IN (OFDM) 26-Aug-2015**

Communication System: 0 - OFDM 5 GHz HT0 (80 MHz); Communication System Band: 5.2 GHz Band;

Frequency: 5210 MHz, Communication System PAR: 0.00 dB; PMF: 0.00; Duty Cycle: 1:1.00

Medium Parameters used: $f=5209.6$ MHz; $\sigma = 5.19$ S/m; $\epsilon_r = 49.3$; $\rho = 1000.0$ g/cm³

Phantom section: Flat Section

DASY Configuration:

Probe: EX3DV4 - SN7358; ConvF: (4.67,4.67,4.67); Calibrated: 21/04/2015;

Sensor-Surface: 1.4 mm (Mechanical Surface Detection)


Electronics: DAE3 Sn442; Calibrated: 3/12/2014

Phantom: ELI v4.0 (30deg probe tilt); Type: QDOVA001BB; Serial: TP:1101

DASY52 52.8.8(1222); SEMCAD X Version 14.6.10 (7331)


Body Lap Held ANT 1 WWAN Ant. IN (OFDM) 26-Aug-2015/Channel 42 Test/Area Scan (61x91x1): Interpolated grid: dx=1.0 mm, dy=1.0 mm; Maximum value of SAR (interpolated) = 0.203 W/kg**Body Lap Held ANT 1 WWAN Ant. IN (OFDM) 26-Aug-2015/Channel 42 Test/Zoom Scan (31x31x61)/Cube 0:**Interpolated grid: dx=0.8 mm, dy=0.8 mm, dz=0.4 mm; Reference Value = 3.125 V/m; **Power Drift = -0.18 dB****Averaged SAR: SAR(1g) = 0.040 W/kg; SAR(10g) = 0.009 W/kg**

Maximum value of SAR (interpolated) = 0.478 W/kg

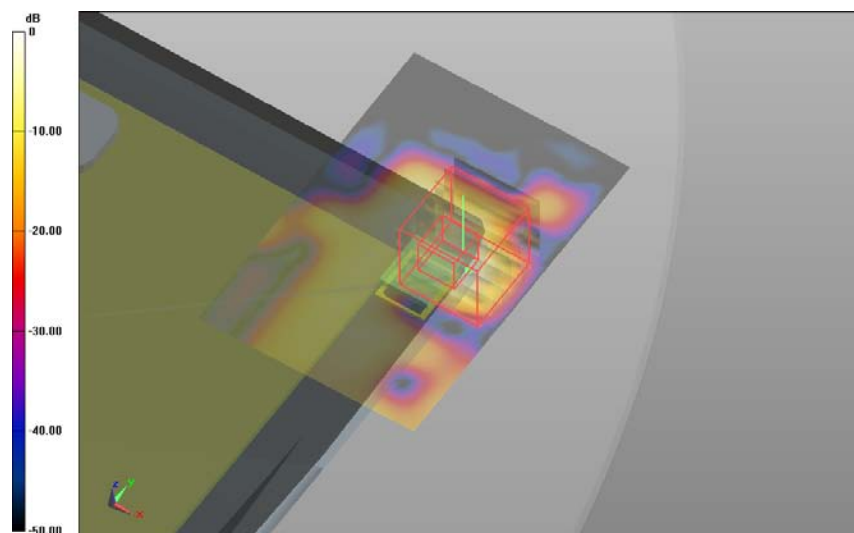

0 dB = 0.203 W/kg = -6.93 dBW/kg

SAR Measurement Plot 3

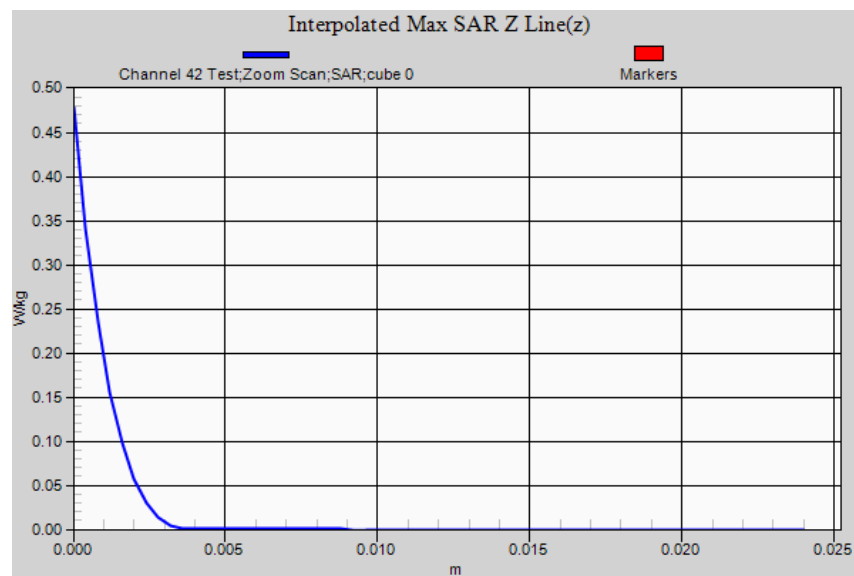

Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

Test Lab: EMCTech

Test File: M150814 5200 MHz WLAN FCC.da52:2

DUT Name: Fujitsu Tablet with 11 abgn/ac WLAN, Type: 8260NGW, Serial: WFM (MAC):A4:34:D9:09:92:96**Configuration: Body Lap Held ANT 1 WWAN Ant. IN (OFDM) 26-Aug-2015**

Communication System: 0 - OFDM 5 GHz HT0 (40 MHz); Communication System Band: 5.2 GHz Band;

Frequency: 5270 MHz, Communication System PAR: 0.00 dB; PMF: 1.00; Duty Cycle: 1:1.00

Medium Parameters used: $f=5270.65$ MHz; $\sigma = 5.31$ S/m; $\epsilon_r = 49.1$; $\rho = 1000.0$ g/cm³

Phantom section: Flat Section

DASY Configuration:

Probe: EX3DV4 - SN7358; ConvF: (4.67,4.67,4.67); Calibrated: 21/04/2015;

Sensor-Surface: 1.4 mm (Mechanical Surface Detection (Locations From Previous Scan Used))


Electronics: DAE3 Sn442; Calibrated: 3/12/2014

Phantom: ELI v4.0 (30deg probe tilt); Type: QDOVA001BB; Serial: TP:1101

DASY52 52.8.8(1222); SEMCAD X Version 14.6.10 (7331)

Body Lap Held ANT 1 WWAN Ant. IN (OFDM) 26-Aug-2015/Channel 54 Test/Area Scan (61x91x1): Interpolated grid: dx=1.0 mm, dy=1.0 mm; Maximum value of SAR (interpolated) = 0.182 W/kg**Body Lap Held ANT 1 WWAN Ant. IN (OFDM) 26-Aug-2015/Channel 54 Test/Zoom Scan (31x31x61)/Cube 0:**Interpolated grid: dx=0.8 mm, dy=0.8 mm, dz=0.4 mm; Reference Value = 3.041 V/m; **Power Drift = 0.16 dB****Averaged SAR: SAR(1g) = 0.025 W/kg; SAR(10g) = 0.008 W/kg**

Maximum value of SAR (interpolated) = 0.320 W/kg

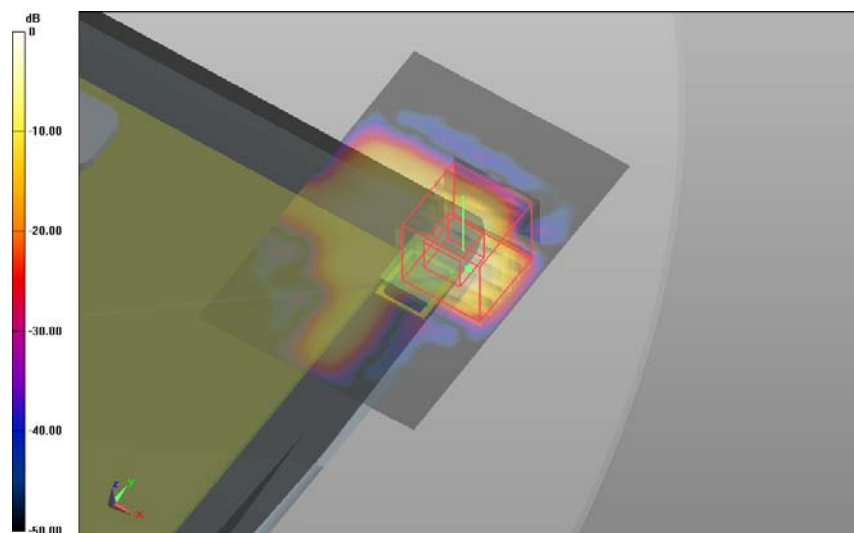


0 dB = 0.182 W/kg = -7.40 dBW/kg

SAR Measurement Plot 4



Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

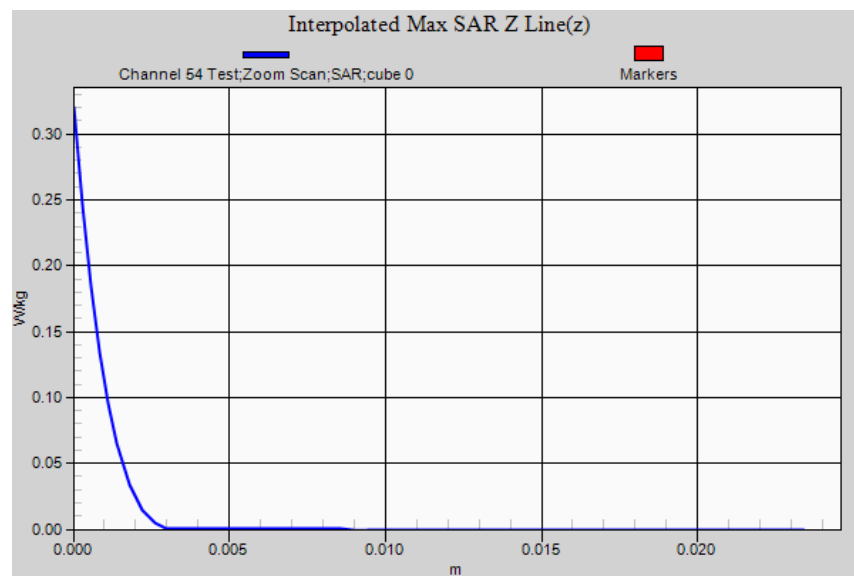

Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

Test Lab: EMCTech

Test File: M150814 5200 MHz WLAN FCC.da52:2

DUT Name: Fujitsu Tablet with 11 abgn/ac WLAN, Type: 8260NGW, Serial: WFM (MAC):A4:34:D9:09:92:96**Configuration: Body Lap Held ANT 1 WWAN Ant. IN (OFDM) 26-Aug-2015**

Communication System: 0 - OFDM 5 GHz HT0 (20 MHz); Communication System Band: 5.2 GHz; Frequency: 5300 MHz, Communication System PAR: 0.00 dB; PMF: 0.00; Duty Cycle: 1:1.00

Medium Parameters used: $f=5300.35$ MHz; $\sigma = 5.37$ S/m; $\epsilon_r = 49.0$; $\rho = 1000.0$ g/cm³

Phantom section: Flat Section

DASY Configuration:

Probe: EX3DV4 - SN7358; ConvF: (4.67,4.67,4.67); Calibrated: 21/04/2015;

Sensor-Surface: 1.4 mm (Mechanical Surface Detection (Locations From Previous Scan Used))


Electronics: DAE3 Sn442; Calibrated: 3/12/2014

Phantom: ELI v4.0 (30deg probe tilt); Type: QDOVA001BB; Serial: TP:1101

DASY52 52.8.8(1222); SEMCAD X Version 14.6.10 (7331)

Body Lap Held ANT 1 WWAN Ant. IN (OFDM) 26-Aug-2015/Channel 60 Test/Area Scan (61x91x1): Interpolated grid: dx=1.0 mm, dy=1.0 mm; Maximum value of SAR (interpolated) = 0.190 W/kg**Body Lap Held ANT 1 WWAN Ant. IN (OFDM) 26-Aug-2015/Channel 60 Test/Zoom Scan (31x31x61)/Cube 0:**Interpolated grid: dx=0.8 mm, dy=0.8 mm, dz=0.4 mm; Reference Value = 2.991 V/m; **Power Drift = -0.03 dB****Averaged SAR: SAR(1g) = 0.021 W/kg; SAR(10g) = 0.006 W/kg**

Maximum value of SAR (interpolated) = 0.265 W/kg

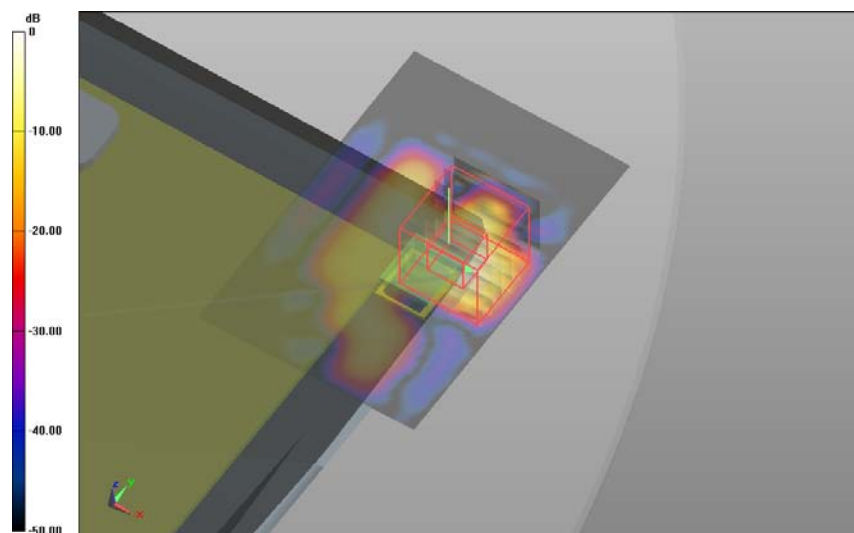


0 dB = 0.190 W/kg = -7.21 dBW/kg

SAR Measurement Plot 5



Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

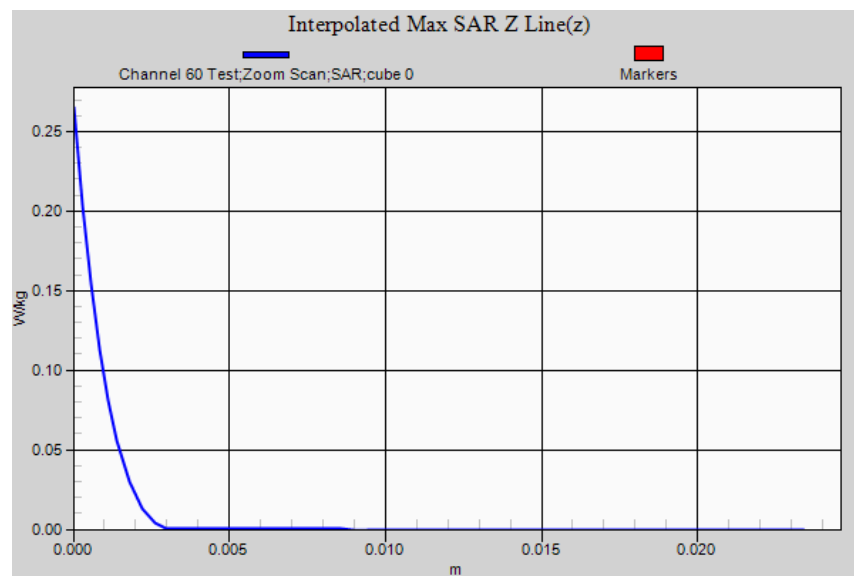

Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

Test Lab: EMCTech

Test File: M150814 5200 MHz WLAN FCC.da52:2

DUT Name: Fujitsu Tablet with 11 abgn/ac WLAN, Type: 8260NGW, Serial: WFM (MAC):A4:34:D9:09:92:96**Configuration: Body Lap Held ANT 1 WWAN Ant. IN (OFDM) 26-Aug-2015**

Communication System: 0 - OFDM 5 GHz HT0 (20 MHz); Communication System Band: 5.2 GHz; Frequency: 5320 MHz, Communication System PAR: 0.00 dB; PMF: 0.00; Duty Cycle: 1:1.00

Medium Parameters used: $f=5320.15$ MHz; $\sigma = 5.40$ S/m; $\epsilon_r = 48.9$; $\rho = 1000.0$ g/cm³

Phantom section: Flat Section

DASY Configuration:

Probe: EX3DV4 - SN7358; ConvF: (4.67,4.67,4.67); Calibrated: 21/04/2015;

Sensor-Surface: 1.4 mm (Mechanical Surface Detection (Locations From Previous Scan Used))


Electronics: DAE3 Sn442; Calibrated: 3/12/2014

Phantom: ELI v4.0 (30deg probe tilt); Type: QDOVA001BB; Serial: TP:1101

DASY52 52.8.8(1222); SEMCAD X Version 14.6.10 (7331)

Body Lap Held ANT 1 WWAN Ant. IN (OFDM) 26-Aug-2015/Channel 64 Test/Area Scan (61x91x1): Interpolated grid: $dx=1.0$ mm, $dy=1.0$ mm; Maximum value of SAR (interpolated) = 0.134 W/kg**Body Lap Held ANT 1 WWAN Ant. IN (OFDM) 26-Aug-2015/Channel 64 Test/Zoom Scan (31x31x61)/Cube 0:**Interpolated grid: $dx=0.8$ mm, $dy=0.8$ mm, $dz=0.4$ mm; Reference Value = 2.839 V/m; **Power Drift = -0.17 dB****Averaged SAR: SAR(1g) = 0.025 W/kg; SAR(10g) = 0.008 W/kg**

Maximum value of SAR (interpolated) = 0.327 W/kg

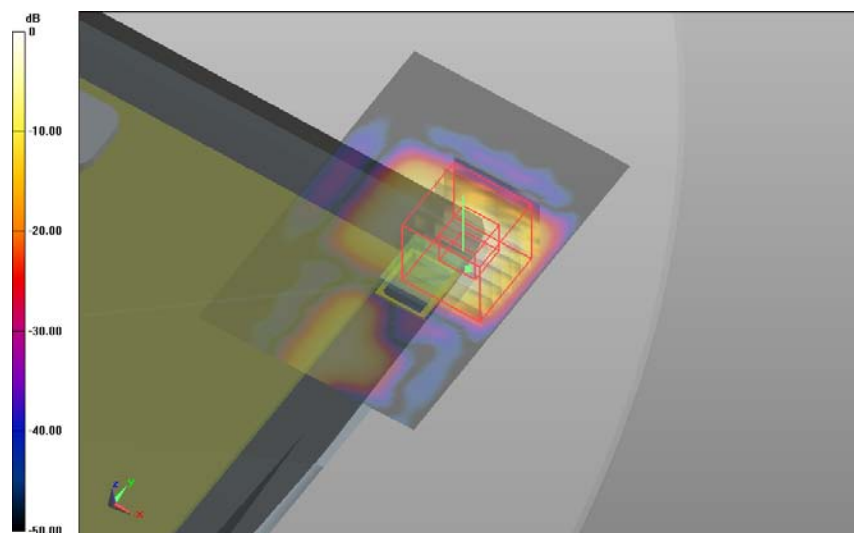


0 dB = 0.134 W/kg = -8.73 dBW/kg

SAR Measurement Plot 6



Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

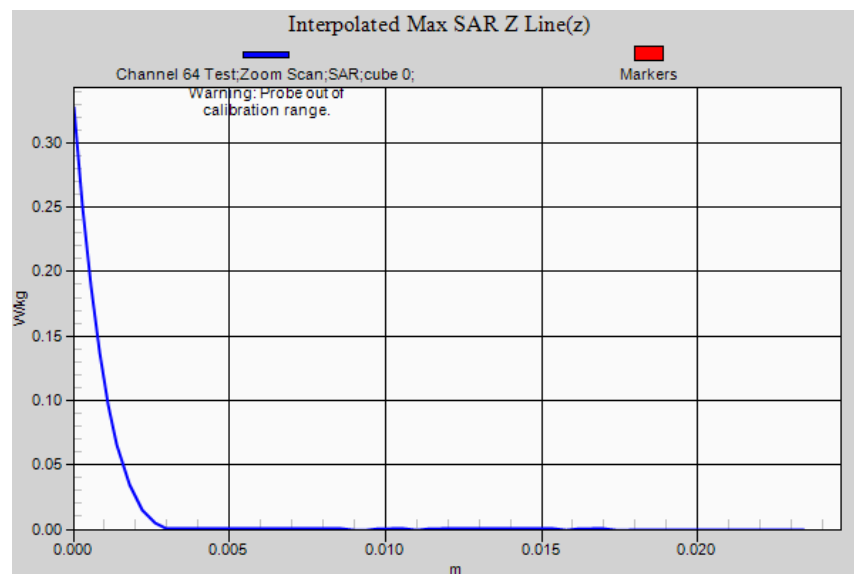

Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

Test Lab: EMCTech

Test File: M150814 5200 MHz WLAN FCC.da52:3

DUT Name: Fujitsu Tablet with 11 abgn/ac WLAN, Type: 8260NGW, Serial: WFM (MAC):A4:34:D9:09:92:96**Configuration: Body Lap Held ANT 2 WWAN Ant. IN (OFDM) 26-Aug-2015**

Communication System: 0 - OFDM 5 GHz HT0 (80 MHz); Communication System Band: 5.2 GHz Band;

Frequency: 5210 MHz, Communication System PAR: 0.00 dB; PMF: 0.00; Duty Cycle: 1:1.00

Medium Parameters used: $f=5209.6$ MHz; $\sigma = 5.19$ S/m; $\epsilon_r = 49.3$; $\rho = 1000.0$ g/cm³

Phantom section: Flat Section

DASY Configuration:

Probe: EX3DV4 - SN7358; ConvF: (4.67,4.67,4.67); Calibrated: 21/04/2015;

Sensor-Surface: 1.4 mm (Mechanical Surface Detection)


Electronics: DAE3 Sn442; Calibrated: 3/12/2014

Phantom: ELI v4.0 (30deg probe tilt); Type: QDOVA001BB; Serial: TP:1101

DASY52 52.8.8(1222); SEMCAD X Version 14.6.10 (7331)

Body Lap Held ANT 2 WWAN Ant. IN (OFDM) 26-Aug-2015/Channel 42 Test/Area Scan (61x91x1): Interpolated grid: dx=1.0 mm, dy=1.0 mm; Maximum value of SAR (interpolated) = 0.108 W/kg**Body Lap Held ANT 2 WWAN Ant. IN (OFDM) 26-Aug-2015/Channel 42 Test/Zoom Scan (31x31x61)/Cube 0:**Interpolated grid: dx=0.8 mm, dy=0.8 mm, dz=0.4 mm; Reference Value = 2.851 V/m; **Power Drift = 0.01 dB****Averaged SAR: SAR(1g) = 0.026 W/kg; SAR(10g) = 0.007 W/kg**

Maximum value of SAR (interpolated) = 0.356 W/kg

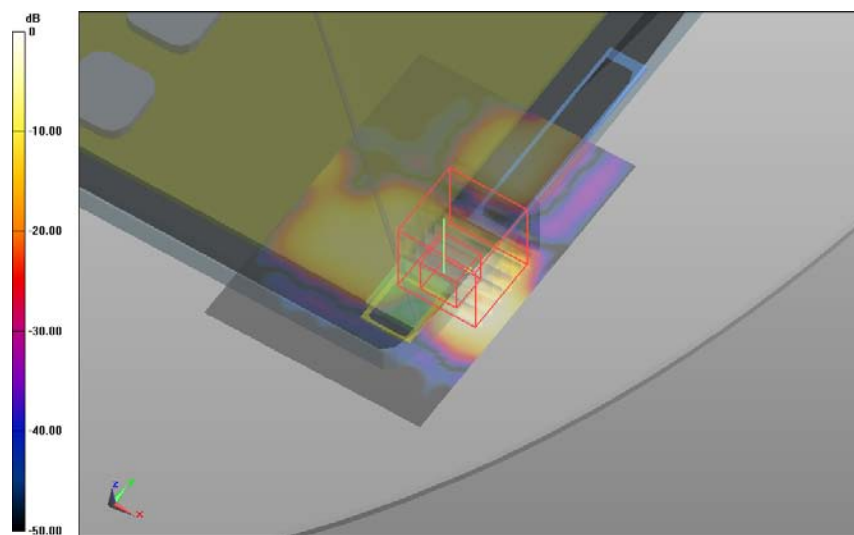


0 dB = 0.108 W/kg = -9.67 dBW/kg

SAR Measurement Plot 7



Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

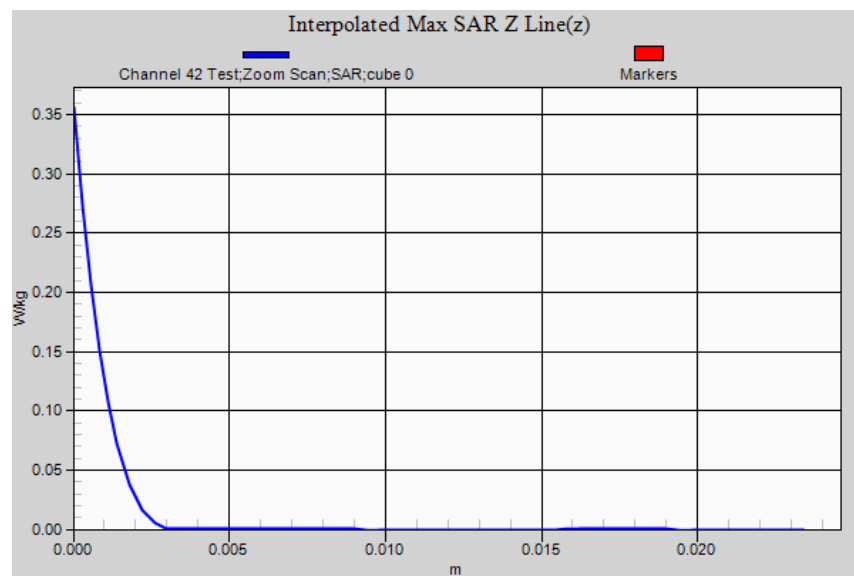

Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

Test Lab: EMCTech

Test File: M150814 5200 MHz WLAN FCC.da52:3

DUT Name: Fujitsu Tablet with 11 abgn/ac WLAN, Type: 8260NGW, Serial: WFM (MAC):A4:34:D9:09:92:96**Configuration: Body Lap Held ANT 2 WWAN Ant. IN (OFDM) 26-Aug-2015**

Communication System: 0 - OFDM 5 GHz HT0 (40 MHz); Communication System Band: 5.2 GHz Band;

Frequency: 5270 MHz, Communication System PAR: 0.00 dB; PMF: 1.00; Duty Cycle: 1:1.00

Medium Parameters used: $f=5270.65$ MHz; $\sigma = 5.31$ S/m; $\epsilon_r = 49.1$; $\rho = 1000.0$ g/cm³

Phantom section: Flat Section

DASY Configuration:

Probe: EX3DV4 - SN7358; ConvF: (4.67,4.67,4.67); Calibrated: 21/04/2015;

Sensor-Surface: 1.4 mm (Mechanical Surface Detection)


Electronics: DAE3 Sn442; Calibrated: 3/12/2014

Phantom: ELI v4.0 (30deg probe tilt); Type: QDOVA001BB; Serial: TP:1101

DASY52 52.8.8(1222); SEMCAD X Version 14.6.10 (7331)

Body Lap Held ANT 2 WWAN Ant. IN (OFDM) 26-Aug-2015/Channel 54 Test/Area Scan (61x91x1): Interpolated grid: dx=1.0 mm, dy=1.0 mm; Maximum value of SAR (interpolated) = 0.254 W/kg**Body Lap Held ANT 2 WWAN Ant. IN (OFDM) 26-Aug-2015/Channel 54 Test/Zoom Scan (31x31x61)/Cube 0:**Interpolated grid: dx=0.8 mm, dy=0.8 mm, dz=0.4 mm; Reference Value = 2.906 V/m; **Power Drift = -0.17 dB****Averaged SAR: SAR(1g) = 0.028 W/kg; SAR(10g) = 0.009 W/kg**

Maximum value of SAR (interpolated) = 0.284 W/kg

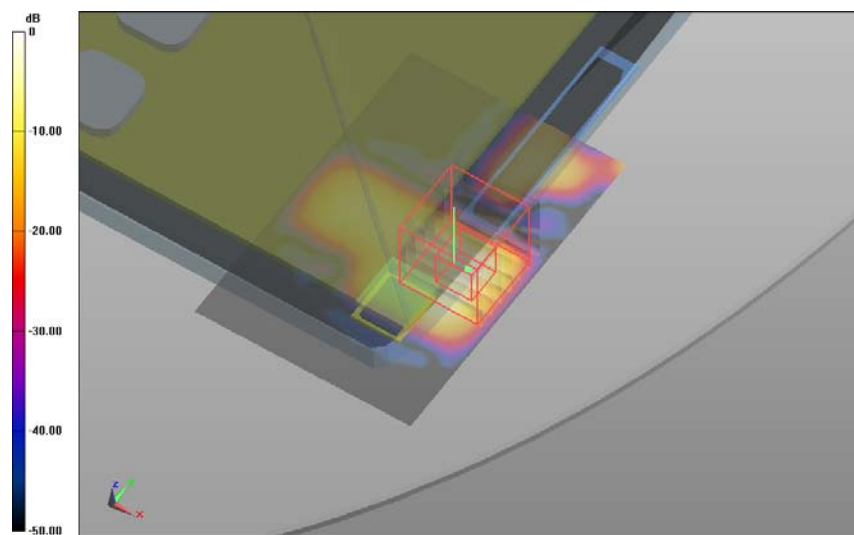


0 dB = 0.254 W/kg = -5.95 dBW/kg

SAR Measurement Plot 8



Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

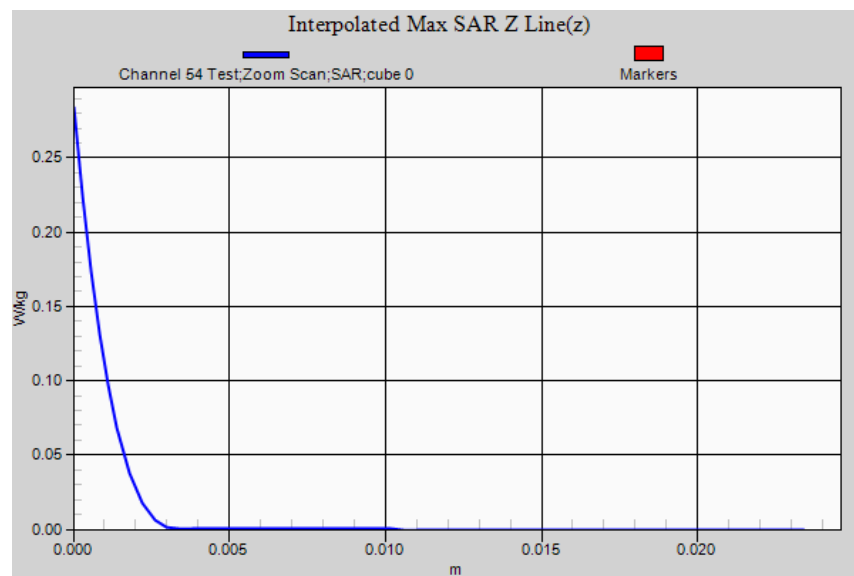

Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

Test Lab: EMCTech

Test File: M150814 5200 MHz WLAN FCC.da52:3

DUT Name: Fujitsu Tablet with 11 abgn/ac WLAN, Type: 8260NGW, Serial: WFM (MAC):A4:34:D9:09:92:96**Configuration: Body Lap Held ANT 2 WWAN Ant. IN (OFDM) 26-Aug-2015**

Communication System: 0 - OFDM 5 GHz HT0 (40 MHz); Communication System Band: 5.2 GHz Band;

Frequency: 5310 MHz, Communication System PAR: 0.00 dB; PMF: 1.00; Duty Cycle: 1:1.00

Medium Parameters used: $f=5310.25$ MHz; $\sigma = 5.39$ S/m; $\epsilon_r = 49.0$; $\rho = 1000.0$ g/cm³

Phantom section: Flat Section

DASY Configuration:

Probe: EX3DV4 - SN7358; ConvF: (4.67,4.67,4.67); Calibrated: 21/04/2015;

Sensor-Surface: 1.4 mm (Mechanical Surface Detection (Locations From Previous Scan Used))


Electronics: DAE3 Sn442; Calibrated: 3/12/2014

Phantom: ELI v4.0 (30deg probe tilt); Type: QDOVA001BB; Serial: TP:1101

DASY52 52.8.8(1222); SEMCAD X Version 14.6.10 (7331)

Body Lap Held ANT 2 WWAN Ant. IN (OFDM) 26-Aug-2015/Channel 62 Test/Area Scan (61x91x1): Interpolated grid: dx=1.0 mm, dy=1.0 mm; Maximum value of SAR (interpolated) = 0.211 W/kg**Body Lap Held ANT 2 WWAN Ant. IN (OFDM) 26-Aug-2015/Channel 62 Test/Zoom Scan (31x31x61)/Cube 0:**Interpolated grid: dx=0.8 mm, dy=0.8 mm, dz=0.4 mm; Reference Value = 3.073 V/m; **Power Drift = 0.02 dB****Averaged SAR: SAR(1g) = 0.031 W/kg; SAR(10g) = 0.010 W/kg**

Maximum value of SAR (interpolated) = 0.260 W/kg

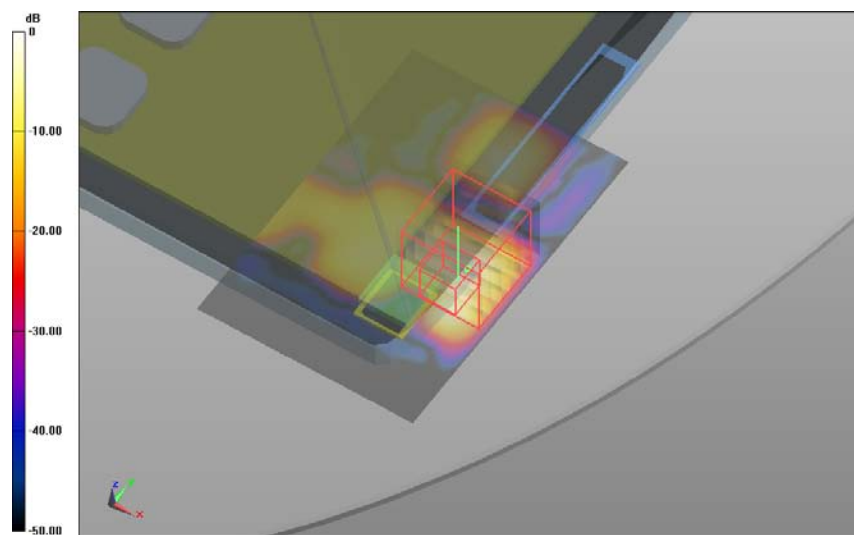


0 dB = 0.211 W/kg = -6.76 dBW/kg

SAR Measurement Plot 9



Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

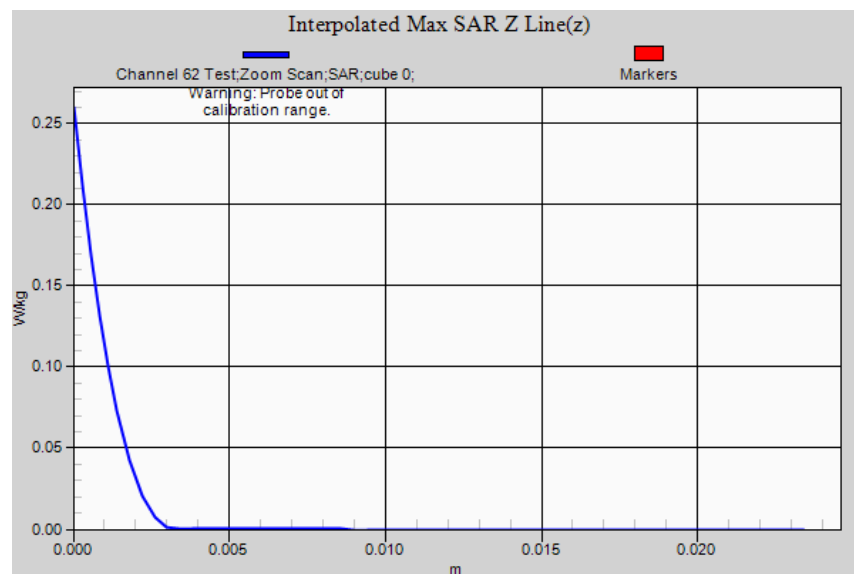

Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

Test Lab: EMCTech

Test File: M150814 5200 MHz WLAN FCC.da52:4

DUT Name: Fujitsu Tablet with 11 abgn/ac WLAN, Type: 8260NGW, Serial: WFM (MAC):A4:34:D9:09:92:96**Configuration: Body Lap Held ANT 2 WWAN Ant. OUT (OFDM) 26-Aug-2015**

Communication System: 0 - OFDM 5 GHz HT0 (40 MHz); Communication System Band: 5.2 GHz Band;

Frequency: 5270 MHz, Communication System PAR: 0.00 dB; PMF: 1.00; Duty Cycle: 1:1.00

Medium Parameters used: $f=5270.65$ MHz; $\sigma = 5.31$ S/m; $\epsilon_r = 49.1$; $\rho = 1000.0$ g/cm³

Phantom section: Flat Section

DASY Configuration:

Probe: EX3DV4 - SN7358; ConvF: (4.67,4.67,4.67); Calibrated: 21/04/2015;

Sensor-Surface: 1.4 mm (Mechanical Surface Detection)


Electronics: DAE3 Sn442; Calibrated: 3/12/2014

Phantom: ELI v4.0 (30deg probe tilt); Type: QDOVA001BB; Serial: TP:1101

DASY52 52.8.8(1222); SEMCAD X Version 14.6.10 (7331)

Body Lap Held ANT 2 WWAN Ant. OUT (OFDM) 26-Aug-2015/Channel 54 Test/Area Scan (61x91x1):Interpolated grid: $dx=1.0$ mm, $dy=1.0$ mm; Maximum value of SAR (interpolated) = 0.165 W/kg**Body Lap Held ANT 2 WWAN Ant. OUT (OFDM) 26-Aug-2015/Channel 54 Test/Zoom Scan (31x31x61)/Cube****0:** Interpolated grid: $dx=0.8$ mm, $dy=0.8$ mm, $dz=0.4$ mm; Reference Value = 2.965 V/m; **Power Drift = -0.19 dB****Averaged SAR: SAR(1g) = 0.027 W/kg; SAR(10g) = 0.009 W/kg**

Maximum value of SAR (interpolated) = 0.243 W/kg

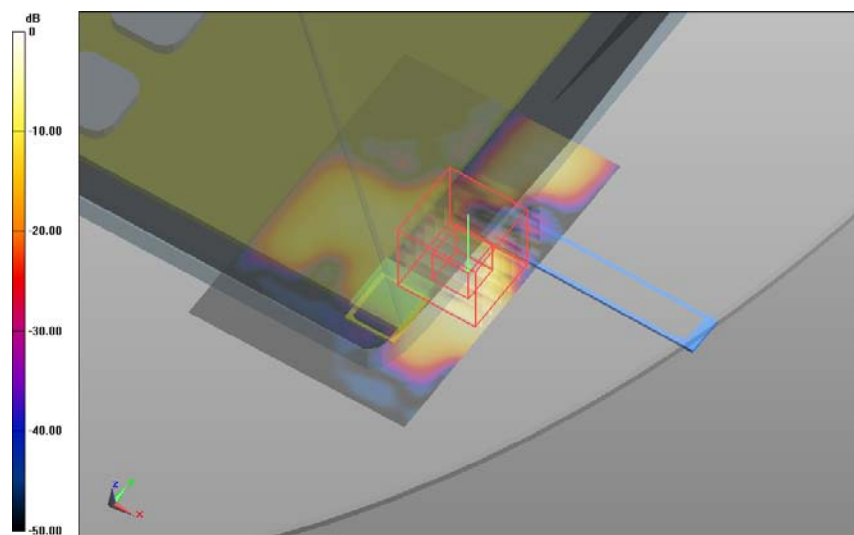


0 dB = 0.165 W/kg = -7.83 dBW/kg

SAR Measurement Plot 10



Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

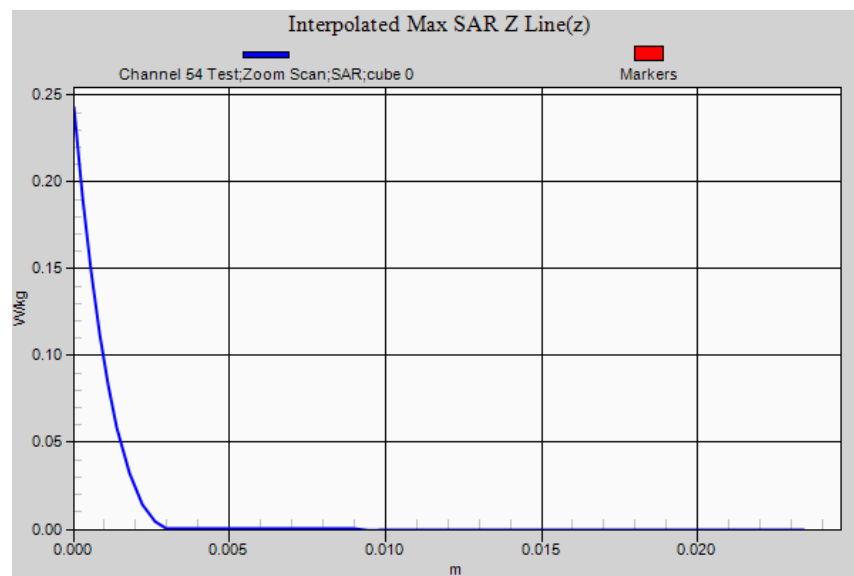

Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

Test Lab: EMCTech

Test File: M150814 5200 MHz WLAN FCC.da52:5

DUT Name: Fujitsu Tablet with 11 abgn/ac WLAN, Type: 8260NGW, Serial: WFM (MAC):A4:34:D9:09:92:96**Configuration: Edge 1 ANT 1 WWAN Ant. IN (OFDM) 26-Aug-2015**

Communication System: 0 - OFDM 5 GHz HT0 (80 MHz); Communication System Band: 5.2 GHz Band;

Frequency: 5210 MHz, Communication System PAR: 0.00 dB; PMF: 0.00; Duty Cycle: 1:1.00

Medium Parameters used: $f=5209.6$ MHz; $\sigma = 5.19$ S/m; $\epsilon_r = 49.3$; $\rho = 1000.0$ g/cm³

Phantom section: Flat Section

DASY Configuration:

Probe: EX3DV4 - SN7358; ConvF: (4.67,4.67,4.67); Calibrated: 21/04/2015;

Sensor-Surface: 1.4 mm (Mechanical Surface Detection)

Electronics: DAE3 Sn442; Calibrated: 3/12/2014

Phantom: ELI v4.0 (30deg probe tilt); Type: QDOVA001BB; Serial: TP:1101


DASY52 52.8.8(1222); SEMCAD X Version 14.6.10 (7331)

Edge 1 ANT 1 WWAN Ant. IN (OFDM) 26-Aug-2015/Channel 42 Test/Area Scan (61x91x1): Interpolated grid:

dx=1.0 mm, dy=1.0 mm; Maximum value of SAR (interpolated) = 2.020 W/kg


Edge 1 ANT 1 WWAN Ant. IN (OFDM) 26-Aug-2015/Channel 42 Test/Zoom Scan (31x31x61)/Cube 0:Interpolated grid: dx=0.8 mm, dy=0.8 mm, dz=0.4 mm; Reference Value = 21.994 V/m; **Power Drift = -0.14 dB****Averaged SAR: SAR(1g) = 0.759 W/kg; SAR(10g) = 0.176 W/kg**

Maximum value of SAR (interpolated) = 3.550 W/kg

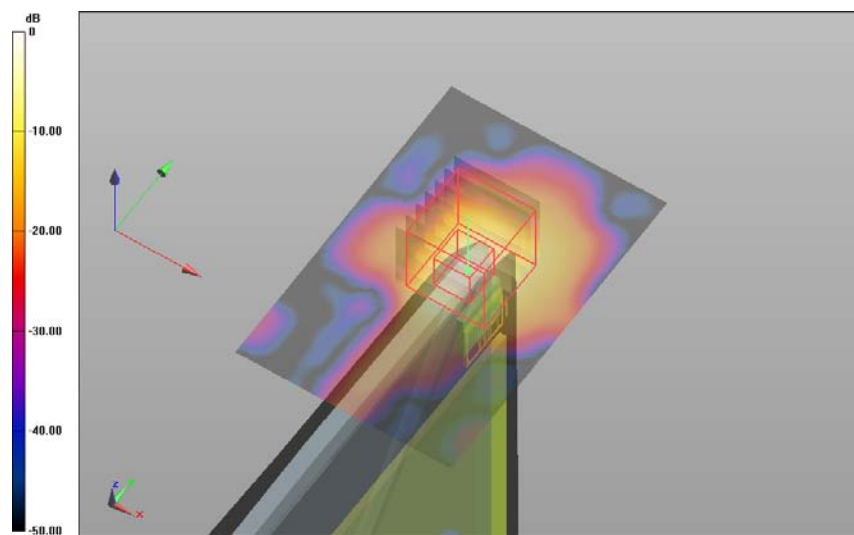

0 dB = 2.02 W/kg = 3.05 dBW/kg

SAR Measurement Plot 11

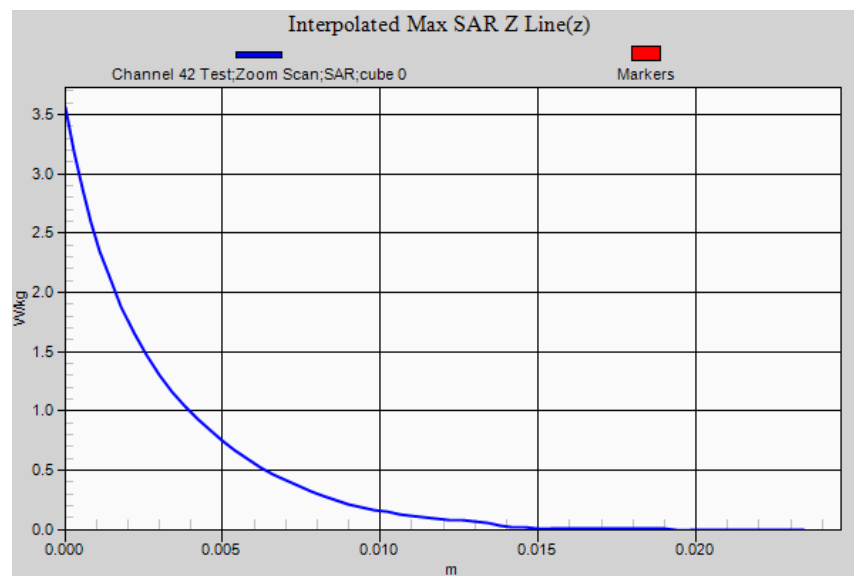

Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

Test Lab: EMCTech

Test File: M150814 5200 MHz WLAN FCC.da52:5

DUT Name: Fujitsu Tablet with 11 abgn/ac WLAN, Type: 8260NGW, Serial: WFM (MAC):A4:34:D9:09:92:96**Configuration: Edge 1 ANT 1 WWAN Ant. IN (OFDM) 26-Aug-2015**

Communication System: 0 - OFDM 5 GHz HT0 (40 MHz); Communication System Band: 5.2 GHz Band;

Frequency: 5270 MHz, Communication System PAR: 0.00 dB; PMF: 1.00; Duty Cycle: 1:1.00

Medium Parameters used: $f=5270.65$ MHz; $\sigma = 5.31$ S/m; $\epsilon_r = 49.1$; $\rho = 1000.0$ g/cm³

Phantom section: Flat Section

DASY Configuration:

Probe: EX3DV4 - SN7358; ConvF: (4.67,4.67,4.67); Calibrated: 21/04/2015;

Sensor-Surface: 1.4 mm (Mechanical Surface Detection (Locations From Previous Scan Used))


Electronics: DAE3 Sn442; Calibrated: 3/12/2014

Phantom: ELI v4.0 (30deg probe tilt); Type: QDOVA001BB; Serial: TP:1101

DASY52 52.8.8(1222); SEMCAD X Version 14.6.10 (7331)

Edge 1 ANT 1 WWAN Ant. IN (OFDM) 26-Aug-2015/Channel 54 Test/Area Scan (61x91x1): Interpolated grid: dx=1.0 mm, dy=1.0 mm; Maximum value of SAR (interpolated) = 2.090 W/kg**Edge 1 ANT 1 WWAN Ant. IN (OFDM) 26-Aug-2015/Channel 54 Test/Zoom Scan (31x31x61)/Cube 0:**Interpolated grid: dx=0.8 mm, dy=0.8 mm, dz=0.4 mm; Reference Value = 21.877 V/m; **Power Drift = -0.14 dB****Averaged SAR: SAR(1g) = 0.766 W/kg; SAR(10g) = 0.177 W/kg**

Maximum value of SAR (interpolated) = 3.700 W/kg

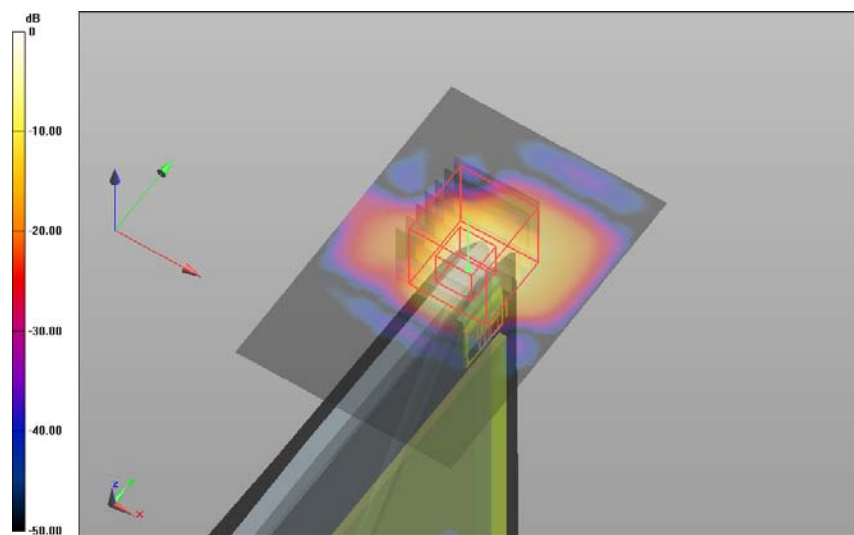


0 dB = 2.09 W/kg = 3.20 dBW/kg

SAR Measurement Plot 12



Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

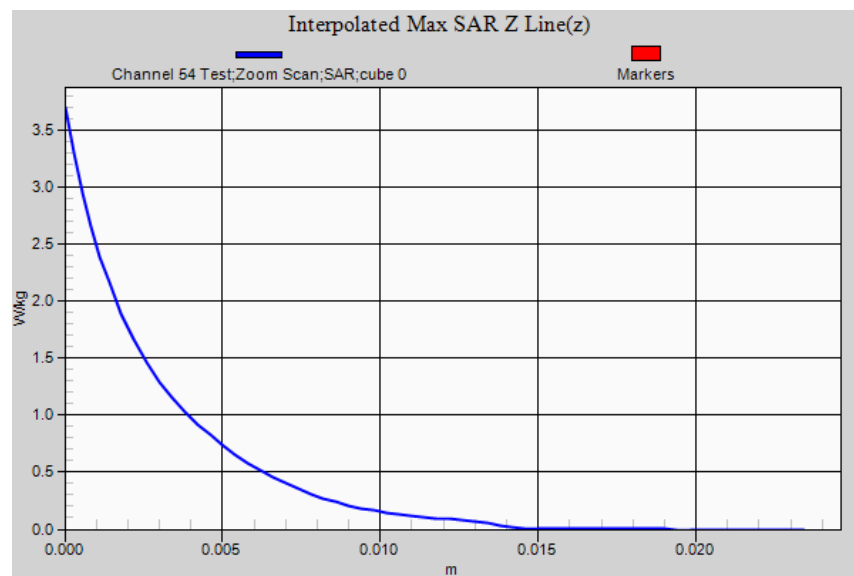

Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

Test Lab: EMCTech

Test File: M150814 5200 MHz WLAN FCC.da52:5

DUT Name: Fujitsu Tablet with 11 abgn/ac WLAN, Type: 8260NGW, Serial: WFM (MAC):A4:34:D9:09:92:96**Configuration: Edge 1 ANT 1 WWAN Ant. IN (OFDM) 26-Aug-2015**

Communication System: 0 - OFDM 5 GHz HT0 (20 MHz); Communication System Band: 5.2 GHz; Frequency: 5300 MHz, Communication System PAR: 0.00 dB; PMF: 0.00; Duty Cycle: 1:1.00

Medium Parameters used: $f=5300.35$ MHz; $\sigma = 5.37$ S/m; $\epsilon_r = 49.0$; $\rho = 1000.0$ g/cm³

Phantom section: Flat Section

DASY Configuration:

Probe: EX3DV4 - SN7358; ConvF: (4.67,4.67,4.67); Calibrated: 21/04/2015;

Sensor-Surface: 1.4 mm (Mechanical Surface Detection)


Electronics: DAE3 Sn442; Calibrated: 3/12/2014

Phantom: ELI v4.0 (30deg probe tilt); Type: QDOVA001BB; Serial: TP:1101

DASY52 52.8.8(1222); SEMCAD X Version 14.6.10 (7331)

Edge 1 ANT 1 WWAN Ant. IN (OFDM) 26-Aug-2015/Channel 60 Test/Area Scan (61x91x1): Interpolated grid: dx=1.0 mm, dy=1.0 mm; Maximum value of SAR (interpolated) = 2.050 W/kg**Edge 1 ANT 1 WWAN Ant. IN (OFDM) 26-Aug-2015/Channel 60 Test/Zoom Scan (31x31x61)/Cube 0:**Interpolated grid: dx=0.8 mm, dy=0.8 mm, dz=0.4 mm; Reference Value = 23.110 V/m; **Power Drift = -0.13 dB****Averaged SAR: SAR(1g) = 0.788 W/kg; SAR(10g) = 0.182 W/kg**

Maximum value of SAR (interpolated) = 3.820 W/kg

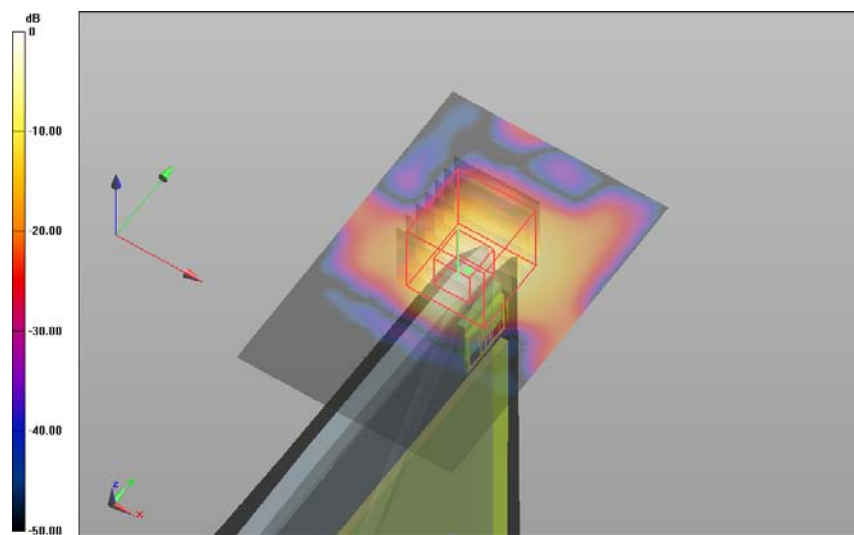


0 dB = 2.05 W/kg = 3.12 dBW/kg

SAR Measurement Plot 13



Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

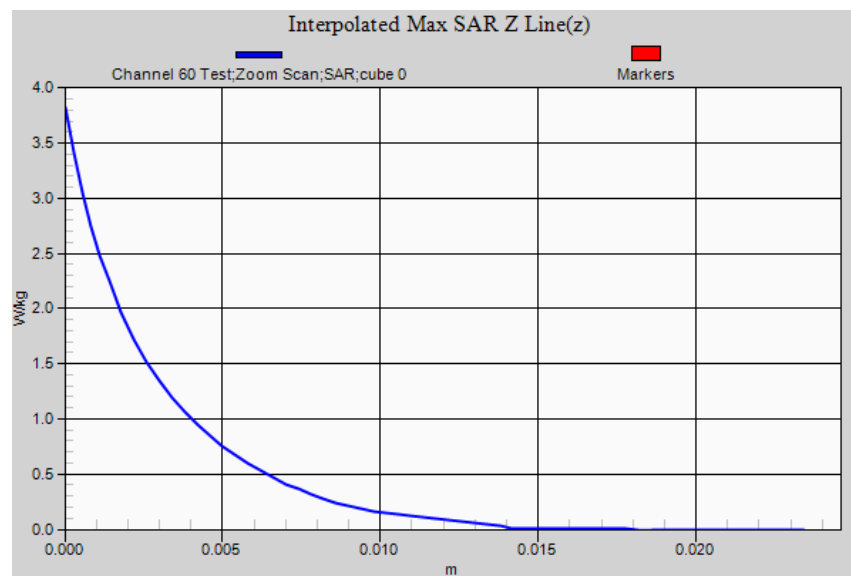

Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

Test Lab: EMCTech

Test File: M150814 5200 MHz WLAN FCC.da52:5

DUT Name: Fujitsu Tablet with 11 abgn/ac WLAN, Type: 8260NGW, Serial: WFM (MAC):A4:34:D9:09:92:96**Configuration: Edge 1 ANT 1 WWAN Ant. IN (OFDM) 26-Aug-2015**

Communication System: 0 - OFDM 5 GHz HT0 (20 MHz); Communication System Band: 5.2 GHz; Frequency: 5320 MHz, Communication System PAR: 0.00 dB; PMF: 0.00; Duty Cycle: 1:1.00

Medium Parameters used: $f=5320.15$ MHz; $\sigma = 5.40$ S/m; $\epsilon_r = 48.9$; $\rho = 1000.0$ g/cm³

Phantom section: Flat Section

DASY Configuration:

Probe: EX3DV4 - SN7358; ConvF: (4.67,4.67,4.67); Calibrated: 21/04/2015;

Sensor-Surface: 1.4 mm (Mechanical Surface Detection (Locations From Previous Scan Used))


Electronics: DAE3 Sn442; Calibrated: 3/12/2014

Phantom: ELI v4.0 (30deg probe tilt); Type: QDOVA001BB; Serial: TP:1101

DASY52 52.8.8(1222); SEMCAD X Version 14.6.10 (7331)

Edge 1 ANT 1 WWAN Ant. IN (OFDM) 26-Aug-2015/Channel 64 Test/Area Scan (61x91x1): Interpolated grid: dx=1.0 mm, dy=1.0 mm; Maximum value of SAR (interpolated) = 2.440 W/kg**Edge 1 ANT 1 WWAN Ant. IN (OFDM) 26-Aug-2015/Channel 64 Test/Zoom Scan (31x31x61)/Cube 0:**Interpolated grid: dx=0.8 mm, dy=0.8 mm, dz=0.4 mm; Reference Value = 23.552 V/m; **Power Drift = -0.14 dB****Averaged SAR: SAR(1g) = 0.891 W/kg; SAR(10g) = 0.207 W/kg**

Maximum value of SAR (interpolated) = 4.330 W/kg

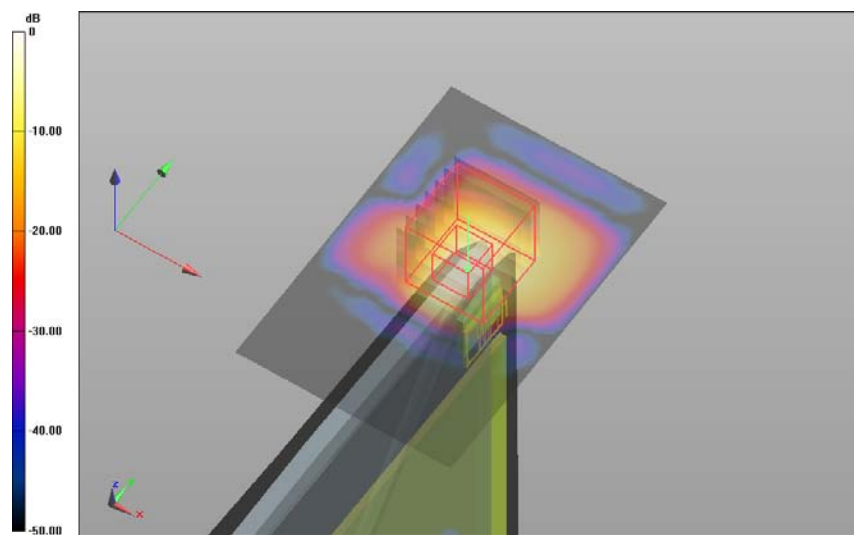


0 dB = 2.44 W/kg = 3.87 dBW/kg

SAR Measurement Plot 14



Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

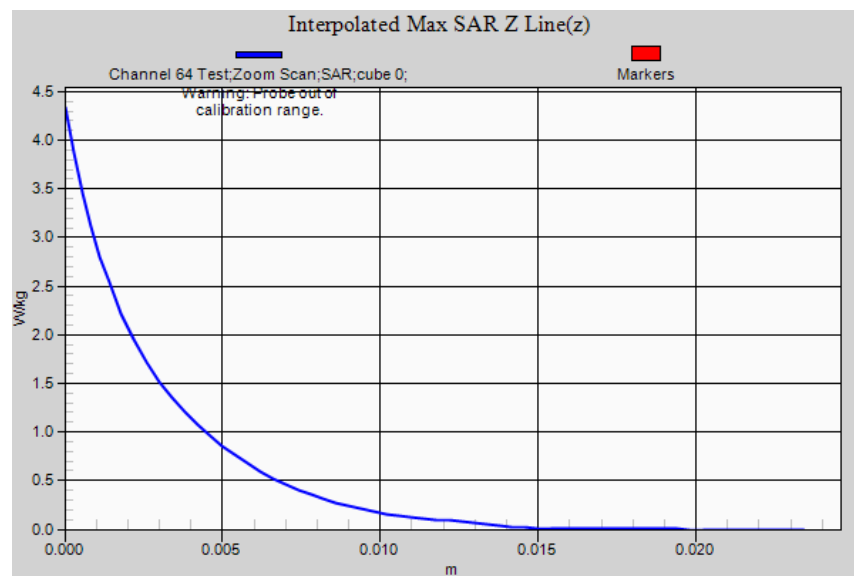

Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

Test Lab: EMCTech

Test File: M150814 5200 MHz WLAN FCC.da52:6

DUT Name: Fujitsu Tablet with 11 abgn/ac WLAN, Type: 8260NGW, Serial: WFM (MAC):A4:34:D9:09:92:96**Configuration: Edge 1 ANT 1 WWAN Ant. IN Variability (OFDM) 26-Aug-2015**

Communication System: 0 - OFDM 5 GHz HT0 (20 MHz); Communication System Band: 5.2 GHz; Frequency: 5320 MHz, Communication System PAR: 0.00 dB; PMF: 0.00; Duty Cycle: 1:1.00

Medium Parameters used: $f=5320.15$ MHz; $\sigma = 5.40$ S/m; $\epsilon_r = 48.9$; $\rho = 1000.0$ g/cm³

Phantom section: Flat Section

DASY Configuration:

Probe: EX3DV4 - SN7358; ConvF: (4.67,4.67,4.67); Calibrated: 21/04/2015;

Sensor-Surface: 1.4 mm (Mechanical Surface Detection)


Electronics: DAE3 Sn442; Calibrated: 3/12/2014

Phantom: ELI v4.0 (30deg probe tilt); Type: QDOVA001BB; Serial: TP:1101


DASY52 52.8.8(1222); SEMCAD X Version 14.6.10 (7331)

Edge 1 ANT 1 WWAN Ant. IN Variability (OFDM) 26-Aug-2015/Channel 64 Test/Area Scan (61x91x1):Interpolated grid: $dx=1.0$ mm, $dy=1.0$ mm; Maximum value of SAR (interpolated) = 2.120 W/kg**Edge 1 ANT 1 WWAN Ant. IN Variability (OFDM) 26-Aug-2015/Channel 64 Test/Zoom Scan****(31x31x61)/Cube 0:** Interpolated grid: $dx=0.8$ mm, $dy=0.8$ mm, $dz=0.4$ mm; Reference Value = 12.478 V/m;**Power Drift = -0.00 dB****Averaged SAR: SAR(1g) = 0.907 W/kg; SAR(10g) = 0.207 W/kg**

Maximum value of SAR (interpolated) = 4.460 W/kg

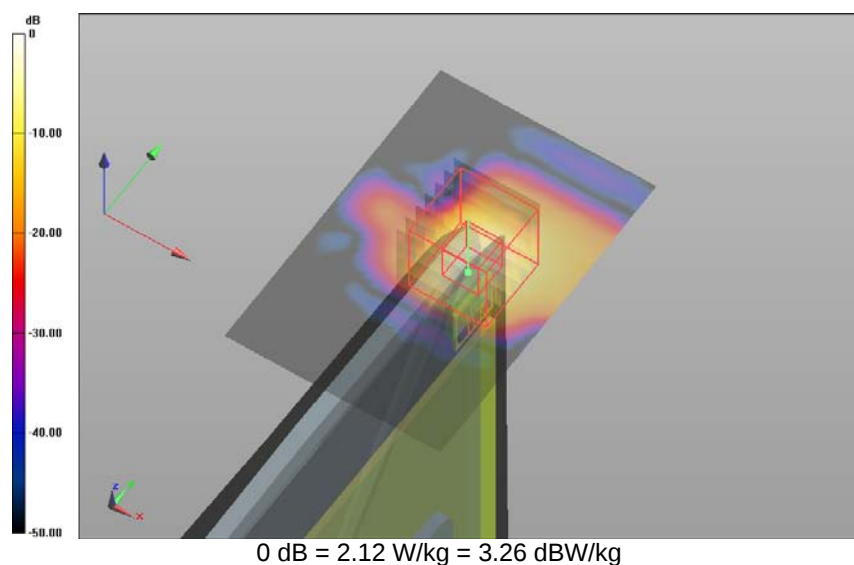

SAR Measurement Plot 15

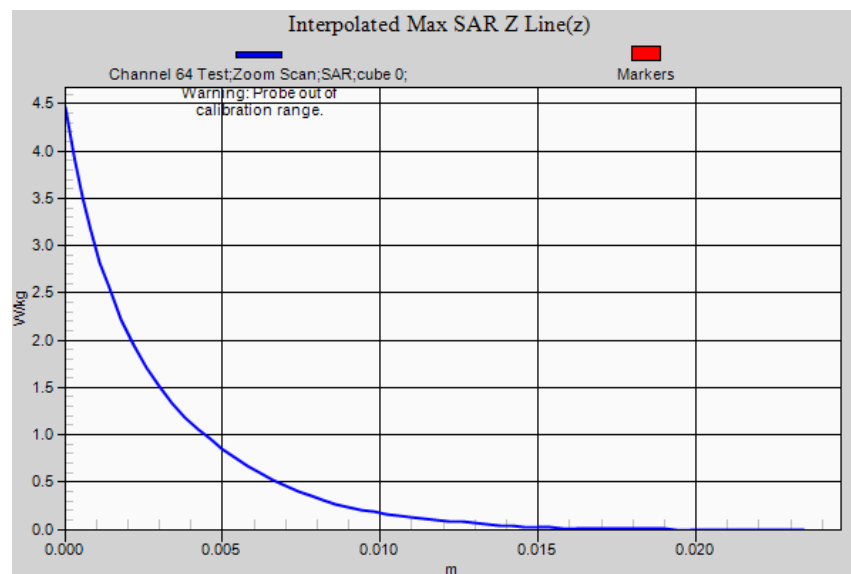

Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

Test Lab: EMCTech

Test File: M150814 5200 MHz WLAN FCC.da52:7

DUT Name: Fujitsu Tablet with 11 abgn/ac WLAN, Type: 8260NGW, Serial: WFM (MAC):A4:34:D9:09:92:96**Configuration: Edge 1 ANT 2 WWAN Ant. IN (OFDM) 27-Aug-2015**

Communication System: 0 - OFDM 5 GHz HT0 (80 MHz); Communication System Band: 5.2 GHz Band;

Frequency: 5210 MHz, Communication System PAR: 0.00 dB; PMF: 0.00; Duty Cycle: 1:1.00

Medium Parameters used: $f=5209.6$ MHz; $\sigma = 5.32$ S/m; $\epsilon_r = 48.1$; $\rho = 1000.0$ g/cm³

Phantom section: Flat Section

DASY Configuration:

Probe: EX3DV4 - SN7358; ConvF: (4.67,4.67,4.67); Calibrated: 21/04/2015;

Sensor-Surface: 1.4 mm (Mechanical Surface Detection)

Electronics: DAE3 Sn442; Calibrated: 3/12/2014

Phantom: ELI v4.0 (30deg probe tilt); Type: QDOVA001BB; Serial: TP:1101


DASY52 52.8.8(1222); SEMCAD X Version 14.6.10 (7331)

Edge 1 ANT 2 WWAN Ant. IN (OFDM) 27-Aug-2015/Channel 42 Test/Area Scan (61x91x1): Interpolated grid:

dx=1.0 mm, dy=1.0 mm; Maximum value of SAR (interpolated) = 1.730 W/kg


Edge 1 ANT 2 WWAN Ant. IN (OFDM) 27-Aug-2015/Channel 42 Test/Zoom Scan (31x31x61)/Cube 0:Interpolated grid: dx=0.8 mm, dy=0.8 mm, dz=0.4 mm; Reference Value = 20.397 V/m; **Power Drift = -0.09 dB****Averaged SAR: SAR(1g) = 0.636 W/kg; SAR(10g) = 0.140 W/kg**

Maximum value of SAR (interpolated) = 3.160 W/kg

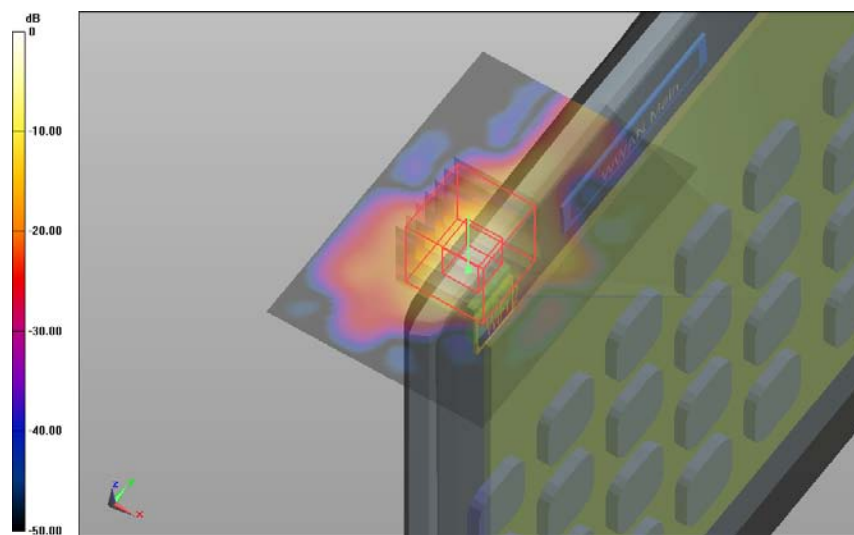

0 dB = 1.73 W/kg = 2.38 dBW/kg

SAR Measurement Plot 16

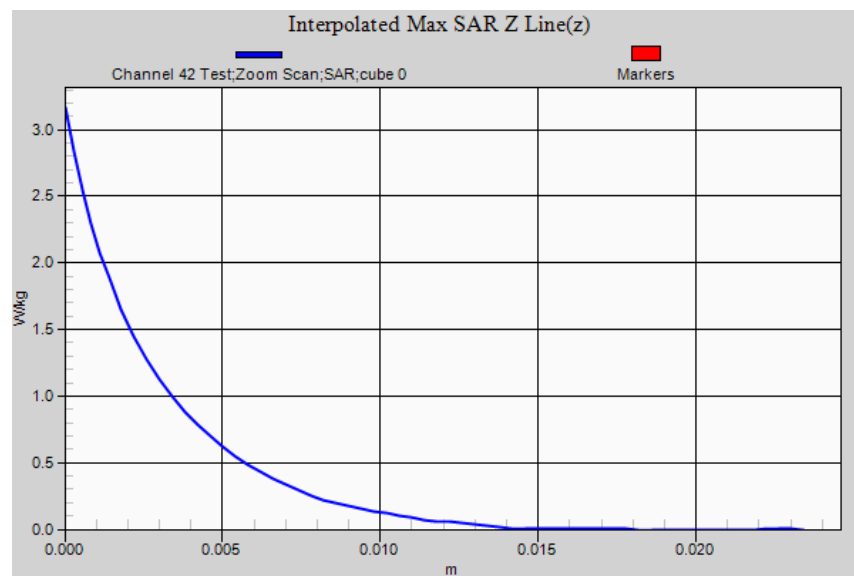

Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

Test Lab: EMCTech

Test File: M150814 5200 MHz WLAN FCC.da52:7

DUT Name: Fujitsu Tablet with 11 abgn/ac WLAN, Type: 8260NGW, Serial: WFM (MAC):A4:34:D9:09:92:96**Configuration: Edge 1 ANT 2 WWAN Ant. IN (OFDM) 27-Aug-2015**

Communication System: 0 - OFDM 5 GHz HT0 (40 MHz); Communication System Band: 5.2 GHz Band;

Frequency: 5270 MHz, Communication System PAR: 0.00 dB; PMF: 1.00; Duty Cycle: 1:1.00

Medium Parameters used: $f=5270.65$ MHz; $\sigma = 5.44$ S/m; $\epsilon_r = 48.0$; $\rho = 1000.0$ g/cm³

Phantom section: Flat Section

DASY Configuration:

Probe: EX3DV4 - SN7358; ConvF: (4.67,4.67,4.67); Calibrated: 21/04/2015;

Sensor-Surface: 1.4 mm (Mechanical Surface Detection (Locations From Previous Scan Used))

Electronics: DAE3 Sn442; Calibrated: 3/12/2014

Phantom: ELI v4.0 (30deg probe tilt); Type: QDOVA001BB; Serial: TP:1101


DASY52 52.8.8(1222); SEMCAD X Version 14.6.10 (7331)

Edge 1 ANT 2 WWAN Ant. IN (OFDM) 27-Aug-2015/Channel 54 Test/Area Scan (61x91x1): Interpolated grid:


dx=1.0 mm, dy=1.0 mm; Maximum value of SAR (interpolated) = 2.240 W/kg

Edge 1 ANT 2 WWAN Ant. IN (OFDM) 27-Aug-2015/Channel 54 Test/Zoom Scan (31x31x61)/Cube 0:Interpolated grid: dx=0.8 mm, dy=0.8 mm, dz=0.4 mm; Reference Value = 23.561 V/m; **Power Drift = -0.02 dB****Averaged SAR: SAR(1g) = 0.876 W/kg; SAR(10g) = 0.198 W/kg**

Maximum value of SAR (interpolated) = 4.390 W/kg

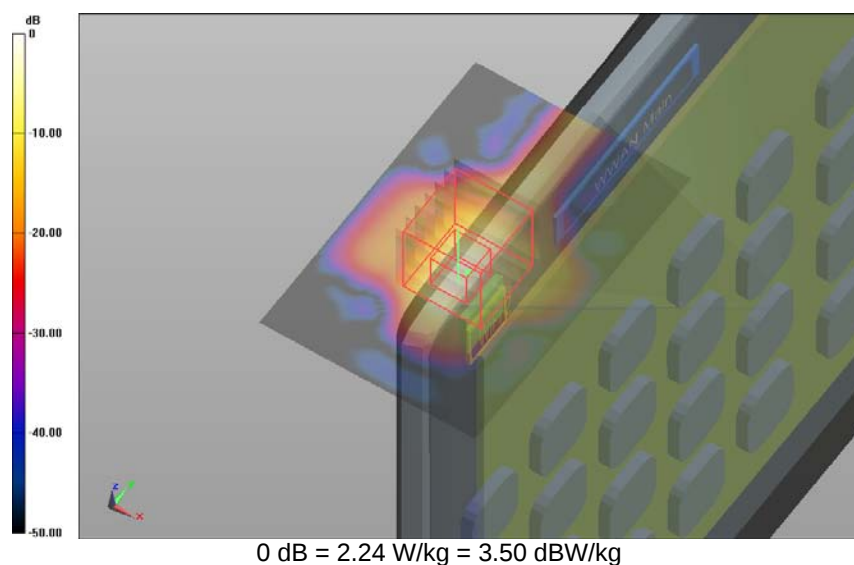

SAR Measurement Plot 17

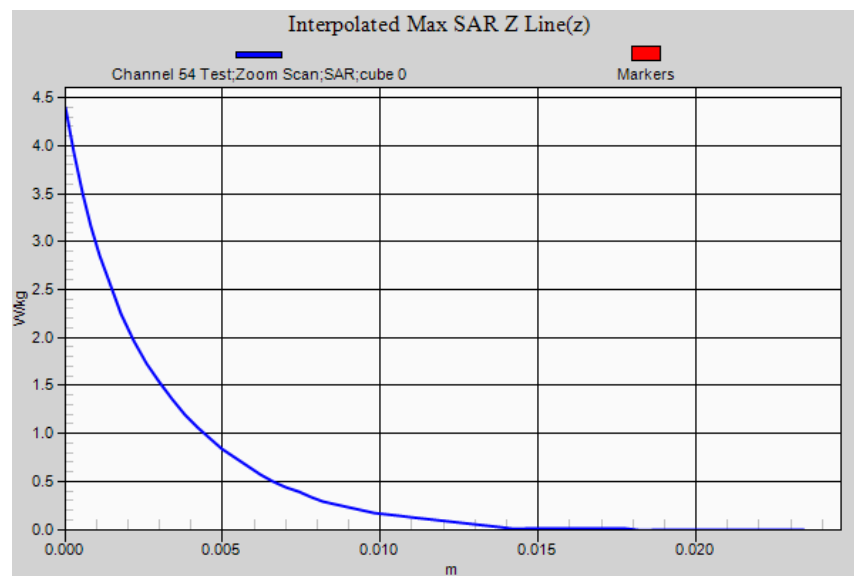

Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

Test Lab: EMCTech

Test File: M150814 5200 MHz WLAN FCC.da52:7

DUT Name: Fujitsu Tablet with 11 abgn/ac WLAN, Type: 8260NGW, Serial: WFM (MAC):A4:34:D9:09:92:96**Configuration: Edge 1 ANT 2 WWAN Ant. IN (OFDM) 27-Aug-2015**

Communication System: 0 - OFDM 5 GHz HT0 (40 MHz); Communication System Band: 5.2 GHz Band;

Frequency: 5310 MHz, Communication System PAR: 0.00 dB; PMF: 1.00; Duty Cycle: 1:1.00

Medium Parameters used: $f=5310.25$ MHz; $\sigma = 5.51$ S/m; $\epsilon_r = 47.8$; $\rho = 1000.0$ g/cm³

Phantom section: Flat Section

DASY Configuration:

Probe: EX3DV4 - SN7358; ConvF: (4.67,4.67,4.67); Calibrated: 21/04/2015;

Sensor-Surface: 1.4 mm (Mechanical Surface Detection (Locations From Previous Scan Used))

Electronics: DAE3 Sn442; Calibrated: 3/12/2014

Phantom: ELI v4.0 (30deg probe tilt); Type: QDOVA001BB; Serial: TP:1101


DASY52 52.8.8(1222); SEMCAD X Version 14.6.10 (7331)

Edge 1 ANT 2 WWAN Ant. IN (OFDM) 27-Aug-2015/Channel 62 Test/Area Scan (61x91x1): Interpolated grid:

dx=1.0 mm, dy=1.0 mm; Maximum value of SAR (interpolated) = 2.330 W/kg


Edge 1 ANT 2 WWAN Ant. IN (OFDM) 27-Aug-2015/Channel 62 Test/Zoom Scan (31x31x61)/Cube 0:Interpolated grid: dx=0.8 mm, dy=0.8 mm, dz=0.4 mm; Reference Value = 24.786 V/m; **Power Drift = -0.04 dB****Averaged SAR: SAR(1g) = 0.930 W/kg; SAR(10g) = 0.208 W/kg**

Maximum value of SAR (interpolated) = 4.800 W/kg

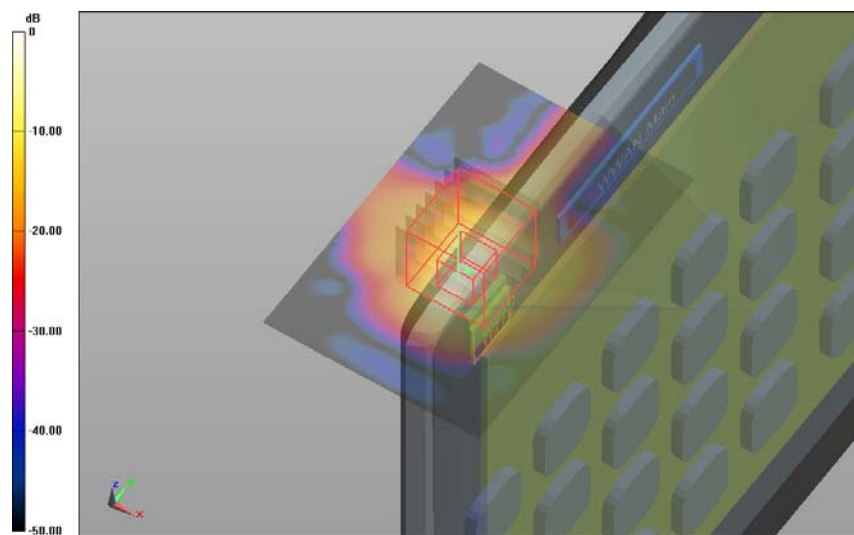

0 dB = 2.33 W/kg = 3.67 dBW/kg

SAR Measurement Plot 18

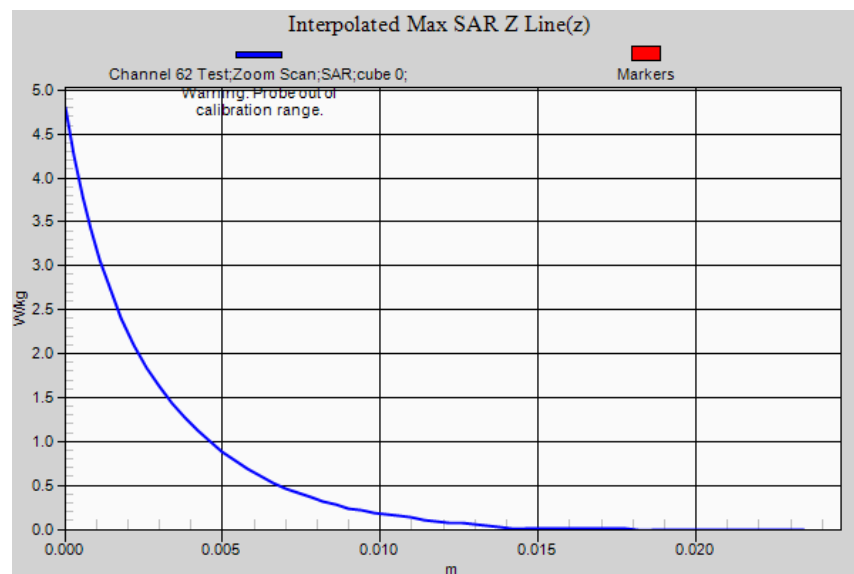

Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

Test Lab: EMCTech

Test File: M150814 5200 MHz WLAN FCC.da52:8

DUT Name: Fujitsu Tablet with 11 abgn/ac WLAN, Type: 8260NGW, Serial: WFM (MAC):A4:34:D9:09:92:96**Configuration: Edge 1 ANT 2 WWAN Ant. IN Variability (OFDM) 27-Aug-2015**

Communication System: 0 - OFDM 5 GHz HT0 (40 MHz); Communication System Band: 5.2 GHz Band;

Frequency: 5310 MHz, Communication System PAR: 0.00 dB; PMF: 1.00; Duty Cycle: 1:1.00

Medium Parameters used: $f=5310.25$ MHz; $\sigma = 5.51$ S/m; $\epsilon_r = 47.8$; $\rho = 1000.0$ g/cm³

Phantom section: Flat Section

DASY Configuration:

Probe: EX3DV4 - SN7358; ConvF: (4.67,4.67,4.67); Calibrated: 21/04/2015;

Sensor-Surface: 1.4 mm (Mechanical Surface Detection)


Electronics: DAE3 Sn442; Calibrated: 3/12/2014

Phantom: ELI v4.0 (30deg probe tilt); Type: QDOVA001BB; Serial: TP:1101

DASY52 52.8.8(1222); SEMCAD X Version 14.6.10 (7331)


Edge 1 ANT 2 WWAN Ant. IN Variability (OFDM) 27-Aug-2015/Channel 62 Test/Area Scan (61x91x1):Interpolated grid: $dx=1.0$ mm, $dy=1.0$ mm; Maximum value of SAR (interpolated) = 2.210 W/kg**Ant. IN Variability (OFDM) 27-Aug-2015/Channel 62 Test/Zoom Scan (31x31x61)/Cube 0:** Interpolated grid: $dx=0.8$ mm, $dy=0.8$ mm, $dz=0.4$ mm; Reference Value = 14.360 V/m; **Power Drift = -0.06 dB****Averaged SAR: SAR(1g) = 1.040 W/kg; SAR(10g) = 0.240 W/kg**

Maximum value of SAR (interpolated) = 5.180 W/kg

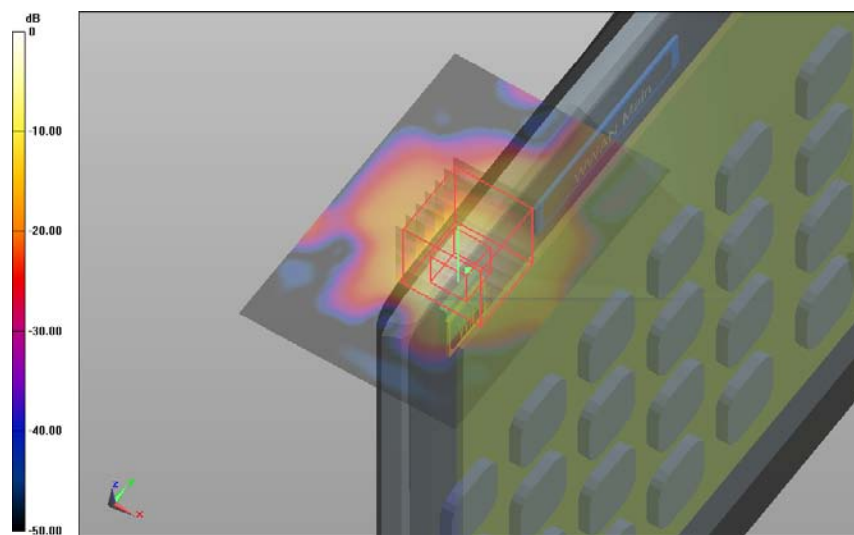

0 dB = 2.21 W/kg = 3.44 dBW/kg

SAR Measurement Plot 19

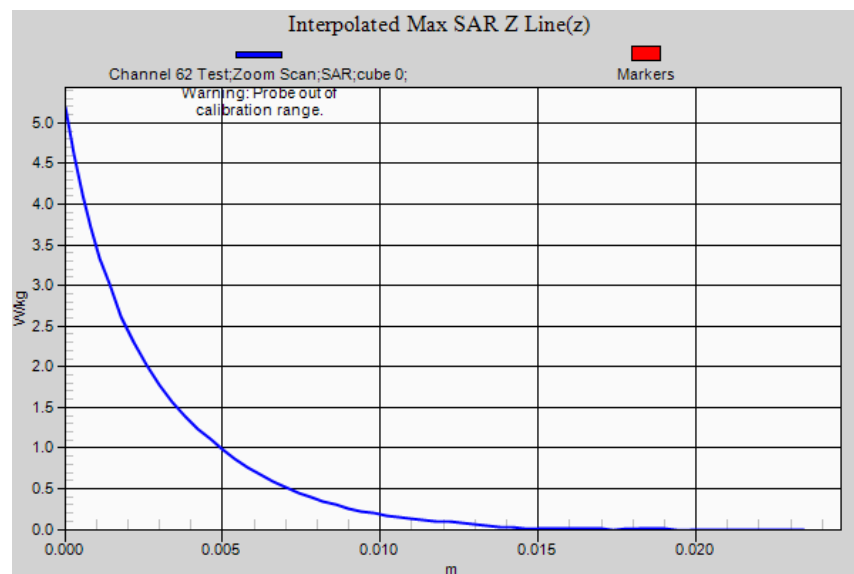

Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

Test Lab: EMCTech

Test File: M150814 5200 MHz WLAN FCC.da52:9

DUT Name: Fujitsu Tablet with 11 abgn/ac WLAN, Type: 8260NGW, Serial: WFM (MAC):A4:34:D9:09:92:96**Configuration: Edge 2 ANT 1 WWAN Ant. IN (OFDM) 27-Aug-2015**

Communication System: 0 - OFDM 5 GHz HT0 (20 MHz); Communication System Band: 5.2 GHz; Frequency: 5300 MHz, Communication System PAR: 0.00 dB; PMF: 0.00; Duty Cycle: 1:1.00

Medium Parameters used: $f=5300.35$ MHz; $\sigma = 5.49$ S/m; $\epsilon_r = 47.9$; $\rho = 1000.0$ g/cm³

Phantom section: Flat Section

DASY Configuration:

Probe: EX3DV4 - SN7358; ConvF: (4.67,4.67,4.67); Calibrated: 21/04/2015;

Sensor-Surface: 1.4 mm (Mechanical Surface Detection)

Electronics: DAE3 Sn442; Calibrated: 3/12/2014

Phantom: ELI v4.0 (30deg probe tilt); Type: QDOVA001BB; Serial: TP:1101


DASY52 52.8.8(1222); SEMCAD X Version 14.6.10 (7331)

Edge 2 ANT 1 WWAN Ant. IN (OFDM) 27-Aug-2015/Channel 60 Test/Area Scan (61x91x1): Interpolated grid:

dx=1.0 mm, dy=1.0 mm; Maximum value of SAR (interpolated) = 0.473 W/kg


Edge 2 ANT 1 WWAN Ant. IN (OFDM) 27-Aug-2015/Channel 60 Test/Zoom Scan (31x31x61)/Cube 0:Interpolated grid: dx=0.8 mm, dy=0.8 mm, dz=0.4 mm; Reference Value = 8.656 V/m; **Power Drift = 0.03 dB****Averaged SAR: SAR(1g) = 0.154 W/kg; SAR(10g) = 0.044 W/kg**

Maximum value of SAR (interpolated) = 1.850 W/kg

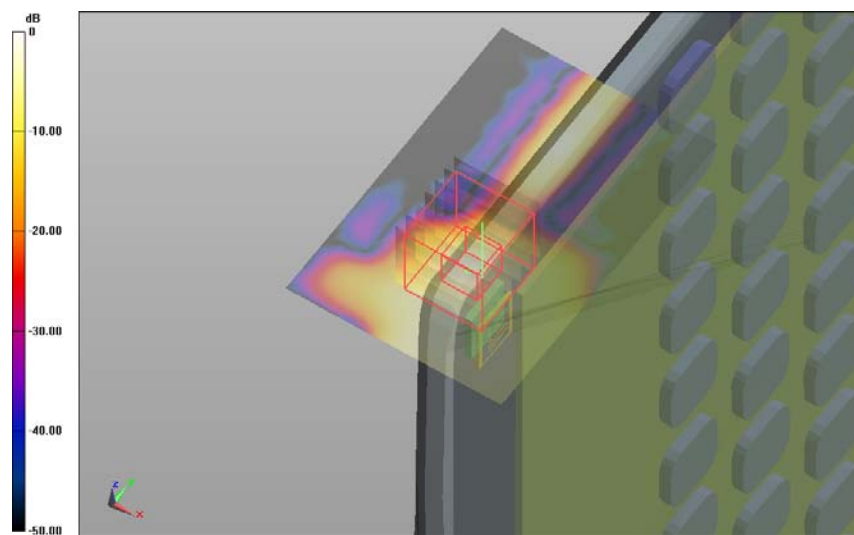

0 dB = 0.473 W/kg = -3.25 dBW/kg

SAR Measurement Plot 20

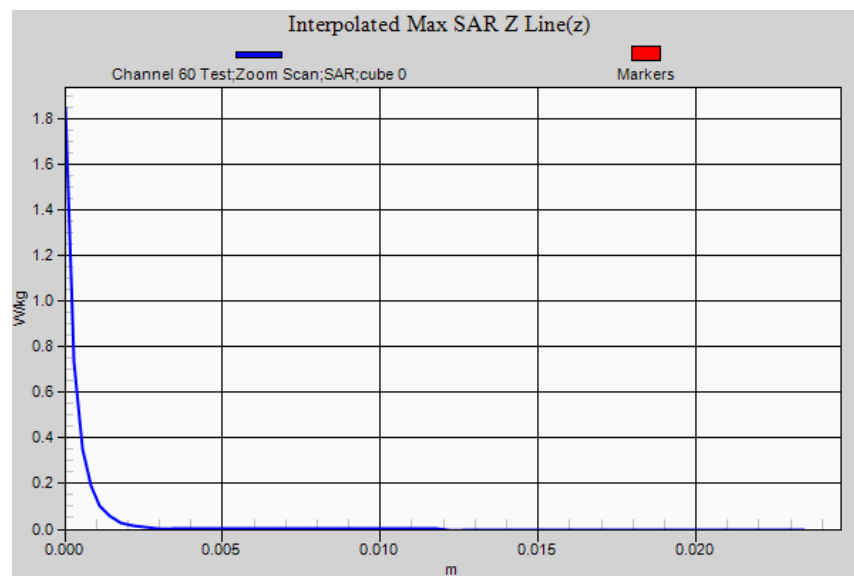

Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

Test Lab: EMCTech

Test File: M150814 5200 MHz WLAN FCC.da52:10

DUT Name: Fujitsu Tablet with 11 abgn/ac WLAN, Type: 8260NGW, Serial: WFM (MAC):A4:34:D9:09:92:96**Configuration: Edge 4 ANT 2 WWAN Ant. IN (OFDM) 27-Aug-2015**

Communication System: 0 - OFDM 5 GHz HT0 (40 MHz); Communication System Band: 5.2 GHz Band;

Frequency: 5270 MHz, Communication System PAR: 0.00 dB; PMF: 1.00; Duty Cycle: 1:1.00

Medium Parameters used: $f=5270.65$ MHz; $\sigma = 5.44$ S/m; $\epsilon_r = 48.0$; $\rho = 1000.0$ g/cm³

Phantom section: Flat Section

DASY Configuration:

Probe: EX3DV4 - SN7358; ConvF: (4.67,4.67,4.67); Calibrated: 21/04/2015;

Sensor-Surface: 1.4 mm (Mechanical Surface Detection)

Electronics: DAE3 Sn442; Calibrated: 3/12/2014

Phantom: ELI v4.0 (30deg probe tilt); Type: QDOVA001BB; Serial: TP:1101


DASY52 52.8.8(1222); SEMCAD X Version 14.6.10 (7331)

Edge 4 ANT 2 WWAN Ant. IN (OFDM) 27-Aug-2015/Channel 54 Test/Area Scan (61x91x1): Interpolated grid:

dx=1.0 mm, dy=1.0 mm; Maximum value of SAR (interpolated) = 0.145 W/kg


Edge 4 ANT 2 WWAN Ant. IN (OFDM) 27-Aug-2015/Channel 54 Test/Zoom Scan (31x31x61)/Cube 0:Interpolated grid: dx=0.8 mm, dy=0.8 mm, dz=0.4 mm; Reference Value = 1.862 V/m; **Power Drift = -0.01 dB****Averaged SAR: SAR(1g) = 0.036 W/kg; SAR(10g) = 0.007 W/kg**

Maximum value of SAR (interpolated) = 0.338 W/kg

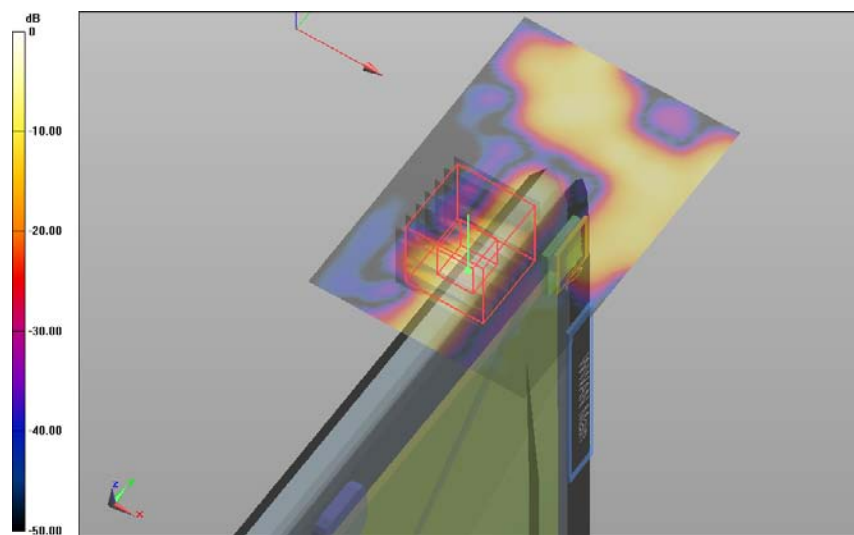

0 dB = 0.145 W/kg = -8.39 dBW/kg

SAR Measurement Plot 21

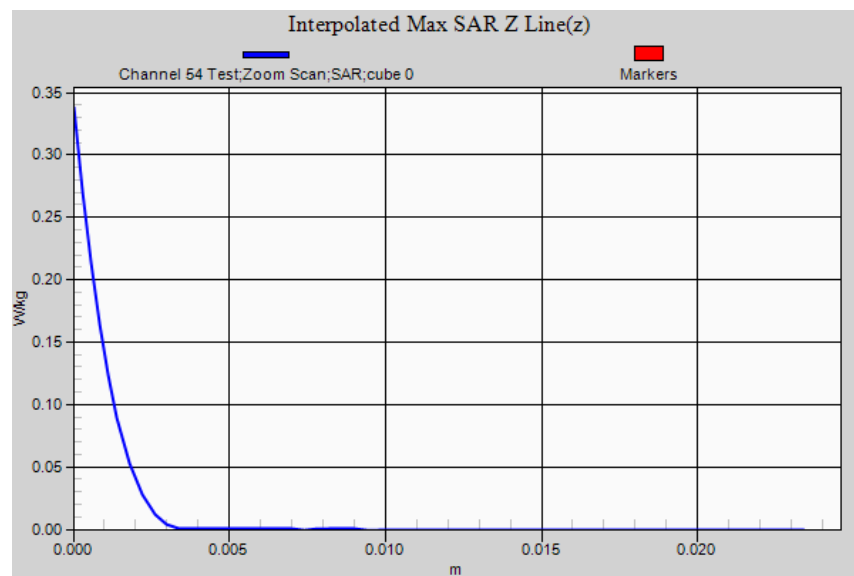

Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

Test Lab: EMCTech

Test File: M150814 5200 MHz WLAN FCC.da52:11

DUT Name: Fujitsu Tablet with 11 abgn/ac WLAN, Type: 8260NGW, Serial: WFM (MAC):A4:34:D9:09:92:96**Configuration: Edge 4 ANT 2 WWAN Ant. OUT (OFDM) 27-Aug-2015**

Communication System: 0 - OFDM 5 GHz HT0 (40 MHz); Communication System Band: 5.2 GHz Band;

Frequency: 5270 MHz, Communication System PAR: 0.00 dB; PMF: 1.00; Duty Cycle: 1:1.00

Medium Parameters used: $f=5270.65$ MHz; $\sigma = 5.44$ S/m; $\epsilon_r = 48.0$; $\rho = 1000.0$ g/cm³

Phantom section: Flat Section

DASY Configuration:

Probe: EX3DV4 - SN7358; ConvF: (4.67,4.67,4.67); Calibrated: 21/04/2015;

Sensor-Surface: 1.4 mm (Mechanical Surface Detection)

Electronics: DAE3 Sn442; Calibrated: 3/12/2014

Phantom: ELI v4.0 (30deg probe tilt); Type: QDOVA001BB; Serial: TP:1101


DASY52 52.8.8(1222); SEMCAD X Version 14.6.10 (7331)

Edge 4 ANT 2 WWAN Ant. OUT (OFDM) 27-Aug-2015/Channel 54 Test/Area Scan (61x91x1): Interpolated grid:

dx=1.0 mm, dy=1.0 mm; Maximum value of SAR (interpolated) = 0.227 W/kg


Edge 4 ANT 2 WWAN Ant. OUT (OFDM) 27-Aug-2015/Channel 54 Test/Zoom Scan (31x31x61)/Cube 0:Interpolated grid: dx=0.8 mm, dy=0.8 mm, dz=0.4 mm; Reference Value = 3.638 V/m; **Power Drift = -0.17 dB****Averaged SAR: SAR(1g) = 0.042 W/kg; SAR(10g) = 0.008 W/kg**

Maximum value of SAR (interpolated) = 0.398 W/kg

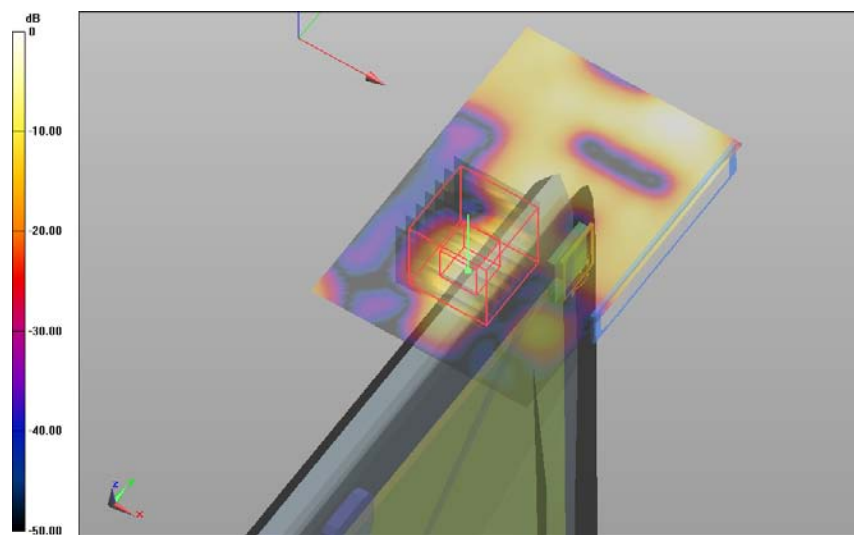

0 dB = 0.227 W/kg = -6.44 dBW/kg

SAR Measurement Plot 22

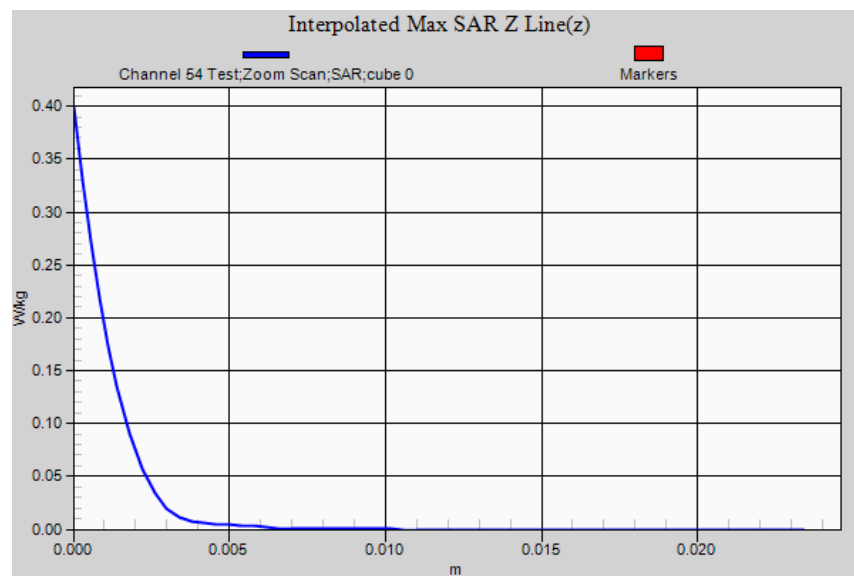

Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

Test Lab: EMCTech

Test File: M150814 5200 MHz WLAN FCC.da52:11

DUT Name: Fujitsu Tablet with 11 abgn/ac WLAN, Type: 8260NGW, Serial: WFM (MAC):A4:34:D9:09:92:96**Configuration: Edge 4 ANT 2 WWAN Ant. OUT (OFDM) 27-Aug-2015**

Communication System: 0 - OFDM 5 GHz HT0 (40 MHz); Communication System Band: 5.2 GHz Band;

Frequency: 5310 MHz, Communication System PAR: 0.00 dB; PMF: 1.00; Duty Cycle: 1:1.00

Medium Parameters used: $f=5310.25$ MHz; $\sigma = 5.51$ S/m; $\epsilon_r = 47.8$; $\rho = 1000.0$ g/cm³

Phantom section: Flat Section

DASY Configuration:

Probe: EX3DV4 - SN7358; ConvF: (4.67,4.67,4.67); Calibrated: 21/04/2015;

Sensor-Surface: 1.4 mm (Mechanical Surface Detection)


Electronics: DAE3 Sn442; Calibrated: 3/12/2014

Phantom: ELI v4.0 (30deg probe tilt); Type: QDOVA001BB; Serial: TP:1101


DASY52 52.8.8(1222); SEMCAD X Version 14.6.10 (7331)

Edge 4 ANT 2 WWAN Ant. OUT (OFDM) 27-Aug-2015/Channel 62 Test/Area Scan (61x91x1): Interpolated grid:
dx=1.0 mm, dy=1.0 mm; Maximum value of SAR (interpolated) = 0.162 W/kg**Edge 4 ANT 2 WWAN Ant. OUT (OFDM) 27-Aug-2015/Channel 62 Test/Zoom Scan (31x31x61)/Cube 0:**
Interpolated grid: dx=0.8 mm, dy=0.8 mm, dz=0.4 mm; Reference Value = 4.472 V/m; **Power Drift = -0.17 dB****Averaged SAR: SAR(1g) = 0.049 W/kg; SAR(10g) = 0.010 W/kg**

Maximum value of SAR (interpolated) = 0.550 W/kg

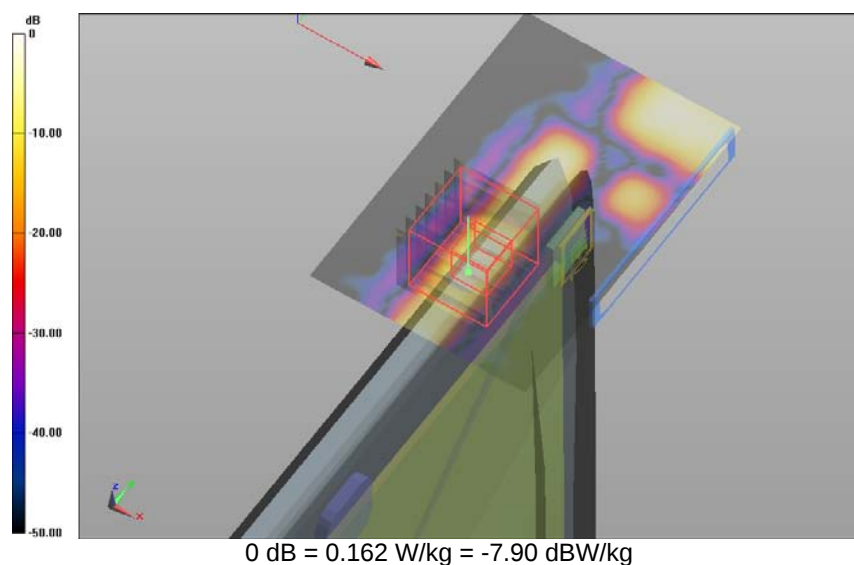

SAR Measurement Plot 23

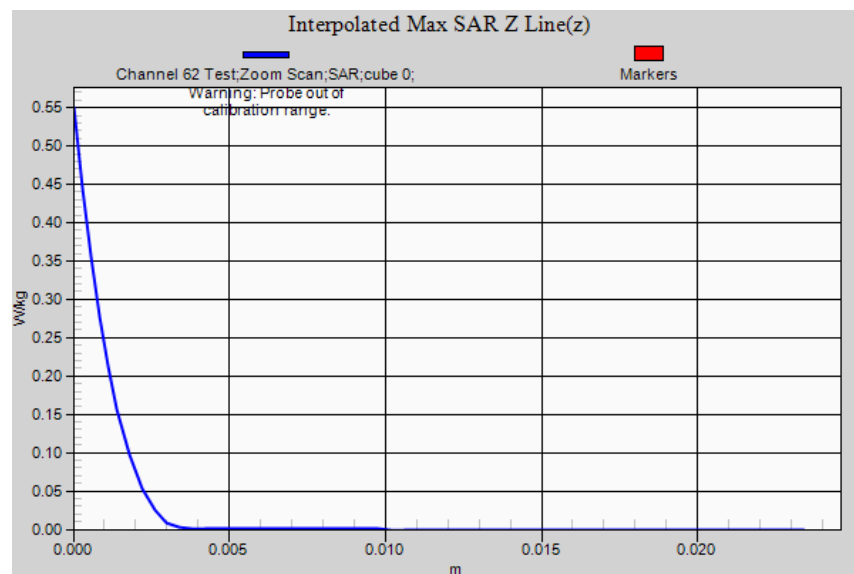

Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

Test Lab: EMCTech

Test File: M150814 5200 MHz WLAN FCC.da52:12

DUT Name: Dipole 5200_5800 MHz, Type: D5GHzV2, Serial: 1008**Configuration: System Performance Check with D5GHzV2 Dipole 25-Aug-2015**

Communication System: 0 - CW; Communication System Band: D5GHz (5000.0 - 6000.0 MHz); Frequency: 5200 MHz; Communication System PAR: 0.00 dB; PMF: 1.00; Duty Cycle: 1:1.00

Medium Parameters used: $f=5199.7$ MHz; $\sigma = 5.34$ S/m; $\epsilon_r = 48.4$; $\rho = 1000.0$ g/cm³

Phantom section: Flat Section

DASY Configuration:

Probe: EX3DV4 - SN7358; ConvF: (4.67,4.67,4.67); Calibrated: 21/04/2015;

Sensor-Surface: 1.4 mm (Mechanical Surface Detection)


Electronics: DAE3 Sn442; Calibrated: 3/12/2014

Phantom: ELI v4.0 (30deg probe tilt); Type: QDOVA001BB; Serial: TP:1101

DASY52 52.8.8(1222); SEMCAD X Version 14.6.10 (7331)

System Performance Check with D5GHzV2 Dipole 25-Aug-2015/d=10mm, Pin=100mW, f=5200 MHz/Area Scan (91x91x1): Interpolated grid: dx=1.0 mm, dy=1.0 mm; Maximum value of SAR (interpolated) = 18.700 W/kg**System Performance Check with D5GHzV2 Dipole 25-Aug-2015/d=10mm, Pin=100mW, f=5200 MHz/Zoom Scan (4x4x2mm, uniform), dist=1.4mm (36x36x66)/Cube 0:** Interpolated grid: dx=0.8 mm, dy=0.8 mm, dz=0.4 mm; Reference Value = 60.727 V/m; **Power Drift = 0.03 dB****Averaged SAR: SAR(1g) = 7.650 W/kg; SAR(10g) = 2.140 W/kg**

Maximum value of SAR (interpolated) = 31.000 W/kg

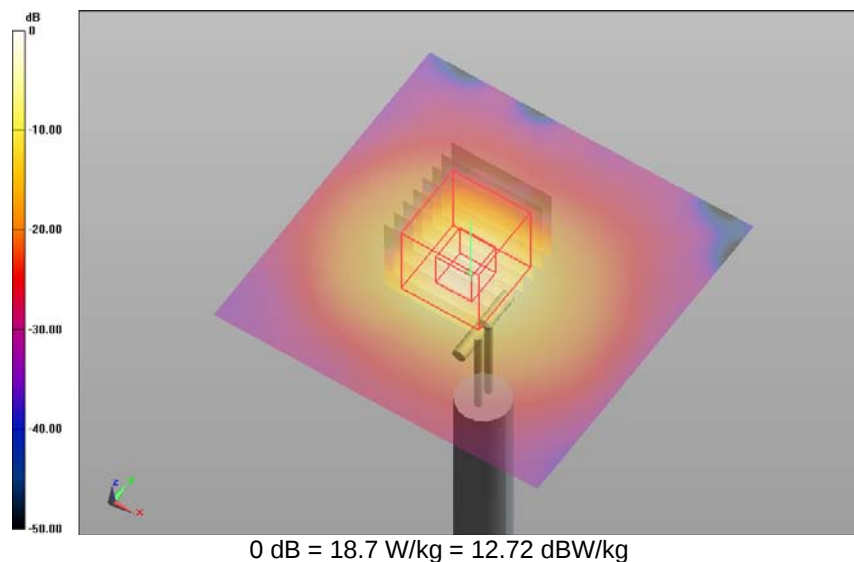


SAR Measurement Plot 24



Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

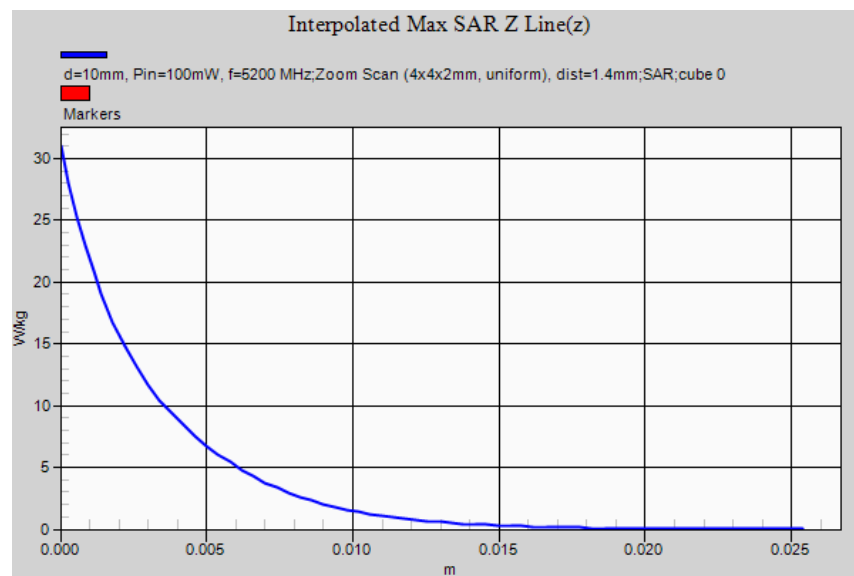

Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

Test Lab: EMCTech

Test File: M150814 5200 MHz WLAN FCC.da52:13

DUT Name: Dipole 5200_5800 MHz, Type: D5GHzV2, Serial: 1008**Configuration: System Performance Check with D5GHzV2 Dipole 26-Aug-2015**

Communication System: 0 - CW; Communication System Band: D5GHz (5000.0 - 6000.0 MHz); Frequency: 5200 MHz; Communication System PAR: 0.00 dB; PMF: 1.00; Duty Cycle: 1:1.00

Medium Parameters used: $f=5199.7$ MHz; $\sigma = 5.18$ S/m; $\epsilon_r = 49.3$; $\rho = 1000.0$ g/cm³

Phantom section: Flat Section

DASY Configuration:

Probe: EX3DV4 - SN7358; ConvF: (4.67,4.67,4.67); Calibrated: 21/04/2015;

Sensor-Surface: 1.4 mm (Mechanical Surface Detection)


Electronics: DAE3 Sn442; Calibrated: 3/12/2014

Phantom: ELI v4.0 (30deg probe tilt); Type: QDOVA001BB; Serial: TP:1101

DASY52 52.8.8(1222); SEMCAD X Version 14.6.10 (7331)

System Performance Check with D5GHzV2 Dipole 26-Aug-2015/d=10mm, Pin=100mW, f=5200 MHz/Area Scan (91x91x1): Interpolated grid: dx=1.0 mm, dy=1.0 mm; Maximum value of SAR (interpolated) = 17.400 W/kg**System Performance Check with D5GHzV2 Dipole 26-Aug-2015/d=10mm, Pin=100mW, f=5200 MHz/Zoom Scan (4x4x2mm, uniform), dist=1.4mm (36x36x66)/Cube 0:** Interpolated grid: dx=0.8 mm, dy=0.8 mm, dz=0.4 mm; Reference Value = 55.526 V/m; **Power Drift = 0.02 dB****Averaged SAR: SAR(1g) = 7.270 W/kg; SAR(10g) = 2.060 W/kg**

Maximum value of SAR (interpolated) = 28.700 W/kg

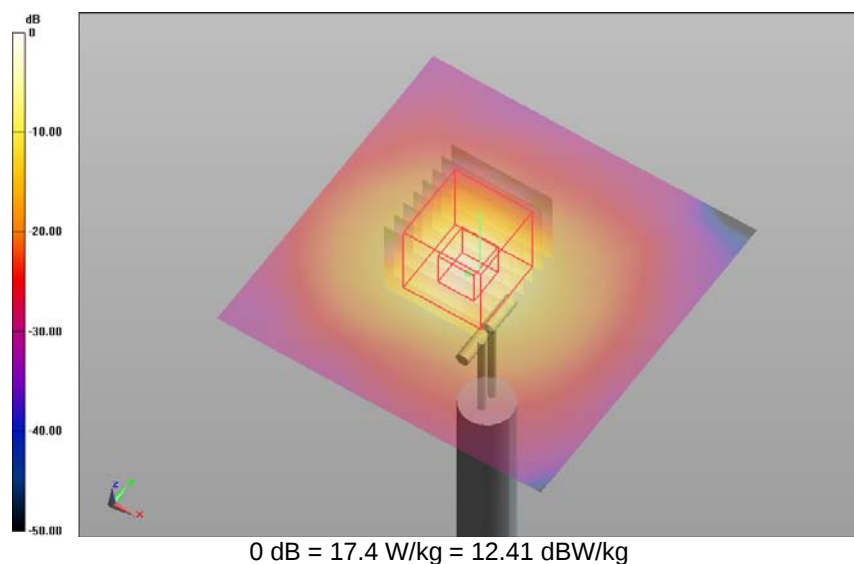


0 dB = 17.4 W/kg = 12.41 dBW/kg

SAR Measurement Plot 25



Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

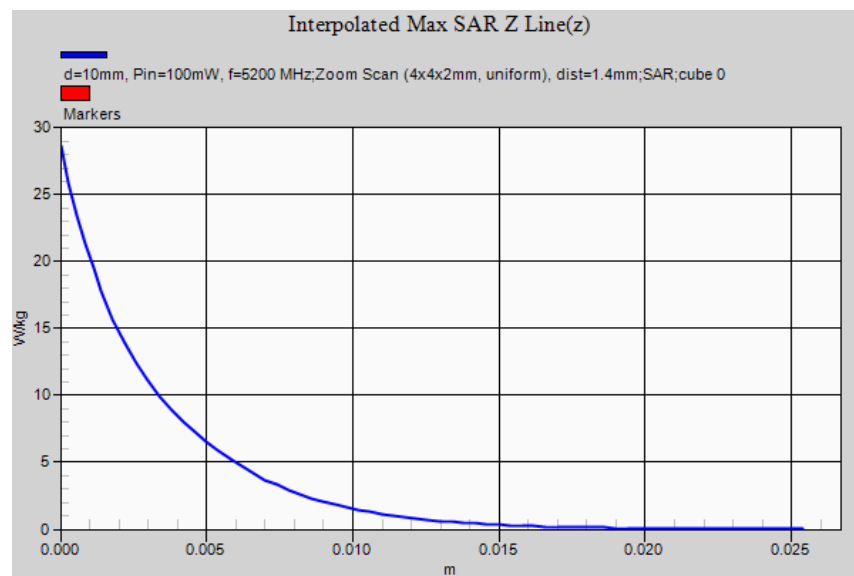

Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

Test Lab: EMCTech

Test File: M150814 5200 MHz WLAN FCC.da52:14

DUT Name: Dipole 5200_5800 MHz, Type: D5GHzV2, Serial: 1008**Configuration: System Performance Check with D5GHzV2 Dipole 27-Aug-2015**

Communication System: 0 - CW; Communication System Band: D5GHz (5000.0 - 6000.0 MHz); Frequency: 5200 MHz; Communication System PAR: 0.00 dB; PMF: 1.00; Duty Cycle: 1:1.00

Medium Parameters used: $f=5199.7$ MHz; $\sigma = 5.31$ S/m; $\epsilon_r = 48.2$; $\rho = 1000.0$ g/cm³

Phantom section: Flat Section

DASY Configuration:

Probe: EX3DV4 - SN7358; ConvF: (4.67,4.67,4.67); Calibrated: 21/04/2015;

Sensor-Surface: 1.4 mm (Mechanical Surface Detection)


Electronics: DAE3 Sn442; Calibrated: 3/12/2014

Phantom: ELI v4.0 (30deg probe tilt); Type: QDOVA001BB; Serial: TP:1101

DASY52 52.8.8(1222); SEMCAD X Version 14.6.10 (7331)

System Performance Check with D5GHzV2 Dipole 27-Aug-2015/d=10mm, Pin=100mW, f=5200 MHz/Area Scan (91x91x1): Interpolated grid: dx=1.0 mm, dy=1.0 mm; Maximum value of SAR (interpolated) = 18.800 W/kg**System Performance Check with D5GHzV2 Dipole 27-Aug-2015/d=10mm, Pin=100mW, f=5200 MHz/Zoom Scan (4x4x2mm, uniform), dist=1.4mm (36x36x66)/Cube 0:** Interpolated grid: dx=0.8 mm, dy=0.8 mm, dz=0.4 mm; Reference Value = 55.052 V/m; **Power Drift = 0.01 dB****Averaged SAR: SAR(1g) = 7.580 W/kg; SAR(10g) = 2.140 W/kg**

Maximum value of SAR (interpolated) = 30.000 W/kg

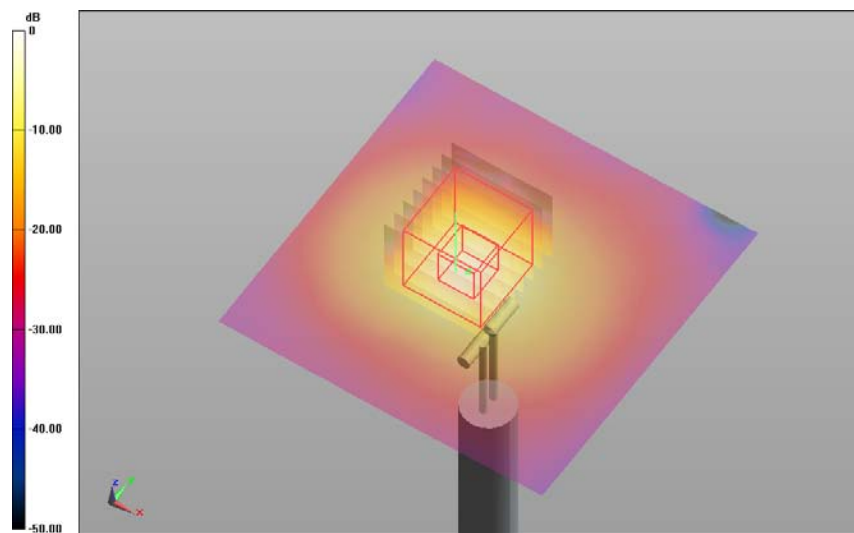


0 dB = 18.8 W/kg = 12.74 dBW/kg

SAR Measurement Plot 26



Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

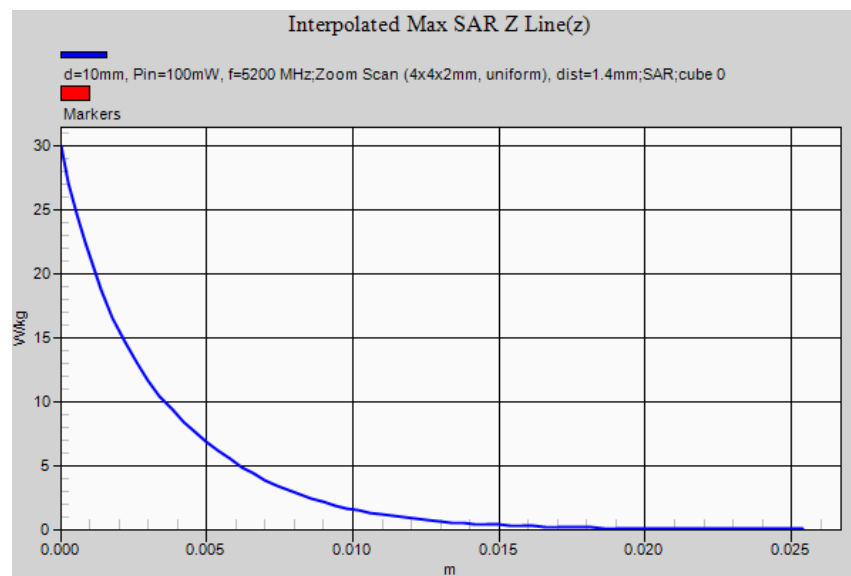

Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

Test Lab: EMCTech

Test File: M150814 5600 MHz WLAN FCC.da52:0

DUT Name: Fujitsu Tablet with 11 abgn/ac WLAN, Type: 8260NGW, Serial: WFM (MAC):A4:34:D9:09:92:96**Configuration: Body Bystander ANT 1 WWAN Ant. IN (OFDM) 28-08-15**

Communication System: 0 - OFDM 5 GHz HT0 (40 MHz); Communication System Band: 5.6 GHz Band;

Frequency: 5550 MHz, Communication System PAR: 0.00 dB; PMF: 1.00; Duty Cycle: 1:1.00

Medium Parameters used: $f=5549.5$ MHz; $\sigma = 5.80$ S/m; $\epsilon_r = 47.3$; $\rho = 1000.0\text{g/cm}^3$

Phantom section: Flat Section

DASY Configuration:

Probe: EX3DV4 - SN7358; ConvF: (3.95,3.95,3.95); Calibrated: 21/04/2015;

Sensor-Surface: 1.4 mm (Mechanical Surface Detection)


Electronics: DAE3 Sn442; Calibrated: 3/12/2014

Phantom: ELI v4.0 (30deg probe tilt); Type: QDOVA001BB; Serial: TP:1101

DASY52 52.8.8(1222); SEMCAD X Version 14.6.10 (7331)

Body Bystander ANT 1 WWAN Ant. IN (OFDM) 28-08-15/Channel 110 Test/Area Scan (61x91x1): Interpolated grid: $dx=1.0$ mm, $dy=1.0$ mm; Maximum value of SAR (interpolated) = 0.165 W/kg**Body Bystander ANT 1 WWAN Ant. IN (OFDM) 28-08-15/Channel 110 Test/Zoom Scan (31x31x61)/Cube 0:**Interpolated grid: $dx=0.8$ mm, $dy=0.8$ mm, $dz=0.4$ mm; Reference Value = 1.810 V/m; Power Drift = -0.06 dB**Averaged SAR: SAR(1g) = 0.029 W/kg; SAR(10g) = 0.009 W/kg**

Maximum value of SAR (interpolated) = 0.351 W/kg

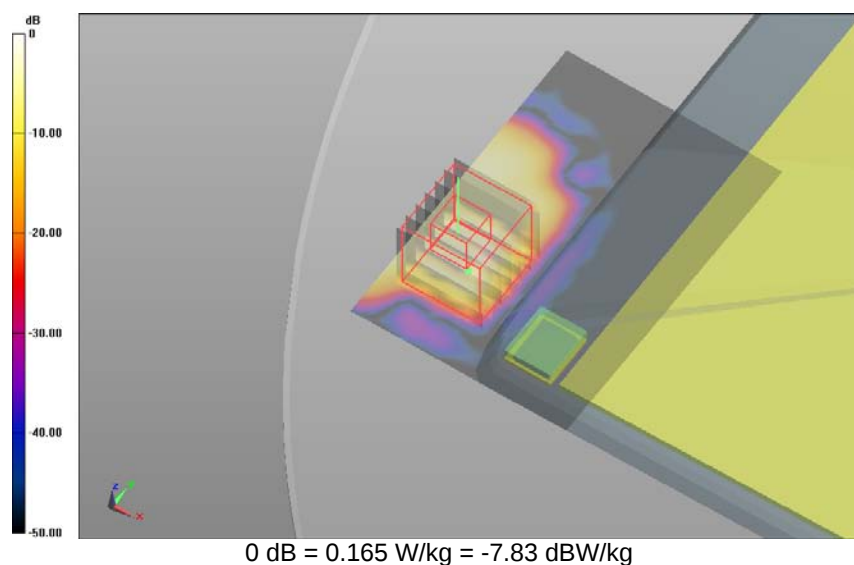


SAR Measurement Plot 27



Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

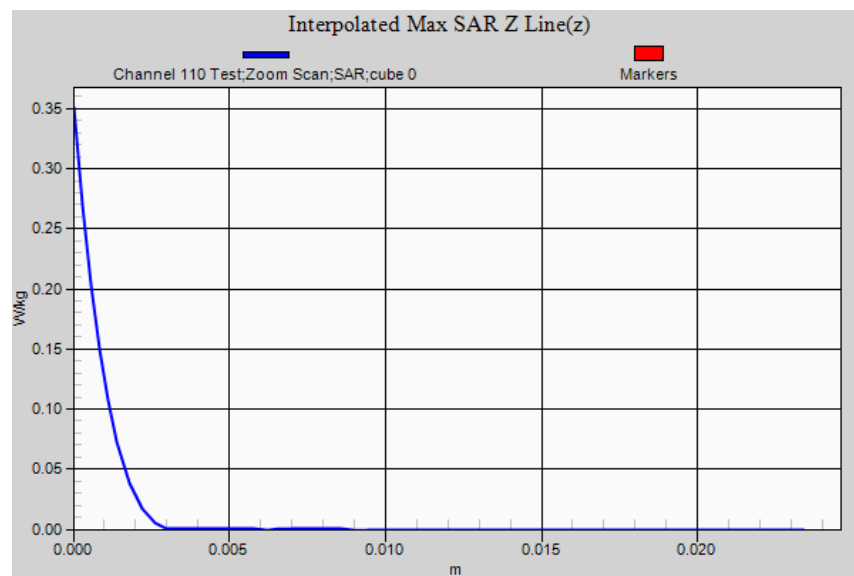

Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

Test Lab: EMCTech

Test File: M150814 5600 MHz WLAN FCC.da52:1

DUT Name: Fujitsu Tablet with 11 abgn/ac WLAN, Type: 8260NGW, Serial: WFM (MAC):A4:34:D9:09:92:96**Configuration: Body Bystander ANT 2 WWAN Ant. IN (OFDM) 28-Aug-2015**

Communication System: 0 - OFDM 5 GHz HT0 (80 MHz); Communication System Band: 5.6 GHz Band;

Frequency: 5610 MHz, Communication System PAR: 0.00 dB; PMF: 0.00; Duty Cycle: 1:1.00

Medium Parameters used: $f=5610.55$ MHz; $\sigma = 5.90$ S/m; $\epsilon_r = 47.1$; $\rho = 1000.0$ g/cm³

Phantom section: Flat Section

DASY Configuration:

Probe: EX3DV4 - SN7358; ConvF: (3.95,3.95,3.95); Calibrated: 21/04/2015;

Sensor-Surface: 1.4 mm (Mechanical Surface Detection)


Electronics: DAE3 Sn442; Calibrated: 3/12/2014

Phantom: ELI v4.0 (30deg probe tilt); Type: QDOVA001BB; Serial: TP:1101

DASY52 52.8.8(1222); SEMCAD X Version 14.6.10 (7331)

Body Bystander ANT 2 WWAN Ant. IN (OFDM) 28-Aug-2015/Channel 122 Test/Area Scan (61x91x1):Interpolated grid: $dx=1.0$ mm, $dy=1.0$ mm; Maximum value of SAR (interpolated) = 0.183 W/kg**Body Bystander ANT 2 WWAN Ant. IN (OFDM) 28-Aug-2015/Channel 122 Test/Zoom Scan (31x31x61)/Cube****0:** Interpolated grid: $dx=0.8$ mm, $dy=0.8$ mm, $dz=0.4$ mm; Reference Value = 5.536 V/m; **Power Drift = 0.15 dB****Averaged SAR: SAR(1g) = 0.056 W/kg; SAR(10g) = 0.023 W/kg**

Maximum value of SAR (interpolated) = 0.380 W/kg

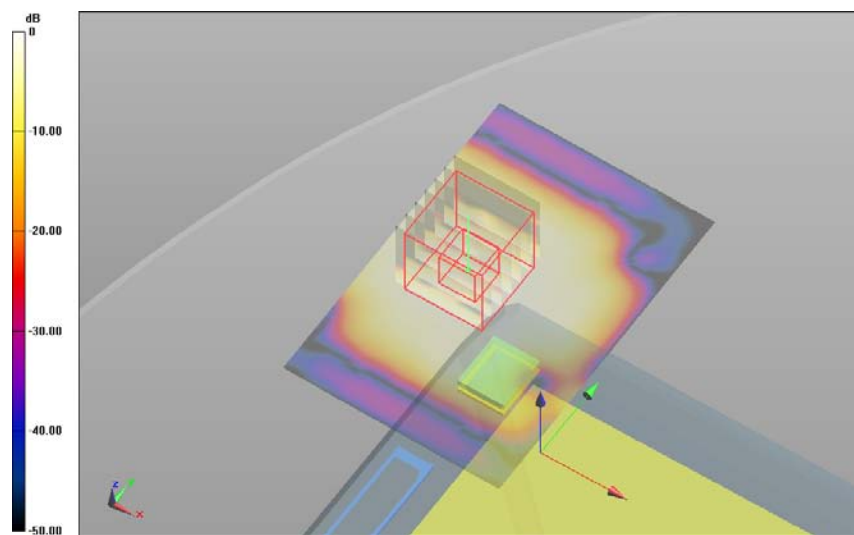


0 dB = 0.183 W/kg = -7.38 dBW/kg

SAR Measurement Plot 28



Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

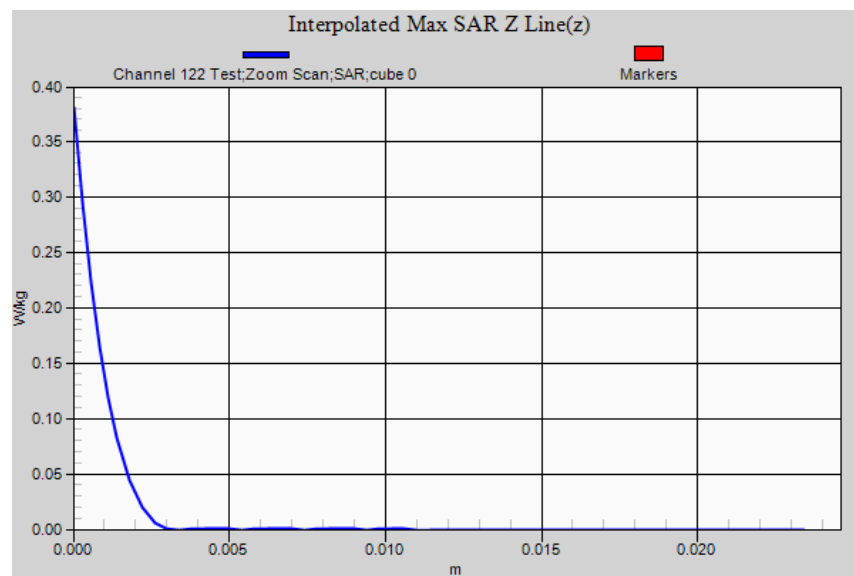

Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

Test Lab: EMCTech

Test File: M150814 5600 MHz WLAN FCC.da52:2

DUT Name: Fujitsu Tablet with 11 abgn/ac WLAN, Type: 8260NGW, Serial: WFM (MAC):A4:34:D9:09:92:96**Configuration: Body Lap Held ANT 1 WWAN Ant. IN (OFDM) 28-Aug-2015**

Communication System: 0 - OFDM 5 GHz HT0 (40 MHz); Communication System Band: 5.6 GHz Band;

Frequency: 5510 MHz, Communication System PAR: 0.00 dB; PMF: 1.00; Duty Cycle: 1:1.00

Medium Parameters used: $f=5509.9$ MHz; $\sigma = 5.74$ S/m; $\epsilon_r = 47.4$; $\rho = 1000.0$ g/cm³

Phantom section: Flat Section

DASY Configuration:

Probe: EX3DV4 - SN7358; ConvF: (3.95,3.95,3.95); Calibrated: 21/04/2015;

Sensor-Surface: 1.4 mm (Mechanical Surface Detection)


Electronics: DAE3 Sn442; Calibrated: 3/12/2014

Phantom: ELI v4.0 (30deg probe tilt); Type: QDOVA001BB; Serial: TP:1101

DASY52 52.8.8(1222); SEMCAD X Version 14.6.10 (7331)

Body Lap Held ANT 1 WWAN Ant. IN (OFDM) 28-Aug-2015/Channel 102 Test/Area Scan (61x91x1): Interpolated grid: dx=1.0 mm, dy=1.0 mm; Maximum value of SAR (interpolated) = 0.122 W/kg**Body Lap Held ANT 1 WWAN Ant. IN (OFDM) 28-Aug-2015/Channel 102 Test/Zoom Scan (31x31x61)/Cube 0:** Interpolated grid: dx=0.8 mm, dy=0.8 mm, dz=0.4 mm; Reference Value = 2.427 V/m; **Power Drift = -0.12 dB****Averaged SAR: SAR(1g) = 0.022 W/kg; SAR(10g) = 0.005 W/kg**

Maximum value of SAR (interpolated) = 0.304 W/kg

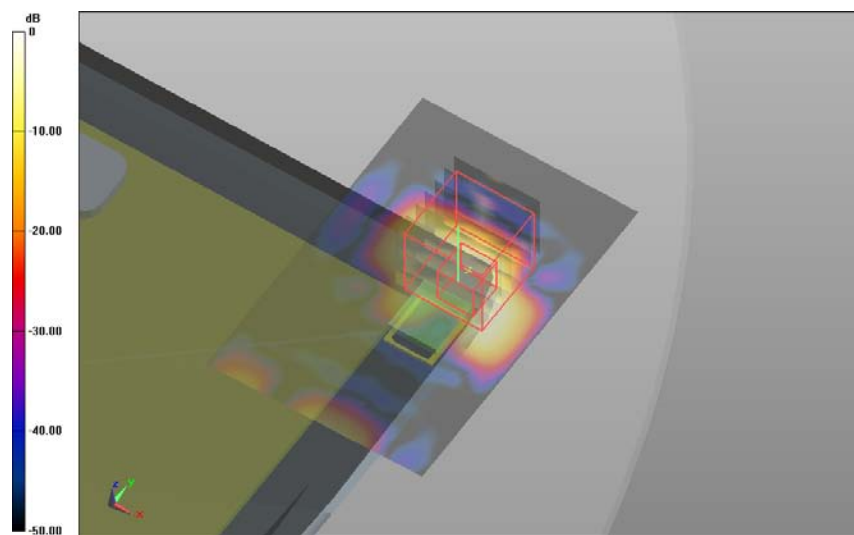


0 dB = 0.122 W/kg = -9.14 dBW/kg

SAR Measurement Plot 29



Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

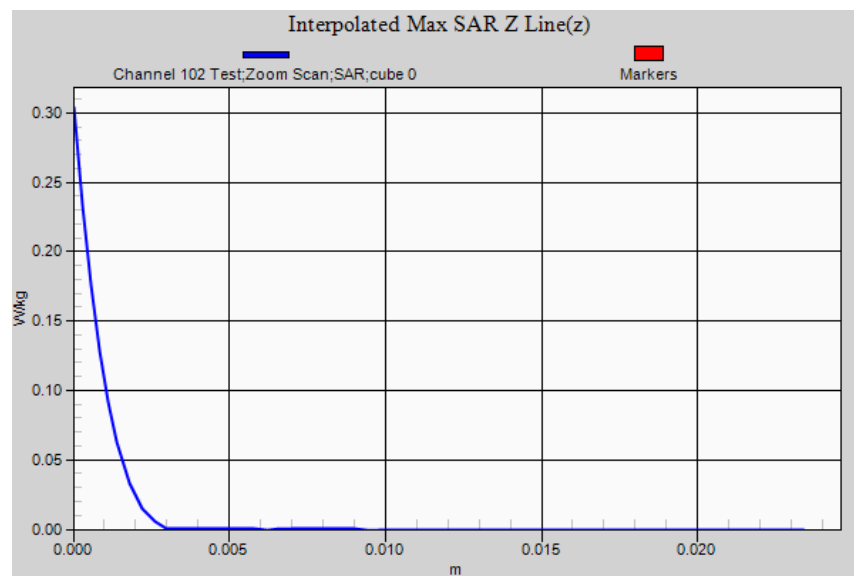

Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

Test Lab: EMCTech

Test File: M150814 5600 MHz WLAN FCC.da52:2

DUT Name: Fujitsu Tablet with 11 abgn/ac WLAN, Type: 8260NGW, Serial: WFM (MAC):A4:34:D9:09:92:96**Configuration: Body Lap Held ANT 1 WWAN Ant. IN (OFDM) 28-Aug-2015**

Communication System: 0 - OFDM 5 GHz HT0 (40 MHz); Communication System Band: 5.6 GHz Band;

Frequency: 5550 MHz, Communication System PAR: 0.00 dB; PMF: 1.00; Duty Cycle: 1:1.00

Medium Parameters used: $f=5549.5$ MHz; $\sigma = 5.80$ S/m; $\epsilon_r = 47.3$; $\rho = 1000.0$ g/cm³

Phantom section: Flat Section

DASY Configuration:

Probe: EX3DV4 - SN7358; ConvF: (3.95,3.95,3.95); Calibrated: 21/04/2015;

Sensor-Surface: 1.4 mm (Mechanical Surface Detection (Locations From Previous Scan Used))


Electronics: DAE3 Sn442; Calibrated: 3/12/2014

Phantom: ELI v4.0 (30deg probe tilt); Type: QDOVA001BB; Serial: TP:1101

DASY52 52.8.8(1222); SEMCAD X Version 14.6.10 (7331)

Body Lap Held ANT 1 WWAN Ant. IN (OFDM) 28-Aug-2015/Channel 110 Test/Area Scan (61x91x1): Interpolated grid: $dx=1.0$ mm, $dy=1.0$ mm; Maximum value of SAR (interpolated) = 0.113 W/kg**Body Lap Held ANT 1 WWAN Ant. IN (OFDM) 28-Aug-2015/Channel 110 Test/Zoom Scan (31x31x61)/Cube 0:** Interpolated grid: $dx=0.8$ mm, $dy=0.8$ mm, $dz=0.4$ mm; Reference Value = 3.307 V/m; **Power Drift = 0.14 dB****Averaged SAR: SAR(1g) = 0.026 W/kg; SAR(10g) = 0.006 W/kg**

Maximum value of SAR (interpolated) = 0.340 W/kg

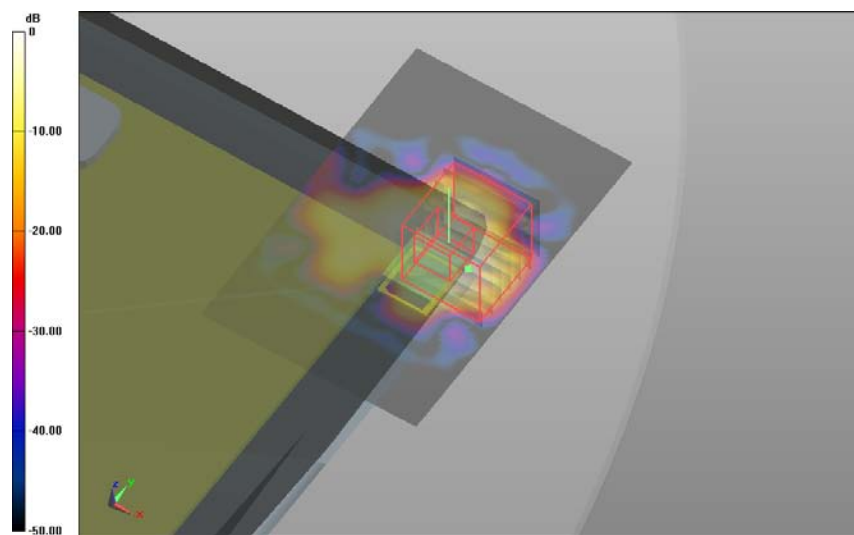


0 dB = 0.113 W/kg = -9.47 dBW/kg

SAR Measurement Plot 30



Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

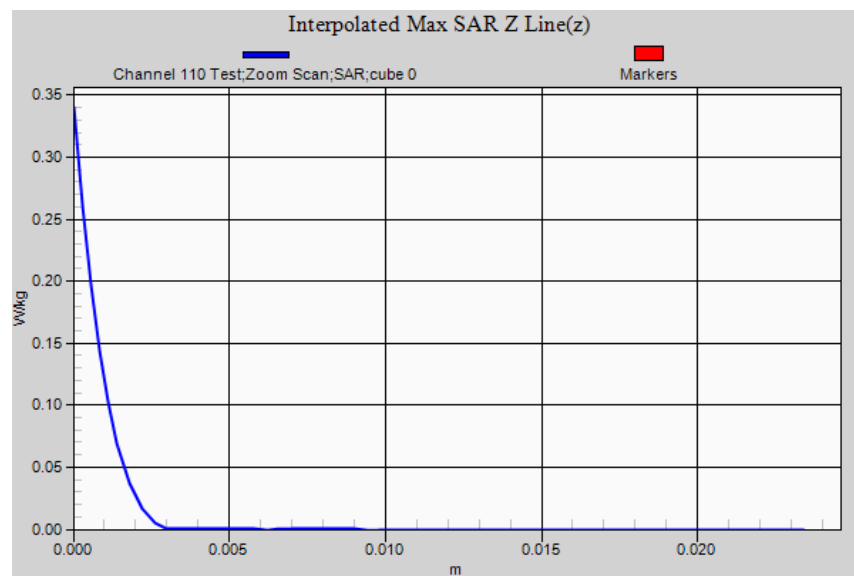

Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

Test Lab: EMCTech

Test File: M150814 5600 MHz WLAN FCC.da52:2

DUT Name: Fujitsu Tablet with 11 abgn/ac WLAN, Type: 8260NGW, Serial: WFM (MAC):A4:34:D9:09:92:96**Configuration: Body Lap Held ANT 1 WWAN Ant. IN (OFDM) 28-Aug-2015**

Communication System: 0 - OFDM 5 GHz HT0 (80 MHz); Communication System Band: 5.6 GHz Band;

Frequency: 5610 MHz, Communication System PAR: 0.00 dB; PMF: 0.00; Duty Cycle: 1:1.00

Medium Parameters used: $f=5610.55$ MHz; $\sigma = 5.90$ S/m; $\epsilon_r = 47.1$; $\rho = 1000.0$ g/cm³

Phantom section: Flat Section

DASY Configuration:

Probe: EX3DV4 - SN7358; ConvF: (3.95,3.95,3.95); Calibrated: 21/04/2015;

Sensor-Surface: 1.4 mm (Mechanical Surface Detection (Locations From Previous Scan Used))


Electronics: DAE3 Sn442; Calibrated: 3/12/2014

Phantom: ELI v4.0 (30deg probe tilt); Type: QDOVA001BB; Serial: TP:1101


DASY52 52.8.8(1222); SEMCAD X Version 14.6.10 (7331)

Body Lap Held ANT 1 WWAN Ant. IN (OFDM) 28-Aug-2015/Channel 122 Test/Area Scan (61x91x1): Interpolated grid: dx=1.0 mm, dy=1.0 mm; Maximum value of SAR (interpolated) = 0.180 W/kg**Body Lap Held ANT 1 WWAN Ant. IN (OFDM) 28-Aug-2015/Channel 122 Test/Zoom Scan (31x31x61)/Cube 0:** Interpolated grid: dx=0.8 mm, dy=0.8 mm, dz=0.4 mm; Reference Value = 3.277 V/m; **Power Drift = 0.12 dB****Averaged SAR: SAR(1g) = 0.025 W/kg; SAR(10g) = 0.005 W/kg**

Maximum value of SAR (interpolated) = 0.382 W/kg

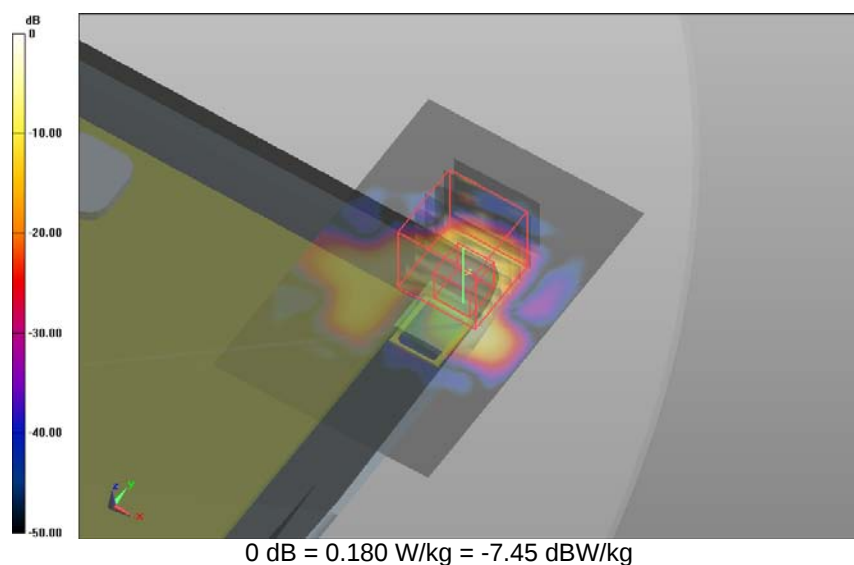

SAR Measurement Plot 31

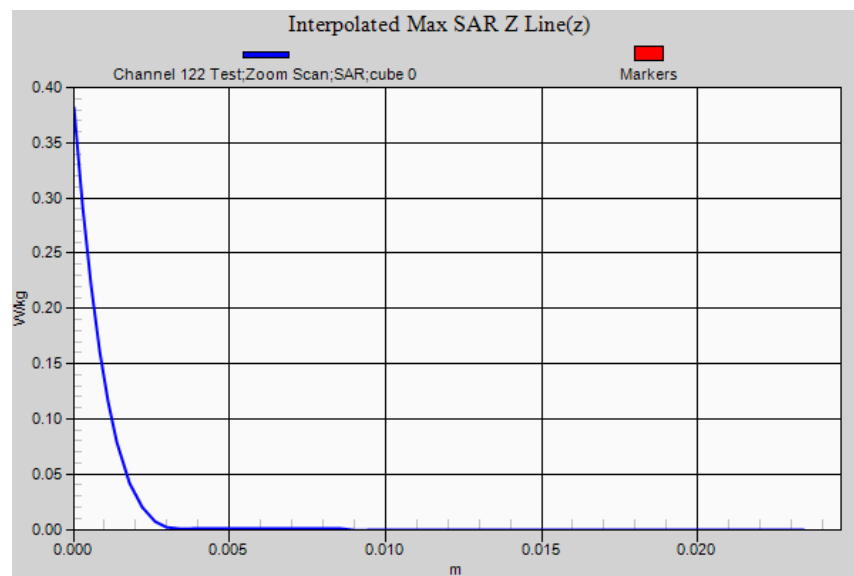

Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

Test Lab: EMCTech Test File: M150814 5600 MHz WLAN FCC.da52:3

DUT Name: Fujitsu Tablet with 11 abgn/ac WLAN, Type: 8260NGW, Serial: WFM (MAC):A4:34:D9:09:92:96

Configuration: Body Lap Held ANT 2 WWAN Ant. IN (OFDM) 28-Aug-2015

Communication System: 0 - OFDM 5 GHz HT0 (80 MHz); Communication System Band: 5.6 GHz Band;

Frequency: 5530 MHz, Communication System PAR: 0.00 dB; PMF: 0.00; Duty Cycle: 1:1.00

Medium Parameters used: $f=5529.7$ MHz; $\sigma = 5.77$ S/m; $\epsilon_r = 47.4$; $\rho = 1000.0$ g/cm³

Phantom section: Flat Section

DASY Configuration:

Probe: EX3DV4 - SN7358; ConvF: (3.95,3.95,3.95); Calibrated: 21/04/2015;

Sensor-Surface: 1.4 mm (Mechanical Surface Detection)

Electronics: DAE3 Sn442; Calibrated: 3/12/2014

Phantom: ELI v4.0 (30deg probe tilt); Type: QDOVA001BB; Serial: TP:1101


DASY52 52.8.8(1222); SEMCAD X Version 14.6.10 (7331)

Body Lap Held ANT 2 WWAN Ant. IN (OFDM) 28-Aug-2015/Channel 106 Test/Area Scan (61x91x1): Interpolated grid: dx=1.0 mm, dy=1.0 mm; Maximum value of SAR (interpolated) = 0.506 W/kg

Body Lap Held ANT 2 WWAN Ant. IN (OFDM) 28-Aug-2015/Channel 106 Test/Zoom Scan (31x31x61)/Cube 0: Interpolated grid: dx=0.8 mm, dy=0.8 mm, dz=0.4 mm; Reference Value = 3.511 V/m; **Power Drift = 0.07 dB**

Averaged SAR: SAR(1g) = 0.052 W/kg; SAR(10g) = 0.017 W/kg

Maximum value of SAR (interpolated) = 0.272 W/kg

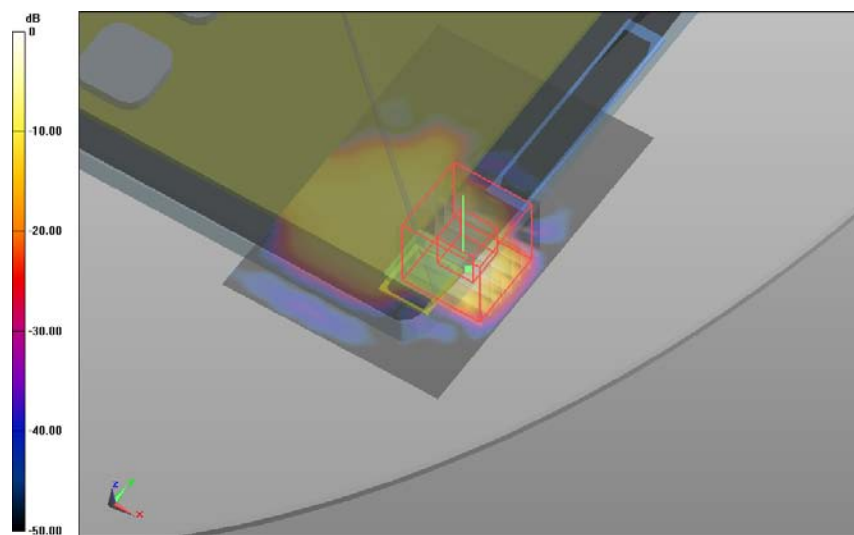


0 dB = 0.506 W/kg = -2.96 dBW/kg

SAR Measurement Plot 32



Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

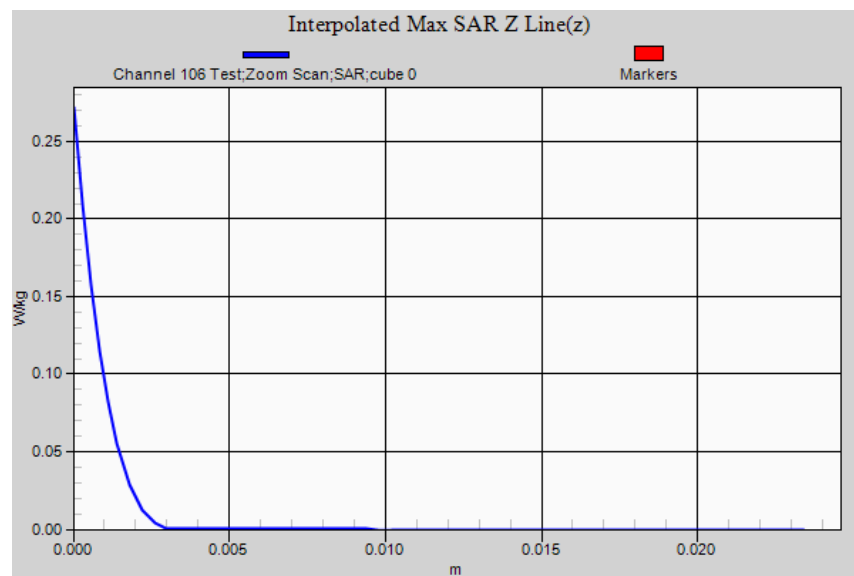

Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

Test Lab: EMCTech

Test File: M150814 5600 MHz WLAN FCC.da52:3

DUT Name: Fujitsu Tablet with 11 abgn/ac WLAN, Type: 8260NGW, Serial: WFM (MAC):A4:34:D9:09:92:96**Configuration: Body Lap Held ANT 2 WWAN Ant. IN (OFDM) 28-Aug-2015**

Communication System: 0 - OFDM 5 GHz HT0 (80 MHz); Communication System Band: 5.6 GHz Band;

Frequency: 5610 MHz, Communication System PAR: 0.00 dB; PMF: 0.00; Duty Cycle: 1:1.00

Medium Parameters used: $f=5610.55$ MHz; $\sigma = 5.90$ S/m; $\epsilon_r = 47.1$; $\rho = 1000.0$ g/cm³

Phantom section: Flat Section

DASY Configuration:

Probe: EX3DV4 - SN7358; ConvF: (3.95,3.95,3.95); Calibrated: 21/04/2015;

Sensor-Surface: 1.4 mm (Mechanical Surface Detection)


Electronics: DAE3 Sn442; Calibrated: 3/12/2014

Phantom: ELI v4.0 (30deg probe tilt); Type: QDOVA001BB; Serial: TP:1101

DASY52 52.8.8(1222); SEMCAD X Version 14.6.10 (7331)

Body Lap Held ANT 2 WWAN Ant. IN (OFDM) 28-Aug-2015/Channel 122 Test/Area Scan (61x91x1): Interpolated grid: $dx=1.0$ mm, $dy=1.0$ mm; Maximum value of SAR (interpolated) = 0.254 W/kg**Body Lap Held ANT 2 WWAN Ant. IN (OFDM) 28-Aug-2015/Channel 122 Test/Zoom Scan (31x31x61)/Cube 0:** Interpolated grid: $dx=0.8$ mm, $dy=0.8$ mm, $dz=0.4$ mm; Reference Value = 4.136 V/m; **Power Drift = -0.05 dB****Averaged SAR: SAR(1g) = 0.049 W/kg; SAR(10g) = 0.016 W/kg**

Maximum value of SAR (interpolated) = 0.334 W/kg

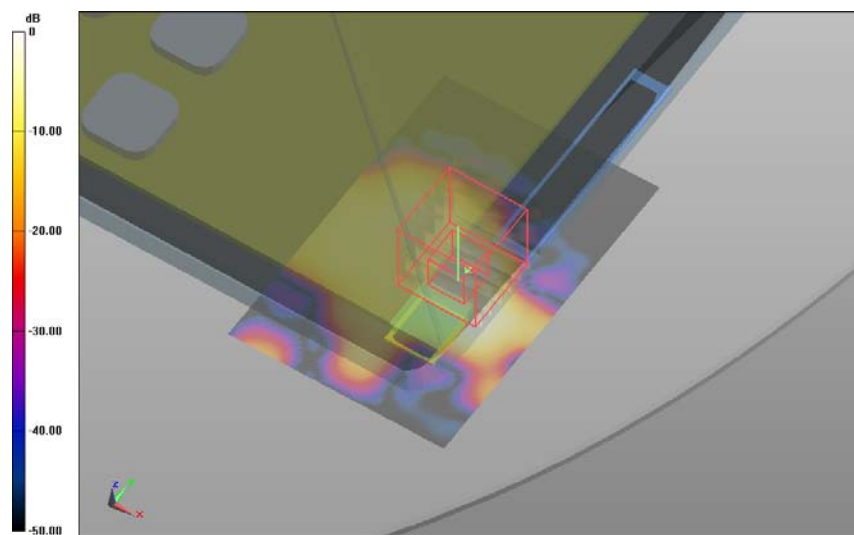


0 dB = 0.254 W/kg = -5.95 dBW/kg

SAR Measurement Plot 33



Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

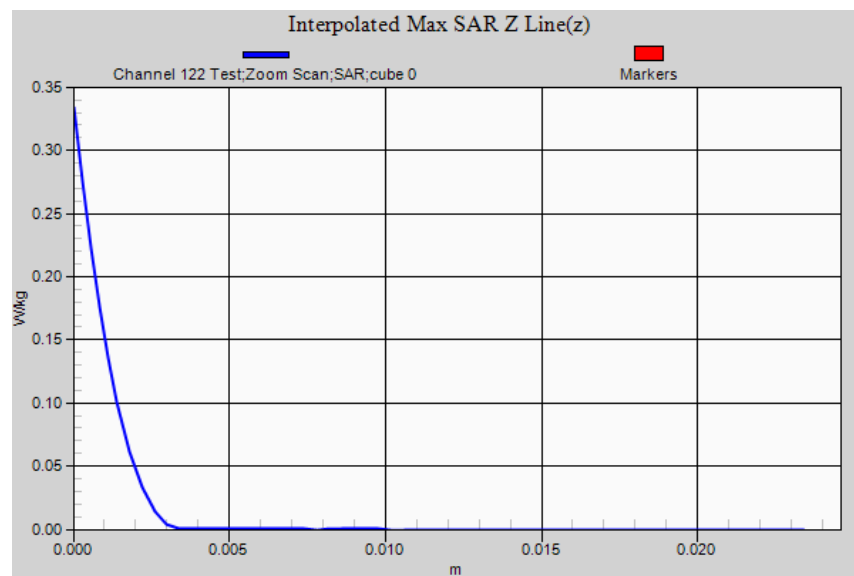

Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

Test Lab: EMCTech

Test File: M150814 5600 MHz WLAN FCC.da52:4

DUT Name: Fujitsu Tablet with 11 abgn/ac WLAN, Type: 8260NGW, Serial: WFM (MAC):A4:34:D9:09:92:96**Configuration: Body Lap Held ANT 2 WWAN Ant. OUT (OFDM) 28-Aug-2015**

Communication System: 0 - OFDM 5 GHz HT0 (80 MHz); Communication System Band: 5.6 GHz Band;

Frequency: 5530 MHz, Communication System PAR: 0.00 dB; PMF: 0.00; Duty Cycle: 1:1.00

Medium Parameters used: $f=5529.7$ MHz; $\sigma = 5.77$ S/m; $\epsilon_r = 47.4$; $\rho = 1000.0$ g/cm³

Phantom section: Flat Section

DASY Configuration:

Probe: EX3DV4 - SN7358; ConvF: (3.95,3.95,3.95); Calibrated: 21/04/2015;

Sensor-Surface: 1.4 mm (Mechanical Surface Detection)

Electronics: DAE3 Sn442; Calibrated: 3/12/2014

Phantom: ELI v4.0 (30deg probe tilt); Type: QDOVA001BB; Serial: TP:1101


DASY52 52.8.8(1222); SEMCAD X Version 14.6.10 (7331)

Body Lap Held ANT 2 WWAN Ant. OUT (OFDM) 28-Aug-2015/Channel 106 Test/Area Scan (61x91x1):

Interpolated grid: dx=1.0 mm, dy=1.0 mm; Maximum value of SAR (interpolated) = 0.173 W/kg

Body Lap Held ANT 2 WWAN Ant. OUT (OFDM) 28-Aug-2015/Channel 106 Test/Zoom Scan**(31x31x61)/Cube 0: Interpolated grid: dx=0.8 mm, dy=0.8 mm, dz=0.4 mm; Reference Value = 3.524 V/m; Power Drift = 0.07 dB****Averaged SAR: SAR(1g) = 0.041 W/kg; SAR(10g) = 0.014 W/kg**

Maximum value of SAR (interpolated) = 0.393 W/kg

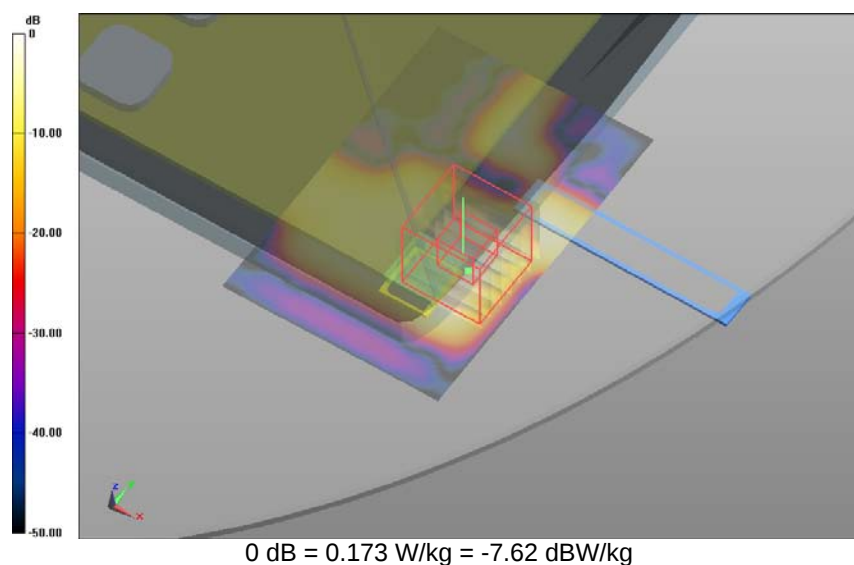


SAR Measurement Plot 34



Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

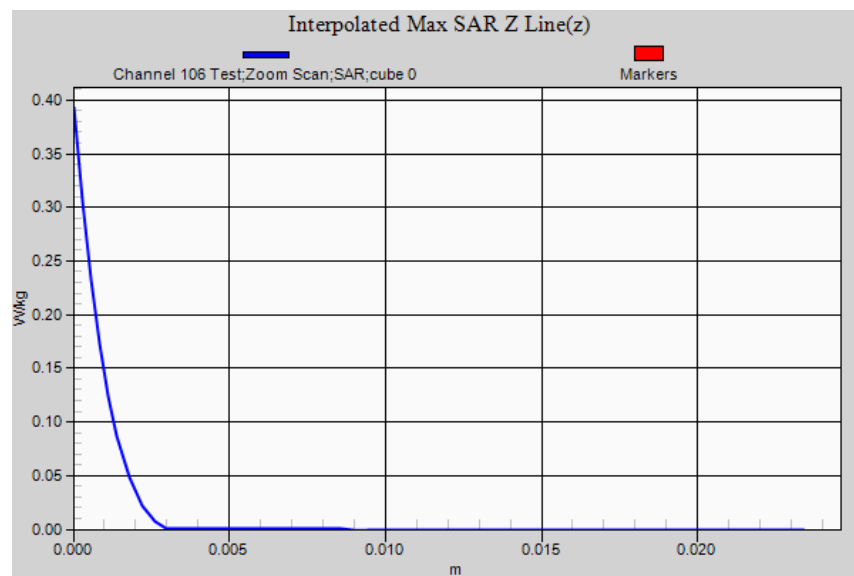

Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

Test Lab: EMCTech

Test File: M150814 5600 MHz WLAN FCC.da52:4

DUT Name: Fujitsu Tablet with 11 abgn/ac WLAN, Type: 8260NGW, Serial: WFM (MAC):A4:34:D9:09:92:96**Configuration: Body Lap Held ANT 2 WWAN Ant. OUT (OFDM) 28-Aug-2015**

Communication System: 0 - OFDM 5 GHz HT0 (80 MHz); Communication System Band: 5.6 GHz Band;

Frequency: 5610 MHz, Communication System PAR: 0.00 dB; PMF: 0.00; Duty Cycle: 1:1.00

Medium Parameters used: $f=5610.55$ MHz; $\sigma = 5.90$ S/m; $\epsilon_r = 47.1$; $\rho = 1000.0$ g/cm³

Phantom section: Flat Section

DASY Configuration:

Probe: EX3DV4 - SN7358; ConvF: (3.95,3.95,3.95); Calibrated: 21/04/2015;

Sensor-Surface: 1.4 mm (Mechanical Surface Detection)

Electronics: DAE3 Sn442; Calibrated: 3/12/2014

Phantom: ELI v4.0 (30deg probe tilt); Type: QDOVA001BB; Serial: TP:1101


DASY52 52.8.8(1222); SEMCAD X Version 14.6.10 (7331)

Body Lap Held ANT 2 WWAN Ant. OUT (OFDM) 28-Aug-2015/Channel 122 Test/Area Scan (61x91x1):

Interpolated grid: dx=1.0 mm, dy=1.0 mm; Maximum value of SAR (interpolated) = 0.164 W/kg

Body Lap Held ANT 2 WWAN Ant. OUT (OFDM) 28-Aug-2015/Channel 122 Test/Zoom Scan**(31x31x61)/Cube 0:** Interpolated grid: dx=0.8 mm, dy=0.8 mm, dz=0.4 mm; Reference Value = 4.723 V/m; **Power Drift = -0.07 dB****Averaged SAR: SAR(1g) = 0.045 W/kg; SAR(10g) = 0.016 W/kg**

Maximum value of SAR (interpolated) = 0.353 W/kg

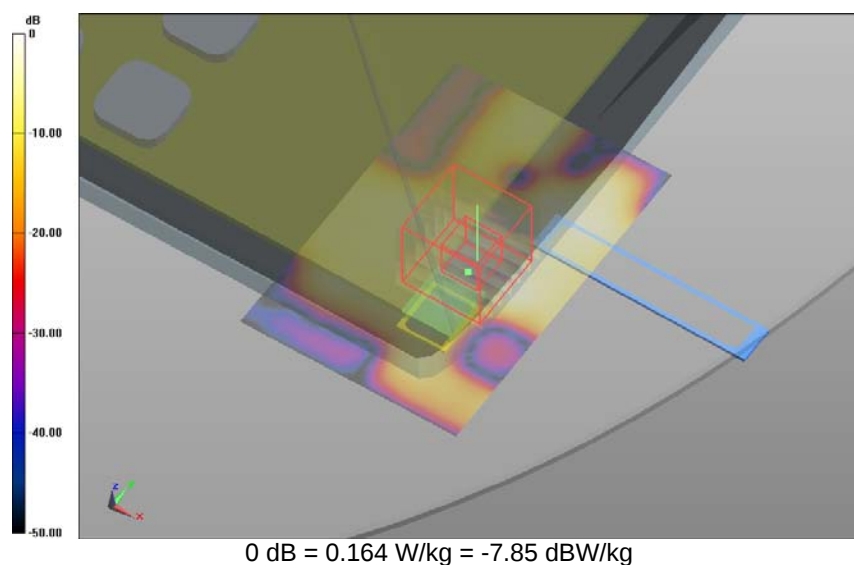


SAR Measurement Plot 35



Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

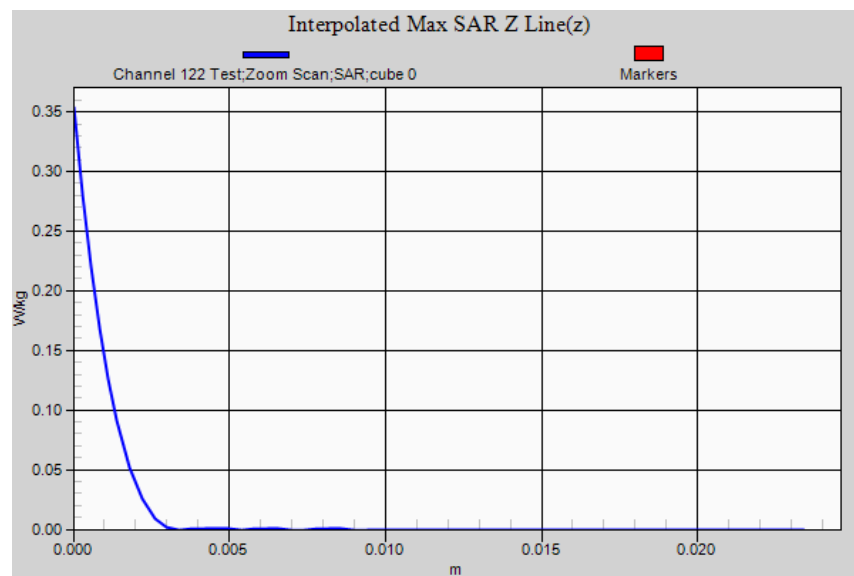

Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

Test Lab: EMCTech

Test File: M150814 5600 MHz WLAN FCC.da52:5

DUT Name: Fujitsu Tablet with 11 abgn/ac WLAN, Type: 8260NGW, Serial: WFM (MAC):A4:34:D9:09:92:96**Configuration: Edge 1 ANT 1 WWAN Ant. IN (OFDM) 28-Aug-2015**

Communication System: 0 - OFDM 5 GHz HT0 (40 MHz); Communication System Band: 5.6 GHz Band;

Frequency: 5510 MHz, Communication System PAR: 0.00 dB; PMF: 1.00; Duty Cycle: 1:1.00

Medium Parameters used: $f=5509.9$ MHz; $\sigma = 5.74$ S/m; $\epsilon_r = 47.4$; $\rho = 1000.0$ g/cm³

Phantom section: Flat Section

DASY Configuration:

Probe: EX3DV4 - SN7358; ConvF: (3.95,3.95,3.95); Calibrated: 21/04/2015;

Sensor-Surface: 1.4 mm (Mechanical Surface Detection)

Electronics: DAE3 Sn442; Calibrated: 3/12/2014

Phantom: ELI v4.0 (30deg probe tilt); Type: QDOVA001BB; Serial: TP:1101


DASY52 52.8.8(1222); SEMCAD X Version 14.6.10 (7331)

Edge 1 ANT 1 WWAN Ant. IN (OFDM) 28-Aug-2015/Channel 102 Test/Area Scan (61x91x1): Interpolated grid:

dx=1.0 mm, dy=1.0 mm; Maximum value of SAR (interpolated) = 2.730 W/kg


Edge 1 ANT 1 WWAN Ant. IN (OFDM) 28-Aug-2015/Channel 102 Test/Zoom Scan (31x31x61)/Cube 0:Interpolated grid: dx=0.8 mm, dy=0.8 mm, dz=0.4 mm; Reference Value = 25.172 V/m; **Power Drift = -0.05 dB****Averaged SAR: SAR(1g) = 0.973 W/kg; SAR(10g) = 0.211 W/kg**

Maximum value of SAR (interpolated) = 4.740 W/kg

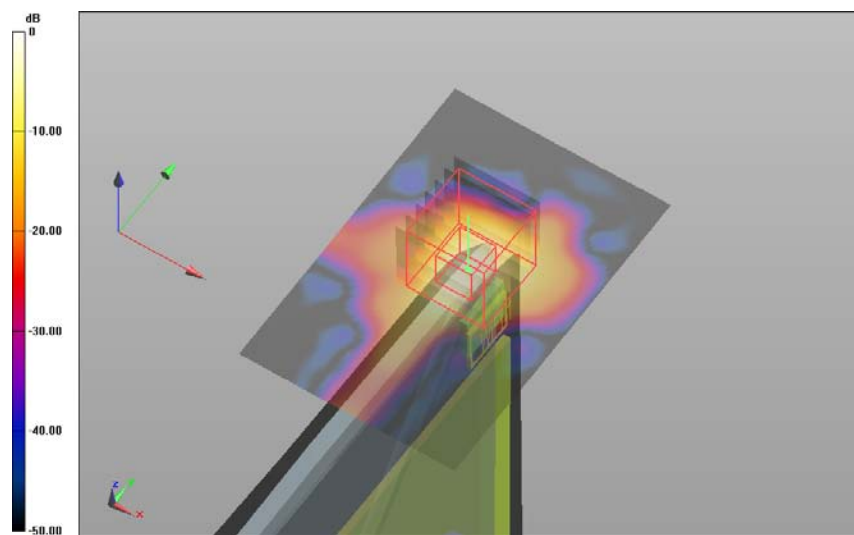

0 dB = 2.73 W/kg = 4.36 dBW/kg

SAR Measurement Plot 36

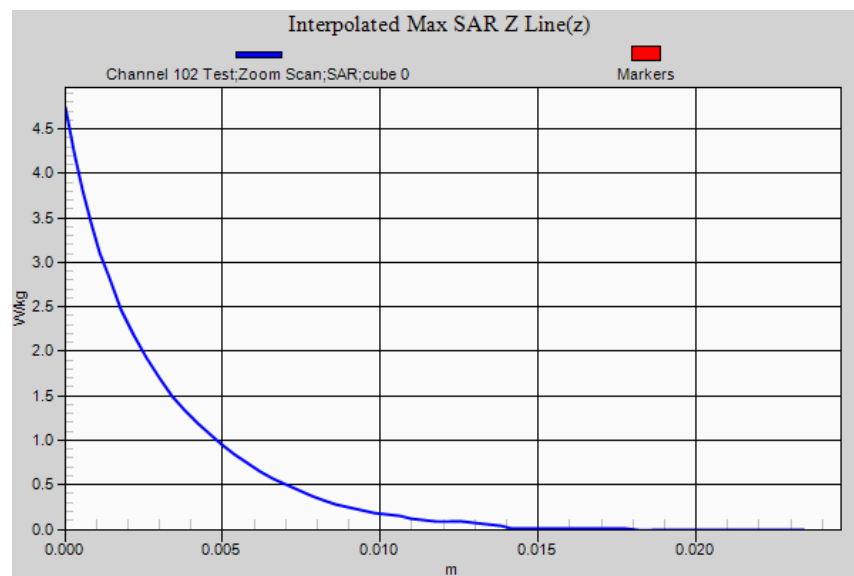

Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

Test Lab: EMCTech

Test File: M150814 5600 MHz WLAN FCC.da52:6

DUT Name: Fujitsu Tablet with 11 abgn/ac WLAN, Type: 8260NGW, Serial: WFM (MAC):A4:34:D9:09:92:96**Configuration: Edge 1 ANT 1 WWAN Ant. IN (OFDM) 31-Aug-2015**

Communication System: 0 - OFDM 5 GHz HT0 (40 MHz); Communication System Band: 5.6 GHz Band;

Frequency: 5550 MHz, Communication System PAR: 0.00 dB; PMF: 1.00; Duty Cycle: 1:1.00

Medium Parameters used: $f=5549.5$ MHz; $\sigma = 5.73$ S/m; $\epsilon_r = 47.3$; $\rho = 1000.0$ g/cm³

Phantom section: Flat Section

DASY Configuration:

Probe: EX3DV4 - SN7358; ConvF: (3.95,3.95,3.95); Calibrated: 21/04/2015;

Sensor-Surface: 1.4 mm (Mechanical Surface Detection)

Electronics: DAE3 Sn442; Calibrated: 3/12/2014

Phantom: ELI v4.0 (30deg probe tilt); Type: QDOVA001BB; Serial: TP:1101


DASY52 52.8.8(1222); SEMCAD X Version 14.6.10 (7331)

Edge 1 ANT 1 WWAN Ant. IN (OFDM) 31-Aug-2015/Channel 110 Test/Area Scan (61x91x1): Interpolated grid:

dx=1.0 mm, dy=1.0 mm; Maximum value of SAR (interpolated) = 2.540 W/kg

Edge 1 ANT 1 WWAN Ant. IN (OFDM) 31-Aug-2015/Channel 110 Test/Zoom Scan (31x31x61)/Cube 0:Interpolated grid: dx=0.8 mm, dy=0.8 mm, dz=0.4 mm; Reference Value = 14.969 V/m; **Power Drift = 0.20 dB****Averaged SAR: SAR(1g) = 1.030 W/kg; SAR(10g) = 0.214 W/kg**

Maximum value of SAR (interpolated) = 5.230 W/kg

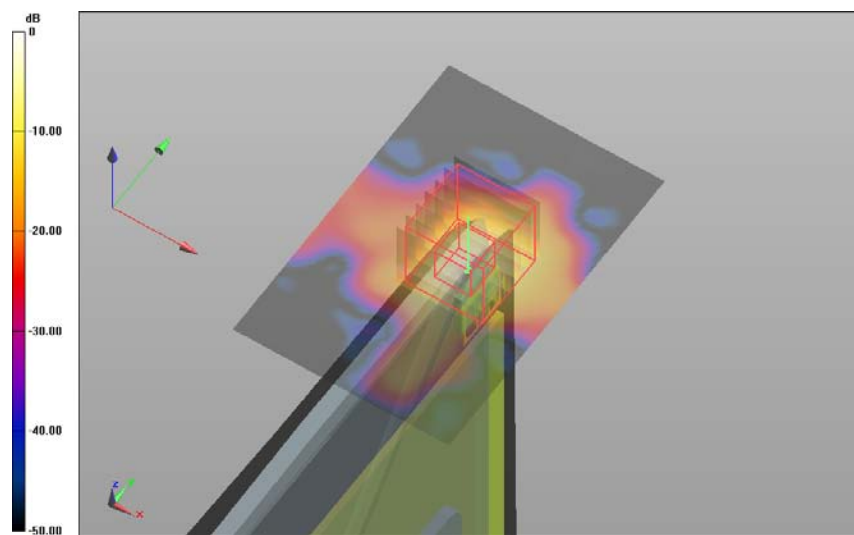


0 dB = 2.54 W/kg = 4.05 dBW/kg

SAR Measurement Plot 37



Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

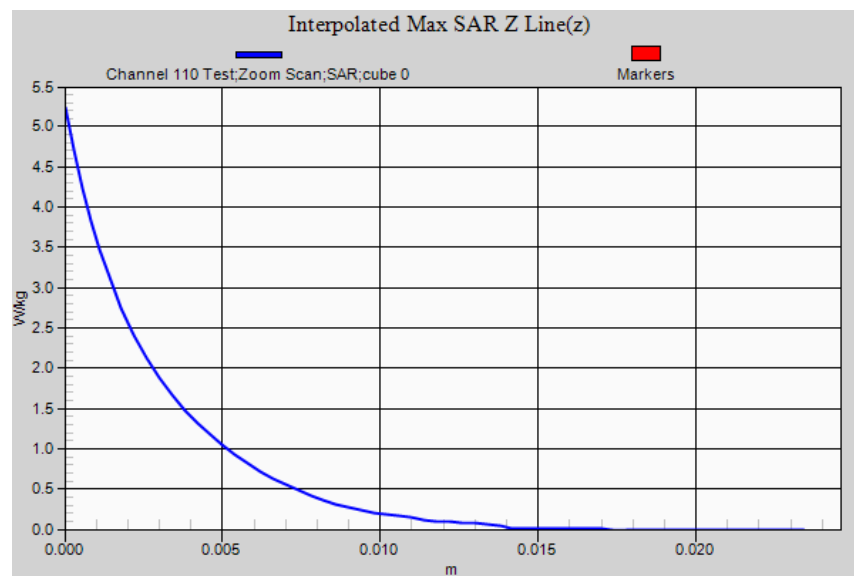

Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

Test Lab: EMCTech

Test File: M150814 5600 MHz WLAN FCC.da52:6

DUT Name: Fujitsu Tablet with 11 abgn/ac WLAN, Type: 8260NGW, Serial: WFM (MAC):A4:34:D9:09:92:96**Configuration: Edge 1 ANT 1 WWAN Ant. IN (OFDM) 31-Aug-2015**

Communication System: 0 - OFDM 5 GHz HT0 (80 MHz); Communication System Band: 5.6 GHz Band;

Frequency: 5610 MHz, Communication System PAR: 0.00 dB; PMF: 0.00; Duty Cycle: 1:1.00

Medium Parameters used: $f=5610.55$ MHz; $\sigma = 5.83$ S/m; $\epsilon_r = 47.1$; $\rho = 1000.0$ g/cm³

Phantom section: Flat Section

DASY Configuration:

Probe: EX3DV4 - SN7358; ConvF: (3.95,3.95,3.95); Calibrated: 21/04/2015;

Sensor-Surface: 1.4 mm (Mechanical Surface Detection)

Electronics: DAE3 Sn442; Calibrated: 3/12/2014

Phantom: ELI v4.0 (30deg probe tilt); Type: QDOVA001BB; Serial: TP:1101


DASY52 52.8.8(1222); SEMCAD X Version 14.6.10 (7331)

Edge 1 ANT 1 WWAN Ant. IN (OFDM) 31-Aug-2015/Channel 122 Test/Area Scan (61x91x1): Interpolated grid:

dx=1.0 mm, dy=1.0 mm; Maximum value of SAR (interpolated) = 2.910 W/kg

Edge 1 ANT 1 WWAN Ant. IN (OFDM) 31-Aug-2015/Channel 122 Test/Zoom Scan (31x31x61)/Cube 0:Interpolated grid: dx=0.8 mm, dy=0.8 mm, dz=0.4 mm; Reference Value = 14.901 V/m; **Power Drift = -0.18 dB****Averaged SAR: SAR(1g) = 1.180 W/kg; SAR(10g) = 0.244 W/kg**

Maximum value of SAR (interpolated) = 6.060 W/kg

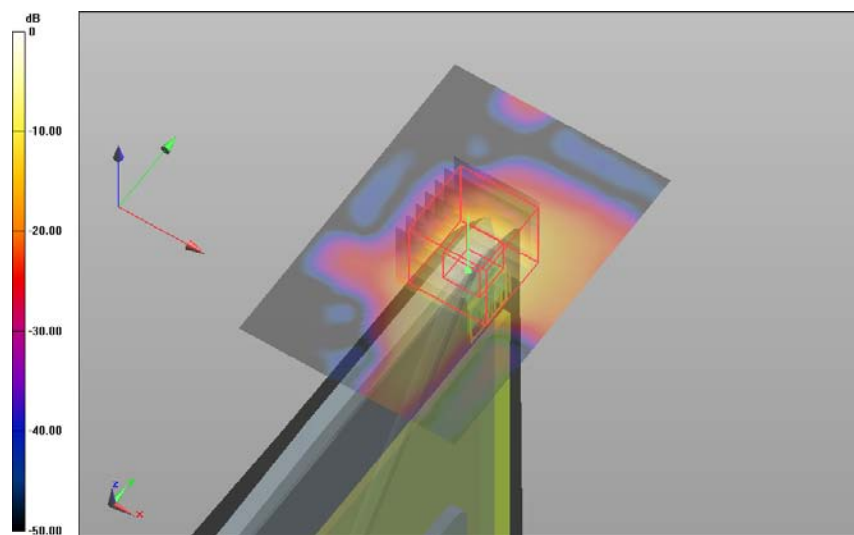


0 dB = 2.91 W/kg = 4.64 dBW/kg

SAR Measurement Plot 38



Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

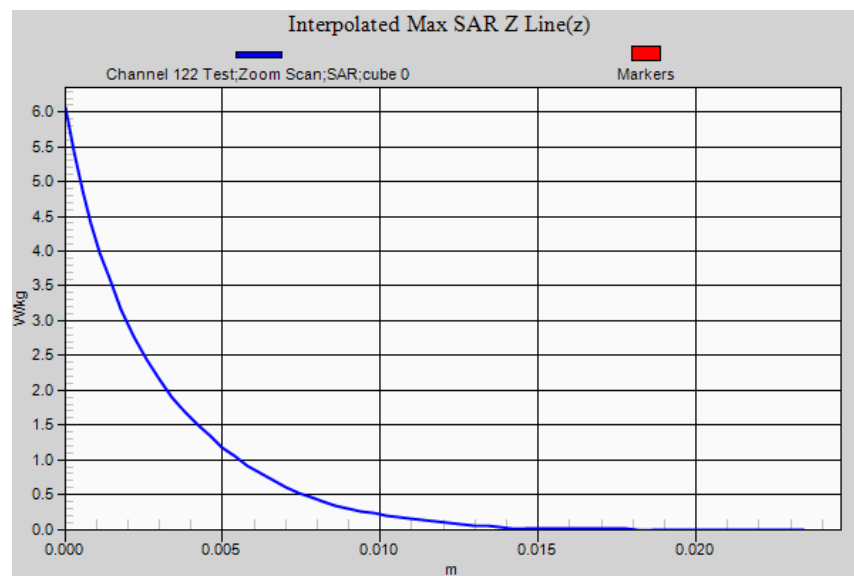

Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

Test Lab: EMCTech

Test File: M150814 5600 MHz WLAN FCC.da52:7

DUT Name: Fujitsu Tablet with 11 abgn/ac WLAN, Type: 8260NGW, Serial: WFM (MAC):A4:34:D9:09:92:96**Configuration: Edge 1 ANT 1 WWAN Ant. IN Variability (OFDM) 31-Aug-2015**

Communication System: 0 - OFDM 5 GHz HT0 (80 MHz); Communication System Band: 5.6 GHz Band;

Frequency: 5610 MHz, Communication System PAR: 0.00 dB; PMF: 0.00; Duty Cycle: 1:1.00

Medium Parameters used: $f=5610.55$ MHz; $\sigma = 5.83$ S/m; $\epsilon_r = 47.1$; $\rho = 1000.0$ g/cm³

Phantom section: Flat Section

DASY Configuration:

Probe: EX3DV4 - SN7358; ConvF: (3.95,3.95,3.95); Calibrated: 21/04/2015;

Sensor-Surface: 1.4 mm (Mechanical Surface Detection)


Electronics: DAE3 Sn442; Calibrated: 3/12/2014

Phantom: ELI v4.0 (30deg probe tilt); Type: QDOVA001BB; Serial: TP:1101

DASY52 52.8.8(1222); SEMCAD X Version 14.6.10 (7331)

Edge 1 ANT 1 WWAN Ant. IN Variability (OFDM) 31-Aug-2015/Channel 122 Test/Area Scan (61x91x1):Interpolated grid: $dx=1.0$ mm, $dy=1.0$ mm; Maximum value of SAR (interpolated) = 2.970 W/kg**Edge 1 ANT 1 WWAN Ant. IN Variability (OFDM) 31-Aug-2015/Channel 122 Test/Zoom Scan****(31x31x61)/Cube 0:** Interpolated grid: $dx=0.8$ mm, $dy=0.8$ mm, $dz=0.4$ mm; Reference Value = 12.160 V/m;**Power Drift = -0.13 dB****Averaged SAR: SAR(1g) = 1.180 W/kg; SAR(10g) = 0.249 W/kg**

Maximum value of SAR (interpolated) = 5.930 W/kg

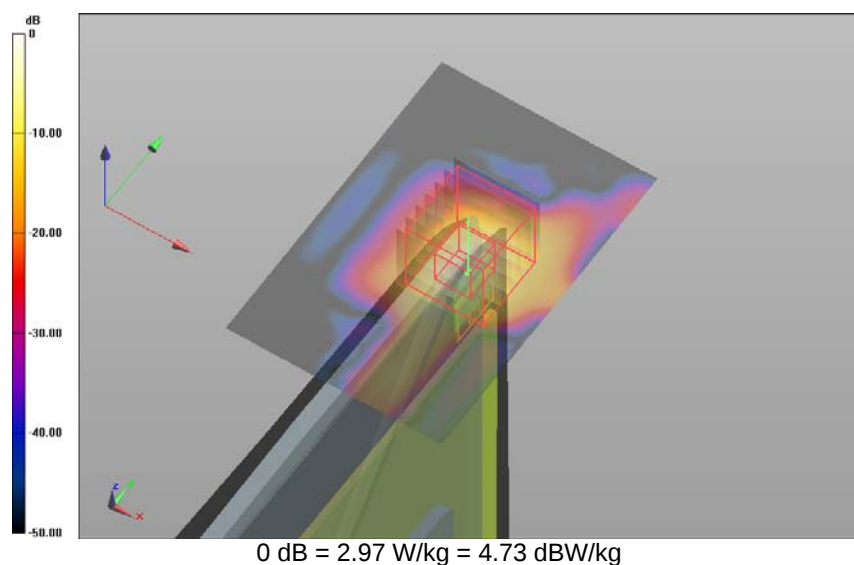


SAR Measurement Plot 39



Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

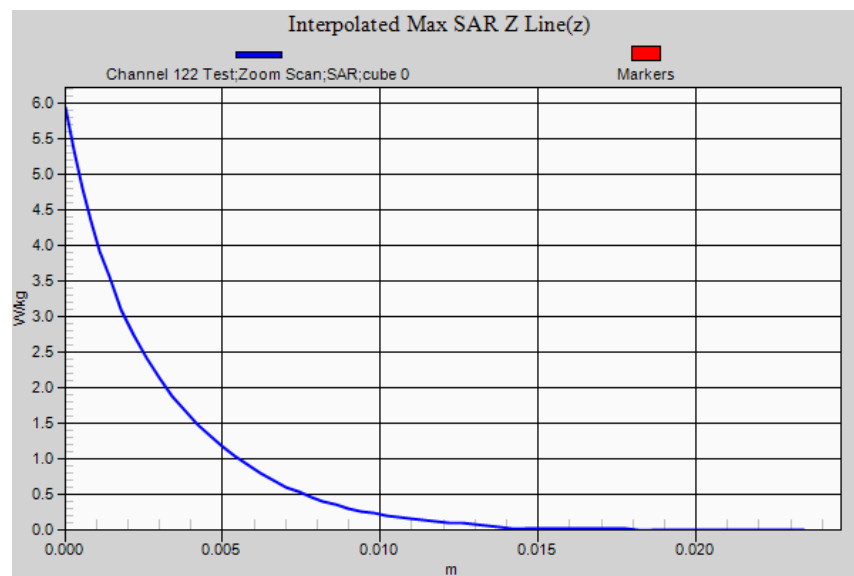

Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

Test Lab: EMCTech

Test File: M150814 5600 MHz WLAN FCC.da52:8

DUT Name: Fujitsu Tablet with 11 abgn/ac WLAN, Type: 8260NGW, Serial: WFM (MAC):A4:34:D9:09:92:96**Configuration: Edge 1 ANT 2 WWAN Ant. IN (OFDM) 31-Aug-2015**

Communication System: 0 - OFDM 5 GHz HT0 (80 MHz); Communication System Band: 5.6 GHz Band;

Frequency: 5530 MHz, Communication System PAR: 0.00 dB; PMF: 0.00; Duty Cycle: 1:1.00

Medium Parameters used: $f=5529.7$ MHz; $\sigma = 5.70$ S/m; $\epsilon_r = 47.4$; $\rho = 1000.0$ g/cm³

Phantom section: Flat Section

DASY Configuration:

Probe: EX3DV4 - SN7358; ConvF: (3.95,3.95,3.95); Calibrated: 21/04/2015;

Sensor-Surface: 1.4 mm (Mechanical Surface Detection)

Electronics: DAE3 Sn442; Calibrated: 3/12/2014

Phantom: ELI v4.0 (30deg probe tilt); Type: QDOVA001BB; Serial: TP:1101


DASY52 52.8.8(1222); SEMCAD X Version 14.6.10 (7331)

Edge 1 ANT 2 WWAN Ant. IN (OFDM) 31-Aug-2015/Channel 106 Test/Area Scan (61x91x1): Interpolated grid:

dx=1.0 mm, dy=1.0 mm; Maximum value of SAR (interpolated) = 2.070 W/kg


Edge 1 ANT 2 WWAN Ant. IN (OFDM) 31-Aug-2015/Channel 106 Test/Zoom Scan (31x31x61)/Cube 0:Interpolated grid: dx=0.8 mm, dy=0.8 mm, dz=0.4 mm; Reference Value = 16.047 V/m; **Power Drift = -0.03 dB****Averaged SAR: SAR(1g) = 1.090 W/kg; SAR(10g) = 0.241 W/kg**

Maximum value of SAR (interpolated) = 5.380 W/kg

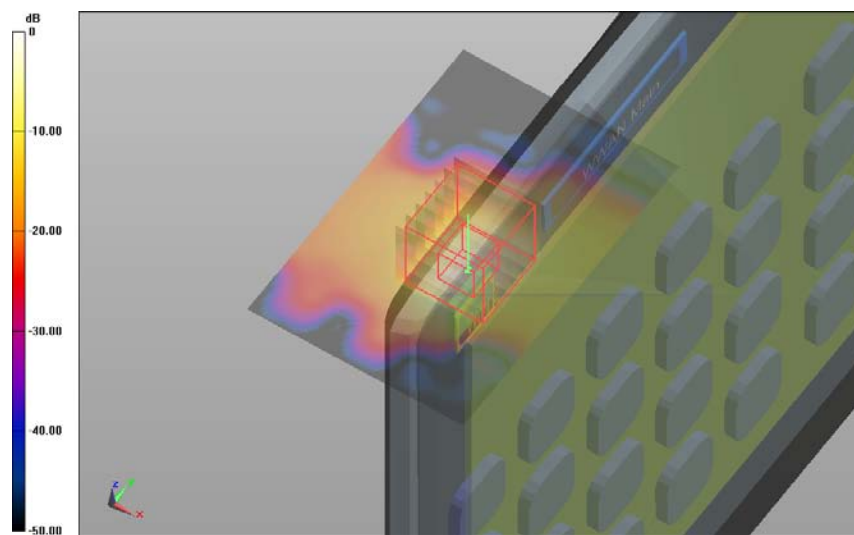

0 dB = 2.07 W/kg = 3.16 dBW/kg

SAR Measurement Plot 40

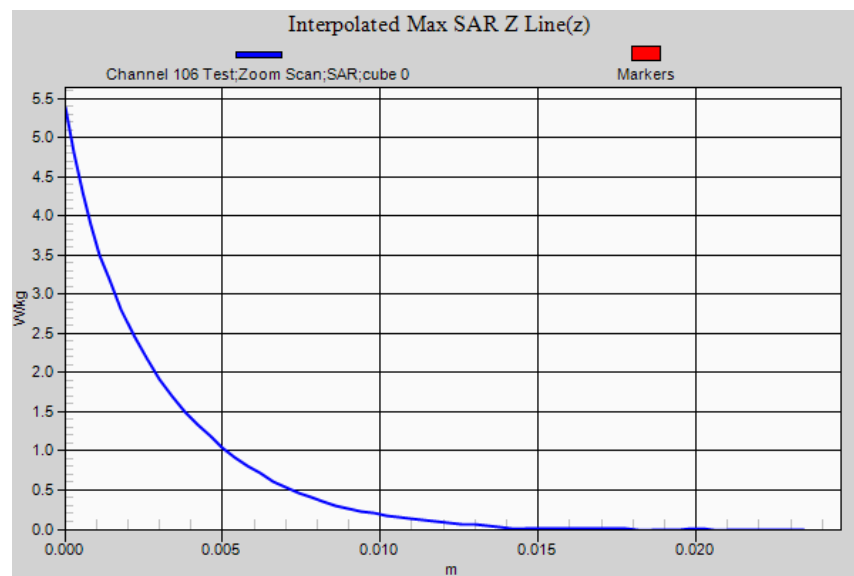

Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

Test Lab: EMCTech

Test File: M150814 5600 MHz WLAN FCC.da52:8

DUT Name: Fujitsu Tablet with 11 abgn/ac WLAN, Type: 8260NGW, Serial: WFM (MAC):A4:34:D9:09:92:96**Configuration: Edge 1 ANT 2 WWAN Ant. IN (OFDM) 31-Aug-2015**

Communication System: 0 - OFDM 5 GHz HT0 (80 MHz); Communication System Band: 5.6 GHz Band;

Frequency: 5610 MHz, Communication System PAR: 0.00 dB; PMF: 0.00; Duty Cycle: 1:1.00

Medium Parameters used: $f=5610.55$ MHz; $\sigma = 5.83$ S/m; $\epsilon_r = 47.1$; $\rho = 1000.0$ g/cm³

Phantom section: Flat Section

DASY Configuration:

Probe: EX3DV4 - SN7358; ConvF: (3.95,3.95,3.95); Calibrated: 21/04/2015;

Sensor-Surface: 1.4 mm (Mechanical Surface Detection)

Electronics: DAE3 Sn442; Calibrated: 3/12/2014

Phantom: ELI v4.0 (30deg probe tilt); Type: QDOVA001BB; Serial: TP:1101


DASY52 52.8.8(1222); SEMCAD X Version 14.6.10 (7331)

Edge 1 ANT 2 WWAN Ant. IN (OFDM) 31-Aug-2015/Channel 122 Test/Area Scan (61x91x1): Interpolated grid:

dx=1.0 mm, dy=1.0 mm; Maximum value of SAR (interpolated) = 1.960 W/kg


Edge 1 ANT 2 WWAN Ant. IN (OFDM) 31-Aug-2015/Channel 122 Test/Zoom Scan (31x31x61)/Cube 0:Interpolated grid: dx=0.8 mm, dy=0.8 mm, dz=0.4 mm; Reference Value = 14.776 V/m; **Power Drift = -0.03 dB****Averaged SAR: SAR(1g) = 1.000 W/kg; SAR(10g) = 0.220 W/kg**

Maximum value of SAR (interpolated) = 5.170 W/kg

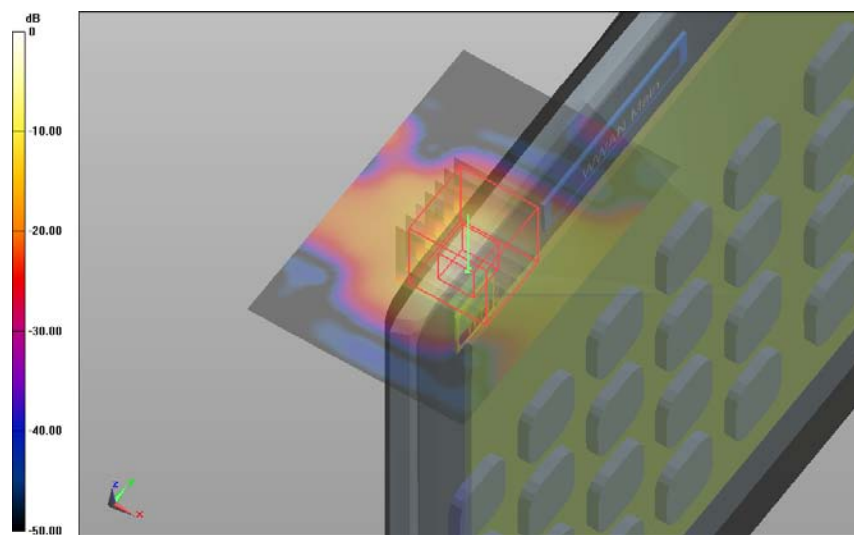

0 dB = 1.96 W/kg = 2.92 dBW/kg

SAR Measurement Plot 41

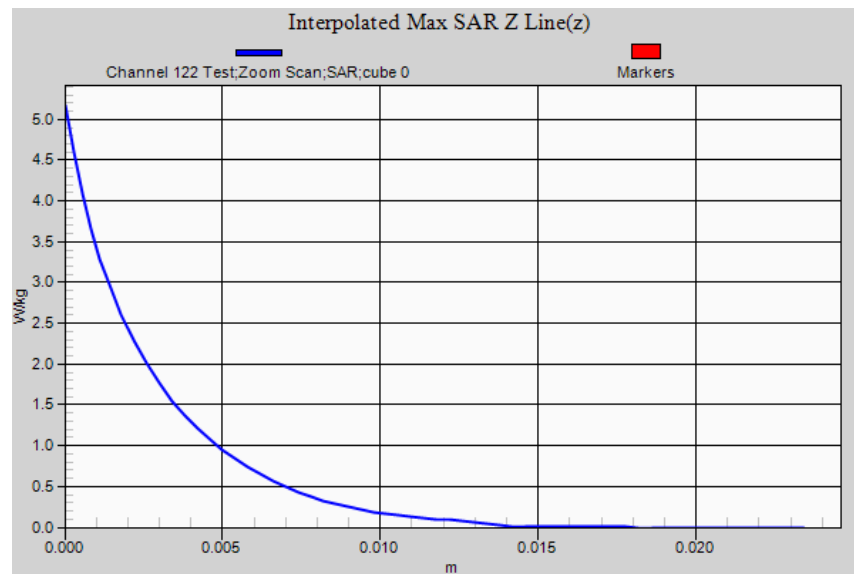

Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

Test Lab: EMCTech

Test File: M150814 5600 MHz WLAN FCC.da52:9

DUT Name: Fujitsu Tablet with 11 abgn/ac WLAN, Type: 8260NGW, Serial: WFM (MAC):A4:34:D9:09:92:96**Configuration: Edge 1 ANT 2 WWAN Ant. IN Variability (OFDM) 31-Aug-2015**

Communication System: 0 - OFDM 5 GHz HT0 (80 MHz); Communication System Band: 5.6 GHz Band;

Frequency: 5530 MHz, Communication System PAR: 0.00 dB; PMF: 0.00; Duty Cycle: 1:1.00

Medium Parameters used: $f=5529.7$ MHz; $\sigma = 5.70$ S/m; $\epsilon_r = 47.4$; $\rho = 1000.0$ g/cm³

Phantom section: Flat Section

DASY Configuration:

Probe: EX3DV4 - SN7358; ConvF: (3.95,3.95,3.95); Calibrated: 21/04/2015;

Sensor-Surface: 1.4 mm (Mechanical Surface Detection)


Electronics: DAE3 Sn442; Calibrated: 3/12/2014

Phantom: ELI v4.0 (30deg probe tilt); Type: QDOVA001BB; Serial: TP:1101

DASY52 52.8.8(1222); SEMCAD X Version 14.6.10 (7331)


Edge 1 ANT 2 WWAN Ant. IN Variability (OFDM) 31-Aug-2015/Channel 106 Test/Area Scan (61x91x1):Interpolated grid: $dx=1.0$ mm, $dy=1.0$ mm; Maximum value of SAR (interpolated) = 2.260 W/kg**Edge 1 ANT 2 WWAN Ant. IN Variability (OFDM) 31-Aug-2015/Channel 106 Test/Zoom Scan****(31x31x61)/Cube 0:** Interpolated grid: $dx=0.8$ mm, $dy=0.8$ mm, $dz=0.4$ mm; Reference Value = 14.631 V/m;**Power Drift = -0.00 dB****Averaged SAR: SAR(1g) = 1.070 W/kg; SAR(10g) = 0.249 W/kg**

Maximum value of SAR (interpolated) = 5.400 W/kg

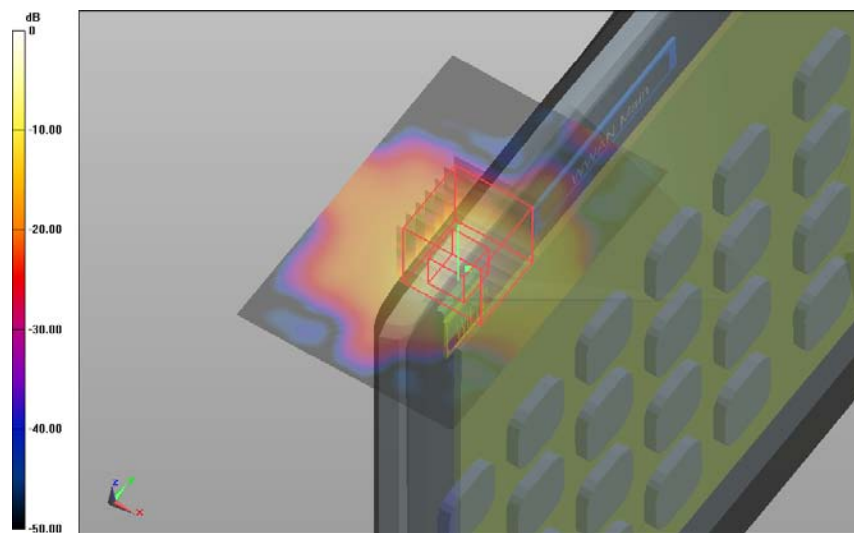

0 dB = 2.26 W/kg = 3.54 dBW/kg

SAR Measurement Plot 42

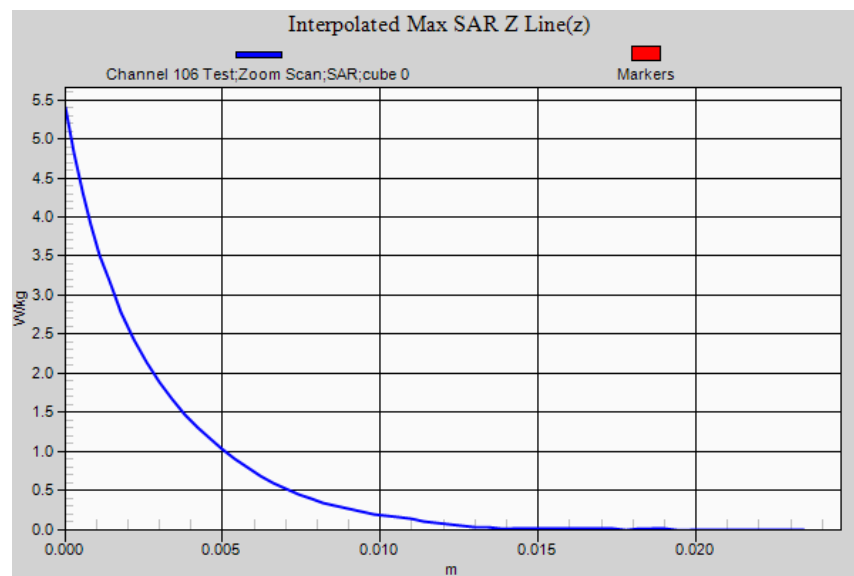

Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

Test Lab: EMCTech

Test File: M150814 5600 MHz WLAN FCC.da52:10

DUT Name: Fujitsu Tablet with 11 abgn/ac WLAN, Type: 8260NGW, Serial: WFM (MAC):A4:34:D9:09:92:96**Configuration: Edge 2 ANT 1 WWAN Ant. IN (OFDM) 31-Aug-2015**

Communication System: 0 - OFDM 5 GHz HT0 (40 MHz); Communication System Band: 5.6 GHz Band;

Frequency: 5550 MHz, Communication System PAR: 0.00 dB; PMF: 1.00; Duty Cycle: 1:1.00

Medium Parameters used: $f=5549.5$ MHz; $\sigma = 5.73$ S/m; $\epsilon_r = 47.3$; $\rho = 1000.0$ g/cm³

Phantom section: Flat Section

DASY Configuration:

Probe: EX3DV4 - SN7358; ConvF: (3.95,3.95,3.95); Calibrated: 21/04/2015;

Sensor-Surface: 1.4 mm (Mechanical Surface Detection)

Electronics: DAE3 Sn442; Calibrated: 3/12/2014

Phantom: ELI v4.0 (30deg probe tilt); Type: QDOVA001BB; Serial: TP:1101


DASY52 52.8.8(1222); SEMCAD X Version 14.6.10 (7331)

Edge 2 ANT 1 WWAN Ant. IN (OFDM) 31-Aug-2015/Channel 110 Test/Area Scan (61x91x1): Interpolated grid:

dx=1.0 mm, dy=1.0 mm; Maximum value of SAR (interpolated) = 0.316 W/kg


Edge 2 ANT 1 WWAN Ant. IN (OFDM) 31-Aug-2015/Channel 110 Test/Zoom Scan (31x31x61)/Cube 0:Interpolated grid: dx=0.8 mm, dy=0.8 mm, dz=0.4 mm; Reference Value = 6.327 V/m; **Power Drift = 0.12 dB****Averaged SAR: SAR(1g) = 0.109 W/kg; SAR(10g) = 0.034 W/kg**

Maximum value of SAR (interpolated) = 0.541 W/kg

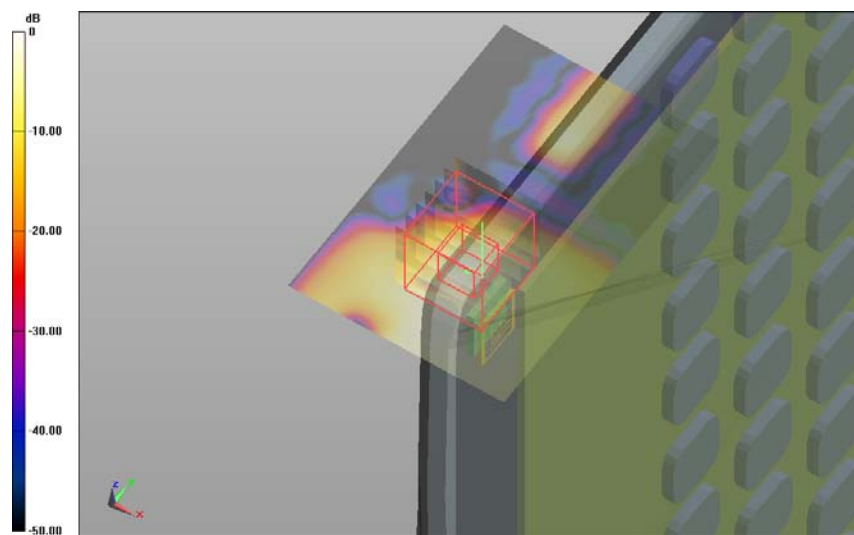

0 dB = 0.316 W/kg = -5.00 dBW/kg

SAR Measurement Plot 43

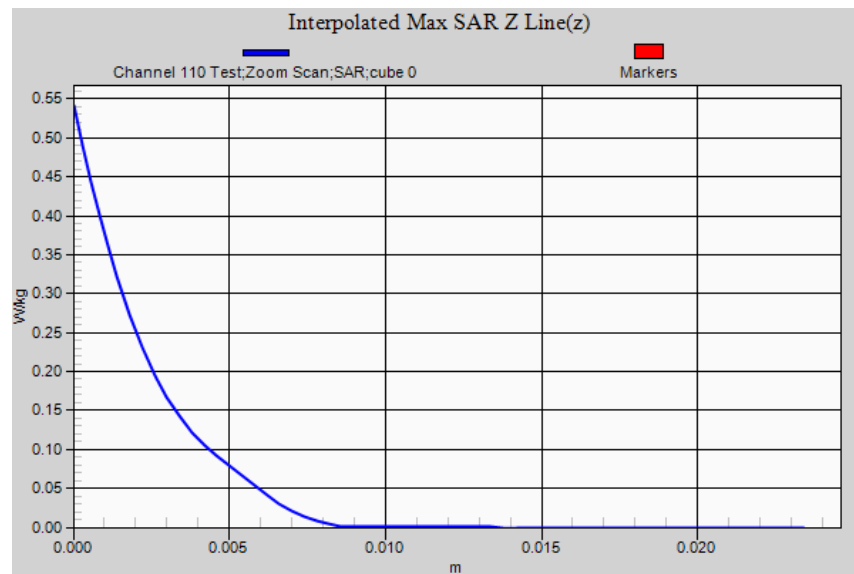

Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

Test Lab: EMCTech

Test File: M150814 5600 MHz WLAN FCC.da52:11

DUT Name: Fujitsu Tablet with 11 abgn/ac WLAN, Type: 8260NGW, Serial: WFM (MAC):A4:34:D9:09:92:96**Configuration: Edge 4 ANT 2 WWAN Ant. IN (OFDM) 31-Aug-2015**

Communication System: 0 - OFDM 5 GHz HT0 (80 MHz); Communication System Band: 5.6 GHz Band;

Frequency: 5610 MHz, Communication System PAR: 0.00 dB; PMF: 0.00; Duty Cycle: 1:1.00

Medium Parameters used: $f=5610.55$ MHz; $\sigma = 5.83$ S/m; $\epsilon_r = 47.1$; $\rho = 1000.0$ g/cm³

Phantom section: Flat Section

DASY Configuration:

Probe: EX3DV4 - SN7358; ConvF: (3.95,3.95,3.95); Calibrated: 21/04/2015;

Sensor-Surface: 1.4 mm (Mechanical Surface Detection)

Electronics: DAE3 Sn442; Calibrated: 3/12/2014

Phantom: ELI v4.0 (30deg probe tilt); Type: QDOVA001BB; Serial: TP:1101


DASY52 52.8.8(1222); SEMCAD X Version 14.6.10 (7331)

Edge 4 ANT 2 WWAN Ant. IN (OFDM) 31-Aug-2015/Channel 122 Test 2/Area Scan (61x121x1): Interpolated grid:


dx=1.0 mm, dy=1.0 mm; Maximum value of SAR (interpolated) = 0.143 W/kg

Edge 4 ANT 2 WWAN Ant. IN (OFDM) 31-Aug-2015/Channel 122 Test 2/Zoom Scan (31x31x61)/Cube 0:Interpolated grid: dx=0.8 mm, dy=0.8 mm, dz=0.4 mm; Reference Value = 3.716 V/m; **Power Drift = -0.09 dB****Averaged SAR: SAR(1g) = 0.055 W/kg; SAR(10g) = 0.011 W/kg**

Maximum value of SAR (interpolated) = 0.417 W/kg

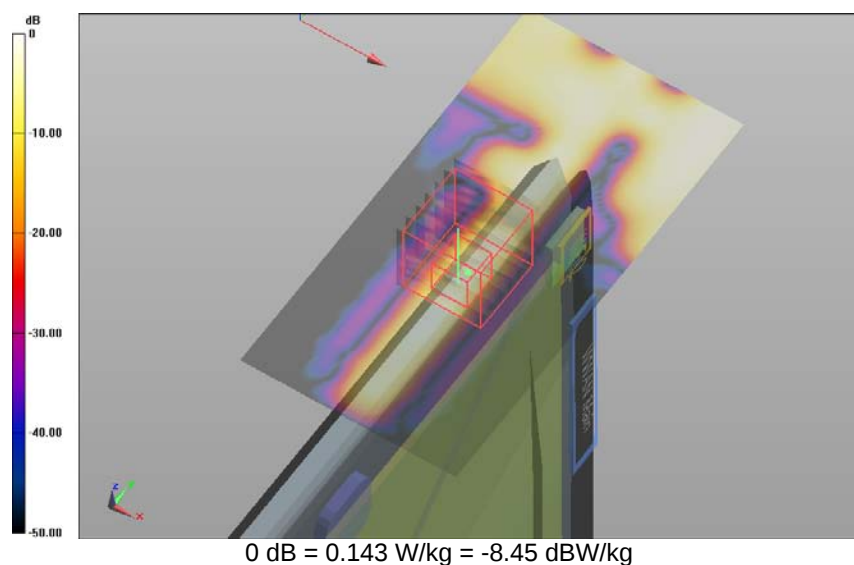

SAR Measurement Plot 44

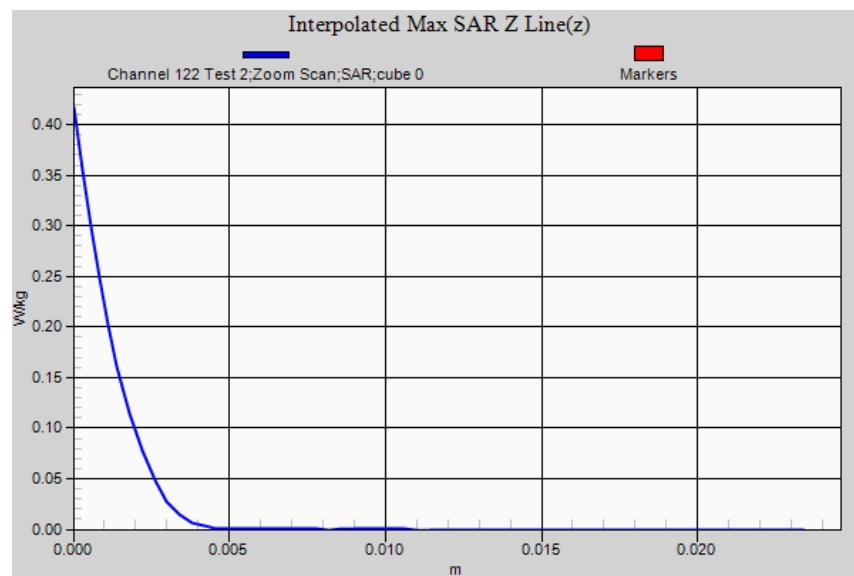

Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

Test Lab: EMCTech

Test File: M150814 5600 MHz WLAN FCC.da52:12

DUT Name: Fujitsu Tablet with 11 abgn/ac WLAN, Type: 8260NGW, Serial: WFM (MAC):A4:34:D9:09:92:96**Configuration: Edge 4 ANT 2 WWAN Ant. OUT (OFDM) 31-Aug-2015**

Communication System: 0 - OFDM 5 GHz HT0 (80 MHz); Communication System Band: 5.6 GHz Band;

Frequency: 5530 MHz, Communication System PAR: 0.00 dB; PMF: 0.00; Duty Cycle: 1:1.00

Medium Parameters used: $f=5529.7$ MHz; $\sigma = 5.70$ S/m; $\epsilon_r = 47.4$; $\rho = 1000.0$ g/cm³

Phantom section: Flat Section

DASY Configuration:

Probe: EX3DV4 - SN7358; ConvF: (3.95,3.95,3.95); Calibrated: 21/04/2015;

Sensor-Surface: 1.4 mm (Mechanical Surface Detection)

Electronics: DAE3 Sn442; Calibrated: 3/12/2014

Phantom: ELI v4.0 (30deg probe tilt); Type: QDOVA001BB; Serial: TP:1101


DASY52 52.8.8(1222); SEMCAD X Version 14.6.10 (7331)

Edge 4 ANT 2 WWAN Ant. OUT (OFDM) 31-Aug-2015/Channel 106 Test/Area Scan (61x121x1): Interpolated grid:

dx=1.0 mm, dy=1.0 mm; Maximum value of SAR (interpolated) = 0.273 W/kg


Edge 4 ANT 2 WWAN Ant. OUT (OFDM) 31-Aug-2015/Channel 106 Test/Zoom Scan (31x31x61)/Cube 0:Interpolated grid: dx=0.8 mm, dy=0.8 mm, dz=0.4 mm; Reference Value = 7.510 V/m; **Power Drift = 0.17 dB****Averaged SAR: SAR(1g) = 0.082 W/kg; SAR(10g) = 0.016 W/kg**

Maximum value of SAR (interpolated) = 0.447 W/kg

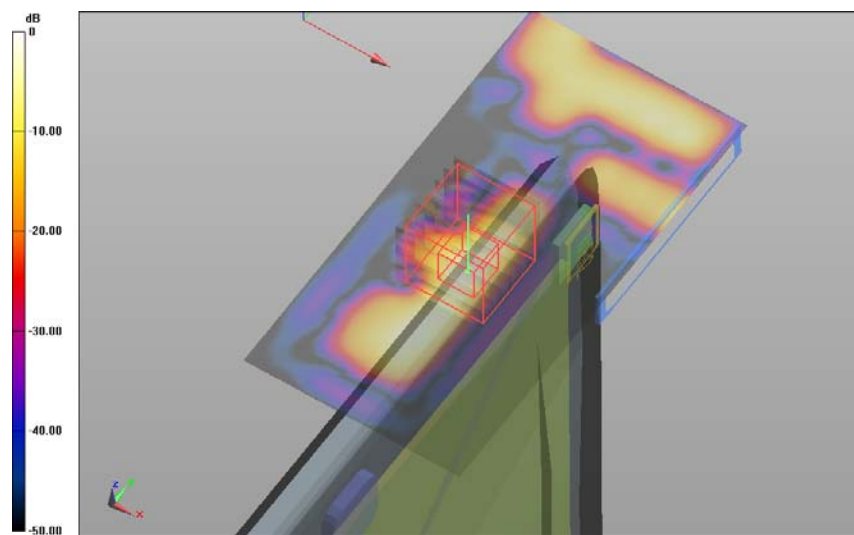

0 dB = 0.273 W/kg = -5.64 dBW/kg

SAR Measurement Plot 45

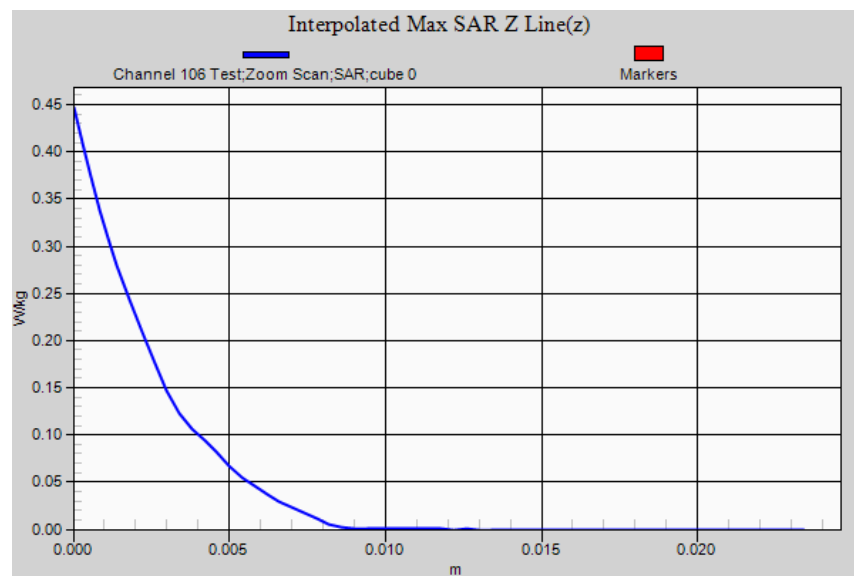

Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

Test Lab: EMCTech

Test File: M150814 5600 MHz WLAN FCC.da52:12

DUT Name: Fujitsu Tablet with 11 abgn/ac WLAN, Type: 8260NGW, Serial: WFM (MAC):A4:34:D9:09:92:96**Configuration: Edge 4 ANT 2 WWAN Ant. OUT (OFDM) 31-Aug-2015**

Communication System: 0 - OFDM 5 GHz HT0 (80 MHz); Communication System Band: 5.6 GHz Band;

Frequency: 5610 MHz, Communication System PAR: 0.00 dB; PMF: 0.00; Duty Cycle: 1:1.00

Medium Parameters used: $f=5610.55$ MHz; $\sigma = 5.83$ S/m; $\epsilon_r = 47.1$; $\rho = 1000.0$ g/cm³

Phantom section: Flat Section

DASY Configuration:

Probe: EX3DV4 - SN7358; ConvF: (3.95,3.95,3.95); Calibrated: 21/04/2015;

Sensor-Surface: 1.4 mm (Mechanical Surface Detection)


Electronics: DAE3 Sn442; Calibrated: 3/12/2014

Phantom: ELI v4.0 (30deg probe tilt); Type: QDOVA001BB; Serial: TP:1101

DASY52 52.8.8(1222); SEMCAD X Version 14.6.10 (7331)


Edge 4 ANT 2 WWAN Ant. OUT (OFDM) 31-Aug-2015/Channel 122 Test 2/Area Scan (61x121x1): Interpolated grid: dx=1.0 mm, dy=1.0 mm; Maximum value of SAR (interpolated) = 0.344 W/kg**Edge 4 ANT 2 WWAN Ant. OUT (OFDM) 31-Aug-2015/Channel 122 Test 2/Zoom Scan (31x31x61)/Cube 0:**Interpolated grid: dx=0.8 mm, dy=0.8 mm, dz=0.4 mm; Reference Value = 8.269 V/m; **Power Drift = -0.01 dB****Averaged SAR: SAR(1g) = 0.097 W/kg; SAR(10g) = 0.021 W/kg**

Maximum value of SAR (interpolated) = 0.528 W/kg

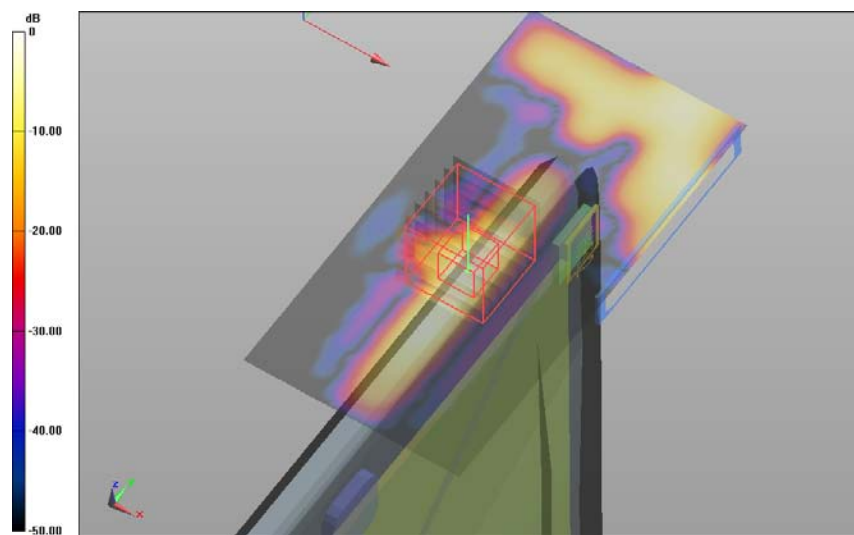

0 dB = 0.344 W/kg = -4.63 dBW/kg

SAR Measurement Plot 46

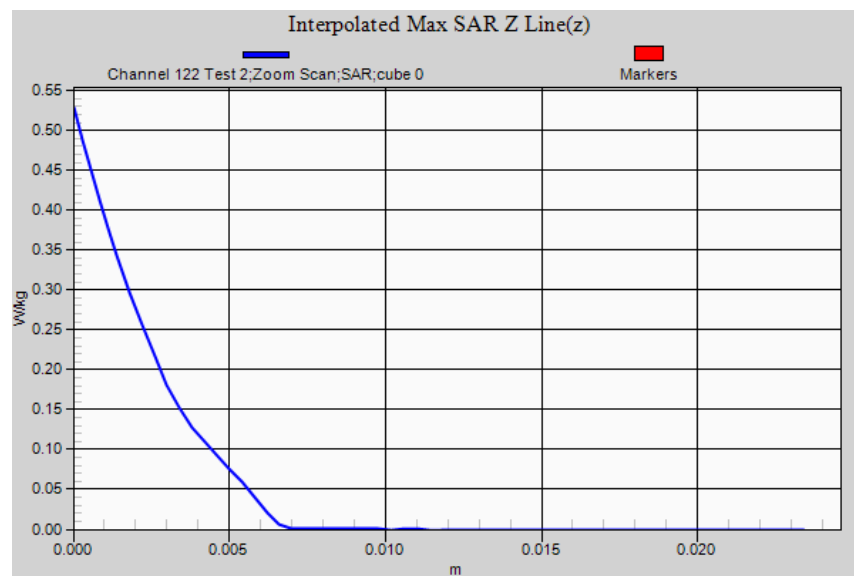

Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

Test Lab: EMCTech

Test File: M150814 5600 MHz WLAN FCC.da52:13

DUT Name: Dipole 5200_5800 MHz, Type: D5GHzV2, Serial: 1008**Configuration: System Performance Check with D5GHzV2 Dipole 28-Aug-2015**

Communication System: 0 - System Check (0); Communication System Band: 5600 MHz; Frequency: 5600 MHz; Communication System PAR: 0.00 dB; PMF: 0.00; Duty Cycle: 1:1.00

Medium Parameters used: $f=5600.65$ MHz; $\sigma = 5.88$ S/m; $\epsilon_r = 47.2$; $\rho = 1000.0$ g/cm³

Phantom section: Flat Section

DASY Configuration:

Probe: EX3DV4 - SN7358; ConvF: (3.95,3.95,3.95); Calibrated: 21/04/2015;

Sensor-Surface: 1.4 mm (Mechanical Surface Detection)


Electronics: DAE3 Sn442; Calibrated: 3/12/2014

Phantom: ELI v4.0 (30deg probe tilt); Type: QDOVA001BB; Serial: TP:1101

DASY52 52.8.8(1222); SEMCAD X Version 14.6.10 (7331)

System Performance Check with D5GHzV2 Dipole 28-Aug-2015/d=10mm, Pin=100mW, f=5600 MHz/Area Scan (91x91x1): Interpolated grid: dx=1.0 mm, dy=1.0 mm; Maximum value of SAR (interpolated) = 21.700 W/kg**System Performance Check with D5GHzV2 Dipole 28-Aug-2015/d=10mm, Pin=100mW, f=5600 MHz/Zoom Scan (4x4x2mm, uniform), dist=1.4mm (36x36x66)/Cube 0:** Interpolated grid: dx=0.8 mm, dy=0.8 mm, dz=0.4 mm; Reference Value = 66.232 V/m; **Power Drift = 0.07 dB****Averaged SAR: SAR(1g) = 8.610 W/kg; SAR(10g) = 2.400 W/kg**

Maximum value of SAR (interpolated) = 34.800 W/kg

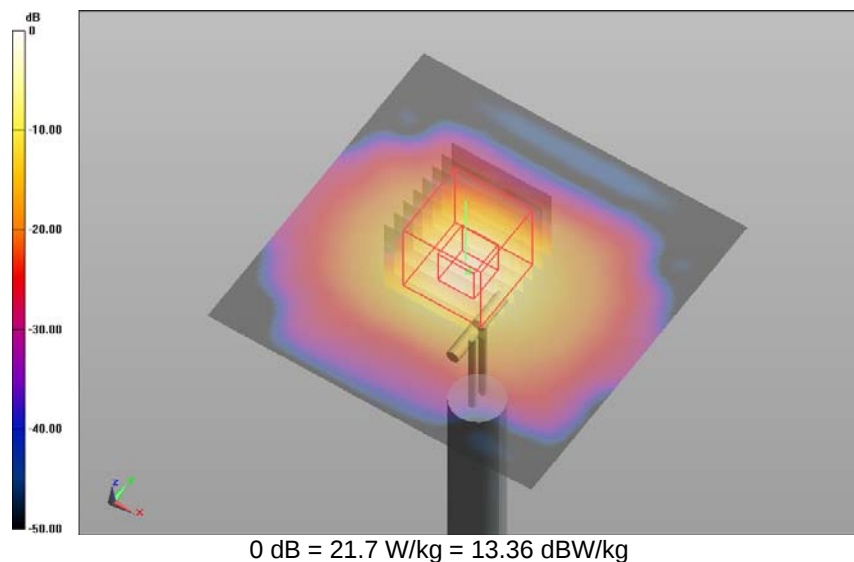


0 dB = 21.7 W/kg = 13.36 dBW/kg

SAR Measurement Plot 47



Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

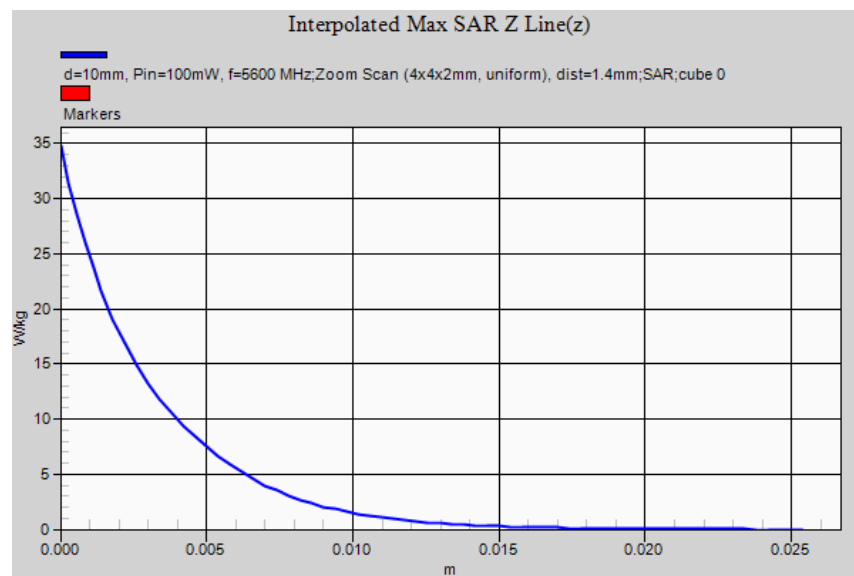

Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

Test Lab: EMCTech

Test File: M150814 5600 MHz WLAN FCC.da52:14

DUT Name: Dipole 5200_5800 MHz, Type: D5GHzV2, Serial: 1008**Configuration: System Performance Check with D5GHzV2 Dipole 31-Aug-2015**

Communication System: 0 - System Check (0); Communication System Band: 5600 MHz; Frequency: 5600 MHz; Communication System PAR: 0.00 dB; PMF: 0.00; Duty Cycle: 1:1.00

Medium Parameters used: $f=5600.65$ MHz; $\sigma = 5.81$ S/m; $\epsilon_r = 47.1$; $\rho = 1000.0$ g/cm³

Phantom section: Flat Section

DASY Configuration:

Probe: EX3DV4 - SN7358; ConvF: (3.95,3.95,3.95); Calibrated: 21/04/2015;

Sensor-Surface: 1.4 mm (Mechanical Surface Detection)


Electronics: DAE3 Sn442; Calibrated: 3/12/2014

Phantom: ELI v4.0 (30deg probe tilt); Type: QDOVA001BB; Serial: TP:1101

DASY52 52.8.8(1222); SEMCAD X Version 14.6.10 (7331)

System Performance Check with D5GHzV2 Dipole 31-Aug-2015/d=10mm, Pin=100mW, f=5600 MHz/Area Scan (91x91x1): Interpolated grid: dx=1.0 mm, dy=1.0 mm; Maximum value of SAR (interpolated) = 20.200 W/kg**System Performance Check with D5GHzV2 Dipole 31-Aug-2015/d=10mm, Pin=100mW, f=5600 MHz/Zoom Scan (4x4x2mm, uniform), dist=1.4mm (36x36x66)/Cube 0:** Interpolated grid: dx=0.8 mm, dy=0.8 mm, dz=0.4 mm; Reference Value = 64.916 V/m; **Power Drift = 0.05 dB****Averaged SAR: SAR(1g) = 8.630 W/kg; SAR(10g) = 2.380 W/kg**

Maximum value of SAR (interpolated) = 35.300 W/kg

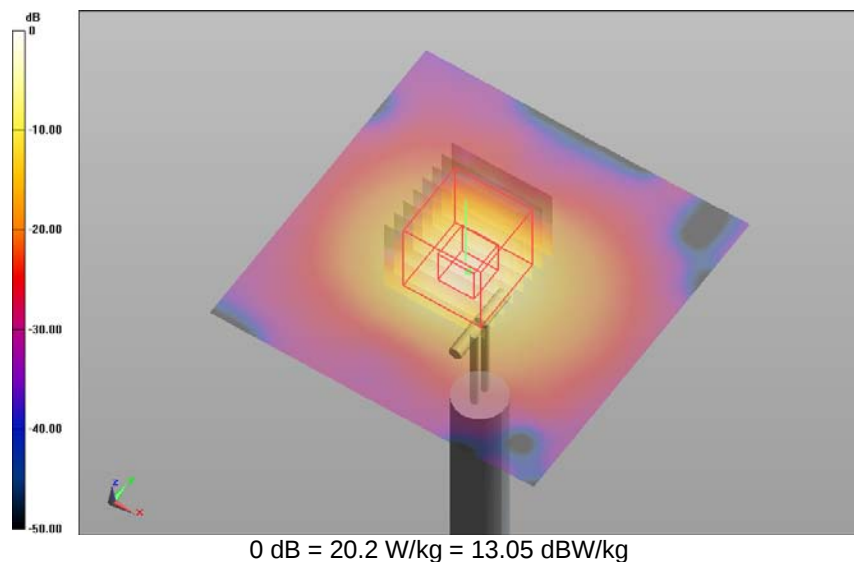


SAR Measurement Plot 48



Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

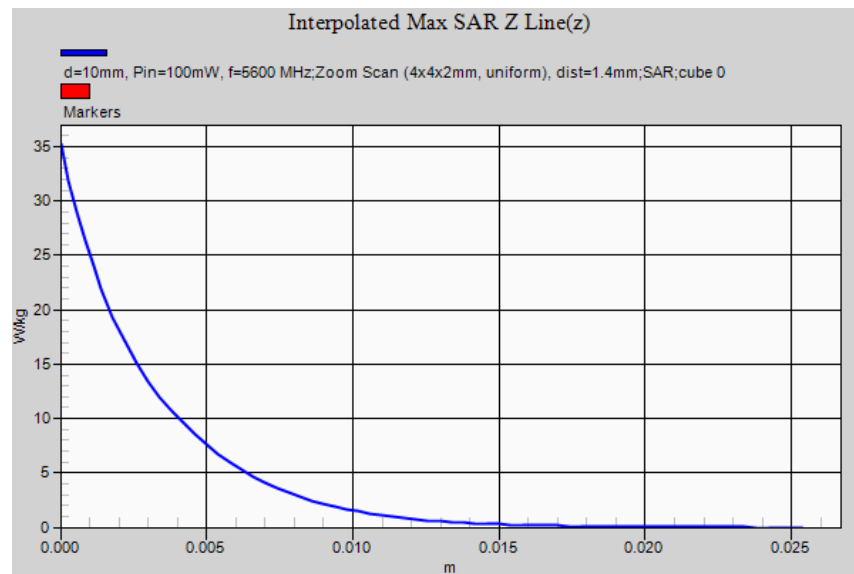

Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

Test Lab: EMCTech

Test File: M150814 5800 MHz WLAN FCC.da52:0

DUT Name: Fujitsu Tablet with 11 abgn/ac WLAN, Type: 8260NGW, Serial: WFM (MAC):A4:34:D9:09:92:96**Configuration: Body Bystander ANT 1 WWAN Ant. IN (OFDM) 03-Sept-2015**

Communication System: 0 - OFDM 5 GHz HT0 (80 MHz); Communication System Band: 5.8 GHz Band;

Frequency: 5775 MHz, Communication System PAR: 0.00 dB; PMF: 0.00; Duty Cycle: 1:1.00

Medium Parameters used: $f=5775.55$ MHz; $\sigma = 6.19$ S/m; $\epsilon_r = 46.0$; $\rho = 1000.0$ g/cm³

Phantom section: Flat Section

DASY Configuration:

Probe: EX3DV4 - SN7358; ConvF: (4.13,4.13,4.13); Calibrated: 21/04/2015;

Sensor-Surface: 1.4 mm (Mechanical Surface Detection)


Electronics: DAE3 Sn442; Calibrated: 3/12/2014

Phantom: ELI v4.0 (30deg probe tilt); Type: QDOVA001BB; Serial: TP:1101

DASY52 52.8.8(1222); SEMCAD X Version 14.6.10 (7331)

Body Bystander ANT 1 WWAN Ant. IN (OFDM) 03-Sept-2015/Channel 155 Test/Area Scan (91x91x1):Interpolated grid: $dx=1.0$ mm, $dy=1.0$ mm; Maximum value of SAR (interpolated) = 0.154 W/kg**Body Bystander ANT 1 WWAN Ant. IN (OFDM) 03-Sept-2015/Channel 155 Test/Zoom Scan (31x31x61)/Cube****0:** Interpolated grid: $dx=0.8$ mm, $dy=0.8$ mm, $dz=0.4$ mm; Reference Value = 1.859 V/m; Power Drift = -0.10 dB**Averaged SAR: SAR(1g) = 0.023 W/kg; SAR(10g) = 0.006 W/kg**

Maximum value of SAR (interpolated) = 0.329 W/kg

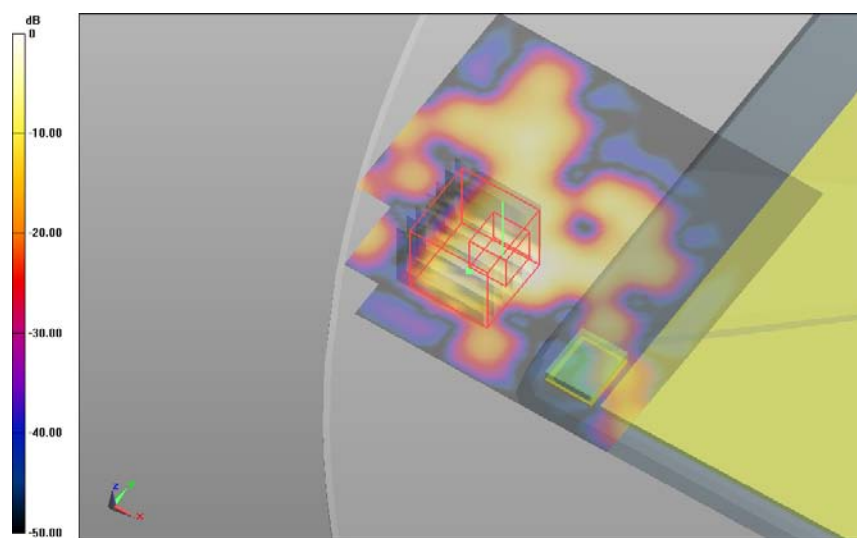


0 dB = 0.154 W/kg = -8.12 dBW/kg

SAR Measurement Plot 49



Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

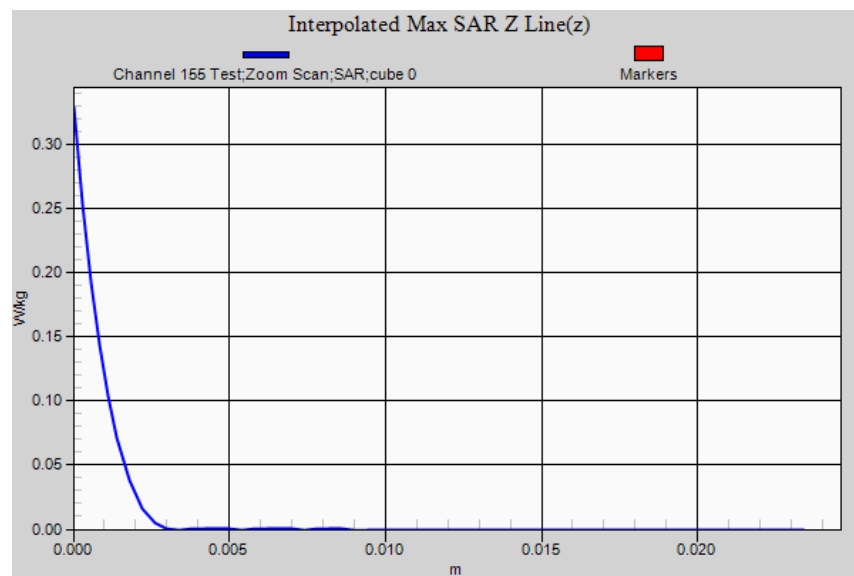

Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

Test Lab: EMCTech

Test File: M150814 5800 MHz WLAN FCC.da52:1

DUT Name: Fujitsu Tablet with 11 abgn/ac WLAN, Type: 8260NGW, Serial: WFM (MAC):A4:34:D9:09:92:96**Configuration: Body Bystander ANT 2 WWAN Ant. IN (OFDM) 03-Sept-2015**

Communication System: 0 - OFDM 5 GHz HT0 (80 MHz); Communication System Band: 5.8 GHz Band;

Frequency: 5775 MHz, Communication System PAR: 0.00 dB; PMF: 0.00; Duty Cycle: 1:1.00

Medium Parameters used: $f=5775.55$ MHz; $\sigma = 6.19$ S/m; $\epsilon_r = 46.0$; $\rho = 1000.0$ g/cm³

Phantom section: Flat Section

DASY Configuration:

Probe: EX3DV4 - SN7358; ConvF: (4.13,4.13,4.13); Calibrated: 21/04/2015;

Sensor-Surface: 1.4 mm (Mechanical Surface Detection)


Electronics: DAE3 Sn442; Calibrated: 3/12/2014

Phantom: ELI v4.0 (30deg probe tilt); Type: QDOVA001BB; Serial: TP:1101

DASY52 52.8.8(1222); SEMCAD X Version 14.6.10 (7331)

Body Bystander ANT 2 WWAN Ant. IN (OFDM) 03-Sept-2015/Channel 155 Test/Area Scan (91x91x1):Interpolated grid: $dx=1.0$ mm, $dy=1.0$ mm; Maximum value of SAR (interpolated) = 0.086 W/kg**Body Bystander ANT 2 WWAN Ant. IN (OFDM) 03-Sept-2015/Channel 155 Test/Zoom Scan (31x31x61)/Cube****0:** Interpolated grid: $dx=0.8$ mm, $dy=0.8$ mm, $dz=0.4$ mm; Reference Value = 3.644 V/m; **Power Drift = -0.12 dB****Averaged SAR: SAR(1g) = 0.027 W/kg; SAR(10g) = 0.011 W/kg**

Maximum value of SAR (interpolated) = 0.285 W/kg

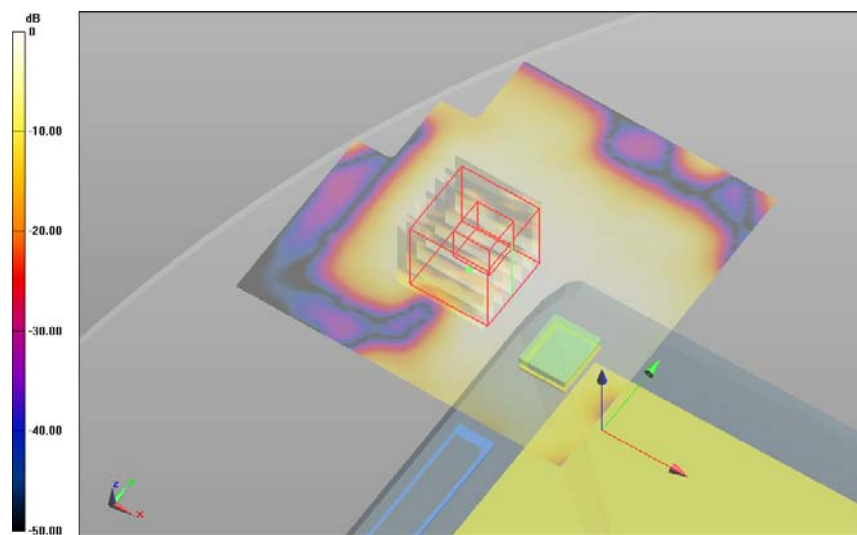


0 dB = 0.0863 W/kg = -10.64 dBW/kg

SAR Measurement Plot 50



Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

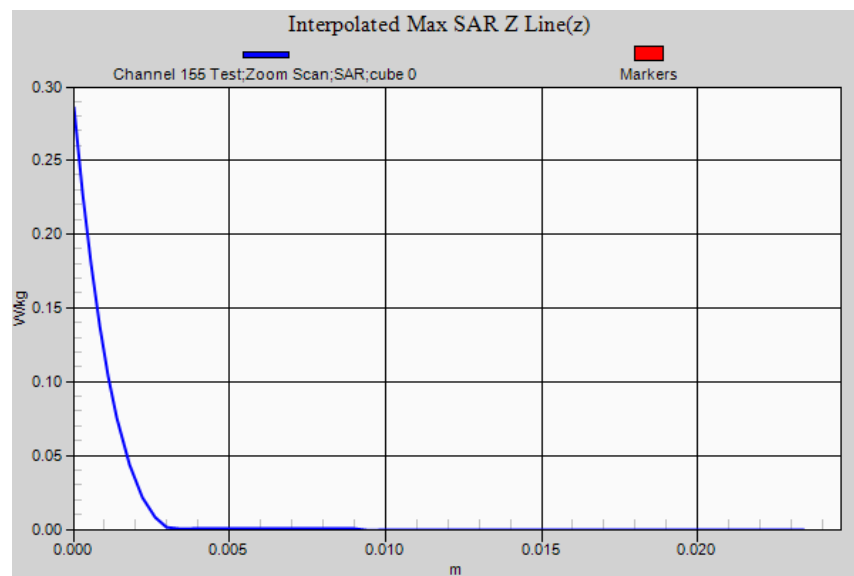

Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

Test Lab: EMCTech

Test File: M150814 5800 MHz WLAN FCC.da52:2

DUT Name: Fujitsu Tablet with 11 abgn/ac WLAN, Type: 8260NGW, Serial: WFM (MAC):A4:34:D9:09:92:96**Configuration: Body Lap Held ANT 1 WWAN Ant. IN (OFDM) 02-Sept-2015**

Communication System: 0 - OFDM 5 GHz HT0 (80 MHz); Communication System Band: 5.8 GHz Band;

Frequency: 5690 MHz, Communication System PAR: 0.00 dB; PMF: 0.00; Duty Cycle: 1:1.00

Medium Parameters used: $f=5689.75$ MHz; $\sigma = 6.03$ S/m; $\epsilon_r = 47.2$; $\rho = 1000.0$ g/cm³

Phantom section: Flat Section

DASY Configuration:

Probe: EX3DV4 - SN7358; ConvF: (3.95,3.95,3.95); Calibrated: 21/04/2015;

Sensor-Surface: 1.4 mm (Mechanical Surface Detection)


Electronics: DAE3 Sn442; Calibrated: 3/12/2014

Phantom: ELI v4.0 (30deg probe tilt); Type: QDOVA001BB; Serial: TP:1101

DASY52 52.8.8(1222); SEMCAD X Version 14.6.10 (7331)


Body Lap Held ANT 1 WWAN Ant. IN (OFDM) 02-Sept-2015/Channel 138 Test/Area Scan (61x91x1): Interpolated grid: dx=1.0 mm, dy=1.0 mm; Maximum value of SAR (interpolated) = 0.067 W/kg**Body Lap Held ANT 1 WWAN Ant. IN (OFDM) 02-Sept-2015/Channel 138 Test/Zoom Scan (31x31x61)/Cube 0:** Interpolated grid: dx=0.8 mm, dy=0.8 mm, dz=0.4 mm; Reference Value = 1.442 V/m; **Power Drift = 0.14 dB****Averaged SAR: SAR(1g) = 0.015 W/kg; SAR(10g) = 0.003 W/kg**

Maximum value of SAR (interpolated) = 0.254 W/kg

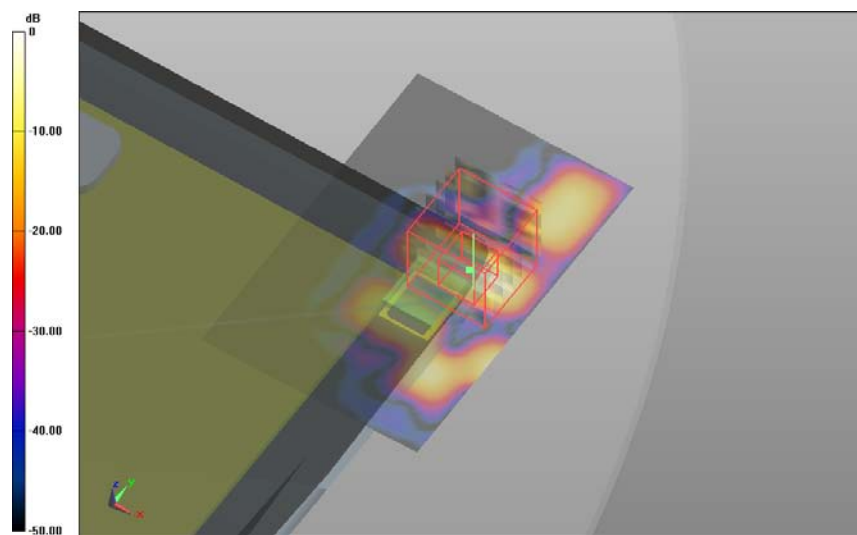

0 dB = 0.0669 W/kg = -11.75 dBW/kg

SAR Measurement Plot 51

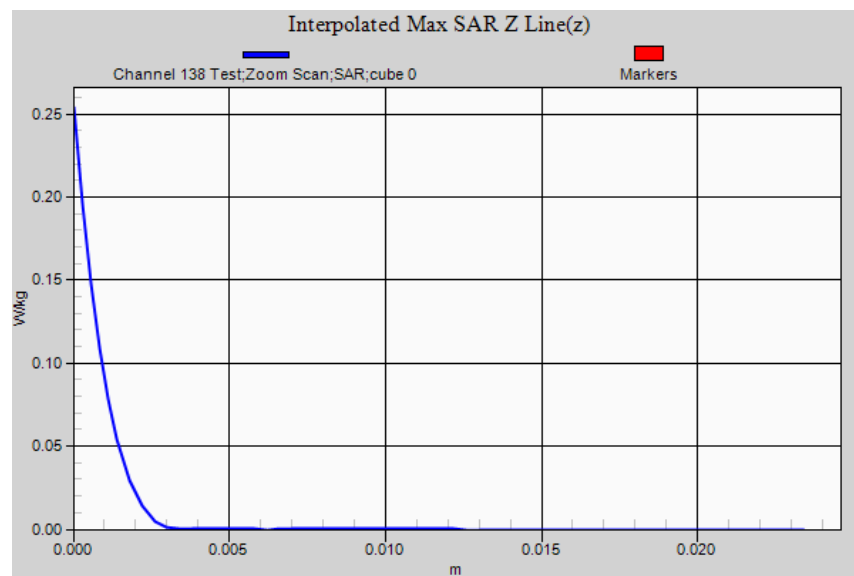

Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

Test Lab: EMCTech

Test File: M150814 5800 MHz WLAN FCC.da52:2

DUT Name: Fujitsu Tablet with 11 abgn/ac WLAN, Type: 8260NGW, Serial: WFM (MAC):A4:34:D9:09:92:96**Configuration: Body Lap Held ANT 1 WWAN Ant. IN (OFDM) 02-Sept-2015**

Communication System: 0 - OFDM 5 GHz HT0 (80 MHz); Communication System Band: 5.8 GHz Band;

Frequency: 5775 MHz, Communication System PAR: 0.00 dB; PMF: 0.00; Duty Cycle: 1:1.00

Medium Parameters used: $f=5775.55$ MHz; $\sigma = 6.15$ S/m; $\epsilon_r = 46.9$; $\rho = 1000.0$ g/cm³

Phantom section: Flat Section

DASY Configuration:

Probe: EX3DV4 - SN7358; ConvF: (4.13,4.13,4.13); Calibrated: 21/04/2015;

Sensor-Surface: 1.4 mm (Mechanical Surface Detection (Locations From Previous Scan Used))


Electronics: DAE3 Sn442; Calibrated: 3/12/2014

Phantom: ELI v4.0 (30deg probe tilt); Type: QDOVA001BB; Serial: TP:1101

DASY52 52.8.8(1222); SEMCAD X Version 14.6.10 (7331)


Body Lap Held ANT 1 WWAN Ant. IN (OFDM) 02-Sept-2015/Channel 155 Test/Area Scan (61x91x1): Interpolated grid: $dx=1.0$ mm, $dy=1.0$ mm; Maximum value of SAR (interpolated) = 0.058 W/kg**Body Lap Held ANT 1 WWAN Ant. IN (OFDM) 02-Sept-2015/Channel 155 Test/Zoom Scan (31x31x61)/Cube 0:** Interpolated grid: $dx=0.8$ mm, $dy=0.8$ mm, $dz=0.4$ mm; Reference Value = 0.620 V/m; **Power Drift = 0.12 dB****Averaged SAR: SAR(1g) = 0.021 W/kg; SAR(10g) = 0.005 W/kg**

Maximum value of SAR (interpolated) = 0.295 W/kg

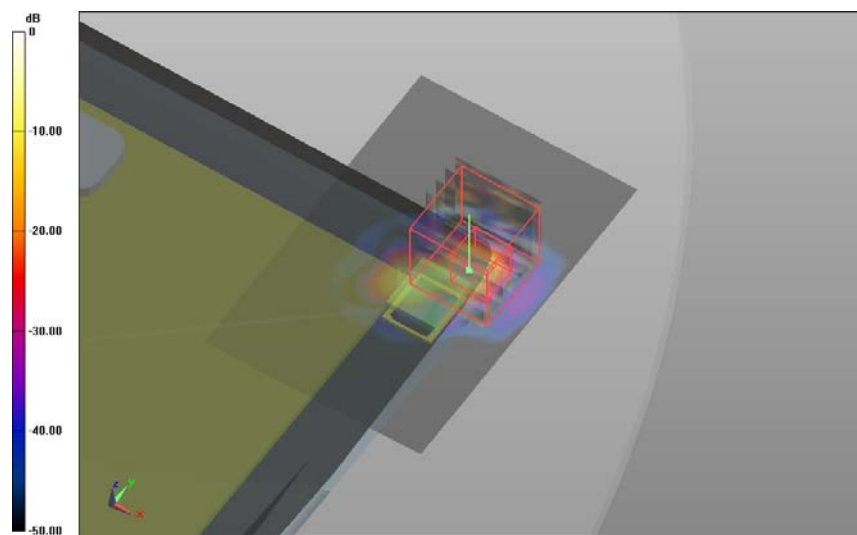

0 dB = 0.0578 W/kg = -12.38 dBW/kg

SAR Measurement Plot 52

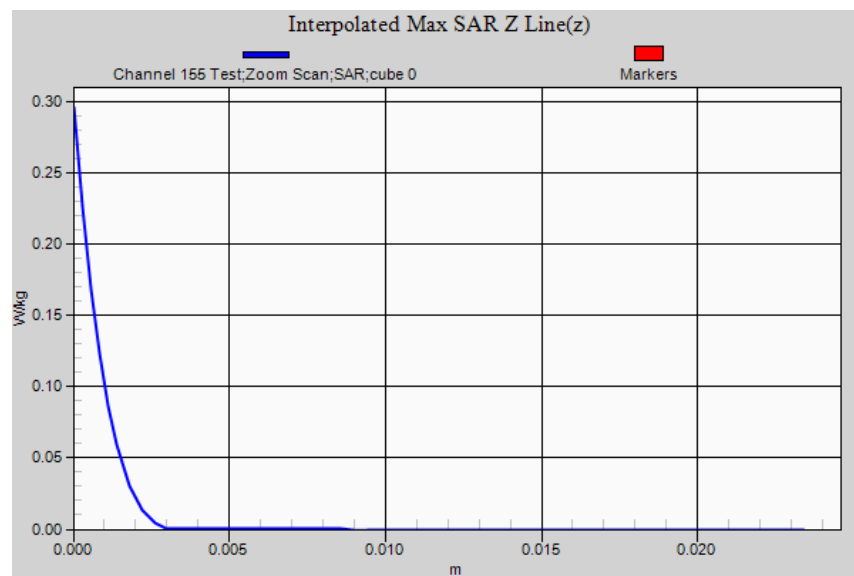

Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

Test Lab: EMCTech Test File: M150814 5800 MHz WLAN FCC.da52:3

DUT Name: Fujitsu Tablet with 11 abgn/ac WLAN, Type: 8260NGW, Serial: WFM (MAC):A4:34:D9:09:92:96

Configuration: Body Lap Held ANT 2 WWAN Ant. IN (OFDM) 02-Sept-2015

Communication System: 0 - OFDM 5 GHz HT0 (80 MHz); Communication System Band: 5.8 GHz Band;

Frequency: 5690 MHz, Communication System PAR: 0.00 dB; PMF: 0.00; Duty Cycle: 1:1.00

Medium Parameters used: $f=5689.75$ MHz; $\sigma = 6.03$ S/m; $\epsilon_r = 47.2$; $\rho = 1000.0$ g/cm³

Phantom section: Flat Section

DASY Configuration:

Probe: EX3DV4 - SN7358; ConvF: (3.95,3.95,3.95); Calibrated: 21/04/2015;

Sensor-Surface: 1.4 mm (Mechanical Surface Detection)

Electronics: DAE3 Sn442; Calibrated: 3/12/2014

Phantom: ELI v4.0 (30deg probe tilt); Type: QDOVA001BB; Serial: TP:1101


DASY52 52.8.8(1222); SEMCAD X Version 14.6.10 (7331)

Body Lap Held ANT 2 WWAN Ant. IN (OFDM) 02-Sept-2015/Channel 138 Test/Area Scan (81x91x1): Interpolated grid: dx=1.0 mm, dy=1.0 mm; Maximum value of SAR (interpolated) = 0.364 W/kg

Body Lap Held ANT 2 WWAN Ant. IN (OFDM) 02-Sept-2015/Channel 138 Test/Zoom Scan (31x31x61)/Cube 0: Interpolated grid: dx=0.8 mm, dy=0.8 mm, dz=0.4 mm; Reference Value = 2.386 V/m; **Power Drift = -0.12 dB**


Averaged SAR: SAR(1g) = 0.038 W/kg; SAR(10g) = 0.012 W/kg

Maximum value of SAR (interpolated) = 0.405 W/kg

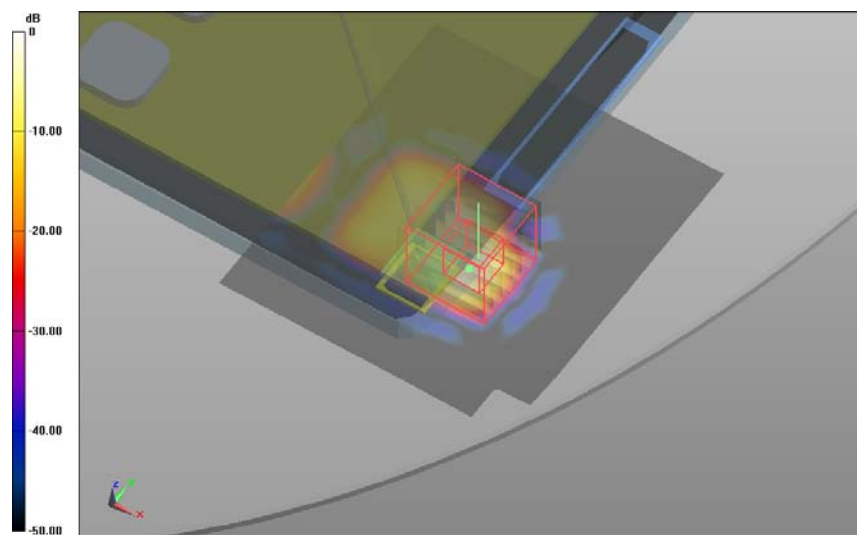

0 dB = 0.364 W/kg = -4.39 dBW/kg

SAR Measurement Plot 53

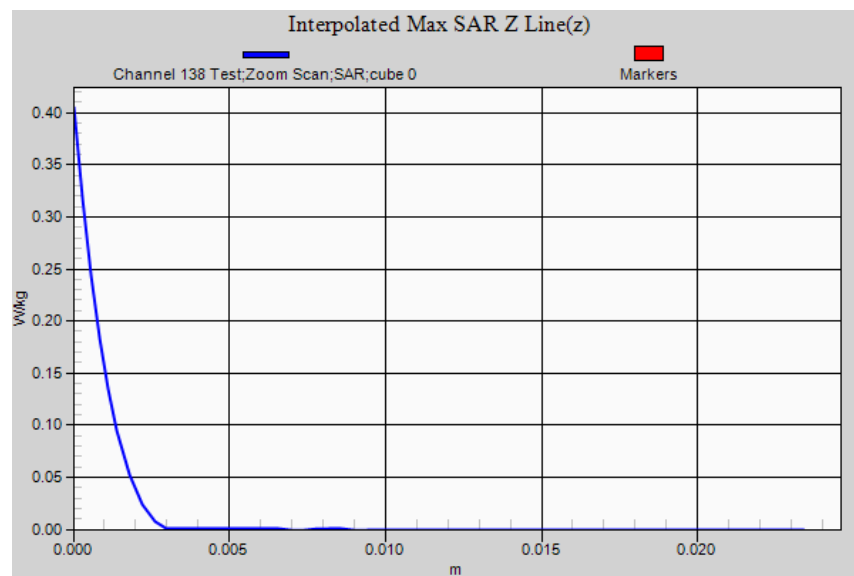

Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

Test Lab: EMCTech

Test File: M150814 5800 MHz WLAN FCC.da52:3

DUT Name: Fujitsu Tablet with 11 abgn/ac WLAN, Type: 8260NGW, Serial: WFM (MAC):A4:34:D9:09:92:96**Configuration: Body Lap Held ANT 2 WWAN Ant. IN (OFDM) 02-Sept-2015**

Communication System: 0 - OFDM 5 GHz HT0 (80 MHz); Communication System Band: 5.8 GHz Band;

Frequency: 5775 MHz, Communication System PAR: 0.00 dB; PMF: 0.00; Duty Cycle: 1:1.00

Medium Parameters used: $f=5775.55$ MHz; $\sigma = 6.15$ S/m; $\epsilon_r = 46.9$; $\rho = 1000.0$ g/cm³

Phantom section: Flat Section

DASY Configuration:

Probe: EX3DV4 - SN7358; ConvF: (4.13,4.13,4.13); Calibrated: 21/04/2015;

Sensor-Surface: 1.4 mm (Mechanical Surface Detection)


Electronics: DAE3 Sn442; Calibrated: 3/12/2014

Phantom: ELI v4.0 (30deg probe tilt); Type: QDOVA001BB; Serial: TP:1101

DASY52 52.8.8(1222); SEMCAD X Version 14.6.10 (7331)


Body Lap Held ANT 2 WWAN Ant. IN (OFDM) 02-Sept-2015/Channel 155 Test/Area Scan (81x91x1): Interpolated grid: $dx=1.0$ mm, $dy=1.0$ mm; Maximum value of SAR (interpolated) = 0.112 W/kg**Body Lap Held ANT 2 WWAN Ant. IN (OFDM) 02-Sept-2015/Channel 155 Test/Zoom Scan (31x31x61)/Cube 0:** Interpolated grid: $dx=0.8$ mm, $dy=0.8$ mm, $dz=0.4$ mm; Reference Value = 2.696 V/m; **Power Drift = 0.14 dB****Averaged SAR: SAR(1g) = 0.034 W/kg; SAR(10g) = 0.010 W/kg**

Maximum value of SAR (interpolated) = 0.454 W/kg

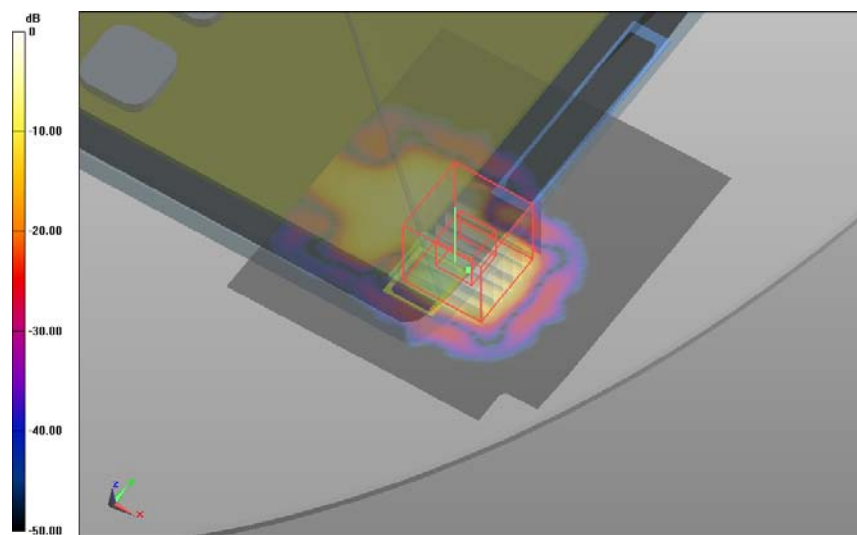

0 dB = 0.112 W/kg = -9.51 dBW/kg

SAR Measurement Plot 54

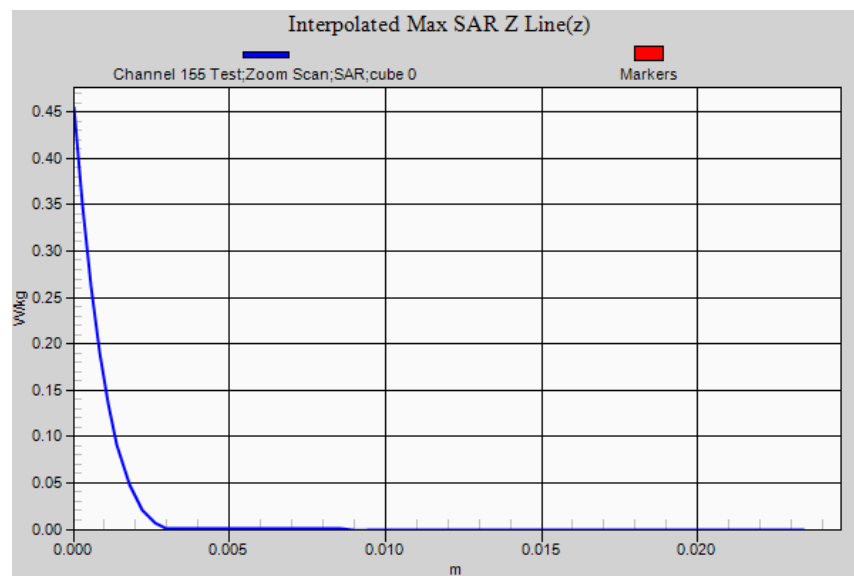

Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

Test Lab: EMCTech

Test File: M150814 5800 MHz WLAN FCC.da52:4

DUT Name: Fujitsu Tablet with 11 abgn/ac WLAN, Type: 8260NGW, Serial: WFM (MAC):A4:34:D9:09:92:96**Configuration: Body Lap Held ANT 2 WWAN Ant. OUT (OFDM) 02-Sept-2015**

Communication System: 0 - OFDM 5 GHz HT0 (80 MHz); Communication System Band: 5.8 GHz Band;

Frequency: 5690 MHz, Communication System PAR: 0.00 dB; PMF: 0.00; Duty Cycle: 1:1.00

Medium Parameters used: $f=5689.75$ MHz; $\sigma = 6.03$ S/m; $\epsilon_r = 47.2$; $\rho = 1000.0$ g/cm³

Phantom section: Flat Section

DASY Configuration:

Probe: EX3DV4 - SN7358; ConvF: (3.95,3.95,3.95); Calibrated: 21/04/2015;

Sensor-Surface: 1.4 mm (Mechanical Surface Detection)

Electronics: DAE3 Sn442; Calibrated: 3/12/2014

Phantom: ELI v4.0 (30deg probe tilt); Type: QDOVA001BB; Serial: TP:1101


DASY52 52.8.8(1222); SEMCAD X Version 14.6.10 (7331)

Body Lap Held ANT 2 WWAN Ant. OUT (OFDM) 02-Sept-2015/Channel 138 Test/Area Scan (61x91x1):

Interpolated grid: dx=1.0 mm, dy=1.0 mm; Maximum value of SAR (interpolated) = 0.273 W/kg

Body Lap Held ANT 2 WWAN Ant. OUT (OFDM) 02-Sept-2015/Channel 138 Test/Zoom Scan**(31x31x61)/Cube 0: Interpolated grid: dx=0.8 mm, dy=0.8 mm, dz=0.4 mm; Reference Value = 2.599 V/m; Power Drift = -0.16 dB****Averaged SAR: SAR(1g) = 0.035 W/kg; SAR(10g) = 0.012 W/kg**

Maximum value of SAR (interpolated) = 0.399 W/kg

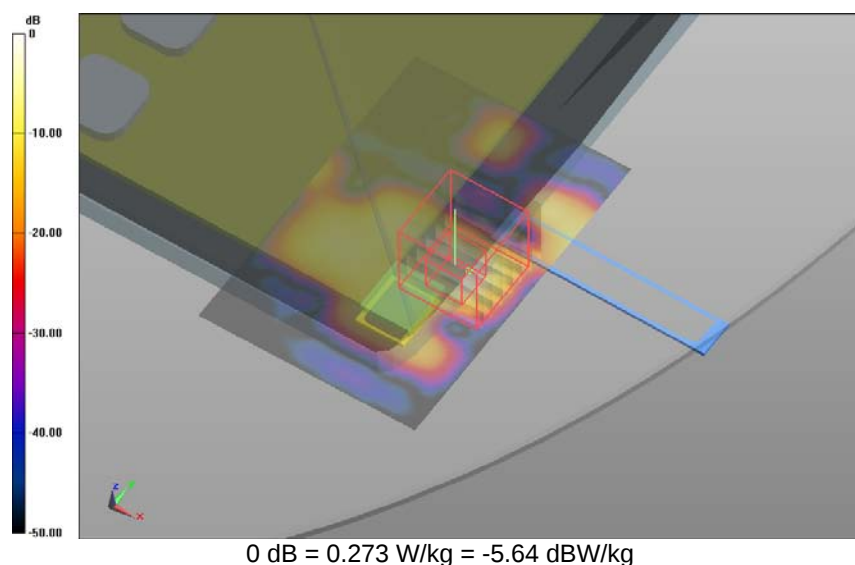


SAR Measurement Plot 55



Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

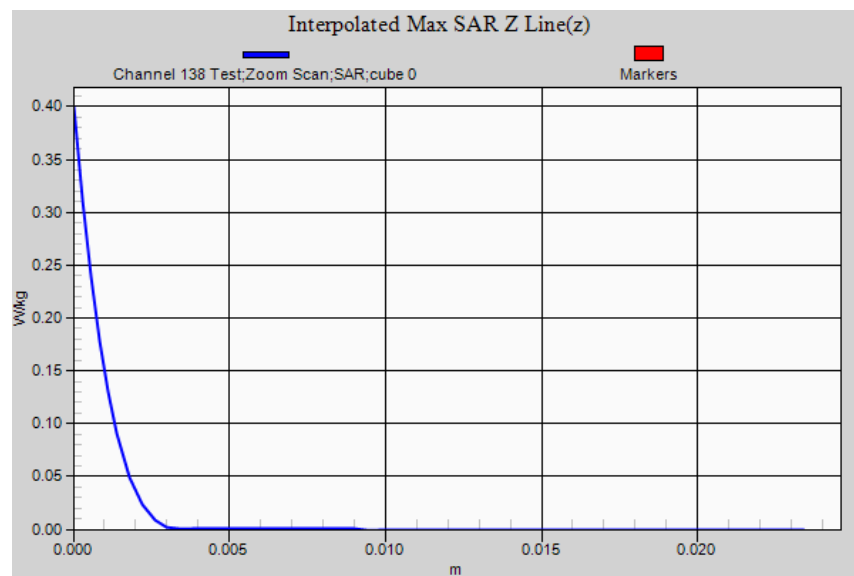

Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

Test Lab: EMCTech

Test File: M150814 5800 MHz WLAN FCC.da52:4

DUT Name: Fujitsu Tablet with 11 abgn/ac WLAN, Type: 8260NGW, Serial: WFM (MAC):A4:34:D9:09:92:96**Configuration: Body Lap Held ANT 2 WWAN Ant. OUT (OFDM) 02-Sept-2015**

Communication System: 0 - OFDM 5 GHz HT0 (80 MHz); Communication System Band: 5.8 GHz Band;

Frequency: 5775 MHz, Communication System PAR: 0.00 dB; PMF: 0.00; Duty Cycle: 1:1.00

Medium Parameters used: $f=5775.55$ MHz; $\sigma = 6.15$ S/m; $\epsilon_r = 46.9$; $\rho = 1000.0$ g/cm³

Phantom section: Flat Section

DASY Configuration:

Probe: EX3DV4 - SN7358; ConvF: (4.13,4.13,4.13); Calibrated: 21/04/2015;

Sensor-Surface: 1.4 mm (Mechanical Surface Detection)

Electronics: DAE3 Sn442; Calibrated: 3/12/2014

Phantom: ELI v4.0 (30deg probe tilt); Type: QDOVA001BB; Serial: TP:1101


DASY52 52.8.8(1222); SEMCAD X Version 14.6.10 (7331)

Body Lap Held ANT 2 WWAN Ant. OUT (OFDM) 02-Sept-2015/Channel 155 Test/Area Scan (61x91x1):


Interpolated grid: dx=1.0 mm, dy=1.0 mm; Maximum value of SAR (interpolated) = 0.124 W/kg

Body Lap Held ANT 2 WWAN Ant. OUT (OFDM) 02-Sept-2015/Channel 155 Test/Zoom Scan**(31x31x61)/Cube 0: Interpolated grid: dx=0.8 mm, dy=0.8 mm, dz=0.4 mm; Reference Value = 2.564 V/m; Power Drift = -0.06 dB****Averaged SAR: SAR(1g) = 0.032 W/kg; SAR(10g) = 0.010 W/kg**

Maximum value of SAR (interpolated) = 0.406 W/kg

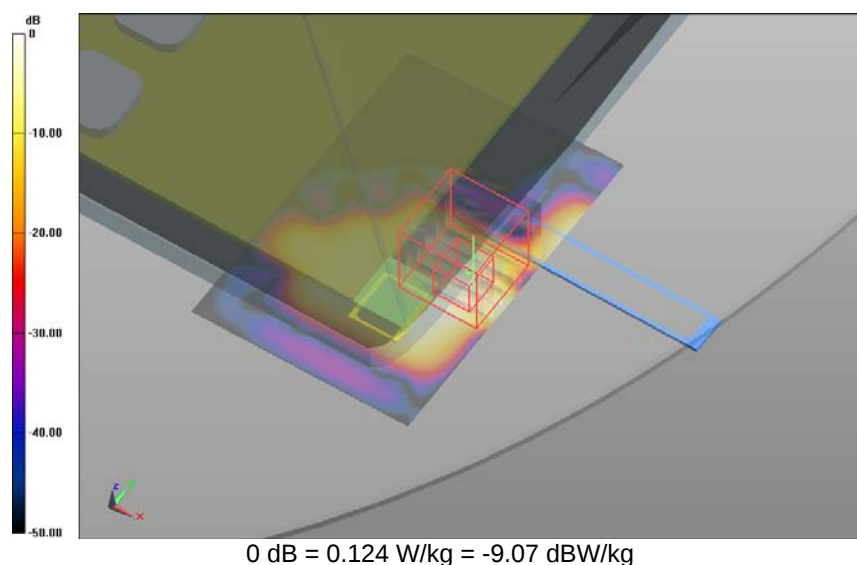

SAR Measurement Plot 56

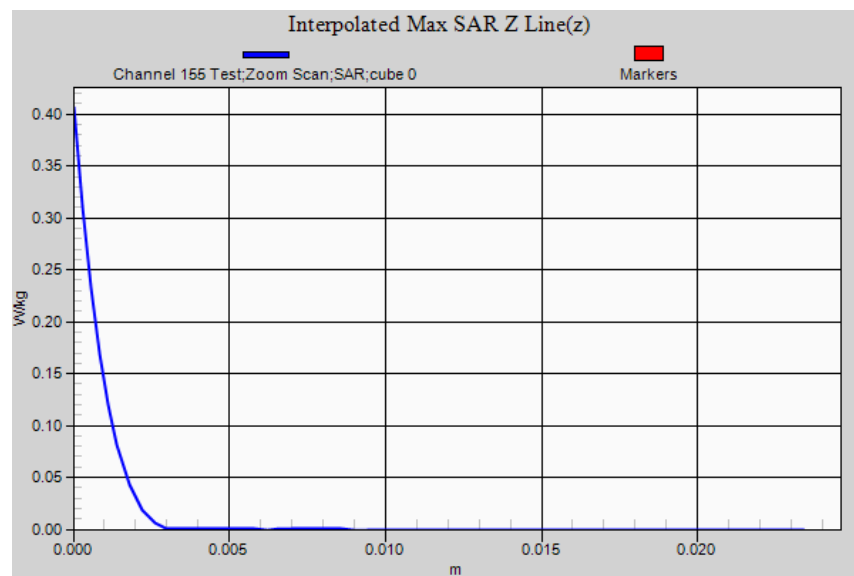

Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

Test Lab: EMCTech

Test File: M150814 5800 MHz WLAN FCC.da52:5

DUT Name: Fujitsu Tablet with 11 abgn/ac WLAN, Type: 8260NGW, Serial: WFM (MAC):A4:34:D9:09:92:96**Configuration: Edge 1 ANT 1 WWAN Ant. IN (OFDM) 03-Sept-2015**

Communication System: 0 - OFDM 5 GHz HT0 (80 MHz); Communication System Band: 5.8 GHz Band;

Frequency: 5690 MHz, Communication System PAR: 0.00 dB; PMF: 0.00; Duty Cycle: 1:1.00

Medium Parameters used: $f=5689.75$ MHz; $\sigma = 6.07$ S/m; $\epsilon_r = 46.3$; $\rho = 1000.0$ g/cm³

Phantom section: Flat Section

DASY Configuration:

Probe: EX3DV4 - SN7358; ConvF: (3.95,3.95,3.95); Calibrated: 21/04/2015;

Sensor-Surface: 1.4 mm (Mechanical Surface Detection)

Electronics: DAE3 Sn442; Calibrated: 3/12/2014

Phantom: ELI v4.0 (30deg probe tilt); Type: QDOVA001BB; Serial: TP:1101


DASY52 52.8.8(1222); SEMCAD X Version 14.6.10 (7331)

Edge 1 ANT 1 WWAN Ant. IN (OFDM) 03-Sept-2015/Channel 138 Test/Area Scan (61x91x1): Interpolated grid:

dx=1.0 mm, dy=1.0 mm; Maximum value of SAR (interpolated) = 2.450 W/kg


Edge 1 ANT 1 WWAN Ant. IN (OFDM) 03-Sept-2015/Channel 138 Test/Zoom Scan (31x31x61)/Cube 0:Interpolated grid: dx=0.8 mm, dy=0.8 mm, dz=0.4 mm; Reference Value = 11.038 V/m; **Power Drift = 0.09 dB****Averaged SAR: SAR(1g) = 0.941 W/kg; SAR(10g) = 0.190 W/kg**

Maximum value of SAR (interpolated) = 4.950 W/kg

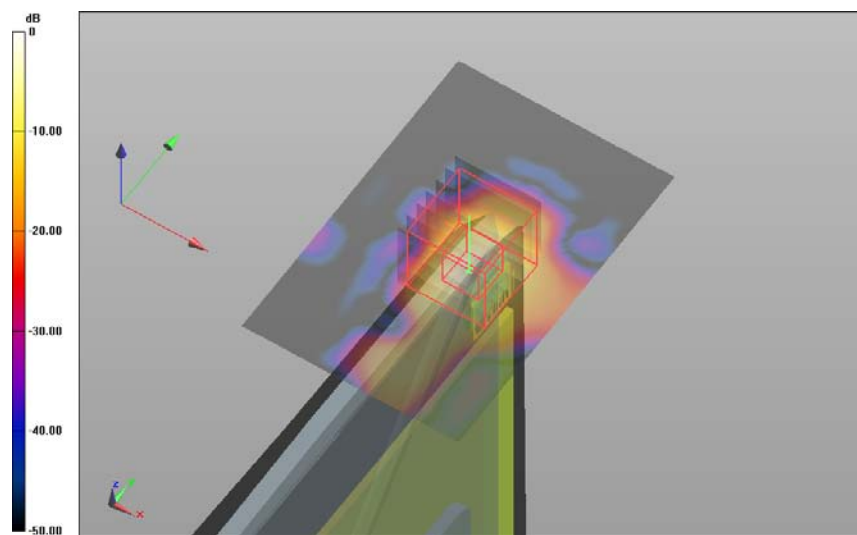

0 dB = 2.45 W/kg = 3.89 dBW/kg

SAR Measurement Plot 57

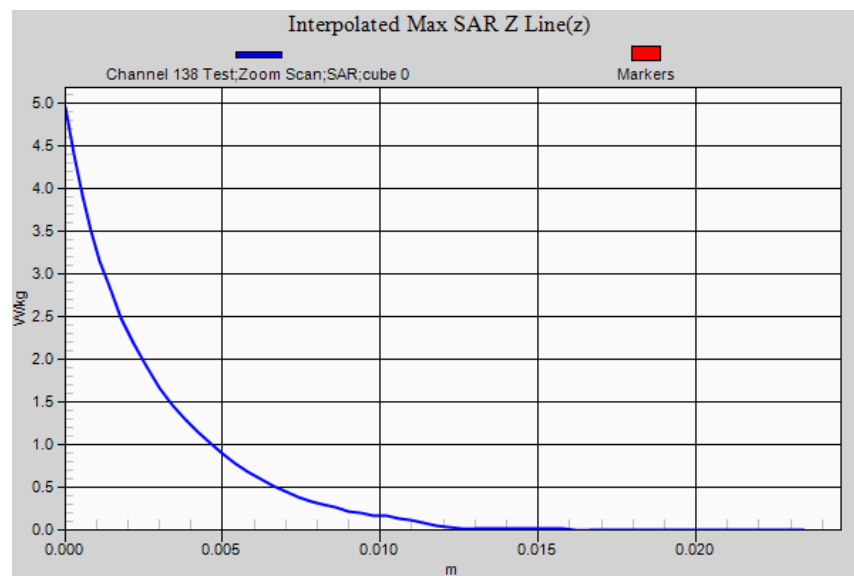

Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

Test Lab: EMCTech

Test File: M150814 5800 MHz WLAN FCC.da52:5

DUT Name: Fujitsu Tablet with 11 abgn/ac WLAN, Type: 8260NGW, Serial: WFM (MAC):A4:34:D9:09:92:96**Configuration: Edge 1 ANT 1 WWAN Ant. IN (OFDM) 03-Sept-2015**

Communication System: 0 - OFDM 5 GHz HT0 (80 MHz); Communication System Band: 5.8 GHz Band;

Frequency: 5775 MHz, Communication System PAR: 0.00 dB; PMF: 0.00; Duty Cycle: 1:1.00

Medium Parameters used: $f=5775.55$ MHz; $\sigma = 6.19$ S/m; $\epsilon_r = 46.0$; $\rho = 1000.0$ g/cm³

Phantom section: Flat Section

DASY Configuration:

Probe: EX3DV4 - SN7358; ConvF: (4.13,4.13,4.13); Calibrated: 21/04/2015;

Sensor-Surface: 1.4 mm (Mechanical Surface Detection (Locations From Previous Scan Used))

Electronics: DAE3 Sn442; Calibrated: 3/12/2014

Phantom: ELI v4.0 (30deg probe tilt); Type: QDOVA001BB; Serial: TP:1101


DASY52 52.8.8(1222); SEMCAD X Version 14.6.10 (7331)

Edge 1 ANT 1 WWAN Ant. IN (OFDM) 03-Sept-2015/Channel 155 Test/Area Scan (61x91x1): Interpolated grid:

dx=1.0 mm, dy=1.0 mm; Maximum value of SAR (interpolated) = 2.040 W/kg


Edge 1 ANT 1 WWAN Ant. IN (OFDM) 03-Sept-2015/Channel 155 Test/Zoom Scan (31x31x61)/Cube 0:Interpolated grid: dx=0.8 mm, dy=0.8 mm, dz=0.4 mm; Reference Value = 11.166 V/m; **Power Drift = -0.13 dB****Averaged SAR: SAR(1g) = 0.822 W/kg; SAR(10g) = 0.167 W/kg**

Maximum value of SAR (interpolated) = 4.510 W/kg

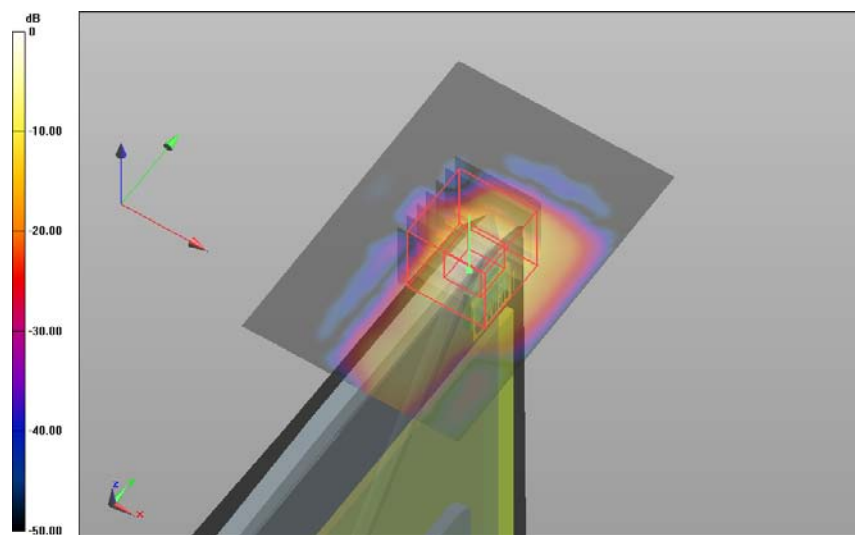

0 dB = 2.04 W/kg = 3.10 dBW/kg

SAR Measurement Plot 58

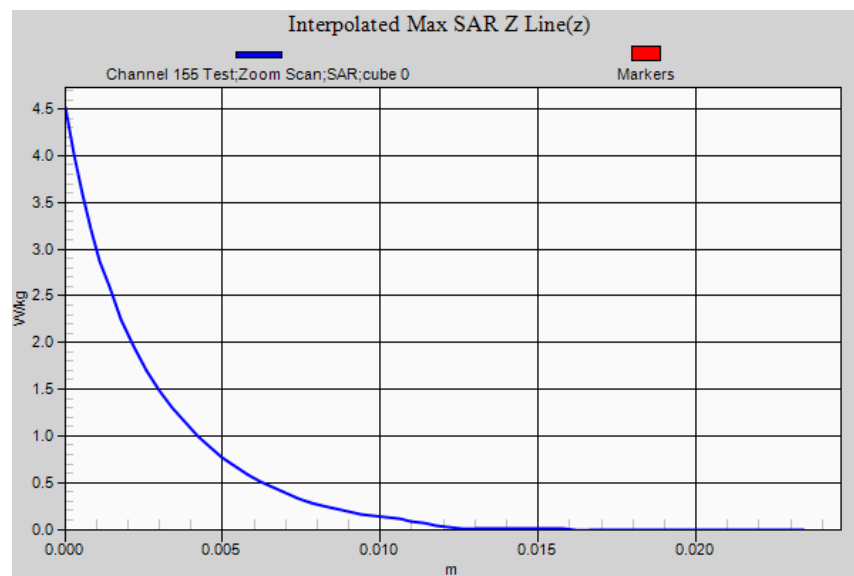

Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

Test Lab: EMCTech

Test File: M150814 5800 MHz WLAN FCC.da52:6

DUT Name: Fujitsu Tablet with 11 abgn/ac WLAN, Type: 8260NGW, Serial: WFM (MAC):A4:34:D9:09:92:96**Configuration: Edge 1 ANT 1 WWAN Ant. IN Variability (OFDM) 03-Sept-2015**

Communication System: 0 - OFDM 5 GHz HT0 (80 MHz); Communication System Band: 5.8 GHz Band;

Frequency: 5690 MHz, Communication System PAR: 0.00 dB; PMF: 0.00; Duty Cycle: 1:1.00

Medium Parameters used: $f=5689.75$ MHz; $\sigma = 6.07$ S/m; $\epsilon_r = 46.3$; $\rho = 1000.0$ g/cm³

Phantom section: Flat Section

DASY Configuration:

Probe: EX3DV4 - SN7358; ConvF: (3.95,3.95,3.95); Calibrated: 21/04/2015;

Sensor-Surface: 1.4 mm (Mechanical Surface Detection)

Electronics: DAE3 Sn442; Calibrated: 3/12/2014

Phantom: ELI v4.0 (30deg probe tilt); Type: QDOVA001BB; Serial: TP:1101


DASY52 52.8.8(1222); SEMCAD X Version 14.6.10 (7331)

Edge 1 ANT 1 WWAN Ant. IN Variability (OFDM) 03-Sept-2015/Channel 138 Test/Area Scan (61x91x1):


Interpolated grid: dx=1.0 mm, dy=1.0 mm; Maximum value of SAR (interpolated) = 3.480 W/kg

Edge 1 ANT 1 WWAN Ant. IN Variability (OFDM) 03-Sept-2015/Channel 138 Test/Zoom Scan**(31x31x61)/Cube 0:** Interpolated grid: dx=0.8 mm, dy=0.8 mm, dz=0.4 mm; Reference Value = 15.026 V/m;**Power Drift = -0.02 dB****Averaged SAR: SAR(1g) = 0.902 W/kg; SAR(10g) = 0.189 W/kg**

Maximum value of SAR (interpolated) = 4.710 W/kg

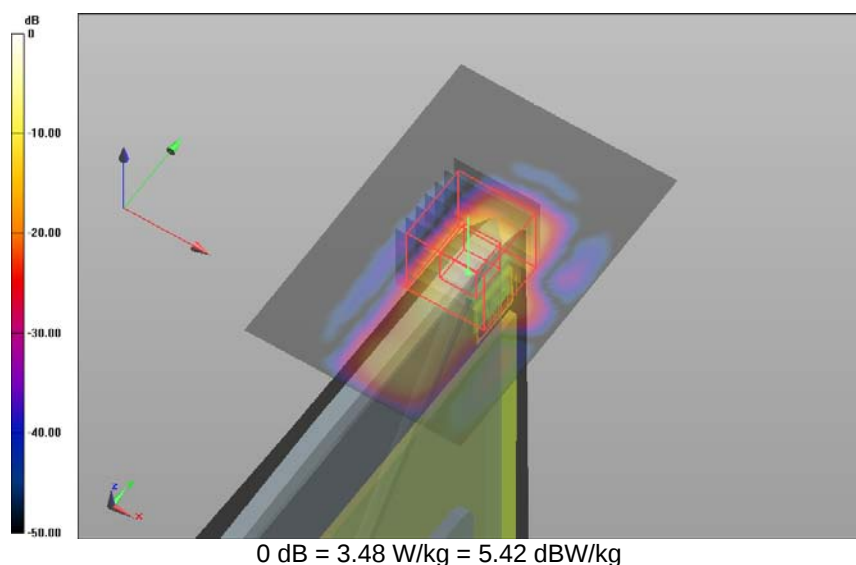

SAR Measurement Plot 59

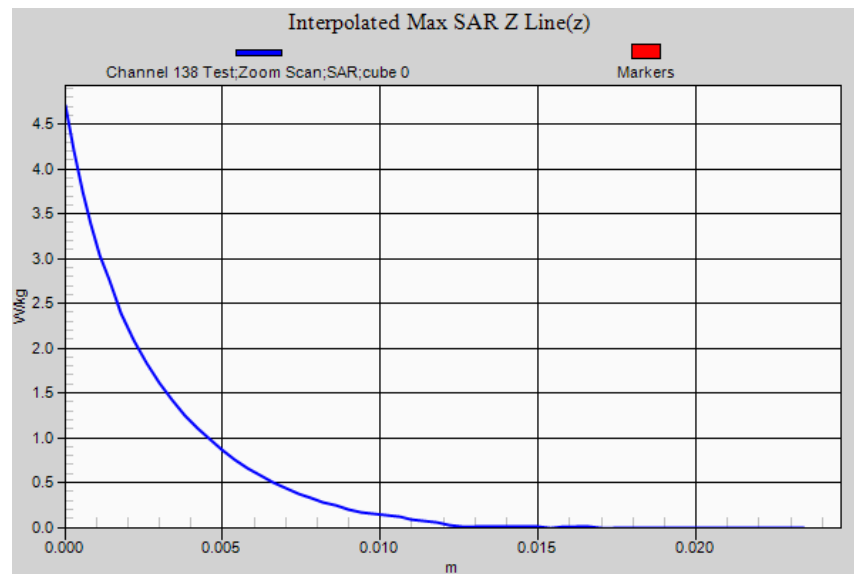

Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

Test Lab: EMCTech

Test File: M150814 5800 MHz WLAN FCC.da52:7

DUT Name: Fujitsu Tablet with 11 abgn/ac WLAN, Type: 8260NGW, Serial: WFM (MAC):A4:34:D9:09:92:96**Configuration: Edge 1 ANT 2 WWAN Ant. IN (OFDM) 03-Sept-2015**

Communication System: 0 - OFDM 5 GHz HT0 (80 MHz); Communication System Band: 5.8 GHz Band;

Frequency: 5690 MHz, Communication System PAR: 0.00 dB; PMF: 0.00; Duty Cycle: 1:1.00

Medium Parameters used: $f=5689.75$ MHz; $\sigma = 6.07$ S/m; $\epsilon_r = 46.3$; $\rho = 1000.0$ g/cm³

Phantom section: Flat Section

DASY Configuration:

Probe: EX3DV4 - SN7358; ConvF: (3.95,3.95,3.95); Calibrated: 21/04/2015;

Sensor-Surface: 1.4 mm (Mechanical Surface Detection)

Electronics: DAE3 Sn442; Calibrated: 3/12/2014

Phantom: ELI v4.0 (30deg probe tilt); Type: QDOVA001BB; Serial: TP:1101


DASY52 52.8.8(1222); SEMCAD X Version 14.6.10 (7331)

Edge 1 ANT 2 WWAN Ant. IN (OFDM) 03-Sept-2015/Channel 138 Test/Area Scan (61x91x1): Interpolated grid:

dx=1.0 mm, dy=1.0 mm; Maximum value of SAR (interpolated) = 1.900 W/kg


Edge 1 ANT 2 WWAN Ant. IN (OFDM) 03-Sept-2015/Channel 138 Test/Zoom Scan (31x31x61)/Cube 0:Interpolated grid: dx=0.8 mm, dy=0.8 mm, dz=0.4 mm; Reference Value = 13.429 V/m; **Power Drift = -0.20 dB****Averaged SAR: SAR(1g) = 0.840 W/kg; SAR(10g) = 0.172 W/kg**

Maximum value of SAR (interpolated) = 4.460 W/kg

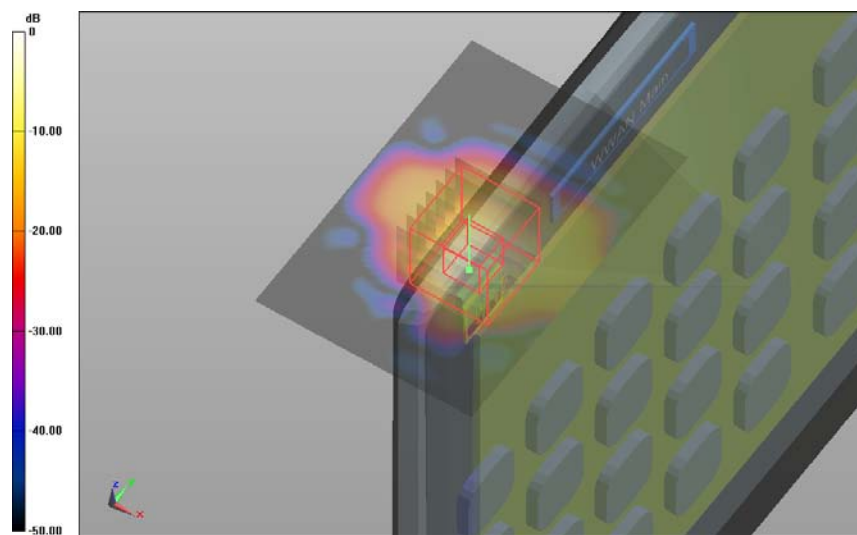

0 dB = 1.90 W/kg = 2.79 dBW/kg

SAR Measurement Plot 60

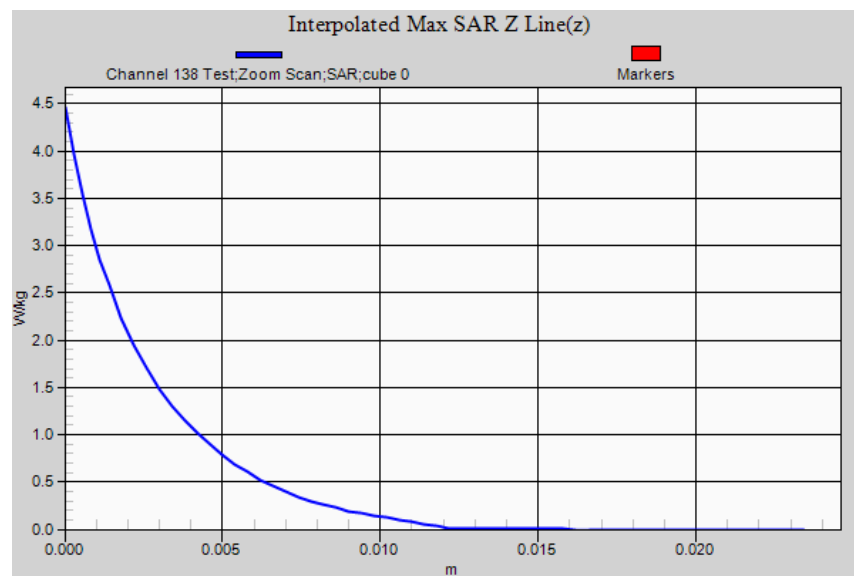

Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

Test Lab: EMCTech

Test File: M150814 5800 MHz WLAN FCC.da52:7

DUT Name: Fujitsu Tablet with 11 abgn/ac WLAN, Type: 8260NGW, Serial: WFM (MAC):A4:34:D9:09:92:96**Configuration: Edge 1 ANT 2 WWAN Ant. IN (OFDM) 03-Sept-2015**

Communication System: 0 - OFDM 5 GHz HT0 (80 MHz); Communication System Band: 5.8 GHz Band;

Frequency: 5775 MHz, Communication System PAR: 0.00 dB; PMF: 0.00; Duty Cycle: 1:1.00

Medium Parameters used: $f=5775.55$ MHz; $\sigma = 6.19$ S/m; $\epsilon_r = 46.0$; $\rho = 1000.0$ g/cm³

Phantom section: Flat Section

DASY Configuration:

Probe: EX3DV4 - SN7358; ConvF: (4.13,4.13,4.13); Calibrated: 21/04/2015;

Sensor-Surface: 1.4 mm (Mechanical Surface Detection (Locations From Previous Scan Used))

Electronics: DAE3 Sn442; Calibrated: 3/12/2014

Phantom: ELI v4.0 (30deg probe tilt); Type: QDOVA001BB; Serial: TP:1101


DASY52 52.8.8(1222); SEMCAD X Version 14.6.10 (7331)

Edge 1 ANT 2 WWAN Ant. IN (OFDM) 03-Sept-2015/Channel 155 Test/Area Scan (61x91x1): Interpolated grid:

dx=1.0 mm, dy=1.0 mm; Maximum value of SAR (interpolated) = 1.740 W/kg


Edge 1 ANT 2 WWAN Ant. IN (OFDM) 03-Sept-2015/Channel 155 Test/Zoom Scan (31x31x61)/Cube 0:Interpolated grid: dx=0.8 mm, dy=0.8 mm, dz=0.4 mm; Reference Value = 11.828 V/m; **Power Drift = -0.13 dB****Averaged SAR: SAR(1g) = 0.662 W/kg; SAR(10g) = 0.135 W/kg**

Maximum value of SAR (interpolated) = 3.630 W/kg

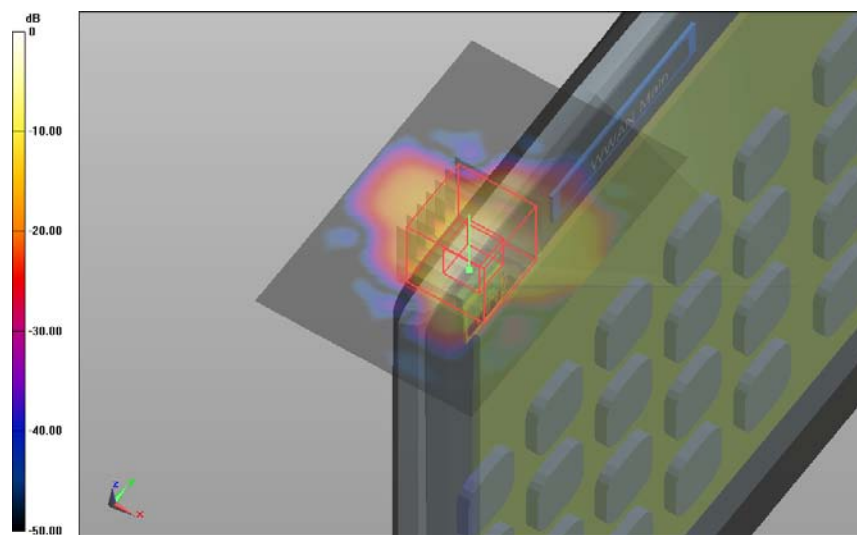

0 dB = 1.74 W/kg = 2.41 dBW/kg

SAR Measurement Plot 61

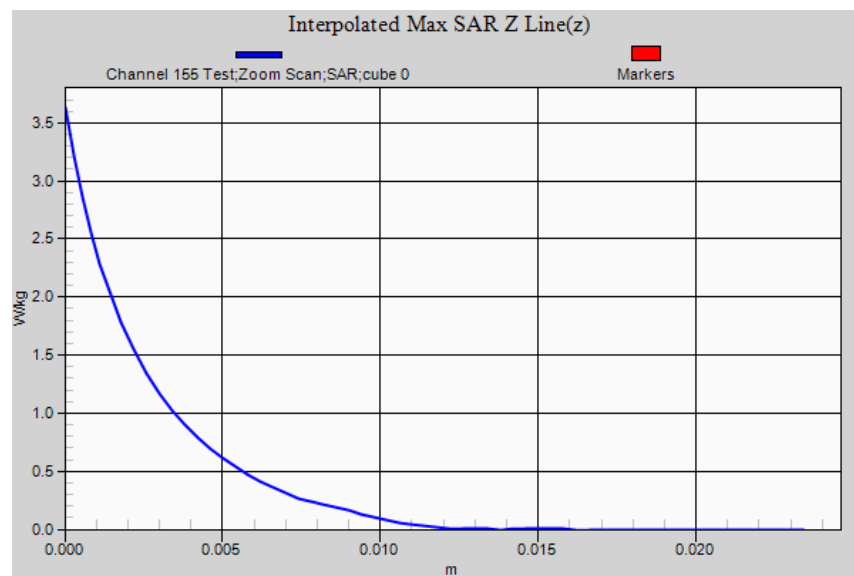

Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

Test Lab: EMCTech

Test File: M150814 5800 MHz WLAN FCC.da52:8

DUT Name: Fujitsu Tablet with 11 abgn/ac WLAN, Type: 8260NGW, Serial: WFM (MAC):A4:34:D9:09:92:96**Configuration: Edge 1 ANT 2 WWAN Ant. IN Variability (OFDM) 03-Sept-2015**

Communication System: 0 - OFDM 5 GHz HT0 (80 MHz); Communication System Band: 5.8 GHz Band;

Frequency: 5690 MHz, Communication System PAR: 0.00 dB; PMF: 0.00; Duty Cycle: 1:1.00

Medium Parameters used: $f=5689.75$ MHz; $\sigma = 6.07$ S/m; $\epsilon_r = 46.3$; $\rho = 1000.0$ g/cm³

Phantom section: Flat Section

DASY Configuration:

Probe: EX3DV4 - SN7358; ConvF: (3.95,3.95,3.95); Calibrated: 21/04/2015;

Sensor-Surface: 1.4 mm (Mechanical Surface Detection)

Electronics: DAE3 Sn442; Calibrated: 3/12/2014

Phantom: ELI v4.0 (30deg probe tilt); Type: QDOVA001BB; Serial: TP:1101


DASY52 52.8.8(1222); SEMCAD X Version 14.6.10 (7331)

Edge 1 ANT 2 WWAN Ant. IN Variability (OFDM) 03-Sept-2015/Channel 138 Test/Area Scan (61x91x1):


Interpolated grid: dx=1.0 mm, dy=1.0 mm; Maximum value of SAR (interpolated) = 2.280 W/kg

Edge 1 ANT 2 WWAN Ant. IN Variability (OFDM) 03-Sept-2015/Channel 138 Test/Zoom Scan**(31x31x61)/Cube 0:** Interpolated grid: dx=0.8 mm, dy=0.8 mm, dz=0.4 mm; Reference Value = 23.033 V/m;**Power Drift = -0.18 dB****Averaged SAR: SAR(1g) = 0.841 W/kg; SAR(10g) = 0.170 W/kg**

Maximum value of SAR (interpolated) = 4.460 W/kg

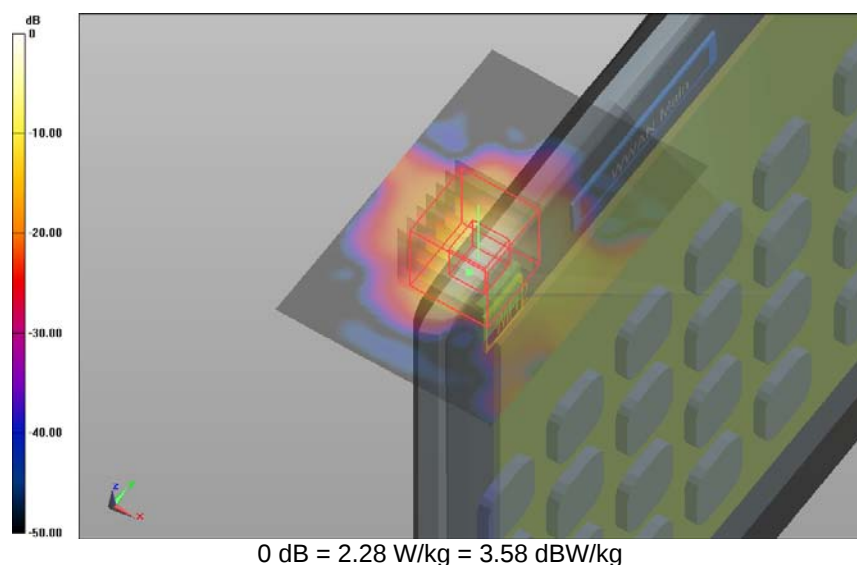

SAR Measurement Plot 62

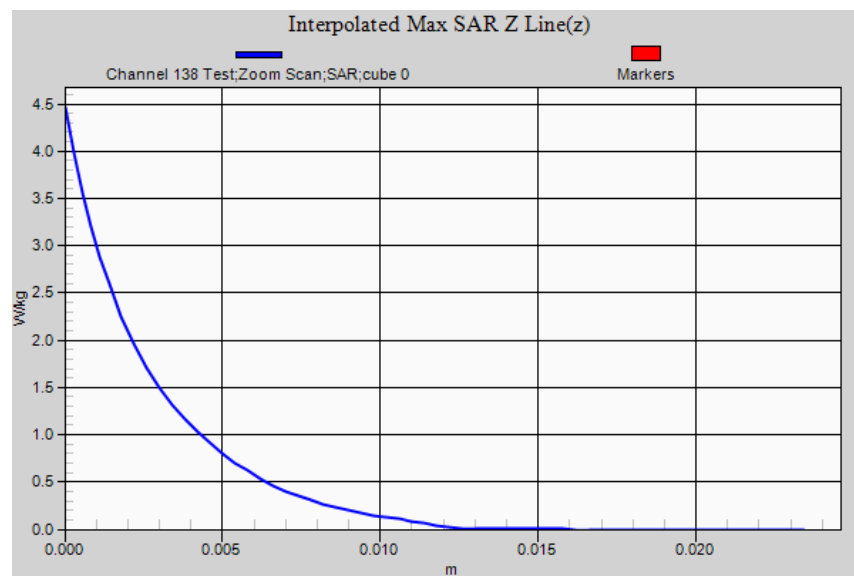

Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

Test Lab: EMCTech

Test File: M150814 5800 MHz WLAN FCC.da52:9

DUT Name: Fujitsu Tablet with 11 abgn/ac WLAN, Type: 8260NGW, Serial: WFM (MAC):A4:34:D9:09:92:96**Configuration: Edge 2 ANT 1 WWAN Ant. IN (OFDM) 03-Sept-2015**

Communication System: 0 - OFDM 5 GHz HT0 (80 MHz); Communication System Band: 5.8 GHz Band;

Frequency: 5775 MHz, Communication System PAR: 0.00 dB; PMF: 0.00; Duty Cycle: 1:1.00

Medium Parameters used: $f=5775.55$ MHz; $\sigma = 6.19$ S/m; $\epsilon_r = 46.0$; $\rho = 1000.0$ g/cm³

Phantom section: Flat Section

DASY Configuration:

Probe: EX3DV4 - SN7358; ConvF: (4.13,4.13,4.13); Calibrated: 21/04/2015;

Sensor-Surface: 1.4 mm (Mechanical Surface Detection)

Electronics: DAE3 Sn442; Calibrated: 3/12/2014

Phantom: ELI v4.0 (30deg probe tilt); Type: QDOVA001BB; Serial: TP:1101


DASY52 52.8.8(1222); SEMCAD X Version 14.6.10 (7331)

Edge 2 ANT 1 WWAN Ant. IN (OFDM) 03-Sept-2015/Channel 155 Test/Area Scan (61x121x1): Interpolated grid:

dx=1.0 mm, dy=1.0 mm; Maximum value of SAR (interpolated) = 0.122 W/kg


Edge 2 ANT 1 WWAN Ant. IN (OFDM) 03-Sept-2015/Channel 155 Test/Zoom Scan (31x31x61)/Cube 0:Interpolated grid: dx=0.8 mm, dy=0.8 mm, dz=0.4 mm; Reference Value = 1.546 V/m; **Power Drift = -0.21 dB****Averaged SAR: SAR(1g) = 0.038 W/kg; SAR(10g) = 0.013 W/kg**

Maximum value of SAR (interpolated) = 0.350 W/kg

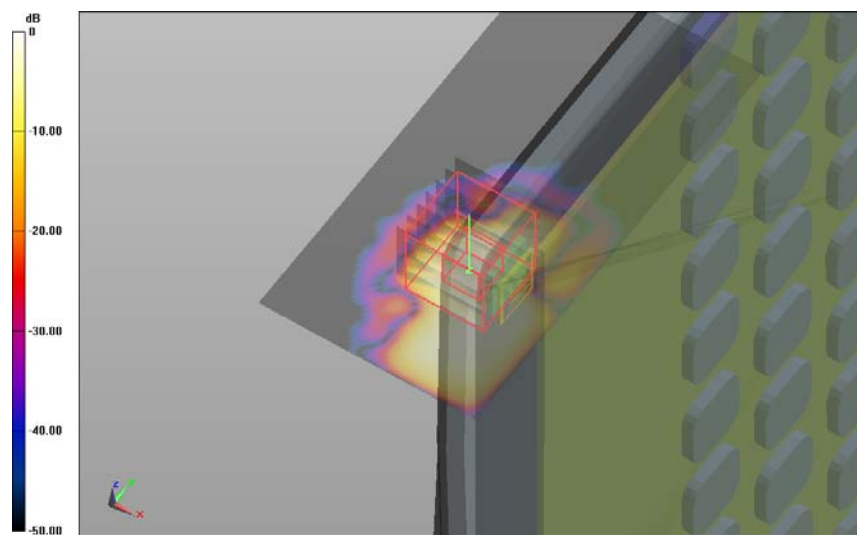

0 dB = 0.122 W/kg = -9.14 dBW/kg

SAR Measurement Plot 63

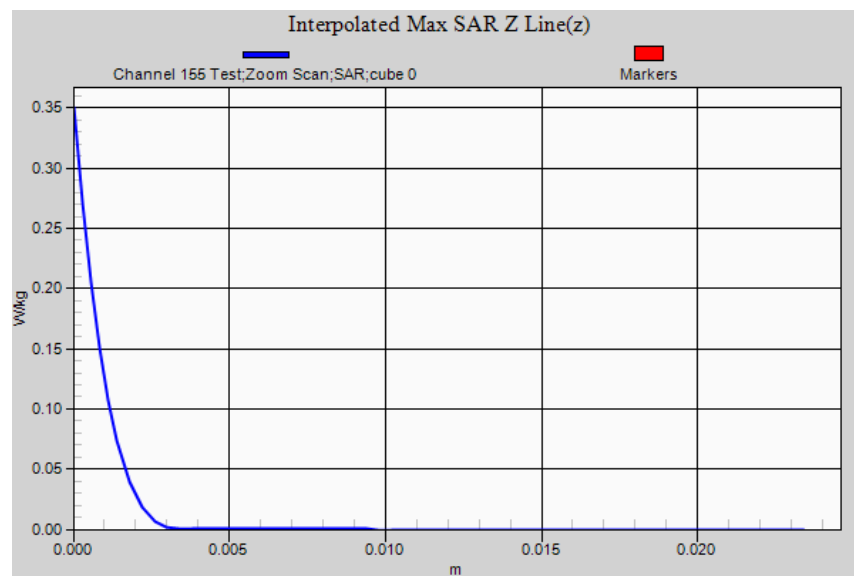

Test Lab: EMCTech

Test File: M150814 5800 MHz WLAN FCC.da52:10

DUT Name: Fujitsu Tablet with 11 abgn/ac WLAN, Type: 8260NGW, Serial: WFM (MAC):A4:34:D9:09:92:96**Configuration: Edge 4 ANT 2 WWAN Ant. IN (OFDM) 03-Sept-2015**

Communication System: 0 - OFDM 5 GHz HT0 (80 MHz); Communication System Band: 5.8 GHz Band;

Frequency: 5775 MHz, Communication System PAR: 0.00 dB; PMF: 0.00; Duty Cycle: 1:1.00

Medium Parameters used: $f=5775.55$ MHz; $\sigma = 6.19$ S/m; $\epsilon_r = 46.0$; $\rho = 1000.0$ g/cm³

Phantom section: Flat Section

DASY Configuration:

Probe: EX3DV4 - SN7358; ConvF: (4.13,4.13,4.13); Calibrated: 21/04/2015;

Sensor-Surface: 1.4 mm (Mechanical Surface Detection)

Electronics: DAE3 Sn442; Calibrated: 3/12/2014

Phantom: ELI v4.0 (30deg probe tilt); Type: QDOVA001BB; Serial: TP:1101


DASY52 52.8.8(1222); SEMCAD X Version 14.6.10 (7331)

Edge 4 ANT 2 WWAN Ant. IN (OFDM) 03-Sept-2015/Channel 155 Test/Area Scan (91x121x1): Interpolated grid:

dx=1.0 mm, dy=1.0 mm; Maximum value of SAR (interpolated) = 0.075 W/kg


Edge 4 ANT 2 WWAN Ant. IN (OFDM) 03-Sept-2015/Channel 155 Test/Zoom Scan (31x31x61)/Cube 0:Interpolated grid: dx=0.8 mm, dy=0.8 mm, dz=0.4 mm; Reference Value = 1.751 V/m; **Power Drift = 0.06 dB****Averaged SAR: SAR(1g) = 0.027 W/kg; SAR(10g) = 0.005 W/kg**

Maximum value of SAR (interpolated) = 0.463 W/kg

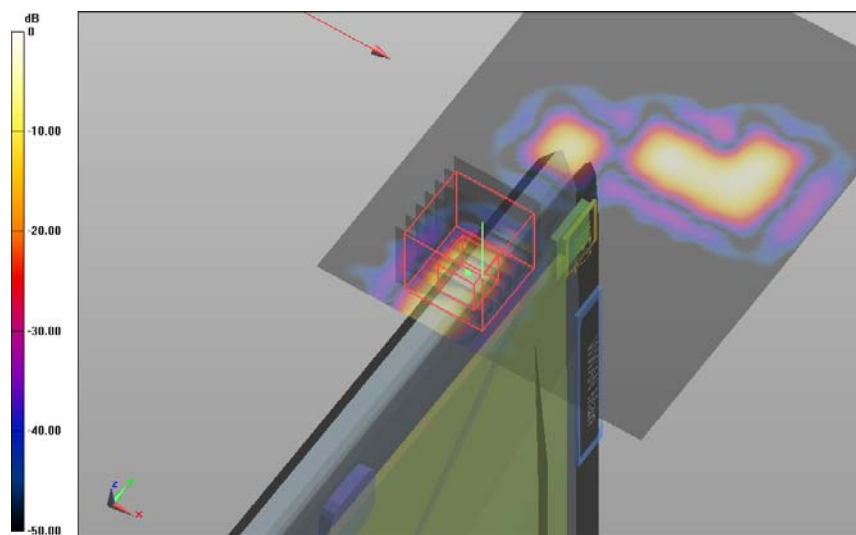

0 dB = 0.0751 W/kg = -11.24 dBW/kg

SAR Measurement Plot 64

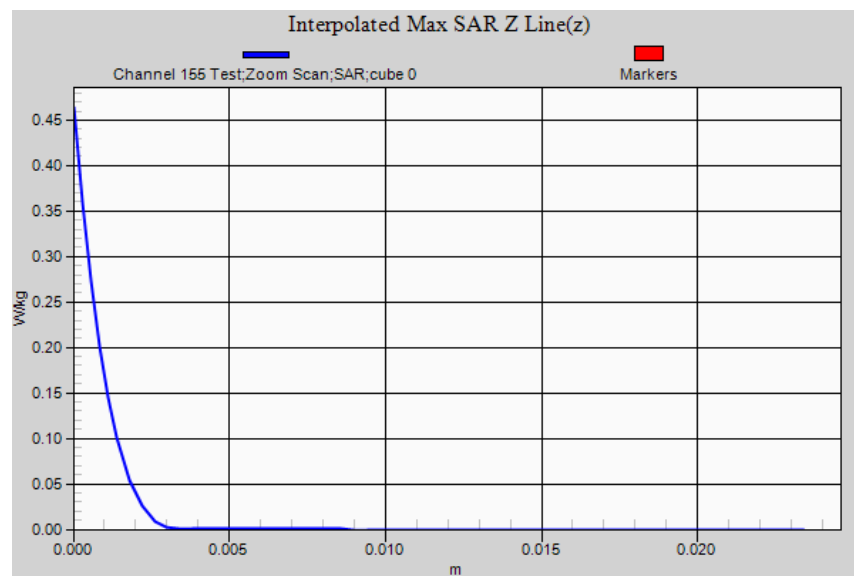

Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

Test Lab: EMCTech

Test File: M150814 5800 MHz WLAN FCC.da52:11

DUT Name: Fujitsu Tablet with 11 abgn/ac WLAN, Type: 8260NGW, Serial: WFM (MAC):A4:34:D9:09:92:96**Configuration: Edge 4 ANT 2 WWAN Ant. OUT (OFDM) 03-Sept-2015**

Communication System: 0 - OFDM 5 GHz HT0 (80 MHz); Communication System Band: 5.8 GHz Band;

Frequency: 5690 MHz, Communication System PAR: 0.00 dB; PMF: 0.00; Duty Cycle: 1:1.00

Medium Parameters used: $f=5689.75$ MHz; $\sigma = 6.07$ S/m; $\epsilon_r = 46.3$; $\rho = 1000.0$ g/cm³

Phantom section: Flat Section

DASY Configuration:

Probe: EX3DV4 - SN7358; ConvF: (3.95,3.95,3.95); Calibrated: 21/04/2015;

Sensor-Surface: 1.4 mm (Mechanical Surface Detection)


Electronics: DAE3 Sn442; Calibrated: 3/12/2014

Phantom: ELI v4.0 (30deg probe tilt); Type: QDOVA001BB; Serial: TP:1101

DASY52 52.8.8(1222); SEMCAD X Version 14.6.10 (7331)


Edge 4 ANT 2 WWAN Ant. OUT (OFDM) 03-Sept-2015/Channel 138 Test/Area Scan (61x121x1): Interpolated grid: dx=1.0 mm, dy=1.0 mm; Maximum value of SAR (interpolated) = 0.096 W/kg**Edge 4 ANT 2 WWAN Ant. OUT (OFDM) 03-Sept-2015/Channel 138 Test/Zoom Scan (31x31x61)/Cube 0:**Interpolated grid: dx=0.8 mm, dy=0.8 mm, dz=0.4 mm; Reference Value = 2.226 V/m; **Power Drift = -0.06 dB****Averaged SAR: SAR(1g) = 0.029 W/kg; SAR(10g) = 0.006 W/kg**

Maximum value of SAR (interpolated) = 0.328 W/kg

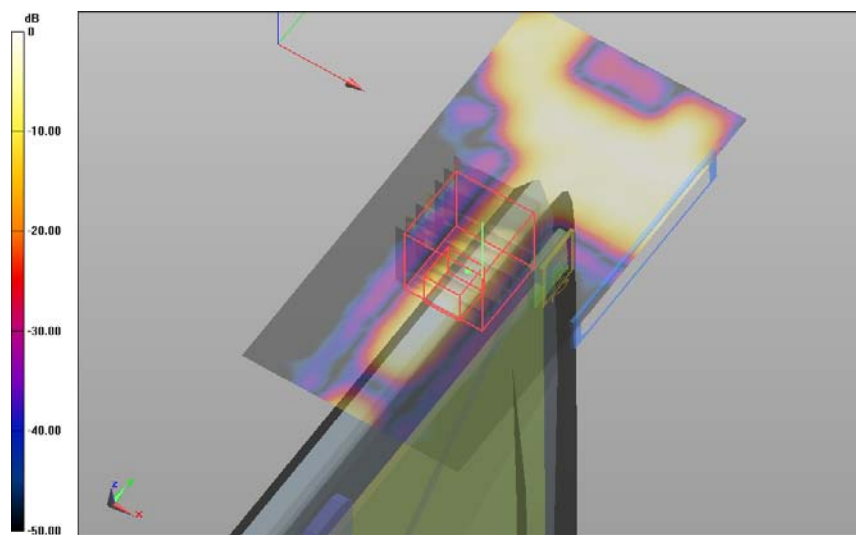

0 dB = 0.0960 W/kg = -10.18 dBW/kg

SAR Measurement Plot 65

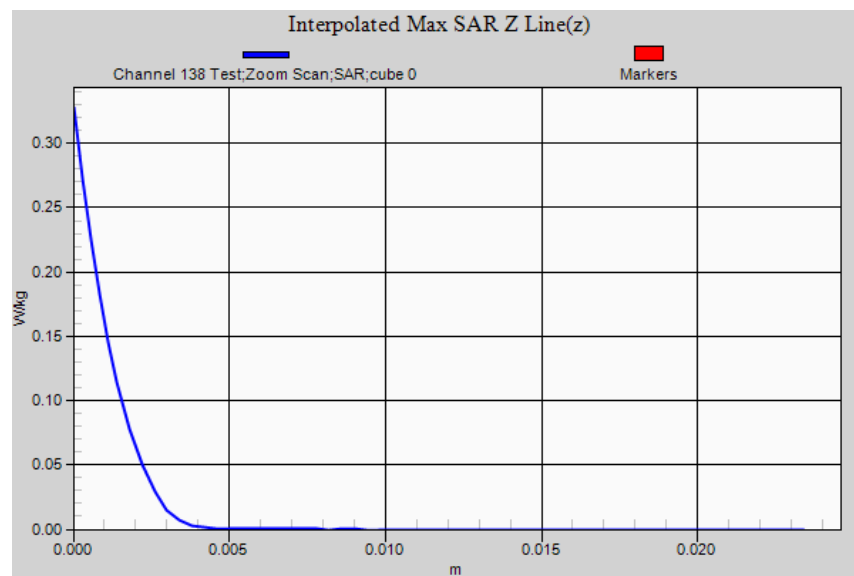

Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

Test Lab: EMCTech

Test File: M150814 5800 MHz WLAN FCC.da52:11

DUT Name: Fujitsu Tablet with 11 abgn/ac WLAN, Type: 8260NGW, Serial: WFM (MAC):A4:34:D9:09:92:96**Configuration: Edge 4 ANT 2 WWAN Ant. OUT (OFDM) 03-Sept-2015**

Communication System: 0 - OFDM 5 GHz HT0 (80 MHz); Communication System Band: 5.8 GHz Band;

Frequency: 5775 MHz, Communication System PAR: 0.00 dB; PMF: 0.00; Duty Cycle: 1:1.00

Medium Parameters used: $f=5775.55$ MHz; $\sigma = 6.19$ S/m; $\epsilon_r = 46.0$; $\rho = 1000.0$ g/cm³

Phantom section: Flat Section

DASY Configuration:

Probe: EX3DV4 - SN7358; ConvF: (4.13,4.13,4.13); Calibrated: 21/04/2015;

Sensor-Surface: 1.4 mm (Mechanical Surface Detection (Locations From Previous Scan Used))


Electronics: DAE3 Sn442; Calibrated: 3/12/2014

Phantom: ELI v4.0 (30deg probe tilt); Type: QDOVA001BB; Serial: TP:1101

DASY52 52.8.8(1222); SEMCAD X Version 14.6.10 (7331)


Edge 4 ANT 2 WWAN Ant. OUT (OFDM) 03-Sept-2015/Channel 155 Test/Area Scan (61x121x1): Interpolated grid: dx=1.0 mm, dy=1.0 mm; Maximum value of SAR (interpolated) = 0.094 W/kg**Edge 4 ANT 2 WWAN Ant. OUT (OFDM) 03-Sept-2015/Channel 155 Test/Zoom Scan (31x31x61)/Cube 0:**Interpolated grid: dx=0.8 mm, dy=0.8 mm, dz=0.4 mm; Reference Value = 1.554 V/m; **Power Drift = -0.08 dB****Averaged SAR: SAR(1g) = 0.021 W/kg; SAR(10g) = 0.003 W/kg**

Maximum value of SAR (interpolated) = 0.383 W/kg

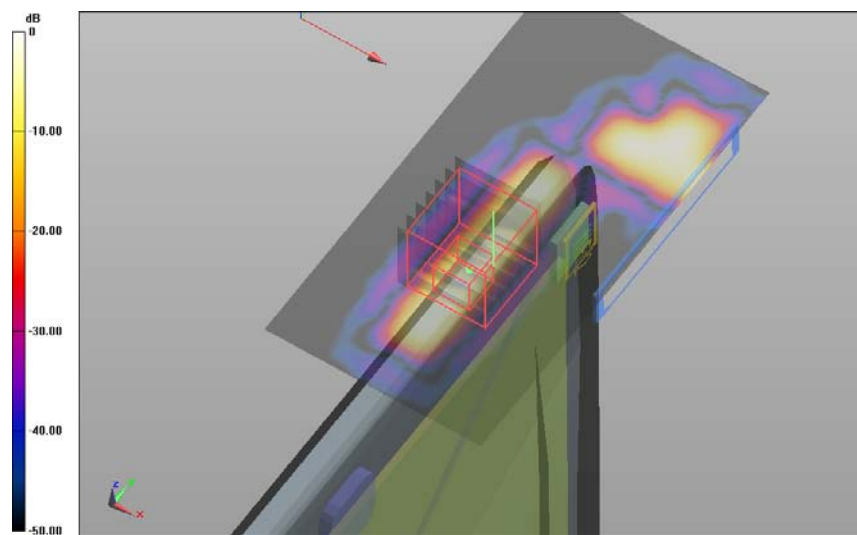

0 dB = 0.0944 W/kg = -10.25 dBW/kg

SAR Measurement Plot 66

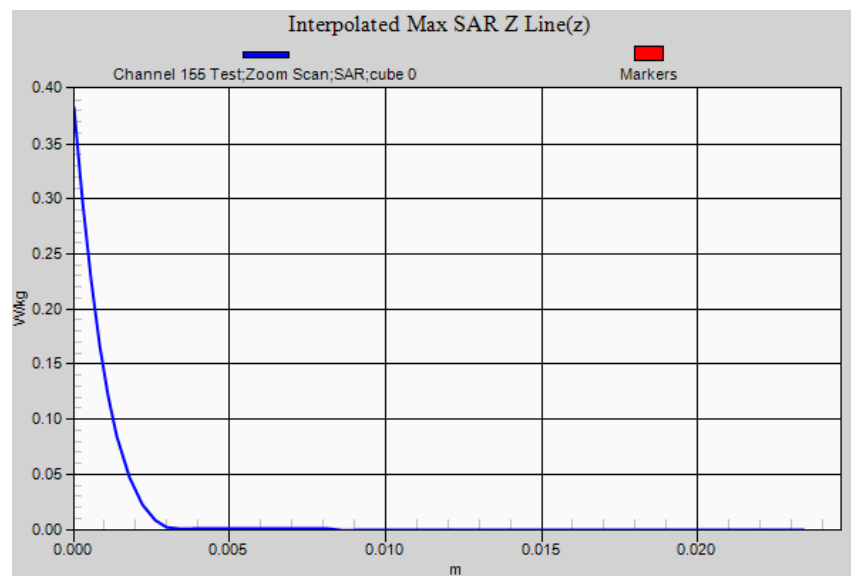

Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

Test Lab: EMCTech

Test File: M150814 5800 MHz WLAN FCC.da52:12

DUT Name: Dipole 5200_5800 MHz, Type: D5GHzV2, Serial: 1008**Configuration: System Performance Check with D5GHzV2 Dipole 02-Sept-2015**

Communication System: 0 - CW; Communication System Band: D5GHz (5000.0 - 6000.0 MHz); Frequency: 5800 MHz; Communication System PAR: 0.00 dB; PMF: 1.00; Duty Cycle: 1:1.00

Medium Parameters used: $f=5800.3$ MHz; $\sigma = 6.18$ S/m; $\epsilon_r = 46.8$; $\rho = 1000.0$ g/cm³

Phantom section: Flat Section

DASY Configuration:

Probe: EX3DV4 - SN7358; ConvF: (4.13,4.13,4.13); Calibrated: 21/04/2015;

Sensor-Surface: 1.4 mm (Mechanical Surface Detection)


Electronics: DAE3 Sn442; Calibrated: 3/12/2014

Phantom: ELI v4.0 (30deg probe tilt); Type: QDOVA001BB; Serial: TP:1101

DASY52 52.8.8(1222); SEMCAD X Version 14.6.10 (7331)

System Performance Check with D5GHzV2 Dipole 02-Sept-2015/d=10mm, Pin=100mW, f=5800 MHz/Area Scan (91x91x1): Interpolated grid: dx=1.0 mm, dy=1.0 mm; Maximum value of SAR (interpolated) = 19.100 W/kg**System Performance Check with D5GHzV2 Dipole 02-Sept-2015/d=10mm, Pin=100mW, f=5800 MHz/Zoom Scan (4x4x2mm, uniform), dist=1.4mm (36x36x66)/Cube 0:** Interpolated grid: dx=0.8 mm, dy=0.8 mm, dz=0.4 mm; Reference Value = 60.962 V/m; **Power Drift = -0.05 dB****Averaged SAR: SAR(1g) = 7.750 W/kg; SAR(10g) = 2.130 W/kg**

Maximum value of SAR (interpolated) = 33.900 W/kg

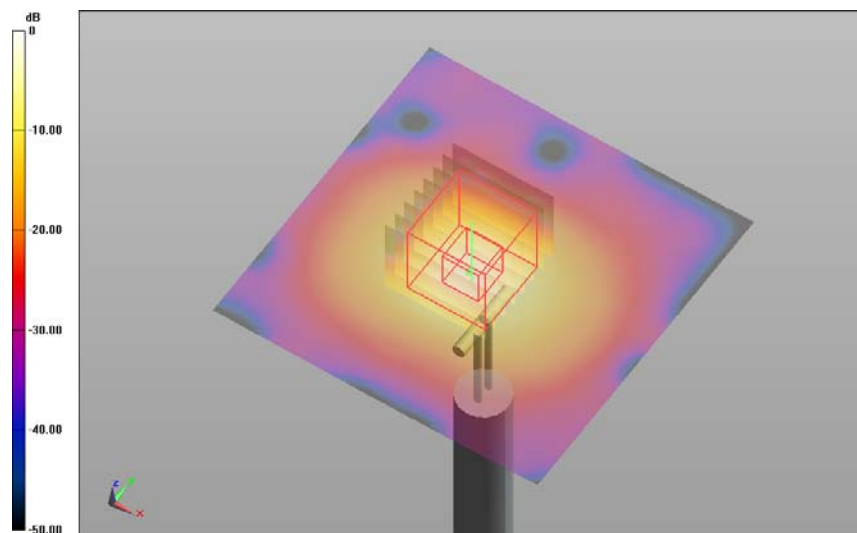


0 dB = 19.1 W/kg = 12.81 dBW/kg

SAR Measurement Plot 67



Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

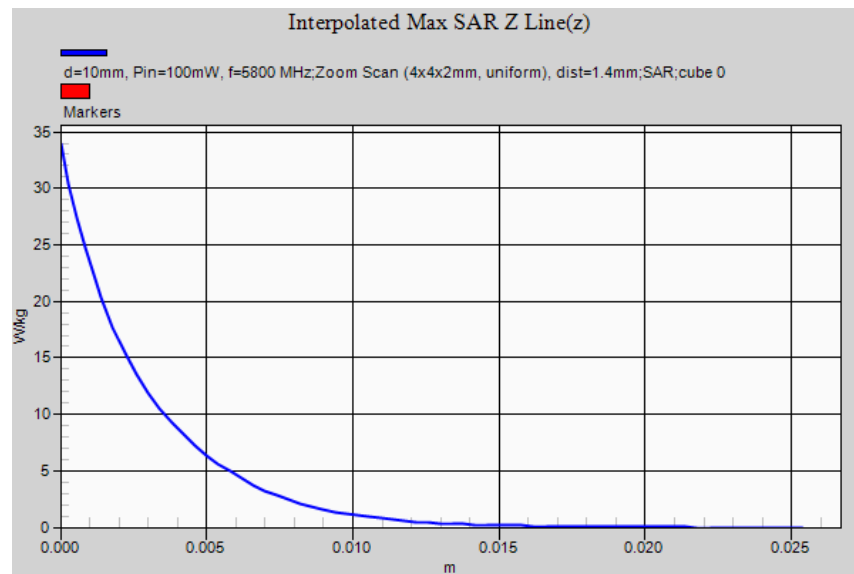

Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

Test Lab: EMCTech

Test File: M150814 5800 MHz WLAN FCC.da52:13

DUT Name: Dipole 5200_5800 MHz, Type: D5GHzV2, Serial: 1008**Configuration: System Performance Check with D5GHzV2 Dipole 03-Sept-2015**

Communication System: 0 - CW; Communication System Band: D5GHz (5000.0 - 6000.0 MHz); Frequency: 5800 MHz; Communication System PAR: 0.00 dB; PMF: 1.00; Duty Cycle: 1:1.00

Medium Parameters used: $f=5800.3$ MHz; $\sigma = 6.22$ S/m; $\epsilon_r = 46.0$; $\rho = 1000.0$ g/cm³

Phantom section: Flat Section

DASY Configuration:

Probe: EX3DV4 - SN7358; ConvF: (4.13,4.13,4.13); Calibrated: 21/04/2015;

Sensor-Surface: 1.4 mm (Mechanical Surface Detection)


Electronics: DAE3 Sn442; Calibrated: 3/12/2014

Phantom: ELI v4.0 (30deg probe tilt); Type: QDOVA001BB; Serial: TP:1101

DASY52 52.8.8(1222); SEMCAD X Version 14.6.10 (7331)

System Performance Check with D5GHzV2 Dipole 03-Sept-2015/d=10mm, Pin=100mW, f=5800 MHz/Area Scan (91x91x1): Interpolated grid: dx=1.0 mm, dy=1.0 mm; Maximum value of SAR (interpolated) = 19.800 W/kg**System Performance Check with D5GHzV2 Dipole 03-Sept-2015/d=10mm, Pin=100mW, f=5800 MHz/Zoom Scan (4x4x2mm, uniform), dist=1.4mm (36x36x66)/Cube 0:** Interpolated grid: dx=0.8 mm, dy=0.8 mm, dz=0.4 mm; Reference Value = 61.369 V/m; **Power Drift = -0.09 dB****Averaged SAR: SAR(1g) = 8.050 W/kg; SAR(10g) = 2.220 W/kg**

Maximum value of SAR (interpolated) = 35.300 W/kg

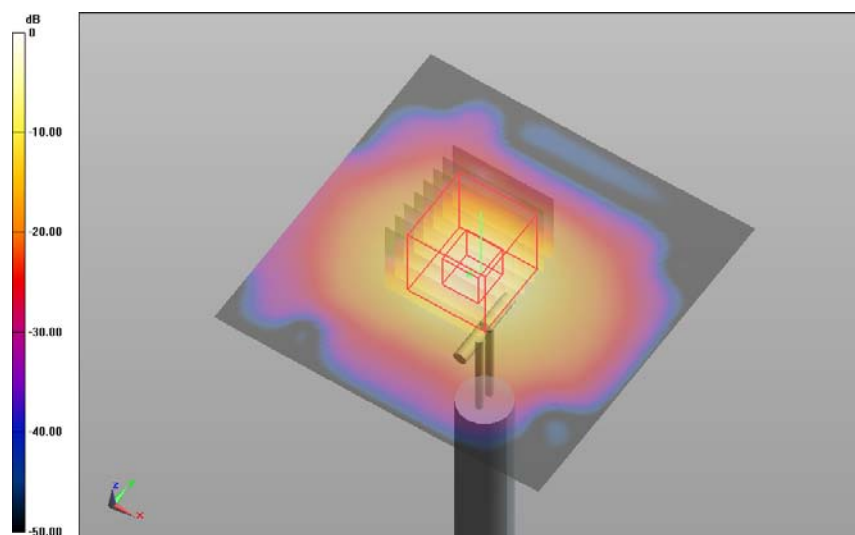


0 dB = 19.8 W/kg = 12.97 dBW/kg

SAR Measurement Plot 68



Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

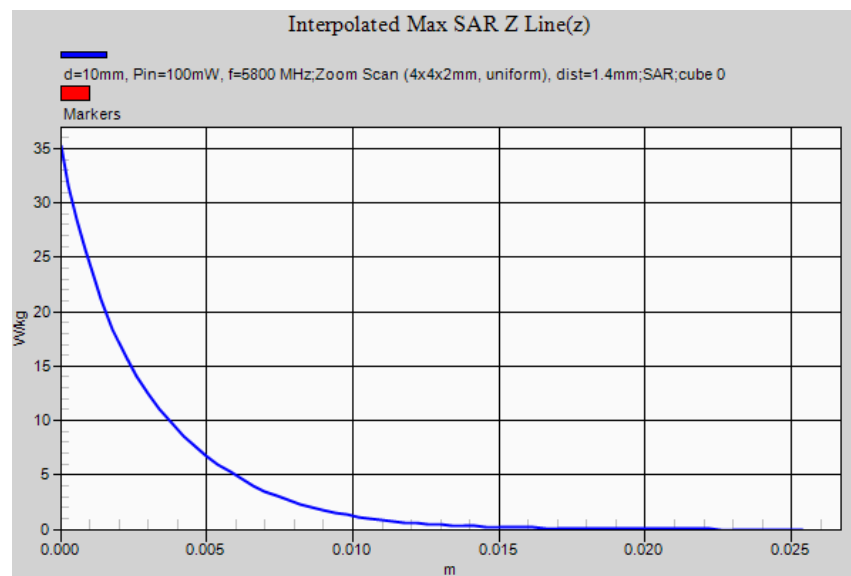

Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.