

EXHIBIT I – AC Powerline Conducted Emissions


FCC ID EJM-HRMP131

# Northwest EMC, Inc., Radiated and Conducted Emissions Data Sheets

Rev 3.5  
01/11/01

EUT: <b>Harley 7</b>	Serial Number: <b>TA5300100019</b>	Job Number: <b>INTE4292</b>	Date: <b>02/14/01</b>
Manufacturer: <b>Intel Corporation</b>	Test Engineer: <b>Rod Peloquin</b>	Job Site: <b>EV01</b>	
Customer Reference Number:	Software:	Power: <b>120VAC/60Hz</b>	
Comments: <b>Frequency hopping mode: 120VAC/60Hz</b>			
<i>Rod Peloquin</i>		Temperature (°C): <b>21</b>	% Humidity: <b>26</b>
<b>Run #01</b>			

## FCC Part 15 Class B Conducted Emissions Limits - High Line

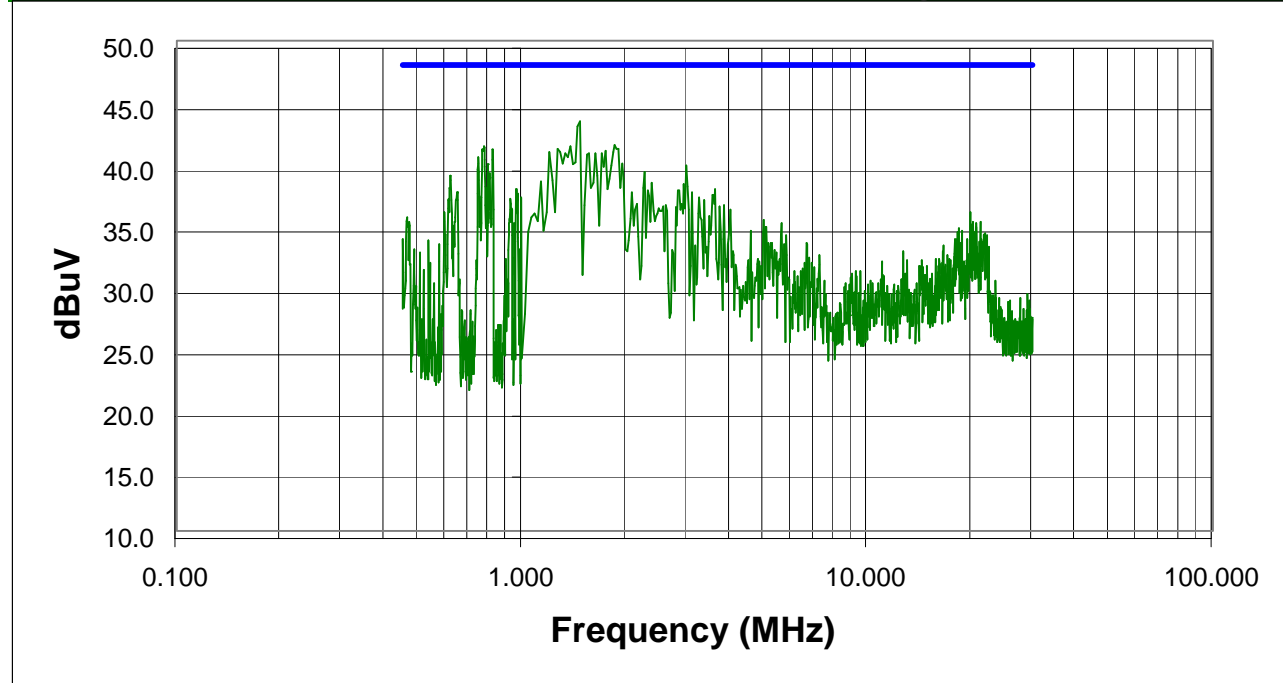


Frequency (MHz)	Meter Reading (dBuV)	Detector	Correction Factor (dB)	Adjusted Level (dBuV)	Specification Limit (dBuV)	Margin (dB)
1.470	22.8	Peak	20.6	43.4	48.0	-4.6
1.855	20.9	Peak	20.6	41.5	48.0	-6.5
1.380	20.8	Peak	20.6	41.4	48.0	-6.6
0.776	21.4	Peak	20.0	41.4	48.0	-6.6
1.267	20.6	Peak	20.6	41.2	48.0	-6.8
0.768	21.1	Peak	20.0	41.1	48.0	-6.9
0.765	21.1	Peak	20.0	41.1	48.0	-6.9
0.821	21.1	Peak	20.0	41.1	48.0	-6.9
1.742	20.4	Peak	20.6	41.0	48.0	-7.0
1.561	20.2	Peak	20.6	40.8	48.0	-7.2
1.629	20.2	Peak	20.6	40.8	48.0	-7.2
0.747	20.5	Peak	20.0	40.5	48.0	-7.5
0.795	19.9	Peak	20.0	39.9	48.0	-8.1
2.986	19.0	Peak	20.8	39.8	48.0	-8.2
2.262	18.6	Peak	20.7	39.3	48.0	-8.7
0.806	19.2	Peak	20.0	39.2	48.0	-8.8
0.619	19.0	Peak	20.0	39.0	48.0	-9.0
1.131	18.0	Peak	20.5	38.5	48.0	-9.5
2.375	17.7	Peak	20.7	38.4	48.0	-9.6
2.941	17.5	Peak	20.8	38.3	48.0	-9.7

## Northwest EMC, Inc., Radiated and Conducted Emissions Data Sheets

Rev 3.5  
01/11/01

EUT: <b>Harley 7</b>	Serial Number: <b>TA5300100019</b>	Job Number: <b>INTE4292</b>	Date: <b>02/14/01</b>
Manufacturer: <b>Intel Corporation</b>	Test Engineer: <b>Rod Peloquin</b>	Job Site: <b>EV01</b>	
Customer Reference Number:	Software:	Power: <b>120VAC/60Hz</b>	
Comments: <b>Frequency hopping mode: 120VAC/60Hz</b>			
<i>Rod Peloquin</i>		Temperature (°C): <b>21</b>	% Humidity: <b>26</b>
<b>Run #02</b>			

### FCC Part 15 Class B Conducted Emissions Limits - Low Line

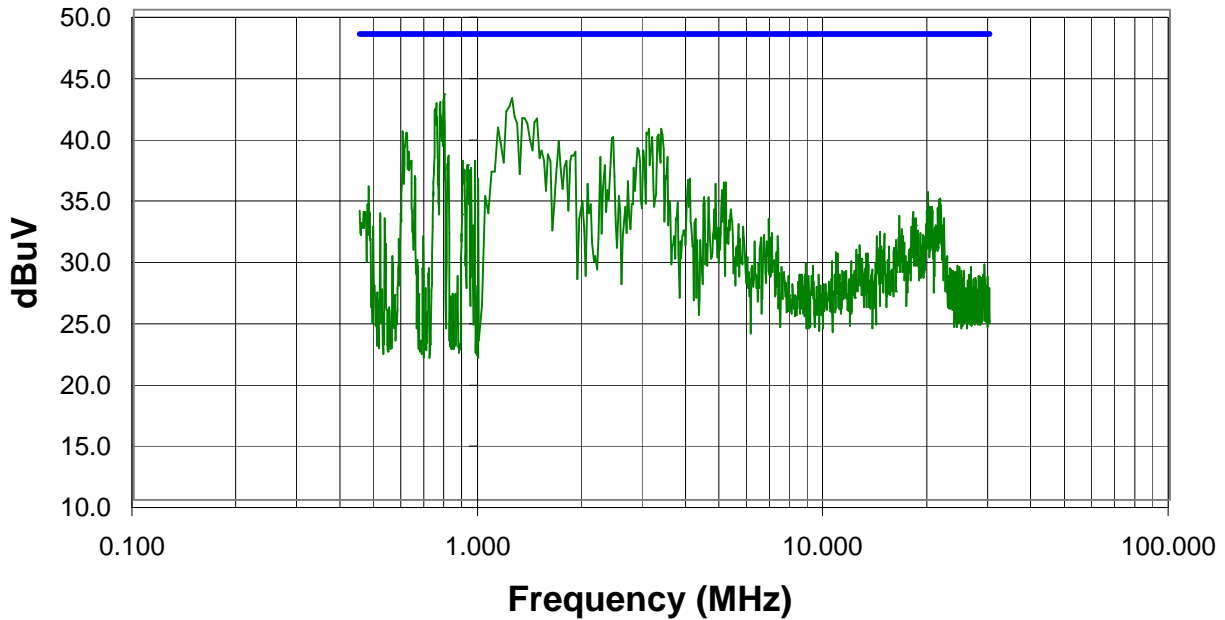

Frequency (MHz)	Meter Reading (dBuV)	Detector	Correction Factor (dB)	Adjusted Level (dBuV)	Specification Limit (dBuV)	Margin (dB)
0.791	23.1	Peak	20.0	43.1	48.0	-4.9
1.244	22.2	Peak	20.6	42.8	48.0	-5.2
0.772	22.5	Peak	20.0	42.5	48.0	-5.5
0.751	22.4	Peak	20.0	42.4	48.0	-5.6
0.754	21.3	Peak	20.0	41.3	48.0	-6.7
1.335	20.6	Peak	20.6	41.2	48.0	-6.8
1.470	20.5	Peak	20.6	41.1	48.0	-6.9
0.781	20.9	Peak	20.0	40.9	48.0	-7.1
1.131	19.9	Peak	20.5	40.4	48.0	-7.6
3.099	19.5	Peak	20.8	40.3	48.0	-7.7
3.371	19.5	Peak	20.8	40.3	48.0	-7.7
0.601	20.1	Peak	20.0	40.1	48.0	-7.9
0.615	20.0	Peak	20.0	40.0	48.0	-8.0
3.054	19.2	Peak	20.8	40.0	48.0	-8.0
3.303	19.0	Peak	20.8	39.8	48.0	-8.2
2.443	18.9	Peak	20.7	39.6	48.0	-8.4
1.697	18.7	Peak	20.6	39.3	48.0	-8.7
2.873	18.0	Peak	20.7	38.7	48.0	-9.3
1.516	17.9	Peak	20.6	38.5	48.0	-9.5
0.623	18.4	Peak	20.0	38.4	48.0	-9.6