

**ELECTROMAGNETIC EMISSIONS COMPLIANCE REPORT
CERTIFICATION TO FCC PART 15 REQUIREMENTS**

for

INTENTIONAL RADIATOR

434 MHz CAR ALARM TRANSMITTER

MODEL NO: PRO-OE2C4S

FCC ID NO: ELVAT1G

REPORT NO: 01E9813

ISSUE DATE: SEPTEMBER 27, 2001

Prepared for

NUTEK CORPORATION

**5F, NO. 3, ALLEY 6, LANE 45, PAO-HSING RD.,
HSING-TIEN CITY, TAIPEI, TAIWAN, R. O. C.**

Prepared by

COMPLIANCE ENGINEERING SERVICES, INC.

**NO. 199, CHUNG SHENG ROAD,
HSIN TIEN CITY, TAIPEI,
TAIWAN, R. O. C.**

d.b.a.

COMPLIANCE CERTIFICATION SERVICES



**FCC, VCCI, CISPR, CE
UL, CSA, TÜV, VDE**

U.S.A. : P.O.BOX 612650, SAN JOSE, CA 95161-2650

TAIPEI : P.O.BOX 17-82, HSIN TIEN, TAIWAN, R.O.C.

TABLE OF CONTENTS	PAGE
1. VERIFICATION OF COMPLIANCE.....	1
2. Product Description.....	2
3. Test Facility.....	2
4. Measurement Standards	2
5. Test Methodology	2
6. Measurement Equipment Used	3
7. POWERLINE RFI LIMIT	3
8. RADIATED EMISSION LIMITS	3
9. SYSTEM TEST CONFIGURATION.....	4
10. Test Procedure.....	5
11. Equipment Modifications.....	6
12. TEST RESULT	7
12.1 Maximum Modulation Percentage (M%)	7
12.2 The Emissions Bandwidth.....	7
 TEST DATA	
• Maximum Modulation Percentage Plot	
• Emission Bandwidth Plot	
• Radiated Emission Worksheet for Average Measurement	

1. VERIFICATION OF COMPLIANCE

COMPANY NAME: NUTЕК CORPORATION
5F, NO. 3, ALLEY 6, LANE 45, PAO-HSING RD.,
HSING-TIEN CITY, TAIPEI, TAIWAN, R. O. C.

CONTACT PERSON: RUBY HSIEH / MARKETING DEPT.

TELEPHONE NO.: (02) 2918-9478 # 120

EUT DESCRIPTION: 434 MHz CAR ALARM TRANSMITTER

MODEL NAME/NUMBER: PRO-OE2C4S

FCC ID: ELVAT1G

DATE TESTED: SEPTEMBER 13 ~ 20, 2001

REPORT NUMBER: 01E9813

TYPE OF EQUIPMENT	SECURITY EQUIPMENT (INTENTIONAL RADIATOR)
EQUIPMENT TYPE	434 MHz CAR ALARM TRANSMITTER
MEASUREMENT PROCEDURE	ANSI C63.4 / 1992
LIMIT TYPE	CERTIFICATION
FCC RULE	CFR 47, PART 15

The above equipment was tested by Compliance Engineering Services, Inc. for compliance with the requirements set forth in the FCC CFR 47, PART 15. The results of testing in this report apply to the product/system which was tested only. Other similar equipment will not necessarily produce the same results due to production tolerance and measurement uncertainties. **Warning** : This document reports conditions under which testing was conducted and results of tests performed. This document may not be altered or revised in any way unless done so by Compliance Engineering Services, Inc. and all revisions are duly noted in the revisions section. Any alteration of this document not carried out by Compliance Engineering Services, Inc. will constitute fraud and shall nullify the document.


RICK YEO / EMC MANAGER
COMPLIANCE ENGINEERING SERVICES, INC.

2. Product Description

Fundamental Frequency	434 MHz
Power Source	12V Battery
Transmitting Time	Periodic \leq 5 seconds
Associated Receiver	FCC ID: ELVAR8B

3. Test Facility

The open area test sites and conducted measurement facilities used to collect the radiated data are located at No. 199, Chung Sheng Road, Hsin Tien City, Taipei, Taiwan R.O.C. The sites are constructed in conformance with the requirements of ANSI C63.7, ANSI C63.4 and CISPR Publication 22.

4. Measurement Standards

The site is constructed and calibrated in conformance with the requirements of ANSI C63.4/1992.

5. Test Methodology

For an intentional radiator, the spectrum shall be investigated from the lowest radio frequency signal generated in the device, without going below 9 KHz, up to at least the tenth harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower. (CFR 47 Section 15.33)

6. Measurement Equipment Used

Manufacturer	Model Number	Description	Cal Due Date
ROHDE & SCHWARZ	DSAI- D 804.8932.52	EMI Test Display	11/2001
ROHDE & SCHWARZ	ESBI- RF/1005.4300.52	EMI Test RF Unit	11/2001
H.P.	8595EM	Spectrum Analyzer (9KHz – 6.5GHz)	01/2002
EMCO	3115	Antenna (1-18GHz)	02/2002
SCHWARZBECK	VULB 9160	Antenna (30-2000 MHz)	05/2002
H.P.	8447D	Amplifier	05/2002
MITEQ	NSP2600-44	Amplifier(1-26GHz)	02/2002

7. POWERLINE RFI LIMIT


CONNECTED TO AC POWER LINE	SECTION 15.207
CARRIER CURRENT SYSTEM IN THE FREQUENCY RANGE OF 450 kHz TO 30 MHz	SECTION 15.205 AND SECTION 15.209, 15.221, 15.223, 15.225 OR 15.227, AS APPROPRIATE.
BATTERY POWER	NO REQUIRED.

8. RADIATED EMISSION LIMITS

GENERAL REQUIREMENTS	SECTION 15.209
RESTRICTED BANDS OF OPERATION	SECTION 15.205
PERIODIC OPERATION IN THE BAND 40.66 -40.70 MHz AND ABOVE 70 MHz.	SECTION 15.231

9. SYSTEM TEST CONFIGURATION

Use a block of foam and combined it with EUT wrapping rubber band around it. This way it can test X.Y, and Z axis. To activate continuous transmission, place a small plastic block between rubber band and EUT push button.

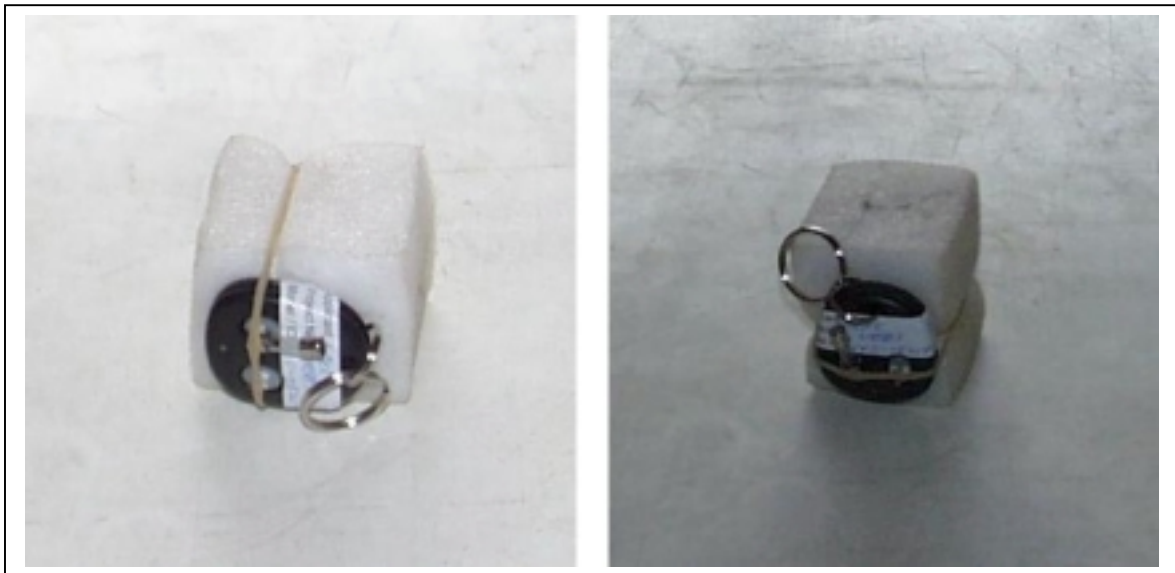

10. Test Procedure

Radiated Emissions, 15.231(4)(b)

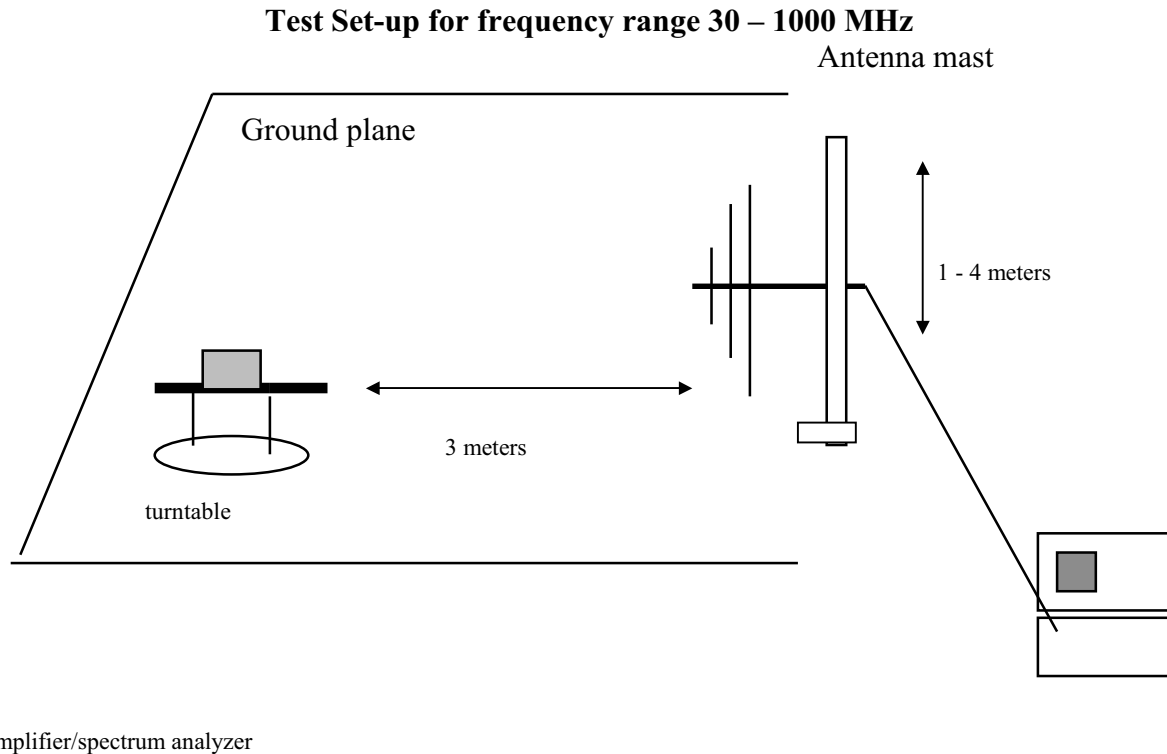


Fig. 1

1. The EUT was placed on a wooden table on the outdoor ground plane. The search antenna was placed 3-meters from the EUT.
2. The turntable was slowly rotated to locate the direction of maximum emission at each emission falling in the restricted bands of 15.205. The EUT was moved throughout the XY, XZ, and YZ planes to maximize emissions received by the search antenna.
3. Once maximum direction was determined, the search antenna was raised and lowered in both vertical and horizontal polarizations. The maximum readings so obtained are recorded in the data listed below.

Test set-up for measurements above 1GHz

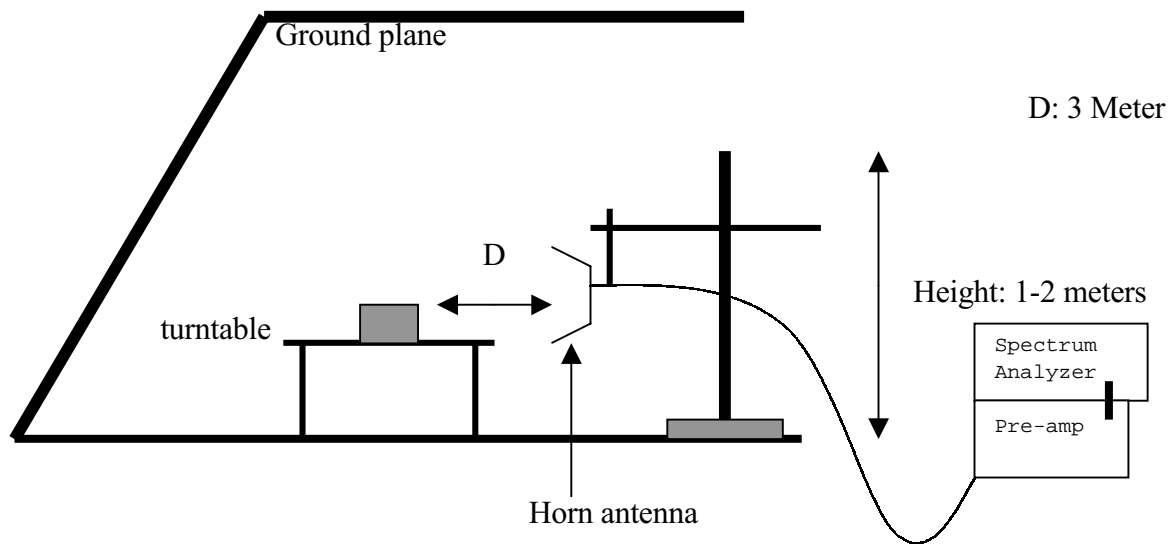


FIG. 2

1. The EUT was placed on a wooden table on the outdoor ground plane. The search antenna was placed 1-meters from the EUT. The EUT antenna was mounted vertically as per normal installation.
2. The turntable was slowly rotated to locate the direction of maximum emission at each emission falling in the restricted bands of 15.205. The EUT was moved throughout the XY, XZ, and YZ planes to maximize emissions received by the search antenna.
3. Once maximum direction was determined, the search antenna was raised and lowered in both vertical and horizontal polarizations. The maximum readings so obtained are recorded in the data listed below.

11. Equipment Modifications

To achieve compliance to FCC Section 15.231 technical limits, the following change(s) were made during compliance testing:

NONE

12. TEST RESULT

Powerline RFI Class B	Eut	Radiated Emission Limits	Eut
SECTION 15.207		SECTION 15.209	X
SECTION 15.205, 15.209, 15.221, 15.223, x 15.225 OR 15.227		SECTION 15.205	
BATTERY POWER	X	SECTION 15.231 (b)	X
		SECTION 15.231 (e)	

12.1 Maximum Modulation Percentage (M%)

CALCULATION:

Average Reading = Peak Reading (dBuV/m)+ 20log (Duty Cycle)

In order to determine possible Maximum Modulation percentage, alternations are made to the EUT. We measured:

WHERE

1 Period	= 71.25 mS
Long pulse	= 0.8625 mS
Short pulse	= 0.375 mS
No of Long pulse	= 14
No of Short pulse	= 11

$$\text{Duty Cycle} = (N1L1+N2L2+\dots+Nn-1Ln-1+NnLn)/100 \text{ or } T$$

$$\text{Duty Cycle} = ((14 \times 0.8625) + (11 \times 0.375)) / 71.25 = 0.2274 = 22.74\% \text{ or } -12.8642\text{dB}$$
12.2 The Emissions Bandwidth

The bandwidth of the emissions were investigated per 15.231(c)

Center Frequency	Measured	Limits
434 MHz	366.6 kHz < (refer to plot)	434MHzX0.25%=1085 kHz



FCC, VCCI, CISPR, CE, AUSTEL, NZ
UL, CSA, TUV, BSMI, DHHS, NVLAP

No. 199 Chung Sheng Road
Hsin Tien City, Taipei, Taiwan, R.O.C.
PHONE: 02-2217-0894 FAX: 02-2217-1254

Project #: 01E9813
Report #: 9813D1
Date & Time: 2001/09/14
Test Engr: VINCE CHIANG

Company: NUTEK CORPORATION
EUT Description: PRO-OE2C4S (Alarm TX / 434 MHz)
Test Configuration : EUT ONLY
Type of Test: FCC 15.231(b)
Mode of Operation: NORMAL MODE

D-Ste

E-Ste

$M\% = ((t1+t2+t3+...)/T) * 100\% = 22.74 \%$

$Av \text{ Reading} = Pk \text{ Reading} + 20 * \log(M\%)$
 $20 * \log(M\%) = -12.864$

	Freq. (MHz)	Pk Rdg (dBuV)	Av Rdg (dBuV)	AF (dB)	Closs (dB)	Pre-amp (dB)	Level (dBuV/m)	Limit FCC_B	Margin (dB)	Pol (H/V)	Az (Deg)	Height (Meter)
	Button #1:											
X	433.88	66.20	53.34	16.85	2.50	26.48	46.21	80.82	-34.62	3mV	0	1.00
	867.74	43.60	30.74	22.72	3.60	26.69	30.37	60.82	-30.45	3mV	0	1.70
Y	433.87	86.70	73.84	16.85	2.50	26.48	66.71	80.82	-14.11	3mV	180	1.20
	867.75	53.70	40.84	22.72	3.60	26.69	40.47	60.82	-20.35	3mV	180	2.00
Z	433.87	85.20	72.34	16.85	2.50	26.48	65.21	80.82	-15.61	3mV	90	1.10
	867.75	48.00	35.14	22.72	3.60	26.69	34.77	60.82	-26.05	3mV	90	1.70
	Button #2:											
X	433.88	82.70	69.84	16.85	2.50	26.48	62.71	80.82	-18.11	3mH	180	1.00
	867.75	46.20	33.34	22.72	3.60	26.69	32.97	60.82	-27.85	3mH	180	1.40
Y	433.88	79.80	66.94	16.85	2.50	26.48	59.81	80.82	-21.01	3mH	270	1.00
	867.77	42.60	29.74	22.72	3.60	26.69	29.37	60.82	-31.45	3mH	270	1.50
Z	433.87	84.10	71.24	16.85	2.50	26.48	64.11	80.82	-16.71	3mH	0	1.00
	867.75	48.50	35.64	22.72	3.60	26.69	35.27	60.82	-25.55	3mH	0	1.80
X	433.87	72.60	59.74	16.85	2.50	26.48	52.61	80.82	-28.21	3mV	90	1.00
	867.74	39.10	26.24	22.72	3.60	26.69	25.87	60.82	-34.95	3mV	90	1.80
Y	433.87	85.00	72.14	16.85	2.50	26.48	65.01	80.82	-15.81	3mV	180	1.00
	867.74	47.80	34.94	22.72	3.60	26.69	34.57	60.82	-26.25	3mV	180	1.60
Z	433.87	84.10	71.24	16.85	2.50	26.48	64.11	80.82	-16.71	3mV	270	1.00
	867.75	44.80	31.94	22.72	3.60	26.69	31.57	60.82	-29.25	3mV	270	1.60
X	433.86	81.70	68.84	16.85	2.50	26.48	61.71	80.82	-19.11	3mH	90	1.10
	867.75	44.70	31.84	22.72	3.60	26.69	31.47	60.82	-29.35	3mH	90	1.30
Y	433.86	77.80	64.94	16.85	2.50	26.48	57.81	80.82	-23.01	3mH	180	1.10
	867.74	41.80	28.94	22.72	3.60	26.69	28.57	60.82	-32.25	3mH	180	1.40
Z	433.86	81.70	68.84	16.85	2.50	26.48	61.71	80.82	-19.11	3mH	0	1.00
	867.72	42.90	30.04	22.72	3.60	26.69	29.67	60.82	-31.15	3mH	0	1.50
	Total data #: 24											

COMPLIANCE

Certification Services

FCC, VCCI, CISPR, CE, AUSTEL, NZ
UL, CSA, TUV, BSMI, DHHS, NVLAP

No. 199 Chung Sheng Road
Hsin Tien City, Taipei, Taiwan, R.O.C.
PHONE: 02-2217-0894 FAX: 02-2217-1254

Project #: 01E9813
Report #: 9813D2
Date & Time: 2001/09/20
Test Engr: Vince Chiang

Company: NUTEK CORPORATION
EUT Description: PRO-OE2C4S (Alarm Tx / 434MHz)
Test Configuration : EUT ONLY
Type of Test: FCC 15.231(b)/FCC 15.209
Mode of Operation: NORMAL MODE

D-Site

E-Site

6 W oist

Descendin

Freq. (MHz)	Pk Rdg (dBuV)	Av Rdg (dBuV)	AF (dB)	Closs (dB)	Pre-amp (dB)	Level (dBuV/m)	Limit FCC_B	Margin (dB)	Pol (H/V)	Az (Deg)	Height (Meter)	Mark (P/Q/A)
1303	47.48	34.62	24.9	2.8	38.00	24.34	54.0	-29.66	1mV	180	1.0	A
1733	47.44	34.58	26.3	3.3	37.95	26.24	60.8	-34.58	1mV	90	1.2	A
1303	47.48	34.62	24.9	2.8	38.00	24.34	54.0	-29.66	1mH	180	1.0	A
1733	46.64	33.78	26.3	3.3	37.95	25.44	60.8	-35.38	1mH	90	1.2	A

* No other emission were found within 20dB under the limits upto 4.5 GHz.

Total data #:4
V.2d

P(Peak): RBW=VBW=1MHz
A(Average): Pk Reading - 12.864 dB

20:54:18 SEP 13, 2001

MKR Δ 71.250002 msec
.00 dB

REF 87.0 dB μ V ATTEN 10 dB

PEAK

LOG

10


dB/

CENTER
433.863 MHz

SA SB

WC FS

CORR

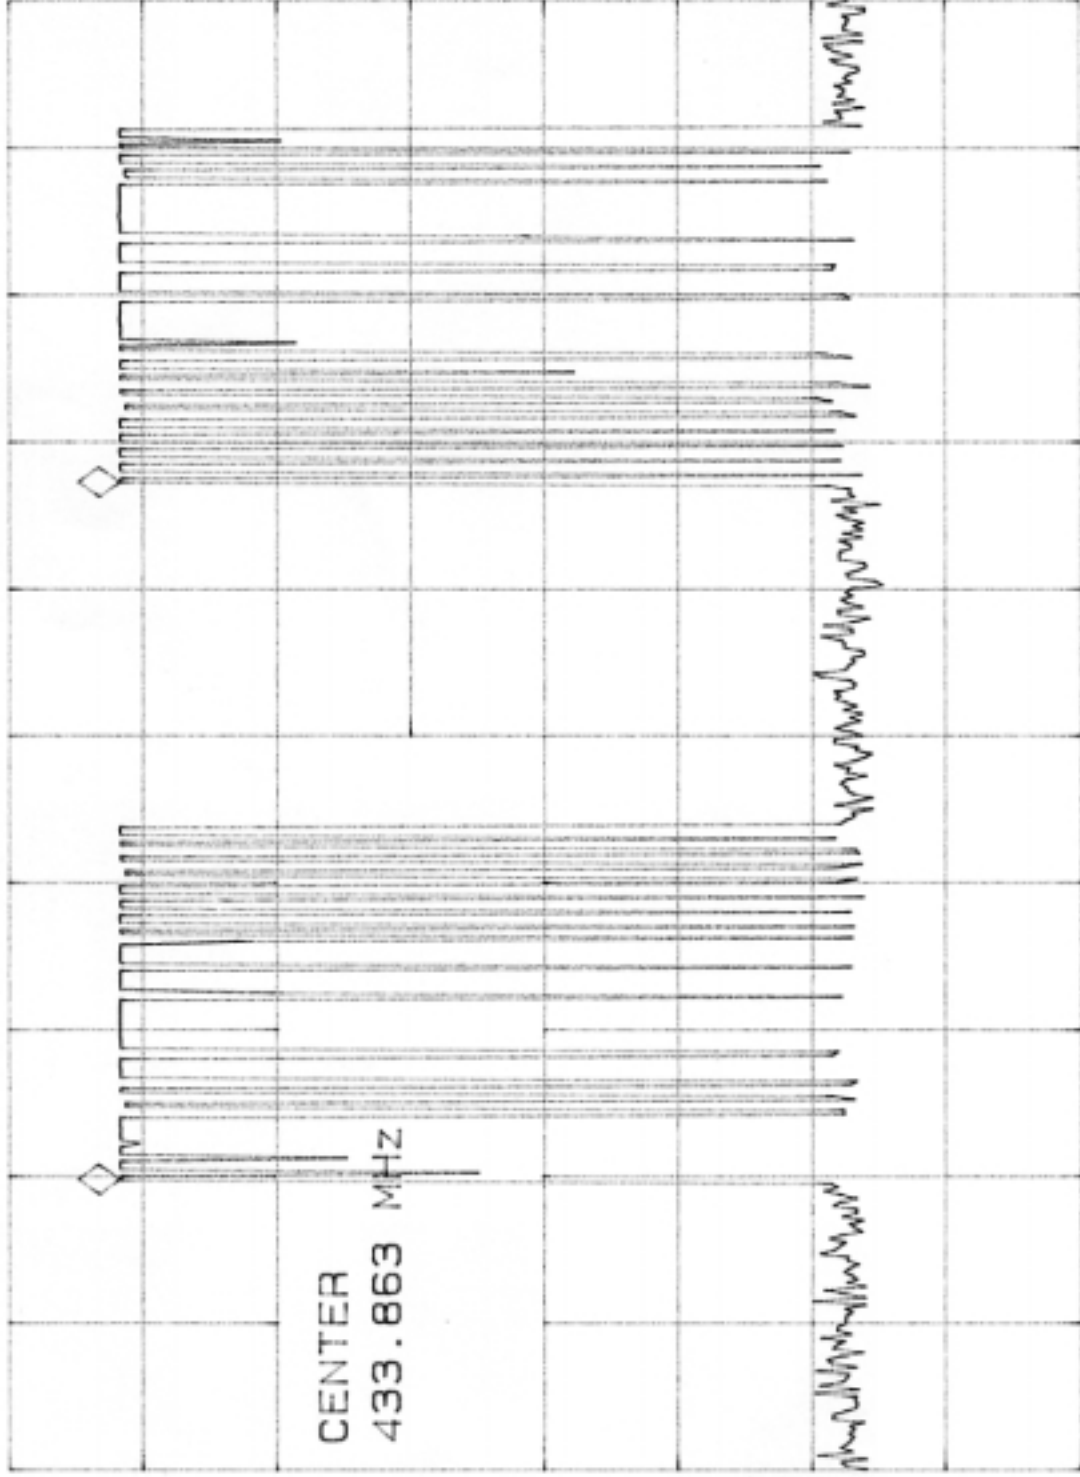

CENTER 433.863 MHz

#RES BW 120 KHZ

SPAN 0 HZ

VBW 300 KHZ

#SWP 150 msec

22:16:47 SEP 13, 2001
70


MKR 44.374999 msec
22.27 dB μ V

REF 87.0 dB μ V ATTEN 10 dB

PEAK
LOG
10
dB/

CENTER
433.869 MHZ

SA SB
VC FC
CORR

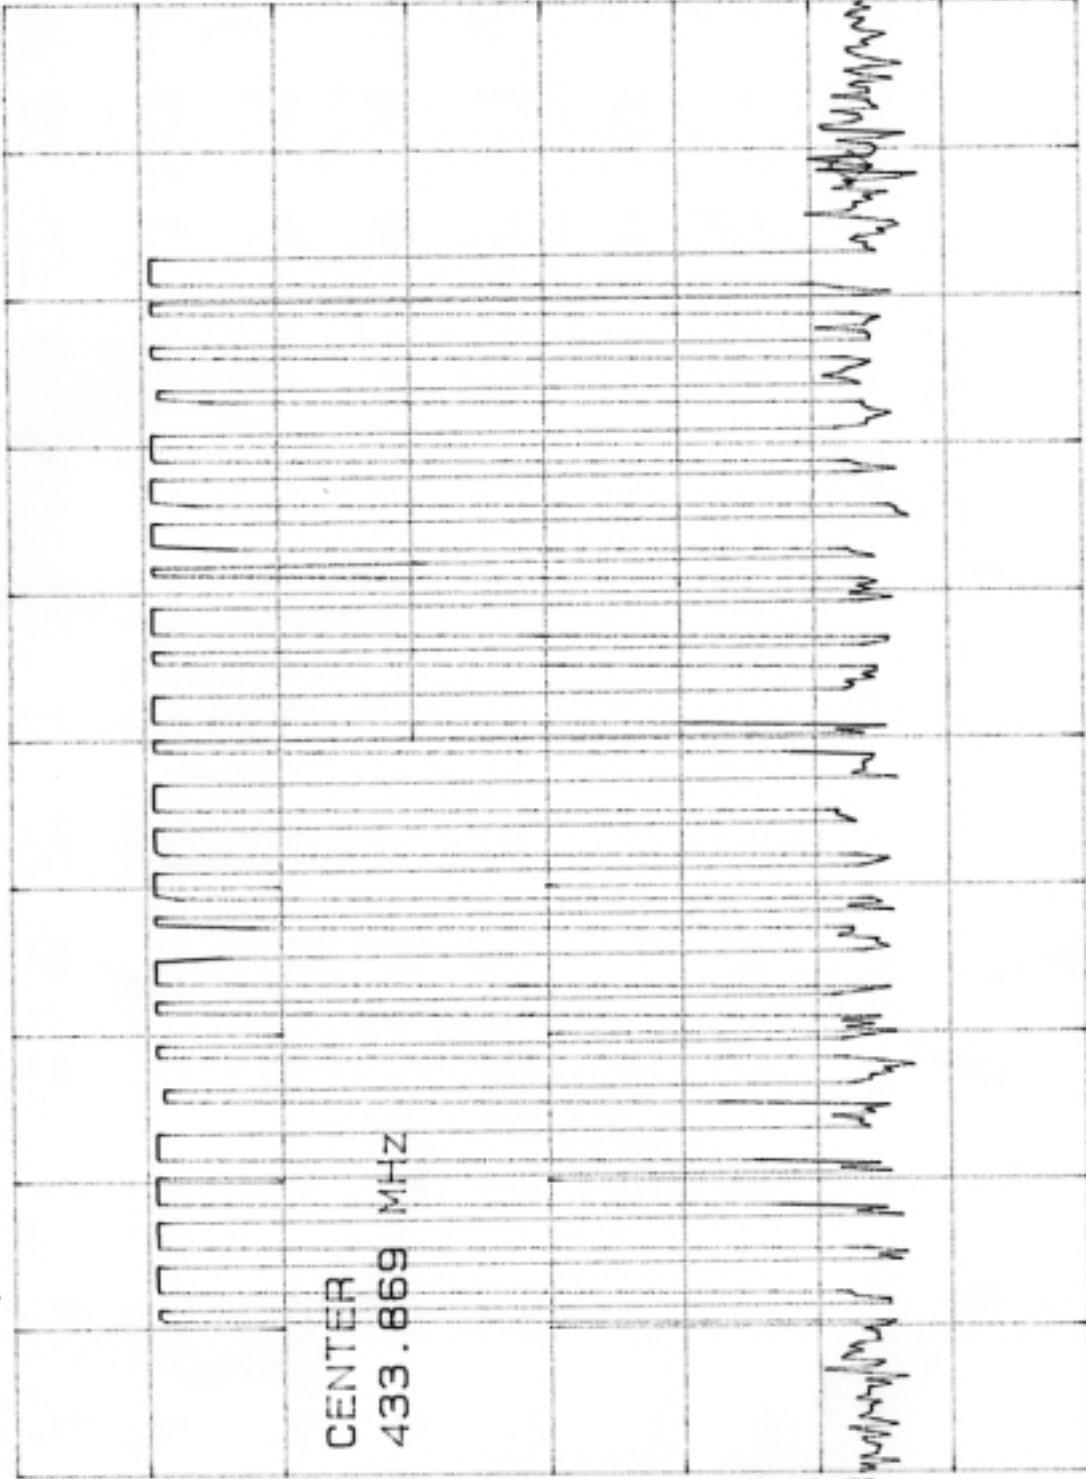

CENTER 433.869 MHZ
#RES BW 120 KHZ

VBW 300 KHZ


SPAN 0 HZ
#SWP 50 msec

22: 10: 27 SEP 13, 2001
70

MKR Δ 862.500 μ sec
-- .05 dB

REF 87.0 dB μ W ATTEN 10 dB

PEAK
LOG
10
dB/

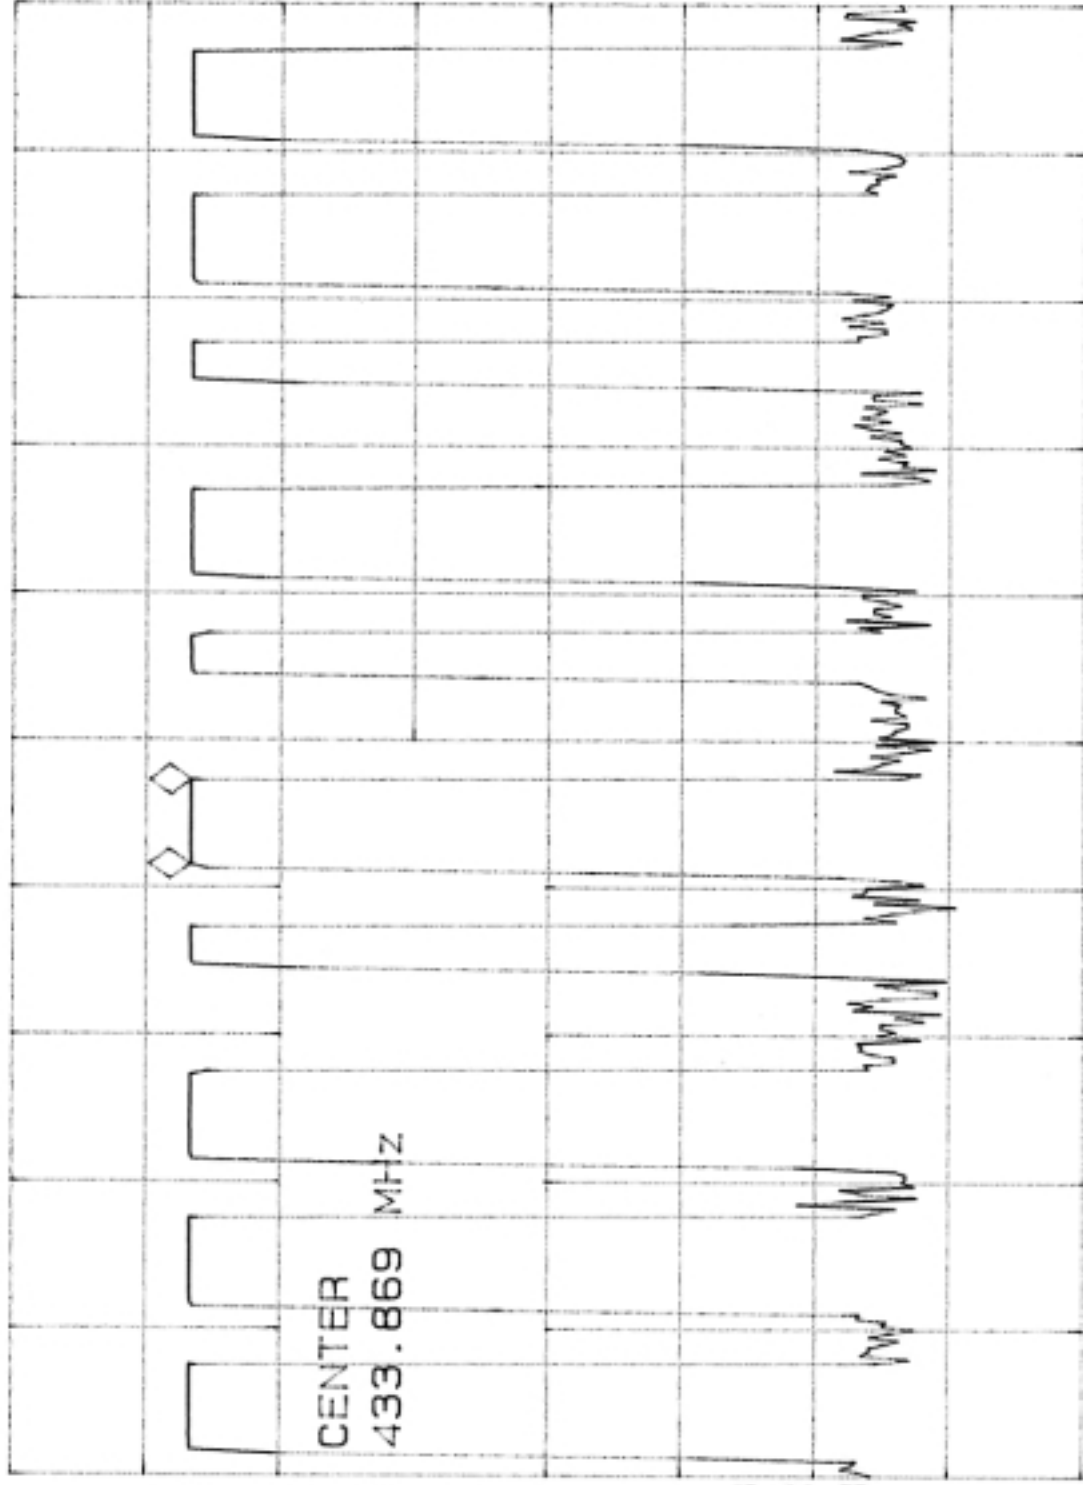

CENTER
433.869 MHz

SA SB
VC FC
CORR

CENTER 433.869 MHz SPAN 0 Hz
#RES BW 120 KHZ #SWP 15 msec
VBW 300 KHZ

21:08:32 SEP 13, 2001


MKR Δ 375.000 μ sec

REF 87.0 dB μ V ATTEN 10 dB

-.03 dB

PEAK
LOG
10
dB/

CENTER
433.869 MHz

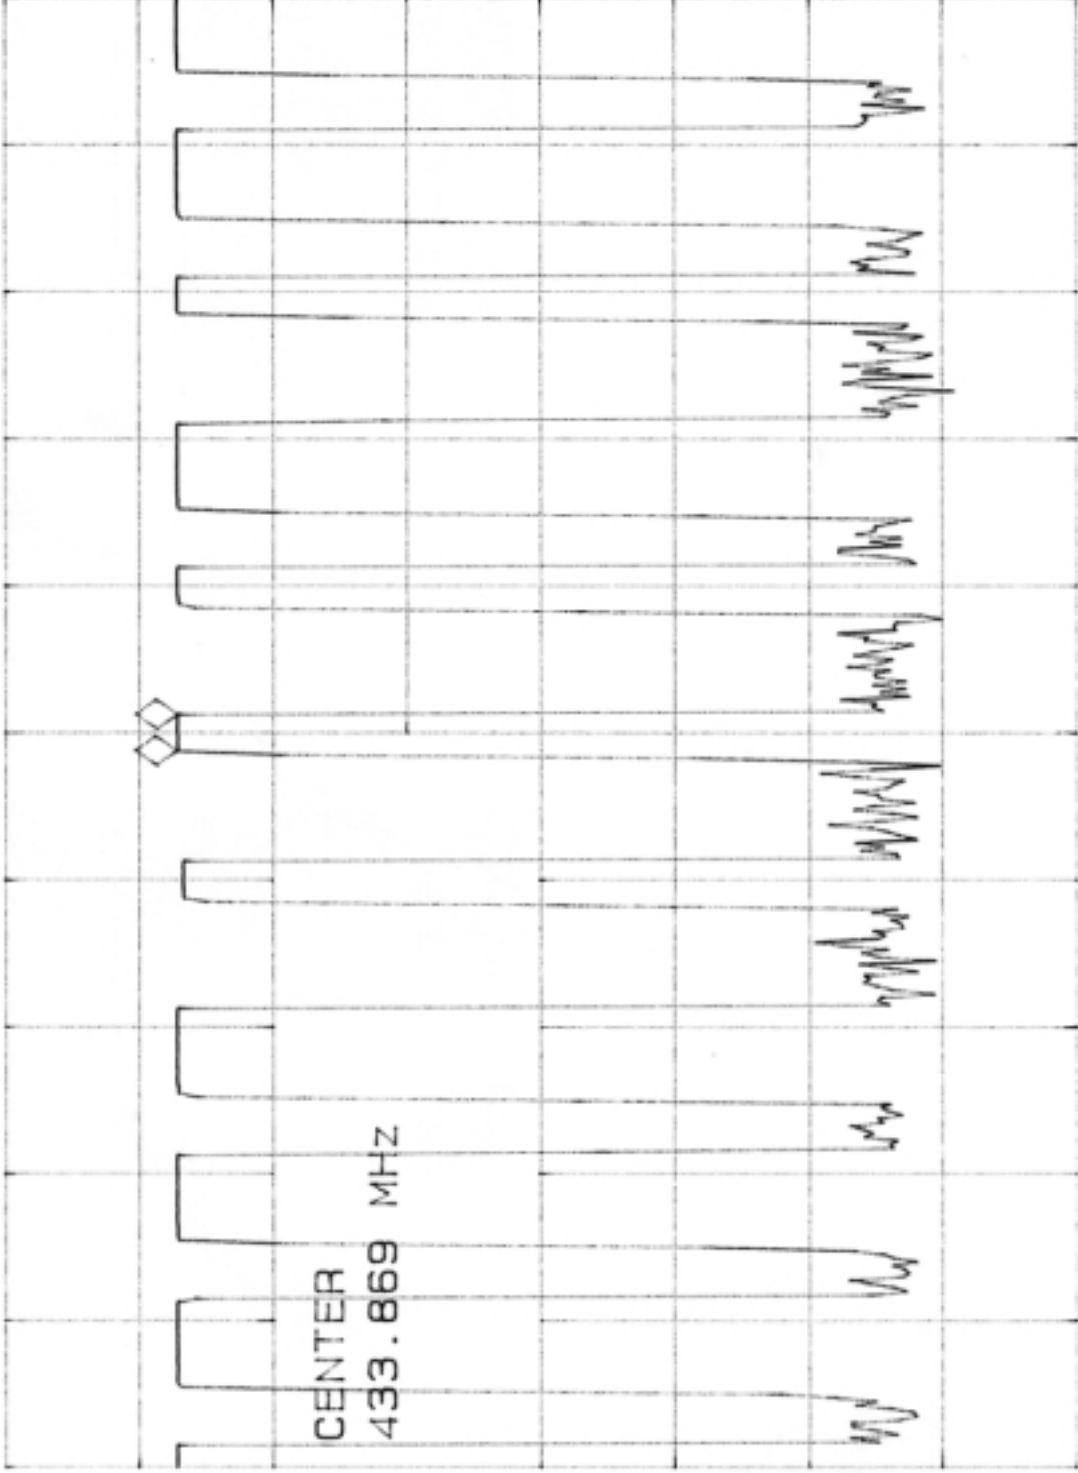

SA SB
WC FS
CORR

CENTER 433.869 MHz
#RES BW 120 KHZ

SPAN 0 HZ
#SWP 15 msec
VBW 300 KHZ



Date 14.Sep.'01 Time 23:19:29


Ref.Lvl Delta

80.00 dBuV

-0.17 dB

366.6 kHz

Res.Bw 120 kHz [imp]
TG.Lvl Off
CF.Stp 200.000 kHz
Vid.Bw 300 kHz
RF.Att 10 dB
Unit [dBuV]

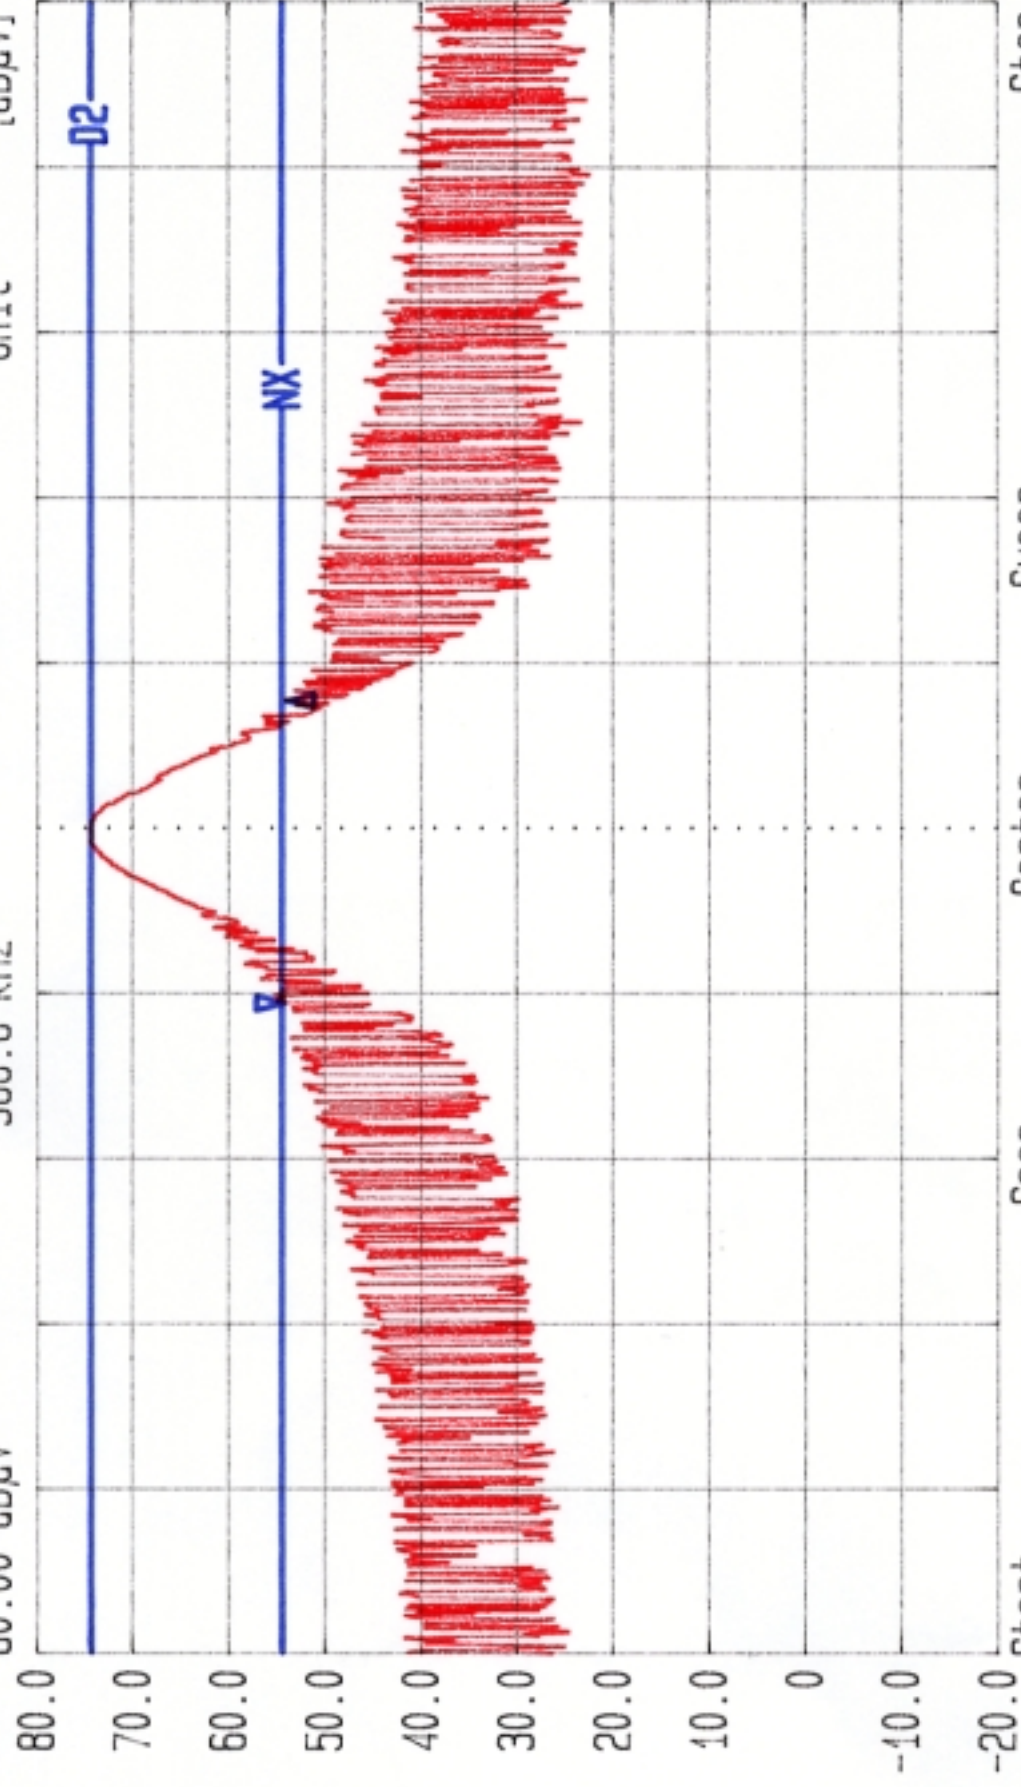

Start 432.848888 MHz
Span 2 MHz
Center 433.848888 MHz
Sweep 20 ms
Stop 434.848888 MHz

N dB down Level 20.0 dB
DELTA MARK 366.6 KHz