

# CFR 47 FCC Part 15.231

## Industry Canada RSS-210

### TEST REPORT

Product : Transmitter

Trade Name : N/A

Model Number : CATX433

FCC ID : ELVATPA

IC ID : 3671B-CATX4330

Prepared for

#### **Nutek Corporation**

NO.167, Lane 235, Bauchiau Rd., Xindian District,  
New Taipei City 23145, Taiwan

Prepared by

#### **Interocean EMC Technology Corp.**

No. 5-2, Lin 1, Tin-Fu, Lin-Kou Dist., New Taipei City,  
Taiwan 244, R.O.C.  
TEL.: +886 2 2600 6861  
FAX.: +886 2 2600 6859

#### **Remark:**

The test report consists of **31** pages in total. It shall not be reproduced except in full, without the written approval of IETC. This document may be altered or revised by IETC only, and shall be noted in the revision section of the document.  
The test result in the report is only subjected to the test sample.

# Statement of Compliance

**Applicant:** Nutek Corporation  
**Manufacturer:** Nutek Corporation  
**Product:** Transmitter  
**Model No.:** CATX433  
**Tested Power Supply:** DC 12 V  
**Date of Final Test:** Jun. 08, 2015  
**Revision of Report:** Rev. 02


**Configuration of Measurements and Standards Used :**

FCC Rules and Regulations Part 15 Subpart C  
Industry Canada RSS-Gen Issue 4 Nov. 2014  
Industry Canada RSS-210 Issue 8 Dec. 2010

1. The result of the testing report relate only to the item tested.
2. The testing report shall not be reproduced expect in full, without the written approval of IETC.

Report Issued: 2015/06/11

Project Engineer:   
Elli Chang

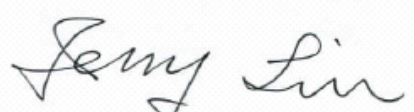Approved:   
Jerry Liu

## Table of Contents

<b>1</b>	<b>Summary of Measurement</b>	<b>4</b>
<b>2</b>	<b>General Information</b>	<b>5</b>
2.1	Description of Equipment Under Test	5
2.2	Details of Tested Peripheral Equipment	6
2.3	Test Facility	7
<b>3</b>	<b>Test Specifications</b>	<b>8</b>
3.1	Test Standard	8
3.2	Operation Mode	8
3.3	Test Step of EUT	8
3.4	Test Equipment	9
<b>4</b>	<b>Radiated Emission Test</b>	<b>10</b>
4.1	Limits	10
4.2	Calculation of Average Factor	11
4.3	Configuration of Measurement	17
4.4	Test Procedure	17
4.5	Test Result	17
<b>5</b>	<b>Emission Bandwidth</b>	<b>21</b>
5.1	Limits	21
5.2	Test Result	21
<b>6</b>	<b>99 % Occupied Bandwidth</b>	<b>23</b>
6.1	Limits	23
6.2	Test Result	23
<b>7</b>	<b>Photographs of Test</b>	<b>25</b>
7.1	Radiated Emission Measurement	25
<b>8</b>	<b>Photographs of EUT</b>	<b>27</b>

## 1 Summary of Measurement

Report Clause	Test Parameter	Reference Document		Results
4	Timing Requirement	§FCC15.231(a)	RSS-210 A1.1.1	Pass
4	Radiated Emission	§FCC15.231(b), 15.209	RSS-210 A1.1.2	Pass
5	Emission Bandwidth	§FCC15.231(c)		Pass
6	99 % Occupied Bandwidth		RSS-210 A1.1.3	Pass

## 2 General Information

### 2.1 Description of Equipment Under Test

<b>Product</b>	: Transmitter
<b>Model Number</b>	: CATX433
<b>Product SW Version</b>	: V1.0
<b>Product HW Version</b>	: V1.0
<b>Radio SW Version</b>	: V1.0
<b>Radio HW Version</b>	: V1.0
<b>Test SW Version</b>	: EMI 2000 Series Ver 1.047
<b>RF Power Setting in Test SW</b>	: Hardware setting in test, Software does not require
<b>Applicant</b>	: <b>Nutek Corporation</b> NO.167, Lane 235, Bauchiau Rd., Xindian District, New Taipei City 23145, Taiwan
<b>Manufacturer</b>	: <b>Nutek Corporation</b> NO.167, Lane 235, Bauchiau Rd., Xindian District, New Taipei City 23145, Taiwan
<b>Power Supply</b>	: DC 12 V
<b>Operating Frequency</b>	: 433.92MHz
<b>Type of Modulation</b>	: ASK
<b>Antenna Description</b>	: This device uses PCB antenna.  The antenna is integral to the device, thereby meeting the requirement of FCC 15.203.
<b>Date of Test</b>	: Jun. 05 ~ 08, 2015
<b>Additional Description</b>	: 1) The Model Number " <b>CATX433</b> " is representative selected in the test and included in this report. 2) For more detail specification about EUT, please refer to the user's manual.

## **2.2 Details of Tested Peripheral Equipment**

N/A

## 2.3 Test Facility

- Site Description** : ☒ OATS 1
- Name of Firm** : Interocean EMC Technology Corp.
- Company web** : <http://www.ietc.com.tw>
- Location** : No. 5-2, Lin 1, Tin-Fu, Lin-Kou Dist., New Taipei City, Taiwan 244, R.O.C.
- Site Filing** :
- Federal Communication Commissions – USA  
Registration No.: 96399 (OATS 1, 2, 3 & Chamber 3)  
Designation No.: TW1020
  - Industry Canada (IC)  
OUR FILE: 46405-4437  
Registration No. (OATS 1): Site# 4437A-1  
Registration No. (OATS 3): Site# 4437A-3  
Registration No. (Chamber 3): Site# 4437A-5  
Registration No. (OATS 5): Site# 4437A-6
  - Voluntary Control Council for Interference by Information Technology Equipment (VCCI) – Japan  
Member No.: 1349  
Registration No. (Conducted Room): C-1094  
Registration No. (Conducted Room): T-1562  
Registration No. (OATS 1): R-1040; G-274
- Site Accreditation** :
- Bureau of Standards and Metrology and Inspection (BSMI) – Taiwan, R.O.C.  
Accreditation No.:  
SL2-IN-E-0026 for CNS13438 / CISPR 22  
SL2-IN-E-0026 for CNS14757-2 / IEC 62040-2  
SL2-R1-E-0026 for CNS13439 / CISPR 13  
SL2-R2-E-0026 for CNS13439 / CISPR 13  
SL2-A1-E-0026 for CNS13783-1 / CISPR 14-1  
SL2-L1-E-0026 for CNS 14115 / CISPR 15
  - Taiwan Accreditation Foundation (TAF)  
Accreditation No.: 1113
  - Vehicle Safety Certification Center (VSCC)  
Approval No.: TW16-11-0
  - TÜV NORD  
Certificate No: TNTW0801R-04
  - Nemko  
Authorisation No: ELA 181

### 3 Test Specifications

#### 3.1 Test Standard

The EUT was performed according to FCC Part 15 Subpart C Section 15.231 and Industry Canada RSS-210 procedure and setup followed by ANSI C63.10, 2013 requirements.

#### 3.2 Operation Mode

By preliminary testing and verifying three axis (X, Y and Z) position of EUT transmitted status, it was found that "X axis" position was the worst, then the final test was executed the worst condition and test data were recorded in this report.

The EUT was operated in continuous transmission mode during all of the tests.



**X axis mode**



**Y axis mode**



**Z axis mode**

#### 3.3 Test Step of EUT

- 3.3.1 Setup the fixture to EUT for power supplying.
- 3.3.2 Turn on the power of all equipment.
- 3.3.3 Let the EUT continuous transmission. Executed the test.



### 3.4 Test Equipment

Instrument	Manufacturer	Model	Serial No.	Next Cal. Date
Spectrum Analyzer	R&S	FSP40	100478	2016/06/03
Preamplifier	Agilent	8449B	3008A01434	2015/09/24
Preamplifier	Agilent	83050A	3950A00225	2015/09/08
Horn Antenna	Schwarzbeck	BBHA 9120	9120D-583	2015/09/29
Horn Antenna	Schwarzbeck	BBHA 9170	213	2015/08/05
Cable	HARBOUR	27478LL142	CBL22	2016/03/23
EMI Test Receiver	Rohde & Schwarz	ESVS10	826148/011	2015/10/29
Biconical Antenna	Schwarzbeck	BBA 9106	VHA 9103-2418	2016/01/17
Log Antenna	Schwarzbeck	UHALP 9108 A	0738	2016/01/17
Pre-Amplifier	Agilent	8447D	2944A09703	2016/04/28
RF Cable	EMCI	EMC8D-NM-NM-25000	140105	2016/02/15
RF Cable	Mini-Circuits	CBL-3FL-NMNM	CBL56	2015/08/29
RF Cable	Insulated Wire	CBL59	CBL59	2016/01/21

Note: The above equipments are within the valid calibration period.

## 4 Radiated Emission Test

### 4.1 Limits

According to FCC 15.231(b) and RSS-210 Annex 1 requirement:

In addition to the provisions of §15.205, the field strength of emissions from intentional radiator operated under this section shall not exceed the following:

#### Fundamental and harmonics emission limits

Frequency (MHz)	Field Strength of Fundamental		Field Strength of Harmonics	
	( $\mu$ V/m@3 m)	(dB $\mu$ V/m@3 m)	( $\mu$ V/m@3 m)	(dB $\mu$ V/m@3 m)
433.92	10996	80.8	1099.6	60.8

#### General Radiated Emission Limit

Spurious Emission tested through until 10<sup>th</sup> harmonic. Radiated emissions, which fall in the restricted bands, as defined in §15.205 (a), comply with the radiated emission limits specified in §15.209 (a) and defined in RSS-Gen Table 3, comply with the radiated emission limits specified in RSS-Gen 7.2.5.

Frequency (MHz)	15.209 Limits	
	( $\mu$ V/m@3 m)	(dB $\mu$ V/m@3 m)
30-88	100	40
88-216	150	43.5
216-960	200	46
Above 960	500	54

Remark :

1. The table above tighter limit applies at the band edges.
2. The measurement distance in meters, which that between form closest point of EUT to instrument antenna.

## 4.2 Calculation of Average Factor

The output field strengths of specification in accordance with the rules specify measurements with an average detector. During the test, a spectrum analyzer incorporating a peak detector was used. Therefore, a reduction factor can be applied to the resultant peak signal level and compared to the limit for measurement instrumentation incorporating an average detector. The duty cycle is measured in 100 ms or the repetition cycle period, whichever is a shorter time frame. The duty cycle is measured by placing the spectrum analyzer to set zero span at 100 kHz resolution bandwidth.

Averaging factor in dB =  $20 \log (\text{duty cycle})$

The duration of one cycle = 100.1 ms


The duty cycle is simply the on-time divided by 100 ms

Duty Cycle =  $(1.16 \text{ ms} * 13 + 0.56 \text{ ms} * 34) / 100 \text{ ms}$


Therefore, the averaging factor is found by  $20 \log 0.3412 = -9.34 \text{ dB}$

Please see the diagrams below.


# Duty Cycle

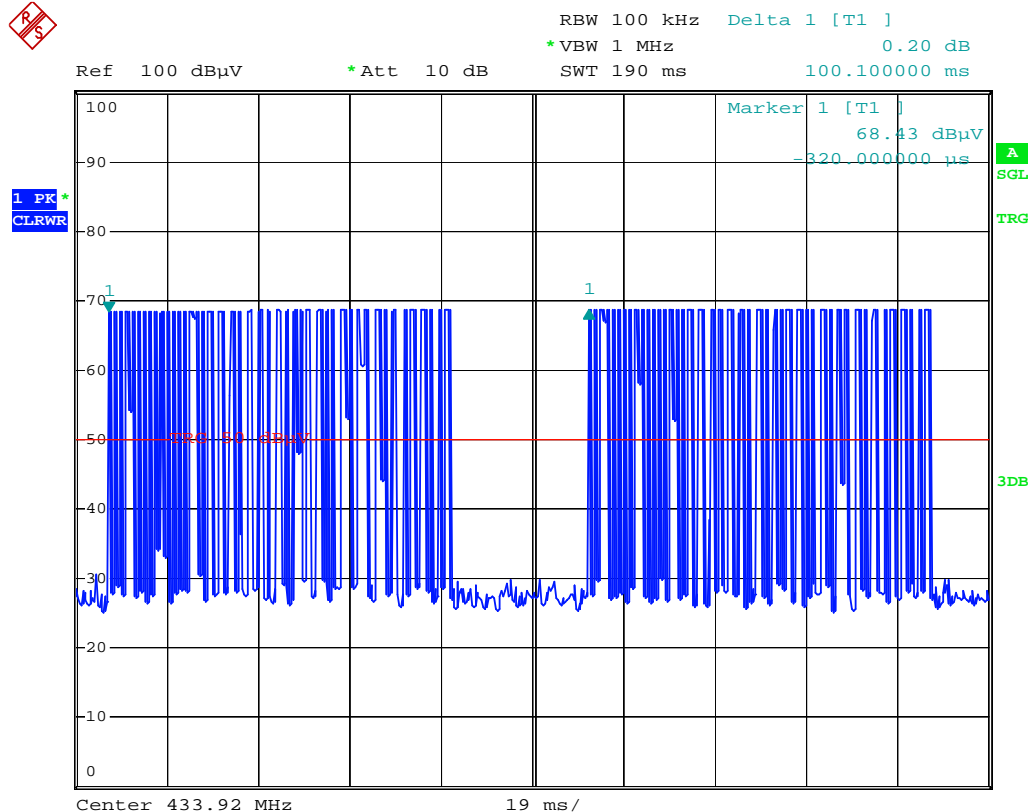


## Time Slot

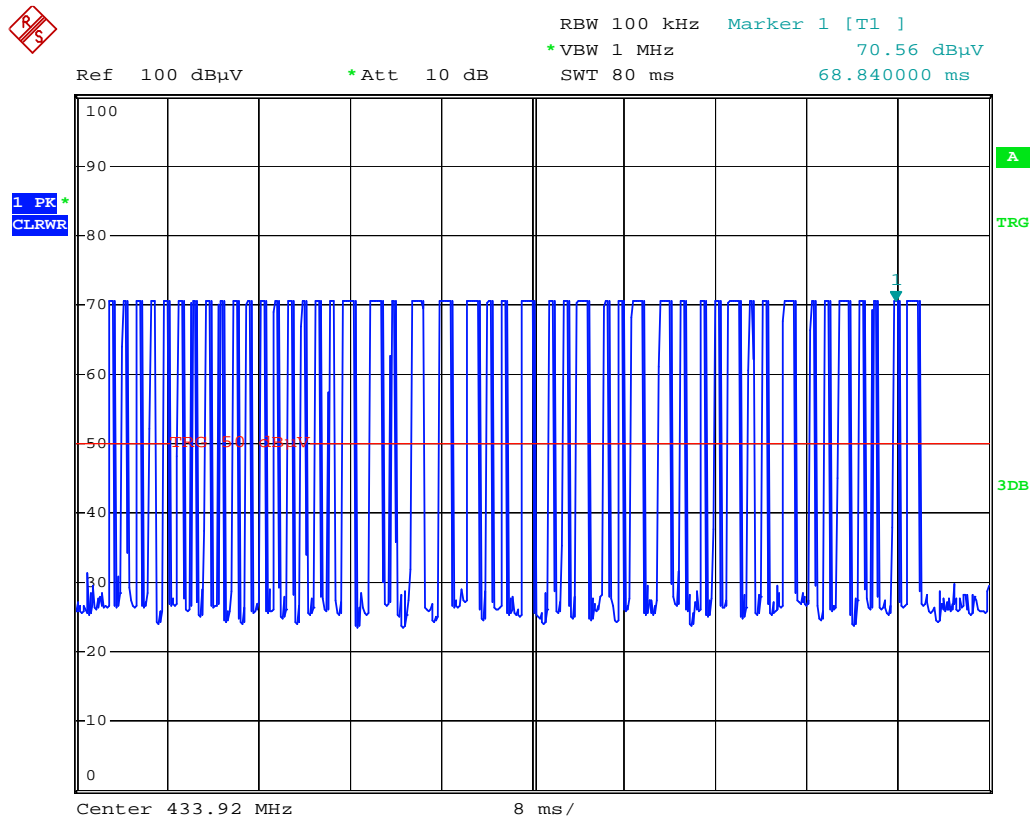

## Time Slot 1

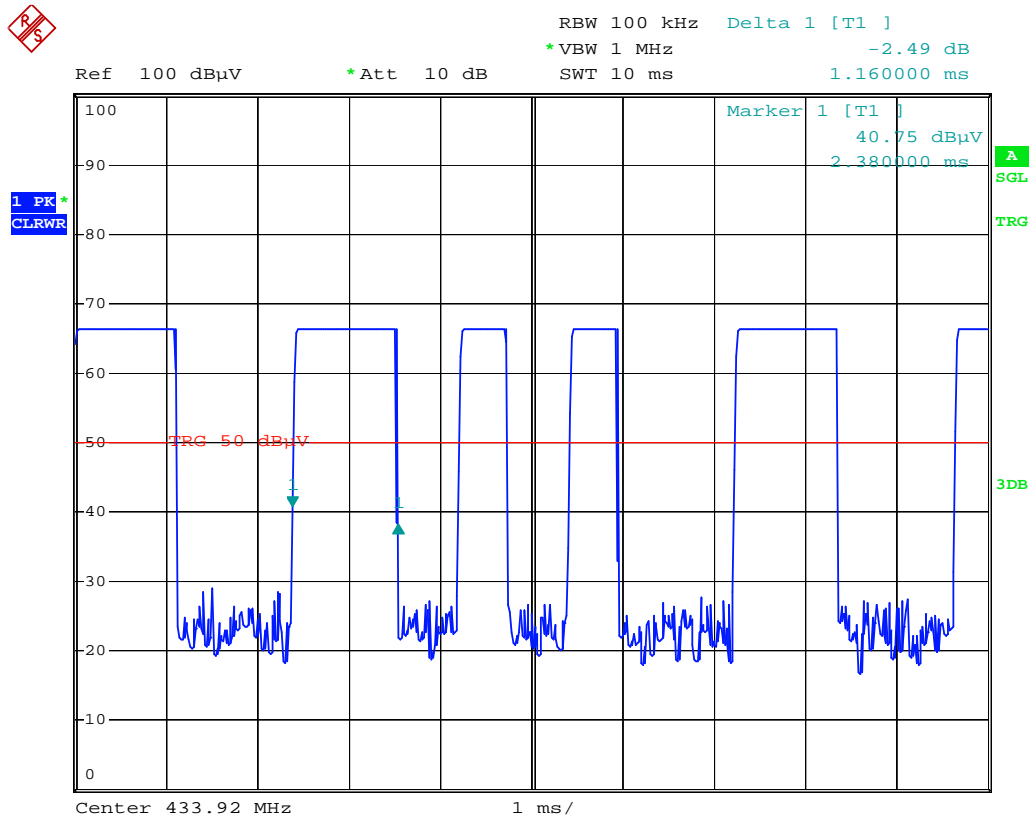


Time Slot 2

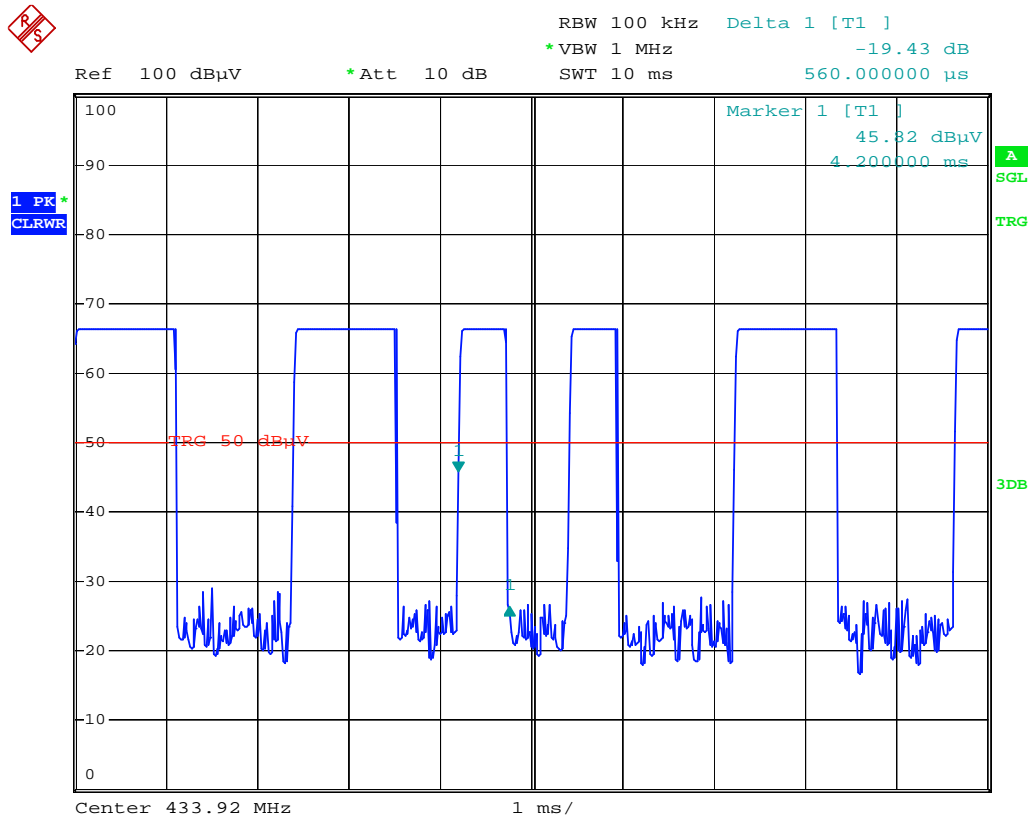

Time Slot 3


The EUT was complied with the requirement of FCC 15.231 (a)(1) and RSS-210 Annex 1, which employed a switch that will automatically deactivate the transmitter within less than 5 seconds of being released.

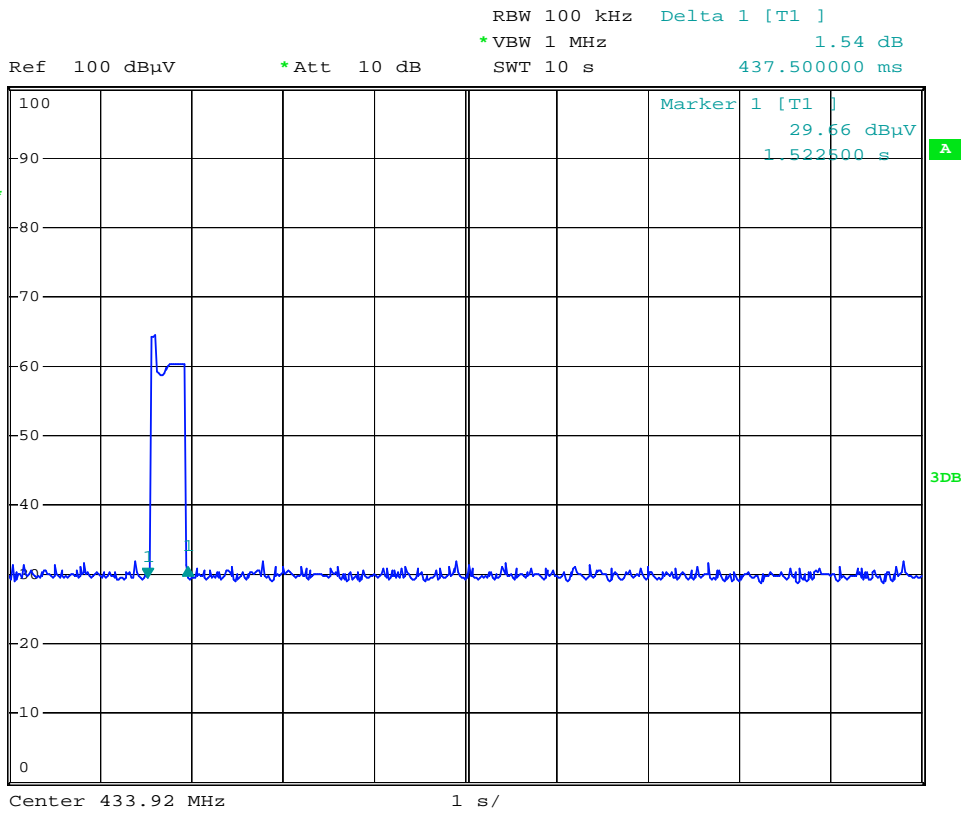




### 4.3 Configuration of Measurement

#### Measurement Frequency under 1GHz

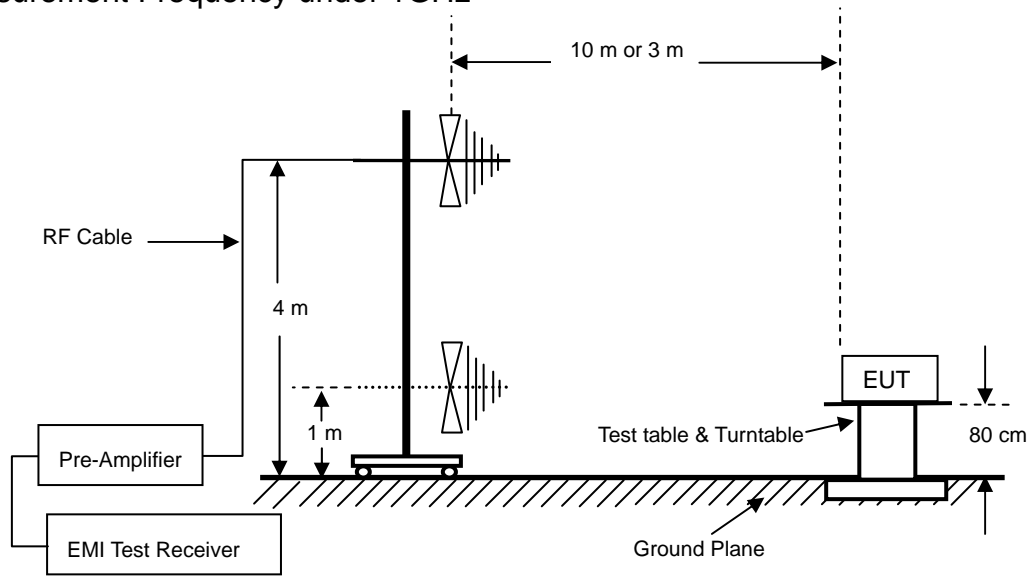

#### Measurement Frequency above 1GHz

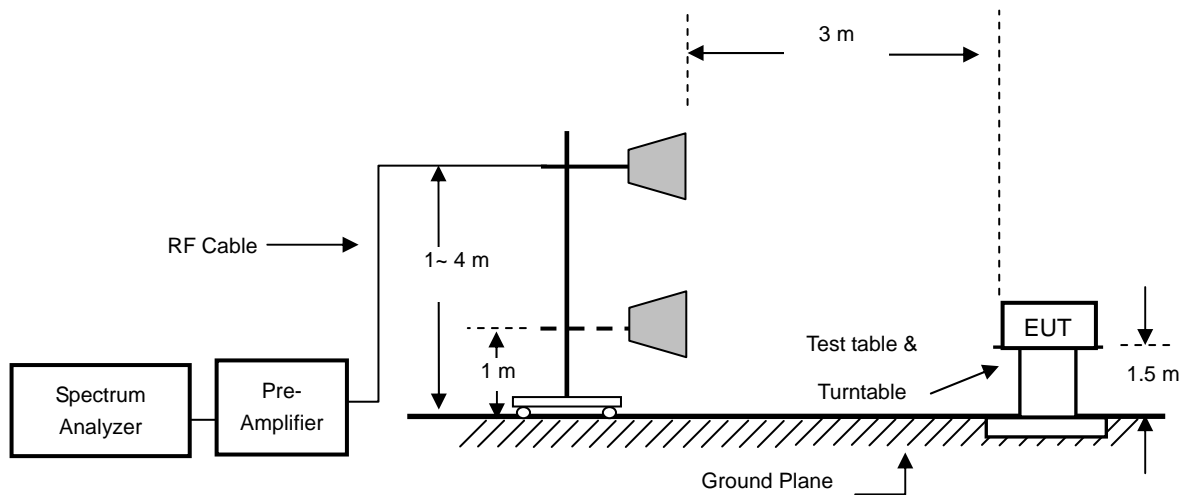

### 4.4 Test Procedure

Radiated emission measurements frequency range were performed from 30 MHz to 5 GHz. Spectrum Analyzer Resolution Bandwidth set to 100 kHz or greater for frequencies from 30 MHz to 1 GHz, and set 1MHz Resolution Bandwidth for frequencies above 1 GHz. The EUT is place on non-conductive turntable for the test. If peripheral devices apply to the EUT, the peripheral devices will be connected to EUT and whole system. During the emission test, the signal is maximized through rotation and all cables were present worst-case emissions. The height of antenna and polarization is constantly changed for exploring maximum signal reading. The height of antenna can be up form reference ground to 4 meter and down to 1 meter.

### 4.5 Test Result

**PASS.**

The final test emission data is shown as following tables.

### Radiated Emission Below 1 GHz

Frequency (MHz)	Antenna Polarization	Reading (dBUV)	Preamplifier (dB)	Correction Factor (dB/m)	Corrected Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Det Mode
82.360	H	43.26	29.96	8.55	21.85	40.00	-18.15	PK
165.430	H	39.55	29.77	17.67	27.45	43.52	-16.07	PK
225.600	H	39.72	29.48	20.22	30.46	46.02	-15.56	PK
289.700	H	35.20	29.46	23.46	29.20	46.02	-16.82	PK
368.090	H	38.10	29.50	19.72	28.32	46.02	-17.70	PK
83.120	H	37.28	30.04	22.45	29.69	46.02	-16.33	PK
112.530	V	41.95	29.85	14.40	26.50	43.52	-17.02	PK
186.300	V	39.05	29.85	19.56	28.76	43.52	-14.76	PK
240.000	V	37.80	29.60	21.46	29.66	46.02	-16.36	PK
314.200	V	39.37	29.38	17.81	27.80	46.02	-18.22	PK
403.790	V	38.00	30.00	20.76	28.76	46.02	-17.26	PK
457.100	V	38.60	30.53	21.71	29.78	46.02	-16.24	PK

Remark : Corrected Level = Reading + Correction Factor – Preamp  
 Correction Factor = Antenna Factor + Cable Loss

**Fundamental and Harmonics Emissions**

Freq.	Antenna	Reading	Preamplifier	Correction Factor	Average Factor	Corrected Level	Limits	Margin	Det
(MHz)	Polarization	(dBuV)	(dB)	(dB/m)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	Mode
433.92	H	46.67	0.00	21.32	--	67.99	100.8	-32.81	PK
433.92	H	46.67	0.00	21.32	-9.34	58.65	80.8	-22.15	AV
867.84	H	52.00	30.10	29.42	--	51.32	80.8	-29.48	PK
867.84	H	52.00	30.10	29.42	-9.34	41.98	60.8	-18.82	AV
1301.76	H	46.16	27.36	28.35	--	47.15	74.0	-26.85	PK
1301.76	H	46.16	27.36	28.35	-9.34	37.81	54.0	-16.19	AV
1735.68	H	41.80	27.67	29.52	--	43.65	80.8	-37.15	PK
1735.68	H	41.80	27.67	29.52	-9.34	34.31	60.8	-26.49	AV
2169.60	H	41.79	27.80	31.07	--	45.06	80.8	-35.74	PK
2169.60	H	41.79	27.80	31.07	-9.34	35.72	60.8	-25.08	AV
2603.52	H	43.64	27.83	32.55	--	48.36	80.8	-32.44	PK
2603.52	H	43.64	27.83	32.55	-9.34	39.02	60.8	-21.78	AV
3037.44	H	46.29	27.97	33.72	--	52.04	80.8	-28.76	PK
3037.44	H	46.29	27.97	33.72	-9.34	42.70	60.8	-18.10	AV
3471.36	H	49.75	27.79	34.68	--	56.64	80.8	-24.16	PK
3471.36	H	49.75	27.79	34.68	-9.34	47.30	60.8	-13.50	AV
3905.28	H	37.88	27.86	36.26	--	46.28	74.0	-27.72	PK
3905.28	H	37.88	27.86	36.26	-9.34	36.94	54.0	-17.06	AV
4339.20	H	37.15	27.61	37.32	--	46.86	74.0	-27.14	PK
4339.20	H	37.15	27.61	37.32	-9.34	37.52	54.0	-16.48	AV
433.92	V	59.98	0.00	21.08	--	81.06	100.8	-19.74	PK
433.92	V	59.98	0.00	21.08	-9.34	71.72	80.8	-9.08	AV
867.84	V	59.89	30.10	29.00	--	58.79	80.8	-22.01	PK
867.84	V	59.89	30.10	29.00	-9.34	49.45	60.8	-11.35	AV
1301.76	V	48.26	27.36	28.35	--	49.25	74.0	-24.75	PK
1301.76	V	48.26	27.36	28.35	-9.34	39.91	54.0	-14.09	AV
1735.68	V	49.43	27.67	29.52	--	51.28	80.8	-29.52	PK
1735.68	V	49.43	27.67	29.52	-9.34	41.94	60.8	-18.86	AV
2169.60	V	40.20	27.80	31.07	--	43.47	80.8	-37.33	PK
2169.60	V	40.20	27.80	31.07	-9.34	34.13	60.8	-26.67	AV
2603.52	V	46.92	27.83	32.55	--	51.64	80.8	-29.16	PK
2603.52	V	46.92	27.83	32.55	-9.34	42.30	60.8	-18.50	AV

3037.44	V	50.38	27.97	33.72	--	56.13	80.8	-24.67	PK
3037.44	V	50.38	27.97	33.72	-9.34	46.79	60.8	-14.01	AV
3471.36	V	51.10	27.79	34.68	--	57.99	80.8	-22.81	PK
3471.36	V	51.10	27.79	34.68	-9.34	48.65	60.8	-12.15	AV
3905.28	V	37.80	27.86	36.26	--	46.20	74.0	-27.80	PK
3905.28	V	37.80	27.86	36.26	-9.34	36.86	54.0	-17.14	AV
4339.20	V	37.06	27.61	37.32	--	46.77	74.0	-27.23	PK
4339.20	V	37.06	27.61	37.32	-9.34	37.43	54.0	-16.57	AV

- Remark : 1. Corrected Level = Reading + Correction Factor – Preamp  
2. Correction Factor = Antenna Factor + Cable Loss  
3. “ \* ” Mark indicated Background Noise Level  
4. The signal bandwidth was measured and less then 100 kHz RBW so PDCF factor is not required to correct the fundamental signal peak result.

## **5 Emission Bandwidth**

### **5.1 Limits**

According to FCC 15.231(c) requirement:

The bandwidth of the emission shall be no wider than 0.25 % of the center frequency for devices operating between 70 MHz to 900 MHz. Those devices operating above 900 MHz, the emission spurious shall be no wider than 0.5 % of the center frequency. Bandwidth is determined at the points 20 dB down from the modulated carrier.


B.W (20 dBc) Limit = 0.25 % \* f(MHz) = 0.25 % \* 433.92 MHz = 1084.8 kHz

### **5.2 Test Result**

**PASS.**

The final test data is shown as following.

Channel Frequency (MHz)	Measured 20dB Bandwidth (kHz)	Limit (kHz)	Result
433.92	57	1084.8	PASS

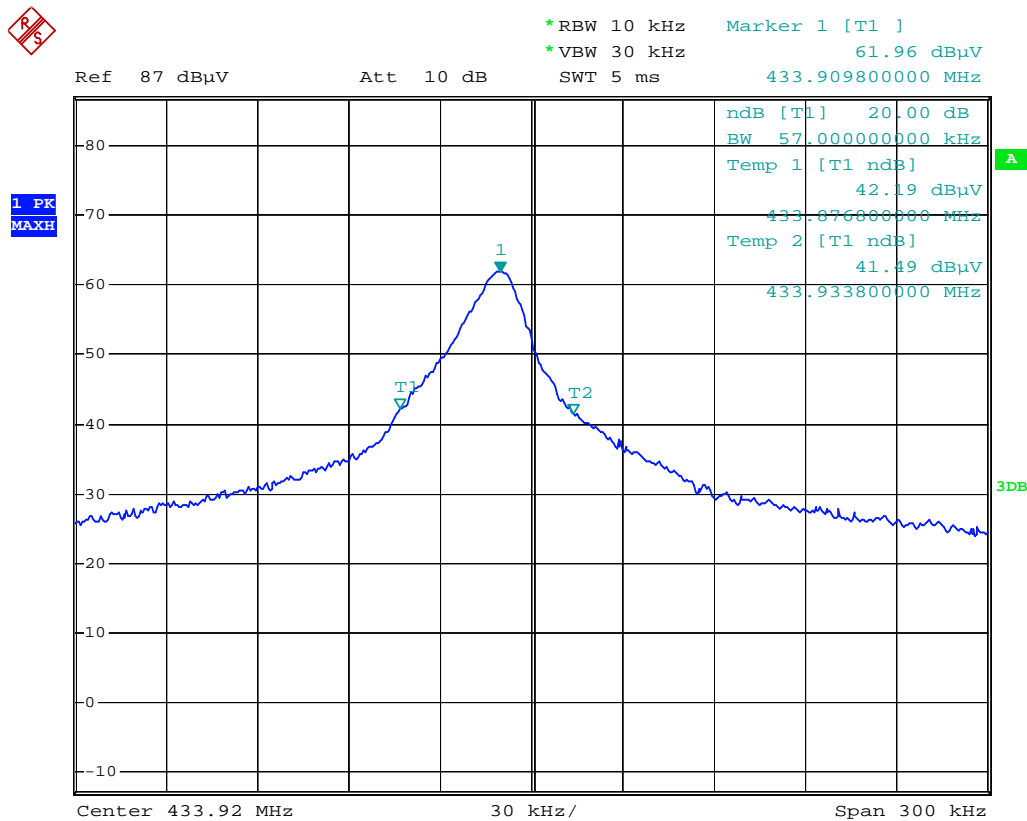

## **6 99 % Occupied Bandwidth**

### **6.1 Limits**

According to RSS-210 Annex 1 requirement:

The 99 % bandwidth shall be no wider than 0.25 % of the centre frequency for devices operating between 70 MHz and 900 MHz. For devices operating above 900 MHz, the emission shall be no wider than 0.5 % of the centre frequency.

99 % OBW Limit = 0.25 % \* f(MHz) = 0.25 % \* 433.92 MHz = 1084.8 kHz

### **6.2 Test Result**

**PASS.**

The final test data is shown as following.

Channel Frequency (MHz)	Measured 99% Bandwidth (kHz)	Limit (kHz)	Result
433.92	40.2	1084.8	PASS

