

CFR 47 FCC Part 15.247

TEST REPORT

Product : Transceiver
Trade Name : N/A
Model Number : 5BCR14RE
FCC ID : ELVATRPF

Prepared for

Nutek Corporation

NO. 167, Lane 235, Bauchiau Rd., Xindian District,
New Taipei City 23145, Taiwan

TEL. : +886 2 2918 9478

FAX. : +886 2 2917 9069

Prepared by

Interocean EMC Technology Corp.

No. 5-2, Lin 1, Tin-Fu, Lin-Kou Dist., New Taipei City,
Taiwan 244, R.O.C.

TEL.: +886 2 2600 6861

FAX.: +886 2 2600 6859

Remark :

The test report consists of **47** pages in total. It shall not be reproduced except in full, without the written approval of IETC. This document may be altered or revised by IETC only, and shall be noted in the revision section of the document.
The test result in the report is only subjected to the test sample.

Table of Contents

1	General Information	5
1.1	Description of Equipment Under Test	5
1.2	Table for Carrier Frequencies	6
1.3	Hopping Sequence	6
1.4	Details of Tested Supporting System	7
1.5	Test Facility	8
1.6	Test Equipment	9
1.7	Summary of Measurement	10
1.8	Justification	11
2	Test specifications	12
2.1	Test standard	12
2.2	Operation mode	12
2.3	Test Step of EUT	12
3	20dB Bandwidth test	13
3.1	Limit	13
3.2	Configuration of Measurement	13
3.3	Test Procedure	13
3.4	Test Result	13
4	Carrier Frequency Separation test	16
4.1	Limit	16
4.2	Configuration of Measurement	16
4.3	Test Procedure	16
4.4	Test Result	16
5	Number of hopping frequencies test	19
5.1	Configuration of Measurement	19
5.2	Test Procedure	19
5.3	Test Result	19
6	Time of Occupancy (dwell time) test	21
6.1	Limit	21
6.2	Configuration of Measurement	21
6.3	Test Procedure	21
6.4	Test Result	21
7	Maximum Output Power test	23
7.1	Limit	23
7.2	Configuration of Measurement	23
7.3	Test Procedure	23
7.4	Test Result	23

8	RF Conducted spurious emission	26
8.1	Limit	26
8.2	Configuration of Measurement	26
8.3	Test Procedure	26
8.4	Test Result	26
9	RF Radiated spurious emission test	30
9.1	Limit	30
9.2	Configuration of Measurement	30
9.3	Test Procedure	31
9.4	Test Result	31
10	AC Power Line Conducted Emission test	36
10.1	Limits	36
10.2	Configuration of Measurement	36
10.3	Test Procedures	36
10.4	Test Result	36
11	Photographs of Test	39
11.1	Power Line Conducted Emission Measurement	39
11.2	Radiated Emission Measurement	40
12	Photographs of EUT	42

Statement of Compliance

Applicant: Nutek Corporation

Manufacturer: Nutek Corporation

Product: Transceiver

Model No.: 5BCR14RE

Tested Power Supply: 3.7Vdc battery

Date of Final Test: Nov. 26, 2015

Revision of Report: Rev. 01


Configuration of Measurements and Standards Used :


FCC Rules and Regulations Part 15 Subpart C

I HEREBY CERTIFY THAT: The data shown in this report were made in accordance with the procedures given in ANSI C63.10, and the energy emitted by the device was founded to be within the limits applicable. I assume full responsibility for accuracy and completeness of these data.

- Note:** 1. The result of the testing report relate only to the item tested.
2. The testing report shall not be reproduced expect in full, without the written approval of IETC

Report Issued: 2015/11/30

Project Engineer: 
Vic Tsao

Approved: 
Jerry Liu

1 General Information

1.1 Description of Equipment Under Test

Product	: Transceiver
Model Number	: 5BCR14RE
Applicant	: Nutek Corporation NO. 167, Lane 235, Bauchiau Rd., Xindian District, New Taipei City 23145, Taiwan
Manufacturer	: Nutek Corporation NO. 167, Lane 235, Bauchiau Rd., Xindian District, New Taipei City 23145, Taiwan
Power Supply	: 3.7Vdc battery
Operating Frequency	: 909.6MHz ~ 918MHz
Channel Number	: 25 channels
Type of Modulation	: FSK
Antenna Description	: This device uses Helix antenna. Antenna gain 0dBi. The antenna is integral to the device, thereby meeting the requirement of FCC 15.203.
Date of Test	: Nov. 12 ~ 26, 2015
Additional Description	: 1) The Model Number " 5BCR14RE " is representative selected in the test and included in this report. 2) For more detail specification about EUT, please refer to the user's manual.

1.2 Table for Carrier Frequencies

	FC (MHz)		FC (MHz)		FC (MHz)
CH0	909.60	CH9	912.75	CH18	915.90
CH1	909.95	CH10	913.10	CH19	916.25
CH2	910.30	CH11	913.45	CH20	916.60
CH3	910.65	CH12	913.80	CH21	916.95
CH4	911.00	CH13	914.15	CH22	917.30
CH5	911.35	CH14	914.50	CH23	917.65
CH6	911.70	CH15	914.85	CH24	918.00
CH7	912.05	CH16	915.20		
CH8	912.40	CH17	915.55		

1.3 Hopping Sequence

12, 8, 6, 2, 0, 5, 1, 7, 3, 9, 4, 10, 15, 19, 13, 11, 16, 18, 14, 20, 22, 21, 24, 23, 17

1.4 Details of Tested Supporting System

1.4.1 PC

PC33

Model Number : SGH017PFW4
CPU Speed : Intel Core 2 Duo E5400
RAM : 2GB DDR3 1333MHz
EMC Compliance : CE, TUV, NCC, BSMI: R33275
Hard Disk Driver : 250GB Serial ATA2 3.0Gb/s 7200rpm
Manufacturer : HP
Switching Power Supply : LiteOn, PS-4321-9HP, 320W
Power Cord : Non-shielded, Detachable, 1.8m, w/o core

1.4.2 Monitor

MT30

Model Number : CMV 92GH 19"
Serial Number : 92GHAGCN9120289
EMC Compliance : FCC, CE, BSMI: R31374, UL, TUV
Manufacturer : CHIMEI
Power Cord : Non-shielded, Detachable, 1.8m, w/o core
D-Sub Cable : Non-shielded, Detachable, 1.8m, with core

1.4.3 Keyboard

KB33 (USB)

Model Number : Y-U0011
Serial Number : N/A
EMC Compliance : CE, FCC, C-Tick, BSMI T51160, VCCI
Manufacturer : LOGITECH
Data Cable : Non-Shielded, Un-detachable, 1.5m

1.4.4 Mouse

USB60

Model Number : M-U0028
Serial Number : N/A
EMC Compliance : FCC, CE, BSMI T41126, VCCI
Manufacturer : LOGITECH
Data Cable : Non-shielded, Un-detachable, 1.8m

1.4.5 Test Cable

USB to micro USB Cable : Shielded, Detachable, 1m, w/o core

1.5 Test Facility

- Site Description** : Conducted 1 Chamber 3 RF Test Room
- Name of Firm** : Interocean EMC Technology Corp.
- Company web** : <http://www.ietc.com.tw>
- Location** : No. 5-2, Lin 1, Tin-Fu, Lin-Kou Dist., New Taipei City, Taiwan 244, R.O.C.
- Site Filing** :
- Federal Communication Commissions – USA
Registration No.: 96399 (OATS 1, 2, 3 & Chamber 3)
Designation No.: TW1020
 - Industry Canada (IC)
OUR FILE: 46405-4437
Registration No. (OATS 1): Site# 4437A-1
Registration No. (OATS 3): Site# 4437A-3
Registration No. (Chamber 3): Site# 4437A-5
Registration No. (OATS 5): Site# 4437A-6
 - Voluntary Control Council for Interference by Information Technology Equipment (VCCI) – Japan
Member No.: 1349
Registration No. (Conducted Room): C-1094
Registration No. (Conducted Room): T-1562
Registration No. (OATS 1): R-1040; G-274
- Site Accreditation** :
- Bureau of Standards and Metrology and Inspection (BSMI) – Taiwan, R.O.C.
Accreditation No.:
SL2-IN-E-0026 for CNS13438 / CISPR 22
SL2-IN-E-0026 for CNS14757-2 / IEC 62040-2
SL2-R1-E-0026 for CNS13439 / CISPR 13
SL2-R2-E-0026 for CNS13439 / CISPR 13
SL2-A1-E-0026 for CNS13783-1 / CISPR 14-1
SL2-L1-E-0026 for CNS 14115 / CISPR 15
 - Taiwan Accreditation Foundation (TAF)
Accreditation No.: 1113
 - Vehicle Safety Certification Center (VSCC)
Approval No.: TW16-11-0
 - TÜV NORD
Certificate No: TNTW0801R-04

1.6 Test Equipment

Instrument	Manufacturer	Model	Serial No.	Next Cal. Date
EMI Test Receiver	Rohde & Schwarz	ESCS 30	100127	2016/10/25
EMI Test Spectrum Analyzer & Receiver	Rohde & Schwarz	ESI7	830154/002	2016/09/24
Preamplifier	Burgeon	BPA-530	100216	2016/06/30
Preamplifier	Schaffner	CAP9231A	3351	2016/08/25
Preamplifier	Mini-Circuits	ZVA-213-S+	491801136	2016/08/25
Pre-Amplifier	EMCI	EMC 051845	980110	2016/10/20
Preamplifier	Agilent	83050A	3950M00225	2016/09/21
Bilog Antenna	Schwarzbeck	VULB 9163	113	2016/07/26
Horn Antenna	Schwarzbeck	BBHA 9120	9120D-583	2016/09/29
Horn Antenna	Schwarzbeck	BBHA 9170	213	2016/07/19
L.I.S.N.	Schwarzbeck	NNLK8121	8121417	2016/09/01
L.I.S.N.	Schaffner	MN2050D	1598	2016/08/27
RF Cable	HARBOUR	27478LL142	CBL22	2016/03/23
RF Cable	Jye Bao	N30N30-5006	CBL53	2016/03/30
RF Cable	HARBOUR	27478LL142	CBL65	2016/03/23
RF Cable	HARBOUR	RG58/U	CBL48	2016/07/27
Spectrum Analyzer	R&S	FSP40	100478	2016/06/03

Note: The above equipments are within the valid calibration period.

1.7 Summary of Measurement

Report Clause	Test Parameter	Reference Document CFR47 Part15	Results
3	20dB Bandwidth test	§15.247(a)(1)	Pass
4	Carrier Frequency Separation test	§15.247(a)(1)	Pass
5	Number of hopping frequencies test	§15.247(a)(1)	Pass
6	Time of Occupancy (dwell time) test	§15.247(a)(1)	Pass
7	Maximum Peak output power test	§15.247(b)	Pass
8	RF Conducted spurious emission	§15.247(c)	Pass
9	RF Radiated spurious emission test	§15.205, 15.209	Pass
8	Emission on the Band Edge test	§15.247(d)	Pass
10	AC Power Line Conducted Emission test	§15.207	Pass

1.8 Justification

The test of radiated measurements according to FCC Part15 Section 15.33(a) had been conducted and the field strength of the frequency band were all arrive limit requirement, thus we evaluate the EUT pass the specified test.

2 Test specifications

2.1 Test standard

The EUT was performed according to FCC Part 15 Subpart C Section 15.247 procedure and setup followed by ANSI C63.10, 2013 requirements.

2.2 Operation mode

By preliminary testing and verifying three axis (X, Y and Z) position of EUT transmitted status, it was found that "X axis" position was the worst, then the final test was executed the worst condition and test data were recorded in this report

The EUT was operated in continuous transmission mode during all of the tests.



X axis mode



Y axis mode



Z axis mode

2.3 Test Step of EUT


- 2.3.1 Setup the fixture to EUT for power supplying.
- 2.3.2 Turn on the power of all equipment.
- 2.3.3 Let the EUT continuous transmission. Executed the test.

3 20dB Bandwidth test

3.1 Limit

For frequency hopping systems operating in the 902–928 MHz band: if the 20 dB bandwidth of the hopping channel is less than 250 kHz, the system shall use at least 50 hopping frequencies and the average time of occupancy on any frequency shall not be greater than 0.4 seconds within a 20 second period; if the 20 dB bandwidth of the hopping channel is 250 kHz or greater, the system shall use at least 25 hopping frequencies and the average time of occupancy on any frequency shall not be greater than 0.4 seconds within a 10 second period. The maximum allowed 20 dB bandwidth of the hopping channel is 500 kHz.

3.2 Configuration of Measurement



3.3 Test Procedure

The EUT was setup to ANSI C63.10, 2013; tested to FHSS test procedure of FCC Public Notice DA 00-705 for compliance to FCC 47CFR 15.247 requirements.

The 20dB bandwidth per FCC §15.247(a)(1) was measured using a 50 ohm spectrum analyzer with the resolutions bandwidth set at 10 kHz, the video bandwidth \geq RBW, and the SPAN may equal to approximately 2 to 3 time the 20dB bandwidth.

3.4 Test Result


PASS.

The final test data is shown as following pages.


20dB bandwidth

Test CH		20dB Bandwidth (kHz)	Limit (kHz)	Result
CH No.	Freq. (MHz)			
0	909.6	264.00	250 - 500	PASS
12	913.8	264.00	250 - 500	PASS
24	918.0	264.00	250 - 500	PASS


CH0 909.6MHz

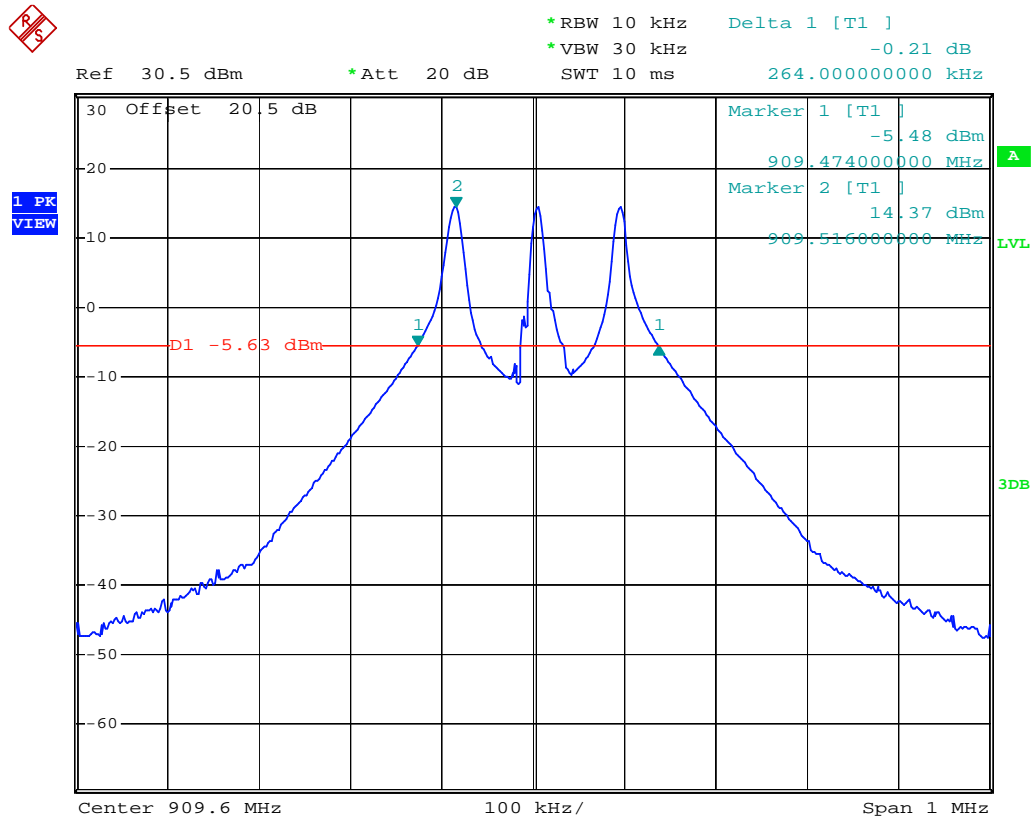

CH12 913.8MHz

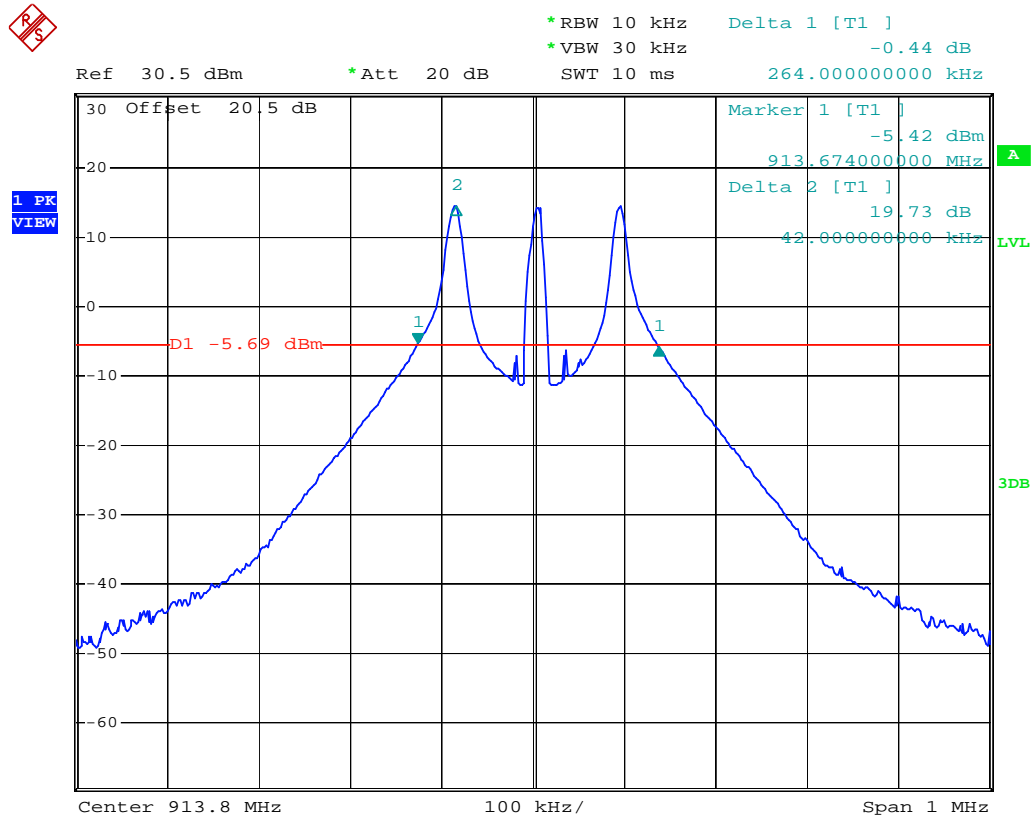

CH24 918.0MHz

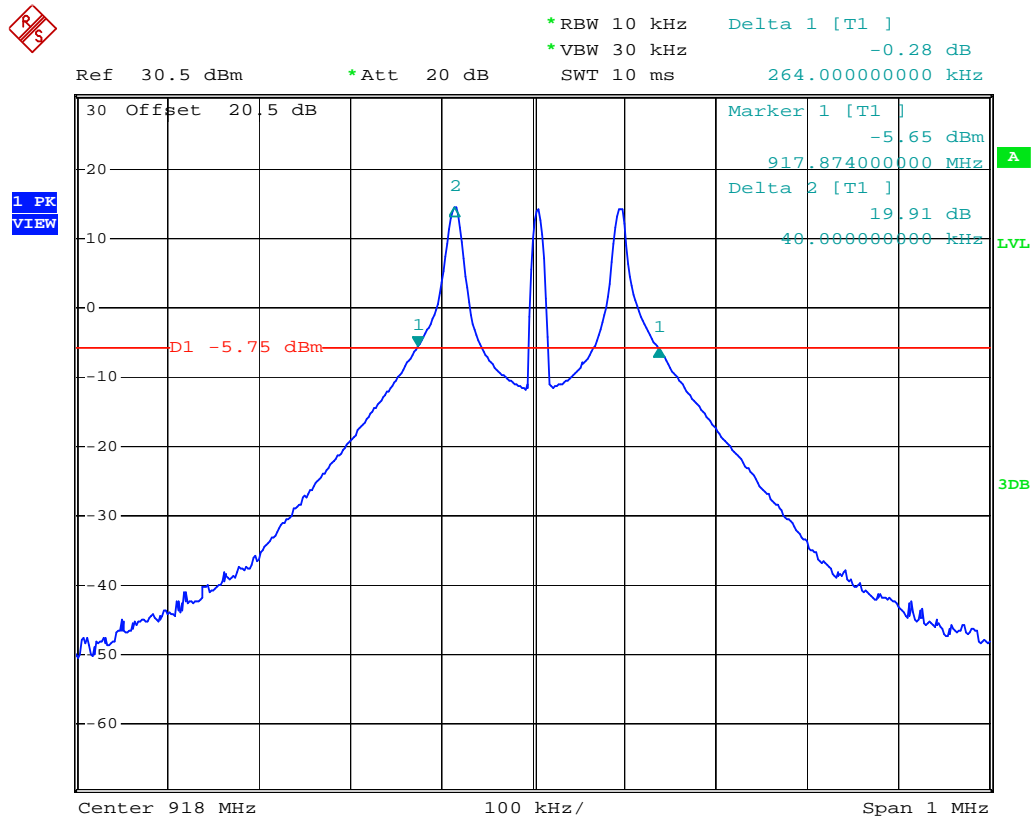


4 Carrier Frequency Separation test

4.1 Limit

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25kHz or the 20dB bandwidth of the hopping channel, whichever is greater.

4.2 Configuration of Measurement



4.3 Test Procedure

The EUT was setup to ANSI C63.10, 2013; tested to FHSS test procedure of FCC Public Notice DA 00-705 for compliance to FCC 47CFR 15.247 requirements.

The carrier frequency separation per FCC Part15.247(a)(1) was measured using a 50 ohm spectrum analyzer with the resolutions bandwidth set at $\geq 1\%$ of the span, the video bandwidth \geq RBW, and the SPAN was wide enough to capture the peaks of two adjacent channels.

4.4 Test Result


PASS.

The final test data is shown as following pages.


Carrier Frequency Separation test

Modulation type	Frequency (MHz)	Separation (kHz)	Result
FSK	909.60-909.95	362.00	PASS
FSK	913.80-914.15	364.00	PASS
FSK	917.65-918.00	358.00	PASS


Channel Separation (909.6MHz)

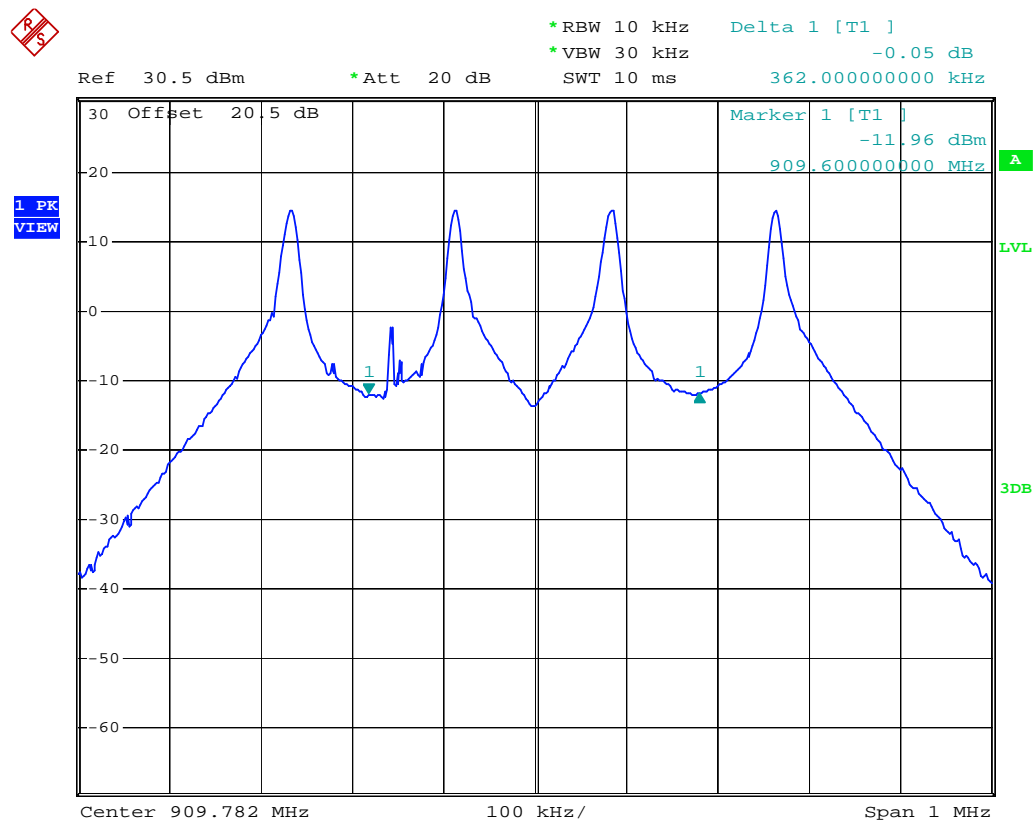

Channel Separation (913.8MHz)

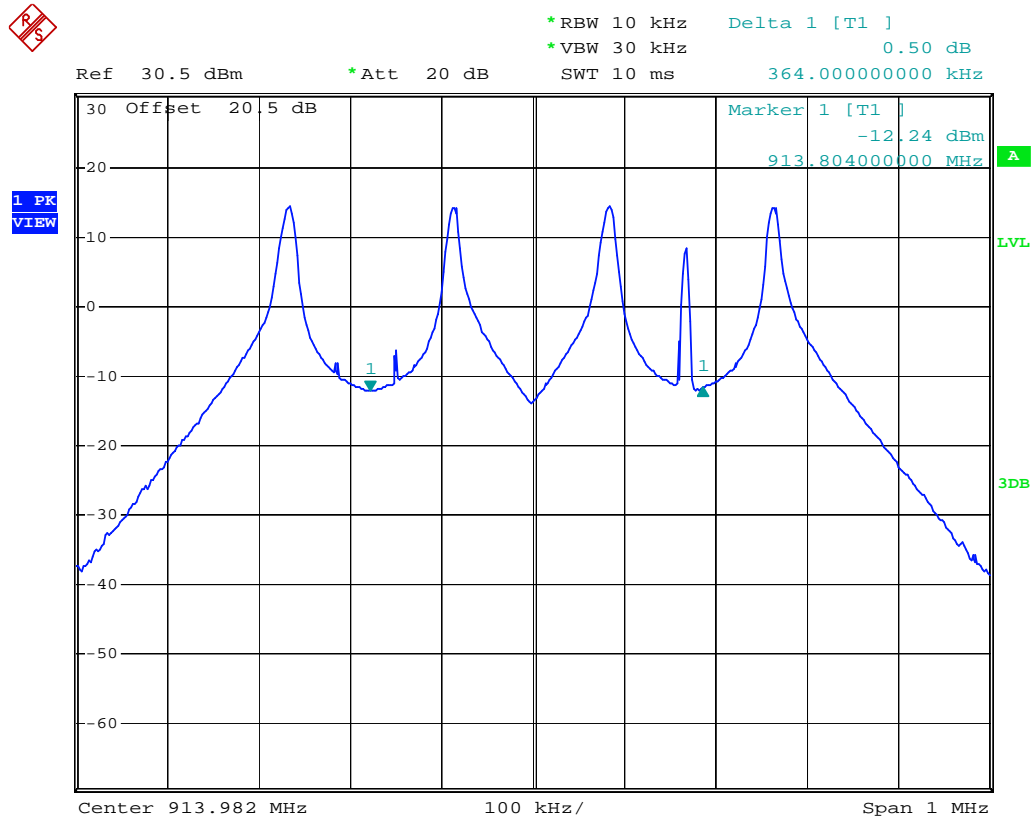


Channel Separation (918MHz)

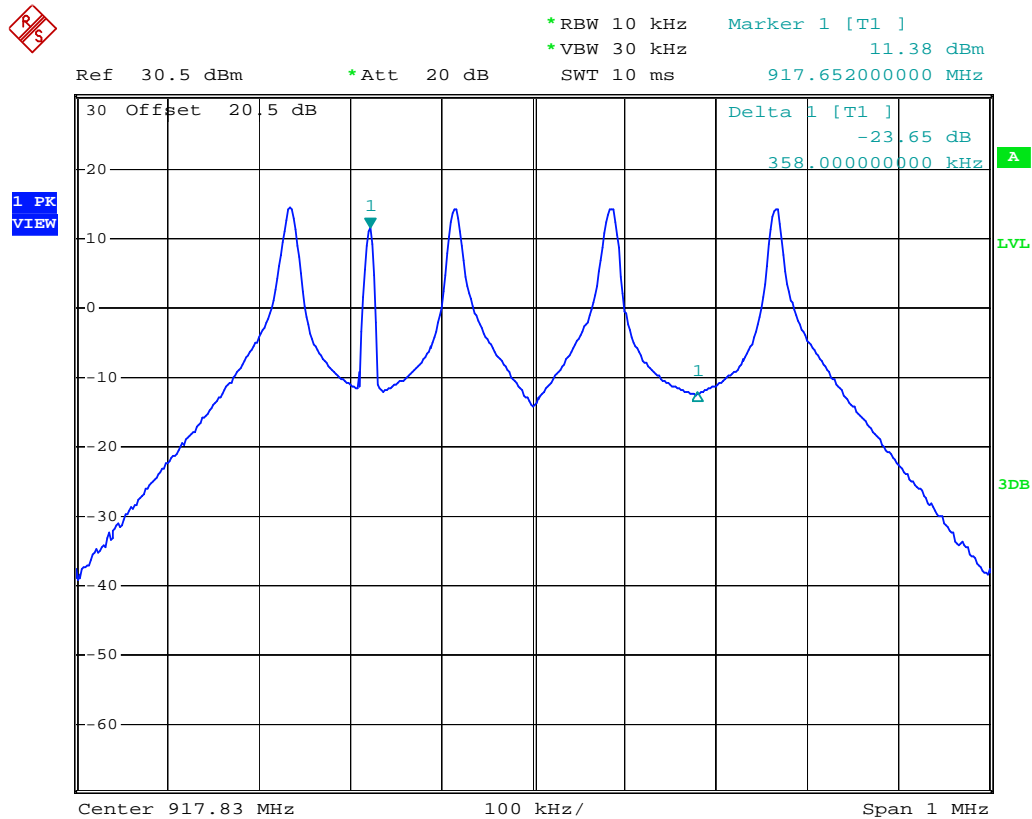

5 Number of hopping frequencies test

5.1 Configuration of Measurement



5.2 Test Procedure

The EUT was setup to ANSI C63.10, 2013; tested to FHSS test procedure of FCC Public Notice DA 00-705 for compliance to FCC 47CFR 15.247 requirements.

The number of hopping frequencies per FCC Part15.247(a)(1) was measured using a 50 ohm spectrum analyzer with the resolutions bandwidth set at $\geq 1\%$ of the span, the video bandwidth \geq RBW, and the SPAN was the frequency band of operation.

5.3 Test Result


PASS.

The final test data is shown as following pages.

Number of hopping frequencies test

Modulation	No. of Hopping CH.
FSK	25

Channel Number

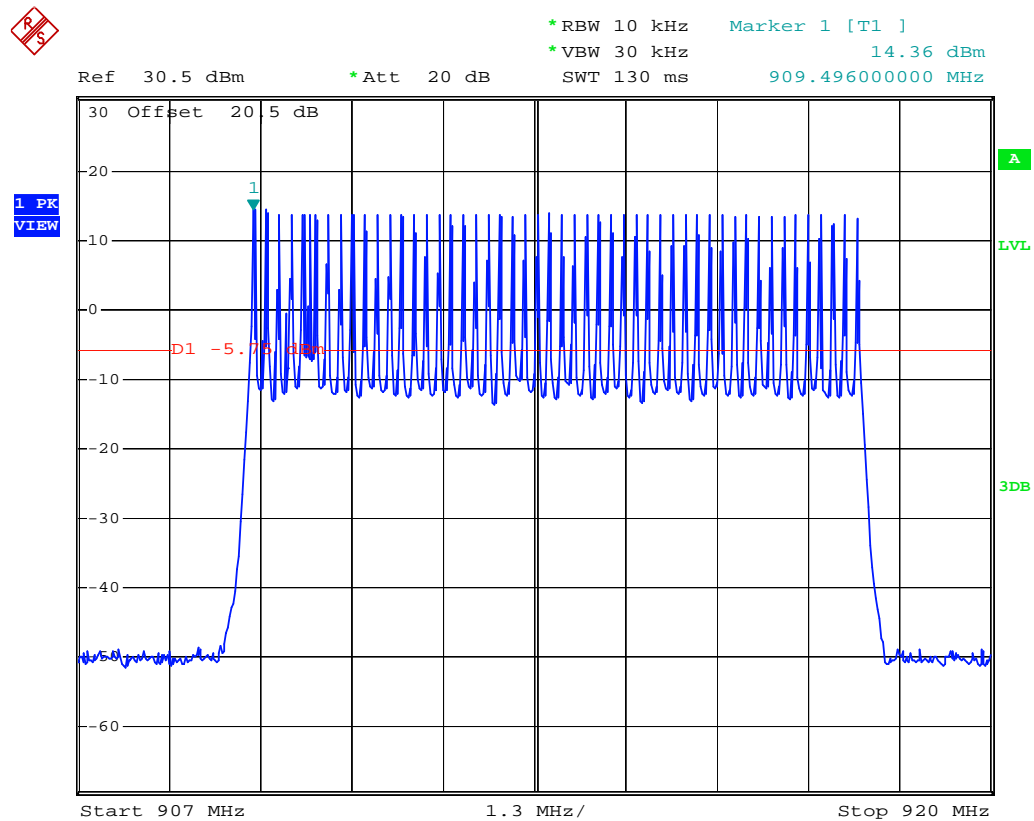


6 Time of Occupancy (dwell time) test

6.1 Limit

For frequency hopping systems operating in the 902–928 MHz band: if the 20 dB bandwidth of the hopping channel is less than 250 kHz, the system shall use at least 50 hopping frequencies and the average time of occupancy on any frequency shall not be greater than 0.4 seconds within a 20 second period; if the 20 dB bandwidth of the hopping channel is 250 kHz or greater, the system shall use at least 25 hopping frequencies and the average time of occupancy on any frequency shall not be greater than 0.4 seconds within a 10 second period. The maximum allowed 20 dB bandwidth of the hopping channel is 500 kHz.

6.2 Configuration of Measurement



6.3 Test Procedure

The EUT was setup to ANSI C63.10, 2013; tested to FHSS test procedure of FCC Public Notice DA 00-705 for compliance to FCC 47CFR 15.247 requirements.

According to FCC Part15.247(a)(1) the time of occupancy (dwell time) was measured using a 50 ohm spectrum analyzer with the resolutions bandwidth set at 1MHz, the video bandwidth \geq RBW and the zero span function of spectrum analyzer was enable. The EUT has its hopping function enable.

6.4 Test Result


PASS.

The final test data is shown as following pages.


Time of Occupancy (dwell time) test

3 occurrences in 10 seconds : $3 \times 133.3 \text{ ms} = 399.9 \text{ ms}$ which is less than 400 ms.

Dwell time-1

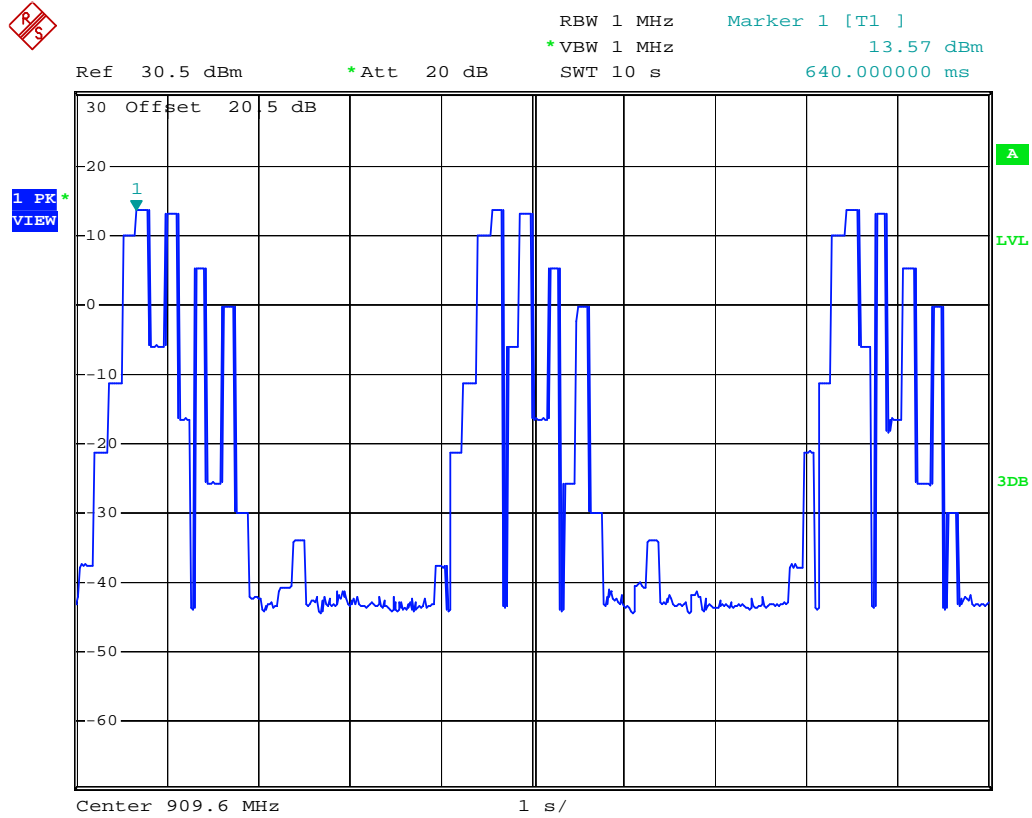

Dwell time-2

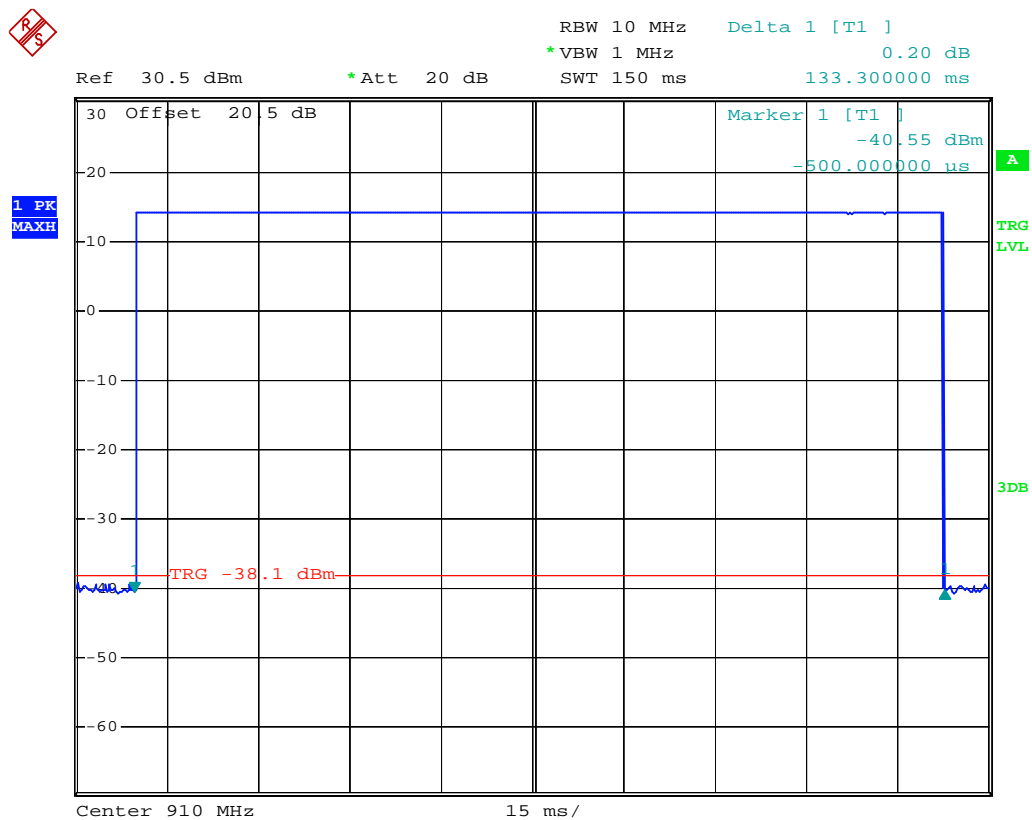


7 Maximum Output Power test

7.1 Limit

For frequency hopping systems operating in the 902–928 MHz band: 1 watt for systems employing at least 50 hopping channels; and, 0.25 watts for systems employing less than 50 hopping channels, but at least 25 hopping channels, as permitted under paragraph (a)(1)(i) of this section.

7.2 Configuration of Measurement



7.3 Test Procedure

The EUT was setup to ANSI C63.10, 2013; tested to FHSS test procedure of FCC Public Notice DA 00-705 for compliance to FCC 47CFR 15.247 requirements.

For FCC Part 15.247(b) the power output per was measured on the EUT using a 50 ohm SMA cable connected to peak Spectrum Analyzer. Peak output power was read directly from Spectrum Analyzer. The test was performed at 3 channels (lowest, middle and highest).

7.4 Test Result


PASS.

The final test data is shown as following pages.


Maximum output power

Channel	Frequency (MHz)	Maximum transmit power (dBm)	Watts	Limit (dBm)	Margin (dB)
0	909.6	15.45	0.03508	24	-8.55
12	913.8	15.40	0.03467	24	-8.60
24	918.0	15.33	0.03412	24	-8.67


CH0 909.6MHz

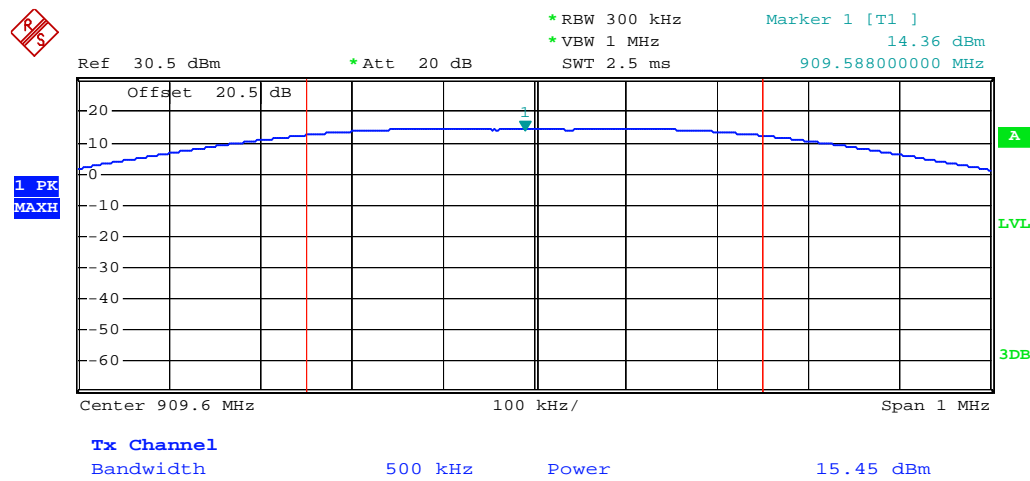

CH12 913.8MHz

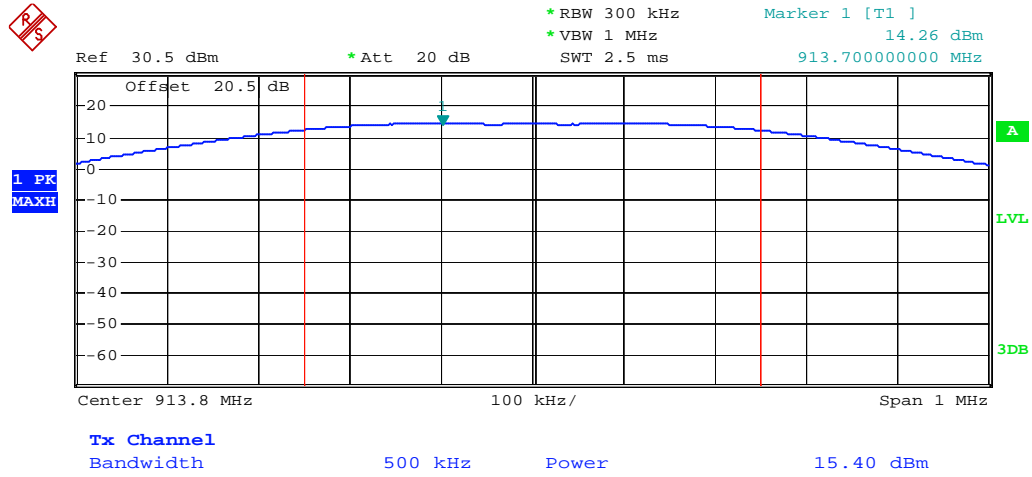

CH24 918.0 MHz

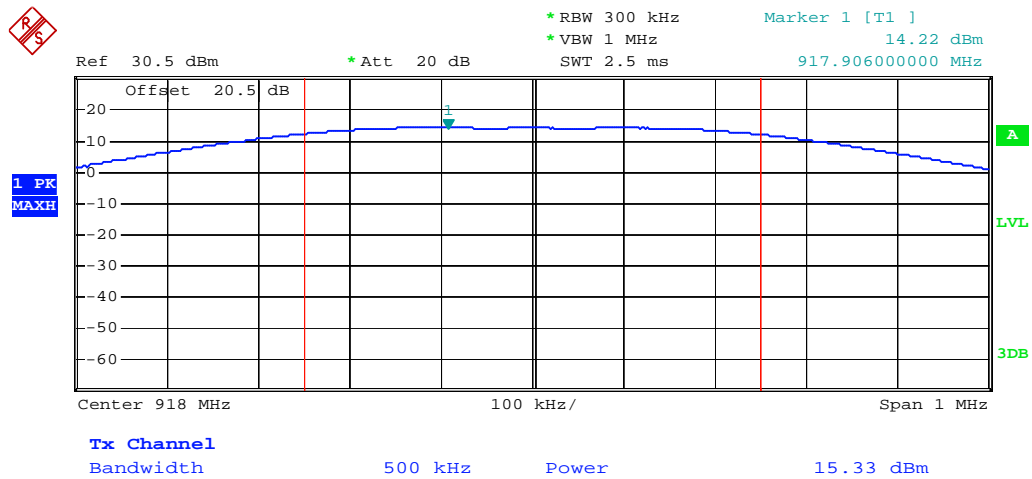


8 RF Conducted spurious emission

8.1 Limit

According to FCC Part 15.247(d) requirement :

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits.

8.2 Configuration of Measurement



8.3 Test Procedure

The EUT was setup to ANSI C63.10, 2013; tested to FHSS test procedure of FCC Public Notice DA 00-705 for compliance to FCC 47CFR 15.247 requirements.

RF antenna conducted spurious emissions was measured from the EUT antenna port using a 50ohm spectrum analyzer with the resolution bandwidth set at 100 kHz, and the video bandwidth set ≥ 100 kHz.

The measurements were performed from 30MHz to 10GHz.

8.4 Test Result

PASS.


The final test data is shown as following pages.

Conducted spurious emission

909.6MHz (30MHz ~ 1GHz)




*RBW 100 kHz Marker 1 [T1]
*VBW 300 kHz 14.02 dBm
SWT 100 ms 910.76000000 MHz

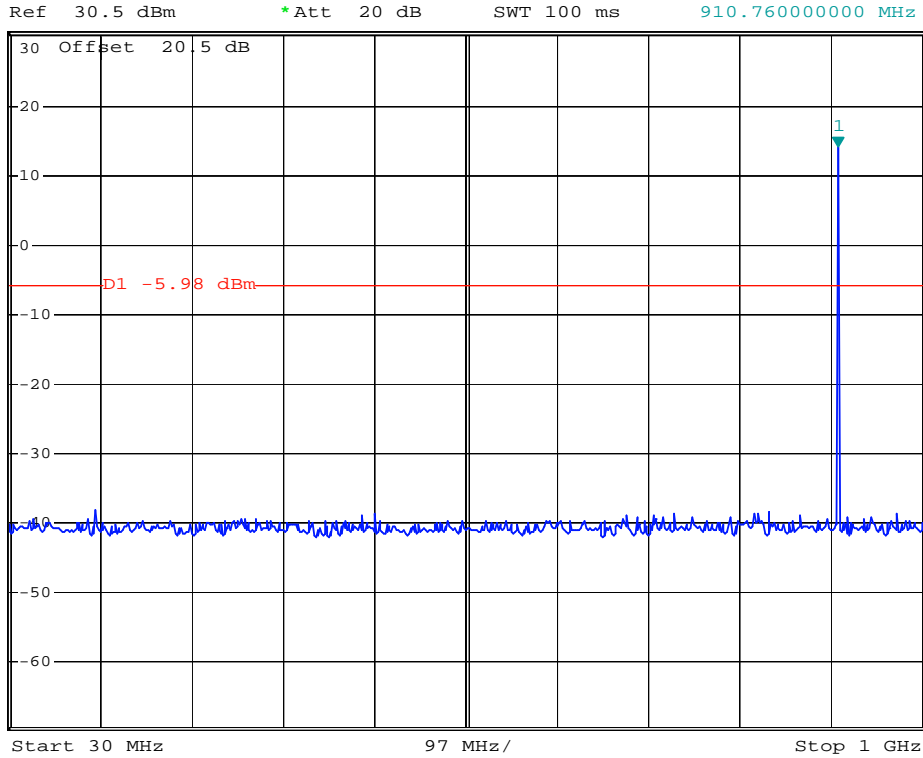


909.6MHz (1~10GHz)




*RBW 100 kHz Marker 1 [T1]
*VBW 300 kHz -32.23 dBm
SWT 900 ms 1.810000000 GHz

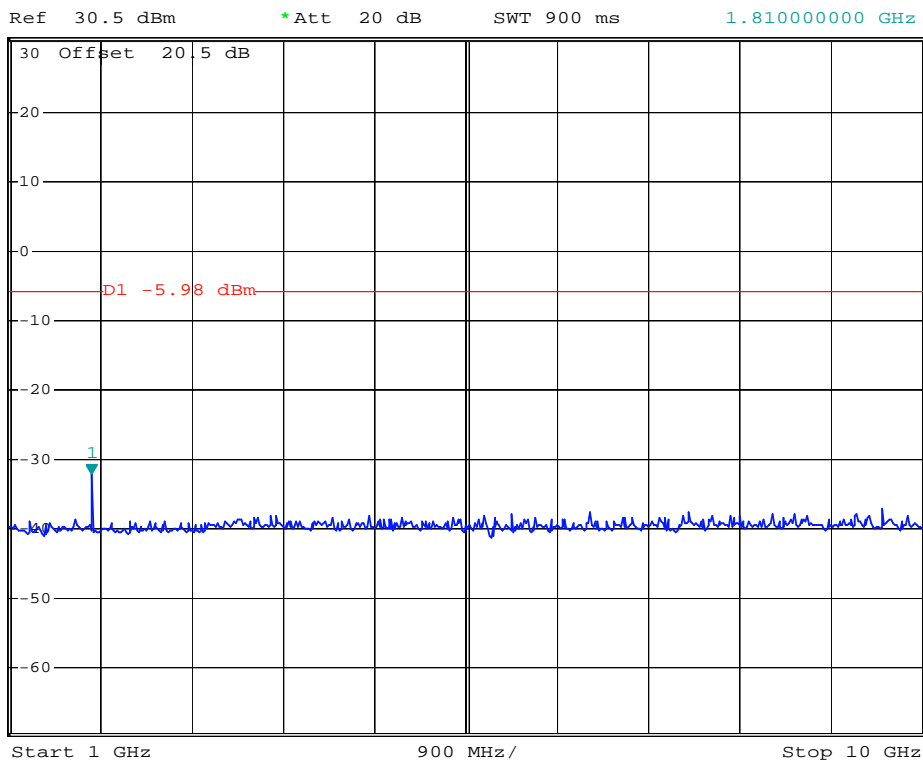

913.8MHz (30MHz ~ 1GHz)

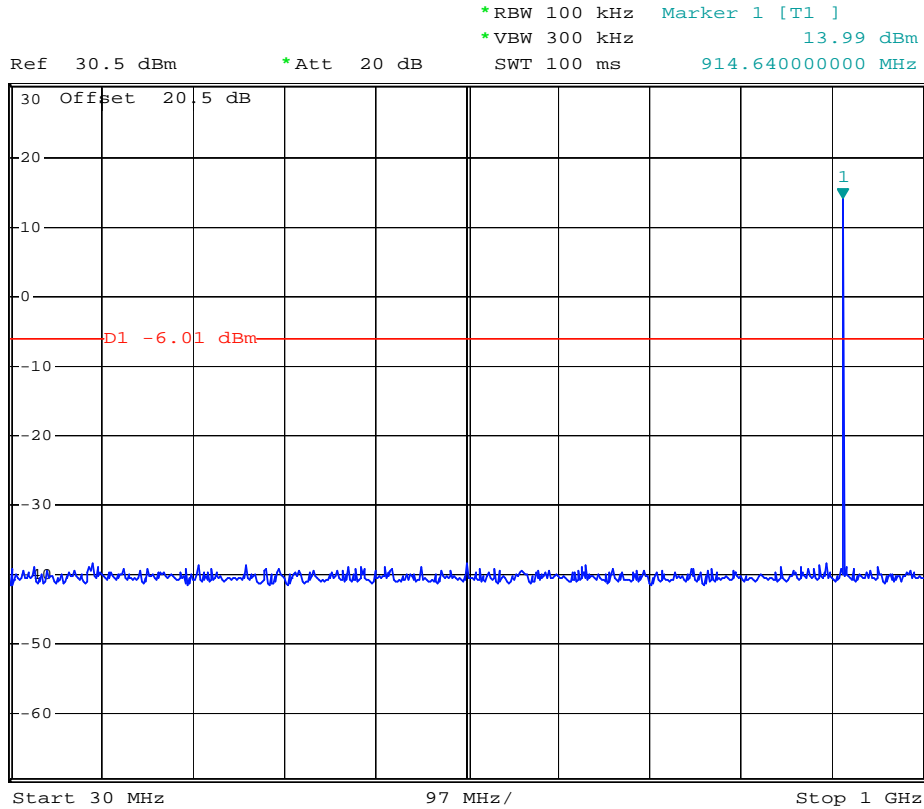


913.8MHz (1~10GHz)

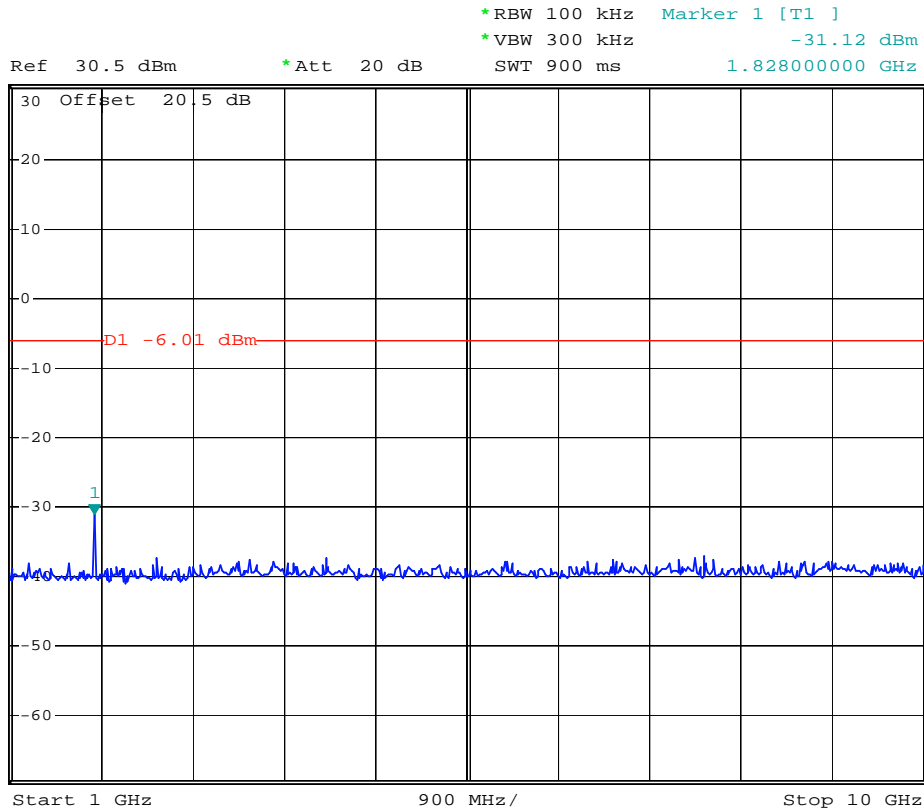

918MHz (30MHz ~ 1GHz)




*RBW 100 kHz Marker 1 [T1]
*VBW 300 kHz 14.06 dBm
SWT 100 ms 918.52000000 MHz

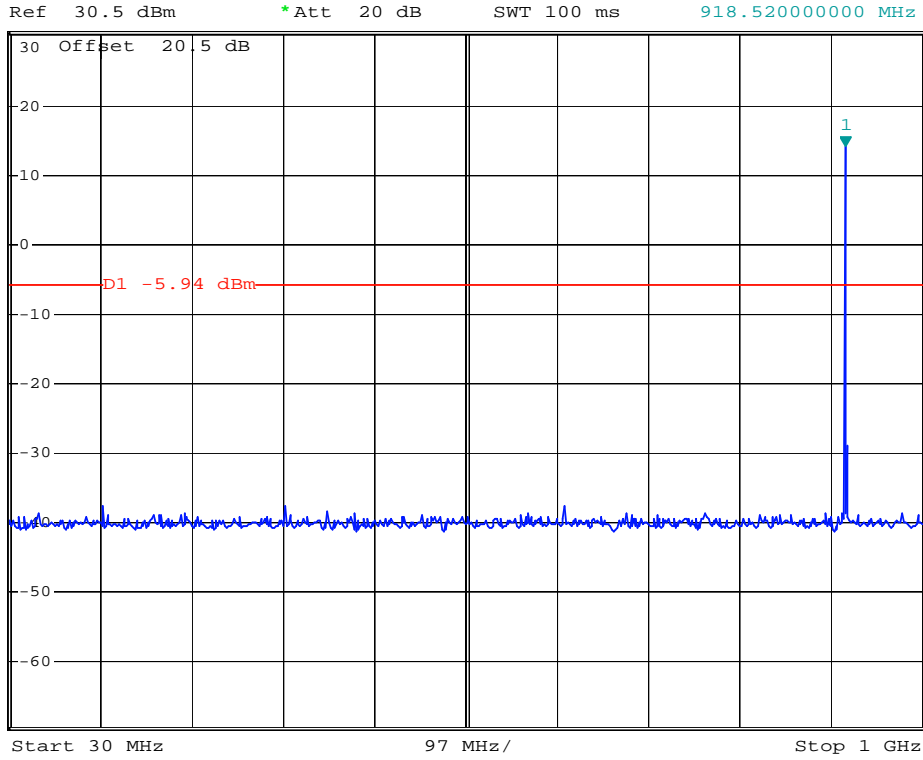

918MHz (1~10GHz)



*RBW 100 kHz Marker 1 [T1]
*VBW 300 kHz -32.35 dBm
SWT 900 ms 1.828000000 GHz

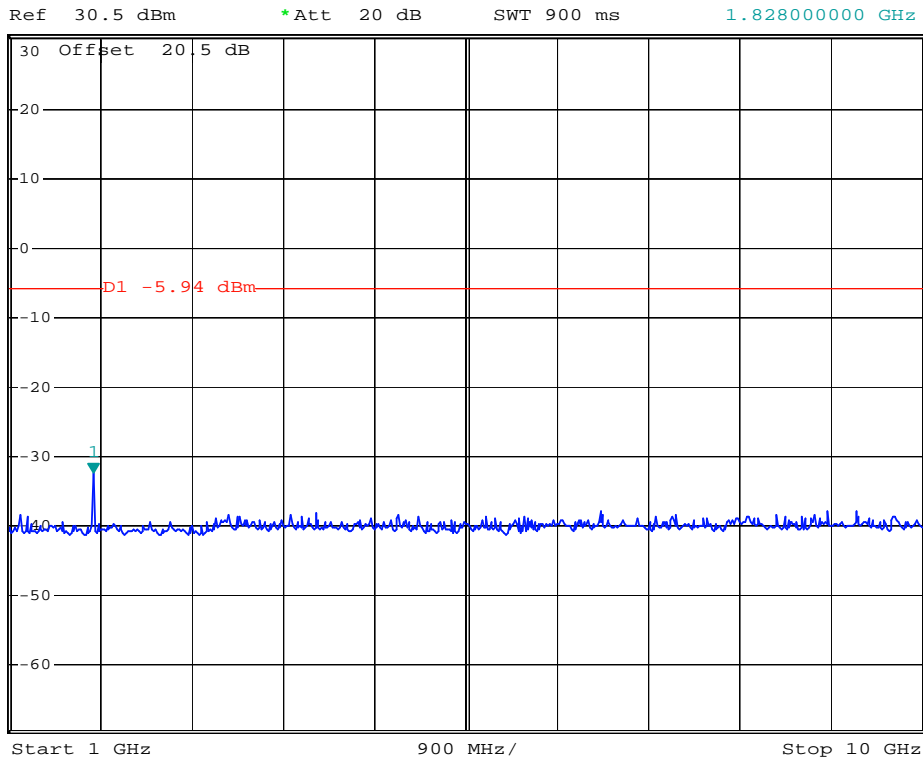

9 RF Radiated spurious emission test

9.1 Limit


For intentional radiator, the radiated emission shall comply with FCC Part 15.209(a).

For intentional radiators, according to FCC Part 15.247 (a), operation under this provision is limited to frequency hopping and direct sequence spread spectrum, and the out band emission shall be comply with FCC Part 15.247 (c)


Frequency (MHz)	Field strength dB(μ V/m)	Measurement distance (meters)
1.705~30.0	29.5	30
30 ~ 88	40	3
88~216	43.5	3
216~960	46	3
Above 960	54	3

9.2 Configuration of Measurement

Measurement Frequency under 1GHz

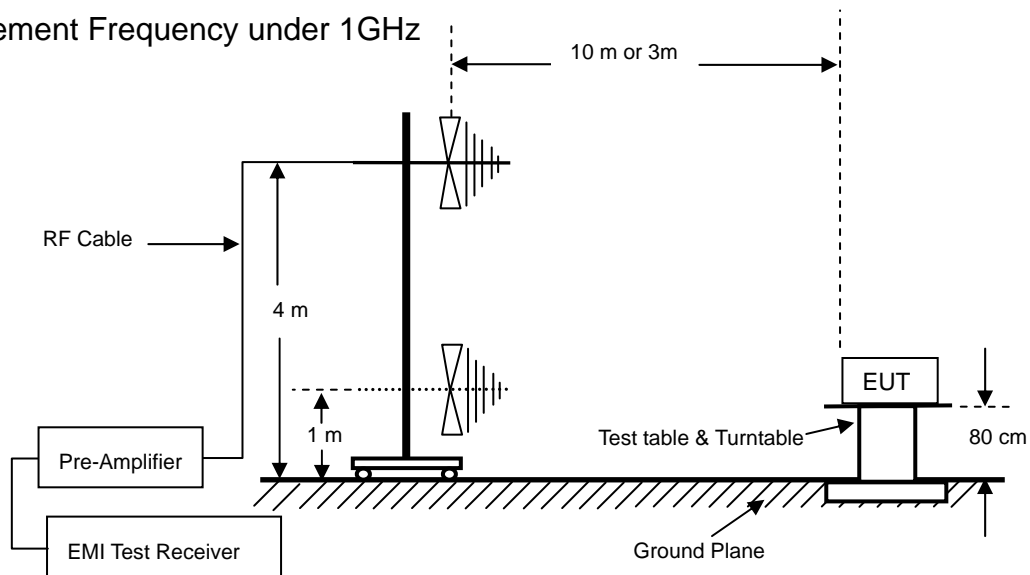

Measurement Frequency above 1GHz

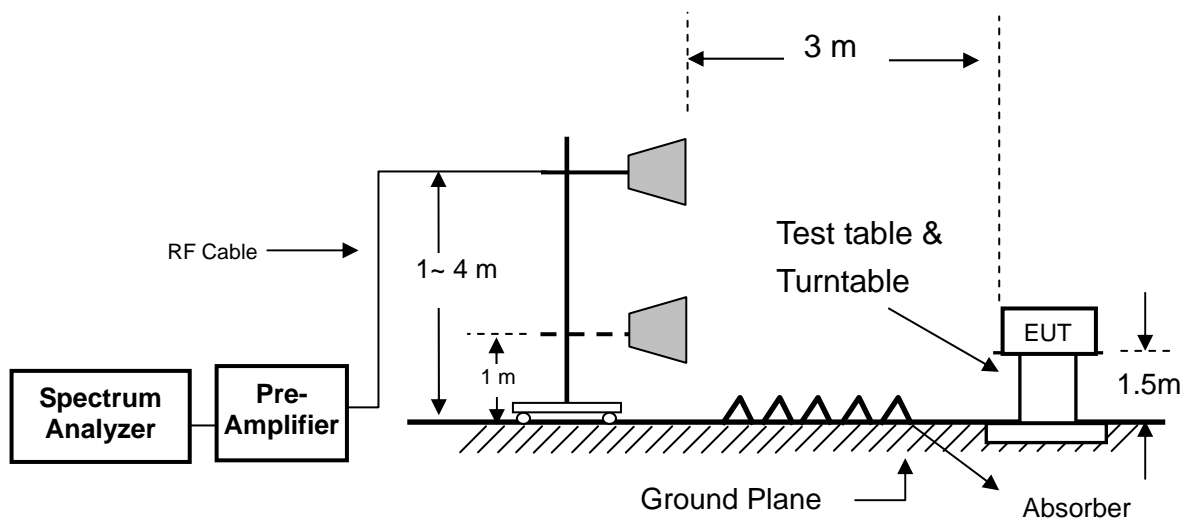

9.3 Test Procedure

The EUT was setup to ANSI C63.10, 2013; tested to FHSS test procedure of FCC Public Notice DA 00-705 for compliance to FCC 47CFR 15.247 requirements.

Radiated emission measurements were performed from 30MHz to 10GHz. Spectrum Analyzer set as below: For frequency range from 30MHz to 1GHz: RBW=100kHz or greater. For frequencies above 1GHz: set RBW=VBW=1MHz for peak detector and RBW=1MHz, VBW=10Hz for average detector.

The EUT for testing is arranged on a wooden turntable. If some peripherals apply to the EUT, the peripherals will be connected to EUT and whole system. During the test, all cables were arranged to present worst-case emissions. The signal is maximized through rotation. The height of antenna and polarization is changing constantly for exploring for maximum signal level. The height of antenna can be up to 4 meter and down to 1 meter.

9.4 Test Result

PASS.

The final test data is shown as following pages.

Radiated spurious emission

Test Environment

Ambient temperature : 28.5°C

Relative humidity : 50%

Radiated Emission below 1GHz

After verifying low, middle and high channel,

The worse case was found at high channel X axis.

Frequency	Antenna	Reading	Preamp	Correction Factor	Corrected Level	Limits	Margin	Det
(MHz)	Polarization	(dBuV)	(dB)	(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	Mode
75.000	H	46.20	31.71	8.71	23.20	40.00	-16.80	PK
120.000	H	47.30	31.41	10.04	25.93	43.52	-17.59	PK
167.000	H	47.20	31.37	9.45	25.28	43.52	-18.24	PK
204.000	H	47.20	31.12	11.63	27.71	43.52	-15.81	PK
235.000	H	49.30	31.04	13.19	31.45	46.02	-14.57	PK
291.000	H	47.00	31.13	14.74	30.61	46.02	-15.41	PK
58.000	V	49.00	31.55	12.66	30.11	40.00	-9.89	PK
75.000	V	48.20	31.71	8.71	25.20	40.00	-14.80	PK
121.000	V	47.20	31.41	9.96	25.75	43.52	-17.77	PK
186.000	V	45.00	31.16	11.66	25.50	43.52	-18.02	PK
240.000	V	47.00	31.04	13.46	29.42	46.02	-16.60	PK
270.000	V	50.00	31.06	13.90	32.84	46.02	-13.18	PK

Remark : Corrected Level = Reading + Correction Factor – Preamp

Correction Factor = Antenna Factor + Cable Loss

Radiated spurious emission

Radiated Emission above 1GHz

Channel 0 (909.6MHz)

Frequency	Antenna	Reading	Preamp	Correction Factor	Corrected Level	Limits	Margin	Det
(MHz)	Polarization	(dBuV)	(dB)	(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	Mode
1819.20	H	53.40	27.75	29.82	55.47	74.00	-18.53	PK
1819.20	H	43.80	27.75	29.82	45.87	54.00	-8.13	AV
2728.80	H	39.04	27.92	33.05	44.17	74.00	-29.83	PK
2728.80	H	32.61	27.92	33.05	37.74	54.00	-16.26	AV
3638.40	H	45.62	27.75	35.09	52.96	74.00	-21.04	PK
3638.40	H	40.96	27.75	35.09	48.30	54.00	-5.70	AV
4548.00	H	41.12	27.76	37.79	51.15	74.00	-22.85	PK
4548.00	H	32.82	27.76	37.79	42.85	54.00	-11.15	AV
5457.60	H	43.01	27.59	40.04	55.46	74.00	-18.54	PK
5457.60	H	36.18	27.59	40.04	48.63	54.00	-5.37	AV
6367.20	H	44.00	27.49	42.69	59.20	74.00	-14.80	PK
6367.20	H	36.59	27.49	42.69	51.79	54.00	-2.21	AV
7276.80	H	35.09	27.43	45.31	52.97	74.00	-21.03	PK
7276.80	H	22.14	27.43	45.31	40.02	54.00	-13.98	AV
8186.40	H	35.84	27.29	46.66	55.21	74.00	-18.79	PK
8186.40	H	23.31	27.29	46.66	42.68	54.00	-11.32	AV
9096.00	H	35.44	27.06	47.89	56.27	74.00	-17.73	PK
9096.00	H	23.13	27.06	47.89	43.96	54.00	-10.04	AV
1819.20	V	51.80	27.75	29.82	53.87	74.00	-20.13	PK
1819.20	V	50.75	27.75	29.82	52.82	54.00	-1.18	AV
2728.80	V	42.64	27.92	33.05	47.77	74.00	-26.23	PK
2728.80	V	38.90	27.92	33.05	44.03	54.00	-9.97	AV
3638.40	V	50.44	27.75	35.09	57.78	74.00	-16.22	PK
3638.40	V	46.14	27.75	35.09	53.48	54.00	-0.52	AV
4548.00	V	43.55	27.76	37.79	53.58	74.00	-20.42	PK
4548.00	V	37.73	27.76	37.79	47.76	54.00	-6.24	AV
5457.60	V	40.65	27.59	40.04	53.10	74.00	-20.90	PK
5457.60	V	32.51	27.59	40.04	44.96	54.00	-9.04	AV
6367.20	V	37.24	27.49	42.69	52.44	74.00	-21.56	PK
6367.20	V	23.25	27.49	42.69	38.45	54.00	-15.55	AV
7276.80	V	34.78	27.43	45.31	52.66	74.00	-21.34	PK
7276.80	V	23.90	27.43	45.31	41.78	54.00	-12.22	AV
8186.40	V	35.49	27.29	46.66	54.86	74.00	-19.14	PK
8186.40	V	23.41	27.29	46.66	42.78	54.00	-11.22	AV
9096.00	V	36.20	27.06	47.89	57.03	74.00	-16.97	PK
9096.00	V	23.90	27.06	47.89	44.73	54.00	-9.27	AV

Remark : Corrected Level = Reading + Correction Factor – Preamp

Correction Factor = Antenna Factor + Cable Loss

* Mark indicated background noise level.

Channel 12 (913.8MHz)

Frequency	Antenna	Reading	Preamp	Correction Factor	Corrected Level	Limits	Margin	Det
(MHz)	Polarization	(dBuV)	(dB)	(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	Mode
1827.60	H	49.59	27.75	29.84	51.68	74.00	-22.32	PK
1827.60	H	45.57	27.75	29.84	47.66	54.00	-6.34	AV
2741.40	H	37.92	27.92	33.08	43.08	74.00	-30.92	PK
2741.40	H	30.83	27.92	33.08	35.99	54.00	-18.01	AV
3655.20	H	46.01	27.75	35.15	53.41	74.00	-20.59	PK
3655.20	H	40.93	27.75	35.15	48.33	54.00	-5.67	AV
4569.00	H	40.12	27.76	37.84	50.20	74.00	-23.80	PK
4569.00	H	31.45	27.76	37.84	41.53	54.00	-12.47	AV
5482.80	H	43.07	27.58	40.09	55.58	74.00	-18.42	PK
5482.80	H	37.09	27.58	40.09	49.60	54.00	-4.40	AV
6396.60	H	43.52	27.48	42.78	58.82	74.00	-15.18	PK
6396.60	H	34.89	27.48	42.78	50.19	54.00	-3.81	AV
7310.40	H	35.21	27.42	45.41	53.20	74.00	-20.80	PK
7310.40	H	23.60	27.42	45.41	41.59	54.00	-12.41	AV
8224.20	H	35.99	27.28	46.64	55.35	74.00	-18.65	PK
8224.20	H	23.83	27.28	46.64	43.19	54.00	-10.81	AV
9138.00	H	34.90	27.05	47.99	55.84	74.00	-18.16	PK
9138.00	H	22.90	27.05	47.99	43.84	54.00	-10.16	AV
1827.60	V	52.60	27.75	29.84	54.69	74.00	-19.31	PK
1827.60	V	51.01	27.75	29.84	53.10	54.00	-0.90	AV
2741.40	V	42.65	27.92	33.08	47.81	74.00	-26.19	PK
2741.40	V	36.28	27.92	33.08	41.44	54.00	-12.56	AV
3655.20	V	50.77	27.75	35.15	58.17	74.00	-15.83	PK
3655.20	V	46.20	27.75	35.15	53.60	54.00	-0.40	AV
4569.00	V	43.18	27.76	37.84	53.26	74.00	-20.74	PK
4569.00	V	35.93	27.76	37.84	46.01	54.00	-7.99	AV
5482.80	V	42.32	27.58	40.09	54.83	74.00	-19.17	PK
5482.80	V	34.38	27.58	40.09	46.89	54.00	-7.11	AV
6396.60	V	35.69	27.48	42.78	50.99	74.00	-23.01	PK
6396.60	V	23.66	27.48	42.78	38.96	54.00	-15.04	AV
7310.40	V	34.85	27.42	45.41	52.84	74.00	-21.16	PK
7310.40	V	22.47	27.42	45.41	40.46	54.00	-13.54	AV
8224.20	V	35.70	27.28	46.64	55.06	74.00	-18.94	PK
8224.20	V	23.46	27.28	46.64	42.82	54.00	-11.18	AV
9138.00	V	35.68	27.05	47.99	56.62	74.00	-17.38	PK
9138.00	V	23.13	27.05	47.99	44.07	54.00	-9.93	AV

Remark : Corrected Level = Reading + Correction Factor – Preamp

Correction Factor = Antenna Factor + Cable Loss

* Mark indicated background noise level.

Channel 24 (918MHz)

Frequency	Antenna	Reading	Preamp	Correction Factor	Corrected Level	Limits	Margin	Det
(MHz)	Polarization	(dBuV)	(dB)	(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	Mode
1836.00	H	51.66	27.76	29.87	53.77	74.00	-20.23	PK
1836.00	H	38.00	27.76	29.87	40.11	54.00	-13.89	AV
2754.00	H	37.81	27.92	33.12	43.01	74.00	-30.99	PK
2754.00	H	29.11	27.92	33.12	34.31	54.00	-19.69	AV
3672.00	H	44.94	27.76	35.22	52.40	74.00	-21.60	PK
3672.00	H	40.24	27.76	35.22	47.70	54.00	-6.30	AV
4590.00	H	40.46	27.75	37.90	50.61	74.00	-23.39	PK
4590.00	H	29.60	27.75	37.90	39.75	54.00	-14.25	AV
5508.00	H	45.25	27.58	40.15	57.82	74.00	-16.18	PK
5508.00	H	39.16	27.58	40.15	51.73	54.00	-2.27	AV
6426.00	H	42.89	27.48	42.87	58.28	74.00	-15.72	PK
6426.00	H	34.62	27.48	42.87	50.01	54.00	-3.99	AV
7344.00	H	35.88	27.42	45.51	53.97	74.00	-20.03	PK
7344.00	H	23.42	27.42	45.51	41.51	54.00	-12.49	AV
8262.00	H	35.69	27.27	46.62	55.04	74.00	-18.96	PK
8262.00	H	23.20	27.27	46.62	42.55	54.00	-11.45	AV
9180.00	H	35.36	27.04	48.10	56.42	74.00	-17.58	PK
9180.00	H	23.25	27.04	48.10	44.31	54.00	-9.69	AV
1836.00	V	56.21	27.76	29.87	58.32	74.00	-15.68	PK
1836.00	V	49.81	27.76	29.87	51.92	54.00	-2.08	AV
2754.00	V	38.88	27.92	33.12	44.08	74.00	-29.92	PK
2754.00	V	30.86	27.92	33.12	36.06	54.00	-17.94	AV
3672.00	V	50.22	27.76	35.22	57.68	74.00	-16.32	PK
3672.00	V	45.72	27.76	35.22	53.18	54.00	-0.82	AV
4590.00	V	42.56	27.75	37.90	52.71	74.00	-21.29	PK
4590.00	V	34.73	27.75	37.90	44.88	54.00	-9.12	AV
5508.00	V	42.47	27.58	40.15	55.04	74.00	-18.96	PK
5508.00	V	35.94	27.58	40.15	48.51	54.00	-5.49	AV
6426.00	V	34.90	27.48	42.87	50.29	74.00	-23.71	PK
6426.00	V	23.14	27.48	42.87	38.53	54.00	-15.47	AV
7344.00	V	36.16	27.42	45.51	54.25	74.00	-19.75	PK
7344.00	V	23.00	27.42	45.51	41.09	54.00	-12.91	AV
8262.00	V	36.19	27.27	46.62	55.54	74.00	-18.46	PK
8262.00	V	23.20	27.27	46.62	42.55	54.00	-11.45	AV
9180.00	V	35.93	27.04	48.10	56.99	74.00	-17.01	PK
9180.00	V	23.03	27.04	48.10	44.09	54.00	-9.91	AV

Remark : Corrected Level = Reading + Correction Factor – Preamp

Correction Factor = Antenna Factor + Cable Loss

* Mark indicated background noise level.


10 AC Power Line Conducted Emission test

10.1 Limits

Frequency (MHz)	Quasi-Peak (dB μ V)	Average (dB μ V)
0.15 to 0.5	66 to 56	56 to 46
> 0.5 to 5	56	46
> 5 to 30	60	50

NOTE: The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 30 MHz.

10.2 Configuration of Measurement

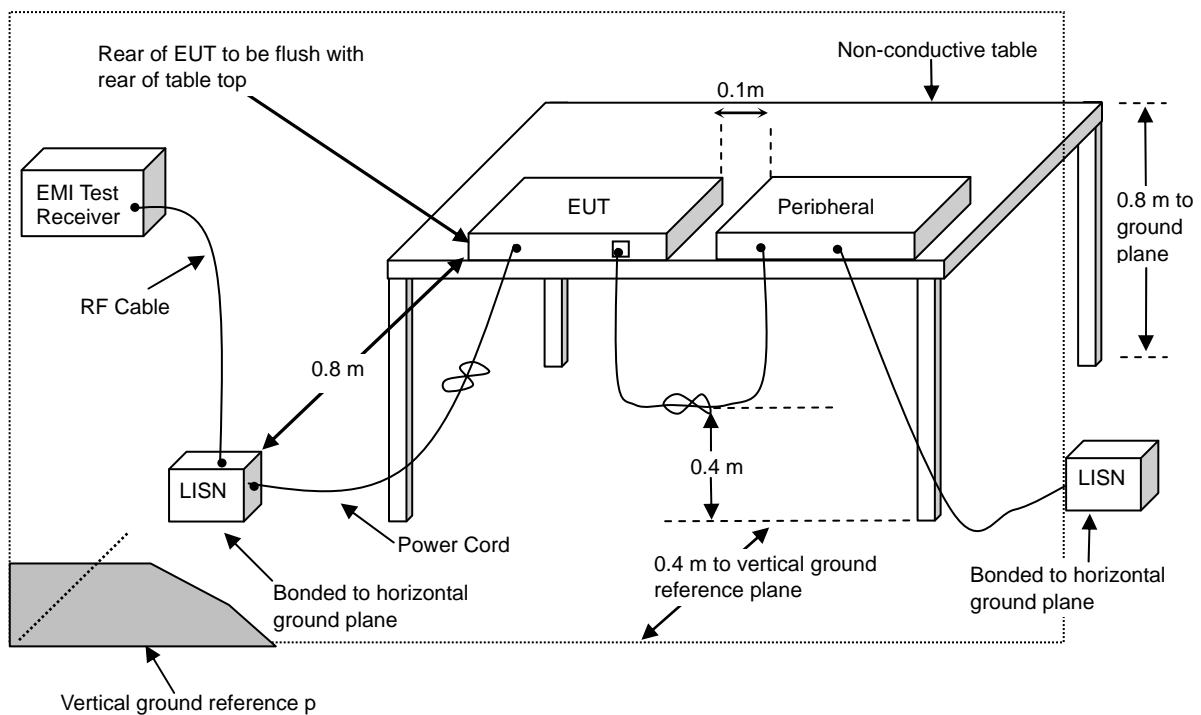

10.3 Test Procedures

The EUT was setup to ANSI C63.4, 2003; tested to FHSS test procedure of FCC Public Notice DA 00-705 for compliance to FCC 47CFR 15.247 requirements.

- 1) The EUT was placed 80cm height above ground on a non-conductive table and vertical conducting plane located 40cm to the rear of the EUT.
- 2) The EUT was connected to the main power through Line Impedance Stabilization Networks (LISN). This setup provided a 50ohm/50mH coupling impedance for the measuring equipment. The auxiliary equipment will place in secondary LISN.
- 3) Both sides (Line and Neutral) of AC line are checked for maximum conducted interference. In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.4/2003 on conducted measurement.

10.4 Test Result

PASS.

The final test data is shown as following pages.


Power Line Conducted Test Data

CLIENT: Nutek Corporation
 EUT: Transceiver
 MODEL: 5BCR14RE
 RATING: From PC
 COMMENT: charging mode

OPERATOR: Vic
 TEST SITE: Conducted 1
 POLARIZATION: Line
 TEMP/HUM: 24.5°C / 68%

Data:1 J:\E3_28\2015\Nutek.EM8

2015-11-23

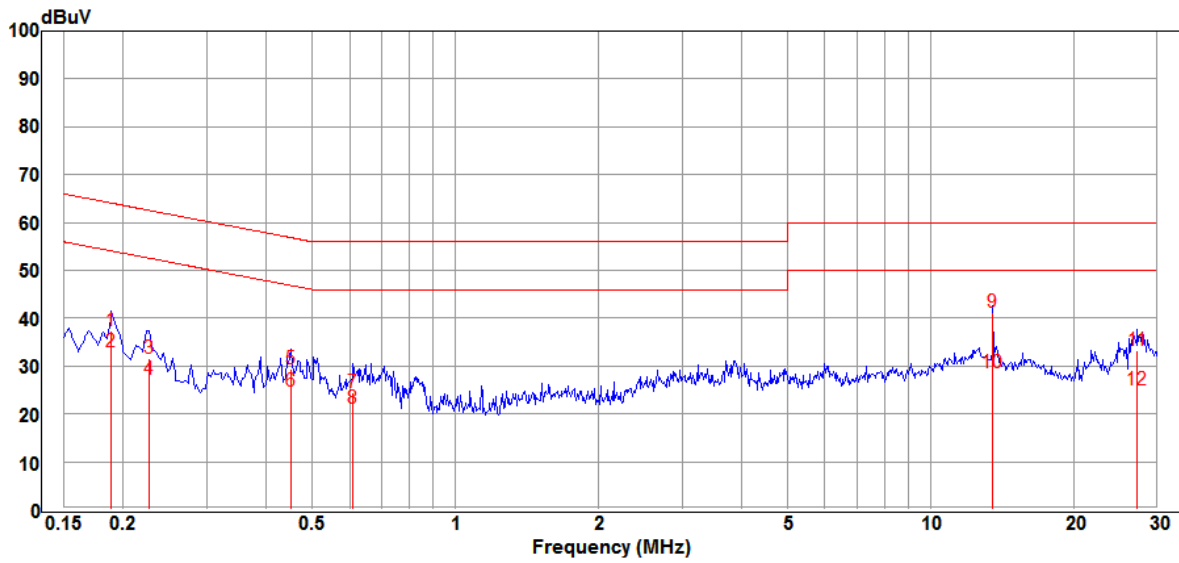

Item Mark	Freq. MHz	Reading dBuV	Factor dB	Level dBuV	Limit dBuV	Margin dB	Remark
1	0.189	37.05	0.28	37.33	64.06	-26.73	QP
2	0.189	32.65	0.28	32.93	54.06	-21.13	Average
3	0.228	31.21	0.28	31.49	62.52	-31.03	QP
4	0.228	27.02	0.28	27.30	52.52	-25.22	Average
5	0.452	29.11	0.29	29.40	56.85	-27.45	QP
6	0.452	24.34	0.29	24.63	46.85	-22.22	Average
7	0.611	24.19	0.29	24.48	56.00	-31.52	QP
8	0.611	20.81	0.29	21.10	46.00	-24.90	Average
9	13.551	40.44	0.77	41.21	60.00	-18.79	QP
10	13.551	27.74	0.77	28.51	50.00	-21.49	Average
11	27.271	31.97	1.27	33.24	60.00	-26.76	QP
12	27.271	23.85	1.27	25.12	50.00	-24.88	Average


Power Line Conducted Test Data

CLIENT: Nutek Corporation
 EUT: Transceiver
 MODEL: 5BCR14RE
 RATING: From PC
 COMMENT: charging mode

OPERATOR: Vic
 TEST SITE: Conducted 1
 POLARIZATION: Neutral
 TEMP/HUM: 24.5°C / 68%

Data:2 J:\E3_28\2015\Nutek.EM8

2015-11-23

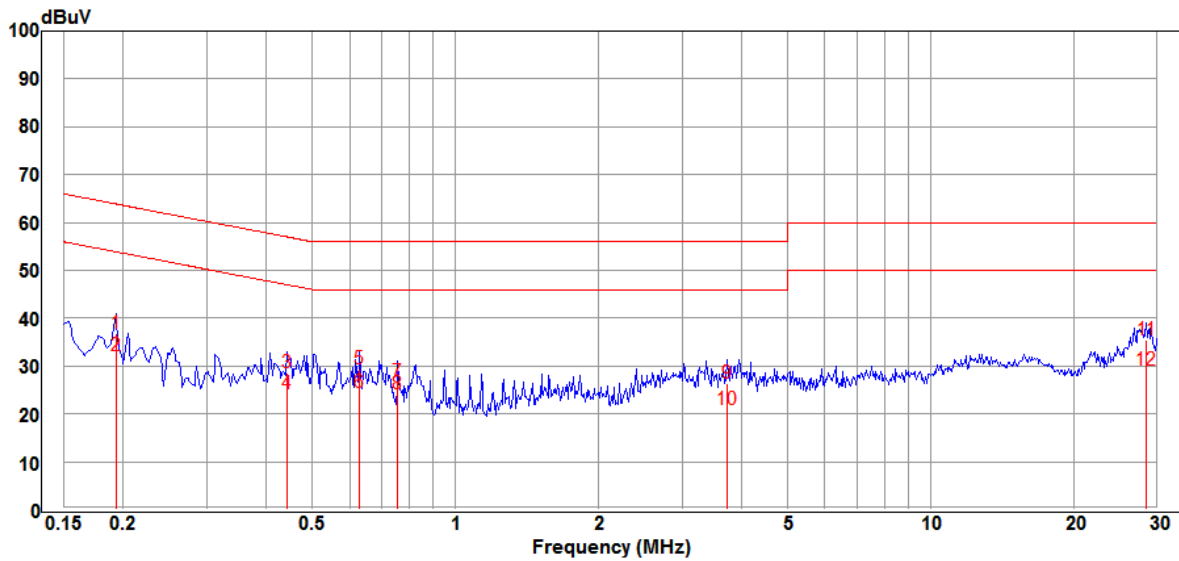

Item Mark	Freq. MHz	Reading dBuV	Factor dB	Level dBuV	Limit dBuV	Margin dB	Remark
1	0.193	36.67	0.27	36.94	63.89	-26.95	QP
2	0.193	31.75	0.27	32.02	53.89	-21.87	Average
3	0.442	28.27	0.27	28.54	57.02	-28.48	QP
4	0.442	23.93	0.27	24.20	47.02	-22.82	Average
5	0.630	29.08	0.28	29.36	56.00	-26.64	QP
6	0.630	24.24	0.28	24.52	46.00	-21.48	Average
7	0.759	26.34	0.28	26.62	56.00	-29.38	QP
8	0.759	23.89	0.28	24.17	46.00	-21.83	Average
9	3.740	26.13	0.39	26.52	56.00	-29.48	QP
10	3.740	20.40	0.39	20.79	46.00	-25.21	Average
11	28.452	34.20	1.34	35.54	60.00	-24.46	QP
12	28.452	27.66	1.34	29.00	50.00	-21.00	Average