



Willow Run (WR) Test Labs, Inc.
7117 Fieldcrest Dr.
Brighton, Michigan 48116 USA
Tel: (734) 252-9785
Fax: (734) 926-9785
e-mail: info@wrtest.com

Testing of

Electromagnetic Emissions

per

USA:	CFR Title 47, Part 2.1091;2.1093	(Exposure)
USA:	CFR Title 47, Part 15.247	(Emissions)
Canada:	ISED RSS-247/GENE	(Emissions)
Canada:	ISED RSS-102	(Exposure)

are herein reported for

Nutek Corporation 4360543

Test Report No.: 20170426-RPTVOXX100041Ar1

Copyright © 2017

Applicant/Provider:
Nutek Corporation

No.167, Lane 235, Bauchiau Rd., Shindian City Taipei 23145 Taiwan

Phone: +88 622 918 9478, Fax: +88 622 917 9069

Contact Person: Jason Wang; jason-w@nutek.com.tw

Data Recorded by: Joseph Brunett
Dr. Joseph Brunett, EMC-002790-NE

Reviewed by: Joseph Brunett
Dr. Joseph Brunett, EMC-002790-NE

Prepared by: Joseph Brunett
Dr. Joseph Brunett, EMC-002790-NE

Date of Issue: April 26, 2017

Results of testing completed on (or before) April 26, 2017 are as follows.

Emissions: The transmitter intentional emissions **COMPLY** with the regulatory limit(s) by no less than 7.5 dB.
Transmit chain spurious or harmonic emissions **COMPLY** by no less than 0.4 dB.

Revision History

Rev. No.	Date	Details	Revised By
r0	April 26, 2017	Initial Release.	J. Brunett
r1	May 18, 2017	Include integral power plot	J. Brunett

Contents

Revision History	2
Table of Contents	2
1 Test Report Scope and Limitations	5
1.1 Laboratory Authorization	5
1.2 Report Retention	5
1.3 Subcontracted Testing	5
1.4 Limitation of Results	5
1.5 Copyright	5
1.6 Endorsements	5
1.7 Test Location	6
1.8 Traceability and Equipment Used	6
2 Test Specifications and Procedures	7
2.1 Test Specification and General Procedures	7
3 Configuration and Identification of the Equipment Under Test	8
3.1 Description and Declarations	8
3.1.1 EUT Configuration	8
3.1.2 Modes of Operation	8
3.1.3 Variants	8
3.1.4 Test Samples	9
3.1.5 Functional Exerciser	9
3.1.6 Modifications Made	9
3.1.7 Production Intent	9
3.1.8 Declared Exemptions and Additional Product Notes	9
4 Emissions	10
4.1 General Test Procedures	10
4.1.1 Radiated Test Setup and Procedures	10
4.1.2 Conducted Emissions Test Setup and Procedures	12
4.1.3 Power Supply Variation	12
4.1.4 Thermal Variation	12
4.2 Intentional Emissions	13
4.2.1 Duty and Transmission Cycle, Pulsed Operation	13
4.2.2 Hopping Channel Dwell Time	13
4.2.3 Channel Bandwidth	15
4.2.4 Number of Hopping Channels	17
4.2.5 Channel Separation	17
4.2.6 Effective Isotropic Radiated Power	19
4.2.7 Exposure and Potential Health Hazard	21
4.3 Unintentional Emissions	22
4.3.1 Transmit Chain Spurious Emissions	22

4.3.2 Relative Transmit Chain Spurious Emissions 23

5 Measurement Uncertainty 24

List of Tables

1	Test Site List.	6
2	Equipment List.	6
3	EUT Declarations.	8
4	Pulsed Emission Characteristics (Duty Cycle).	13
5	Hopping Channel Dwell Time.	13
6	Intentional Emission Bandwidth.	15
7	Measured Number of Hopping Channels.	17
8	Measured Channel Separation.	17
9	Radiated Power Results.	19
10	Electromagnetic Field Exposure.	21
11	Transmit Chain Spurious Emissions.	22
12	Measurement Uncertainty.	24

List of Figures

1	Photos of EUT.	8
2	EUT Test Configuration Diagram.	9
3	Radiated Emissions Diagram of the EUT.	10
4	Radiated Emissions Test Setup Photograph(s).	11
5	Conducted RF Test Setup Photograph(s).	12
6	Example Plots of Duty Cycle and Channel Dwell Time.	14
7	Intentional Emission Bandwidth.	16
8	Measured Channel Separation.	18
9	Conducted RF Power Plots	20
10	Conducted Transmitter Emissions Measured.	23

1 Test Report Scope and Limitations

1.1 Laboratory Authorization

Test Facility description and attenuation characteristics are on file with the FCC Laboratory, Columbia, Maryland (FCC Reg. No: 688478) and with ISED Canada, Ottawa, ON (File Ref. No: IC8719A-1 and IC22227-1).

1.2 Report Retention

For equipment verified to comply with the regulations herein, the manufacturer is obliged to retain this report with the product records for the life of the product, and no less than ten years. A copy of this Report will remain on file with this laboratory until April 2027.

1.3 Subcontracted Testing

This report does not contain data produced under subcontract.

1.4 Limitation of Results

The test results contained in this report relate only to the item(s) tested. Any electrical or mechanical modification made to the test item subsequent to the test date shall invalidate the data presented in this report. Any electrical or mechanical modification made to the test item subsequent to this test date shall require reevaluation.

1.5 Copyright

This report shall not be reproduced, except in full, without the written approval of Willow Run (WR) Test Labs, Inc..

1.6 Endorsements

This report shall not be used to claim product endorsement by any accrediting, regulatory, or governmental agency.

1.7 Test Location

The EUT was fully tested by **Willow Run (WR) Test Labs, Inc.**, 7117 Fieldcrest Dr., Brighton, Michigan 48116 USA. Table 1 lists all sites employed herein. Specific test sites utilized are also listed in the test results sections of this report.

Table 1: Test Site List.

Description	Location	Quality Num.
OATS (3 meter)	8501 Beck Rd. Bldg 2227, Belleville MI 48111	OATSA

1.8 Traceability and Equipment Used

Pertinent test equipment used for measurements at this facility is listed in Table 2. The quality system employed at Willow Run (WR) Test Labs, Inc. has been established to ensure all equipment has a clearly identifiable classification, calibration expiry date, and that all calibrations are traceable to the SI through NIST, other recognized national laboratories, accepted fundamental or natural physical constants, ratio type of calibration, or by comparison to consensus standards.

Table 2: Equipment List.

Description	Manufacturer/Model	SN	Quality Num.	Last Cal By / Date Due
Spectrum Analyzer	Rohde & Schwarz / FSV30	101660	RSFSV30001	RS / May-2018
Spectrum Analyzer	Rohde & Schwarz / FSV4	101222	RSFSV4001	RS / Mar-2018
Biconical	EMCO / 93110B	9802-3039	BICEMCO01	Lib. Labs / Aug-2017
Log Periodic Antenna	EMCO / 3146	9305-3614	LOGEMCO01	Lib. Labs / Aug-2017
Quad Ridge Horn	ETS Lind. / 3164-04	00066988	HRNQR316401	Lib. Labs / Aug-2017
Quad Ridge Horn	Singer / A6100	C35200	HQR2TO18S01	Lib. Labs / Aug-2017
Quad Ridge Horn	Singer / A6100	C35200	HQR2TO18S01	Lib. Labs / Aug-2017

2 Test Specifications and Procedures

2.1 Test Specification and General Procedures

The ultimate goal of Nutek Corporation is to demonstrate that the Equipment Under Test (EUT) complies with the Rules and/or Directives below. Detailed in this report are the results of testing the Nutek Corporation 4360543 for compliance to:

Country/Region	Rules or Directive	Referenced Section(s)
United States	Code of Federal Regulations	CFR Title 47, Part 15.247
Canada	ISED Canada	ISED RSS-247/GENe

It has been determined that the equipment under test is subject to the rules and directives above at the date of this testing. In conjunction with these rules and directives, the following specifications and procedures are followed herein to demonstrate compliance (in whole or in part) with these regulations.

ANSI C63.4:2014	"Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz"
ANSI C63.10:2013 (USA)	"American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices"
FCC DA 00-705	"Filing and Measurement Guidelines for Frequency Hopping Spread Spectrum Systems"
CFR 47 2.1091/1093	"447498 D01 General RF Exposure Guidance v06: RF Exposure Procedures and Equipment Authorization Policies for Mobile and Portable Devices"
ISED Canada	"The Measurement of Occupied Bandwidth"
ISED Canada RSS-102	"Radio Frequency (RF) Exposure Compliance of Radiocommunication Apparatus (All Frequency Bands)"
ISED Canada SPR-002	"Supplementary Procedure for Assessing Compliance with RSS-102 Nerve Stimulation Exposure Limits."

3 Configuration and Identification of the Equipment Under Test

3.1 Description and Declarations

The EUT is a vehicular FHSS transceiver. The EUT is approximately 14 x 12 x 2 cm in dimension, and is depicted in Figure 1. It is powered by 13.4 VDC vehicular power system. This device is a wireless FHSS communication device for control of vehicle remote start functionality. Table 3 outlines provider declared EUT specifications.



Figure 1: Photos of EUT.

Table 3: EUT Declarations.

General Declarations			
Equipment Type:	FHSS Transceiver	Country of Origin:	Taiwan
Nominal Supply:	13.4 VDC	Oper. Temp Range:	-20°C to +85°C
Frequency Range:	903.9 – 923.5 MHz	Antenna Dimension:	Not Declared
Antenna Type:	Integral or Ext. Dipole	Antenna Gain:	3.1 dBi (Int), 2.1 dBi (Ext)
Number of Channels:	50	Channel Spacing:	400 kHz
Alignment Range:	Not Declared	Type of Modulation:	GFSK
United States			
FCC ID Number:	ELVATRRA	Classification:	FHSS
Canada			
IC Number:	3671B-43605430	Classification:	Spread Spectrum

3.1.1 EUT Configuration

The EUT is configured for testing as depicted in Figure 2.

3.1.2 Modes of Operation

The EUT is capable of only a single operating mode, as an FHSS transceiver employing GFSK modulation over 50 channels from 903.9MHz to 925.5 MHz with 400 kHz channel spacing. Only one antenna may be employed by the EUT at a time.

3.1.3 Variants

There is only a single variant of the EUT, as tested.

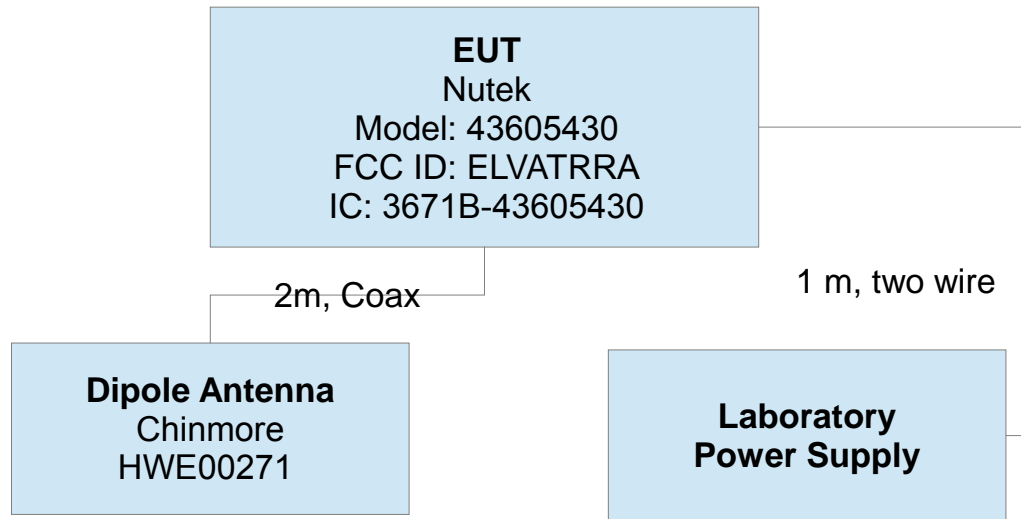


Figure 2: EUT Test Configuration Diagram.

3.1.4 Test Samples

Two samples in total were provided. One software modified sample capable of CW transmission on the Low, Middle, and High channels for the internal and external antennas and a normal sample paired with a keyfob, that was modified with an RF coaxial cable attached to the internal antenna output.

3.1.5 Functional Exerciser

Normal operating EUT functionality was verified by observation of transmitted signal.

3.1.6 Modifications Made

There were no modifications made to the EUT by this laboratory.

3.1.7 Production Intent

The EUT appears to be a production ready sample.

3.1.8 Declared Exemptions and Additional Product Notes

The EUT is permanently installed in a transportation vehicle. As such, digital emissions are exempt from US and Canadian digital emissions regulations (per FCC 15.103(a) and ISED correspondence on ICES-003). There is an external antenna port populated on the device to allow for a manufacturer supplied alternative antenna to be used in the vehicle. The transceiver will switch over to use the antenna populating the external port only if a proper DC return level is detected on the antenna port. This prevents use of any antenna other than the one supplied by the manufacturer from being used. The EUT employs a unique antenna connector (Hirose GT21T-1S-HU).

4 Emissions

4.1 General Test Procedures

4.1.1 Radiated Test Setup and Procedures

Radiated electromagnetic emissions from the EUT are first pre-scanned in our shielded anechoic chamber or GTEM test cell. Spectrum and modulation characteristics of all emissions are recorded. Instrumentation, including spectrum analyzers and other test equipment as detailed in Section 1.7 are employed. After pre-scan, emission measurements are made on the test site of record. If the EUT connects to auxiliary equipment and is table or floor standing, the configurations prescribed in relevant test standards are followed. Alternatively, a layout closest to normal use (as declared by the provider) is employed if the resulting emissions appear to be worst-case in such a configuration. See Figure 3. All intentionally radiating elements that are not fixed-mounted in use are placed on the test table lying flat, on their side, and on their end (3-axes) and the resulting worst case emissions are recorded. If the EUT is fixed-mounted in use, measurements are made with the device oriented in the manner consistent with installation and then emissions are recorded.

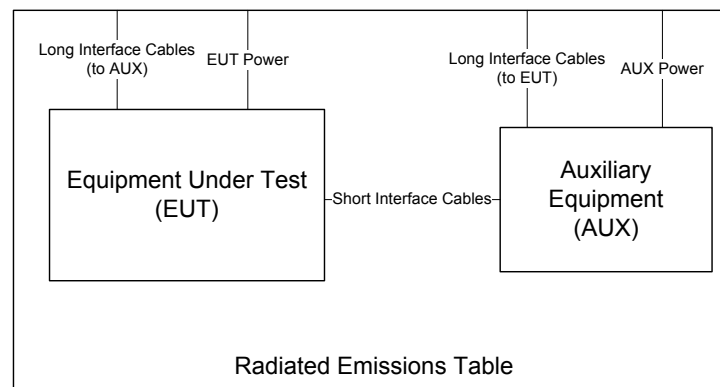


Figure 3: Radiated Emissions Diagram of the EUT.

If the EUT exhibits spurious emissions due to internal receiver circuitry, such emissions are measured with an appropriate carrier signal applied. For devices with intentional emissions below 30 MHz, a shielded loop antenna is used. It is placed at a 1 meter receive height. Emissions between 30 MHz and 1 GHz are measured using tuned dipoles and/or calibrated broadband antennas. For both horizontal and vertical polarizations, the test antenna is raised and lowered from 1 to 4 m in height until a maximum emission level is detected. The EUT is then rotated through 360° in azimuth until the highest emission is detected. The test antenna is then raised and lowered one last time from 1 to 4 m and the worst case value is recorded. Emissions above 1 GHz are characterized using standard gain horn or broadband ridge-horn antennas on our OATS with a 4 × 5 m rectangle of H-4 absorber placed over the ground screen covering the OATS ground screen. Care is taken to ensure that test receiver resolution and video bandwidths meet the regulatory requirements, and that the emission bandwidth of the EUT is not reduced. Photographs of the test setup employed are depicted in Figure 4.

Where regulations allow for direct measurement of field strength, power values (dBm) measured on the test receiver / analyzer are converted to dBμV/m at the regulatory distance, using

$$E_{dist} = 107 + P_R + K_A - K_G + K_E - C_F$$

where P_R is the power recorded on spectrum analyzer, in dBm, K_A is the test antenna factor in dB/m, K_G is the combined pre-amplifier gain and cable loss in dB, K_E is duty correction factor (when applicable) in dB, and C_F is a distance conversion (employed only if limits are specified at alternate distance) in dB. This field strength value is then compared with the regulatory limit. If effective isotropic radiated power (EIRP) is computed, it is computed as

$$EIRP(dBm) = E_{3m}(dB\mu V/m) - 95.2.$$

When presenting data at each frequency, the highest measured emission under all possible EUT orientations (3-axes) is reported.

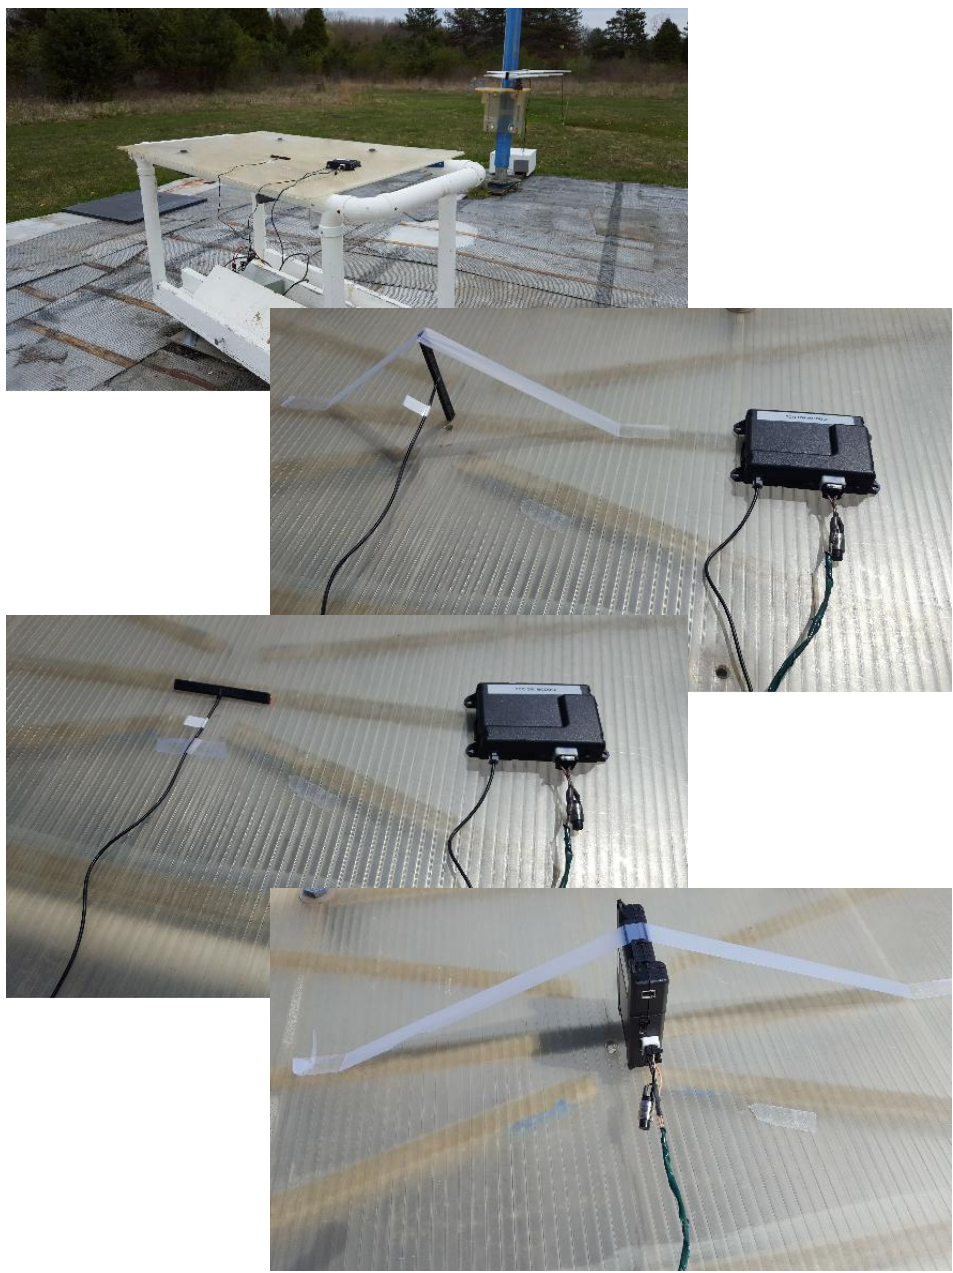


Figure 4: Radiated Emissions Test Setup Photograph(s).

4.1.2 Conducted Emissions Test Setup and Procedures

Transmit Antenna Port Conducted Emissions At least one sample EUT supplied for testing was provided with a 50Ω antenna port. Conducted transmit chain emissions measurements (where applicable) are made by connecting the EUT antenna port directly to the test receiver port. Photographs of the test setup employed are depicted in Figure 5.



Figure 5: Conducted RF Test Setup Photograph(s).

Vehicle Power Conducted Spurious The EUT is not subject to power line conducted emissions regulations as it is powered solely by the vehicle power system for use in said motor vehicle.

4.1.3 Power Supply Variation

Tests at extreme supply voltages are made if required by the the procedures specified in the test standard, and results of this testing are detailed in this report.

4.1.4 Thermal Variation

Tests at extreme temperatures were not performed for this device.

4.2 Intentional Emissions

4.2.1 Duty and Transmission Cycle, Pulsed Operation

The details and results of testing the EUT for pulsed operation are summarized in Table 4.

Table 4: Pulsed Emission Characteristics (Duty Cycle).

Frequency Range 914 MHz 901MHz to 929 MHz	Det Pk Pk	IFBW 100 kHz 28 MHz	VBW 300 kHz 28 MHz	Test Date: Test Engineer: EUT Meas. Distance:	16-Apr-17 Joseph Brunett Nutek IVU FoMoCo Conducted
--	------------------------	----------------------------------	---------------------------------	--	--

Pulsed Operation / Duty Cycle								
Transmit Mode	Symbol Rate (Msym/s)	Mod. / Data Rate (Mbps)	Voltage (V)	Observation Freq (MHz)	Tx Cycle Time* (ms)	On-Time** (ms)	Duty Cycle (%)	Single Channel Duty Correction (dB)
Hopping	-	GFSK	13.4	913.9	>100	62.5	62.5	4.1
Transmit Mode	Symbol Rate (Msym/s)	Mod. / Data Rate (Mbps)	Voltage (V)	Observation Freq (MHz)	Exposure Window (min)	On-Time*** (s)	Duty Cycle (%)	Exposure Duty Correction (dB)
Hopping	-	GFSK	13.4	Full Band	6.0	7.2	2.006	17.0

* For a single remote button press, the EUT's response hopping transmission only traverses each channel twice, thus only two frames are observed.

** Worst case observed on-time at a single channel (same on average for all channels in pseudo-random FHSS protocol).

*** Worst case observed on-time over all channels upon single remote activation (button press).

Equipment Used: RSFSV30001

4.2.2 Hopping Channel Dwell Time

The average time of occupancy on any hopping channel must not be greater than 0.4 seconds within a 20 second period for FHSS device with 50 operating channels. For this test, the EUT was set for data transmission with hopping enabled. Results of this testing are depicted in Table 5. Plots showing example measurements made

Table 5: Hopping Channel Dwell Time.

Frequency Range 25 MHz f 1 000 MHz f > 1 000 MHz	Det Pk/QPk Pk	IF Bandwidth 120 kHz 1 MHz	Video Bandwidth 300 kHz 3 MHz	Test Date: Test Engineer: EUT: Meas. Distance:	16-Apr-17 Joseph Brunett Nutek IVU FoMoCo Conducted
---	----------------------------	---	--	---	--

Dwell Time								
Mode	Frequency (MHz)	# Bursts #	Observation Time (sec)	Window (sec)	Active Time (sec)	Total On Time** (sec)	Limit (sec)	Pass/Fail
Hopping	903.9	1	10.0	20.0	0.1875	0.3750	<0.4	Pass
	913.9	1	10.0	20.0	0.1250	0.2500	<0.4	Pass
	923.5	1	10.0	20.0	0.1875	0.3750	<0.4	Pass

* Dwell Time Observed with EUT automatically activated hopping.

** Only 2-3 frames occur per channel in the hopping sequence for a single automatic activation in a 10 second window.

Equipment Used: RSFSV30001

to obtain these values are provided in Figure 6.

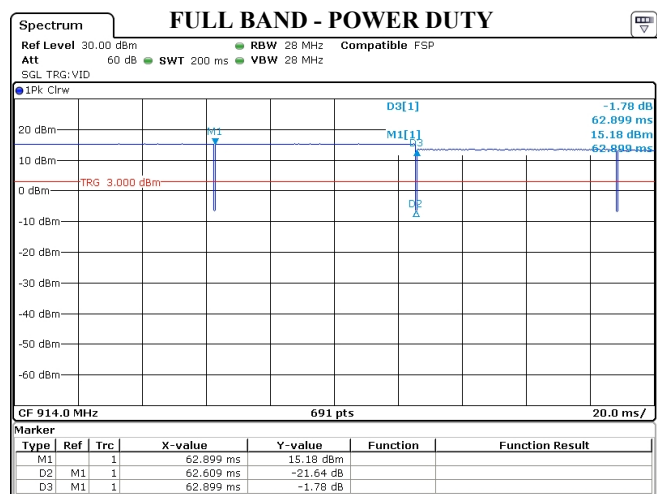
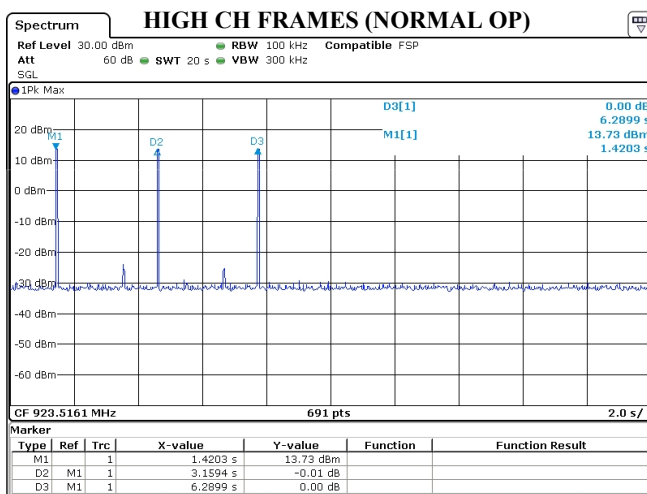
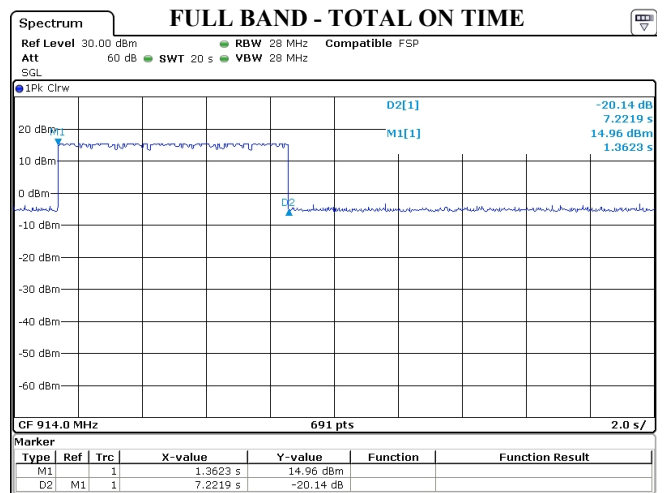
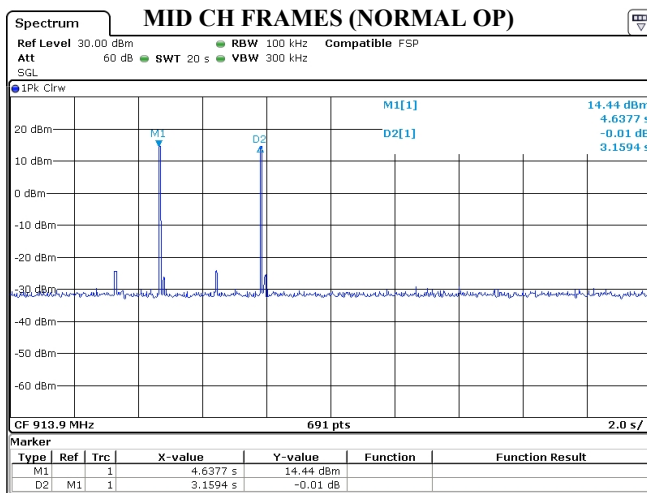
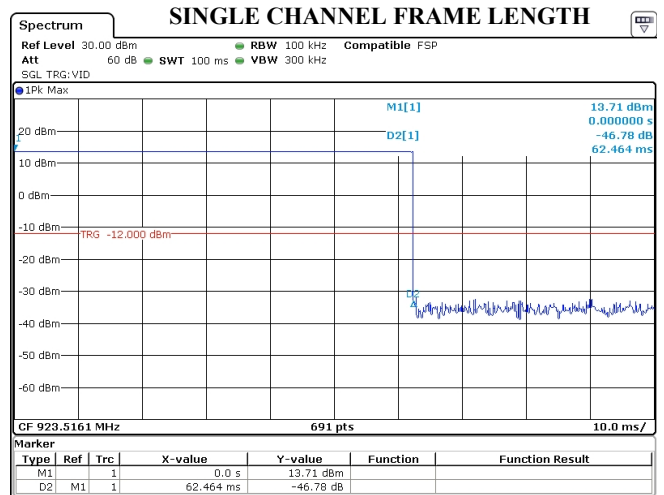
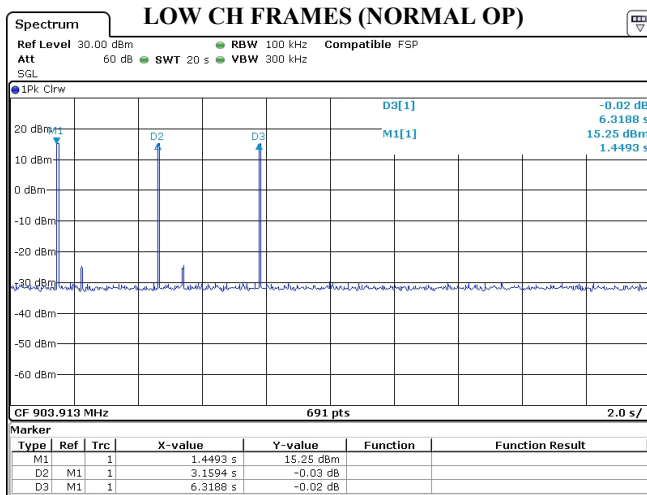


Figure 6: Example Plots of Duty Cycle and Channel Dwell Time.

4.2.3 Channel Bandwidth

For this test, the EUT was set continuous data transmission (hopping disabled) in each modulation. The 20-dB bandwidth as well as 99% emission bandwidth were measured for the low, middle, and high channels. Results of these measurements are shown in Table 6. Plots showing example measurements employed to obtain this data are provided in Figure 8.

Table 6: Intentional Emission Bandwidth.

Frequency Range	Det	IFBW	VBW	Test Date:	04/17/17
f > 1 000 MHz	Pk	30 kHz	100 kHz	Test Engineer:	Joseph Brunett
f > 1 000 MHz	Pk	30 kHz	100 kHz	EUT	Nutek IVU FoMoCo
				Meas. Distance:	Conducted

Occupied Bandwidth									
Transmit Mode	Symbol Rate (Msym/s)	Data Rate (Mbps)	Voltage (V)	Oper. Freq (MHz)	6 dB BW (kHz)	6 dB BW Limit (MHz)	99% OBW (kHz)	20 dB BW (kHz)	Comments
GFSK	-	-	13.4	903.9	47.80	-	90.764	95.76	
				913.9	48.58	-	93.163	95.87	
				923.9	49.20	-	87.365	92.76	

Equipment Used: RSFSV30001

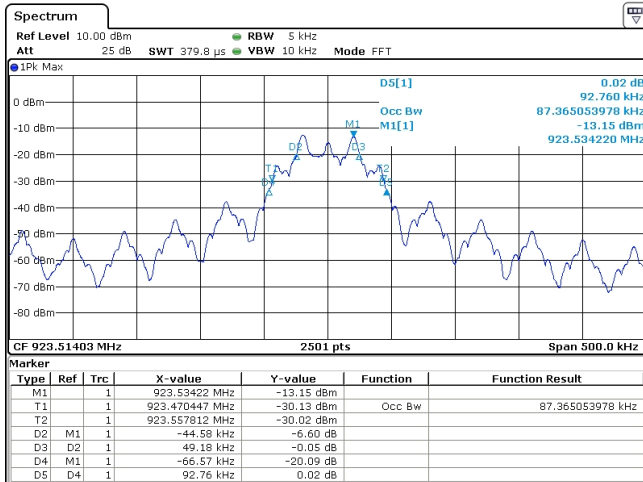
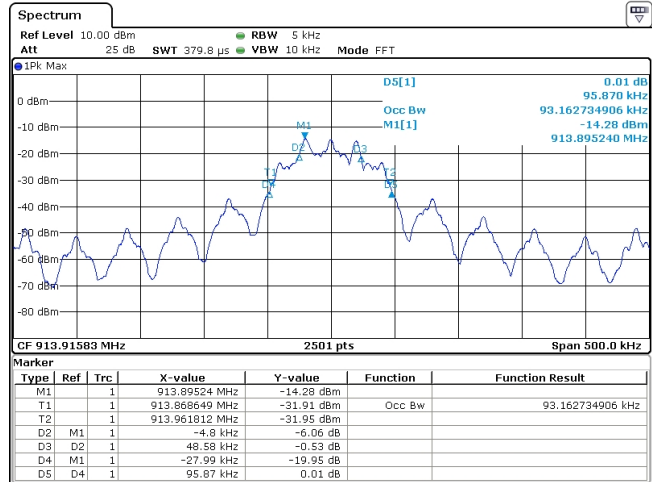
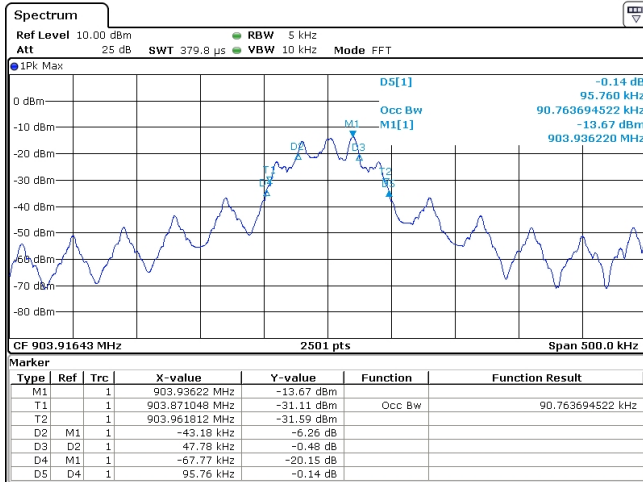


Figure 7: Intentional Emission Bandwidth.

4.2.4 Number of Hopping Channels

For this test, the EUT was enabled for data transmission with hopping. The number of channels measured is reported here in Table 7.

Table 7: Measured Number of Hopping Channels.

Frequency Range	Det	IF Bandwidth	Video Bandwidth	Test Date:	17-Apr-17
25 MHz f 1 000 MHz	Pk/QPk	100/120 kHz	300 kHz	Test Engineer:	Joseph Brunett
f > 1 000 MHz	Pk	100 kHz	3 MHz	EUT:	Nutek IVU FoMoCo
				Meas. Distance:	Conducted

Number of Hopping Channels						
Mode	Start Frequency (MHz)	Stop Frequency (MHz)	Number of Channels Observed (#)	Total Number (#)	Limit (#)	Pass/Fail
Hopping	902.0	928.0	50	50	50.0	Pass

Equipment Used: RSFSV30001

4.2.5 Channel Separation

For this test, the EUT was enabled for data transmission with hopping. The Carrier Separation was measured for low, mid, and high channels. Results of these measurements are shown in Table 8.

Table 8: Measured Channel Separation.

Frequency Range	Det	IF Bandwidth	Video Bandwidth	Test Date:	17-Apr-17
25 MHz f 1 000 MHz	Pk/QPk	100/120 kHz	300 kHz	Test Engineer:	Joseph Brunett
f > 1 000 MHz	Pk	100 kHz	3 MHz	EUT	Nutek IVU FoMoCo
				Meas. Distance:	Conducted

Hopping Frequency Separation					
Mod	Low Channel (MHz)	High Channel (MHz)	Separation (kHz)	Min. Separation Limit (kHz)	Pass/Fail
GFSK	903.9	904.3	400.640	95.87	Pass
	914.0	914.4	400.160	95.87	Pass
	923.1	923.5	400.160	95.87	Pass

* Channel Separation Observed with the Device hopping over all available channels.

Equipment Used: RSFSV30001

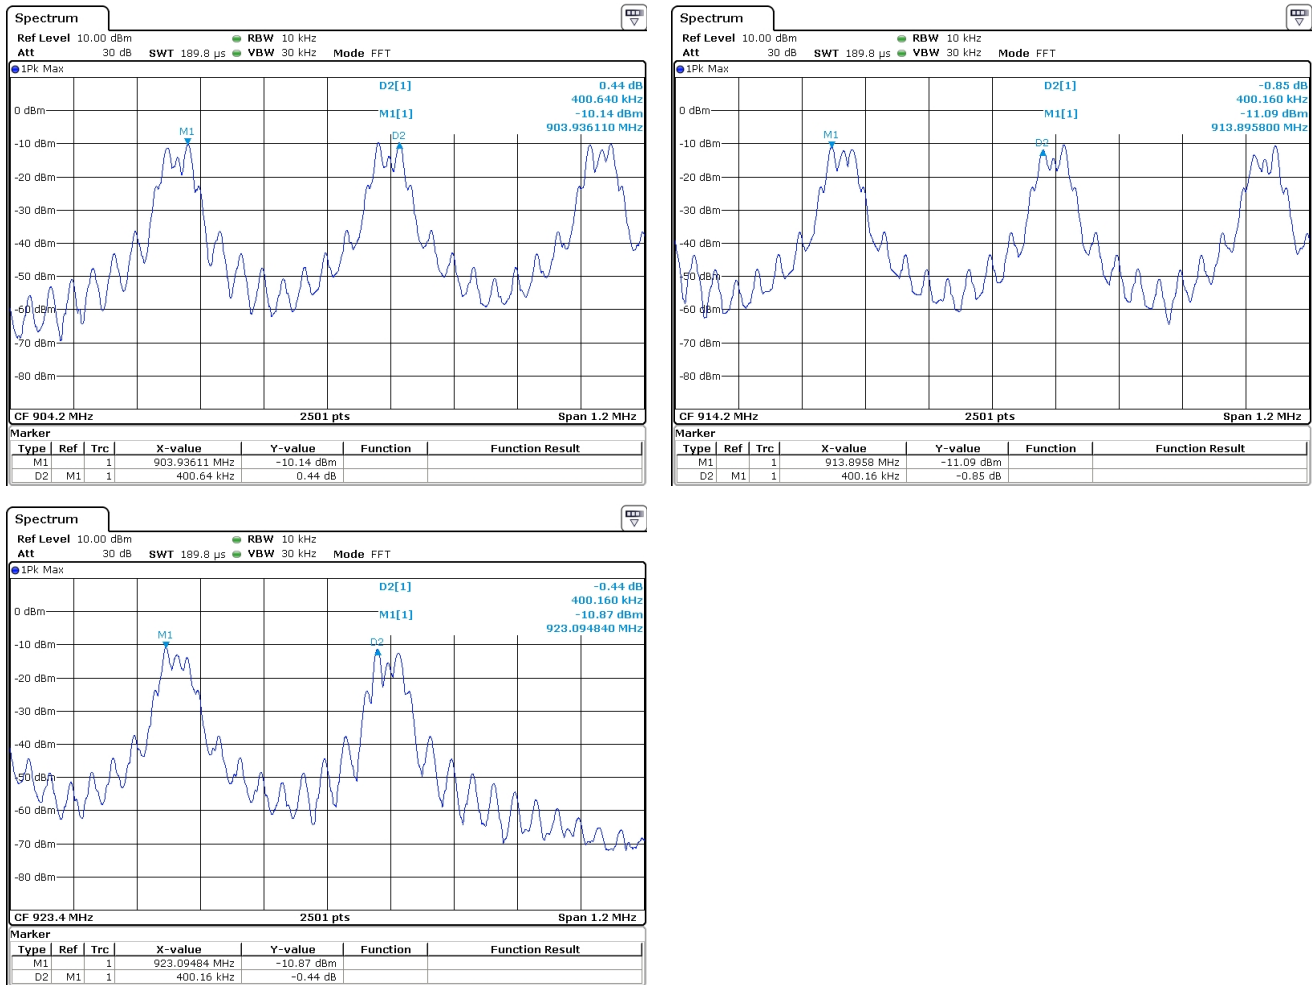


Figure 8: Measured Channel Separation.

4.2.6 Effective Isotropic Radiated Power

The EUT's radiated power is computed from antenna port conducted power measurements and the gain of the EUT antenna(s). Where the EUT is not sold with an antenna connector, a modified product has been provided including such. Peak conducted output power was measured directly from the EUT at the port where the antenna attaches. The test receiver bandwidth was set to be greater than the measured emission bandwidth of the EUT to capture the true peak. Antenna gain is either provided directly by the antenna manufacturer or measured by comparison between calculated EIRP and conducted output power. Table 9 details the results of these measurements. Plots showing conducted measurements made are depicted in Figure 9.

Table 9: Radiated Power Results.

Frequency Range	Det	IF Bandwidth	Video Bandwidth	Test Date:	21-Apr-17
25 MHz f 1 000 MHz	Pk/QPk	120 kHz	300 kHz	Test Engineer:	Joseph Brunett
f > 1 000 MHz	Pk/Avg	3 MHz	3 MHz	EUT:	Nutek IVU FoMoCo
Equipment Used: RSFSV30001				Meas. Distance:	3m

#	Antenna	Channel	Freq. MHz	Ant. Used	Ant. Pol.	Pr (Pk)** (dBm)	Ka (dB/m)	Kg (dB)	EIRP (Pk) (dBm)	Pout* (Pk) (dBm)	Ant Gain (dBi)	EIRP (Avg) Limit (dBm)	FCC/IC
													Pass (dB)
1	Internal	1	903.9	LOGEMCO01	H	-17.2	22.6	-4.8	22.0	15.4	6.6	30.0	8.0
2		1	903.9	LOGEMCO01	V	-19.9	22.6	-4.8	19.3	15.4	3.9	30.0	10.7
3		25	913.9	LOGEMCO01	H	-17.4	22.7	-4.8	21.9	14.4	7.5	30.0	8.1
4		25	913.9	LOGEMCO01	V	-20.6	22.7	-4.8	18.7	14.4	4.3	30.0	11.3
5		50	923.5	LOGEMCO01	H	-17.0	22.9	-4.8	22.5	13.8	8.7	30.0	7.5
6		50	923.5	LOGEMCO01	V	-20.7	22.9	-4.8	18.8	13.8	5.0	30.0	11.2
7													
8	External	1	903.9	LOGEMCO01	H	-21.9	22.6	-4.8	17.3	14.7	2.6	30.0	12.7
9		1	903.9	LOGEMCO01	V	-23.9	22.6	-4.8	15.3	14.7	0.6	30.0	14.7
10		25	913.9	LOGEMCO01	H	-20.1	22.7	-4.8	19.2	14.7	4.5	30.0	10.8
11		25	913.9	LOGEMCO01	V	-22.2	22.7	-4.8	17.1	14.7	2.4	30.0	12.9
12		50	923.5	LOGEMCO01	H	-21.0	22.9	-4.8	18.5	14.8	3.7	30.0	11.5
13		50	923.5	LOGEMCO01	V	-23.3	22.9	-4.8	16.2	14.8	1.4	30.0	13.8
14													
#	Antenna	Channel	Freq. MHz	Supply Voltage	Ant. Pol.	Pout* (Pk) (dBm)							
8	Internal	25	913.9	15.2	H/V	-17.5							
9			913.9	13.4	H/V	-17.4							
10			913.9	11.5	H/V	-17.4							

* Measured conducted from the radio using conducted test sample.
 ** Measured radiated at 3 meter distance. Peak power measured with IFBW > OBW

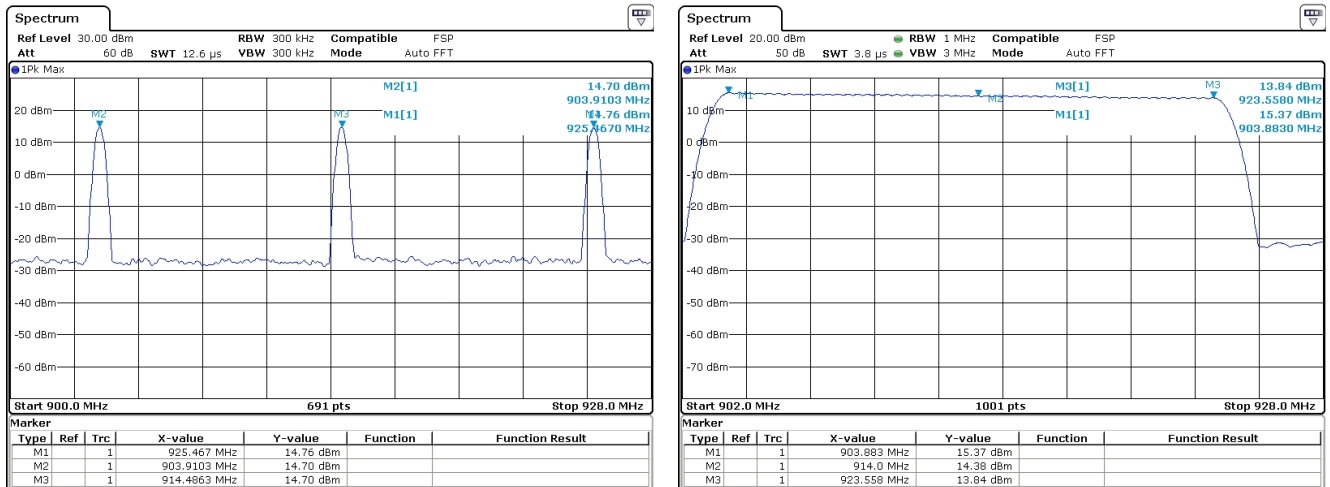


Figure 9: Conducted RF Power Plots

4.2.7 Exposure and Potential Health Hazard

To demonstrate compliance with with regulations that place limitations on human electromagnetic field exposure for both the general public and for workers, we compute EIRP from measured emission data. These levels are compared with limits placed by the directives and recommendations detailed in Section 2.1. Table 10 details the results of these computations.

Table 10: Electromagnetic Field Exposure.

USA REF: 2.1091/1093, 447498 D01 General RF Exposure Guidance v06	Test Date: 21-Apr-17
IC REF: RSS-102 Issue 5	Test Engineer: Joseph Brunett
Sep. Distance: >20cm	EUT: Nutek IVU FoMoCo
	EUT Mode: Hopping
	Meas. Distance: 3 meters

Freq. MHz	Pout* (Pk) dBm	EIRP* (Pk) dBm	Worst Case Source Based Time Averaged Po/EIRP(Pk)** mW	Power Density S @ 20cm mW/cm ²	Canada	USA
					Worst Case Source Based Time Averaged Threshold (Avg) mW	Power Density Limit S @ 20cm mW/cm ²
903.9	15.4	22.0	158.6	0.0315	1372.4	1.0
913.9	14.4	21.9	155.9	0.0310	1382.8	1.0
923.5	13.8	22.5	175.9	0.0350	1392.7	1.0

*As Measured / Computed from highest fundamental emission, see fundamental emission section of this report.

**Only RMS level is required, RMS/6min << Pk, Peak emission employed to demonstrate compliance.

4.3 Unintentional Emissions

4.3.1 Transmit Chain Spurious Emissions

The results for the measurement of transmit chain spurious emissions at the nominal voltage and temperature are provided in Table 11. Measurements are performed to 10 times the highest fundamental operating frequency.

Table 11: Transmit Chain Spurious Emissions.

Frequency Range	Det	IF Bandwidth	Video Bandwidth	Test Date:	21-Apr-17
25 MHz f 1 000 MHz	PK/QPk	120 kHz	300 kHz	Test Engineer:	Joseph Brunett
f > 1 000 MHz	Pk/Avg	1 MHz	3 MHz	EUT:	Nutek IVU FoMoCo
				Mode:	Hopping / CW
				Meas. Distance:	3m

Equipment Used: RSFSV30001

													FCC/IC	
#	Freq. Start MHz	Freq. Stop MHz	Ant. Used	Ant. Pol.	Pr (Pk/Avg) dBm	Pr (Qpk/Avg)* dBm	Ka dB/m	Kg dB	E3(Pk) dBµV/m	E3(Qpk/Avg) dBµV/m	E3 Avg/Qpk Lim dBµV/m	Pass dB	Comments	
1	Internal Antenna													
2	Fundamental Band Edge (Low Side)													
3	902.0	902.0	LOGEMCO01	H/V	-63.1		22.6	28.7	37.8		46.0	8.2	hopping	
4	Fundamental Band Edge (High Side)													
5	928.0	928.0	LOGEMCO01	H/V	-62.1		22.9	28.4	39.4		46.0	6.6	hopping	
6	Harmonic / Spurious Emissions													
7	1808.0	1808.0	HRNQR316401	H/V	-79.1	-83.2	29.0	-0.2	57.2	53.1	54.0	0.9		
8	1828.0	1828.0	HRNQR316401	H/V	-79.8	-83.9	29.1	-0.2	56.5	52.4	54.0	1.6		
9	1847.2	1847.2	HRNQR316401	H/V	-79.3	-83.4	29.2	-0.2	57.1	53.0	54.0	1.0		
10	2776.5	2776.5	HRNQR316401	H/V	-88.7	-92.8	35.2	-0.3	53.8	49.7	54.0	4.3		
11	3616.4	3616.4	HRNQR316401	H/V	-88.2	-92.3	35.3	-0.4	54.5	50.4	54.0	3.6		
12	4627.5	4627.5	HRNQR316401	H/V	-84.7	-88.8	33.0	-0.5	55.7	51.6	54.0	2.4		
13	5423.5	5423.5	HQR2TO18S01	H/V	-84.3	-88.4	33.5	-0.5	56.7	52.6	54.0	1.4		
14	5486.7	5486.7	HQR2TO18S01	H/V	-83.2	-87.3	33.3	-0.5	57.7	53.6	54.0	0.4		
15	5552.6	5552.6	HQR2TO18S01	H/V	-88.3	-92.4	33.2	-0.5	52.5	48.4	54.0	5.6		
16	4000.0	6000.0	HQR2TO18S01	H/V	-83.2	-87.3	33.3	-0.6	57.7	53.6	54.0	0.4		
17	6000.0	8400.0	HQR2TO18S01	H/V	-86.1	-90.2	32.8	-0.8	54.5	50.4	54.0	3.6		
18	8400.0	12500.0	HQR2TO18S01	H/V	-88.6	-92.7	34.3	-1.1	53.8	49.7	54.0	4.3		
19														
20														
21														
22	External Antenna													
23	Fundamental Band Edge (Low Side)													
24	902.0	902.0	LOGEMCO01	H/V	-63.1		22.6	28.7	37.8		46.0	8.2	hopping	
25	Fundamental Band Edge (High Side)													
26	928.0	928.0	LOGEMCO01	H/V	-62.1		22.9	28.4	39.4		46.0	6.6	hopping	
27	Harmonic / Spurious Emissions													
28	1808.0	1808.0	HRNQR316401	H/V	-92.5	-96.6	29.0	-0.2	43.8	39.7	54.0	14.3		
29	1828.0	1828.0	HRNQR316401	H/V	-89.8	-93.9	29.1	-0.2	46.5	42.4	54.0	11.6		
30	1847.2	1847.2	HRNQR316401	H/V	-87.0	-91.1	29.2	-0.2	49.4	45.3	54.0	8.7		
31	2776.5	2776.5	HRNQR316401	H/V	-89.1	-93.2	35.2	-0.3	53.4	49.3	54.0	4.7		
32	3616.4	3616.4	HRNQR316401	H/V	-89.1	-93.2	35.3	-0.4	53.6	49.5	54.0	4.5		
33	4627.5	4627.5	HRNQR316401	H/V	-84.0	-88.1	33.0	-0.5	56.4	52.3	54.0	1.7		
34	5423.5	5423.5	HQR2TO18S01	H/V	-83.9	-88.0	33.5	-0.5	57.1	53.0	54.0	1.0		
35	5486.7	5486.7	HQR2TO18S01	H/V	-85.0	-89.1	33.3	-0.5	55.9	51.8	54.0	2.2		
36	5552.6	5552.6	HQR2TO18S01	H/V	-88.3	-92.4	33.2	-0.5	52.5	48.4	54.0	5.6		
37	4000.0	6000.0	HQR2TO18S01	H/V	-83.9	-88.0	33.3	-0.6	57.0	52.9	54.0	1.1		
38	6000.0	8400.0	HQR2TO18S01	H/V	-85.7	-89.8	32.8	-0.8	54.9	50.8	54.0	3.2		
39	8400.0	12500.0	HQR2TO18S01	H/V	-88.5	-92.6	34.3	-1.1	53.9	49.8	54.0	4.2		
40														
41														

*Avg computed from Peak/Avg by duty cycle.

4.3.2 Relative Transmit Chain Spurious Emissions

The results for the measurement of transmit chain spurious emissions relative to the fundamental in a 100 kHz receiver bandwidth (at the nominal voltage and temperature) are provided in Figure 10 below.

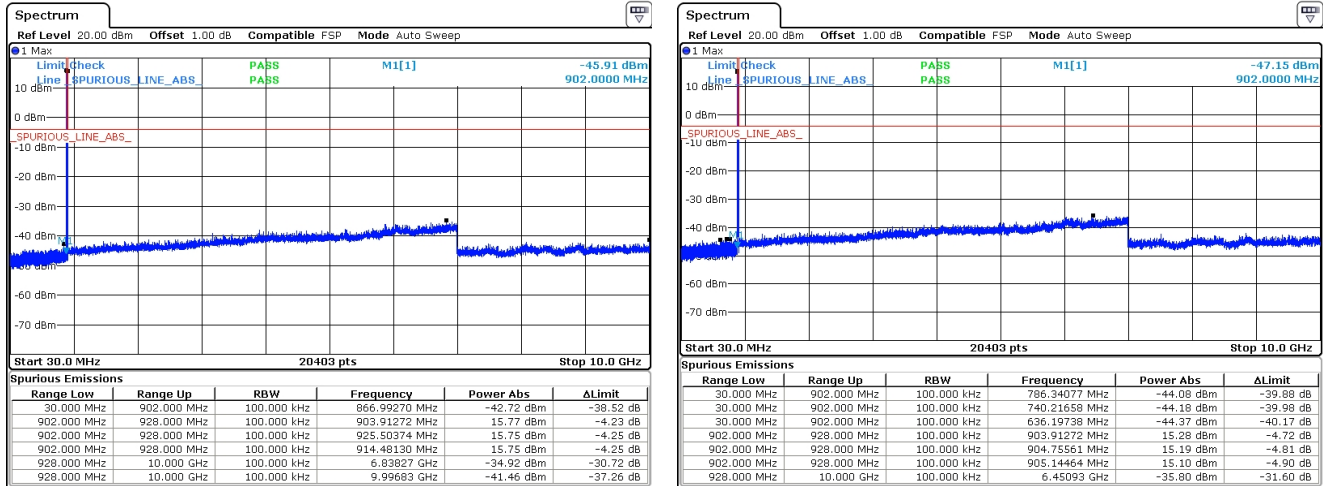


Figure 10: Conducted Transmitter Emissions Measured.

5 Measurement Uncertainty

The maximum values of measurement uncertainty for the laboratory test equipment and facilities associated with each test are given in the table below. This uncertainty is computed for a 95.45% confidence level based on a coverage factor of $k = 2$.

Table 12: Measurement Uncertainty.

Measured Parameter	Measurement Uncertainty [†]
Radio Frequency	$\pm(f_{Mkr}/10^7 + RBW/10 + (SPN/(PTS - 1))/2 + 1 \text{ Hz})$
Conducted Emm. Amplitude	$\pm 1.8 \text{ dB}$
Radiated Emm. Amplitude (30 – 200 MHz)	$\pm 2.7 \text{ dB}$
Radiated Emm. Amplitude (200 – 1000 MHz)	$\pm 2.5 \text{ dB}$
Radiated Emm. Amplitude ($f > 1000 \text{ MHz}$)	$\pm 3.7 \text{ dB}$
DC and Low Frequency Voltages	$\pm 2\%$
Temperature	$\pm 0.5^\circ\text{C}$
Humidity	$\pm 5\%$

[†]Ref: CISPR 16-4-2:2011+A1:2014