


Top Secret	Secret	Confidential	Unclassified	
REVISIONS				
REV.	ACC.	DESCRIPTION	DRN.	DATE
△				
△				

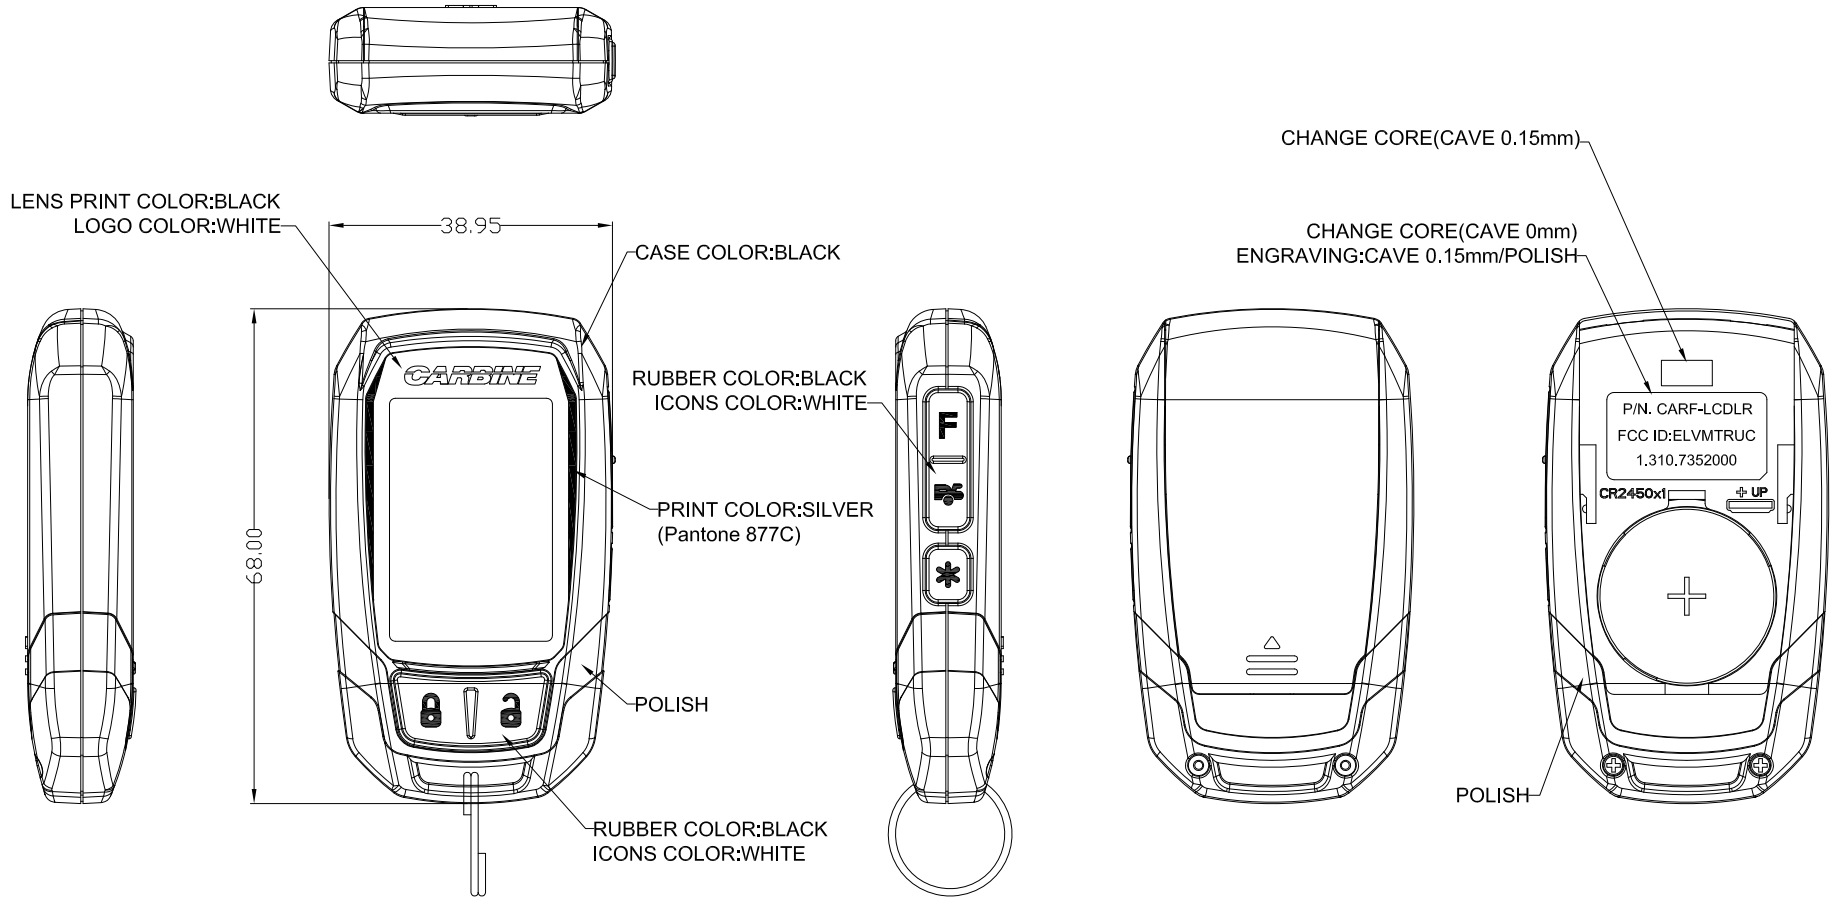

CHANGE CORE(CAVE 0.15mm)  
CHANGE CORE(CAVE 0mm)  
ENGRAVING:CAVE 0.15mm/POLISH

PART	P/N	PART	P/N
CASE	IANT1003	TOP KEY	NKNT10B0
BAT. COVER	IGNT1000	SIDE KEY	NKNT20C0
LENS	IRNT10C0	KEY CHAIN	MA150000
PORON	NTEB0002*2	SCREW	MIP01445*2

BODY MATERIAL : PC+ABS  
1. Texture is same as MT-11010  
2. Radius will be 0.2 if not specified.

\*Tolerance please refer specification of tolerance limits "C"

GRADE	INJECT TOLERANCE SPEC.		
	A	B	C
UNDER 6	± 0.08	± 0.16	± 0.30
6~30	± 0.10	± 0.20	± 0.40
30~120	± 0.20	± 0.40	± 0.80
120~300	± 0.40	± 0.80	± 2.00

SCALE: 1:1	UNIT: M/M	DRN BY Eason	DATE 2020/11/2	NUTEK CORPORATION		
MATERIAL	CHK BY YYS	DATE	11/2	TITLE CARF-LCDLR (LoRa)		
FINISH	APPD BY Victor	DATE	11/2	SIZE A4	DEPT	DRAWING NO 10810060-2
CODE	SHEET	OF				REV 0