

Appendix A: Test Results of 2.4GHz


APPENDIX A: TEST RESULTS OF 2.4GHZ	1
APPENDIX A.1: TEST RESULTS OF 20DB BANDWIDTH	2
Test Result	2
Test Graphs	3
APPENDIX A.2: TEST RESULTS OF 99% BANDWIDTH	4
Test Result	4
Test Graphs	5
APPENDIX A.3: TEST RESULTS OF CARRIER FREQUENCY SEPARATION	6
Test Result	6
Test Graphs	7
APPENDIX A.4: TEST RESULTS OF TIME OF OCCUPANCY	8
Test Result	8
Test Graphs	9
APPENDIX A.5: TEST RESULTS OF NUMBER OF HOPPING FREQUENCY	10
Test Result	10
Test Graphs	11
APPENDIX A.6: TEST RESULTS OF BAND EDGE MEASUREMENTS	12
Test Result	12
Test Graphs	13
APPENDIX A.7: TEST RESULTS OF CONDUCTED SPURIOUS EMISSION	15
Test Result	15
Test Graphs	16
APPENDIX A.8: TEST RESULTS OF RADIATED SPURIOUS EMISSIONS	19
30 MHz - 1GHz	19
1GHz - 18GHz	21
APPENDIX A.9: TEST RESULTS OF RADIATED EMISSIONS IN RESTRICTED BANDS	33
APPENDIX A.10: TEST RESULTS OF CONDUCTED EMISSION ON AC MAINS	37

Appendix A.1: Test Results of 20dB Bandwidth

Test Result

TestMode	Antenna	Channel	20db EBW[MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
2.4GHz	Ant1	2402	1.341	2401.331	2402.672	---	PASS
		2441	1.326	2440.331	2441.657	---	PASS
		2480	1.296	2479.358	2480.654	---	PASS

Test Graphs

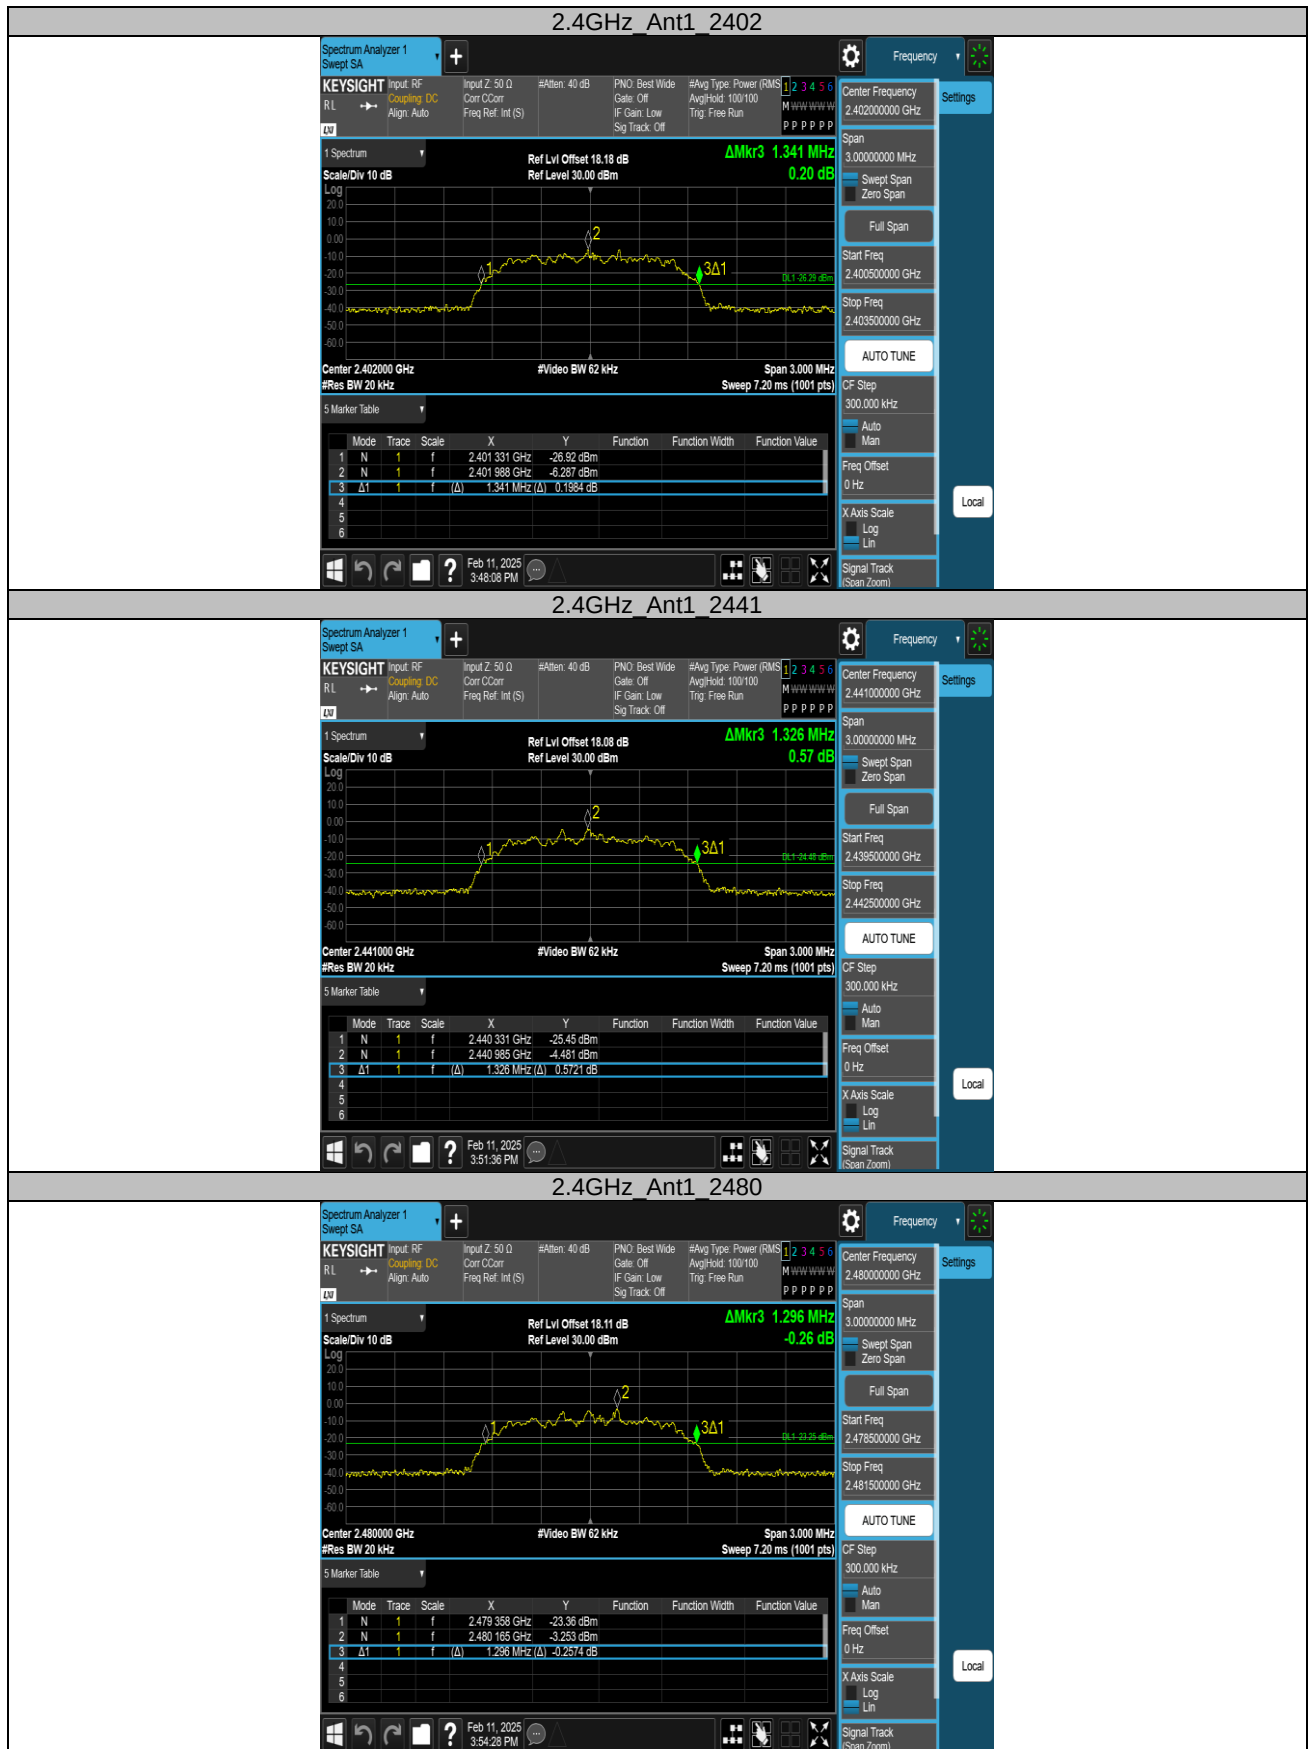

Appendix A.2: Test Results of 99% Bandwidth

Test Result

TestMode	Antenna	Channel	OCB [MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
2.4GHz	Ant1	2402	1.1919	2401.4007	2402.5926	---	PASS
		2441	1.1907	2440.3997	2441.5904	---	PASS
		2480	1.1916	2479.3985	2480.5901	---	PASS

Test Graphs




Appendix A.3: Test Results of Carrier Frequency Separation

Test Result

TestMode	Antenna	Channel	Result[MHz]	Limit[MHz]	Verdict
2.4GHz	Ant1	Hop	1.14	≥ 0.894	PASS

Test Graphs

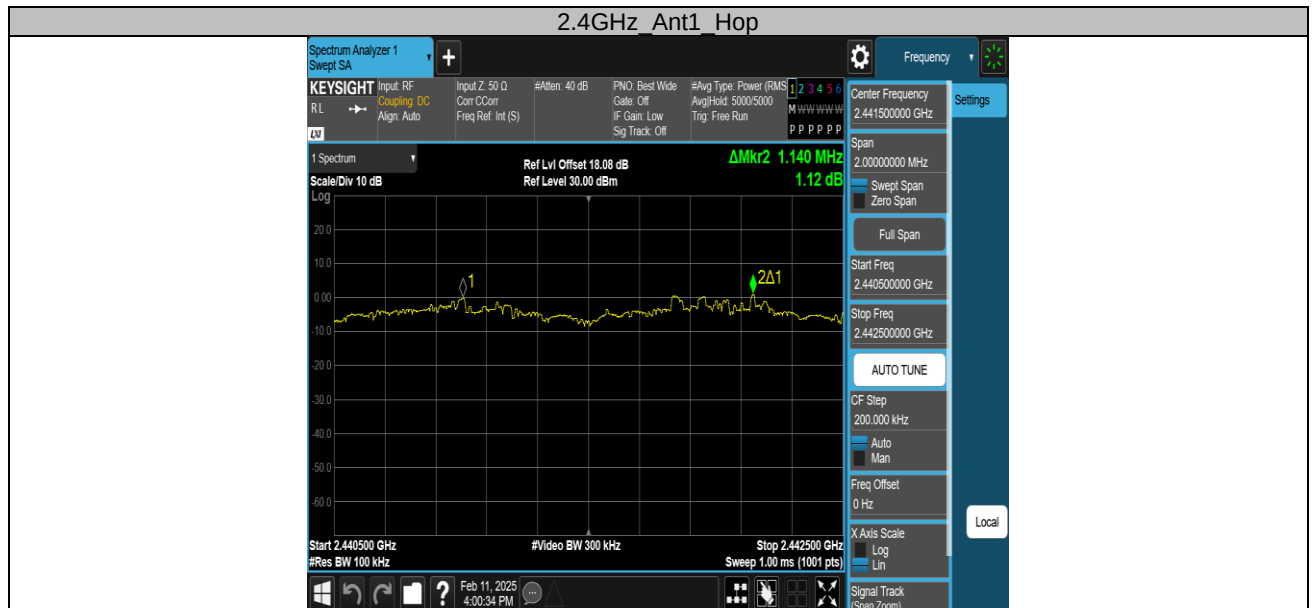

Appendix A.4: Test Results of Time of Occupancy

Test Result

TestMode	Antenna	Channel	BurstWidth [ms]	TotalHops [Num]	Result[s]	Limit[s]	Verdict
2.4GHz	Ant1	Hop	2.889	106	0.306	≤0.4	PASS

Test Graphs



Appendix A.5: Test Results of Number of Hopping Frequency

Test Result

TestMode	Antenna	Channel	Result[Num]	Limit[Num]	Verdict
2.4GHz	Ant1	Hop	79	≥15	PASS

Test Graphs




Appendix A.6: Test Results of Band Edge Measurements

Test Result

TestMode	Antenna	ChName	Channel	RefLevel [dBm]	Result [dBm]	Limit [dBm]	Verdict
2.4GHz	Ant1	Low	2402	0.76	-43.62	≤-19.24	PASS
		High	2480	0.59	-46.21	≤-19.41	PASS
2.4GHz	Ant1	Hopping	2402	-1.57	-41.75	≤-21.57	PASS
		Hopping	2480	1.48	-44.20	≤-18.52	PASS

Test Graphs

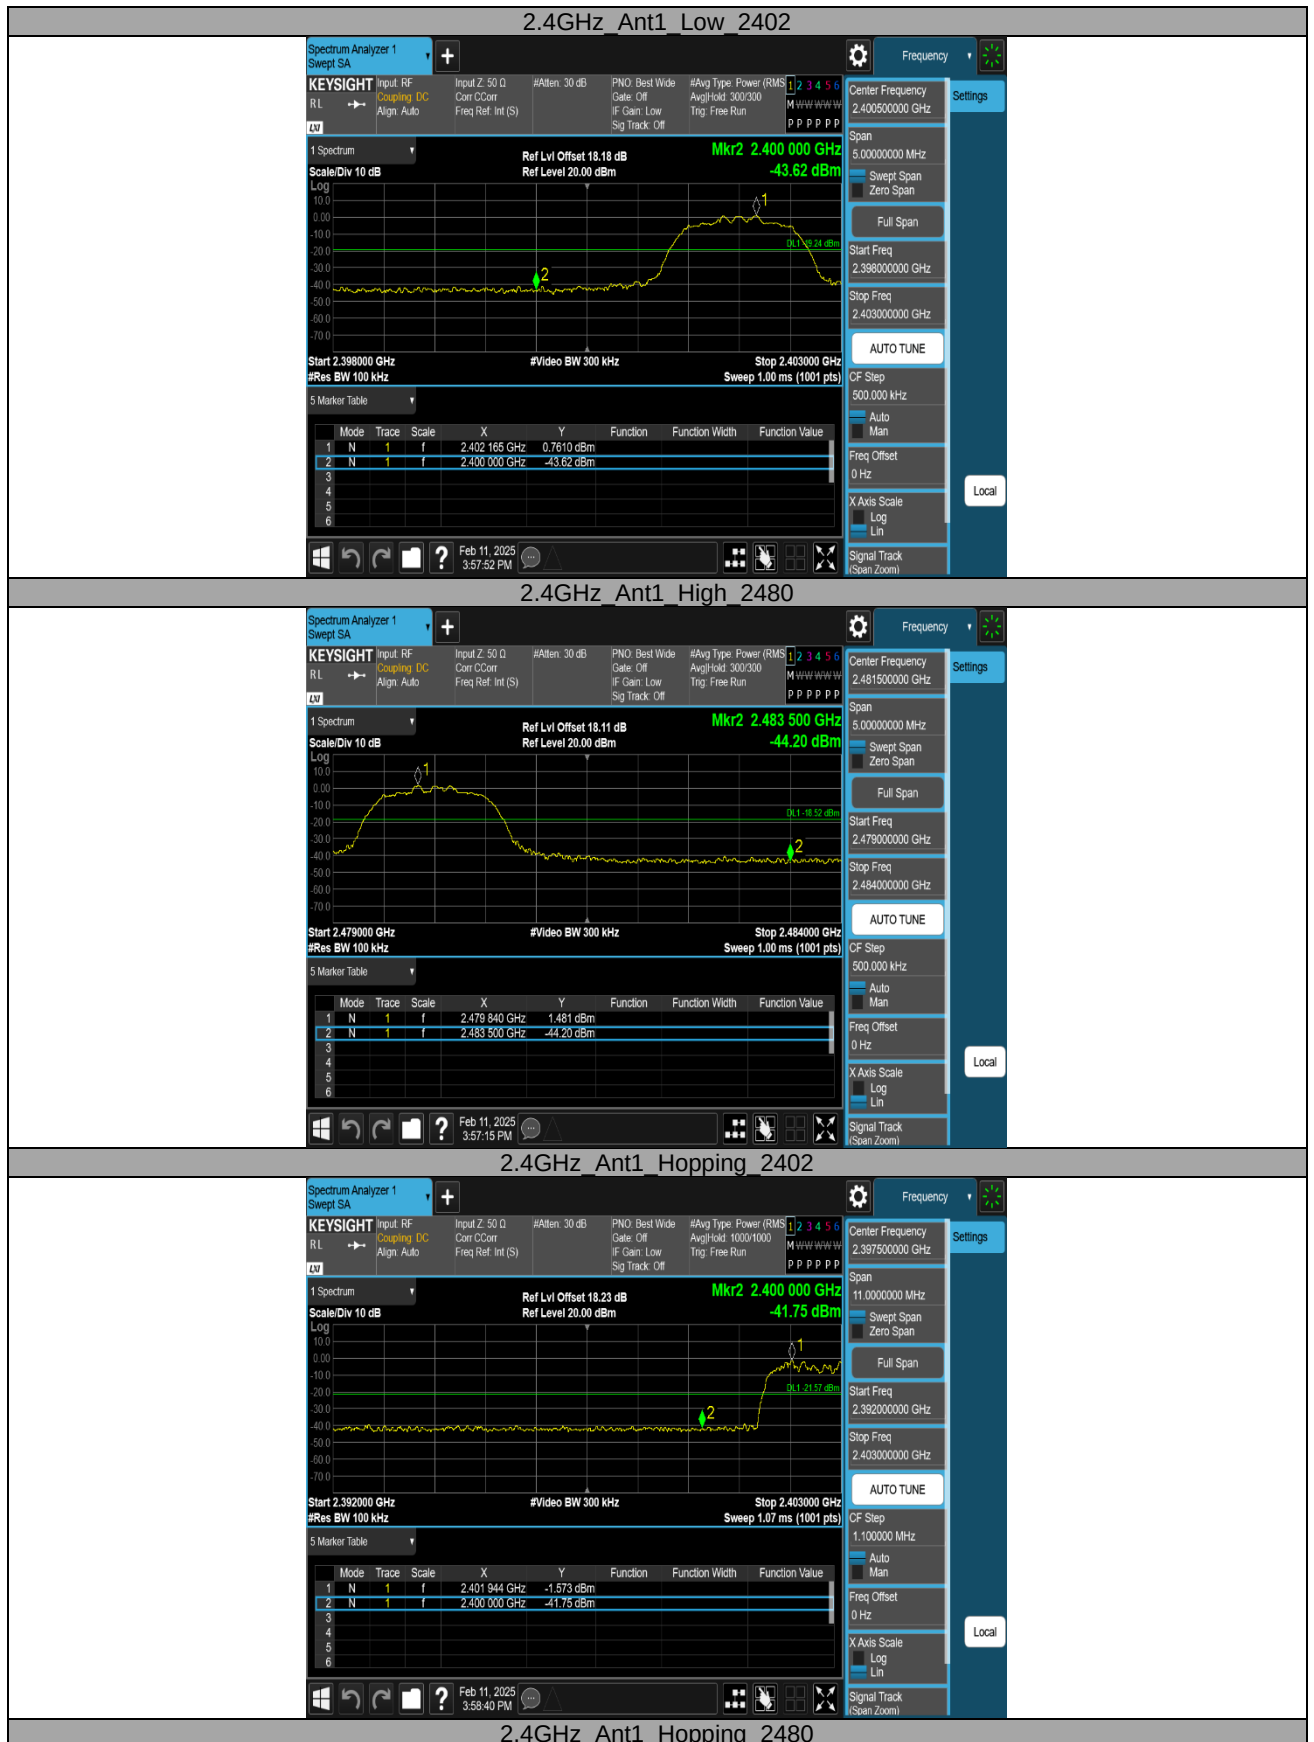





Appendix A.7: Test Results of Conducted Spurious Emission

Test Result

TestMode	Antenna	Channel	FreqRange [MHz]	RefLevel [dBm]	Result [dBm]	Limit [dBm]	Verdict
2.4GHz	Ant1	2402	Reference	0.54	0.54	---	PASS
			30~1000	0.54	-41.63	≤-19.46	PASS
			1000~26500	0.54	-31.9	≤-19.46	PASS
		2441	Reference	-0.91	-0.91	---	PASS
			30~1000	-0.91	-39.11	≤-20.91	PASS
			1000~26500	-0.91	-32.14	≤-20.91	PASS
		2480	Reference	-0.35	-0.35	---	PASS
			30~1000	-0.35	-40.78	≤-20.35	PASS
			1000~26500	-0.35	-31.71	≤-20.35	PASS

Test Graphs

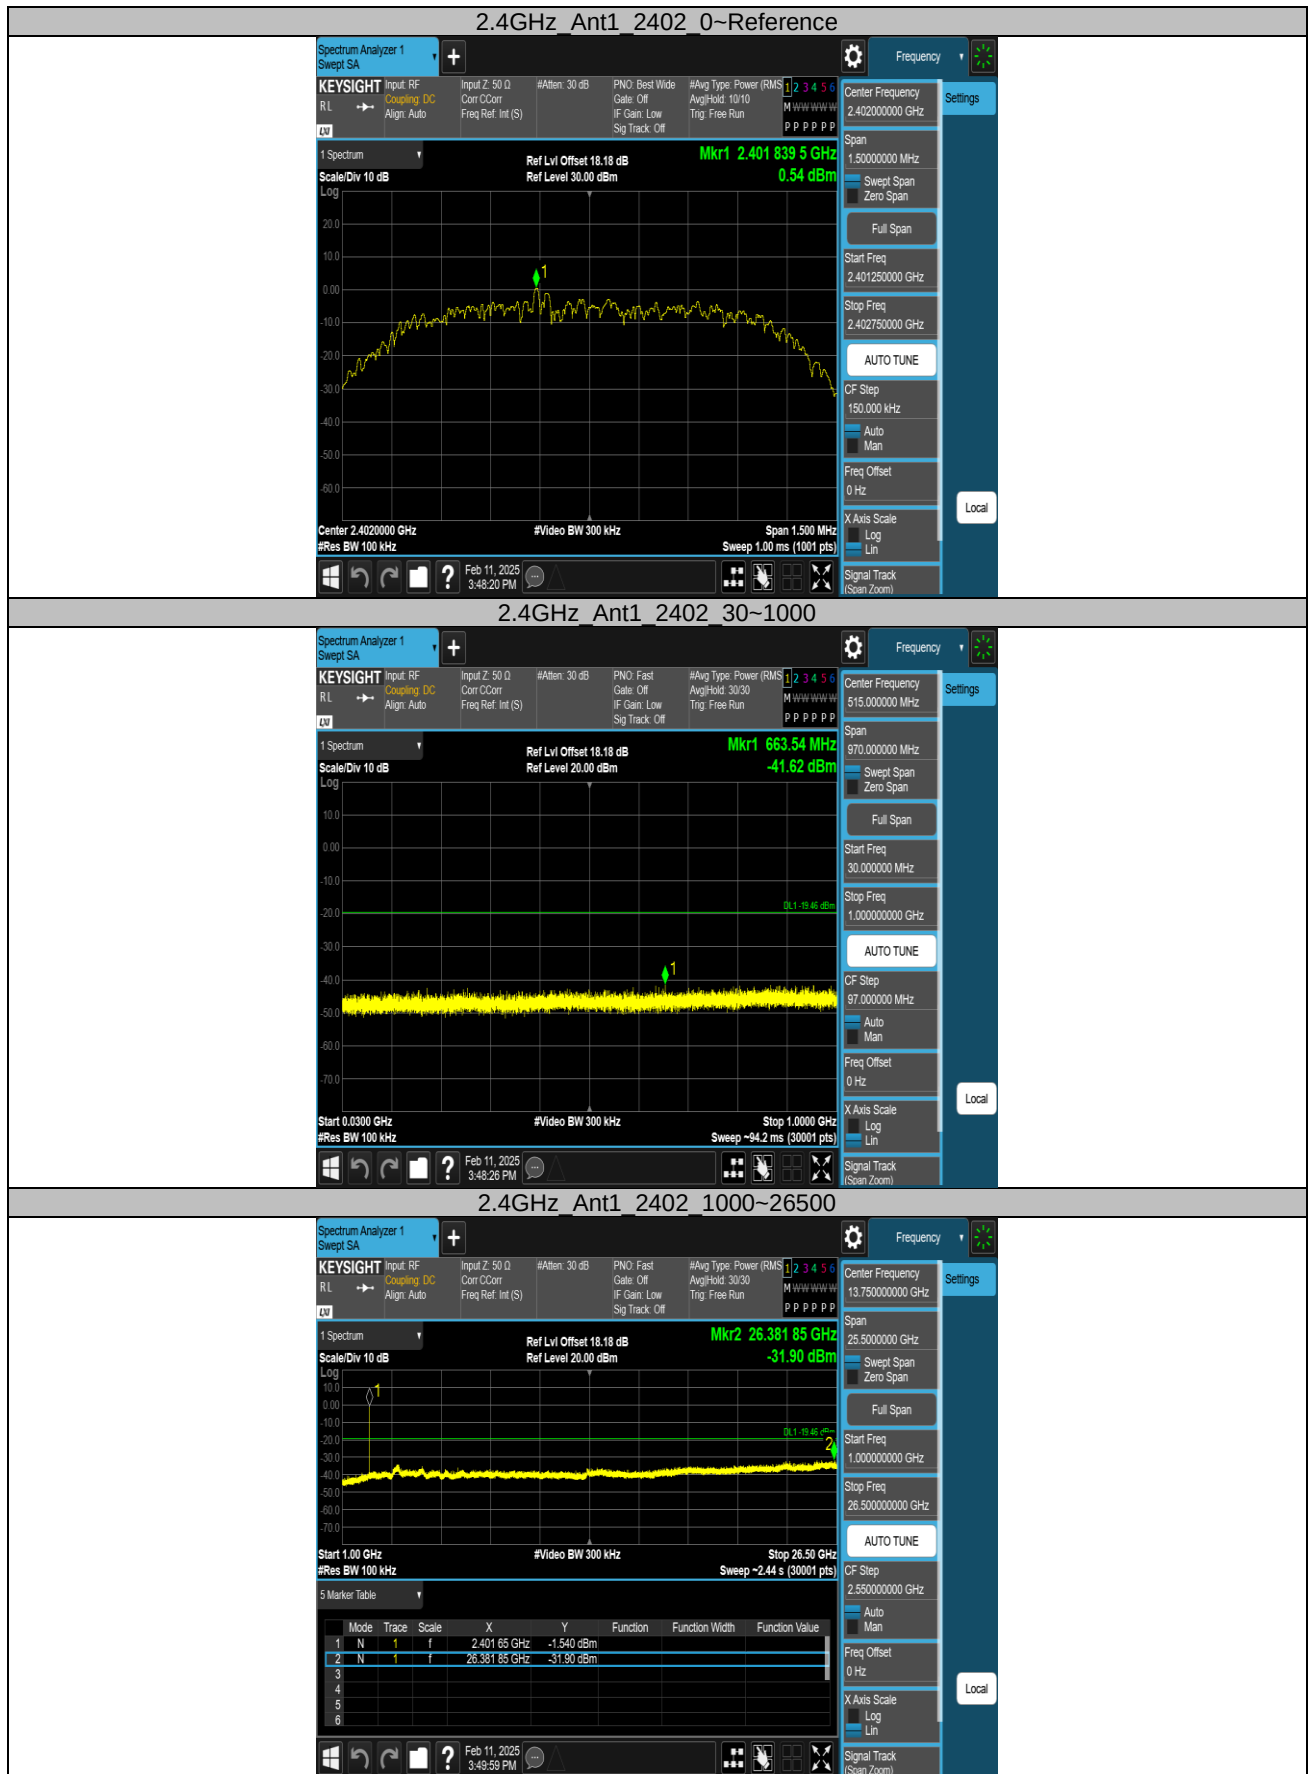

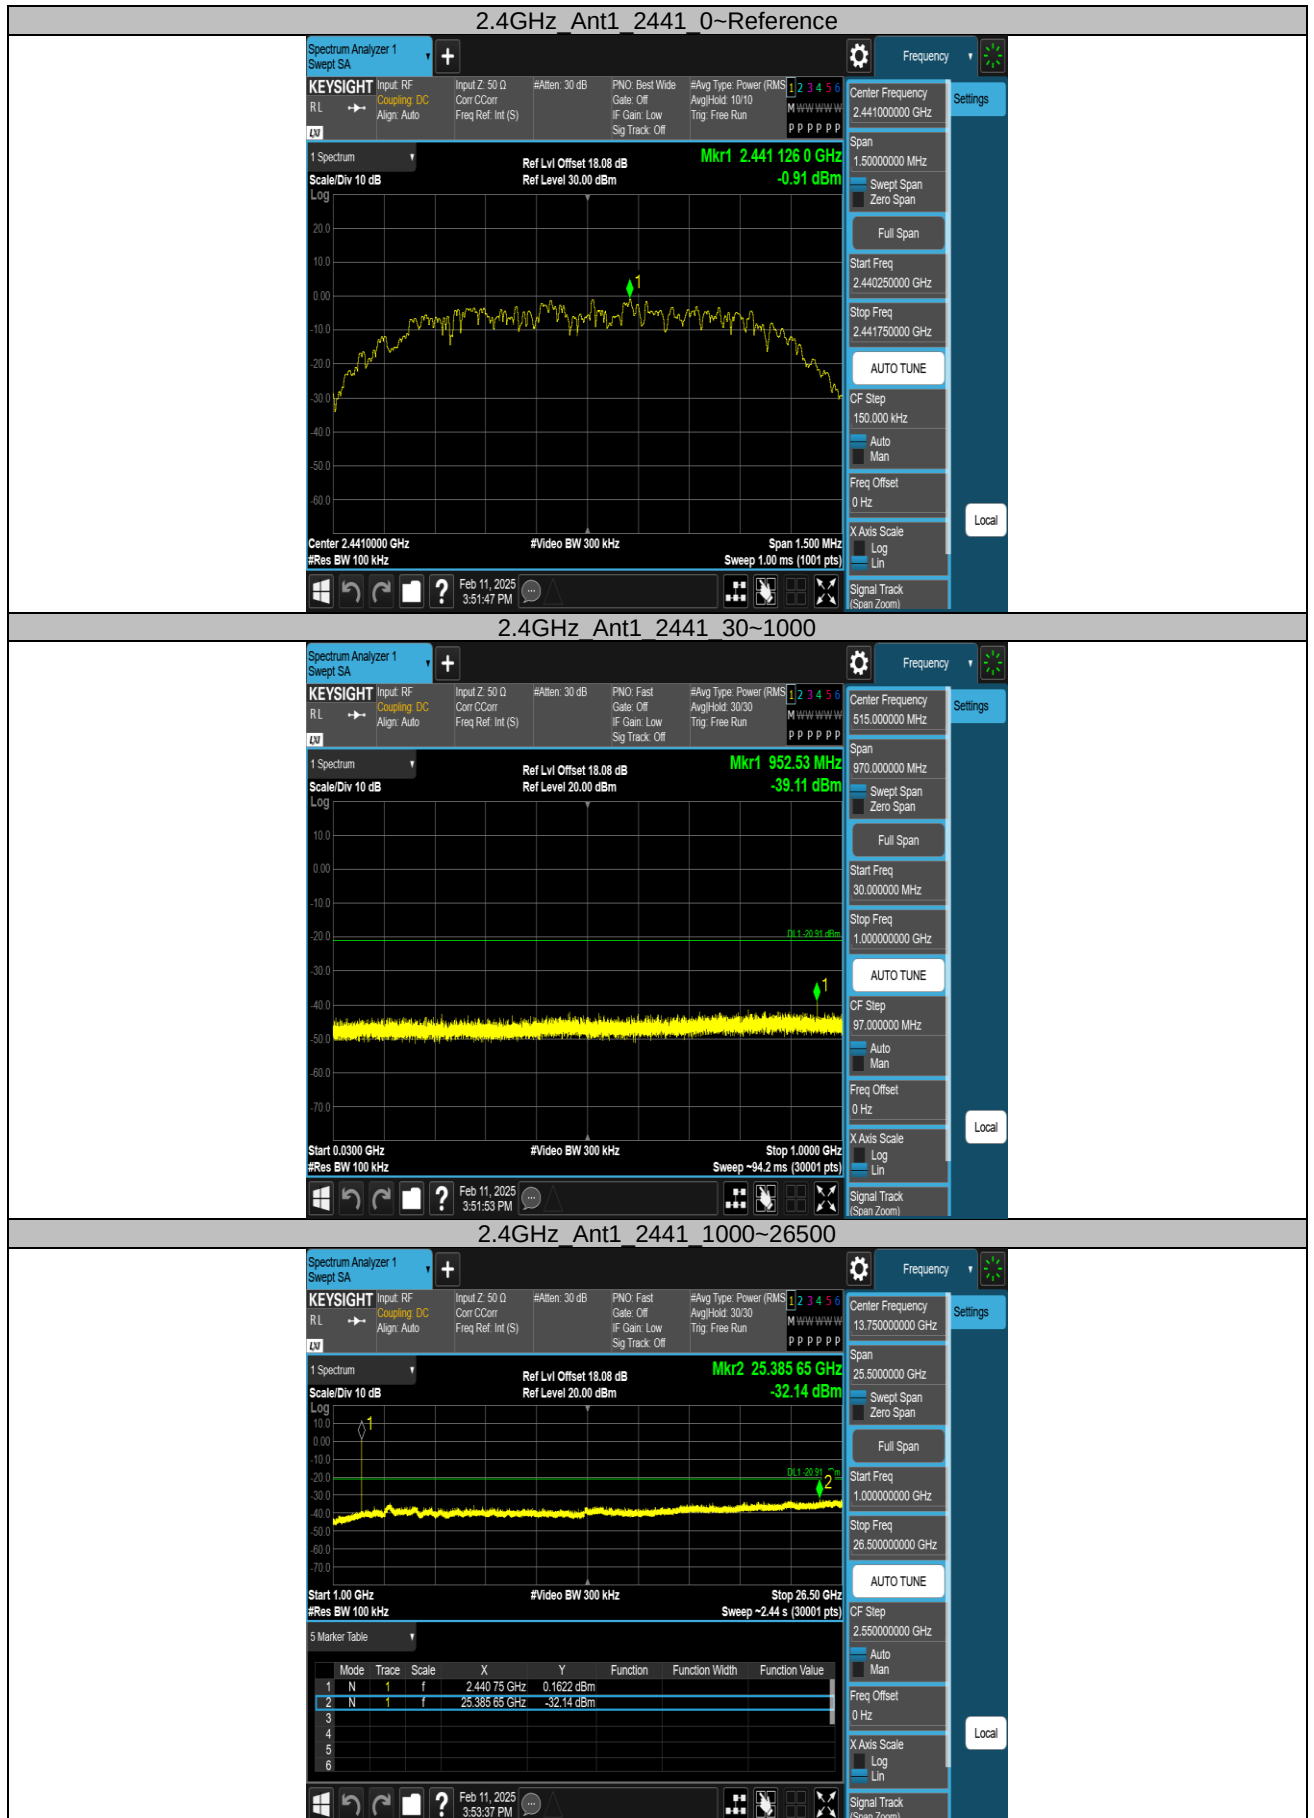



Appendix A.8: Test Results of Radiated Spurious Emissions


Note:

- 1) Testing was carried out within frequency range 9kHz to the tenth harmonics. The measurement results below 30MHz and 18GHz - 26.5GHz were greater than 20dB below the limit, so only the radiated spurious emissions from 30MHz to 18GHz were reported.

30 MHz - 1GHz

EUT Information

EUT Name:	Lenovo Legion H410 Wireless Gaming Receiver
Model:	H410D
Test Mode:	2.4GHz_Mid channel
Order No/Sample No:	168521531/A003904311-015
Test Voltage:	DC 5V From USB
Remark:	Temp 23 Humi:53%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

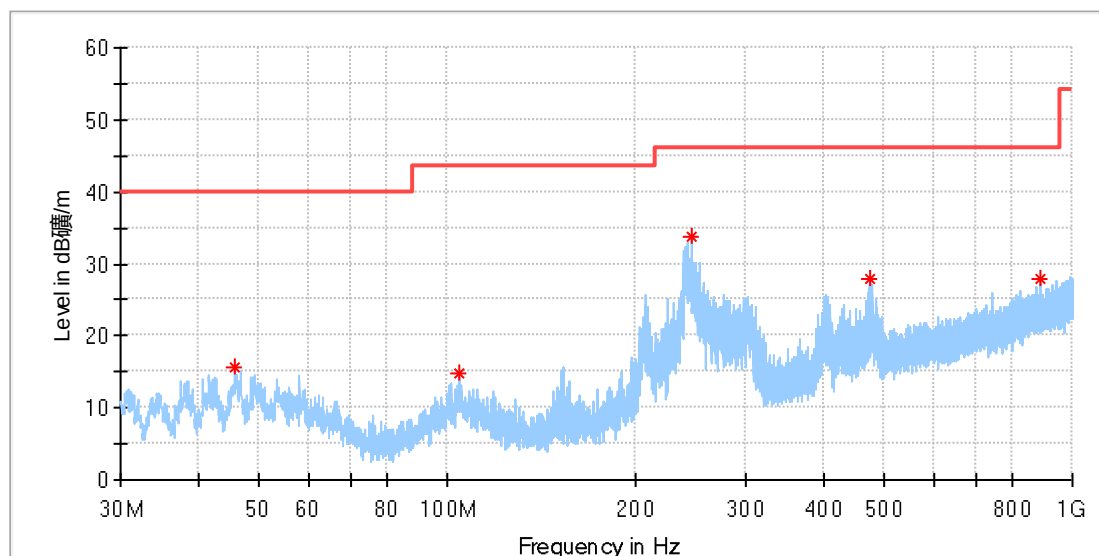

Critical Freqs


Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
45.594615	15.57	40.00	24.43	100.0	H	344.0	-18.8
104.615385	14.82	43.50	28.68	100.0	H	65.0	-18.9
245.638462	33.76	46.00	12.24	100.0	H	204.0	-17.5
472.730385	27.91	46.00	18.09	100.0	H	358.0	-12.3
887.591923	28.04	46.00	17.96	100.0	H	65.0	-4.9

Final Result

Frequency (MHz)	QuasiPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name:	Lenovo Legion H410 Wireless Gaming Receiver
Model:	H410D
Test Mode:	2.4GHz_Mid channel
Order No/Sample No:	168521531/A003904311-015
Test Voltage:	DC 5V From USB
Remark:	Temp 23 Humi:53%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

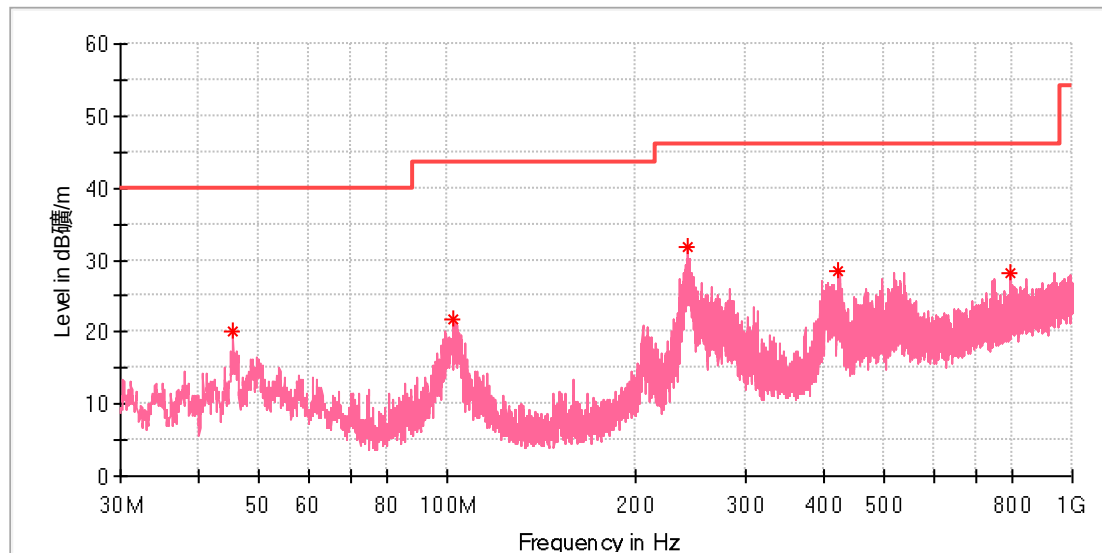

Critical Freqs

Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
45.482692	20.21	40.00	19.79	100.0	V	104.0	-18.9
102.265000	21.72	43.50	21.78	100.0	V	0.0	-19.0
242.243462	31.70	46.00	14.30	100.0	V	218.0	-17.6
421.059231	28.50	46.00	17.50	100.0	V	138.0	-13.2
796.896923	28.18	46.00	17.82	100.0	V	327.0	-6.3

Final Result


Frequency (MHz)	QuasiPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

1GHz - 18GHz

Note: The highest waveform in the figure is 2.4GHz Fundamental.

EUT Information

EUT Name:	Lenovo Legion H410 Wireless Gaming Receiver
Model:	H410D
Test Mode:	2.4GHz Low channel
Order No/Sample No:	168521531/A003904311-015
Test Voltage:	DC 5V From USB
Remark:	Temp 23 Humi:53%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

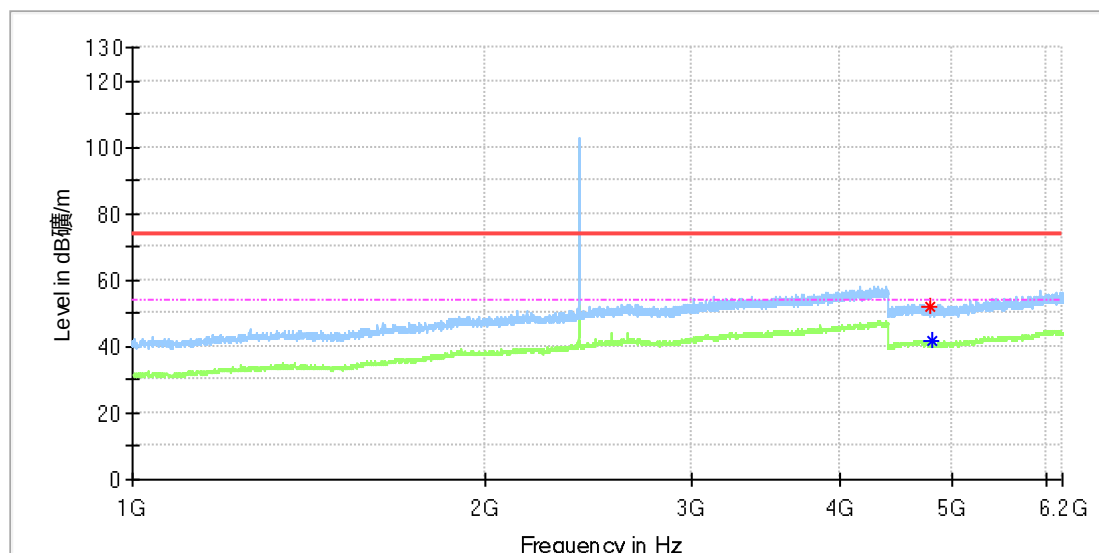

Critical_Freqs


Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
4792.000000	52.15	---	74.00	21.85	150.0	H	25.0	13.3
4803.500000	---	41.93	54.00	12.07	150.0	H	86.0	13.3

Final_Result

Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name: Lenovo Legion H410 Wireless Gaming Receiver
Model: H410D
Test Mode: 2.4GHz_Low channel
Order No/Sample No: 168521531/A003904311-015
Test Voltage: DC 5V From USB
Remark: Temp 23 Humi:53%
Test Standard: FCC 15.247
Tested By: Kei Zhang
Reviewed By: Terry Yin

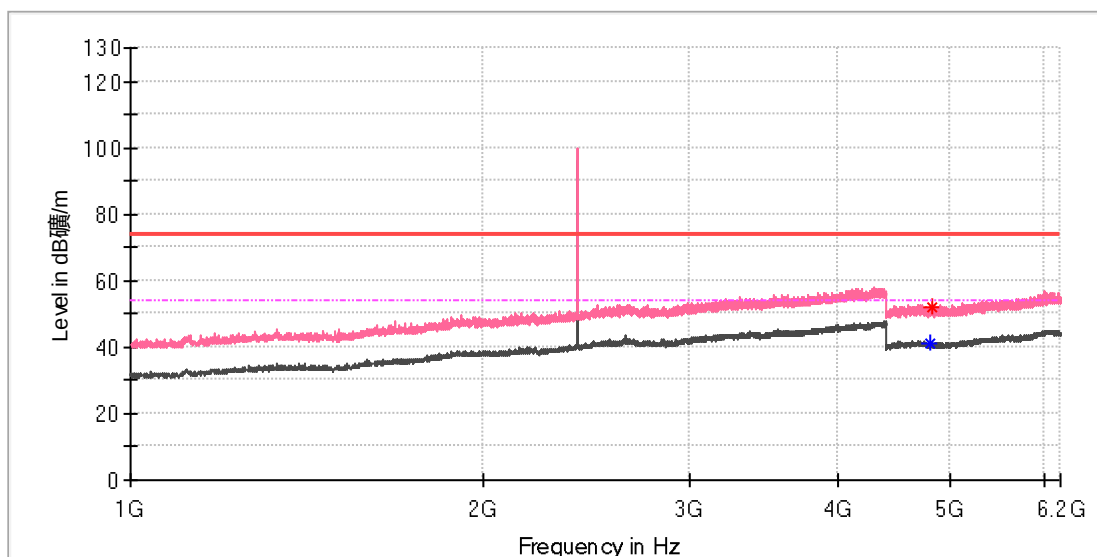

Critical Freqs


Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
4807.000000	---	41.28	54.00	12.72	150.0	V	17.0	13.3
4816.500000	52.30	---	74.00	21.70	150.0	V	143.0	13.3

Final Result

Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name: Lenovo Legion H410 Wireless Gaming Receiver
Model: H410D
Test Mode: 2.4GHz_Low channel
Order No/Sample No: 168521531/A003904311-015
Test Voltage: DC 5V From USB
Remark: Temp 23 Humi:53%
Test Standard: FCC 15.247
Tested By: Kei Zhang
Reviewed By: Terry Yin

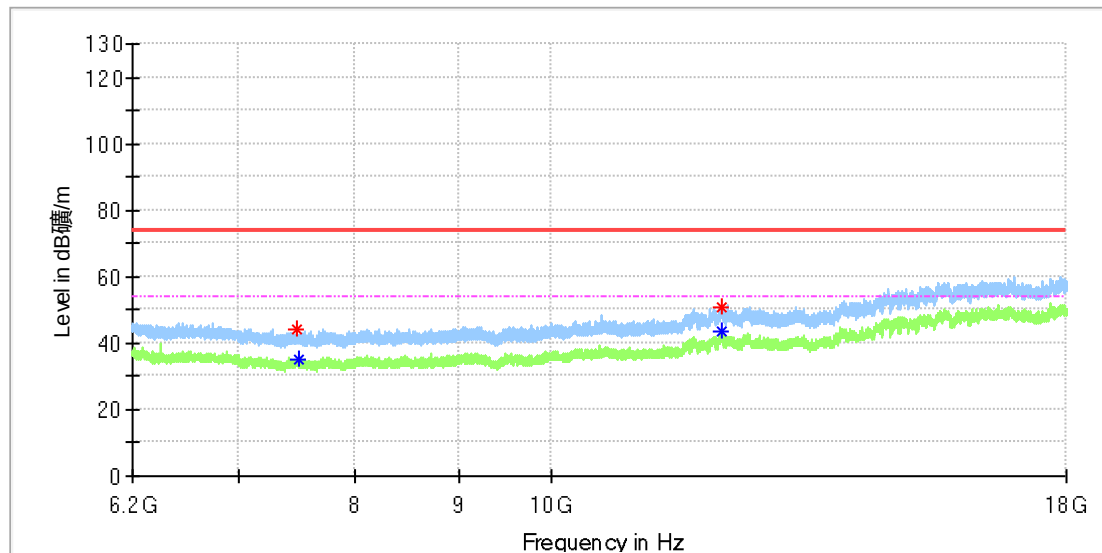

Critical Freqs


Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
7486.691667	44.26	---	74.00	29.74	150.0	H	206.0	8.7
7489.641667	---	34.77	54.00	19.23	150.0	H	168.0	8.7
12149.166667	51.03	---	74.00	22.97	150.0	H	156.0	16.7
12149.658333	---	43.60	54.00	10.40	150.0	H	332.0	16.7

Final Result

Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name: Lenovo Legion H410 Wireless Gaming Receiver
Model: H410D
Test Mode: 2.4GHz_Low channel
Order No/Sample No: 168521531/A003904311-015
Test Voltage: DC 5V From USB
Remark: Temp 23 Humi:53%
Test Standard: FCC 15.247
Tested By: Kei Zhang
Reviewed By: Terry Yin

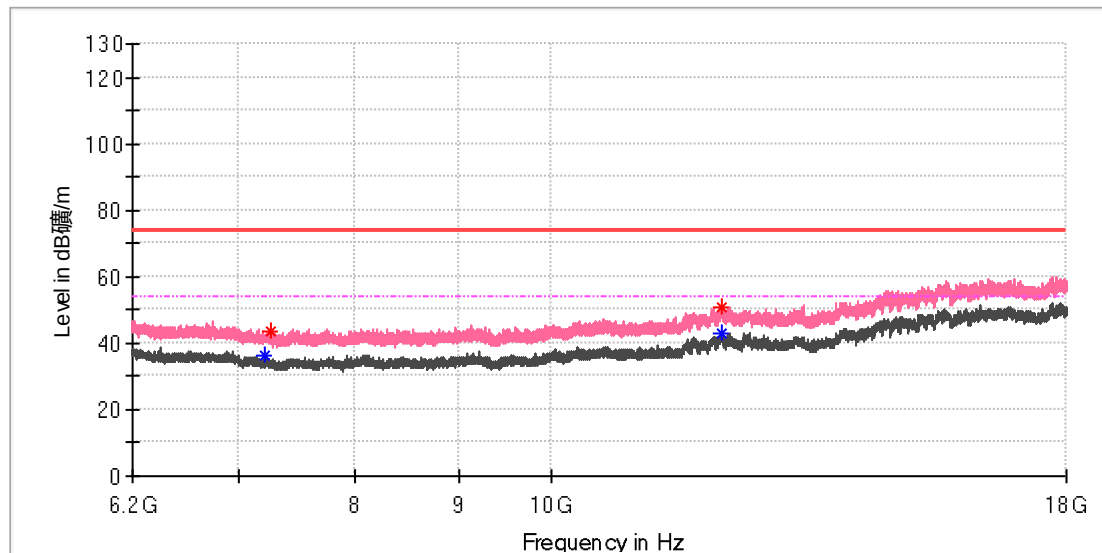

Critical Freqs


Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
7218.241667	---	36.13	54.00	17.87	150.0	V	295.0	8.7
7253.641667	43.43	---	74.00	30.57	150.0	V	273.0	8.5
12152.608333	---	42.70	54.00	11.30	150.0	V	305.0	16.6
12155.066667	50.97	---	74.00	23.03	150.0	V	139.0	16.5

Final Result

Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---	---	---	---

EUT Information

EUT Name: Lenovo Legion H410 Wireless Gaming Receiver
Model: H410D
Test Mode: 2.4GHz_Mid channel
Order No/Sample No: 168521531/A003904311-015
Test Voltage: DC 5V From USB
Remark: Temp 23 Humi:53%
Test Standard: FCC 15.247
Tested By: Kei Zhang
Reviewed By: Terry Yin

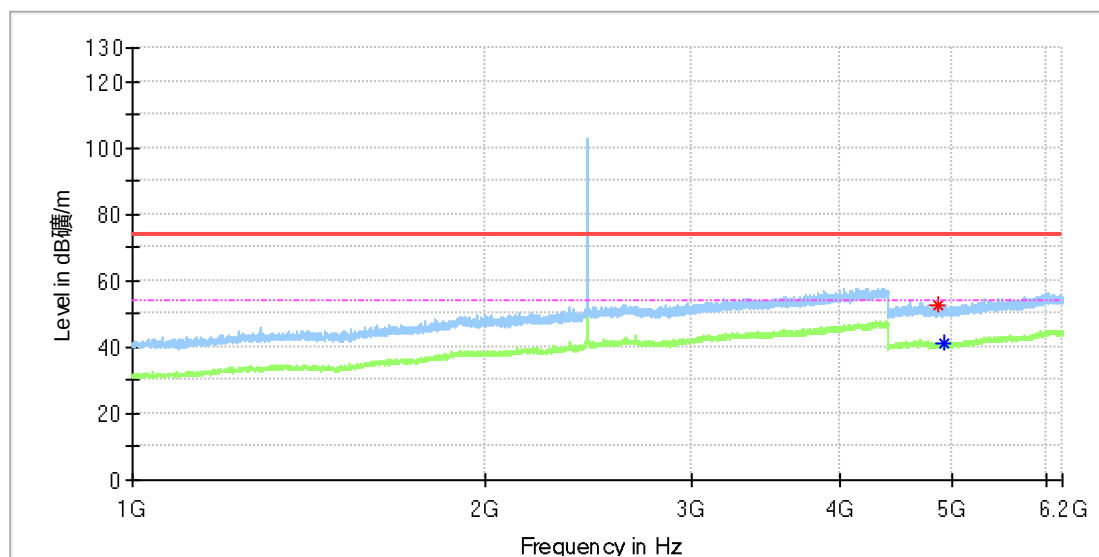

Critical_Freqs


Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
4856.000000	52.66	---	74.00	21.34	150.0	H	84.0	13.3
4909.500000	---	41.25	54.00	12.75	150.0	H	64.0	13.3

Final_Result

Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name: Lenovo Legion H410 Wireless Gaming Receiver
Model: H410D
Test Mode: 2.4GHz_Mid channel
Order No/Sample No: 168521531/A003904311-015
Test Voltage: DC 5V From USB
Remark: Temp 23 Humi:53%
Test Standard: FCC 15.247
Tested By: Kei Zhang
Reviewed By: Terry Yin

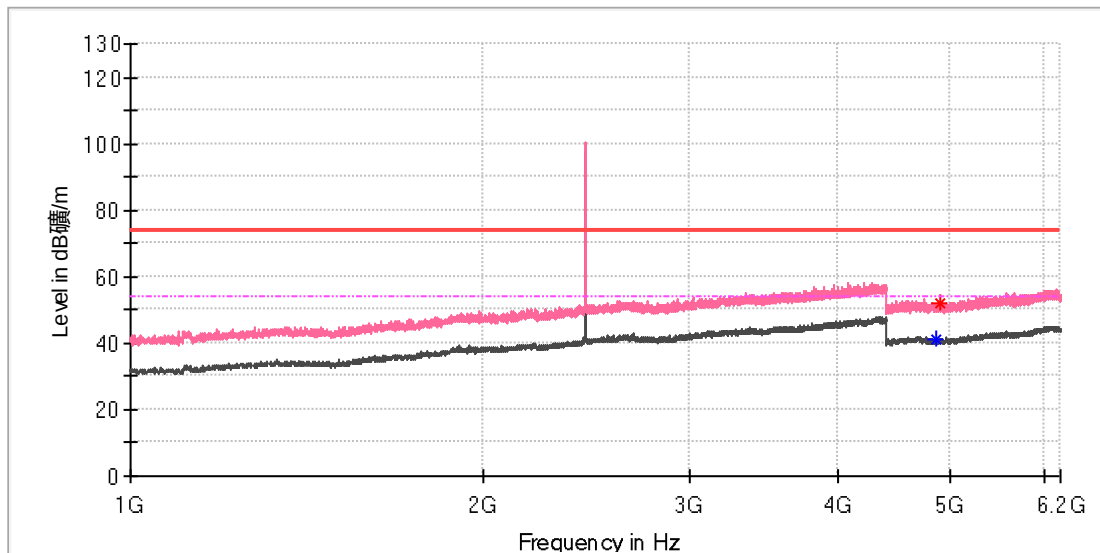

Critical Freqs


Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
4855.000000	---	41.14	54.00	12.86	150.0	V	28.0	13.3
4894.000000	52.26	---	74.00	21.74	150.0	V	336.0	13.3

Final Result

Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name: Lenovo Legion H410 Wireless Gaming Receiver
Model: H410D
Test Mode: 2.4GHz_Mid channel
Order No/Sample No: 168521531/A003904311-015
Test Voltage: DC 5V From USB
Remark: Temp 23 Humi:53%
Test Standard: FCC 15.247
Tested By: Kei Zhang
Reviewed By: Terry Yin

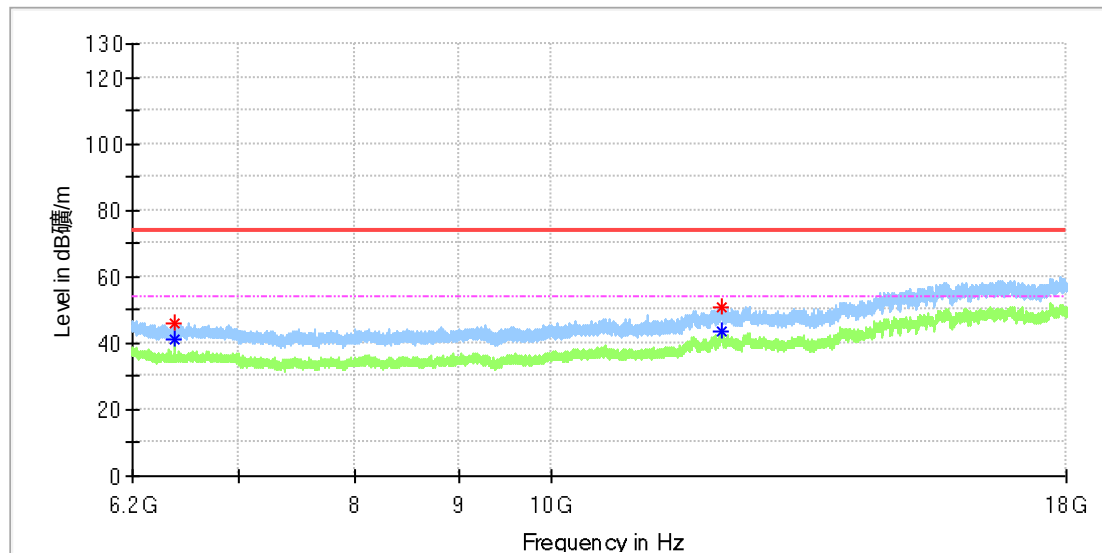

Critical Freqs


Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
6508.766667	45.70	---	74.00	28.30	150.0	H	141.0	8.8
6509.258333	---	41.04	54.00	12.96	150.0	H	141.0	8.8
12134.908333	50.94	---	74.00	23.06	150.0	H	163.0	16.3
12150.150000	---	43.38	54.00	10.62	150.0	H	141.0	16.7

Final Result

Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name: Lenovo Legion H410 Wireless Gaming Receiver
Model: H410D
Test Mode: 2.4GHz_Mid channel
Order No/Sample No: 168521531/A003904311-015
Test Voltage: DC 5V From USB
Remark: Temp 23 Humi:53%
Test Standard: FCC 15.247
Tested By: Kei Zhang
Reviewed By: Terry Yin

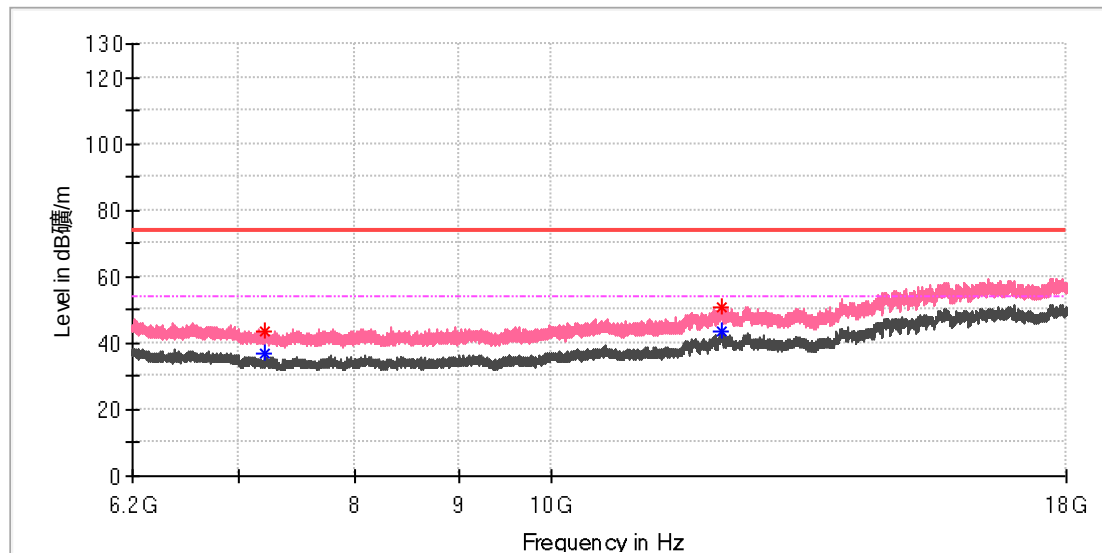

Critical Freqs


Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
7209.883333	43.81	---	74.00	30.19	150.0	V	256.0	8.7
7212.833333	---	36.76	54.00	17.24	150.0	V	104.0	8.7
12140.808333	---	43.47	54.00	10.53	150.0	V	199.0	16.5
12148.675000	51.00	---	74.00	23.00	150.0	V	221.0	16.7

Final Result

Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name: Lenovo Legion H410 Wireless Gaming Receiver
Model: H410D
Test Mode: 2.4GHz_High channel
Order No/Sample No: 168521531/A003904311-015
Test Voltage: DC 5V From USB
Remark: Temp 23 Humi:53%
Test Standard: FCC 15.247
Tested By: Kei Zhang
Reviewed By: Terry Yin

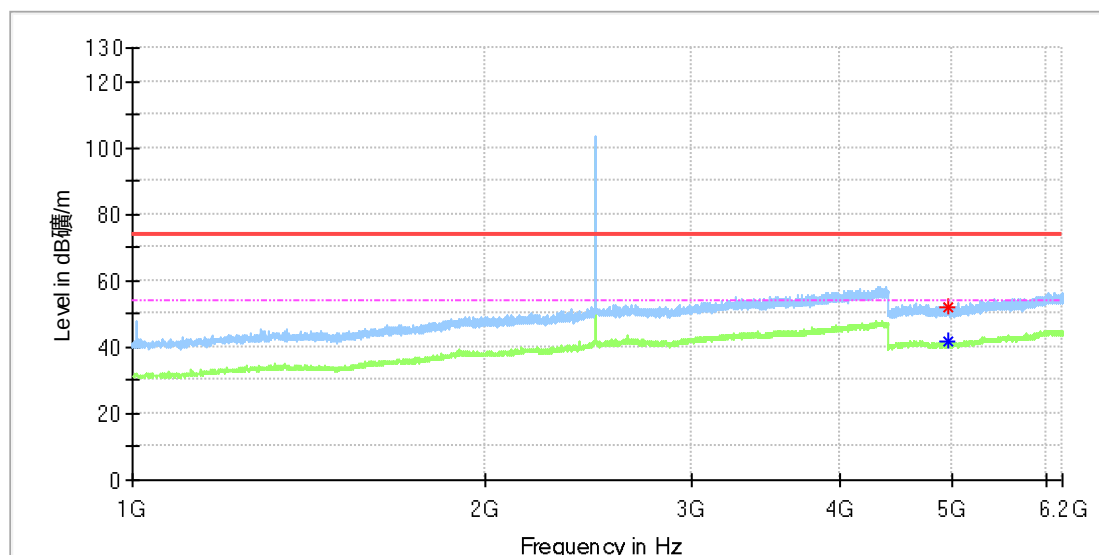

Critical_Freqs


Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
4958.000000	52.24	---	74.00	21.76	150.0	H	6.0	13.3
4959.500000	---	41.53	54.00	12.47	150.0	H	163.0	13.3

Final_Result

Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name: Lenovo Legion H410 Wireless Gaming Receiver
Model: H410D
Test Mode: 2.4GHz_High channel
Order No/Sample No: 168521531/A003904311-015
Test Voltage: DC 5V From USB
Remark: Temp 23 Humi:53%
Test Standard: FCC 15.247
Tested By: Kei Zhang
Reviewed By: Terry Yin

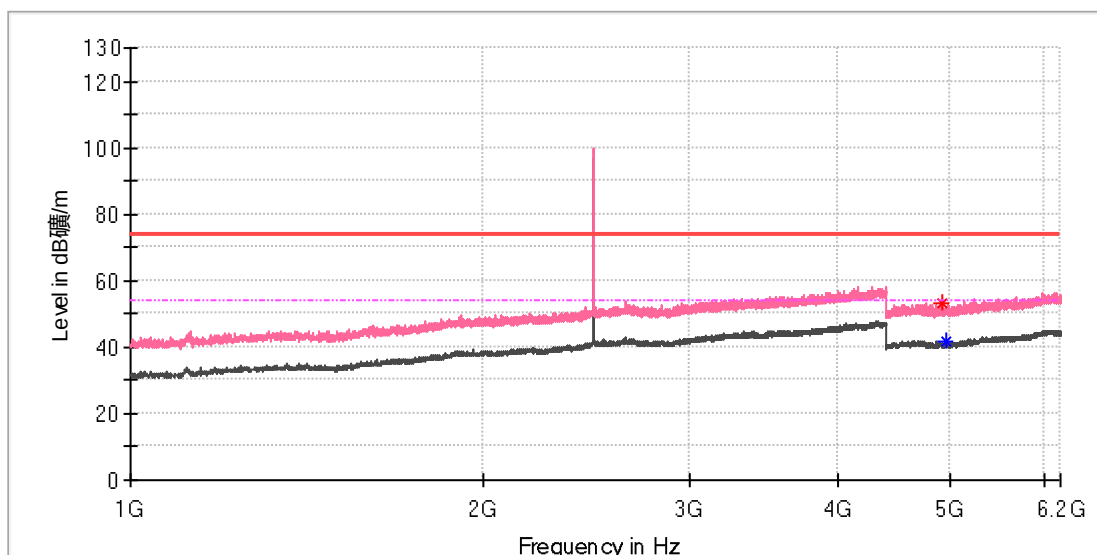

Critical Freqs


Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
4911.000000	53.17	---	74.00	20.83	150.0	V	104.0	13.3
4957.500000	---	41.61	54.00	12.39	150.0	V	117.0	13.3

Final Result

Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name: Lenovo Legion H410 Wireless Gaming Receiver
Model: H410D
Test Mode: 2.4GHz_High channel
Order No/Sample No: 168521531/A003904311-015
Test Voltage: DC 5V From USB
Remark: Temp 23 Humi:53%
Test Standard: FCC 15.247
Tested By: Kei Zhang
Reviewed By: Terry Yin

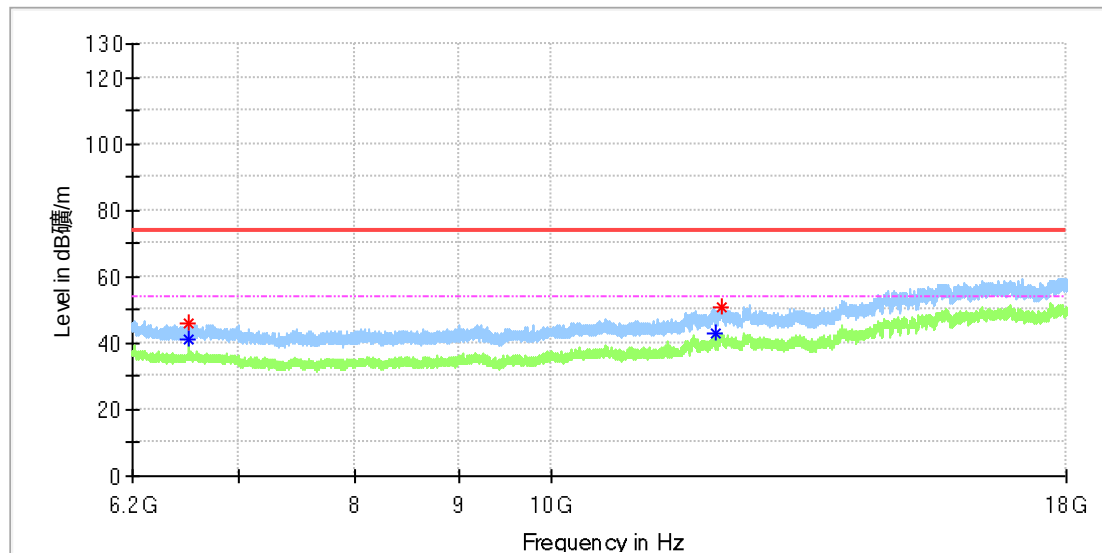

Critical_Freqs


Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
6613.000000	46.16	---	74.00	27.84	150.0	H	144.0	8.8
6613.000000	---	41.14	54.00	12.86	150.0	H	144.0	8.8
12051.816667	---	42.88	54.00	11.12	150.0	H	36.0	16.2
12136.875000	50.81	---	74.00	23.19	150.0	H	92.0	16.4

Final_Result

Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name: Lenovo Legion H410 Wireless Gaming Receiver
Model: H410D
Test Mode: 2.4GHz_High channel
Order No/Sample No: 168521531/A003904311-015
Test Voltage: DC 5V From USB
Remark: Temp 23 Humi:53%
Test Standard: FCC 15.247
Tested By: Kei Zhang
Reviewed By: Terry Yin

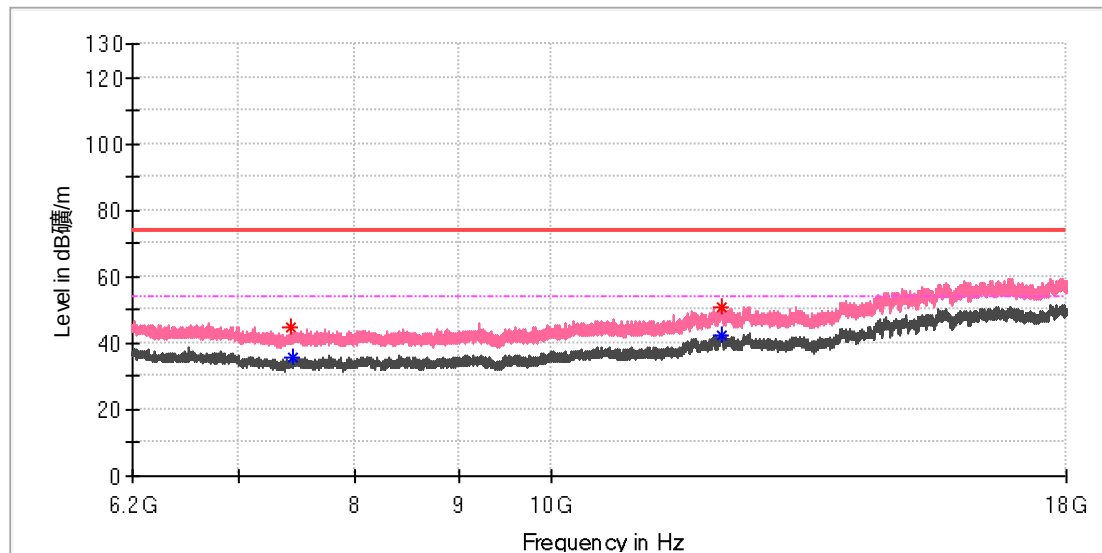

Critical Freqs

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
7435.066667	44.95	---	74.00	29.05	150.0	V	206.0	8.4
7436.541667	---	35.49	54.00	18.51	150.0	V	79.0	8.4
12132.450000	50.58	---	74.00	23.42	150.0	V	249.0	16.3
12155.066667	---	42.62	54.00	11.38	150.0	V	0.0	16.5


Final Result

Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---	---	---	---

Appendix A.9: Test Results of Radiated Emissions in Restricted Bands

EUT Information

EUT Name:	Lenovo Legion H410 Wireless Gaming Receiver
Model:	H410D
Test Mode:	2.4GHz_Low channel
Order No/Sample No:	168521531/A003904311-015
Test Voltage:	DC 5V From USB
Remark:	Temp 23 Humi:53%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

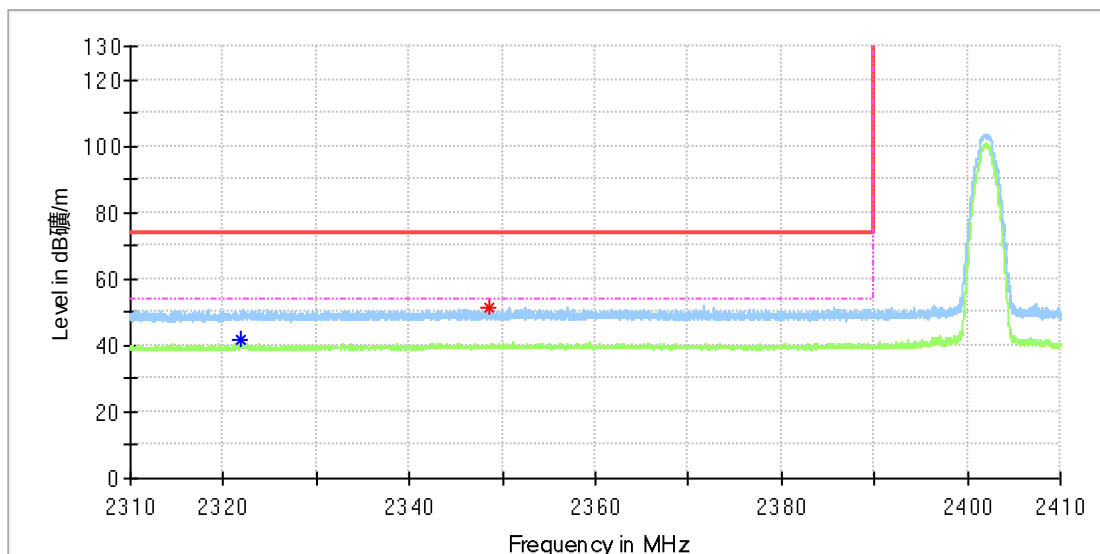

Critical Freqs


Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
2321.882353	---	41.50	54.00	12.50	150.0	H	168.0	8.2
2348.558824	51.65	---	74.00	22.35	150.0	H	359.0	8.5

Final Result

Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name:	Lenovo Legion H410 Wireless Gaming Receiver
Model:	H410D
Test Mode:	2.4GHz_Low channel
Order No/Sample No:	168521531/A003904311-015
Test Voltage:	DC 5V From USB
Remark:	Temp 23 Humi:53%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

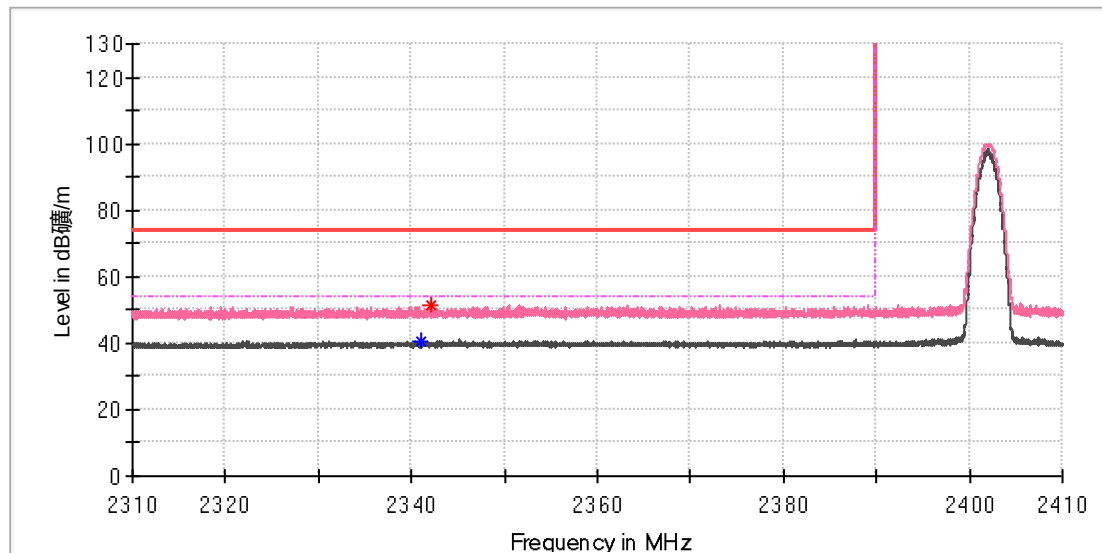

Critical Freqs


Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
2341.102941	---	40.58	54.00	13.42	150.0	V	182.0	8.4
2342.132353	51.39	---	74.00	22.61	150.0	V	175.0	8.4

Final Result

Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name: Lenovo Legion H410 Wireless Gaming Receiver
Model: H410D
Test Mode: 2.4GHz_High channel
Order No/Sample No: 168521531/A003904311-015
Test Voltage: DC 5V From USB
Remark: Temp 23 Humi:53%
Test Standard: FCC 15.247
Tested By: Kei Zhang
Reviewed By: Terry Yin

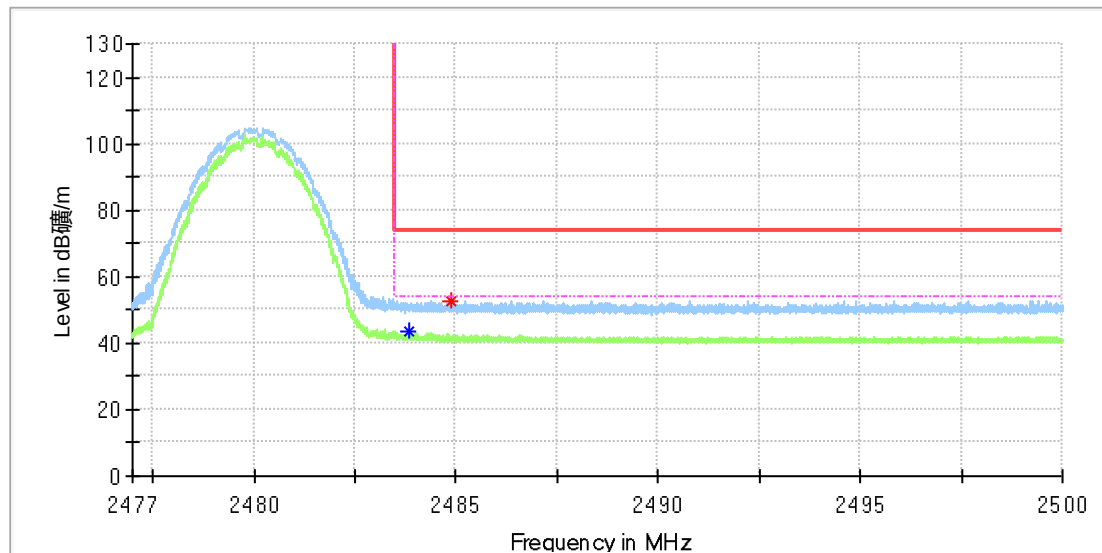

Critical Freqs


Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
2483.860294	---	43.31	54.00	10.69	150.0	H	169.0	9.0
2484.882353	52.90	---	74.00	21.10	150.0	H	169.0	9.0

Final Result

Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name:	Lenovo Legion H410 Wireless Gaming Receiver
Model:	H410D
Test Mode:	2.4GHz_High channel
Order No/Sample No:	168521531/A003904311-015
Test Voltage:	DC 5V From USB
Remark:	Temp 23 Humi:53%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

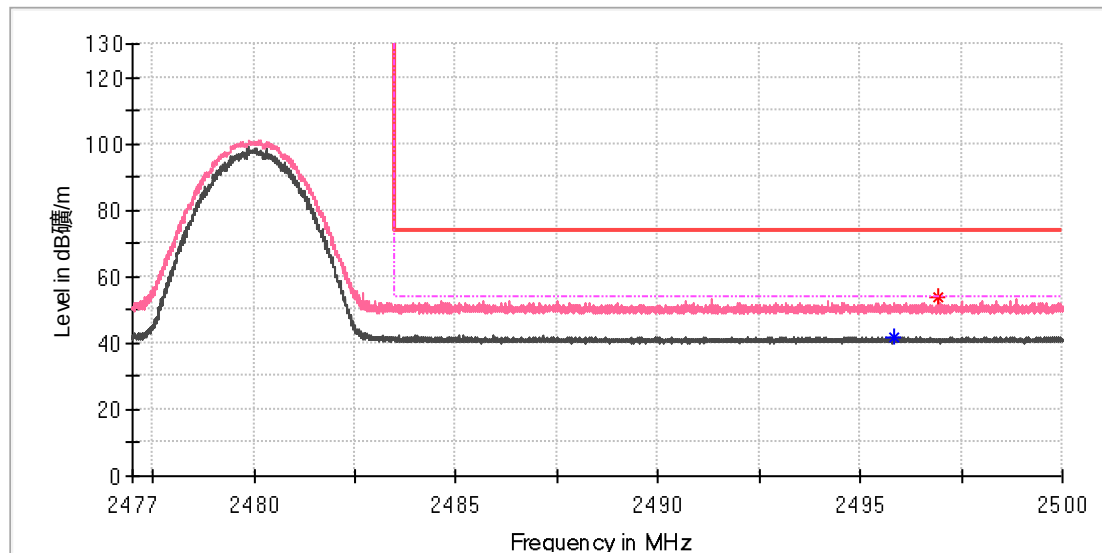

Critical Freqs

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
2495.819853	---	41.99	54.00	12.01	150.0	V	327.0	9.0
2496.941177	53.71	---	74.00	20.29	150.0	V	43.0	9.0


Final Result

Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

Appendix A.10: Test Results of Conducted Emission on AC Mains

EUT Information

EUT Name	Lenovo Legion H410 Wireless Gaming Receiver
Order Number:	168521531
Model:	H410D
Test Mode:	2.4G Link
Test Voltage:	120Vac, 60Hz
Test Standard:	FCC Part 15, RSS-GEN
Test By:/Review By:	Steve Lan/Shower Dai
Tem./Hum./Pressure:	23.2°C/49.1%/101kPa
Remark:	SR2

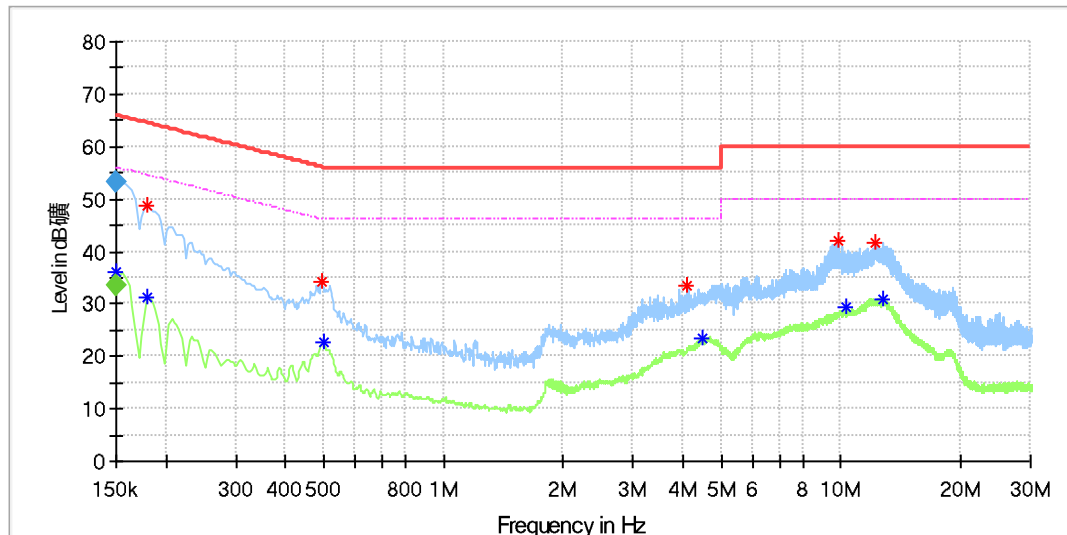

Critical_Freqs


Frequency (MHz)	MaxPeak (dBμV)	Average (dBμV)	Limit (dBμV)	Margin (dB)	Line	Corr. (dB)
0.150000	53.61	---	65.84	12.22	L1	10.2
0.150000	---	35.93	55.68	19.75	L1	10.2
0.179850	---	31.31	54.49	23.18	L1	10.2
0.179850	48.71	---	64.49	15.78	L1	10.2
0.493275	34.05	---	56.11	22.06	L1	10.3
0.499245	---	22.65	46.01	23.36	L1	10.3
4.093185	33.63	---	56.00	22.37	L1	10.4
4.505115	---	23.35	46.00	22.65	L1	10.4
9.797520	41.92	---	60.00	18.08	L1	10.6
10.301985	---	29.33	50.00	20.67	L1	10.6
12.149700	41.62	---	60.00	18.38	L1	10.7
12.785505	---	31.02	50.00	18.98	L1	10.7

Final_Result

Frequency (MHz)	QuasiPeak (dBμV)	Average (dBμV)	Limit (dBμV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)
0.150000	53.27	---	66.00	12.73	1000.0	9.000	L1	10.2
0.150000	---	33.63	55.36	21.73	1000.0	9.000	L1	10.2

EUT Information

EUT Name	Lenovo Legion H410 Wireless Gaming Receiver
Order Number:	168521531
Model:	H410D
Test Mode:	2.4G Link
Test Voltage:	120Vac, 60Hz
Test Standard:	FCC Part 15, RSS-GEN
Test By:/Review By:	Steve Lan/Shower Dai
Tem./Hum./Pressure:	23.2°C/49.1%/101kPa
Remark:	SR2

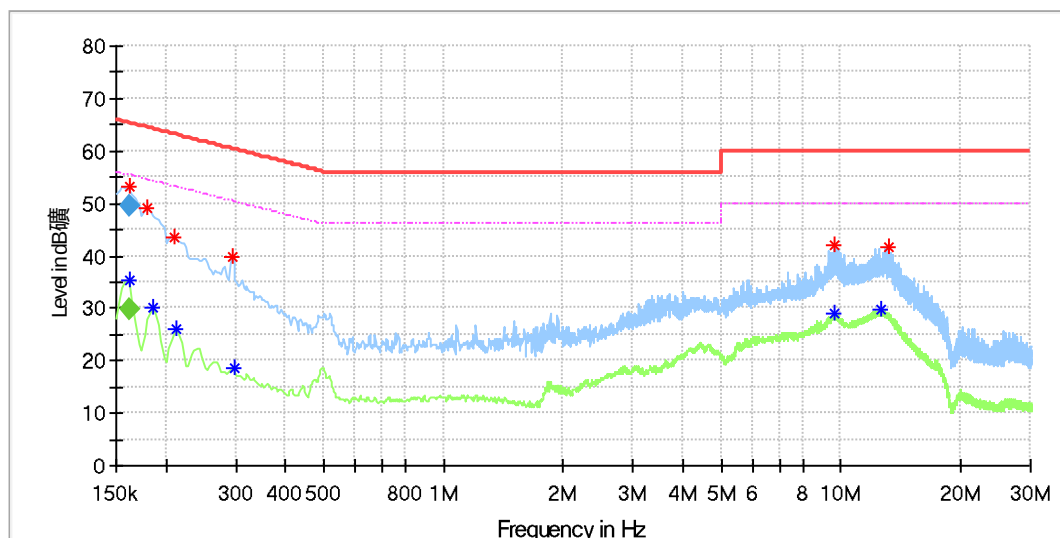

Critical Freqs

Frequency (MHz)	MaxPeak (dBμV)	Average (dBμV)	Limit (dBμV)	Margin (dB)	Line	Corr. (dB)
0.162000	53.02	---	65.68	12.65	N	10.2
0.162000	---	35.39	55.52	20.13	N	10.2
0.179850	49.05	---	64.49	15.45	N	10.2
0.185820	---	30.21	54.22	24.01	N	10.2
0.209700	43.44	---	63.22	19.77	N	10.2
0.212685	---	26.10	53.10	27.00	N	10.2
0.293280	39.90	---	60.43	20.53	N	10.2
0.296265	---	18.46	50.35	31.89	N	10.2
9.585585	---	28.88	50.00	21.12	N	10.4
9.597525	42.23	---	60.00	17.77	N	10.4
12.600435	---	29.74	50.00	20.26	N	10.5
13.149675	41.72	---	60.00	18.28	N	10.5

Final Result

Frequency (MHz)	QuasiPeak (dBμV)	Average (dBμV)	Limit (dBμV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)
0.162000	49.31	---	65.36	16.05	1000.0	9.000	N	10.2
0.162000	---	29.67	55.16	25.49	1000.0	9.000	N	10.2