

1

2

3

4

5

6

7

A

B

C

D

E


A

B

C

D

E

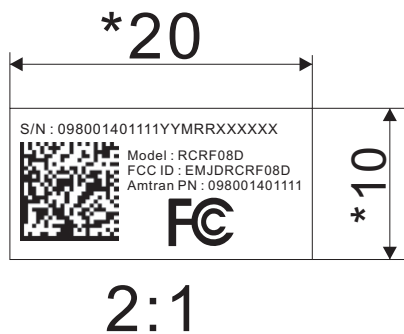

NOTE:

1. 白底黑字
2. TOL: +/-1mm.
3. THE DIMENSIONS MARKED WITH "*" ARE IMPORTANT.
4. GLUE : T=0.022~0.025mm.
5. STICKINESS: 3.0kg/cm.²
6. Product must be halogen free
Requirement of PRIMAX Green Part:
 1. Comply with PRIMAX QW-5Q002
" Green Product Chemical Substances Specification"
 2. Follow customer's specification as required.
 3. Follow Halogen- Free requirement : Br<900 ppm,
Cl<900 ppm, Br+Cl< 1500 ppm if required.
7. 二維條碼使用ECC200,等級為B,尺寸為6*6mm,
8. 二維顯示內容為:

RCRF08D,098001401111YYMRRXXXXXX,EMJDRCRF08D,098001401111

固定碼

SN

FCC ID固定碼

Amtran PN

9. SN編碼原則如下:

098001401111 YY M RR XXXXXX

固定碼

流水碼(000001~999999),每月更新
版本(02)

月份(1月=1,2月=2,...,10月=A,11月=B,12月=C)

年份(2014=14,2015=15,...)

DO NOT SCALE DRAWING		PRIMAX [®] 致伸資訊電子有限公司 PRIMAX ELECTRONICS LTD.	
UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN MILLIMETERS ANGULAR TOLERANCE: +1.0 °		USED 910400034330	APPD. Sarah.Lee
FINISH		CHKD. Apple.Zhao	
DIMENSIONS TOLERANCE		SCALE /	UNIT mm DR. Susan.Lee 2014/05/28
0.00 TO 30.00mm	+0.10mm	TITLE MASTER CARTON LABEL	
30.01 TO 80.00mm	+0.13mm		
80.01 TO 150.00mm	+0.15mm		
150.01+	+0.20mm	DWG NO. 304009893000 SIZE A4	
MATERIAL 80P銅版紙		FILE NAME 304009893000	SHEET 1/1 REV. 1

1

2

3

4

5

6

7

FCC Label
Location
(on Shielding cover)

