


REV.	DESCRIPTION	ENG.	APPROVAL

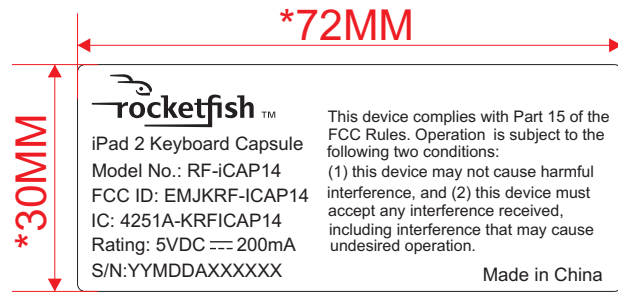

NOTE:


- 1.印刷爲 :黑底銀字
- 2."*" 爲重點尺寸.
- 3.公差: +0/-0.5mm
- 4.普通壓克力膠,T=0.03mm, 粘著力:3.0kg/cm²

5.Requirement of PRIMAX Part:

1. Comply with PRIMAX QW-5Q002 "Green Product Chemical Substances Specification"
2. Follow customer's specification as required.
3. Follow Halogen- Free requirement : Br<900 ppm, Cl<900 ppm, Br+Cl< 1500 ppm if required.

6. S/N Format:

YY M DD A XXXXXX

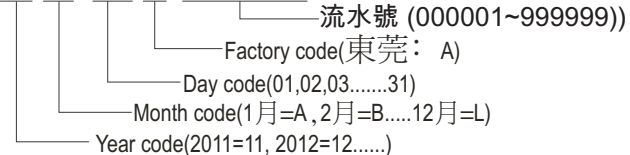

7.尺寸以圖面爲准, 具體內容詳見樣品。

DO NOT SCALE DRAWING		PRIMAX 致伸資訊電子有限公司 PRIMAX ELECTRONICS LTD.	
UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN MILLIMETERS ANGULAR TOLERANCE ±1.0°		US ED 29-84801B611	APPD. Ruby Ai
FINISH 背膠		CH KD. Ruby Ai	
SC ALE / UNIT m m		DR. Violet.Hu 2011/06/20	
TITLE FCC LABEL		SIZE A4	
DWG NO. 30400805800A		RE V. 2	
FILE NAME 30400805800A		SH EE T	1/1

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF PRIMAX ELECTRONICS LTD. AND SHALL NOT BE REPRODUCED COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF PRIMAX ELECTRONICS LTD.	
DIMENSIONS	TOLERANCE
0.00 TO 30.00mm	±0.10mm
30.01 TO 80.00mm	±0.13mm
80.01 TO 150.00mm	±0.15mm
150.01 ↑	±0.20mm
MATERIAL	
80#合成紙+亮P	