

FCC TEST REPORT

REPORT NO.: RF940606A05

MODEL NO.: VGP-WMS50

RECEIVED: June 6, 2005

TESTED: June 10 ~ 16, 2005

ISSUED: July 7, 2005

APPLICANT: PRIMAX ELECTRONICS LTD.

ADDRESS: No. 669, Ruey Kuang Road, Neihu, Taipei,
Taiwan. R.O.C.

ISSUED BY: Advance Data Technology Corporation

LAB ADDRESS: No. 47, 14th Ling, Chia Pau Tsuen, Lin Kou
Hsiang 244, Taipei Hsien, Taiwan, R.O.C.

TEST LOCATION: No. 19, Hwa Ya 2nd Rd., Wen Hwa Tsuen,
Kwei Shan Hsiang, Taoyuan Hsien 333,
Taiwan, R.O.C.

This test report consists of 35 pages in total. It may be duplicated completely for legal use with the approval of the applicant. It should not be reproduced except in full, without the written approval of our laboratory. The client should not use it to claim product endorsement by CNLA, A2LA or any government agencies. The test results in the report only apply to the tested sample.



0528
ILAC MRA



No. 2177-01



Table of Contents

- 1. CERTIFICATION 4
- 2. SUMMARY OF TEST RESULTS 5
 - 2.1 MEASUREMENT UNCERTAINTY 5
- 3. GENERAL INFORMATION..... 6
 - 3.1 GENERAL DESCRIPTION OF EUT 6
 - 3.2 DESCRIPTION OF TEST MODES 7
 - 3.2.1 CONFIGURATION OF SYSTEM UNDER TEST 8
 - 3.2.2 TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL: 9
 - 3.3 GENERAL DESCRIPTION OF APPLIED STANDARDS 10
 - 3.4 DESCRIPTION OF SUPPORT UNITS 10
- 4. TEST TYPES AND RESULTS 11
 - 4.1 CONDUCTED EMISSION MEASUREMENT 11
 - 4.2 RADIATED EMISSION MEASUREMENT 11
 - 4.2.1 LIMITS OF RADIATED EMISSION MEASUREMENT 11
 - 4.2.2 TEST INSTRUMENTS 12
 - 4.2.3 TEST PROCEDURES 13
 - 4.2.4 DEVIATION FROM TEST STANDARD 13
 - 4.2.5 TEST SETUP 14
 - 4.2.6 EUT OPERATING CONDITIONS 14
 - 4.2.7 TEST RESULTS 15
 - 4.3 6dB BANDWIDTH MEASUREMENT 19
 - 4.3.1 LIMITS OF 6dB BANDWIDTH MEASUREMENT 19
 - 4.3.2 TEST INSTRUMENTS 19
 - 4.3.3 TEST PROCEDURE 19
 - 4.3.4 DEVIATION FROM TEST STANDARD 19
 - 4.3.5 TEST SETUP 19
 - 4.3.6 EUT OPERATING CONDITIONS 19
 - 4.3.7 TEST RESULTS 20
 - 4.4 MAXIMUM PEAK OUTPUT POWER 22
 - 4.4.1 LIMITS OF MAXIMUM PEAK OUTPUT POWER MEASUREMENT 22
 - 4.4.2 INSTRUMENTS 22
 - 4.4.3 TEST PROCEDURES 23
 - 4.4.4 DEVIATION FROM TEST STANDARD 23
 - 4.4.5 TEST SETUP 23
 - 4.4.6 EUT OPERATING CONDITIONS 23
 - 4.4.7 TEST RESULTS 24
 - 4.5 POWER SPECTRAL DENSITY MEASUREMENT 26
 - 4.5.1 LIMITS OF POWER SPECTRAL DENSITY MEASUREMENT 26
 - 4.5.2 TEST INSTRUMENTS 26
 - 4.5.3 TEST PROCEDURE 26
 - 4.5.4 DEVIATION FROM TEST STANDARD 26
 - 4.5.5 TEST SETUP 26
 - 4.5.6 EUT OPERATING CONDITION 26



- 4.5.7 TEST RESULTS27
- 4.6 BAND EDGES MEASUREMENT29
 - 4.6.1 LIMITS OF BAND EDGES MEASUREMENT29
 - 4.6.2 TEST INSTRUMENTS29
 - 4.6.3 TEST PROCEDURE29
 - 4.6.4 DEVIATION FROM TEST STANDARD29
 - 4.6.5 EUT OPERATING CONDITION29
 - 4.6.6 TEST RESULTS30
- 4.7 ANTENNA REQUIREMENT33
 - 4.7.1 STANDARD APPLICABLE33
 - 4.7.2 ANTENNA CONNECTED CONSTRUCTION33
- 5. PHOTOGRAPHS OF THE TEST CONFIGURATION.....34
- 6. INFORMATION ON THE TESTING LABORATORIES35



1. CERTIFICATION

PRODUCT: WIRELESS PRESENTATION MOUSE
BRAND NAME: SONY
MODEL NO.: VGP-WMS50
TEST SAMPLE: Engineering Sample
TESTED: June 10 ~ 16, 2005
APPLICANT: PRIMAX ELECTRONICS LTD.
STANDARDS: FCC Part 15, Subpart C (Section 15.247),
ANSI C63.4-2003

The above equipment has been tested by **Advance Data Technology Corporation**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's EMC characteristics under the conditions specified in this report.

PREPARED BY : Annie Chang , **DATE:** July 7, 2005
(Annie Chang)

TECHNICAL
ACCEPTANCE : Gary Chang , **DATE:** July 7, 2005
Responsible for RF (Gary Chang)

APPROVED BY : Cody Chang , **DATE:** July 7, 2005
(Cody Chang,
Deputy Manager)

2. SUMMARY OF TEST RESULTS

The EUT has been tested according to the following specifications:

APPLIED STANDARD: FCC Part 15, Subpart C (Section 15.247)			
Standard Section	Test Type and Limit	Result	Remark
15.207	AC Power Conducted Emission	N/A	The EUT power from AA battery x2
15.247(a)(2)	Spectrum Bandwidth of a Direct Sequence Spread Spectrum System Limit: min. 500kHz	PASS	Meet the requirement of limit.
15.247(b)	Maximum Peak Output Power Limit: max. 30dBm	PASS	Meet the requirement of limit.
15.247(d)	Radiated Emissions Limit: Table 15.209	PASS	Meet the requirement of limit. Minimum passing margin is -16.09dB at 951.40MHz
15.247(e)	Power Spectral Density Limit: max. 8dBm	PASS	Meet the requirement of limit.
15.247(d)	Band Edge Measurement Limit: 20dB less than the peak value of fundamental frequency	PASS	Meet the requirement of limit.

2.1 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4:

Measurement	Frequency	Uncertainty
Radiated emissions	30MHz ~ 200MHz	3.63 dB
	200MHz ~ 1000MHz	3.65 dB
	1GHz ~ 18GHz	2.20 dB
	18GHz ~ 40GHz	1.88 dB



3. GENERAL INFORMATION

3.1 GENERAL DESCRIPTION OF EUT

EUT	WIRELESS PRESENTATION MOUSE
MODEL NO.	VGP-WMS50
POWER SUPPLY	3Vdc from AA battery x2
MODULATION TECHNOLOGY	DSSS
MODULATION TYPE	GFSK
TRANSFER RATE	62.5 kbits / sec.
OUTPUT POWER	-1.89dBm
FREQUENCY RANGE	2402MHz ~ 2479MHz
NUMBER OF CHANNEL	78
ANTENNA TYPE	Printed antenna with -3.68dBi gain
DATA CABLE	N/A
I/O PORTS	N/A
ASSOCIATED DEVICES	NA

NOTE:

1. The EUT is a transceiver.
2. The above EUT information was declared by the manufacturer and for more detailed features description, please refer to the manufacturer's specifications or User's Manual.




3.2 DESCRIPTION OF TEST MODES

Seventy-eight channels are provided to this EUT.

Channel	Freq. (MHz)	Channel	Freq. (MHz)	Channel	Freq. (MHz)	Channel	Freq. (MHz)
0	2402	20	2422	40	2442	60	2462
1	2403	21	2423	41	2443	61	2463
2	2404	22	2424	42	2444	62	2464
3	2405	23	2425	43	2445	63	2465
4	2406	24	2426	44	2446	64	2466
5	2407	25	2427	45	2447	65	2467
6	2408	26	2428	46	2448	66	2468
7	2409	27	2429	47	2449	67	2469
8	2410	28	2430	48	2450	68	2470
9	2411	29	2431	49	2451	69	2471
10	2412	30	2431	50	2452	70	2472
11	2413	31	2433	51	2453	71	2473
12	2414	32	2434	52	2454	72	2474
13	2415	33	2435	53	2455	73	2475
14	2416	34	2436	54	2456	74	2476
15	2417	35	2437	55	2457	75	2477
16	2418	36	2438	56	2458	76	2478
17	2419	37	2439	57	2459	77	2479
18	2420	38	2440	58	2460		
19	2421	39	2441	59	2461		



3.2.1 CONFIGURATION OF SYSTEM UNDER TEST

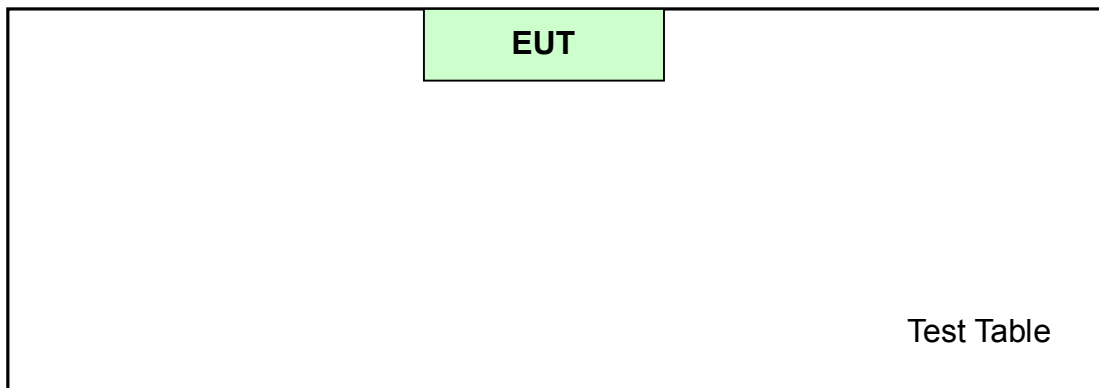



3.2.2 TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL:

EUT configure mode	Applicable to				Description
	PLC	RE<1G	RE≥1G	APCM	
-	Note	v	v	v	NA

Where PLC: Power Line Conducted Emission RE<1G RE: Radiated Emission below 1GHz
 RE≥1G: Radiated Emission above 1GHz APCM: Antenna Port Conducted Measurement

Note: No need to concern of Conducted Emission due to the EUT is powered by battery.

Radiated Emission Test (Below 1 GHz):

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

Available Channel	Tested Channel	Modulation Type
0 to 77	77	GFSK

Radiated Emission Test (Above 1 GHz):

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

Available Channel	Tested Channel	Modulation Type
0 to 77	0, 39, 77	GFSK

Bandedge Measurement:

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

Available Channel	Tested Channel	Modulation Type
0 to 77	0, 77	GFSK

Antenna Port Conducted Measurement:

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

Available Channel	Tested Channel	Modulation Type
0 to 77	0, 39, 77	GFSK



3.3 GENERAL DESCRIPTION OF APPLIED STANDARDS

The EUT is a WIRELESS PRESENTATION MOUSE. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

FCC Part 15, Subpart C. (15.247)

ANSI C63.4-2003

All test items have been performed and recorded as per the above standards.

3.4 DESCRIPTION OF SUPPORT UNITS

N/A



4. TEST TYPES AND RESULTS

4.1 CONDUCTED EMISSION MEASUREMENT

N/A

4.2 RADIATED EMISSION MEASUREMENT

4.2.1 LIMITS OF RADIATED EMISSION MEASUREMENT

Emissions radiated outside of the specified bands, shall be according to the general radiated limits in 15.209 as following:

Frequencies (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

NOTE:

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
3. As shown in 15.35(b), for frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.



4.2.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED UNTIL
Test Receiver ROHDE & SCHWARZ	ESI7	838496/016	Jan. 07, 2006
Spectrum Analyzer ROHDE & SCHWARZ	FSP40	100041	Nov. 29, 2005
BILOG Antenna SCHWARZBECK	VULB9168	9168-155	Jan. 22, 2006
HORN Antenna SCHWARZBECK	BBHA 9120D	9120D-404	Jan. 05, 2006
HORN Antenna SCHWARZBECK	BBHA 9170	BBHA 9170242	Jan. 23, 2006
Preamplifier Agilent	8447D	2944A10631	Nov. 17, 2005
Preamplifier Agilent	8449B	3008A01960	Nov. 14, 2005
RF signal cable HUBER+SUHNNER	SUCOFLEX 104	219272/4	Jan. 26, 2006
RF signal cable HUBER+SUHNNER	SUCOFLEX 104	219275/4	Jan. 26, 2006
Software ADT.	ADT_Radiated_V5.14	NA	NA
Antenna Tower inn-co GmbH	MA 4000	010303	NA
Antenna Tower Controller inn-co GmbH	CO2000	019303	NA
Turn Table ADT.	TT100.	TT93021704	NA
Turn Table Controller ADT.	SC100.	SC93021704	NA

- NOTE:**
1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
 2. The test was performed in HwaYa Chamber 3.
 3. The horn antenna and HP preamplifier (model: 8449B) are used only for the measurement of emission frequency above 1GHz if tested.
 4. The IC Site Registration No. is IC4924-4.



4.2.3 TEST PROCEDURES

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi- anechoic. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna is a broadband antenna, and its height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions would be re-tested one by one using peak, quasi-peak method or average method as specified and then reported in data sheet.


NOTE:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Quasi-peak detection at frequency below 1GHz.
2. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 1 MHz for Peak detection (PK) at frequency above 1GHz.

4.2.4 DEVIATION FROM TEST STANDARD

No deviation

4.2.5 TEST SETUP

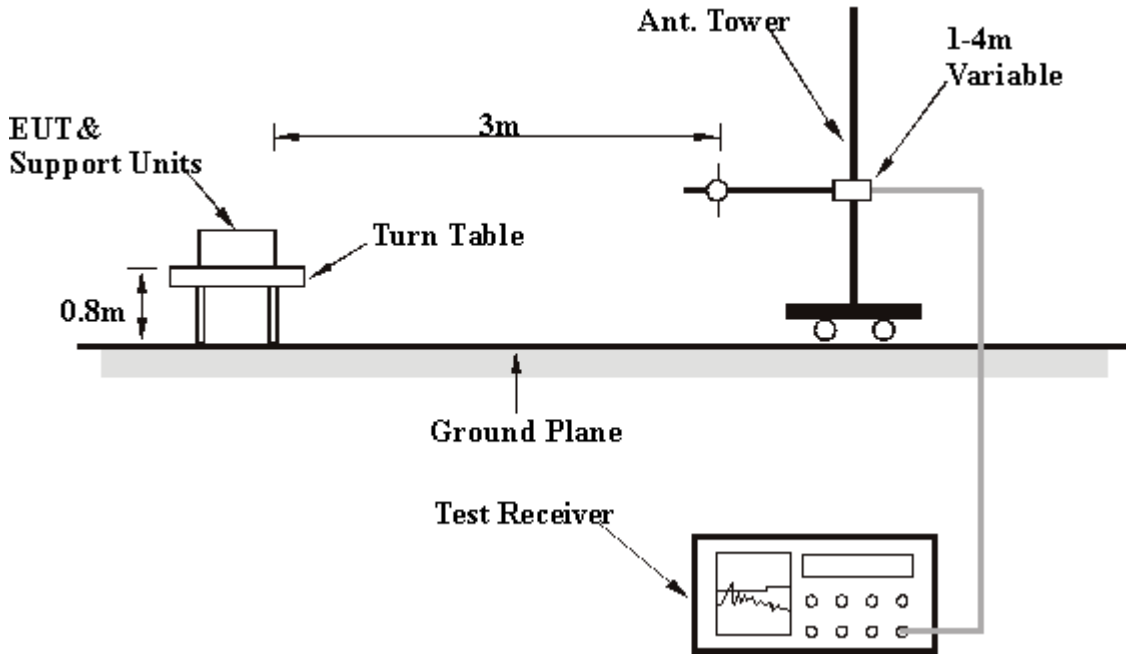

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

4.2.6 EUT OPERATING CONDITIONS

Set the transmitter part of EUT under transmission condition continuously at specific channel frequency.



4.2.7 TEST RESULTS

Below 1GHz Worst-Case Data

EUT	WIRELESS PRESENTATION MOUSE	MEASUREMENT DETAIL	
CHANNEL	Channel 77	MODEL	VGP-WMS50
MODULATION TYPE	GFSK	FREQUENCY RANGE	Below 1000MHz
INPUT POWER	3Vdc from battery	DETECTOR FUNCTION	Quasi-Peak
ENVIRONMENTAL CONDITIONS	25deg. C, 66%RH, 994hPa	TESTED BY	Brad Wu

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	743.41	22.59 QP	46.00	-23.41	3.00 H	151	-0.49	23.08
2	776.45	22.26 QP	46.00	-23.74	3.00 H	166	-1.10	23.36
3	821.16	23.34 QP	46.00	-22.66	3.00 H	22	-0.31	23.65
4	877.54	24.30 QP	46.00	-21.70	3.00 H	322	-0.11	24.41
5	912.53	23.54 QP	46.00	-22.46	1.00 H	73	-1.40	24.94
6	951.40	29.91 QP	46.00	-16.09	2.00 H	187	4.57	25.33

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	749.24	21.82 QP	46.00	-24.18	1.00 V	295	-1.40	23.22
2	780.34	20.81 QP	46.00	-25.19	1.00 V	346	-2.56	23.37
3	825.05	22.90 QP	46.00	-23.10	1.00 V	49	-0.78	23.69
4	865.87	24.41 QP	46.00	-21.59	1.00 V	82	0.21	24.20
5	904.75	23.45 QP	46.00	-22.55	1.00 V	250	-1.41	24.86
6	951.40	28.82 QP	46.00	-17.18	2.00 V	13	3.49	25.33

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.



1 ~ 25GHz Worst-Case Data

EUT	WIRELESS PRESENTATION MOUSE	MEASUREMENT DETAIL	
CHANNEL	Channel 0	MODEL	VGP-WMS50
MODULATION TYPE	GFSK	FREQUENCY RANGE	1 ~ 25GHz
INPUT POWER	3Vdc from battery	DETECTOR FUNCTION	Peak(PK) Average (AV)
ENVIRONMENTAL CONDITIONS	25deg. C, 66%RH, 994hPa	TESTED BY	Brad Wu

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1746.00	40.26 PK	74.00	-33.74	1.06 H	217	10.55	29.71
2	2390.00	38.37 PK	74.00	-35.63	1.36 H	189	6.50	31.87
3	*2402.00	93.21 PK			1.36 H	189	61.29	31.92
3	*2402.00	92.78 AV			1.36 H	189	60.86	31.92
4	4804.00	46.85 PK	74.00	-27.15	1.14 H	40	9.08	37.77
4	4804.00	36.03 AV	54.00	-17.97	1.14 H	40	-1.74	37.77

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1746.00	41.53 PK	74.00	-32.47	1.03 V	214	11.82	29.71
2	2390.00	37.89 PK	74.00	-36.11	1.08 V	165	6.02	31.87
3	*2402.00	92.73 PK			1.08 V	165	60.81	31.92
3	*2402.00	91.74 AV			1.08 V	165	59.82	31.92
4	4804.00	47.65 PK	74.00	-26.35	1.00 V	348	9.88	37.77
4	4804.00	36.09 AV	54.00	-17.91	1.00 V	348	-1.68	37.77

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “ * “ : Fundamental frequency



EUT	WIRELESS PRESENTATION MOUSE	MEASUREMENT DETAIL	
CHANNEL	Channel 39	MODEL	VGP-WMS50
MODULATION TYPE	GFSK	FREQUENCY RANGE	1 ~ 25GHz
INPUT POWER	3Vdc from battery	DETECTOR FUNCTION	Peak(PK) Average (AV)
ENVIRONMENTAL CONDITIONS	25deg. C, 66%RH, 994hPa	TESTED BY	Brad Wu

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1746.00	41.25 PK	74.00	-32.75	1.06 H	219	11.54	29.71
2	*2441.00	91.59 PK			1.31 H	190	59.52	32.07
2	*2441.00	90.82 AV			1.31 H	190	58.75	32.07
3	4882.00	47.25 PK	74.00	-26.75	1.03 H	195	9.24	38.01

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1746.00	40.22 PK	74.00	-33.78	1.00 V	123	10.51	29.71
2	*2441.00	85.40 PK			1.06 V	246	53.33	32.07
2	*2441.00	84.56 AV			1.06 V	246	52.49	32.07
3	4882.00	45.57 PK	74.00	-28.43	1.21 V	252	7.56	38.01

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “ * “ : Fundamental frequency



EUT	WIRELESS PRESENTATION MOUSE	MEASUREMENT DETAIL	
CHANNEL	Channel 77	MODEL	VGP-WMS50
MODULATION TYPE	GFSK	FREQUENCY RANGE	1 ~ 25GHz
INPUT POWER	3Vdc from battery	DETECTOR FUNCTION	Peak(PK) Average (AV)
ENVIRONMENTAL CONDITIONS	25deg. C, 66%RH, 994hPa	TESTED BY	Brad Wu

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1746.00	41.19 PK	74.00	-32.81	1.06 H	217	11.48	29.71
2	*2479.00	91.30 PK			1.34 H	9	59.07	32.23
2	*2479.00	90.61 AV			1.34 H	9	58.38	32.23
3	2483.50	43.38 PK	74.00	-30.62	1.34 H	9	11.14	32.24
4	4958.00	46.26 PK	74.00	-27.74	1.15 H	198	8.01	38.25

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1746.00	41.09 PK	74.00	-32.91	1.06 V	215	11.38	29.71
2	*2479.00	83.58 PK			1.15 V	348	51.35	32.23
2	*2479.00	82.72 AV			1.15 V	348	50.49	32.23
3	2483.50	35.65 PK	74.00	-38.35	1.15 V	348	3.41	32.24
4	4958.00	47.83 PK	74.00	-26.17	1.01 V	168	9.58	38.25

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. " * " : Fundamental frequency



4.3 6dB BANDWIDTH MEASUREMENT

4.3.1 LIMITS OF 6dB BANDWIDTH MEASUREMENT

The minimum of 6dB Bandwidth Measurement is 0.5 MHz.

4.3.2 TEST INSTRUMENTS

Description & Manufacturer	Model No.	Serial No.	Calibrated Until
SPECTRUM ANALYZER	FSEK 30	100049	Aug. 12, 2005

NOTE: The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

4.3.3 TEST PROCEDURE

The transmitter output was connected to the spectrum analyzer through an attenuator. The bandwidth of the fundamental frequency was measured by spectrum analyzer with 100kHz RBW and 100kHz VBW. The 6dB bandwidth is defined as the total spectrum the power of which is higher than peak power minus 6dB.

4.3.4 DEVIATION FROM TEST STANDARD

No deviation

4.3.5 TEST SETUP



4.3.6 EUT OPERATING CONDITIONS

The software provided by client enabled the EUT to transmit and receive data at lowest, middle and highest channel frequencies individually.




4.3.7 TEST RESULTS

EUT	WIRELESS PRESENTATION MOUSE	MODEL	VGP-WMS50
INPUT POWER (SYSTEM)	120Vac, 60 Hz	MODULATION TYPE	GFSK
ENVIRONMENTAL CONDITIONS	26deg. C, 61%RH, 997hPa	TESTED BY	Gary Chang


CHANNEL	CHANNEL FREQUENCY (MHz)	6dB BANDWIDTH (MHz)	MINIMUM LIMIT (MHz)	PASS/FAIL
0	2402	0.90	0.5	PASS
39	2441	0.92	0.5	PASS
77	2479	0.90	0.5	PASS

CH 0

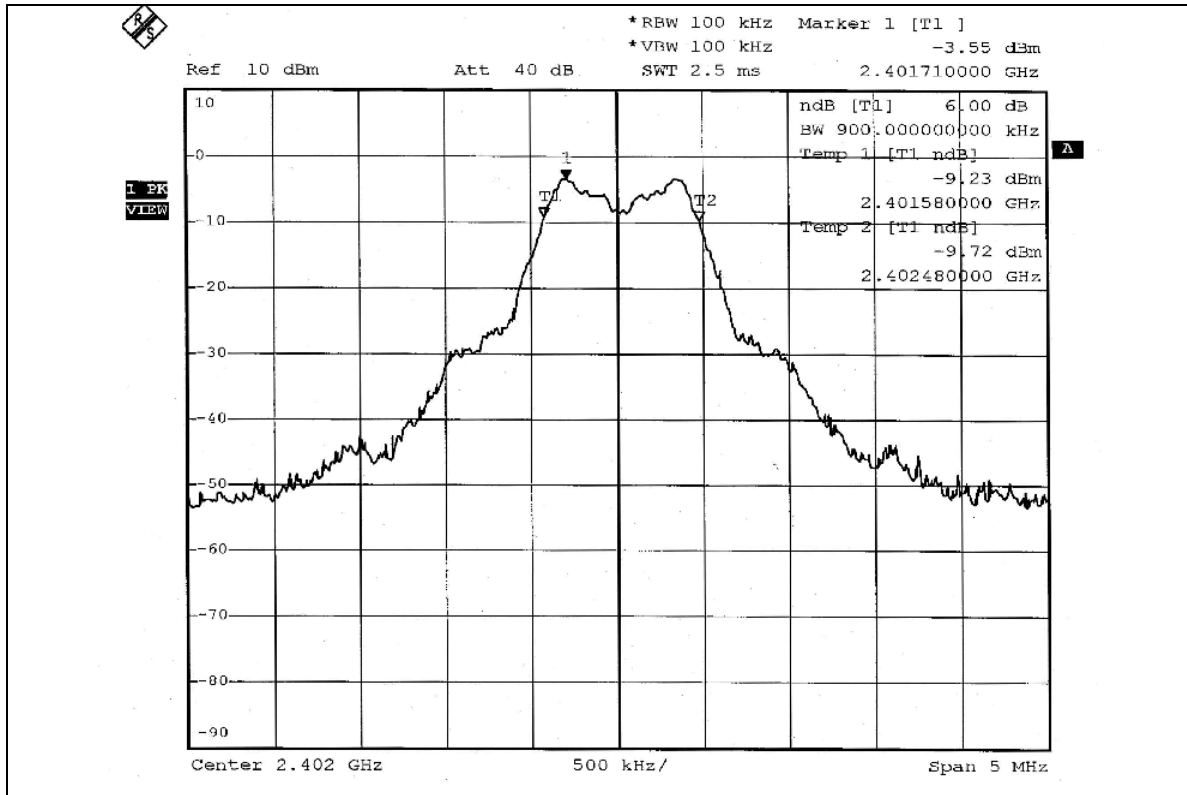




CH 39

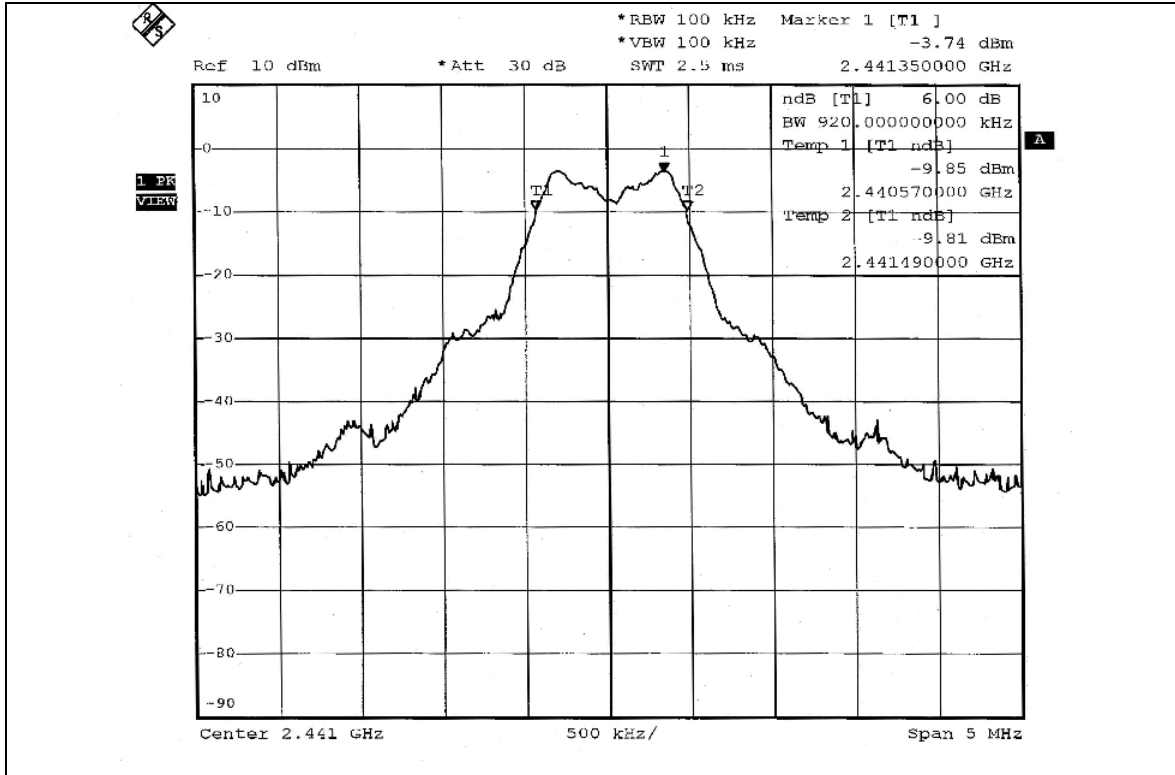

CH 77

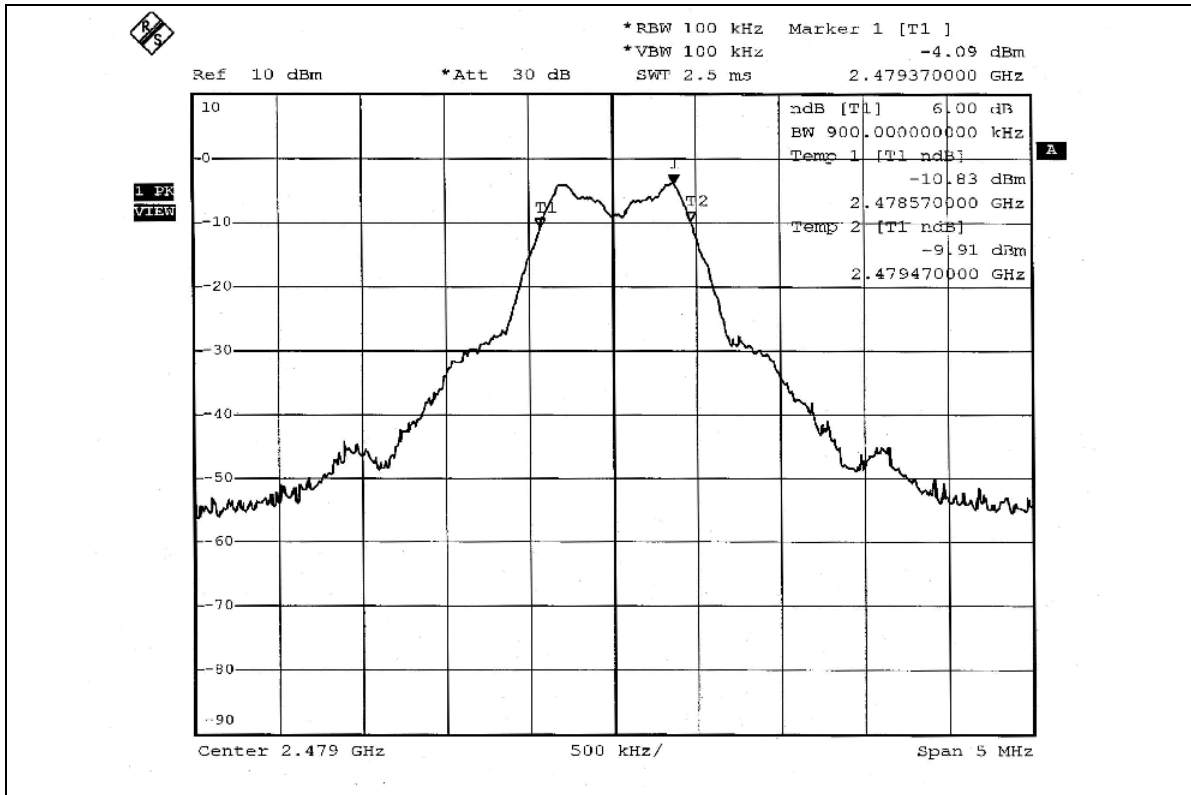



4.4 MAXIMUM PEAK OUTPUT POWER

4.4.1 LIMITS OF MAXIMUM PEAK OUTPUT POWER MEASUREMENT

The Maximum Peak Output Power Measurement is 30dBm.

4.4.2 INSTRUMENTS

Description & Manufacturer	Model No.	Serial No.	Calibrated Until
SPECTRUM ANALYZER	FSEK30	100049	Aug. 12, 2004

NOTE: The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

4.4.3 TEST PROCEDURES


1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Turn on the EUT and connect it to measurement instrument. Then set it to any one convenient frequency within its operating range. Set a reference level on the measuring instrument equal to the highest peak value.
3. The center frequency of the spectrum analyzer is set to the fundamental frequency and using 1 MHz RBW and 1 MHz VBW, the peak value was measured and recorded.
4. Repeat above procedures until all frequencies measured were complete.

Note: The spectrum plots are attached on following pages.

4.4.4 DEVIATION FROM TEST STANDARD

No deviation

4.4.5 TEST SETUP

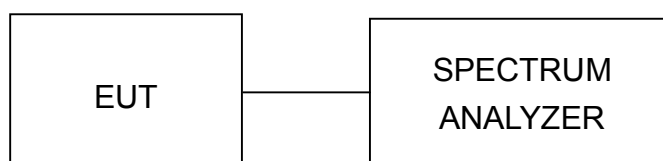

4.4.6 EUT OPERATING CONDITIONS

Same as Item 4.3.6




4.4.7 TEST RESULTS

EUT	WIRELESS PRESENTATION MOUSE	MODEL	VGP-WMS50
INPUT POWER (SYSTEM)	120Vac, 60Hz	MODULATION TYPE	GFSK
ENVIRONMENTAL CONDITIONS	26deg. C, 61%RH, 997hPa	TESTED BY	Gary Chang


CHANNEL	CHANNEL FREQUENCY (MHz)	PEAK POWER OUTPUT (dBm)	PEAK POWER LIMIT (dBm)	PASS/FAIL
0	2402	-1.89	30	PASS
39	2441	-2.00	30	PASS
77	2479	-2.38	30	PASS

Channel 0

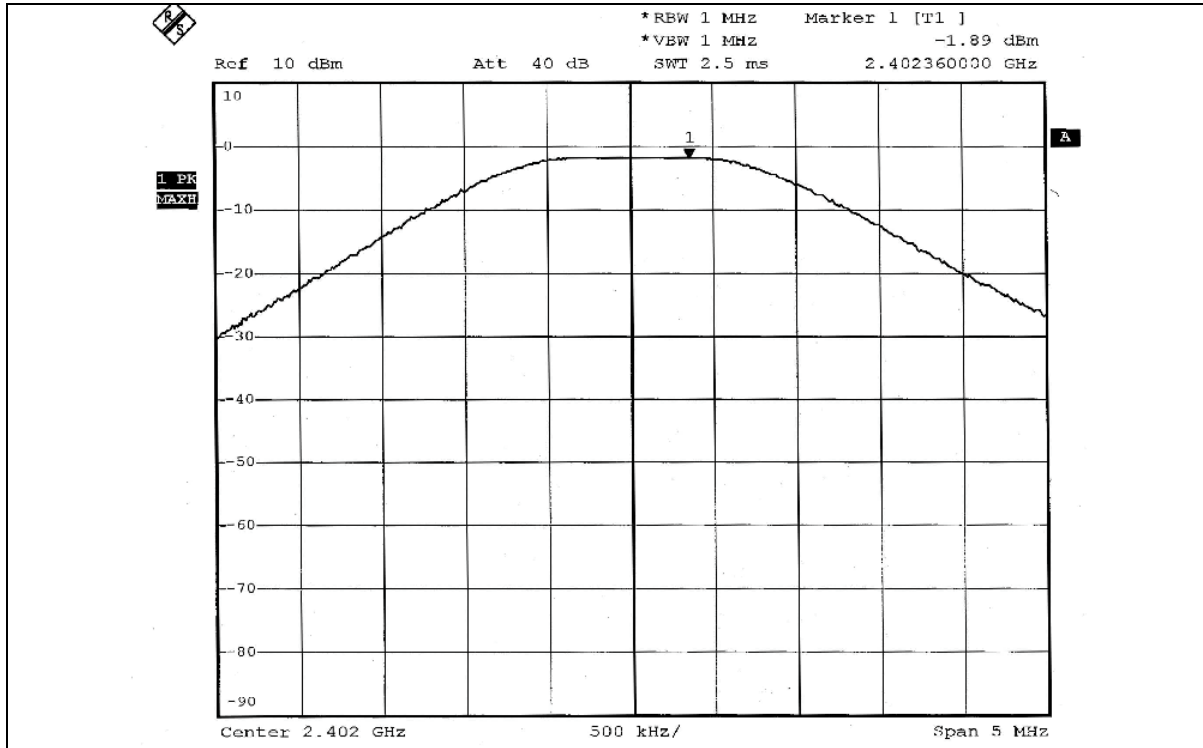




Channel 39

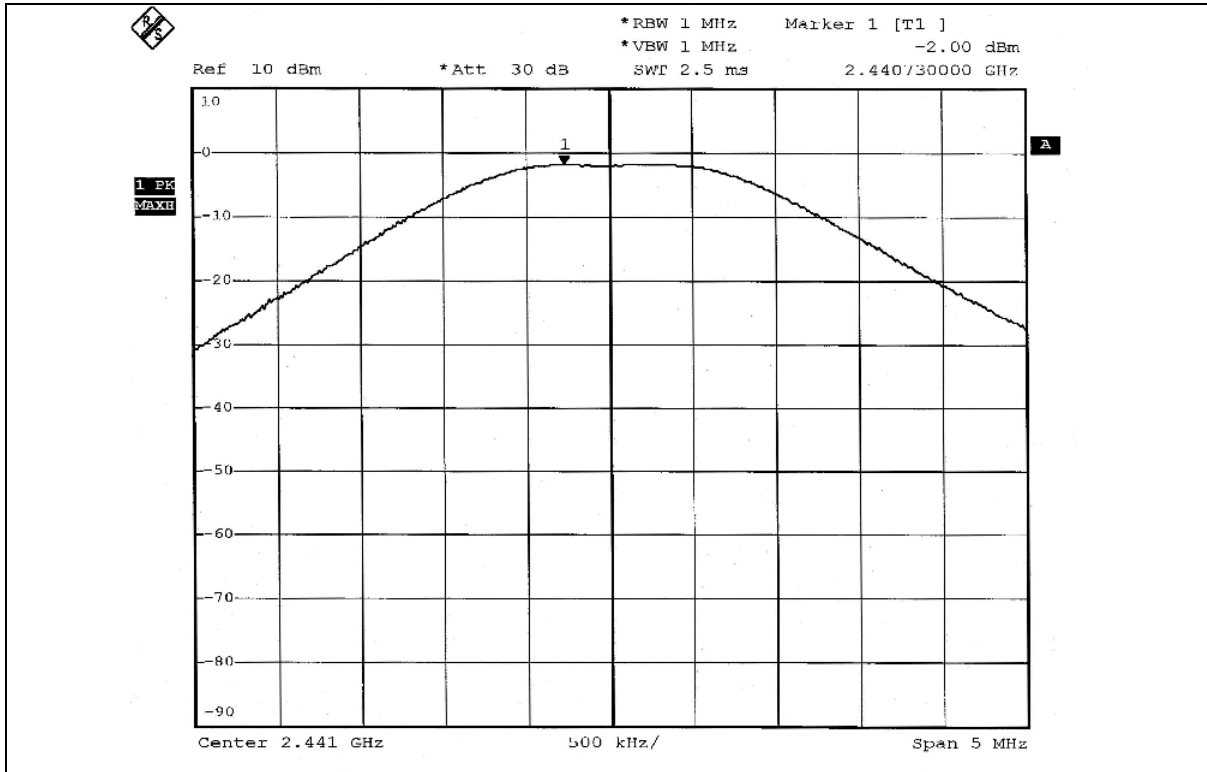

Channel 77

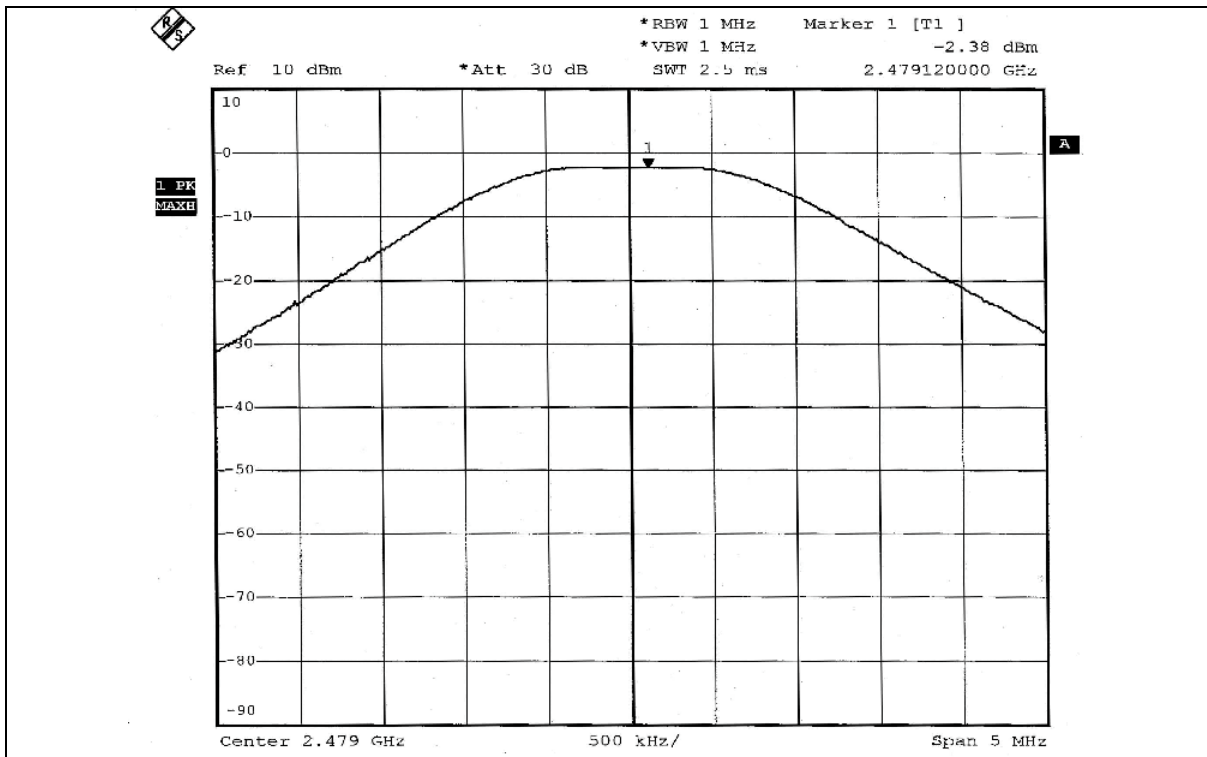

4.5 POWER SPECTRAL DENSITY MEASUREMENT

4.5.1 LIMITS OF POWER SPECTRAL DENSITY MEASUREMENT

The Maximum of Power Spectral Density Measurement is 8dBm.

4.5.2 TEST INSTRUMENTS

Description & Manufacturer	Model No.	Serial No.	Calibrated Until
R&S SPECTRUM ANALYZER	FSEK30	100049	Aug. 12, 2005

NOTE: The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

4.5.3 TEST PROCEDURE

The transmitter output was connected to the spectrum analyzer through an attenuator, the bandwidth of the fundamental frequency was measured with the spectrum analyzer using 3kHz RBW and 30kHz VBW, set sweep time = span/3kHz.


The power spectral density was measured and recorded.

The sweep time is allowed to be longer than span/3kHz for a full response of the mixer in the spectrum analyzer.

4.5.4 DEVIATION FROM TEST STANDARD

No deviation

4.5.5 TEST SETUP



4.5.6 EUT OPERATING CONDITION

Same as Item 4.3.6




4.5.7 TEST RESULTS

EUT	WIRELESS PRESENTATION MOUSE	MODEL	VGP-WMS50
INPUT POWER (SYSTEM)	120Vac, 60Hz	MODULATION TYPE	GFSK
ENVIRONMENTAL CONDITIONS	26deg. C, 61%RH, 997hPa	TESTED BY	Gary Chang


CHANNEL	CHANNEL FREQUENCY (MHz)	RF POWER LEVEL IN 3kHz BW (dBm)	MAXIMUM LIMIT (dBm)	PASS/FAIL
0	2402	-12.80	8	PASS
39	2441	-13.14	8	PASS
77	2479	-13.85	8	PASS

CH 0

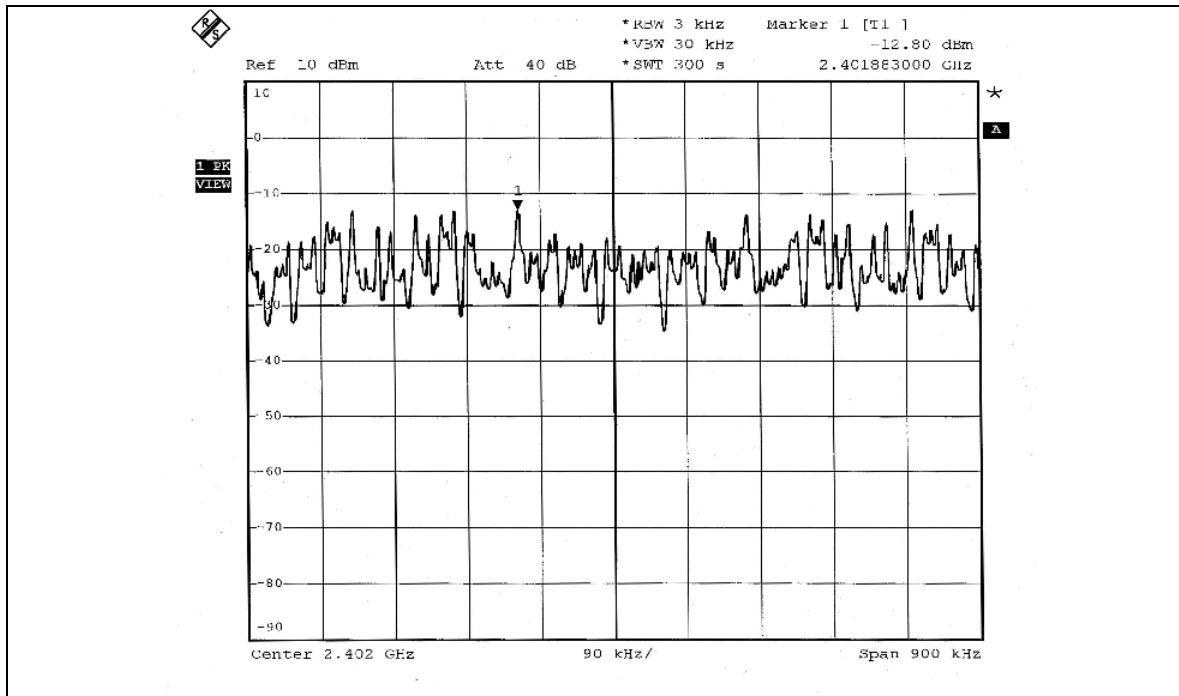




CH 39

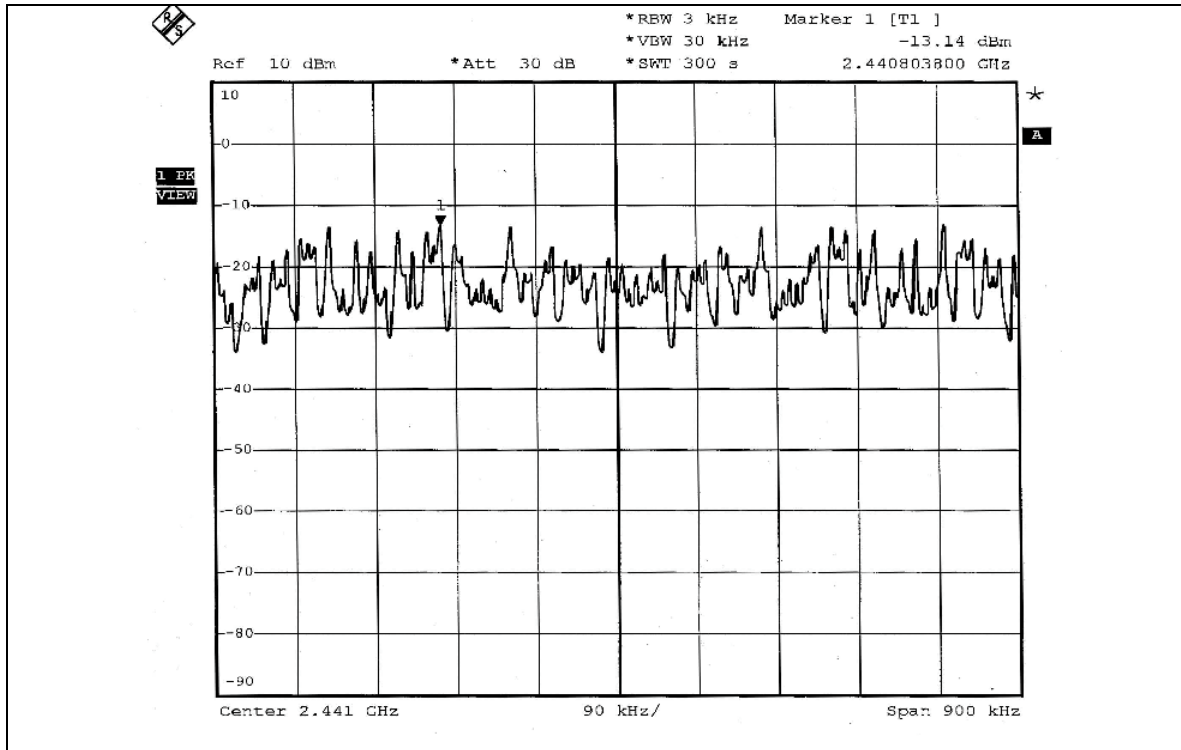

CH 77

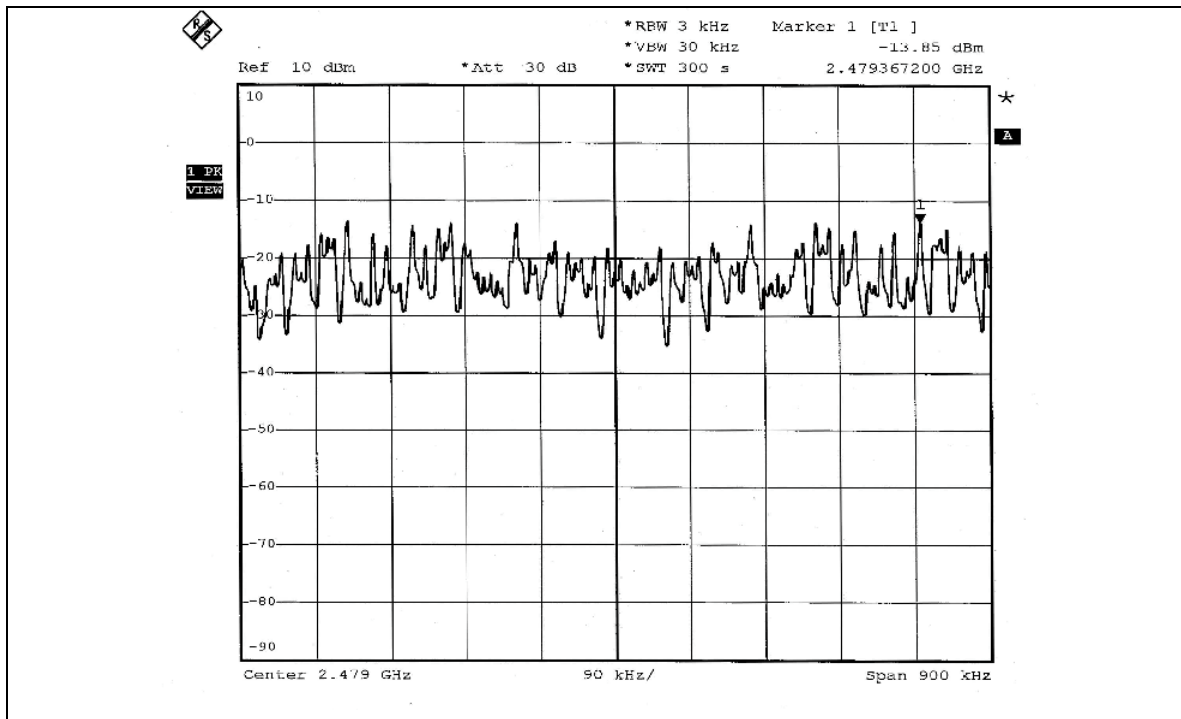



4.6 BAND EDGES MEASUREMENT

4.6.1 LIMITS OF BAND EDGES MEASUREMENT

Below -20dB of the highest emission level of operating band (in 100kHz Resolution Bandwidth).

4.6.2 TEST INSTRUMENTS

Description & Manufacturer	Model No.	Serial No.	Calibrated Until
R&S SPECTRUM ANALYZER	FSEK30	100049	Aug. 12, 2005

NOTE: The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

4.6.3 TEST PROCEDURE

The transmitter output was connected to the spectrum analyzer via a low lose cable. Set both RBW and VBW of spectrum analyzer to 100 kHz and 100 kHz suitable frequency span including 100 MHz bandwidth from band edge. The band edges was measured and recorded.

The spectrum plots (Peak RBW=VBW=100kHz) are attached on the following pages.

4.6.4 DEVIATION FROM TEST STANDARD

No deviation

4.6.5 EUT OPERATING CONDITION

Same as Item 4.3.6



4.6.6 TEST RESULTS



The spectrum plots are attached on the following 4 images. D2 line indicates the highest level, and D1 line indicates the 20dB offset below D2. It shows compliance with the requirement in part 15.247(d).



NOTE 1: The band edge emission plot on page 31 shows 53.87dBc between carrier maximum power and local maximum emission in restrict band (2.3761GHz). The emission of carrier strength list in the test result of channel 0 at the item 4.2.7 is 93.21dBuV/m (Peak), so the maximum field strength in restrict band is $93.21 - 53.87 = 39.34$ dBuV/m which is under 74dBuV/m limit.

The band edge emission plot of on page 31 shows 53.87dBc between carrier maximum power and local maximum emission in restrict band (2.3761GHz). The emission of carrier strength list in the test result of channel 0 at the item 4.2.7 is 92.78dBuV/m (Average), so the maximum field strength in restrict band is $92.78 - 53.87 = 38.91$ dBuV/m which is under 54dBuV/m limit.

NOTE 2: The band edge emission plot on page 32 shows 54.26dBc between carrier maximum power and local maximum emission in restrict band (2.4845GHz). The emission of carrier strength list in the test result of channel 77 at the item 4.2.7 is 91.30dBuV/m (Peak), so the maximum field strength in restrict band is $91.30 - 54.26 = 37.04$ dBuV/m which is under 74dBuV/m limit.

The band edge emission plot on page 32 shows 54.26dBc between carrier maximum power and local maximum emission in restrict band (2.4845GHz). The emission of carrier strength list in the test result of channel 77 at the item 4.2.7 is 90.61dBuV/m (Average), so the maximum field strength in restrict band is $90.61 - 54.26 = 36.35$ dBuV/m which is under 54dBuV/m limit.

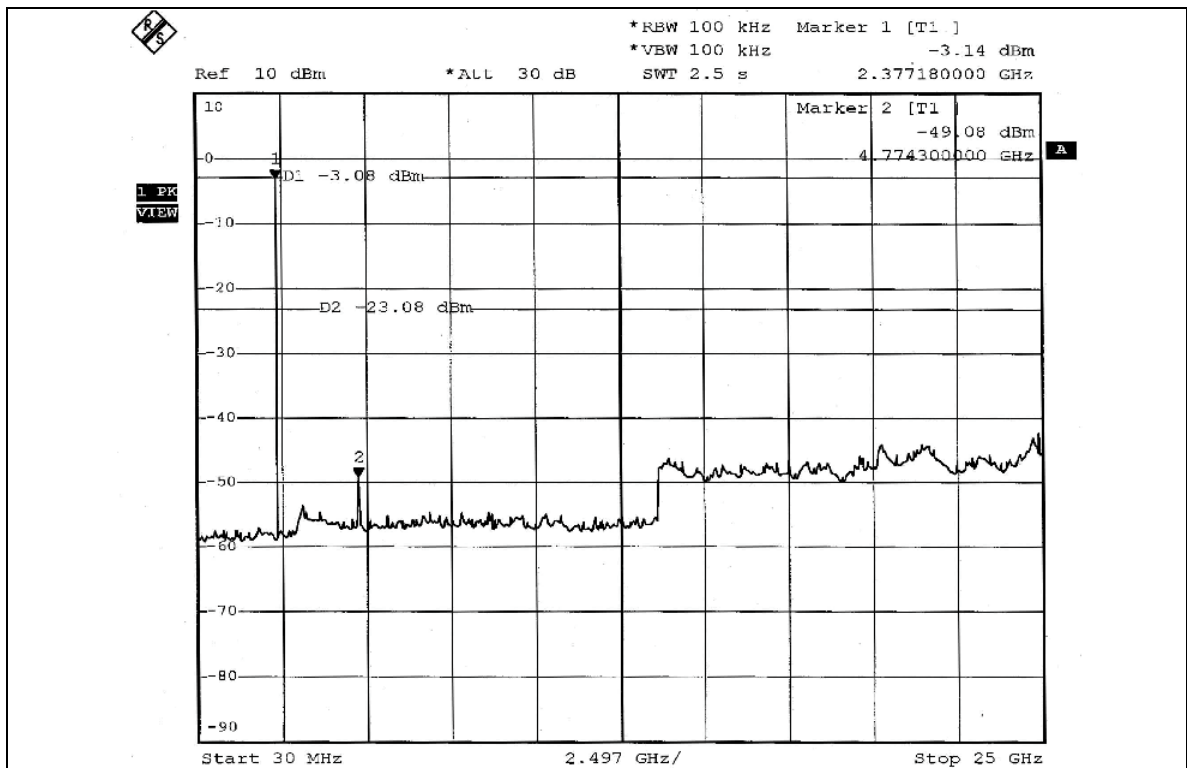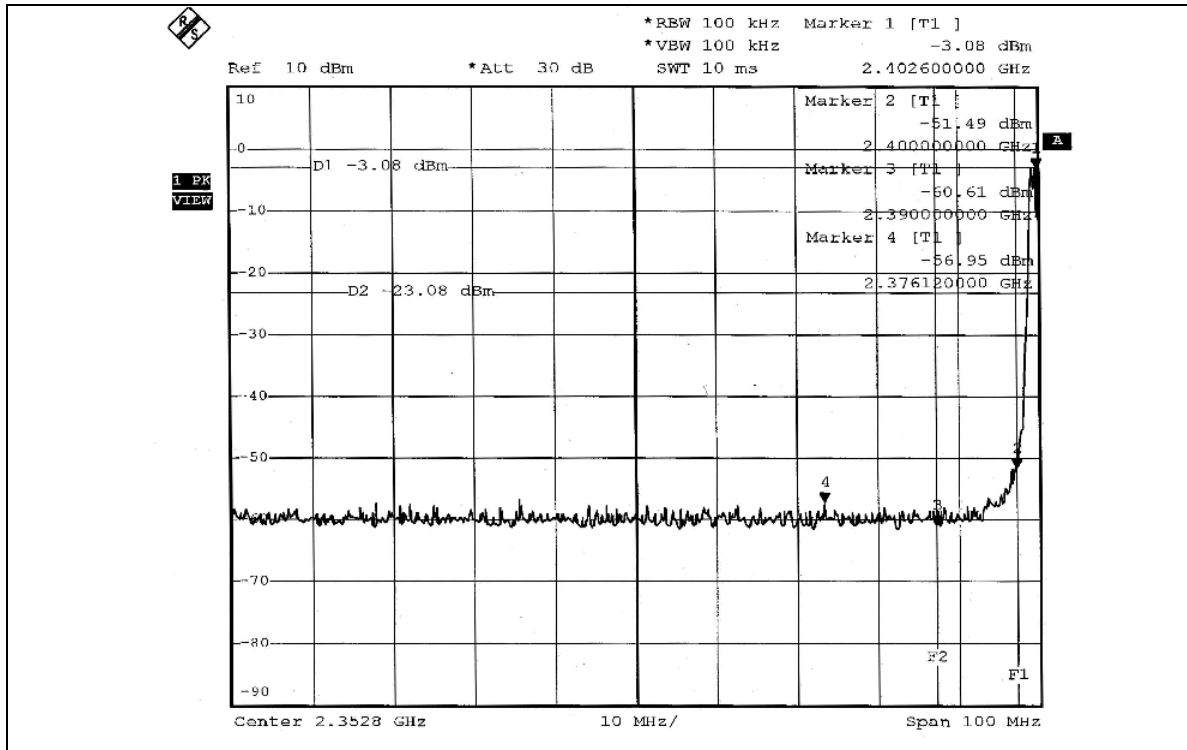

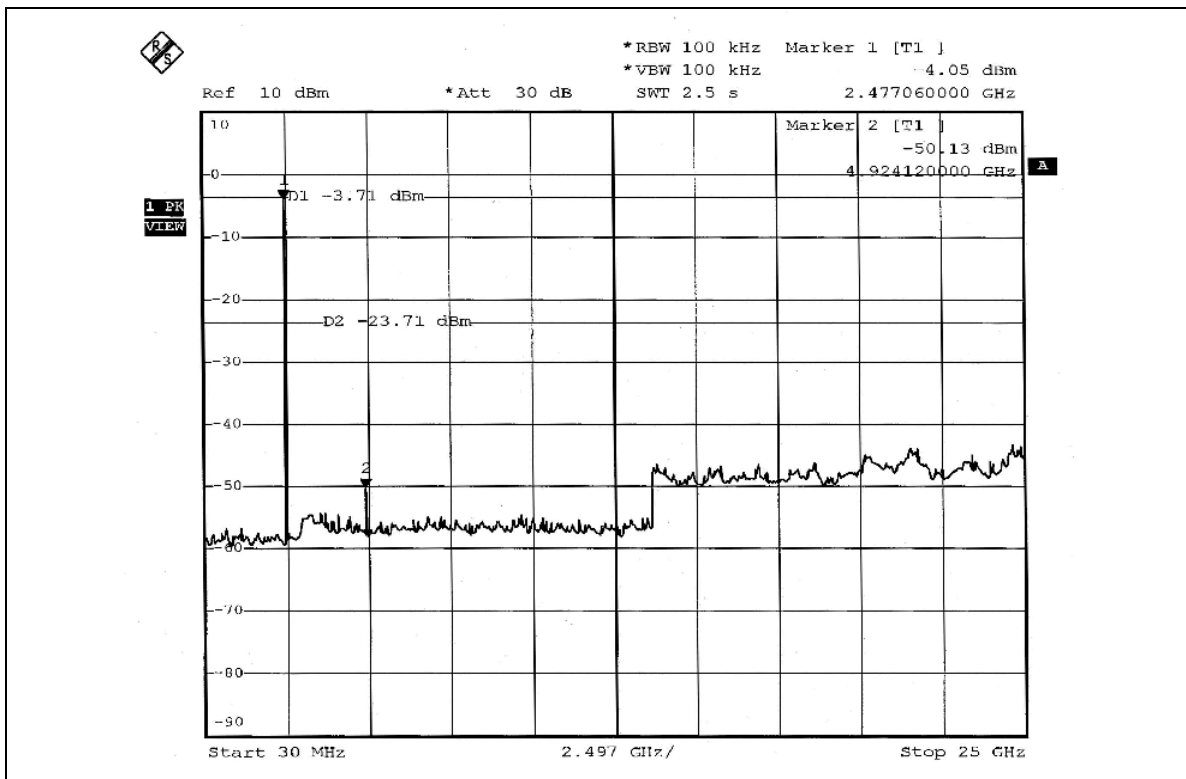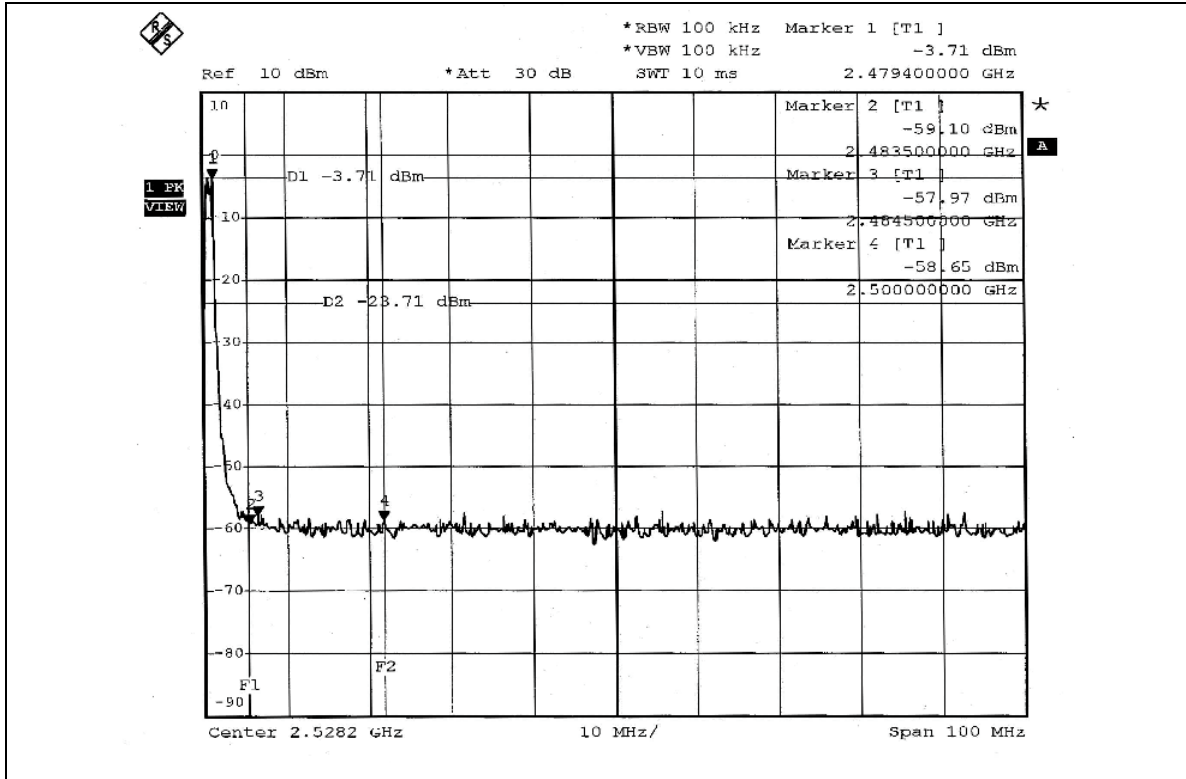



4.7 ANTENNA REQUIREMENT

4.7.1 STANDARD APPLICABLE



For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. And according to FCC 47 CFR Section 15.247 (b), if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

4.7.2 ANTENNA CONNECTED CONSTRUCTION

The antenna used in this product is Printed antenna without connector. The maximum Gain of the antenna is -3.68dBi .

5. PHOTOGRAPHS OF THE TEST CONFIGURATION

RADIATED EMISSION TEST

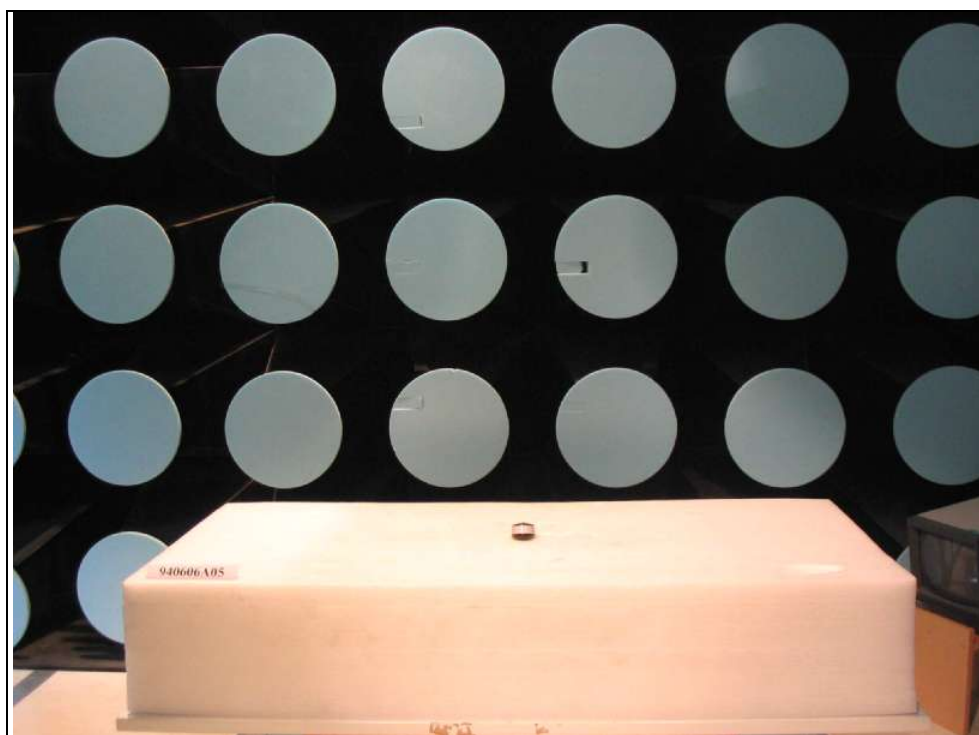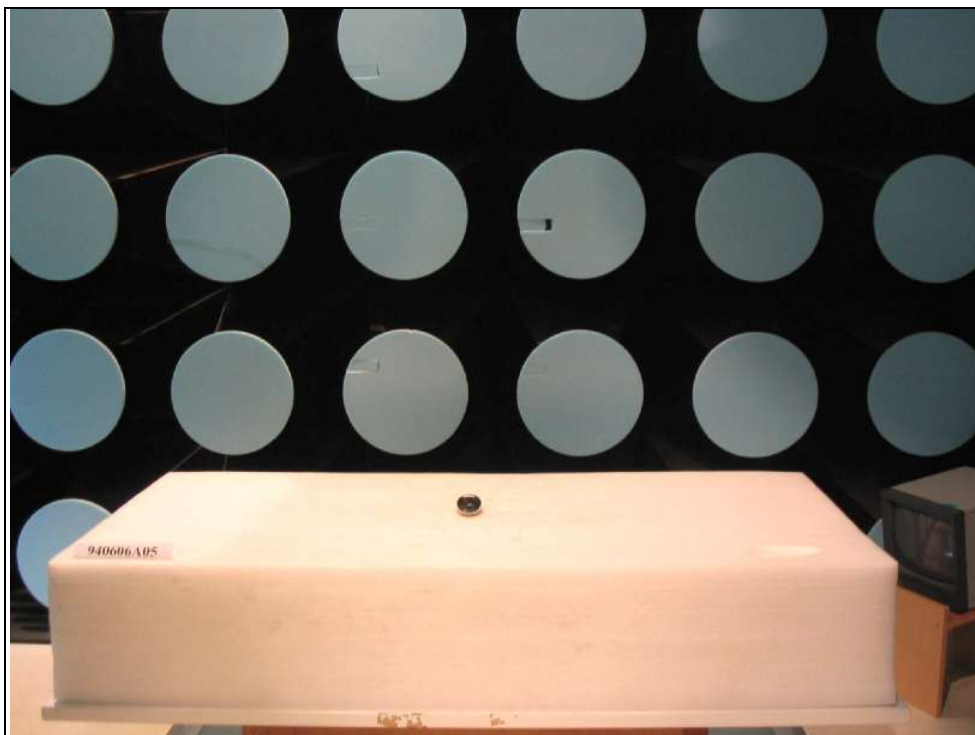



6. INFORMATION ON THE TESTING LABORATORIES

We, ADT Corp., were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are accredited and approved by the following approval agencies according to ISO/IEC 17025.

USA	FCC, NVLAP, UL, A2LA
Germany	TUV Rheinland
Japan	VCCI
Norway	NEMKO
Canada	INDUSTRY CANADA , CSA
R.O.C.	CNLA, BSMI, DGT
Netherlands	Telefication
Singapore	PSB , GOST-ASIA(MOU)
Russia	CERTIS(MOU)

Copies of accreditation certificates of our laboratories obtained from approval agencies can be downloaded from our web site:

www.adt.com.tw/index.5/phtml. If you have any comments, please feel free to contact us at the following:

Linko EMC/RF Lab:

Tel: 886-2-26052180

Fax: 886-2-26052943

Hsin Chu EMC/RF Lab:

Tel: 886-3-5935343

Fax: 886-3-5935342

Hwa Ya EMC/RF/Safety Telecom Lab:

Tel: 886-3-3183232

Fax: 886-3-3185050

Web Site: www.adt.com.tw

The address and road map of all our labs can be found in our web site also