




Label Location

REV.	DESCRIPTION	ENG.	APPROVAL

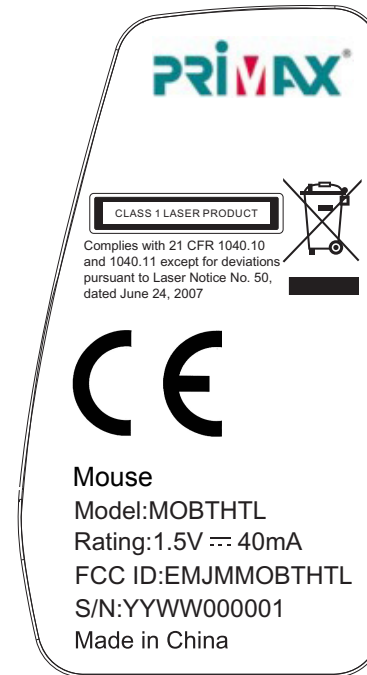

2:1

**NOTE:**

1. Printing: Pantone black on white background.
2. TOL: +0.3/-0.5mm
3. The dimensions marked with "\*" are important.
4. Glue T=0.025~0.03mm
5. Stickiness: 3.0kg/cm<sup>2</sup>
6. Product must be halogen free
7. Requirement of PRIMAX Part:
  1. Comply with PRIMAX QW-5Q002 "Green Product Chemical Substances Specifion."
  2. Follow customer's specification as required.
  3. Follow Halogen- Free requirement : Br<900 ppm, Cl<900 ppm, Br+Cl< 1500 ppm if required.

8. S/N: YY WW XXXXXX

Serial No.(From 000001.000002.000003.....999999)  
 Week(01.02...)此周別碼為生產日期，作大貨時請生管提供  
 Year(2014=14, 2015=15...)

DO NOT SCALE DRAWING		PRIMAX 致伸資訊電子有限公司 PRIMAX ELECTRONICS LTD.											
<small>THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF PRIMAX ELECTRONICS LTD. AND SHALL NOT BE REPRODUCED COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF PRIMAX ELECTRONICS LTD.</small>		USED Citrix	APPD. Sarah.Lee										
<small>UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN MILLIMETERS ANGULAR TOLERANCE: ±1.0°</small>		FINISH	CHKD. Apple.Zhao										
<table border="1"> <thead> <tr> <th>DIMENSIONS</th> <th>TOLERANCE</th> </tr> </thead> <tbody> <tr> <td>0.00 TO 30.00mm</td> <td>±0.10mm</td> </tr> <tr> <td>30.01 TO 80.00mm</td> <td>±0.13mm</td> </tr> <tr> <td>80.01 TO 150.00mm</td> <td>±0.15mm</td> </tr> <tr> <td>150.01 ↑</td> <td>±0.20mm</td> </tr> </tbody> </table>		DIMENSIONS	TOLERANCE	0.00 TO 30.00mm	±0.10mm	30.01 TO 80.00mm	±0.13mm	80.01 TO 150.00mm	±0.15mm	150.01 ↑	±0.20mm	SCALE / UNIT mm	DR. Helen.Yuan2014/11/27
DIMENSIONS	TOLERANCE												
0.00 TO 30.00mm	±0.10mm												
30.01 TO 80.00mm	±0.13mm												
80.01 TO 150.00mm	±0.15mm												
150.01 ↑	±0.20mm												
MATERIAL		TITLE BOTTOM LABEL											
80#合成紙+霧P		DWG NO. 304009999010											
		FILE NAME 304009999010	SHEET 1/1										
			REV. 1										