

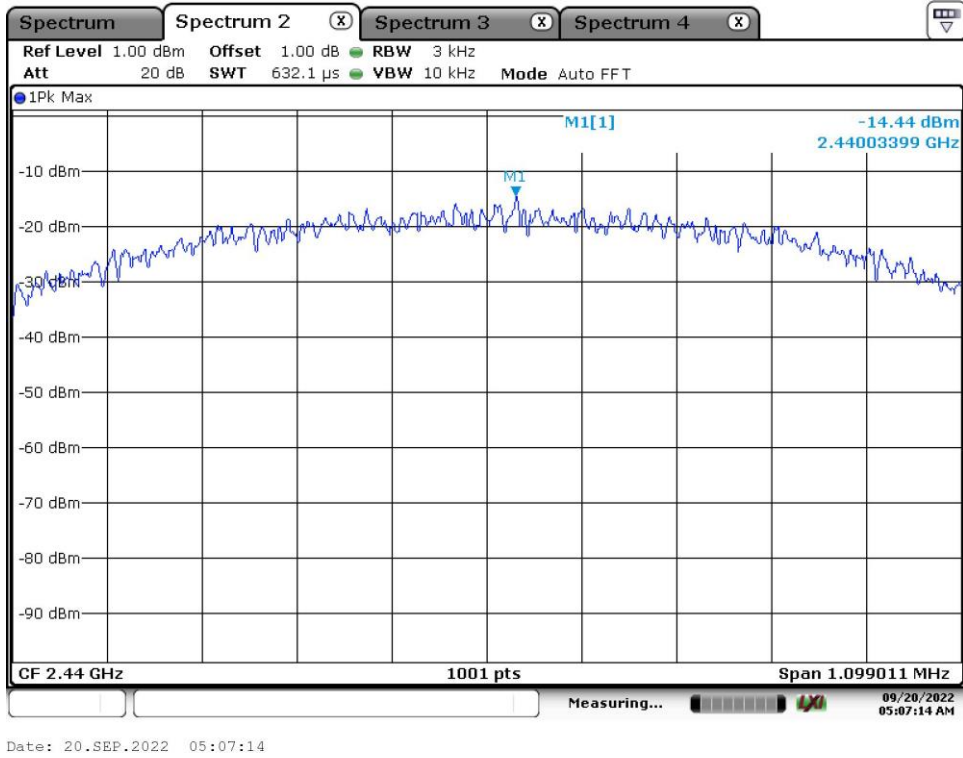


Appendix B: Test Results of Bluetooth LE & Conducted Emission

APPENDIX B: TEST RESULTS OF BLUETOOTH LE & CONDUCTED EMISSION	1
APPENDIX B.1: TEST RESULTS OF CONDUCTED POWER SPECTRAL DENSITY	2
APPENDIX B.2: TEST RESULTS OF 6DB BANDWIDTH	4
APPENDIX B.3: TEST RESULTS OF 99% BANDWIDTH	7
APPENDIX B.4: TEST RESULTS OF CONDUCTED SPURIOUS EMISSIONS MEASURED IN 100 KHz BANDWIDTH	10
APPENDIX B.5: TEST RESULTS OF RADIATED SPURIOUS EMISSIONS	14
30 MHz - 1GHz	14
1GHz - 18GHz.....	16
APPENDIX B.6: TEST RESULTS OF RADIATED EMISSIONS IN RESTRICTED BANDS	28
APPENDIX B.7: TEST RESULTS OF CONDUCTED EMISSION ON AC MAINS	32

Appendix B.1: Test Results of Conducted Power Spectral Density

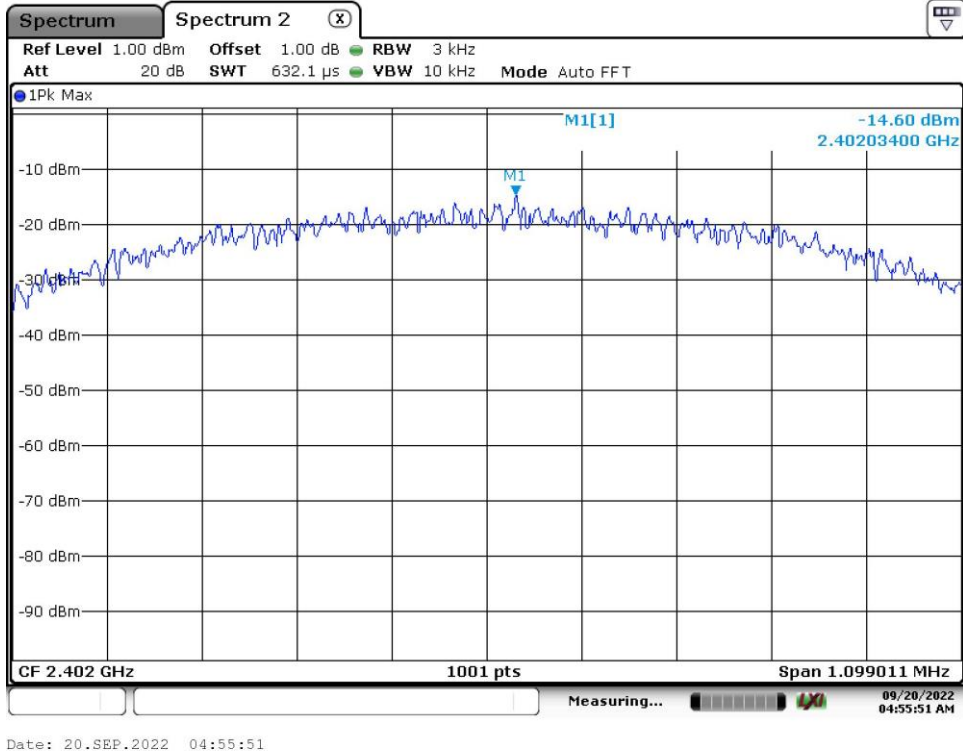

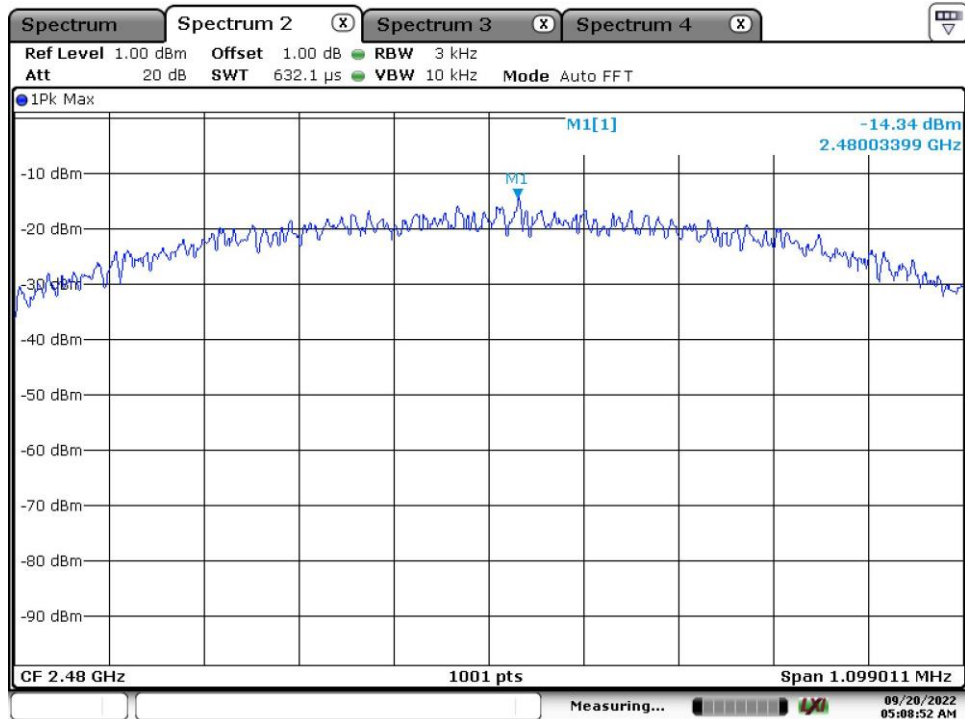

Date: 20.SEP.2022 05:08:53

Appendix B.2: Test Results of 6dB Bandwidth


6 dB Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
2402.000000	0.732674	0.500000	---	2401.643564	2402.376238

(continuation of the "6 dB Bandwidth" table from column 6 ...)

DUT Frequency (MHz)	Max Level (dBm)	Result
2402.000000	-0.8	PASS

6 dB Bandwidth

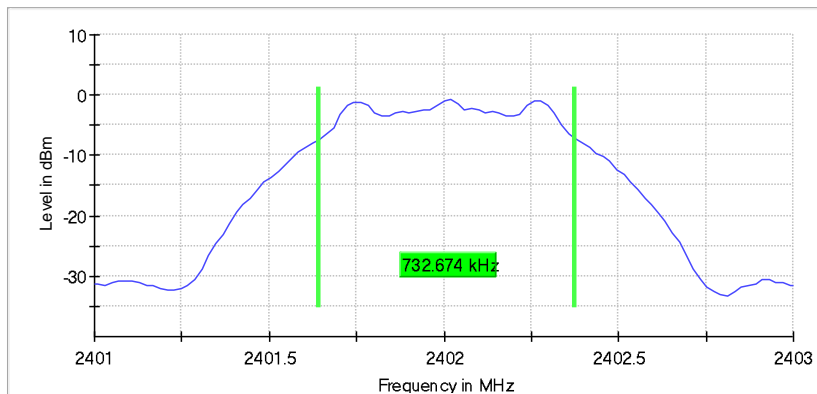

Measurement

Setting	Instrument Value	Target Value
Start Frequency	2.40100 GHz	2.40100 GHz
Stop Frequency	2.40300 GHz	2.40300 GHz
Span	2.000 MHz	2.000 MHz
RBW	100.000 kHz	~ 100.000 kHz
VBW	300.000 kHz	~ 300.000 kHz
SweepPoints	101	~ 40
Sweeptime	18.938 µs	AUTO
Reference Level	-10.000 dBm	-10.000 dBm
Attenuation	10.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
Sweeptype	FFT	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	12 / max. 150	max. 150
Stable	5 / 5	5
Max Stable Difference	0.07 dB	0.50 dB


6 dB Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
2440.000000	0.732674	0.500000	---	2439.643564	2440.376238

(continuation of the "6 dB Bandwidth" table from column 6 ...)

DUT Frequency (MHz)	Max Level (dBm)	Result
2440.000000	-1.1	PASS

6 dB Bandwidth

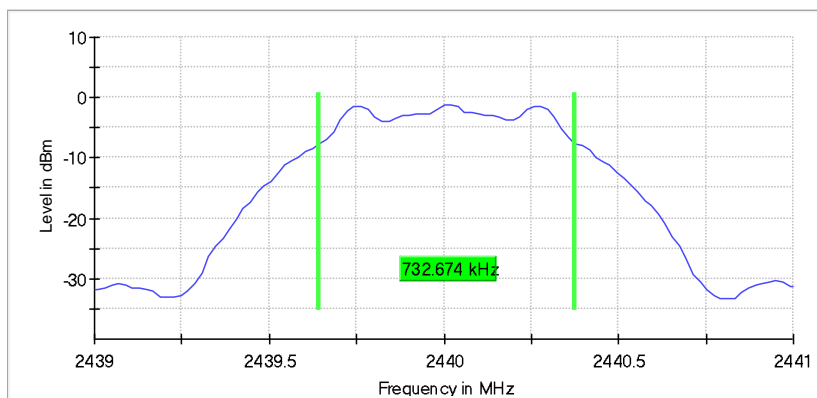

Measurement

Setting	Instrument Value	Target Value
Start Frequency	2.43900 GHz	2.43900 GHz
Stop Frequency	2.44100 GHz	2.44100 GHz
Span	2.000 MHz	2.000 MHz
RBW	100.000 kHz	~ 100.000 kHz
VBW	300.000 kHz	~ 300.000 kHz
SweepPoints	101	~ 40
SweepTime	18.938 μ s	AUTO
Reference Level	-10.000 dBm	-10.000 dBm
Attenuation	10.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
Sweeptype	FFT	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	12 / max. 150	max. 150
Stable	5 / 5	5
Max Stable Difference	0.17 dB	0.50 dB


6 dB Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
2480.000000	0.732674	0.500000	---	2479.643564	2480.376238

(continuation of the "6 dB Bandwidth" table from column 6 ...)

DUT Frequency (MHz)	Max Level (dBm)	Result
2480.000000	-1.0	PASS

6 dB Bandwidth

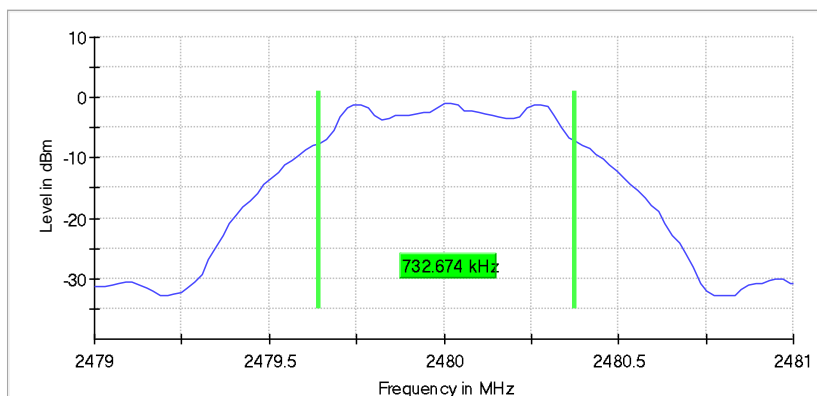

Measurement

Setting	Instrument Value	Target Value
Start Frequency	2.47900 GHz	2.47900 GHz
Stop Frequency	2.48100 GHz	2.48100 GHz
Span	2.000 MHz	2.000 MHz
RBW	100.000 kHz	~ 100.000 kHz
VBW	300.000 kHz	~ 300.000 kHz
SweepPoints	101	~ 40
Sweeptime	18.938 µs	AUTO
Reference Level	-10.000 dBm	-10.000 dBm
Attenuation	10.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
Sweeptype	FFT	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	10 / max. 150	max. 150
Stable	5 / 5	5
Max Stable Difference	0.20 dB	0.50 dB


Appendix B.3: Test Results of 99% Bandwidth

99 % Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
2402.000000	1.050000	---	---	2401.487500	2402.537500

(continuation of the "99 % Bandwidth" table from column 6 ...)

DUT Frequency (MHz)	Result
2402.000000	PASS

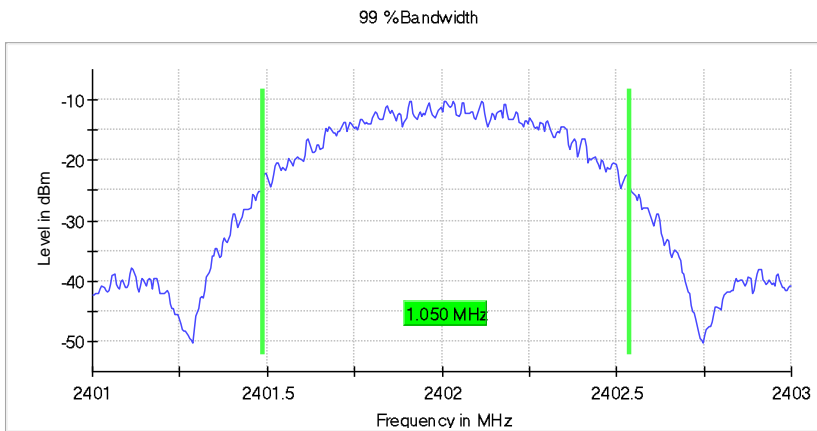

Measurement


Setting	Instrument Value	Target Value
Start Frequency	2.40100 GHz	2.40100 GHz
Stop Frequency	2.40300 GHz	2.40300 GHz
Span	2.000 MHz	2.000 MHz
RBW	10.000 kHz	>= 10.000 kHz
VBW	30.000 kHz	>= 30.000 kHz
SweepPoints	400	~ 400
Sweeptime	189.648 µs	AUTO
Reference Level	-10.000 dBm	-10.000 dBm
Attenuation	10.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
Sweeptype	FFT	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.30 dB	0.30 dB
Run	10 / max. 150	max. 150
Stable	3 / 3	3
Max Stable Difference	0.17 dB	0.30 dB

99 % Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
2440.000000	1.050000	---	---	2439.487500	2440.537500

(continuation of the "99 % Bandwidth" table from column 6 ...)

DUT Frequency (MHz)	Result
2440.000000	PASS

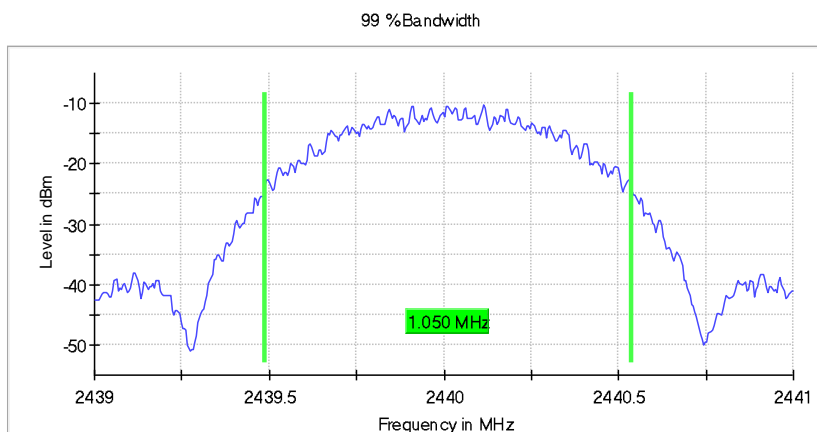

Measurement


Setting	Instrument Value	Target Value
Start Frequency	2.43900 GHz	2.43900 GHz
Stop Frequency	2.44100 GHz	2.44100 GHz
Span	2.000 MHz	2.000 MHz
RBW	10.000 kHz	>= 10.000 kHz
VBW	30.000 kHz	>= 30.000 kHz
SweepPoints	400	~ 400
Sweeptime	189.648 µs	AUTO
Reference Level	-10.000 dBm	-10.000 dBm
Attenuation	10.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
Sweeptype	FFT	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.30 dB	0.30 dB
Run	9 / max. 150	max. 150
Stable	3 / 3	3
Max Stable Difference	0.26 dB	0.30 dB

99 % Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
2480.000000	1.055000	---	---	2479.482500	2480.537500

(continuation of the "99 % Bandwidth" table from column 6 ...)

DUT Frequency (MHz)	Result
2480.000000	PASS

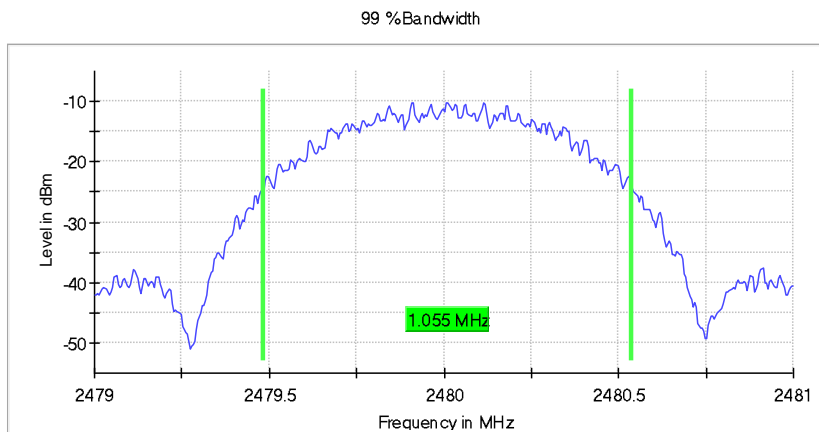


Measurement


Setting	Instrument Value	Target Value
Start Frequency	2.47900 GHz	2.47900 GHz
Stop Frequency	2.48100 GHz	2.48100 GHz
Span	2.000 MHz	2.000 MHz
RBW	10.000 kHz	>= 10.000 kHz
VBW	30.000 kHz	>= 30.000 kHz
SweepPoints	400	~ 400
Sweeptime	189.648 µs	AUTO
Reference Level	-10.000 dBm	-10.000 dBm
Attenuation	10.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
Sweeptype	FFT	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.30 dB	0.30 dB
Run	9 / max. 150	max. 150
Stable	3 / 3	3
Max Stable Difference	0.18 dB	0.30 dB

Appendix B.4: Test Results of Conducted Spurious Emissions Measured in 100 kHz Bandwidth

Low Channel:

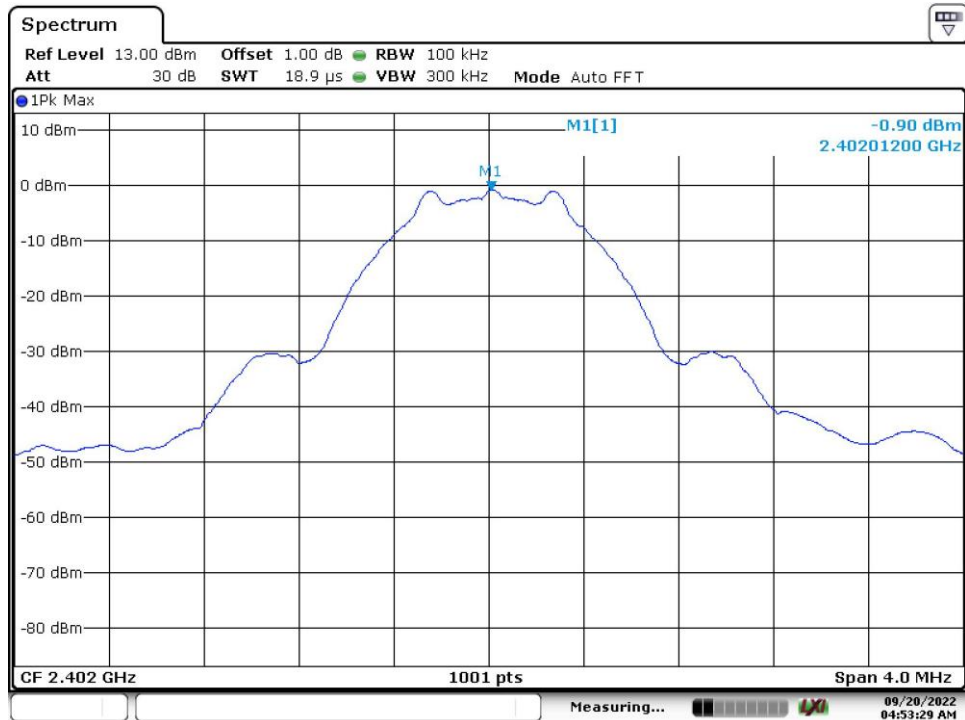


Date: 20.SEP.2022 04:53:29

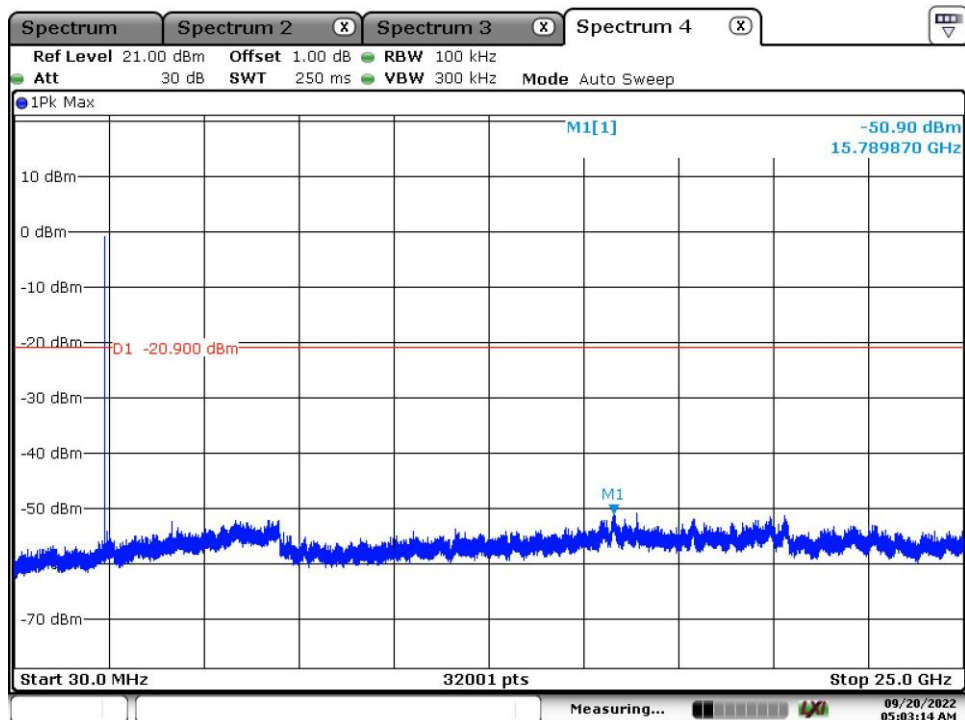


Date: 20.SEP.2022 05:03:14

Middle Channel:

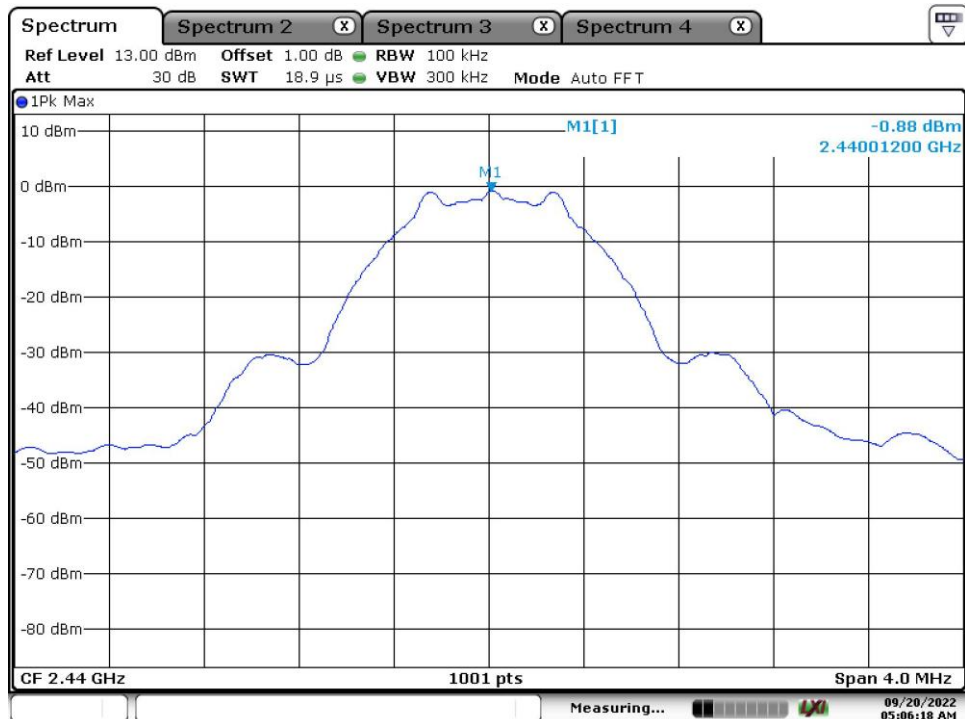


Date: 20.SEP.2022 05:06:18

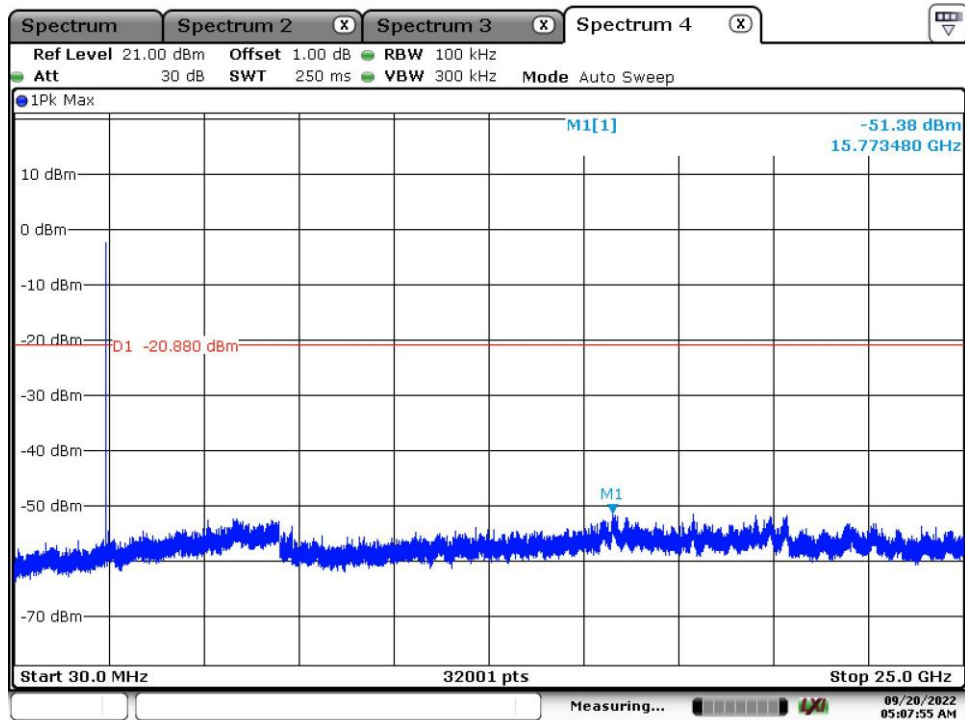


Date: 20.SEP.2022 05:07:55

High Channel:

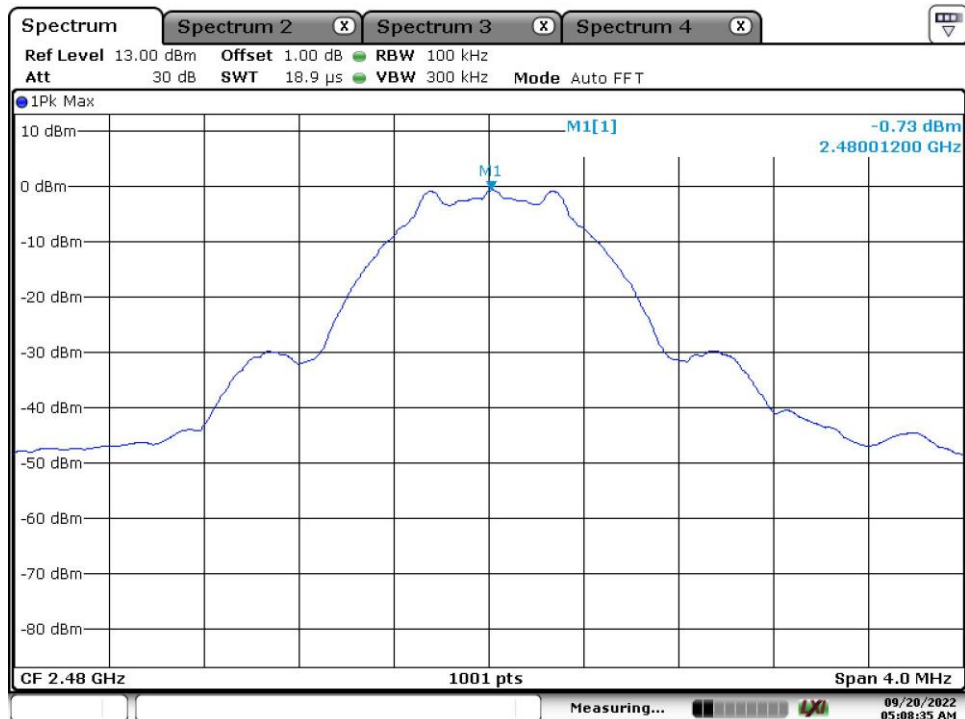


Date: 20.SEP.2022 05:08:35

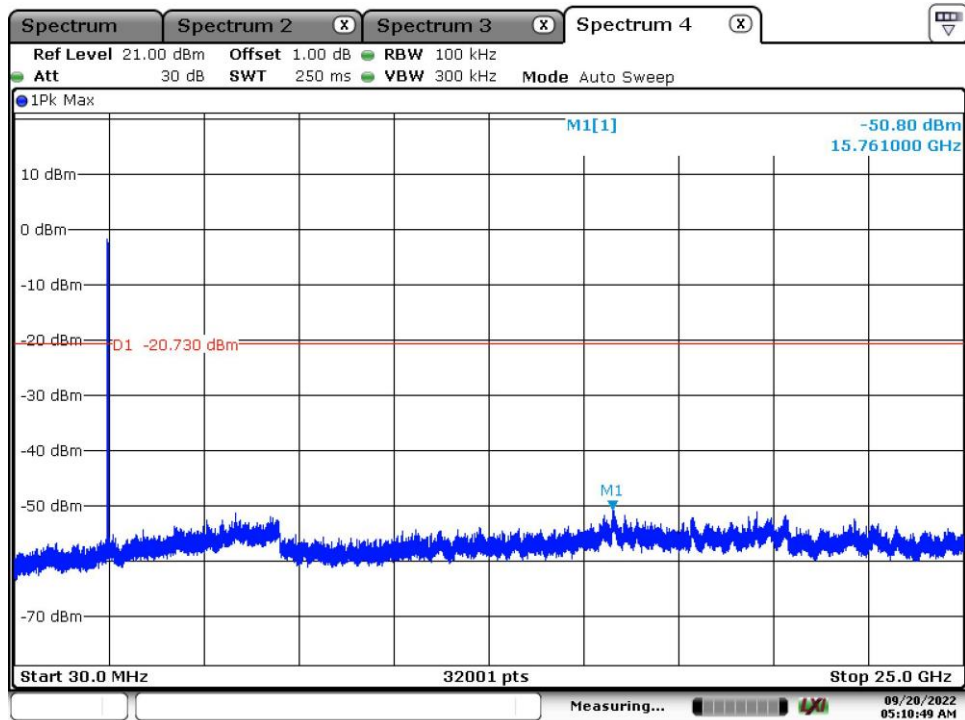


Date: 20.SEP.2022 05:10:50

Band Edge, Low Channel:

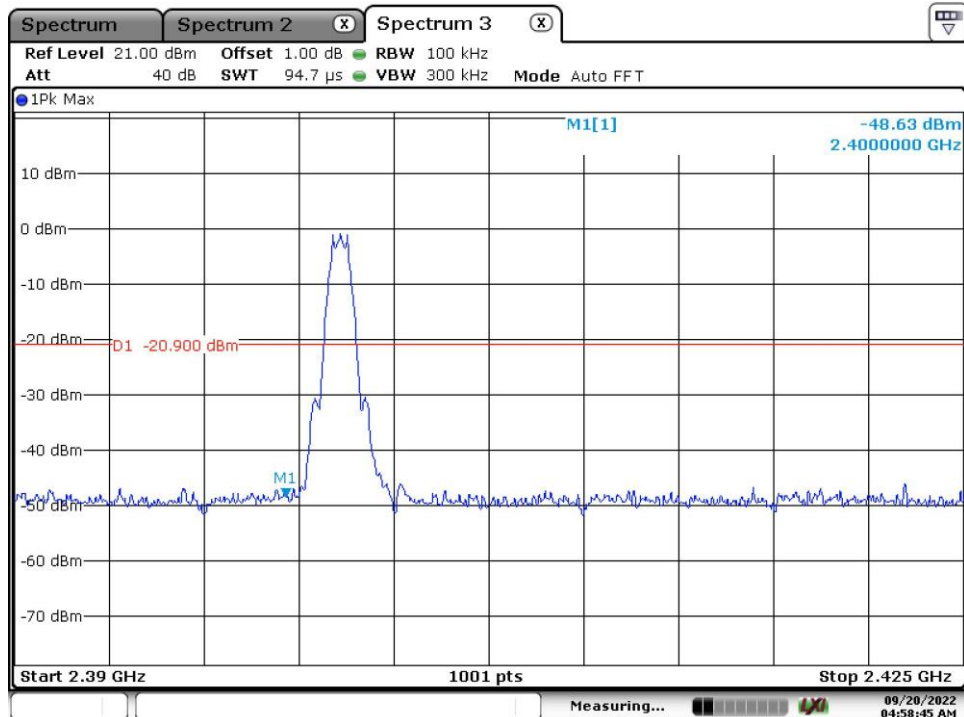

Date: 20.SEP.2022 04:58:46

Band Edge, High Channel:

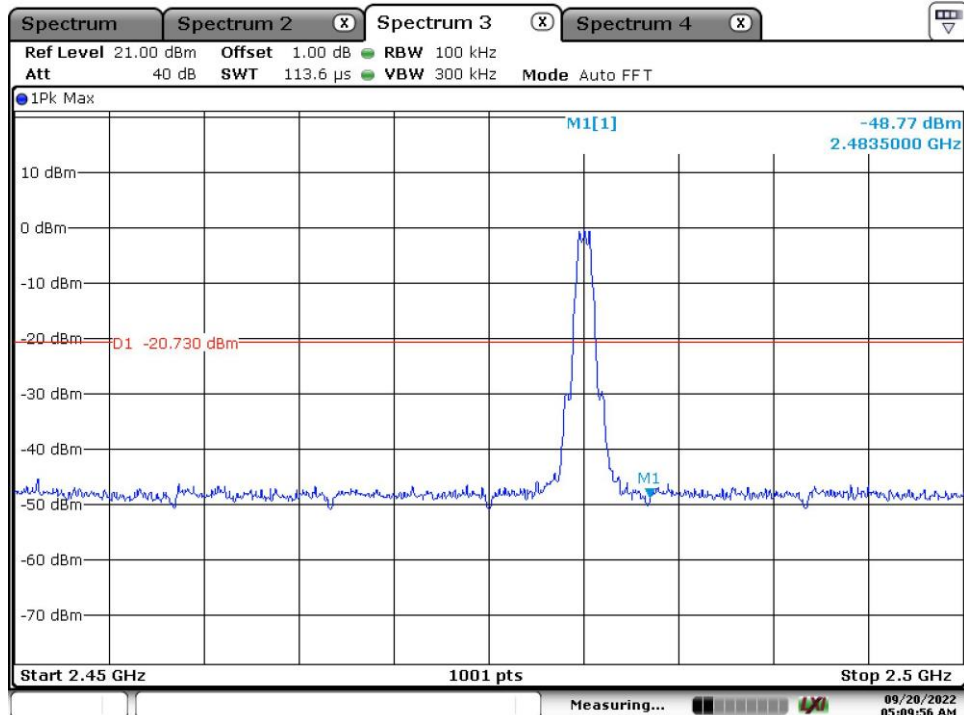

Date: 20.SEP.2022 05:09:56


Appendix B.5: Test Results of Radiated Spurious Emissions

Note: Testing was carried out within frequency range 9kHz to the tenth harmonics. The measurement results below 30MHz and 18GHz - 26.5GHz were greater than 20dB below the limit, so only the radiated spurious emissions from 30MHz to 18GHz were reported.

30 MHz - 1GHz

EUT Information

EUT Name:	Lenovo Professional Wireless Rechargeable Mouse
Model:	MOBTP0L
Test Mode:	BLE 1M_Mid channel
Order No/Sample No:	168387330/A003328181-003
Test Voltage:	Battery
Remark:	Temp 23 Humi:58%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

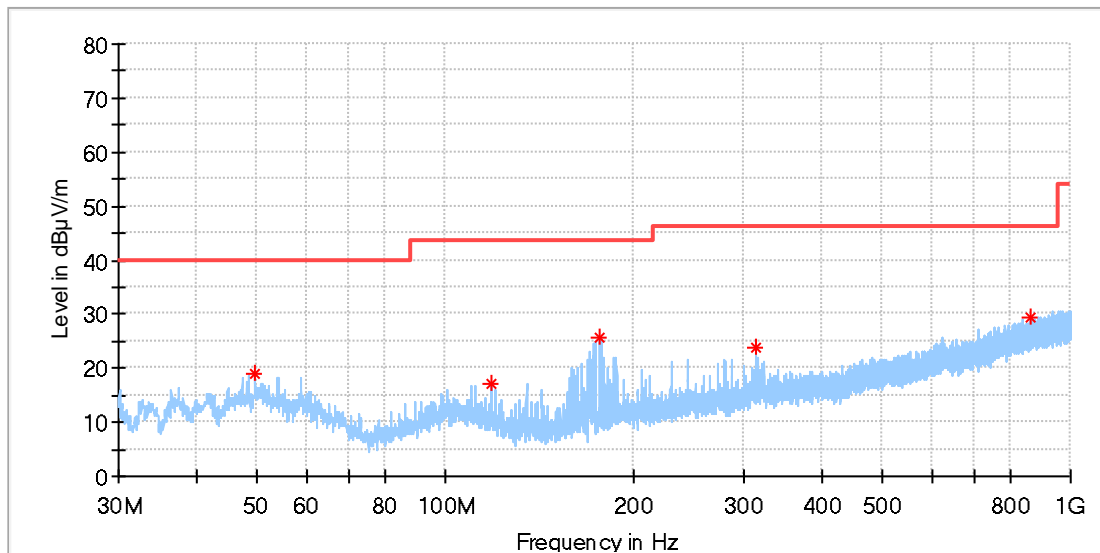


Critical_Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
49.642500	18.79	40.00	21.21	100.0	H	127.0	-18.3
118.706500	17.24	43.50	26.26	100.0	H	18.0	-20.5
176.179000	25.74	43.50	17.76	100.0	H	265.0	-20.8
314.355500	23.78	46.00	22.22	100.0	H	76.0	-15.9
863.715000	29.57	46.00	16.43	100.0	H	115.0	-5.3

EUT Information

EUT Name:	Lenovo Professional Wireless Rechargeable Mouse
Model:	MOBTP0L
Test Mode:	BLE 1M_Mid channel
Order No/Sample No:	168387330/A003328181-003
Test Voltage:	Battery
Remark:	Temp 23 Humi:58%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

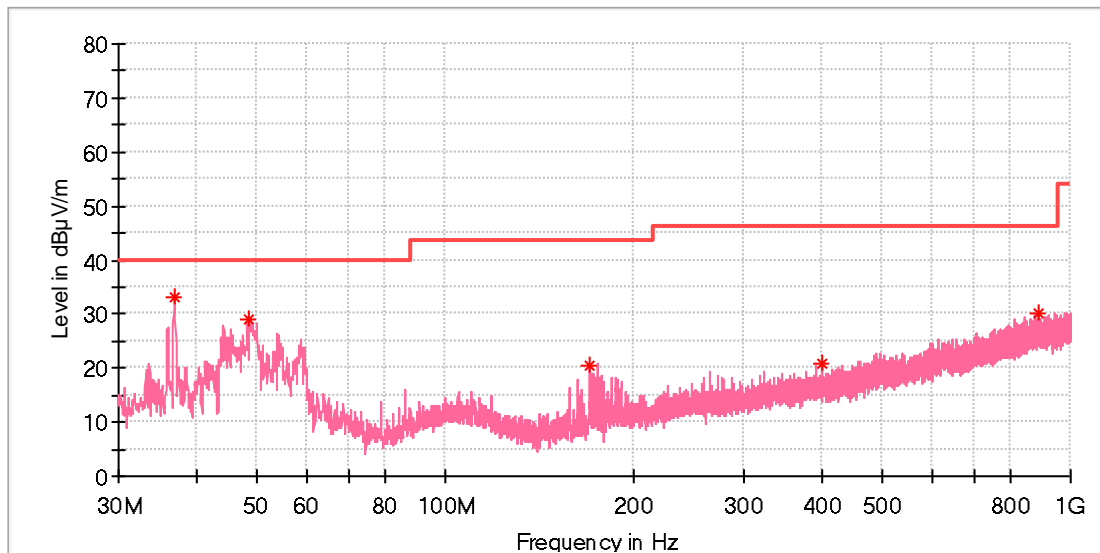

Critical Freqs


Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
36.838500	33.26	40.00	6.74	100.0	V	332.0	-21.2
48.624000	29.01	40.00	10.99	100.0	V	344.0	-18.4
169.971000	20.28	43.50	23.22	100.0	V	284.0	-21.2
400.831000	20.89	46.00	25.11	100.0	V	220.0	-13.6
890.972000	30.10	46.00	15.90	100.0	V	157.0	-5.1

1GHz - 18GHz

Note: The highest waveform in the figure is Bluetooth Fundamental.

EUT Information

EUT Name:	Lenovo Professional Wireless Rechargeable Mouse
Model:	MOBTP0L
Test Mode:	BLE 1M_Low channel
Order No/Sample No:	168387330/A003328181-003
Test Voltage:	Battery
Remark:	Temp 23 Humi:58%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

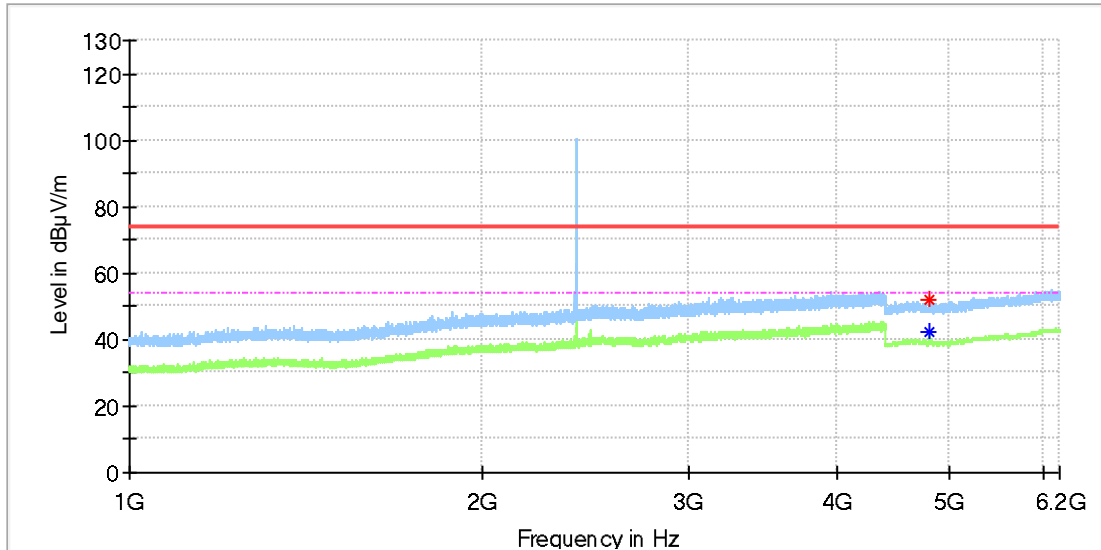


Critical_Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
4804.000000	52.01	---	74.00	21.99	100.0	H	246.0	11.8
4804.000000	---	42.46	54.00	11.54	100.0	H	246.0	11.8

EUT Information

EUT Name: Lenovo Professional Wireless Rechargeable Mouse
 Model: MOBTP0L
 Test Mode: BLE 1M_Low channel
 Order No/Sample No: 168387330/A003328181-003
 Test Voltage: Battery
 Remark: Temp 23 Humi:58%
 Test Standard: FCC 15.247
 Tested By: Kei Zhang
 Reviewed By: Terry Yin

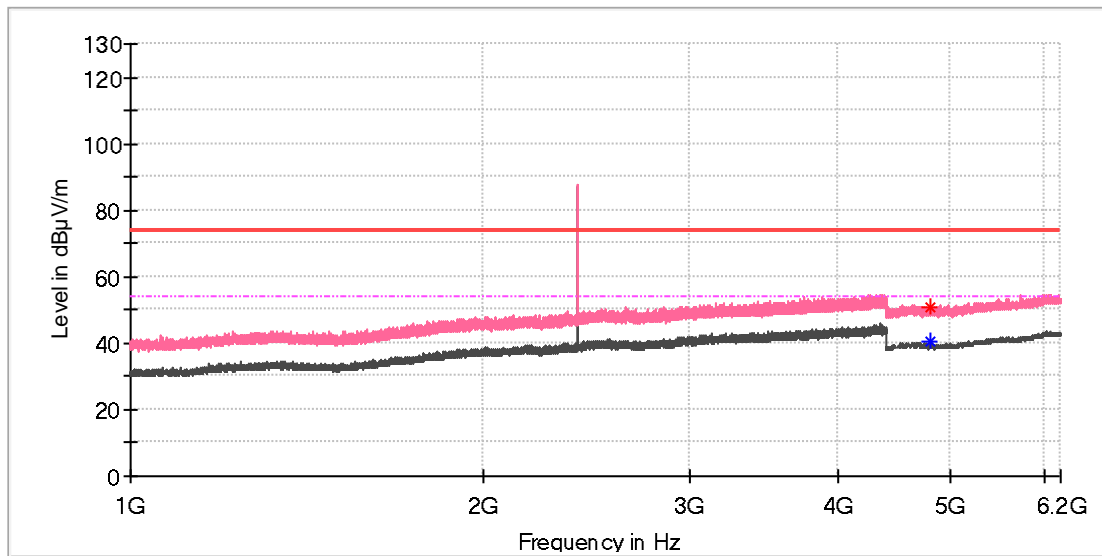


Critical_Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
4803.500000	---	40.57	54.00	13.43	100.0	V	40.0	11.8
4810.000000	50.86	---	74.00	23.14	100.0	V	332.0	11.8

EUT Information

EUT Name:	Lenovo Professional Wireless Rechargeable Mouse
Model:	MOBTP0L
Test Mode:	BLE 1M_Low channel
Order No/Sample No:	168387330/A003328181-003
Test Voltage:	Battery
Remark:	Temp 23 Humi:58%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

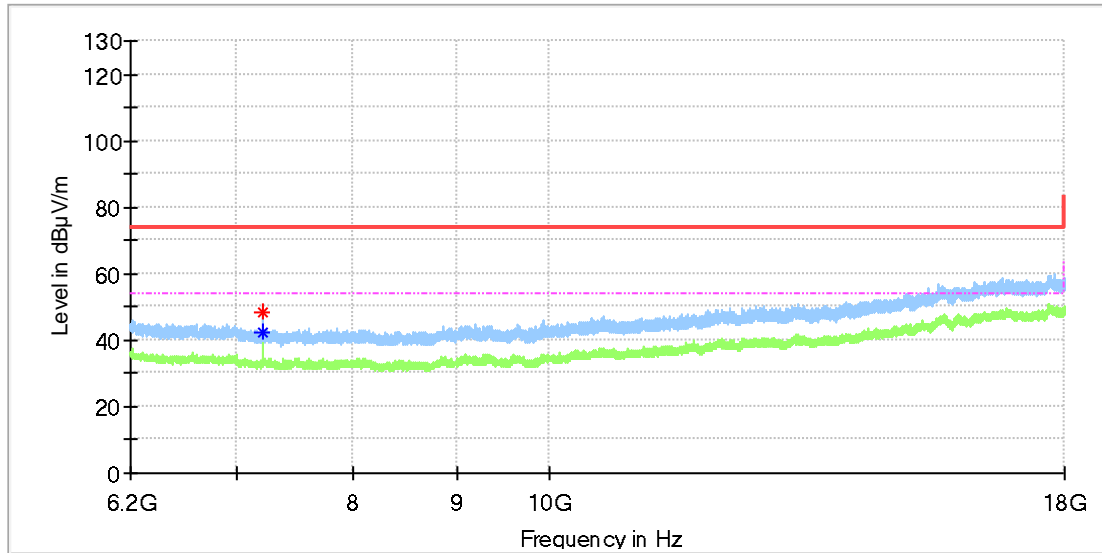


Critical_Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
7206.441667	48.35	---	74.00	25.65	100.0	H	243.0	8.8
7206.441667	---	42.55	54.00	11.45	100.0	H	243.0	8.8

EUT Information

EUT Name:	Lenovo Professional Wireless Rechargeable Mouse
Model:	MOBTP0L
Test Mode:	BLE 1M_Low channel
Order No/Sample No:	168387330/A003328181-003
Test Voltage:	Battery
Remark:	Temp 23 Humi:58%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

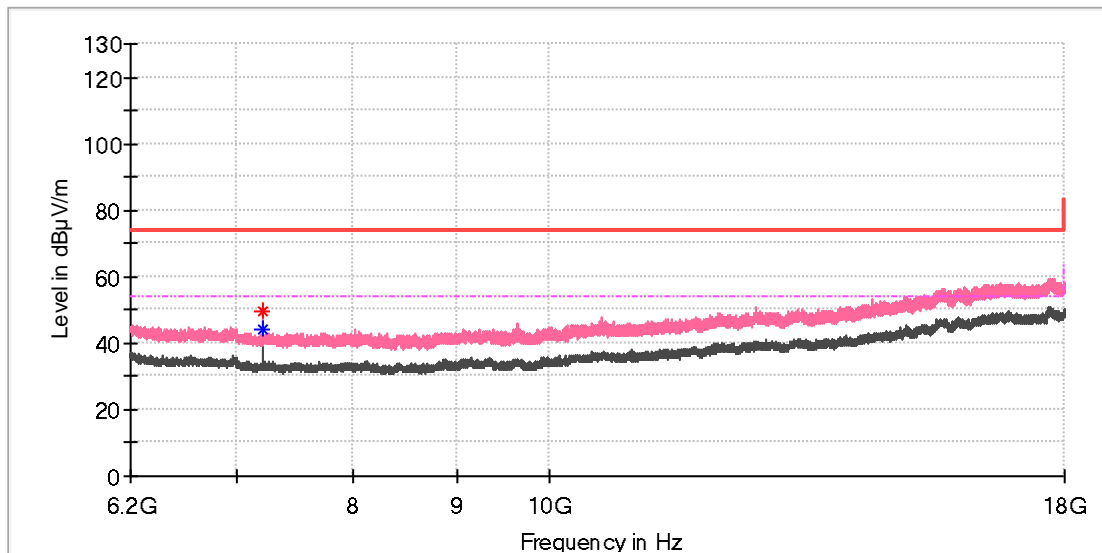


Critical_Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
7205.458333	---	44.17	54.00	9.83	100.0	V	162.0	8.8
7206.441667	49.72	---	74.00	24.28	100.0	V	162.0	8.8

EUT Information

EUT Name:	Lenovo Professional Wireless Rechargeable Mouse
Model:	MOBTP0L
Test Mode:	BLE 1M_Mid channel
Order No/Sample No:	168387330/A003328181-003
Test Voltage:	Battery
Remark:	Temp 23 Humi:58%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

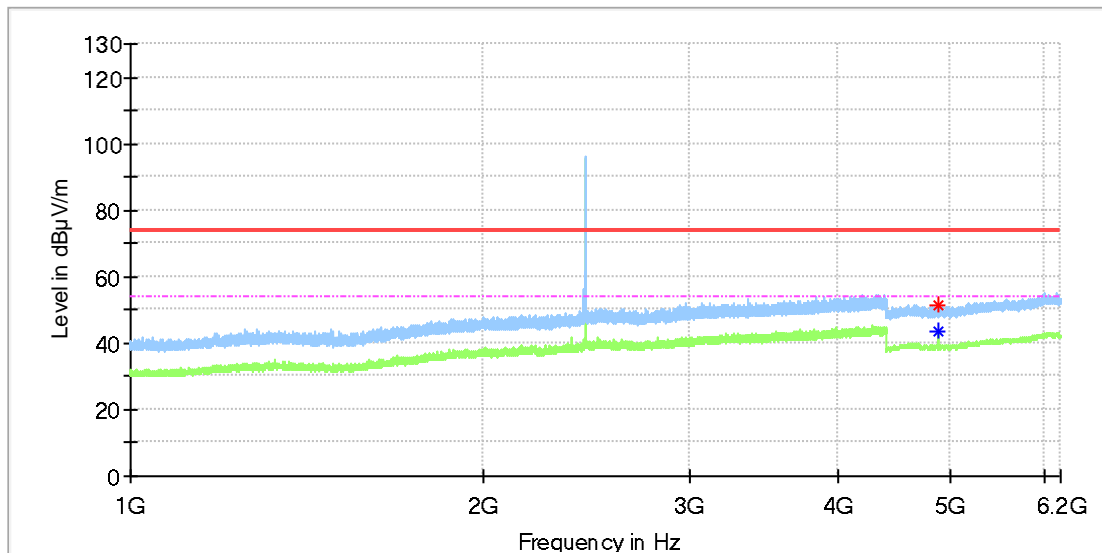


Critical_Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
4879.500000	51.21	---	74.00	22.79	100.0	H	260.0	11.8
4880.000000	---	43.27	54.00	10.73	100.0	H	301.0	11.8

EUT Information

EUT Name:	Lenovo Professional Wireless Rechargeable Mouse
Model:	MOBTP0L
Test Mode:	BLE 1M_Mid channel
Order No/Sample No:	168387330/A003328181-003
Test Voltage:	Battery
Remark:	Temp 23 Humi:58%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

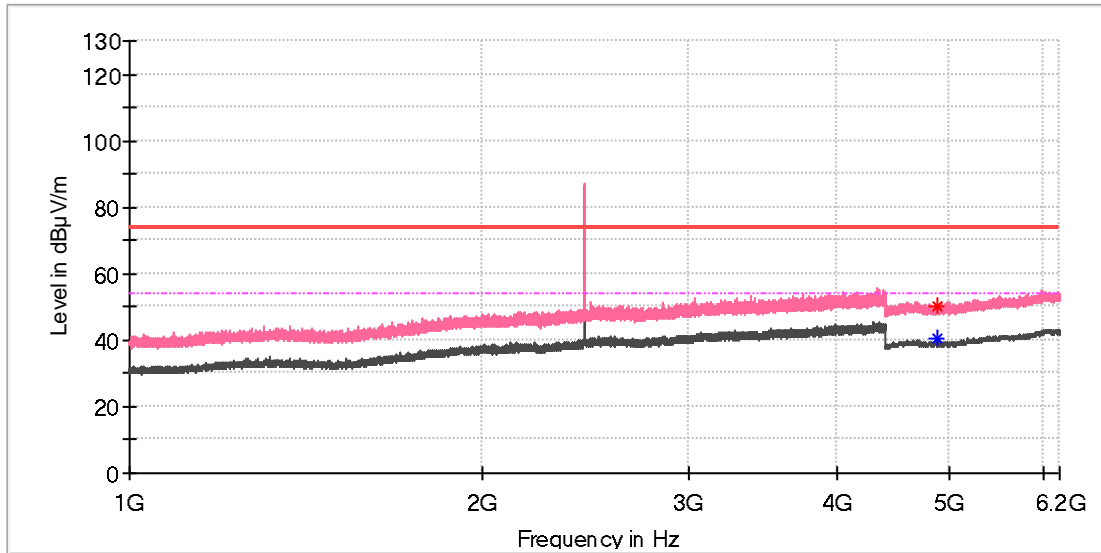


Critical_Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
4879.500000	---	40.58	54.00	13.42	100.0	V	220.0	11.8
4885.500000	50.46	---	74.00	23.54	100.0	V	226.0	11.8

EUT Information

EUT Name:	Lenovo Professional Wireless Rechargeable Mouse
Model:	MOBTP0L
Test Mode:	BLE 1M_Mid channel
Order No/Sample No:	168387330/A003328181-003
Test Voltage:	Battery
Remark:	Temp 23 Humi:58%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

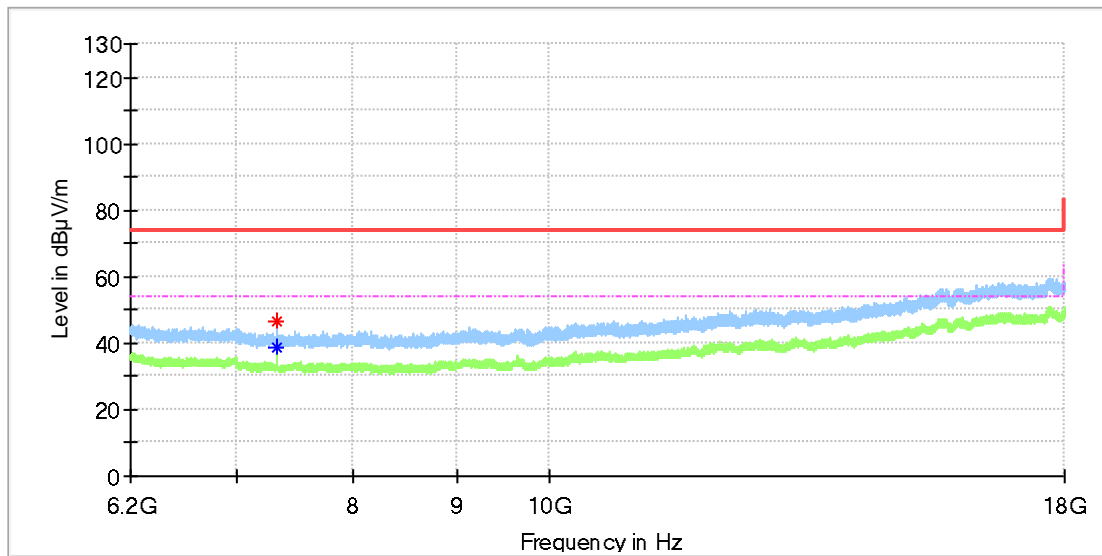


Critical_Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
7320.508333	46.40	---	74.00	27.60	100.0	H	233.0	8.2
7320.508333	---	38.72	54.00	15.28	100.0	H	233.0	8.2

EUT Information

EUT Name:	Lenovo Professional Wireless Rechargeable Mouse
Model:	MOBTP0L
Test Mode:	BLE 1M_Mid channel
Order No/Sample No:	168387330/A003328181-003
Test Voltage:	Battery
Remark:	Temp 23 Humi:58%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

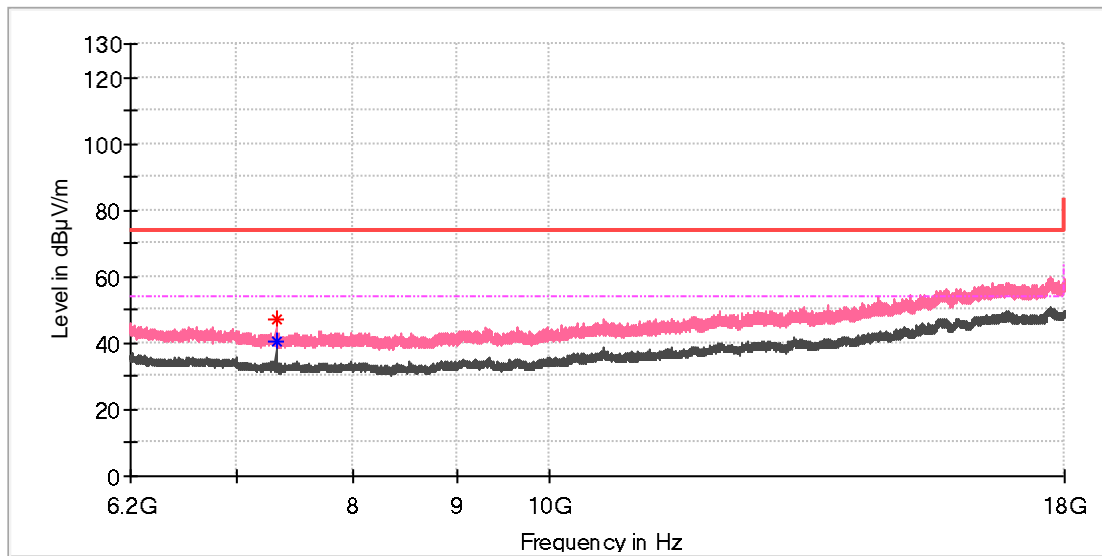


Critical_Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
7319.525000	47.33	---	74.00	26.67	100.0	V	180.0	8.2
7319.525000	---	40.52	54.00	13.48	100.0	V	180.0	8.2

EUT Information

EUT Name:	Lenovo Professional Wireless Rechargeable Mouse
Model:	MOBTP0L
Test Mode:	BLE 1M_High channel
Order No/Sample No:	168387330/A003328181-003
Test Voltage:	Battery
Remark:	Temp 23 Humi:58%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

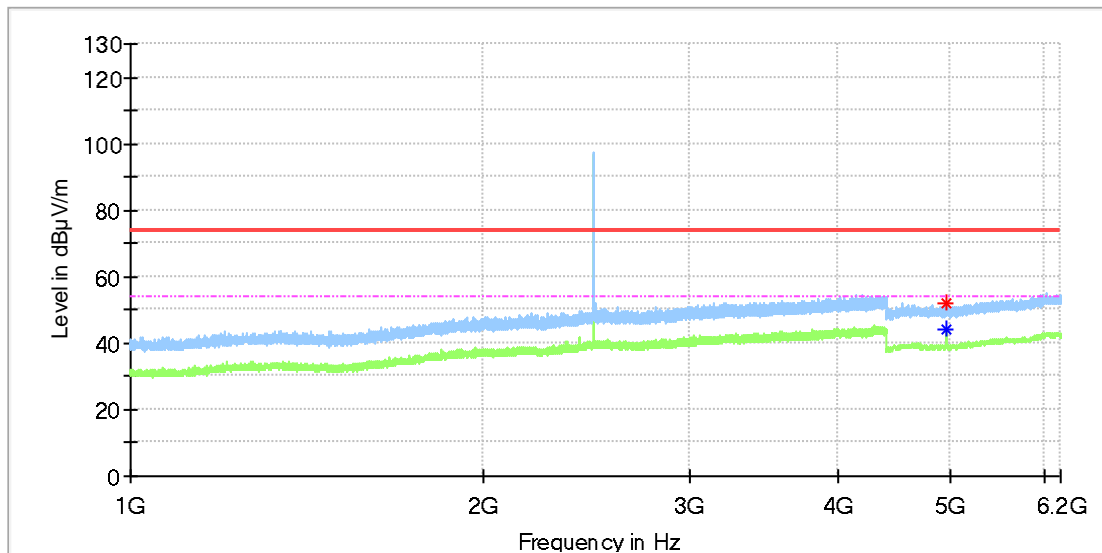


Critical Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
4960.000000	---	44.08	54.00	9.92	100.0	H	164.0	11.8
4960.500000	52.04	---	74.00	21.96	100.0	H	138.0	11.8

EUT Information

EUT Name:	Lenovo Professional Wireless Rechargeable Mouse
Model:	MOBTP0L
Test Mode:	BLE 1M_High channel
Order No/Sample No:	168387330/A003328181-003
Test Voltage:	Battery
Remark:	Temp 23 Humi:58%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

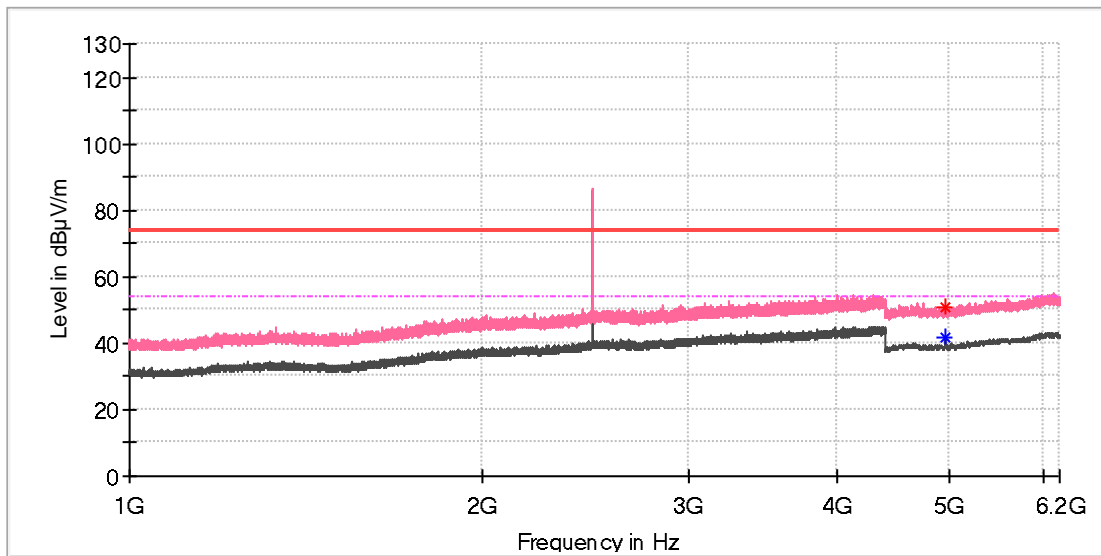


Critical_Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
4959.500000	50.81	---	74.00	23.19	100.0	V	234.0	11.8
4959.500000	---	41.57	54.00	12.43	100.0	V	234.0	11.8

EUT Information

EUT Name:	Lenovo Professional Wireless Rechargeable Mouse
Model:	MOBTP0L
Test Mode:	BLE 1M_High channel
Order No/Sample No:	168387330/A003328181-003
Test Voltage:	Battery
Remark:	Temp 23 Humi:58%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

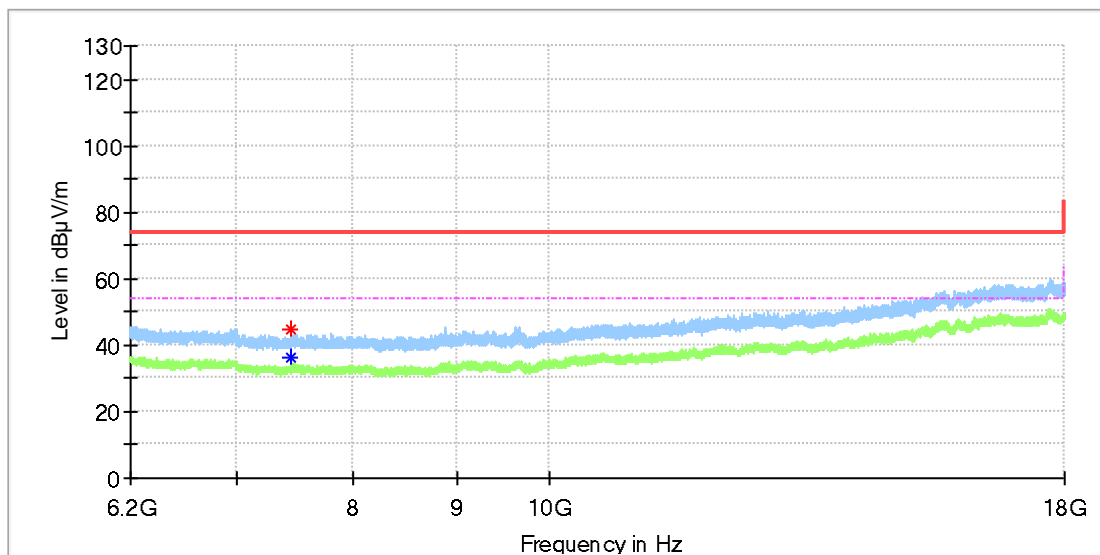


Critical_Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
7439.000000	---	36.42	54.00	17.58	100.0	H	220.0	8.4
7440.475000	44.91	---	74.00	29.09	100.0	H	220.0	8.4

EUT Information

EUT Name:	Lenovo Professional Wireless Rechargeable Mouse
Model:	MOBTP0L
Test Mode:	BLE 1M_High channel
Order No/Sample No:	168387330/A003328181-003
Test Voltage:	Battery
Remark:	Temp 23 Humi:58%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

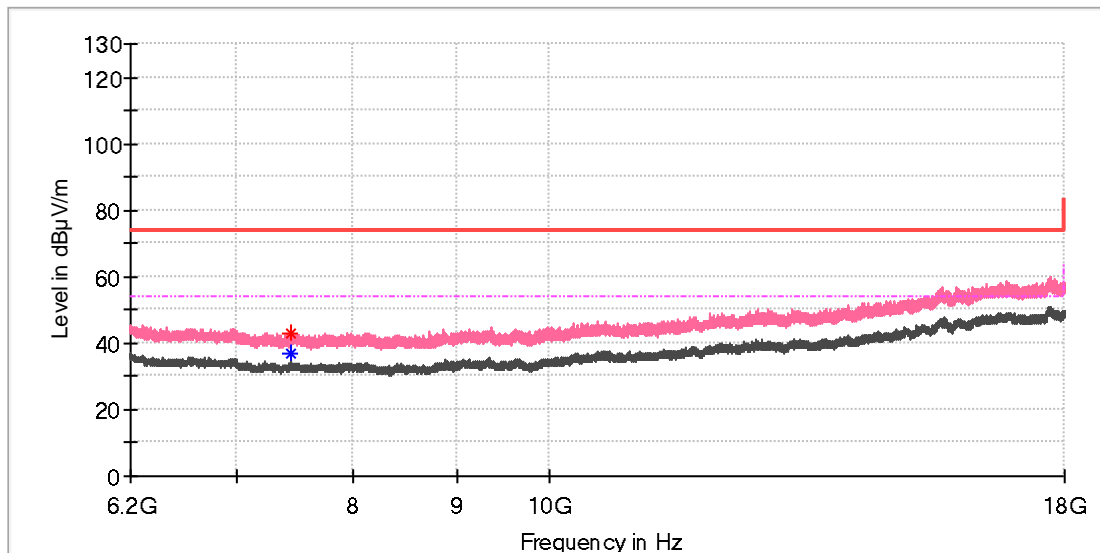


Critical_Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
7439.491667	---	36.85	54.00	17.15	100.0	V	150.0	8.4
7439.983333	42.87	---	74.00	31.13	100.0	V	98.0	8.4

Appendix B.6: Test Results of Radiated Emissions in Restricted Bands

EUT Information

EUT Name:	Lenovo Professional Wireless Rechargeable Mouse
Model:	MOBTP0L
Test Mode:	BLE 1M_Low channel
Order No/Sample No:	168387330/A003328181-003
Test Voltage:	Battery
Remark:	Temp 23 Humi:58%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

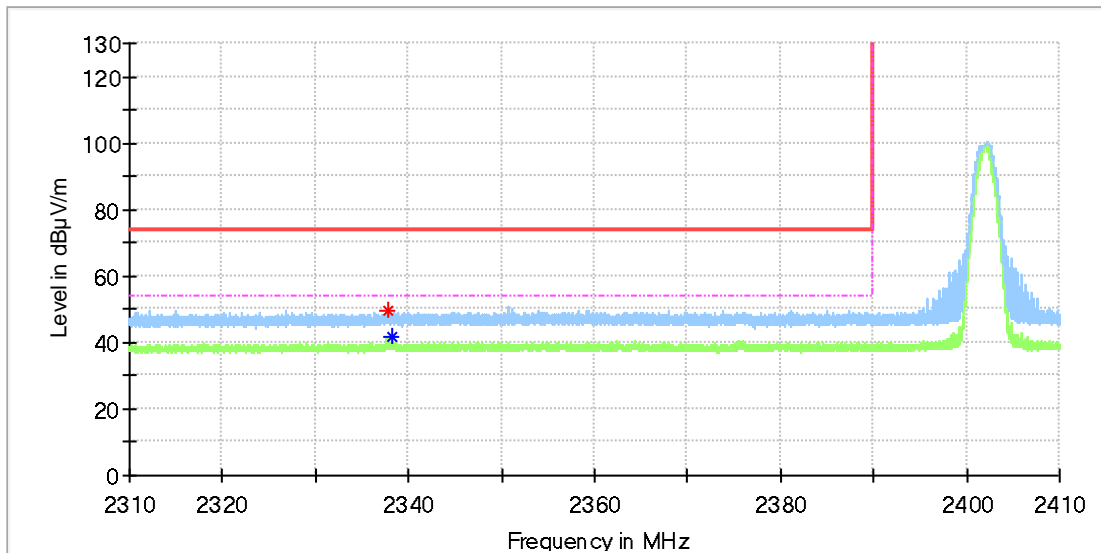


Critical Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
2337.845000	49.66	---	74.00	24.34	100.0	H	163.0	6.8
2338.245000	---	41.75	54.00	12.25	100.0	H	249.0	6.8

EUT Information

EUT Name:	Lenovo Professional Wireless Rechargeable Mouse
Model:	MOBTP0L
Test Mode:	BLE 1M_Low channel
Order No/Sample No:	168387330/A003328181-003
Test Voltage:	Battery
Remark:	Temp 23 Humi:58%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

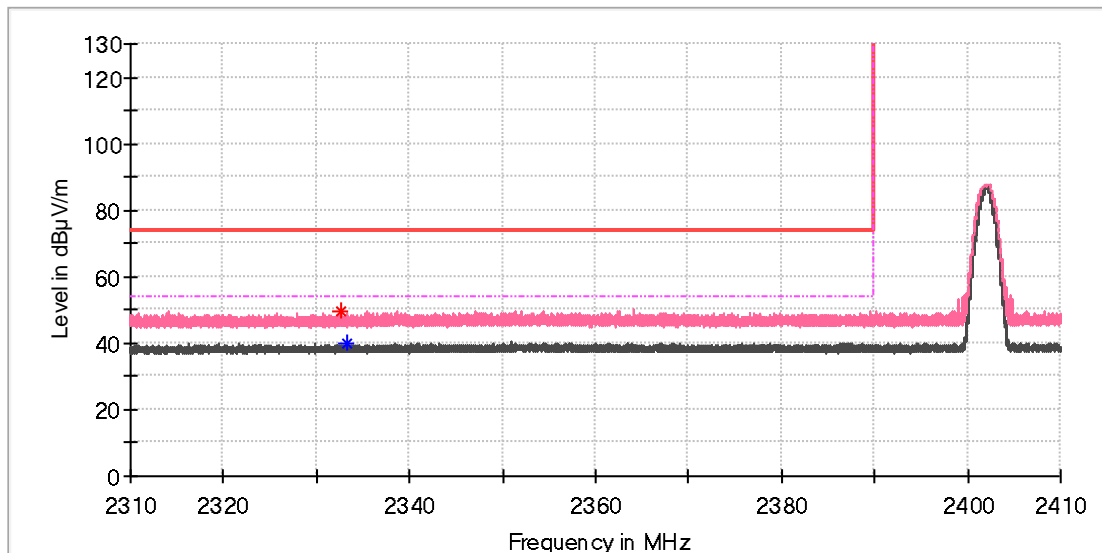


Critical Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
2332.635000	49.62	---	74.00	24.38	100.0	V	155.0	6.7
2333.280000	---	39.68	54.00	14.32	100.0	V	274.0	6.7

EUT Information

EUT Name:	Lenovo Professional Wireless Rechargeable Mouse
Model:	MOBTP0L
Test Mode:	BLE 1M_High channel
Order No/Sample No:	168387330/A003328181-003
Test Voltage:	Battery
Remark:	Temp 23 Humi:58%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

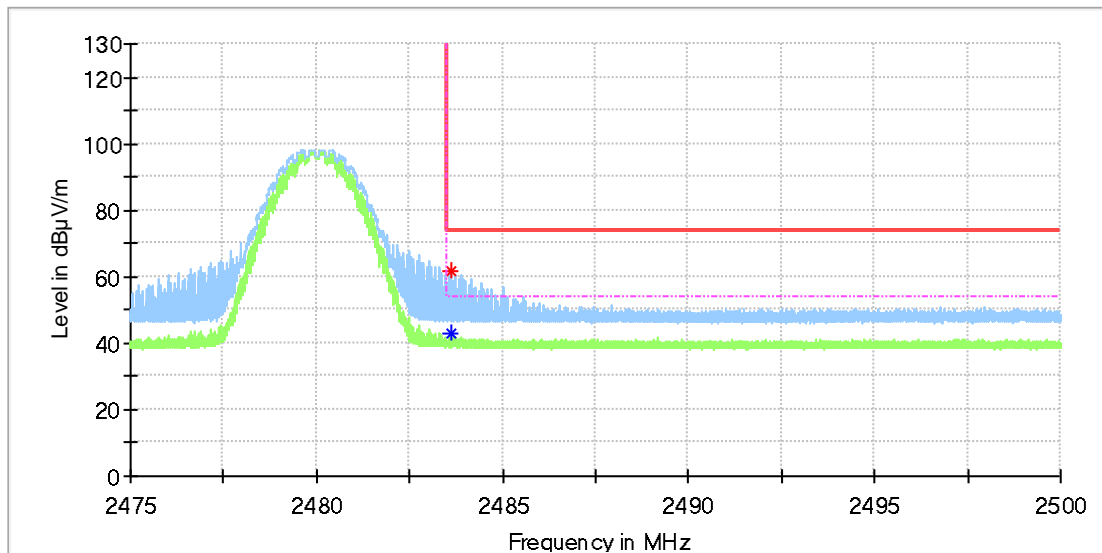


Critical Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
2483.593750	---	43.20	54.00	10.80	100.0	H	242.0	7.4
2483.593750	61.98	---	74.00	12.02	100.0	H	242.0	7.4

EUT Information

EUT Name:	Lenovo Professional Wireless Rechargeable Mouse
Model:	MOBTP0L
Test Mode:	BLE 1M_High channel
Order No/Sample No:	168387330/A003328181-003
Test Voltage:	Battery
Remark:	Temp 23 Humi:58%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

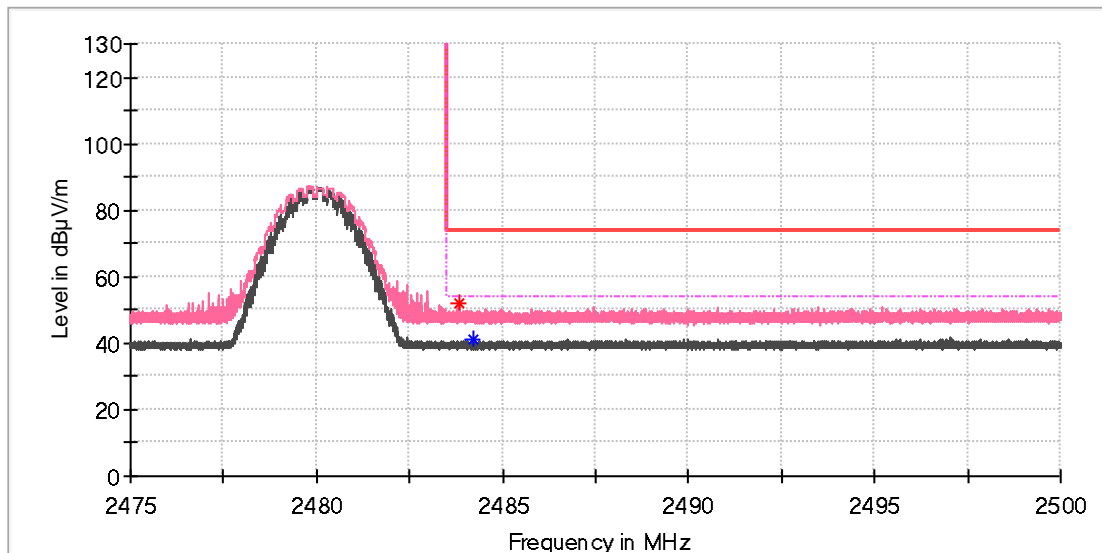


Critical Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
2483.836250	52.16	---	74.00	21.84	100.0	V	0.0	7.4
2484.212500	---	41.32	54.00	12.68	100.0	V	297.0	7.4

Appendix B.7: Test Results of Conducted Emission on AC Mains

EUT Information

EUT Name:	Lenovo Professional Wireless Rechargeable Mouse
Order No:	168387330
Model:	MOBTP0L
Test Mode:	Charging + BT
Test Voltage:	AC 120V/60Hz
Test By/Review By:	Kevin Zhou/Gary Chen
Test Standard:	FCC Part 15C
Tem./Hum./Pressure:	24.3°C/52.8%/101kPa
Remark:	SR1

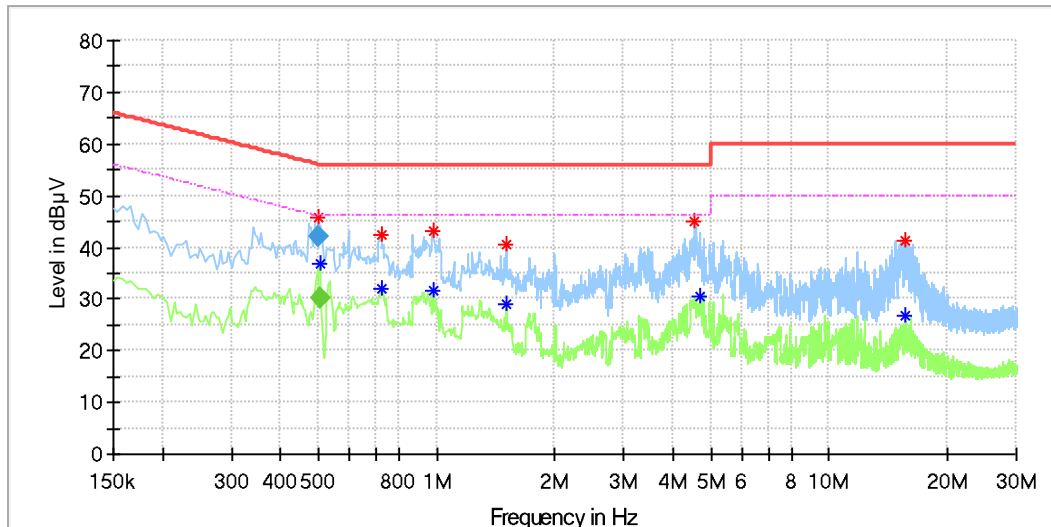

Critical Freqs


Frequency (MHz)	MaxPeak (dBµV)	Average (dBµV)	Limit (dBµV)	Margin (dB)	Line	Corr. (dB)
0.500000	45.63	---	56.10	10.47	L1	9.7
0.508000	---	36.93	46.00	9.07	L1	9.7
0.724000	42.38	---	56.00	13.62	L1	9.7
0.728000	---	31.83	46.00	14.17	L1	9.7
0.980000	---	31.77	46.00	14.23	L1	9.7
0.980000	43.26	---	56.00	12.74	L1	9.7
1.508000	---	29.07	46.00	16.93	L1	9.8
1.508000	40.69	---	56.00	15.31	L1	9.8
4.556000	44.96	---	56.00	11.04	L1	10.0
4.684000	---	30.46	46.00	15.54	L1	10.0
15.596000	41.28	---	60.00	18.72	L1	10.2
15.632000	---	26.89	50.00	23.11	L1	10.2

Final Result

Frequency (MHz)	QuasiPeak (dBµV)	Average (dBµV)	Limit (dBµV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)
0.500000	41.97	---	56.00	14.03	1000.0	9.000	L1	9.7
0.508000	---	29.98	46.00	16.02	1000.0	9.000	L1	9.7

EUT Information

EUT Name: Lenovo Professional Wireless Rechargeable Mouse
 Order No: 168387330
 Model: MOBTP0L
 Test Mode: Charging + BT
 Test Voltage: AC 120V/60Hz
 Test By/Review By: Kevin Zhou/Gary Chen
 Test Standard: FCC Part 15C
 Tem./Hum./Pressure: 24.3°C/52.8%/101kPa
 Remark: SR1

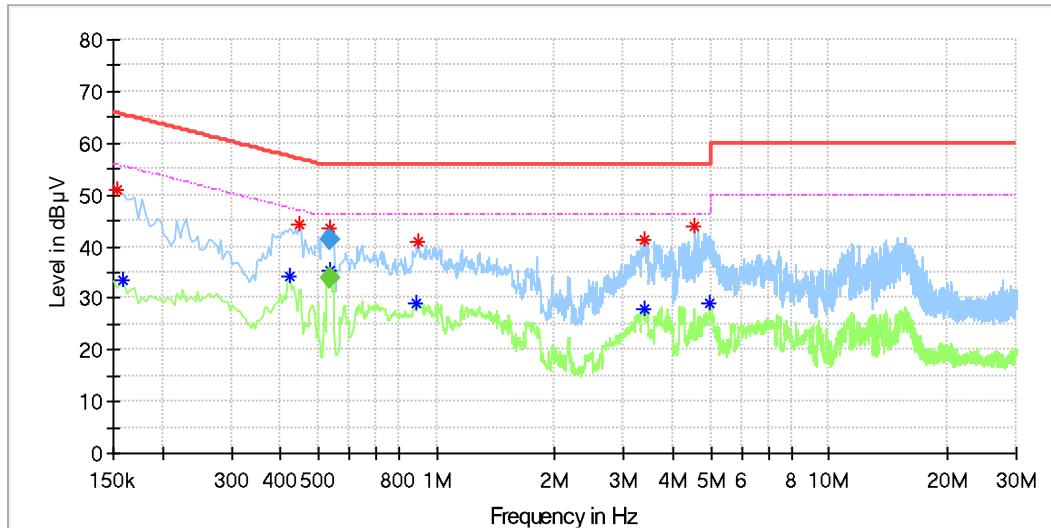

Critical_Freqs

Frequency (MHz)	MaxPeak (dBµV)	Average (dBµV)	Limit (dBµV)	Margin (dB)	Line	Corr. (dB)
0.154000	51.14	---	65.78	14.64	N	9.6
0.158000	---	33.40	55.57	22.17	N	9.6
0.422000	---	34.09	47.41	13.32	N	9.7
0.446000	44.13	---	56.95	12.82	N	9.7
0.534500	---	35.48	46.00	10.52	N	9.7
0.534500	43.63	---	56.00	12.37	N	9.7
0.892000	---	29.13	46.00	16.87	N	9.7
0.900000	41.08	---	56.00	14.92	N	9.7
3.380000	---	28.07	46.00	17.93	N	9.9
3.384000	41.45	---	56.00	14.55	N	9.9
4.556000	43.80	---	56.00	12.20	N	10.0
4.968000	---	29.02	46.00	16.98	N	10.0

Final_Result

Frequency (MHz)	QuasiPeak (dBµV)	Average (dBµV)	Limit (dBµV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)
0.534500	---	33.96	46.00	12.04	1000.0	9.000	N	9.7
0.534500	41.32	---	56.00	14.68	1000.0	9.000	N	9.7