



FCC 47 CFR PART 15 SUBPART C

TEST REPORT

For

Rocketfish RF-QX3 Bluetooth Mono Headset

Model: RF-QX3

Brand Name: Rocketfish

Prepared for

**Primax Electronics Ltd.
No. 669, Ruey Kuang Road, Neihu 114 Taipei, Taiwan. R.O.C.**

Prepared by

**COMPLIANCE CERTIFICATION SERVICES (SHENZHEN) INC.
No10-1, Mingkeda Logistics Park, No.18 Huanguan South RD. Guan lan
Town, Baoan District, Shenzhen China
TEL: 86-755-28055000
FAX: 86-755-28055221**



Note: This report shall not be reproduced except in full, without the written approval of Compliance Certification Services Inc. This document may be altered or revised by Compliance Certification Services Inc. personnel only, and shall be noted in the revision section of the document



TABLE OF CONTENTS

1. TEST RESULT CERTIFICATION.....	3
2. EUT DESCRIPTION	4
3. TEST METHODOLOGY	5
3.1 EUT CONFIGURATION	5
3.2 EUT EXERCISE	5
3.3 GENERAL TEST PROCEDURES	5
3.4 FCC PART 15.205 RESTRICTED BANDS OF OPERATIONS	6
3.5 DESCRIPTION OF TEST MODES	6
4. INSTRUMENT CALIBRATION.....	7
5. FACILITIES AND ACCREDITATIONS	8
5.1 FACILITIES	8
5.2 ACCREDITATIONS	8
5.3 MEASUREMENT UNCERTAINTY	8
6. SETUP OF EQUIPMENT UNDER TEST	9
6.1 SETUP CONFIGURATION OF EUT	9
6.2 SUPPORT EQUIPMENT	9
7. FCC PART 15.247 REQUIREMENTS.....	10
7.1 20dB BANDWIDTH	10
7.2 PEAK POWER	14
7.3 PEAK POWER SPECTRAL DENSITY	16
7.4 BAND EDGES MEASUREMENT	17
7.5 FREQUENCY SEPARATION	27
7.6 NUMBER OF HOPPING FREQUENCY	30
7.7 TIME OF OCCUPANCY (DWELL TIME).....	33
7.8 SPURIOUS EMISSIONS	45
7.9 POWERLINE CONDUCTED EMISSIONS	62
8. ANNEX DECLARATION FOR BLUETOOTH DEVICE ACC	65



1. TEST RESULT CERTIFICATION

Applicant: Primax Electronics Ltd.
 No. 669, Ruey Kuang Road, Neihu 114 Taipei, Taiwan. R.O.C.

Equipment Under Test: Rocketfish RF-QX3 Bluetooth Mono Headset

Brand Name: Rocketfish

Model: RF-QX3

Date of Test: July 23-29, 2009

APPLICABLE STANDARDS	
STANDARD	TEST RESULT
FCC 47 CFR Part 15 Subpart C	No non-compliance noted

We hereby certify that:

The above equipment was tested by Compliance Certification Services Inc. The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI C63.4: 2003 and the energy emitted by the sample EUT tested as described in this report is in compliance with conducted and radiated emission limits of FCC Rules Part 15.207, 15.209 and 15.247.

The test results of this report relate only to the tested sample EUT identified in this report.

Approved by:

Reviewed by:

Clinton Kao
Manager
Compliance Certification Service Inc.

Vincent Yao
Assistant manager
Compliance Certification Service Inc.



2. EUT DESCRIPTION

Product	Rocketfish RF-QX3 Bluetooth Mono Headset
Brand Name	Rocketfish
Model Number	RF-QX3
Model Discrepancy	N/A
Power Supply	DC3.7V Powered by the lithium battery Adapter Model name/ Manufacturer YJS005A-0500500U/ I.T.E AC input: AC100~240V, 50/60Hz,180mA DC output: DC5V, 500mA DC output cable: Un-shielded, 1.25m
Frequency Range	2402 ~ 2480 MHz
Transmit Power	-2.03dBm
Modulation Technique	FHSS(GFSK, $\pi/4$ -DQPSK, 8DPSK)
Number of Channels	79 Channels
Antenna Specification	PCB Antenna with -7.68 dBi gain(Max)
Temperature Range	0 ~ +55°C

Note: This submittal(s) (test report) is intended for FCC ID: EMJTRFOX3 filing to comply with Section 15.207, 15.209 and 15.247 of the FCC Part 15, Subpart C Rules.



3. TEST METHODOLOGY

The tests documented in this report were performed in accordance with ANSI C63.4: 2003. Radiated testing was performed at an antenna to EUT distance 3 meters.

3.1 EUT CONFIGURATION

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner that intends to maximize its emission characteristics in a continuous normal application.

3.2 EUT EXERCISE

The EUT was operated in the engineering mode to fix the Tx frequency that was for the purpose of the measurements.

According to its specifications, the EUT must comply with the requirements of the Section 15.207, 15.209 and 15.247 under the FCC Rules Part 15 Subpart C.

3.3 GENERAL TEST PROCEDURES

Conducted Emissions

The EUT is placed on the turntable, which is 0.8 m above ground plane. According to the requirements in Section 13.1.4.1 of ANSI C63.4: 2003. Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30MHz using CISPR Quasi-peak and average detector modes.

Radiated Emissions

The EUT is placed on a turn table, which is 0.8 m above ground plane. The turntable shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3m away from the receiving antenna, which varied from 1m to 4m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the max. emission, the relative positions of this hand-held transmitter (EUT) was rotated through three orthogonal axes according to the requirements in Section 13.1.4.1 of ANSI C63.4: 2003.

3.4 FCC PART 15.205 RESTRICTED BANDS OF OPERATIONS

(a) Except as shown in paragraph (d) of this section, only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
¹ 0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 -	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.52525	2655 - 2900	22.01 - 23.12
8.41425 - 8.41475	156.7 - 156.9	3260 - 3267	23.6 - 24.0
12.29 - 12.293	162.0125 - 167.17	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	167.72 - 173.2	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	240 - 285	3600 - 4400	(²)
13.36 - 13.41	322 - 335.4		

¹ Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz.

² Above 38.6

(b) Except as provided in paragraphs (d) and (e), the field strength of emissions appearing within these frequency bands shall not exceed the limits shown in Section 15.209. At frequencies equal to or less than 1000 MHz, compliance with the limits in Section 15.209 shall be demonstrated using measurement instrumentation employing a CISPR quasi-peak detector. Above 1000 MHz, compliance with the emission limits in Section 15.209 shall be demonstrated based on the average value of the measured emissions. The provisions in Section 15.35 apply to these measurements.

3.5 DESCRIPTION OF TEST MODES

The EUT has been tested under operating condition.

Test program used to control the EUT for staying in continuous transmitting and receiving mode is programmed.

The following test mode(s) were scanned during the preliminary test below 1G:

Test Item	Test mode	Worse mode
Conducted Emission	Mode 1: Charge with the adapter	■
	Mode 2: Charge with PC	□
Radiated Emission	Mode 1: Charge with the adapter	□
	Mode 2: Charge with PC	□
	Mode 3: Normal link	■

Above 1G, Channel Low (2402MHz) 、Mid (2441MHz) and High (2480MHz) were chosen for full testing for GFSK and 8DPSK.



4. INSTRUMENT CALIBRATION

The measuring equipment, which was utilized in performing the tests documented herein, has been calibrated in accordance with the manufacturer's recommendations for utilizing calibration equipment, which is traceable to recognized national standards.



5. FACILITIES AND ACCREDITATIONS

5.1 FACILITIES

All measurement facilities used to collect the measurement data are located at

No10-1, Mingkeda Logistics Park, No.18 Huanguan South RD. Guan lan Town, Baoan District, Shenzhen China

The sites are constructed in conformance with the requirements of ANSI C63.4:2003, ANSI C63.7 and CISPR Publication 22. All receiving equipment conforms to CISPR Publication 16-1, "Radio Interference Measuring Apparatus and Measurement Methods."

5.2 ACCREDITATIONS

Our laboratories are accredited and approved by the following accreditation body according to ISO/IEC 17025.

Taiwan TAF

The measuring facility of laboratories has been authorized or registered by the following approval agencies.

USA FCC
Japan VCCI
Canada INDUSTRY CANADA
Taiwan BSMI
Norway Nemko

Copies of granted accreditation certificates are available for downloading from our web site, <http://www.ccsrf.com>

5.3 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

Measurement	Frequency	Uncertainty
Conducted emissions	9kHz~30MHz	+/- 3.18dB
Radiated emissions	30MHz ~ 200MHz	+/- 3.79dB
	200MHz ~1000MHz	+/- 3.62dB

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

The measured result is above (below) the specification limit by a margin less than the measurement uncertainty; it is therefore not possible to state compliance based on the 95% level of confidence. However, the result indicates that compliance (non-compliance) is more probable than non-compliance) with the specification limit.



6. SETUP OF EQUIPMENT UNDER TEST

6.1 SETUP CONFIGURATION OF EUT

See test photographs attached in Appendix 1 for the actual connections between EUT and support equipment.

6.2 SUPPORT EQUIPMENT

No.	Equipment	Model No.	Serial No.	FCC ID	Trade Name	Data Cable	Power Cord
1	Telephone	E50	N/A	N/A	NOKIA	N/A	N/A
2	Notebook	Studio 1435	53154486836549	DoC	DELL	N/A	Shielded, 1.75m

Notes:

- 1. All the equipment/cables were placed in the worst-case configuration to maximize the emission during the test.*
- 2. Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.*



7. FCC PART 15.247 REQUIREMENTS

7.1 20DB BANDWIDTH


None; for reporting purpose only.

MEASUREMENT EQUIPMENT USED

Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due
Spectrum Analyzer	Agilent	E4446A	US44300399	02/24/2010

Remark: Each piece of equipment is scheduled for calibration once a year.

TEST CONFIGURATION



TEST PROCEDURE

1. Place the EUT on the table and set it in the transmitting mode.
2. Remove the antenna from the EUT, then connect a low loss RF cable from antenna port to the spectrum analyzer.
3. Set the spectrum analyzer as RBW=30kHz, VBW=100kHz, Span=3MHz, Sweep = auto.
4. Mark the peak frequency and 20dB (upper and lower) frequency.
5. Repeat until all the test channels are investigated.

TEST RESULTS

No non-compliance noted



Test plot


GFSK

20dB Bandwidth (CH Low)

Agilent 12:10:44 26 Jul 2009

R T

Mkr1 2.401 840 GHz
-9.27 dBm

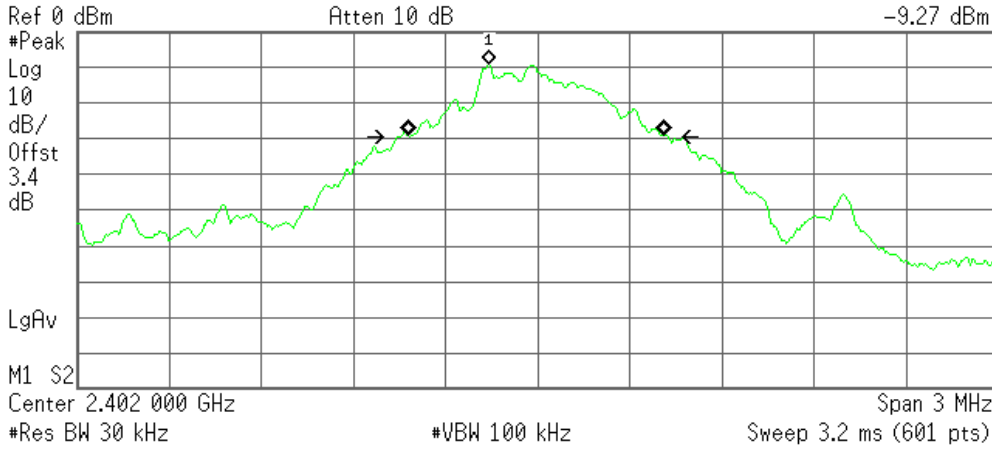

Occupied Bandwidth
829.0259 kHz

Occ BW % Pwr 99.00 %
x dB -20.00 dB


Transmit Freq Error -3.750 kHz
x dB Bandwidth 872.293 kHz

20dB Bandwidth (CH Mid)

Agilent 12:19:36 26 Jul 2009

R T

Mkr1 2.440 980 GHz
-6.81 dBm

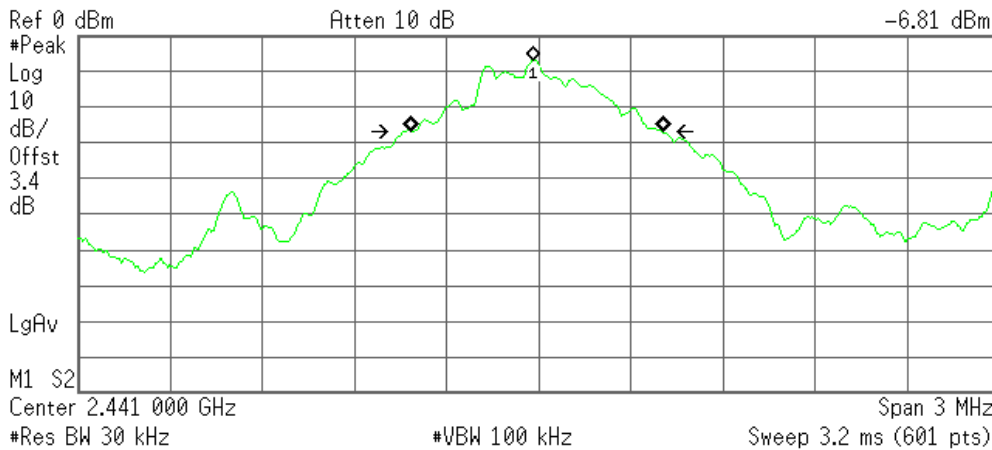

Occupied Bandwidth
821.5808 kHz

Occ BW % Pwr 99.00 %
x dB -20.00 dB

Transmit Freq Error -6.034 kHz
x dB Bandwidth 838.113 kHz



20dB Bandwidth (CH High)

Agilent 18:31:56 26 Jul 2009

R T

Mkr1 2.479 985 GHz

-6.89 dBm

Ref 0 dBm

#Atten 10 dB

#Peak

Log

10

dB/

Offst

3.4

dB

LgAv

M1 S2

Center 2.480 000 GHz

Span 3 MHz

#Res BW 30 kHz

#VBW 100 kHz

Sweep 3.2 ms (601 pts)

Occupied Bandwidth

820.7848 kHz

Occ BW % Pwr 99.00 %

x dB -20.00 dB

Transmit Freq Error -5.910 kHz

x dB Bandwidth 857.556 kHz

8DPSK

20dB Bandwidth (CH Low)

Agilent 14:30:14 26 Jul 2009

R T

Mkr1 2.401 975 GHz

98.08 dBμV

Ref 107 dBμV

Atten 10 dB

#Peak

Log

10

dB/

Offst

3.4

dB

LgAv

M1 S2

Center 2.402 000 GHz

Span 3 MHz

#Res BW 30 kHz

#VBW 100 kHz

Sweep 3.2 ms (601 pts)

Occupied Bandwidth

1.1381 MHz

Occ BW % Pwr 99.00 %

x dB -20.00 dB

Transmit Freq Error 5.329 kHz

x dB Bandwidth 1.263 MHz



20dB Bandwidth (CH Mid)

Agilent 14:29:32 26 Jul 2009


R T

Mkr1 2.440 975 GHz

99.01 dBμV

Ref 107 dBμV

Atten 10 dB

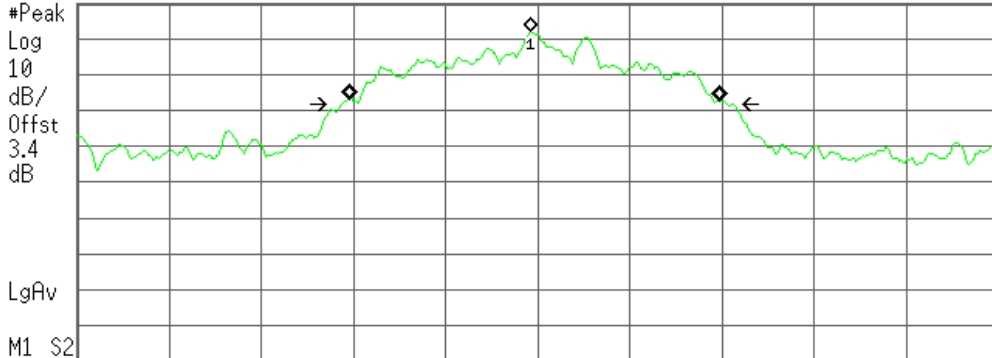

Center 2.441 000 GHz

Span 3 MHz

#Res BW 30 kHz

#VBW 100 kHz

Sweep 3.2 ms (601 pts)

Occupied Bandwidth

1.2050 MHz

Occ BW % Pwr 99.00 %

x dB -20.00 dB

Transmit Freq Error -13.915 kHz

x dB Bandwidth 1.257 MHz

20dB Bandwidth (CH High)

Agilent 18:35:21 26 Jul 2009


R T

Mkr1 2.479 985 GHz

-8.39 dBm

Ref 0 dBm

#Atten 10 dB

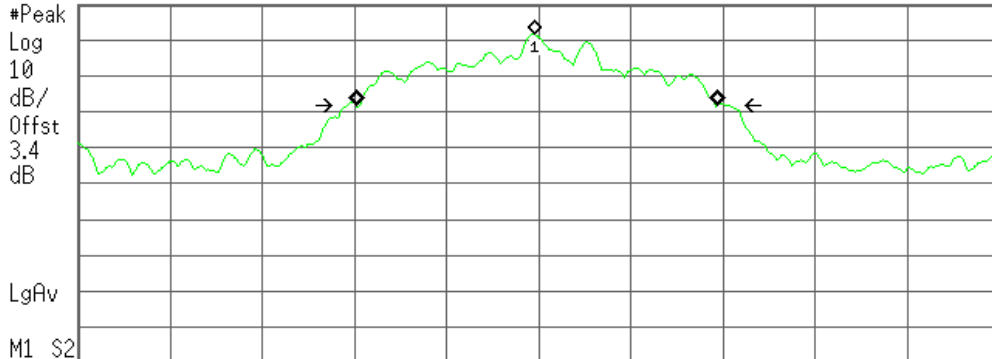

Center 2.480 000 GHz

Span 3 MHz

#Res BW 30 kHz

#VBW 100 kHz

Sweep 3.2 ms (601 pts)

Occupied Bandwidth

1.1745 MHz

Occ BW % Pwr 99.00 %

x dB -20.00 dB

Transmit Freq Error -5.025 kHz

x dB Bandwidth 1.251 MHz



7.2 PEAK POWER

LIMIT

The maximum peak output power of the intentional radiator shall not exceed the following:


1. For systems using digital modulation in the bands of 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz: 1 watt.
2. Except as shown in paragraphs (b)(3) (i), (ii) and (iii) of this section, if transmitting antennas of directional gain greater than 6dBi are used the peak output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1) or (b)(2) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6dBi.

MEASUREMENT EQUIPMENT USED

Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due
RF Power Meter & Sensor	Anritsu	ML2487A	6K00001491	02/23/2010
Spectrum Analyzer	Agilent	E4446A	US44300399	02/24/2010

Remark: Each piece of equipment is scheduled for calibration once a year.

Test Configuration



TEST PROCEDURE

The transmitter output is connected to the RF Power Meter. The RF Power Meter is set to the peak power detection.



TEST RESULTS

No non-compliance noted

Test Data

GFSK

Channel	Frequency (MHz)	Reading Power (dBm)	Factor (dB)	Output Power (dBm)	Output Power (W)	Limit (mW)	Result
Low	2402	-2.76	0.42	-2.34	0.00058	125	PASS
Md	2441	-2.54	0.42	-2.12	0.00061		PASS
Hgh	2480	-3.34	0.42	-2.92	0.00051		PASS

8DPSK

Channel	Frequency (MHz)	Reading Power (dBm)	Factor (dB)	Output Power (dBm)	Output Power (W)	Limit (mW)	Result
Low	2402	-2.98	0.42	-2.56	0.00055	125	PASS
Md	2441	-3.09	0.42	-2.67	0.00054		PASS
Hgh	2480	-2.45	0.42	-2.03	0.00063		PASS

7.3 PEAK POWER SPECTRAL DENSITY

LIMIT


1. For direct sequence systems, the peak power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8dBm in any 3kHz band during any time interval of continuous transmission.
2. The direct sequence operating of the hybrid system, with the frequency hopping operation turned off, shall comply with the power density requirements of paragraph (d) of this section.

MEASUREMENT EQUIPMENT USED

Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due
Spectrum Analyzer	Agilent	E4446A	US44300399	02/24/2010

Remark: Each piece of equipment is scheduled for calibration once a year.

Test Configuration



TEST PROCEDURE

1. Place the EUT on the table and set it in transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
3. Set the spectrum analyzer as RBW = 3kHz, VBW = 10kHz, Span = 300kHz, Sweep=100s
4. Record the max. reading.
5. Repeat the above procedure until the measurements for all frequencies are completed.

TEST RESULTS

Not applicable. Since EUT is the Bluetooth device.

7.4 BAND EDGES MEASUREMENT


LIMIT

According to §15.247(c), in any 100 kHz bandwidth outside the frequency bands in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in 15.209(a).

MEASUREMENT EQUIPMENT USED

Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due
Spectrum Analyzer	Agilent	E4446A	US44300399	02/24/2010
EMI Test Receiver	R&S	ESCI	1166.5950 03	01/13/2010
Low Noise Amplifier	MITEQ	AM-1604-3000	1123808	02/14/2010
Bilog Antenna	SCHWAZBECK	CBL6143	5082	06/09/2010
Turn Table	EMCO	2081-1.21	N/A	N.C.R
Antenna Tower	CT	N/A	N/A	N.C.R
Controller	CT	N/A	N/A	N.C.R
High Noise Amplifier	Agilent	89842	N/A	06/09/2010
Site NSA	C&C	N/A	N/A	06/09/2010
Horn Antenna	TRC	N/A	N/A	03/04/2010
Signal Generator	Anritsu	MG3694A	#050125	02/24/2010

Test Configuration

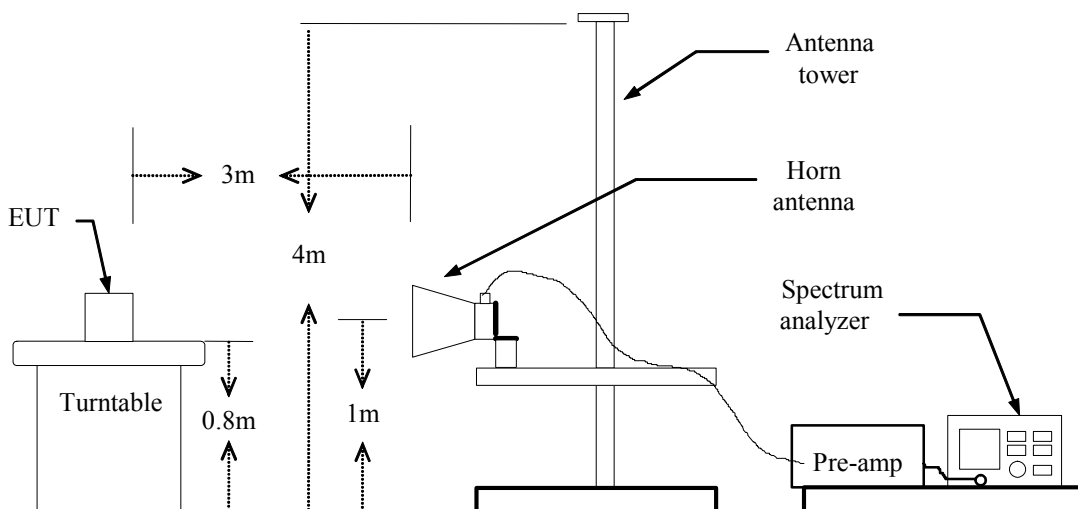



TEST PROCEDURE

1. The EUT is placed on a turntable, which is 0.8m above the ground plane.
2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
3. EUT is set 3m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emission.
4. Set the spectrum analyzer in the following setting in order to capture the lower and upper band-edges of the emission:
 - (a) PEAK: RBW=VBW=1MHz / Sweep=AUTO
 - (b) AVERAGE: RBW=1MHz / VBW=10Hz / Sweep=AUTO
5. Repeat the procedures until all the PEAK and AVERAGE versus POLARIZATION are measured.

TEST RESULTS

Refer to attach spectrum analyzer data chart.



Test Data

GFSK


Band Edges (CH-Low)

Detector mode: Peak

Polarity: Vertical

Agilent 17:07:50 26 Jul 2009

R T

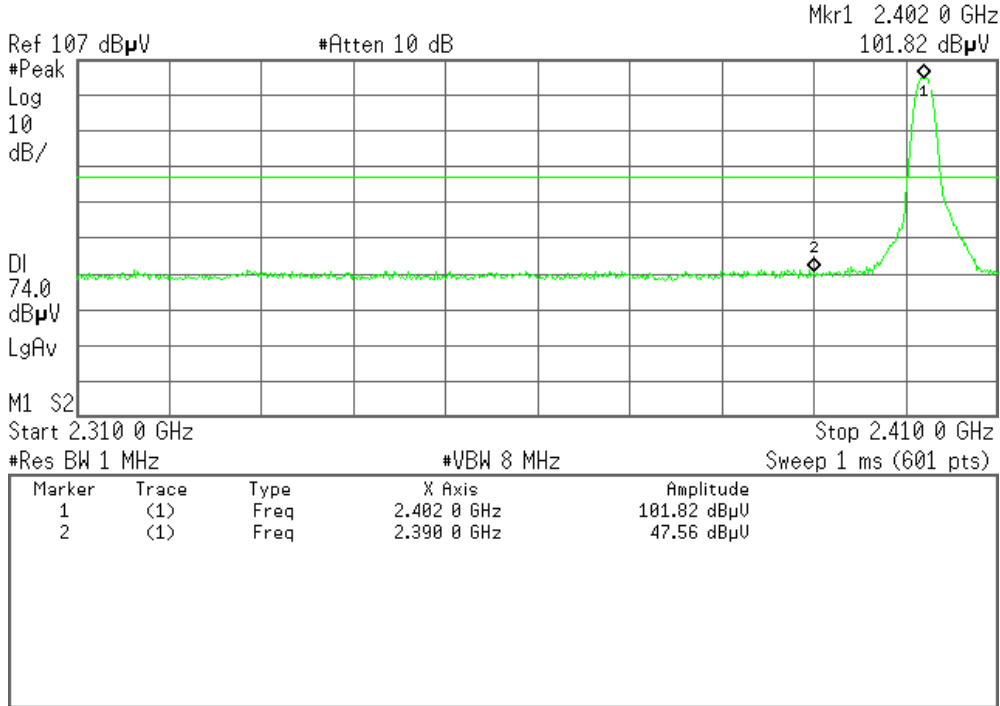


Detector mode: Average

Polarity: Vertical

Agilent 17:08:22 26 Jul 2009

R T

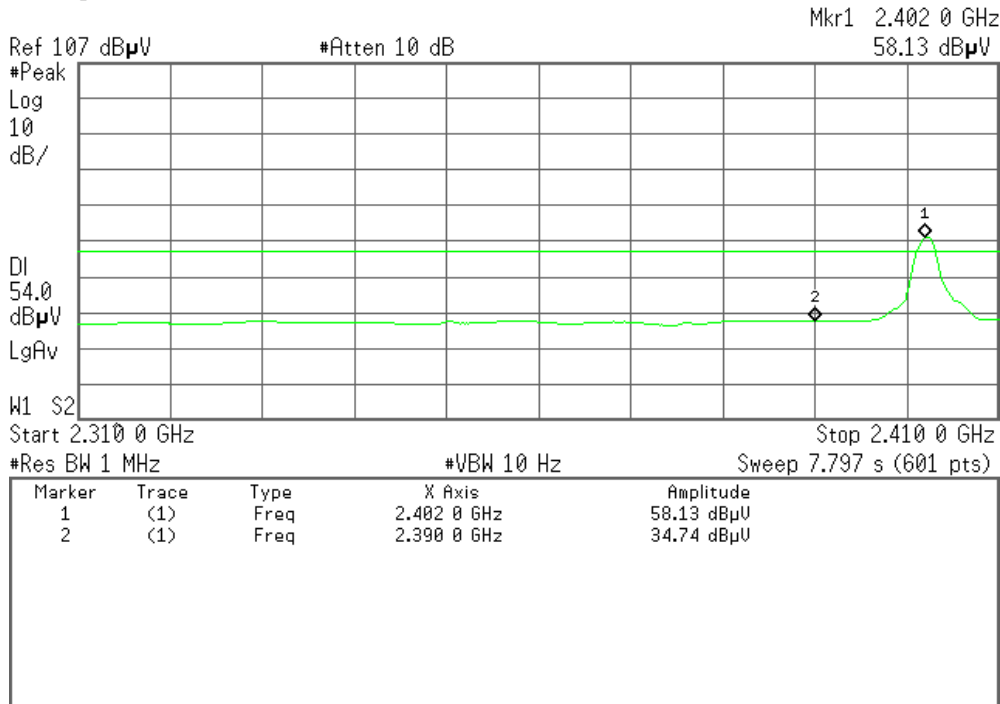




Detector mode: Peak

Polarity: Horizontal

Agilent 17:02:25 26 Jul 2009

R T

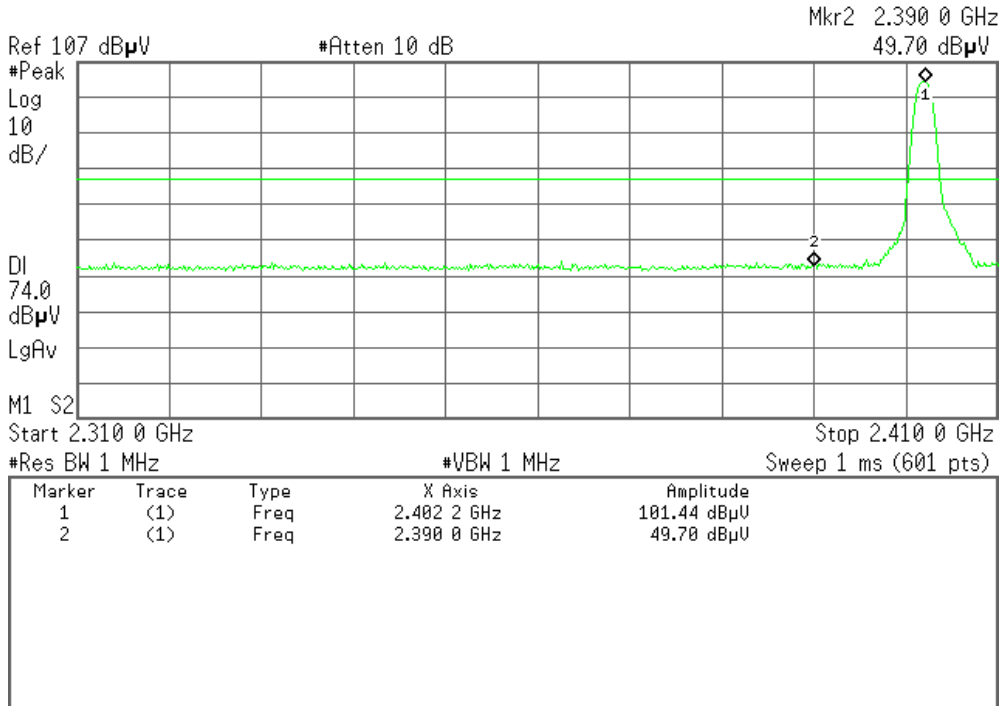


Detector mode: Average

Polarity: Horizontal

Agilent 17:03:09 26 Jul 2009

R T

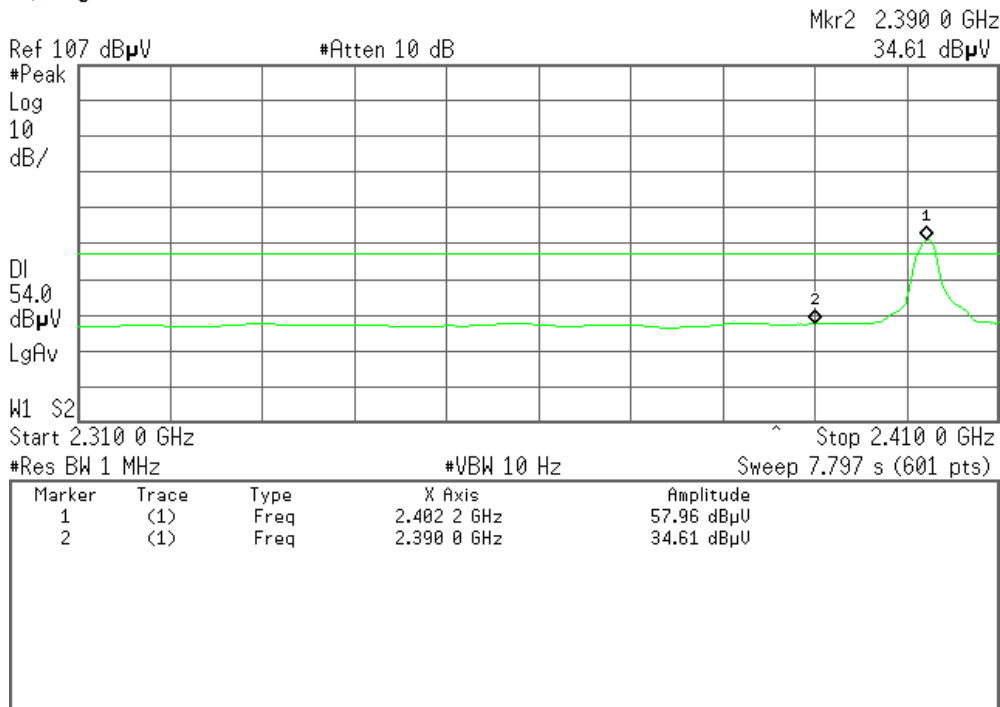



Band Edges (CH-High)


Detector mode: Peak

Polarity: Vertical

Agilent 17:16:50 26 Jul 2009

R T

Mkr1 2.480 00 GHz
98.57 dBµV

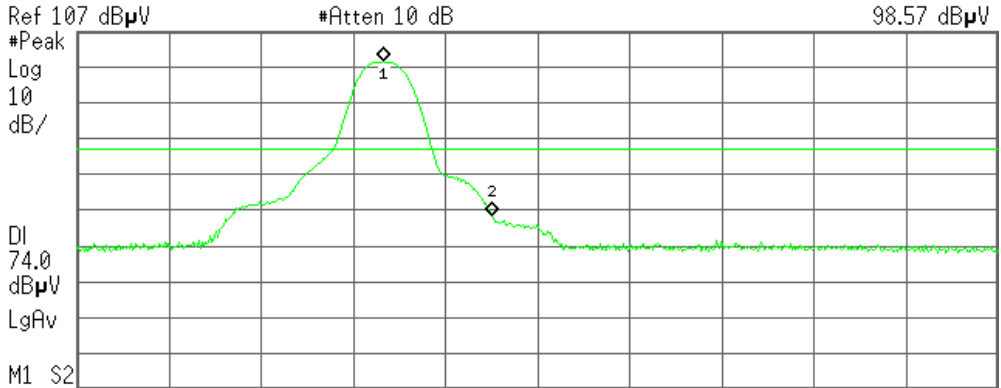

Start 2.470 00 GHz Stop 2.500 00 GHz
#Res BW 1 MHz #VBW 1 MHz Sweep 1 ms (601 pts)

Marker	Trace	Type	X Axis	Amplitude
1	(1)	Freq	2.480 00 GHz	98.57 dBµV
2	(1)	Freq	2.483 50 GHz	55.32 dBµV


Detector mode: Average

Polarity: Vertical

Agilent 17:14:00 26 Jul 2009

R T

Mkr2 2.483 50 GHz
40.19 dBµV

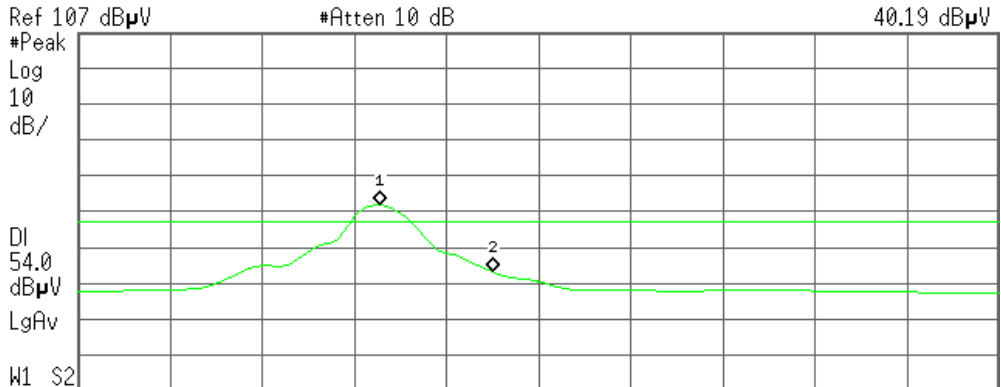

Start 2.470 00 GHz Stop 2.500 00 GHz
#Res BW 1 MHz #VBW 10 Hz Sweep 2.339 s (601 pts)

Marker	Trace	Type	X Axis	Amplitude
1	(1)	Freq	2.479 85 GHz	58.85 dBµV
2	(1)	Freq	2.483 50 GHz	40.19 dBµV



Detector mode: Peak

Polarity: Horizontal

Agilent 17:17:36 26 Jul 2009

R T

Mkr1 2.480 00 GHz
98.55 dBµV



Marker	Trace	Type	X Axis	Amplitude
1	(1)	Freq	2.480 00 GHz	98.55 dBµV
2	(1)	Freq	2.483 50 GHz	54.79 dBµV


Detector mode: Average

Polarity: Horizontal

Agilent 17:18:03 26 Jul 2009

R T

Mkr1 2.480 00 GHz
56.92 dBµV

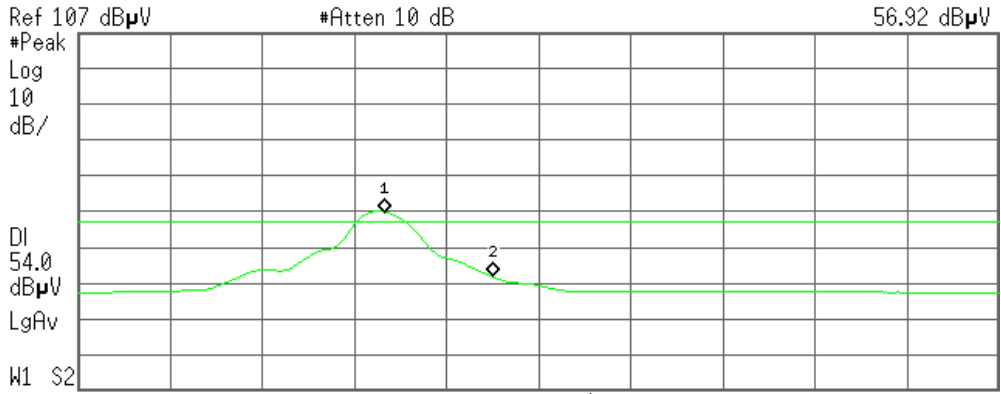

Marker	Trace	Type	X Axis	Amplitude
1	(1)	Freq	2.480 00 GHz	56.92 dBµV
2	(1)	Freq	2.483 50 GHz	38.83 dBµV



8DPSK


Band Edges (CH-Low)

Detector mode: Peak

Polarity: Vertical

Agilent 17:33:16 26 Jul 2009

R T

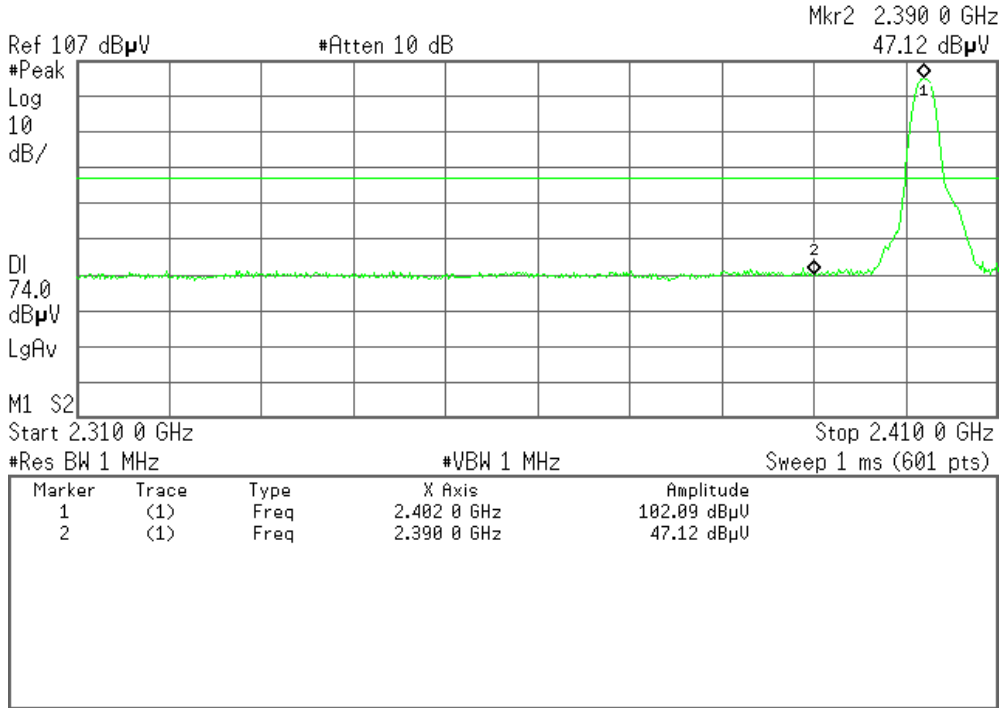


Detector mode: Average

Polarity: Vertical

Agilent 17:33:46 26 Jul 2009

R T

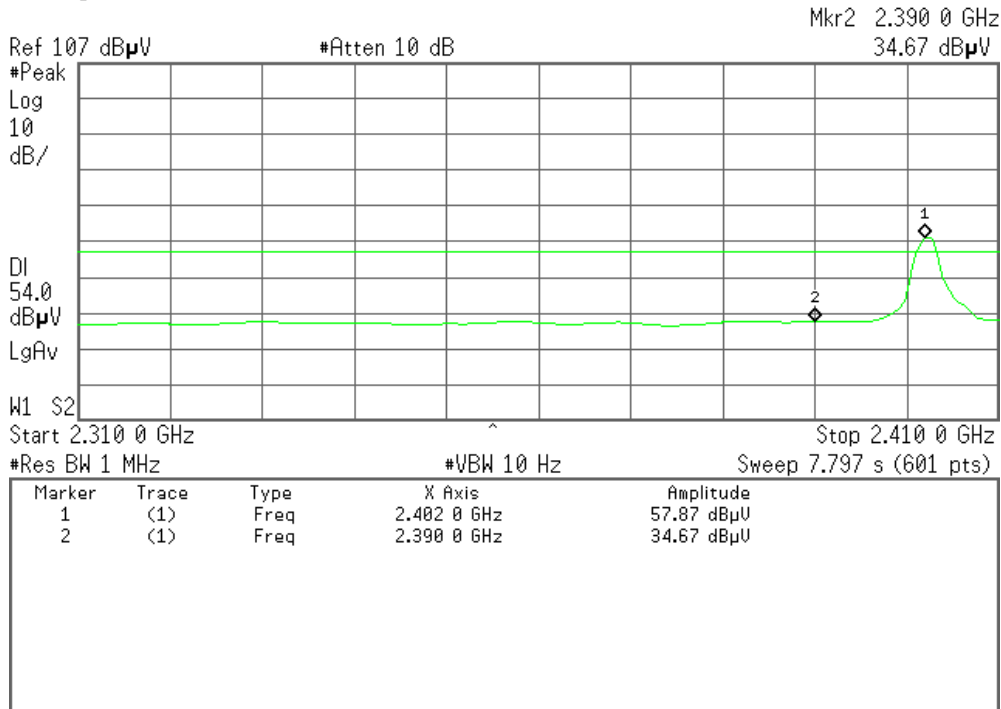




Detector mode: Peak

Polarity: Horizontal

Agilent 17:36:43 26 Jul 2009

R T

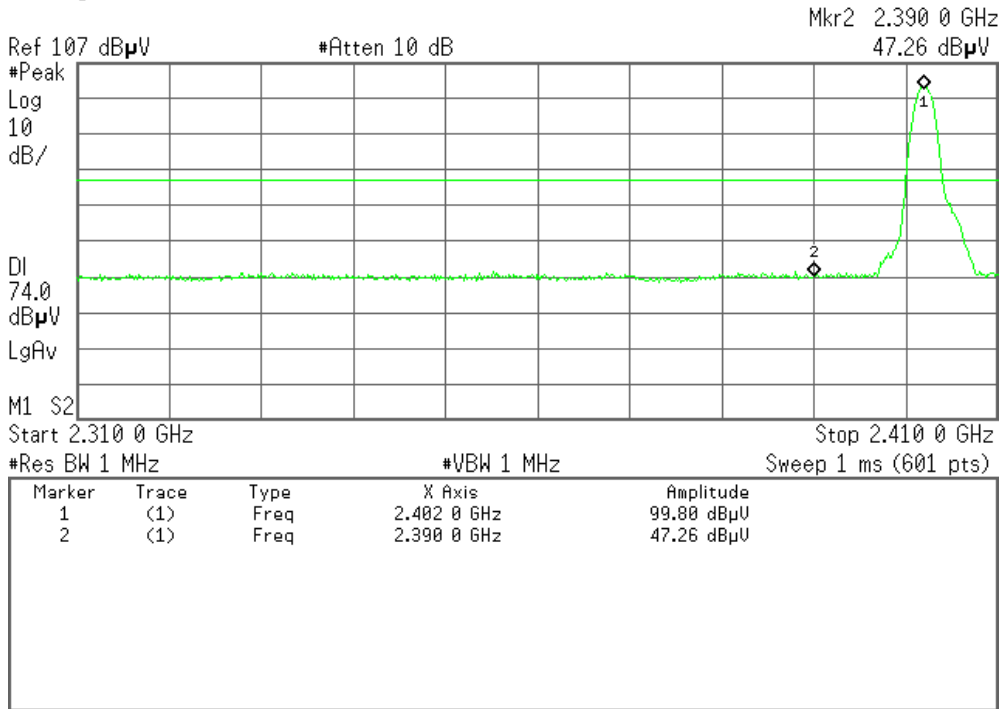


Detector mode: Average

Polarity: Horizontal

Agilent 17:37:17 26 Jul 2009

R T

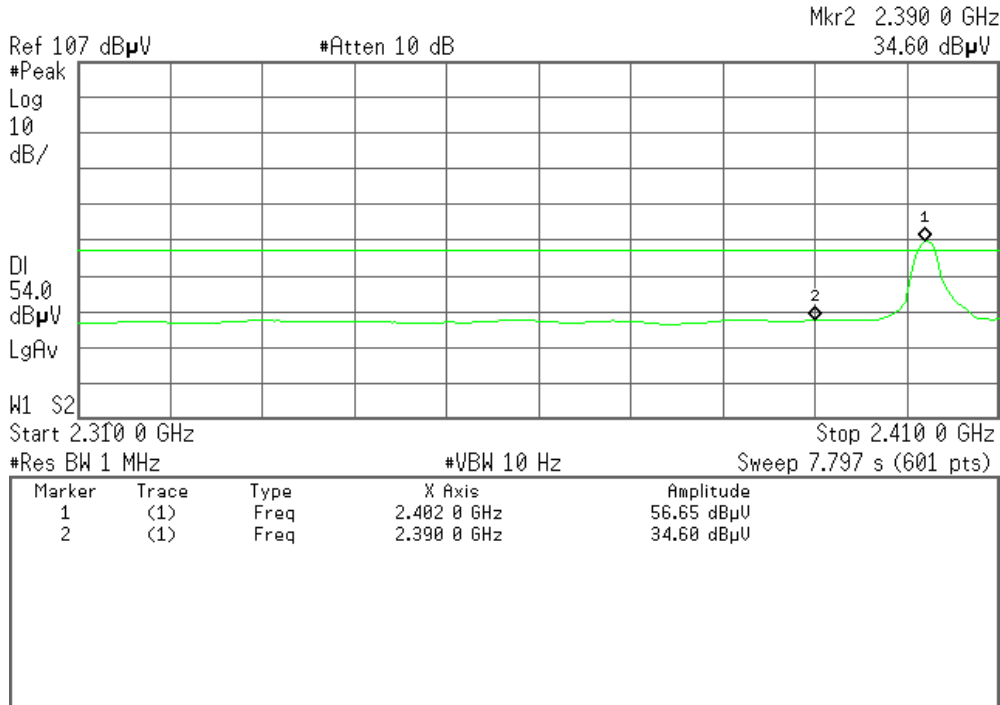



Band Edges (CH-High)


Detector mode: Peak

Polarity: Vertical

Agilent 17:30:01 26 Jul 2009

R T

Mkr1 2.480 00 GHz
100.86 dBμV

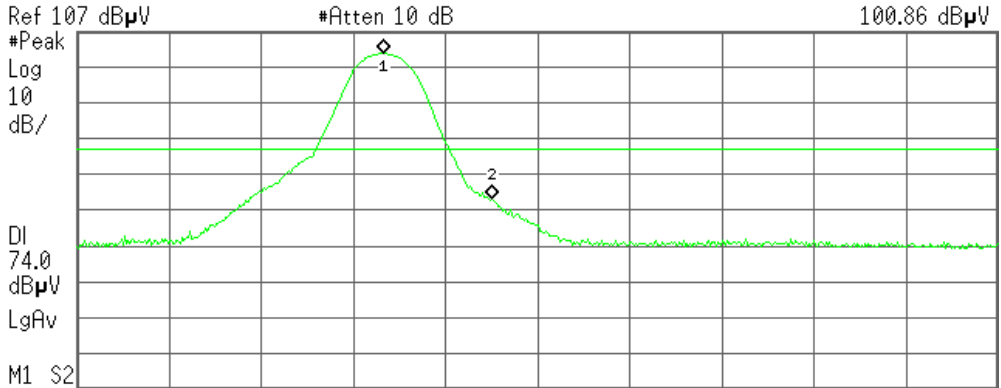

#Res BW 1 MHz #VBW 1 MHz Sweep 1 ms (601 pts)

Marker	Trace	Type	X Axis	Amplitude
1	(1)	Freq	2.480 00 GHz	100.86 dBμV
2	(1)	Freq	2.483 50 GHz	60.25 dBμV

Detector mode: Average

Polarity: Vertical

Agilent 17:30:39 26 Jul 2009

R T

Mkr1 2.479 75 GHz
57.99 dBμV



#Res BW 1 MHz #VBW 10 Hz Sweep 2.339 s (601 pts)

Marker	Trace	Type	X Axis	Amplitude
1	(1)	Freq	2.479 75 GHz	57.99 dBμV
2	(1)	Freq	2.483 50 GHz	38.44 dBμV




Detector mode: Peak

Polarity: Horizontal

Agilent 17:27:00 26 Jul 2009

R T

Mkr1 2.480 00 GHz
97.41 dBµV

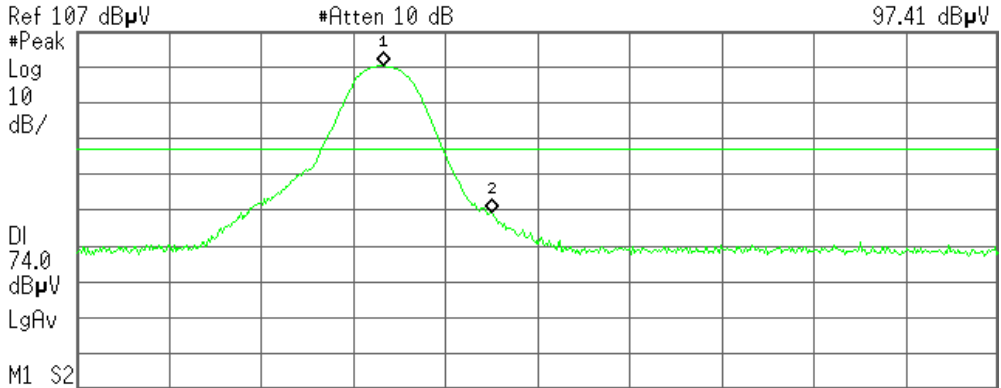

Marker	Trace	Type	X Axis	Amplitude
1	(1)	Freq	2.480 00 GHz	97.41 dBµV
2	(1)	Freq	2.483 50 GHz	56.39 dBµV

Detector mode: Average

Polarity: Horizontal

Agilent 17:26:09 26 Jul 2009

R T

Mkr1 2.480 00 GHz
56.25 dBµV



Marker	Trace	Type	X Axis	Amplitude
1	(1)	Freq	2.480 00 GHz	56.25 dBµV
2	(1)	Freq	2.483 50 GHz	37.25 dBµV



7.5 FREQUENCY SEPARATION

LIMIT


According to §15.247(a)(1), Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

MEASUREMENT EQUIPMENT USED

Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due
Spectrum Analyzer	Agilent	E4446A	US44300399	02/24/2010
Spectrum Analyzer	R&S	FSP30	1093.4495.30	07/22/2010

Remark: Each piece of equipment is scheduled for calibration once a year.

Test Configuration



TEST PROCEDURE

1. Place the EUT on the table and set it in transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
3. Set center frequency of spectrum analyzer = middle of hopping channel.
4. Set the spectrum analyzer as RBW=30kHz, VBW=100kHz, Adjust Span to 3 MHz, Sweep = auto.
5. Max hold. Mark 3 Peaks of hopping channel and record the 3 peaks frequency.

TEST RESULTS

No non-compliance noted

Test Data

GFSK

Channel Separation (MHz)	Two-thirds of the 20 dB Bandwidth (kHz)	Channel Separation Limit	Result
1.0	581	> Two-thirds of the 20 dB Bandwidth	Pass

8DPSK

Channel Separation (MHz)	Two-thirds of the 20 dB Bandwidth (kHz)	Channel Separation Limit	Result
1.0	838	> Two-thirds of the 20 dB Bandwidth	Pass



GFSK


Test Plot

Measurement of Channel Separation

Agilent 12:56:09 26 Jul 2009

R T

Mkr2 1.000 MHz

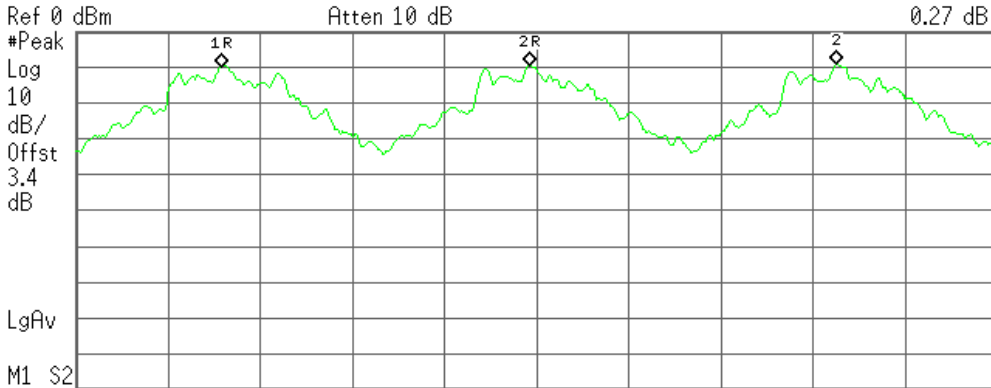

M1 S2
 Center 2.441 000 GHz Span 3 MHz
 #Res BW 30 kHz #VBW 100 kHz Sweep 3.2 ms (601 pts)


Marker	Trace	Type	X Axis	Amplitude
1R	(1)	Freq	2.439 975 GHz	-10.16 dBm
1a	(1)	Freq	1.000 MHz	0.64 dB
2R	(1)	Freq	2.440 975 GHz	-9.52 dBm
2a	(1)	Freq	1.000 MHz	0.27 dB

20 dB bandwidth(CH Low)

Agilent 12:10:44 26 Jul 2009

R T

Mkr1 2.401 840 GHz

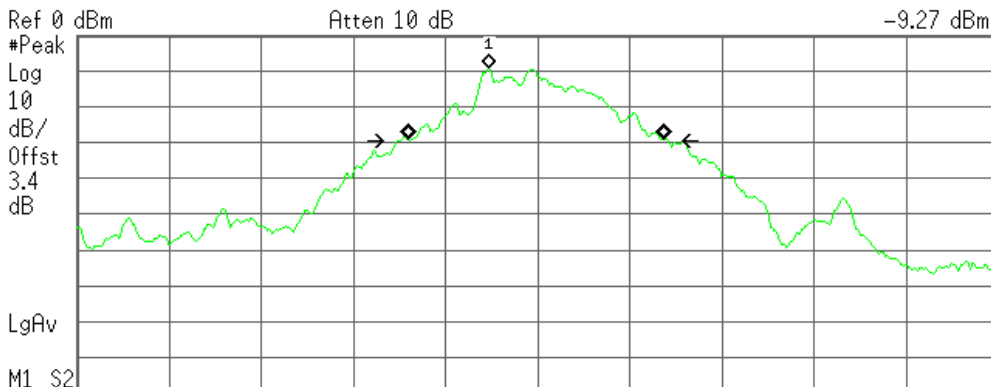

M1 S2
 Center 2.402 000 GHz Span 3 MHz
 #Res BW 30 kHz #VBW 100 kHz Sweep 3.2 ms (601 pts)

Occupied Bandwidth
829.0259 kHz

Occ BW % Pwr 99.00 %
x dB -20.00 dB

Transmit Freq Error -3.750 kHz
x dB Bandwidth 872.293 kHz




8DPSK

Test Plot

Measurement of Channel Separation

Agilent 14:20:09 26 Jul 2009


R T

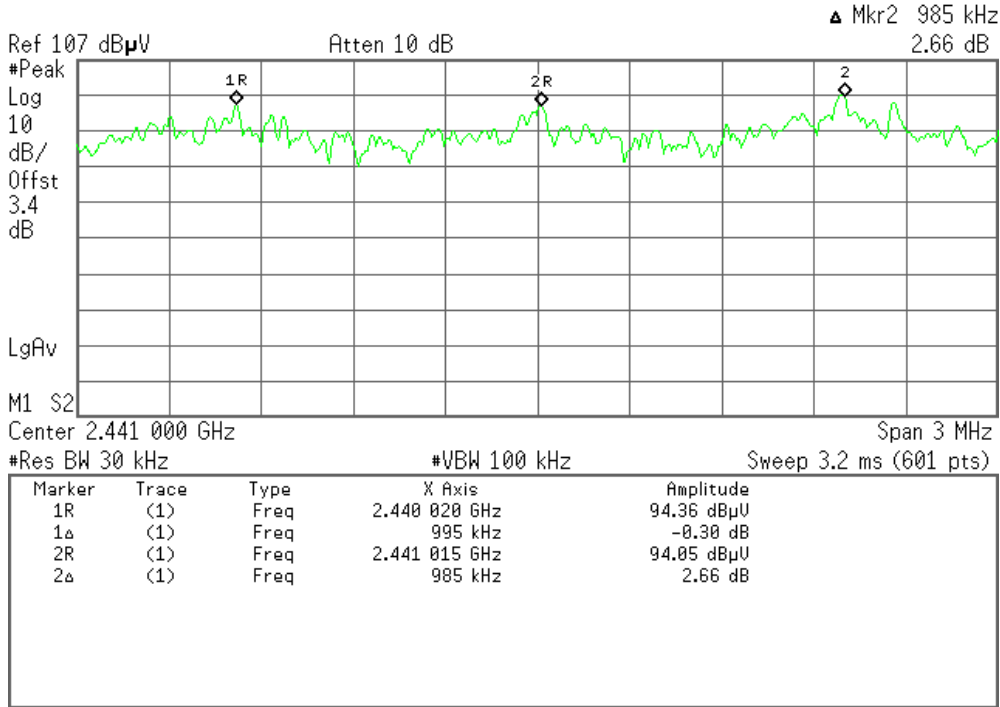

20 dB bandwidth(CH Mid)

Agilent 14:29:32 26 Jul 2009

R T

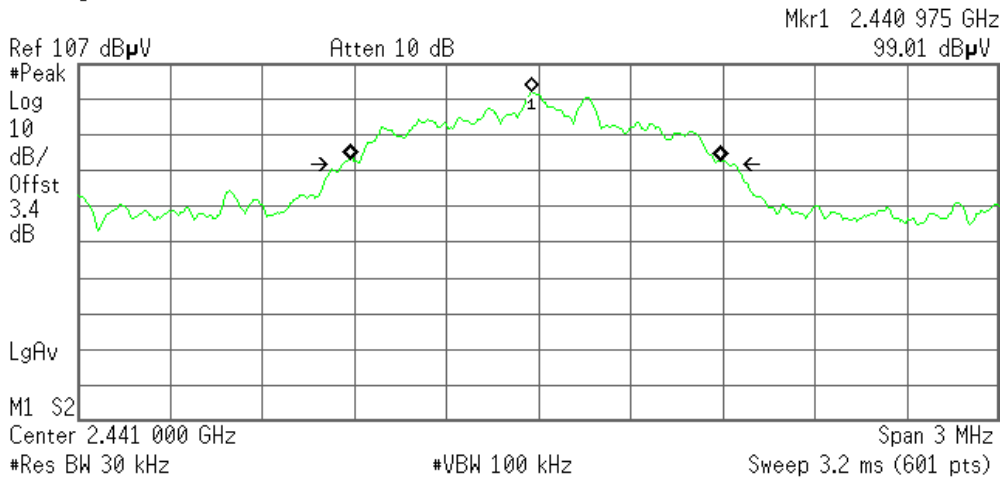

Occupied Bandwidth
1.2050 MHz

Occ BW % Pwr 99.00 %
x dB -20.00 dB

Transmit Freq Error -13.915 kHz
x dB Bandwidth 1.257 MHz

7.6 NUMBER OF HOPPING FREQUENCY

LIMIT


According to §15.247(a)(1)(ii), Frequency hopping systems operating in the 2400MHz-2483.5 MHz bands shall use at least 15 hopping frequencies.

MEASUREMENT EQUIPMENT USED

Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due
Spectrum Analyzer	Agilent	E4446A	US44300399	02/24/2010

Remark: Each piece of equipment is scheduled for calibration once a year.

Test Configuration



TEST PROCEDURE

1. Place the EUT on the table and set it in transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
3. Set spectrum analyzer Start=2400MHz, Stop = 2441.5MHz, Sweep = 5.04ms and Start=2441.5MHz, Stop = 2483.5MHz, Sweep = 5.08ms.
4. Set the spectrum analyzer as RBW, VBW=100kHz,
5. Max hold, view and count how many channel in the band.

TEST RESULTS

No non-compliance noted

Test Data

GFSK / 8DPSK

Result (No. of CH)	Limit (No. of CH)	Result
79	>15	PASS



Test Plot


Channel Number

GFSK

2.4 GHz – 2.441 GHz

Agilent 11:34:14 26 Jul 2009


R T

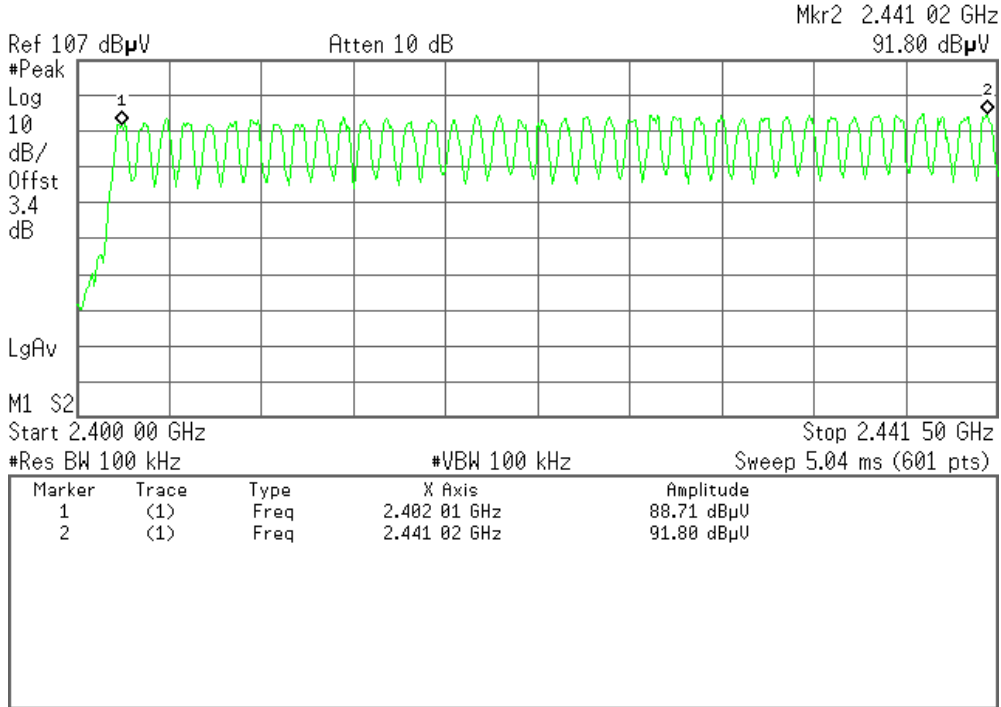

2.441 GHz – 2.4835 GHz

Agilent 11:36:46 26 Jul 2009

R T

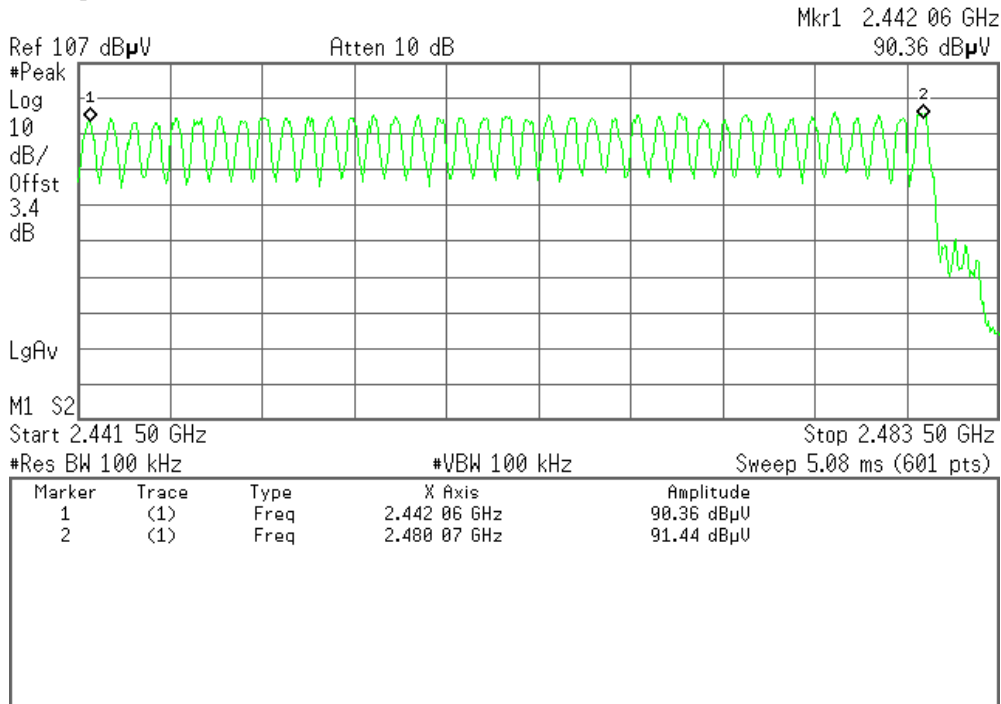




8DPSK

2.4 GHz – 2.441 GHz

Agilent 14:57:46 26 Jul 2009


R T

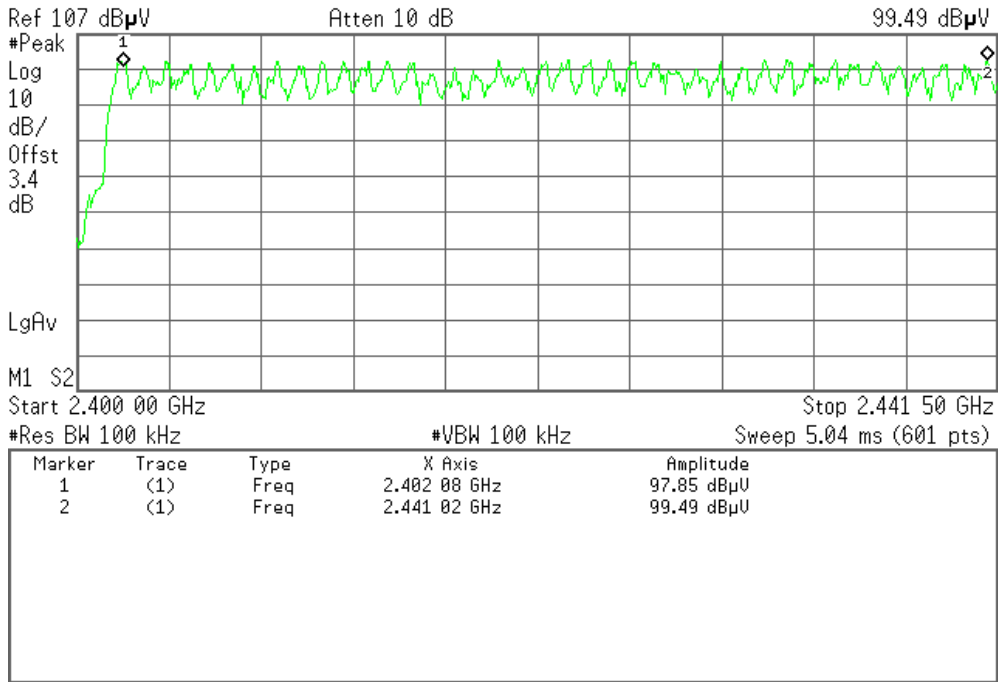

2.441 GHz – 2.4835 GHz

Agilent 15:00:27 26 Jul 2009

R T

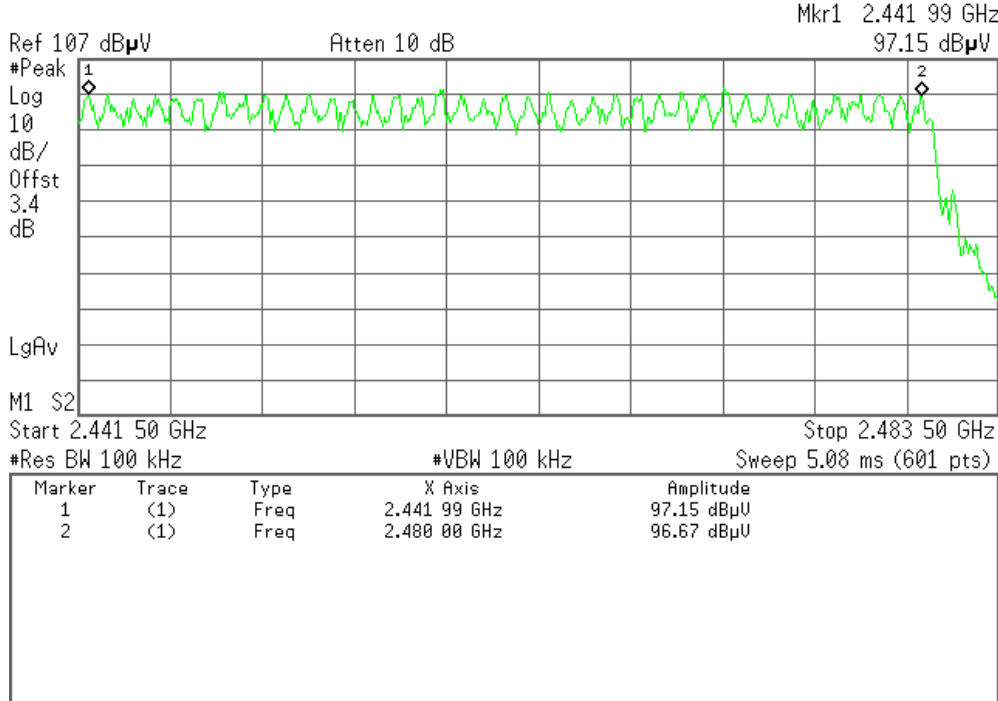

7.7 TIME OF OCCUPANCY (DWELL TIME)

LIMIT


According to §15.247(a)(1)(iii), Frequency hopping systems operating in the 2400MHz-2483.5 MHz bands. The average time of occupancy on any channels shall not greater than 0.4 s within a period 0.4 s multiplied by the number of hopping channels employed.

MEASUREMENT EQUIPMENT USED

Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due
Spectrum Analyzer	Agilent	E4446A	US44300399	02/24/2010

Remark: Each piece of equipment is scheduled for calibration once a year.

Test Configuration



TEST PROCEDURE

1. Place the EUT on the table and set it in transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
3. Set center frequency of spectrum analyzer = operating frequency.
4. Set the spectrum analyzer as RBW, VBW=1MHz, Span = 0Hz, Sweep = auto.
5. Repeat above procedures until all frequency measured were complete.



TEST RESULTS

No non-compliance noted

Test Data

GFSK

DH 1

CH Low: $0.40 * (1600/2)/79 * 31.6 = 128.0(\text{ms})$

CH Mid: $0.40 * (1600/2)/79 * 31.6 = 128.0(\text{ms})$

CH High: $0.40 * (1600/2)/79 * 31.6 = 128.0(\text{ms})$

CH	Pulse Time (ms)	Total of Dwell (ms)	Period Time (s)	Limit (ms)	Result
Low	0.40	128.0	31.60	400.00	PASS
Mid	0.40	128.0	31.60		PASS
High	0.40	128.0	31.60		PASS

DH 3

CH Low: $1.66 * (1600/4)/79 * 31.6 = 265.6(\text{ms})$

CH Mid: $1.66 * (1600/4)/79 * 31.6 = 265.6(\text{ms})$

CH High: $1.66 * (1600/4)/79 * 31.6 = 265.6(\text{ms})$

CH	Pulse Time (ms)	Total of Dwell (ms)	Period Time (s)	Limit (ms)	Result
Low	1.66	265.6	31.60	400.00	PASS
Mid	1.66	265.6	31.60		PASS
High	1.66	265.6	31.60		PASS

DH 5

CH Low: $2.88 * (1600/6)/79 * 31.6 = 307.2(\text{ms})$

CH Mid: $2.90 * (1600/6)/79 * 31.6 = 309.3(\text{ms})$

CH High: $2.90 * (1600/6)/79 * 31.6 = 309.3(\text{ms})$

CH	Pulse Time (ms)	Total of Dwell (ms)	Period Time (s)	Limit (ms)	Result
Low	2.88	307.2	31.60	400.00	PASS
Mid	2.90	309.3	31.60		PASS
High	2.90	309.3	31.60		PASS



8DPSK

DH 1

CH Low: $0.41 * (1600/2)/79 * 31.6 = 131.2(\text{ms})$

CH Mid: $0.41 * (1600/2)/79 * 31.6 = 131.2 (\text{ms})$

CH High: $0.41 * (1600/2)/79 * 31.6 = 131.2 (\text{ms})$

CH	Pulse Time (ms)	Total of Dwell (ms)	Period Time (s)	Limit (ms)	Result
Low	0.41	131.2	31.60	400.00	PASS
Mid	0.41	131.2	31.60		PASS
High	0.41	131.2	31.60		PASS

DH 3

CH Low: $1.66 * (1600/4)/79 * 31.6 = 265.6 (\text{ms})$

CH Mid: $1.67 * (1600/4)/79 * 31.6 = 267.2(\text{ms})$

CH High: $1.67 * (1600/4)/79 * 31.6 = 267.2(\text{ms})$

CH	Pulse Time (ms)	Total of Dwell (ms)	Period Time (s)	Limit (ms)	Result
Low	1.66	265.6	31.60	400.00	PASS
Mid	1.67	267.2	31.60		PASS
High	1.67	267.2	31.60		PASS

DH 5

CH Low: $2.92 * (1600/6)/79 * 31.6 = 311.5 (\text{ms})$

CH Mid: $2.87 * (1600/6)/79 * 31.6 = 306.1 (\text{ms})$

CH High: $2.88 * (1600/6)/79 * 31.6 = 307.2 (\text{ms})$

CH	Pulse Time (ms)	Total of Dwell (ms)	Period Time (s)	Limit (ms)	Result
Low	2.92	311.5	31.60	400.00	PASS
Mid	2.87	306.1	31.60		PASS
High	2.88	307.2	31.60		PASS



Test Plot

GFSK


DH 1

(CH Low)

Agilent 11:46:21 26 Jul 2009

R T

Mkr1 400 μ s
-4.38 dB

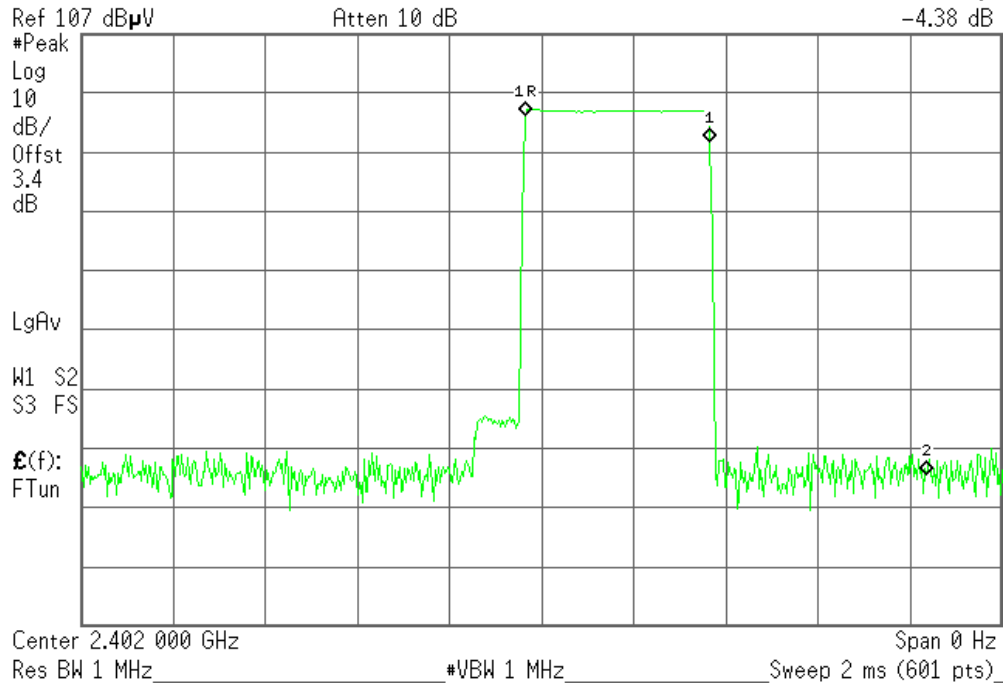


(CH Mid)

Agilent 11:48:17 26 Jul 2009

R T

Mkr1 400 μ s
-8.33 dB

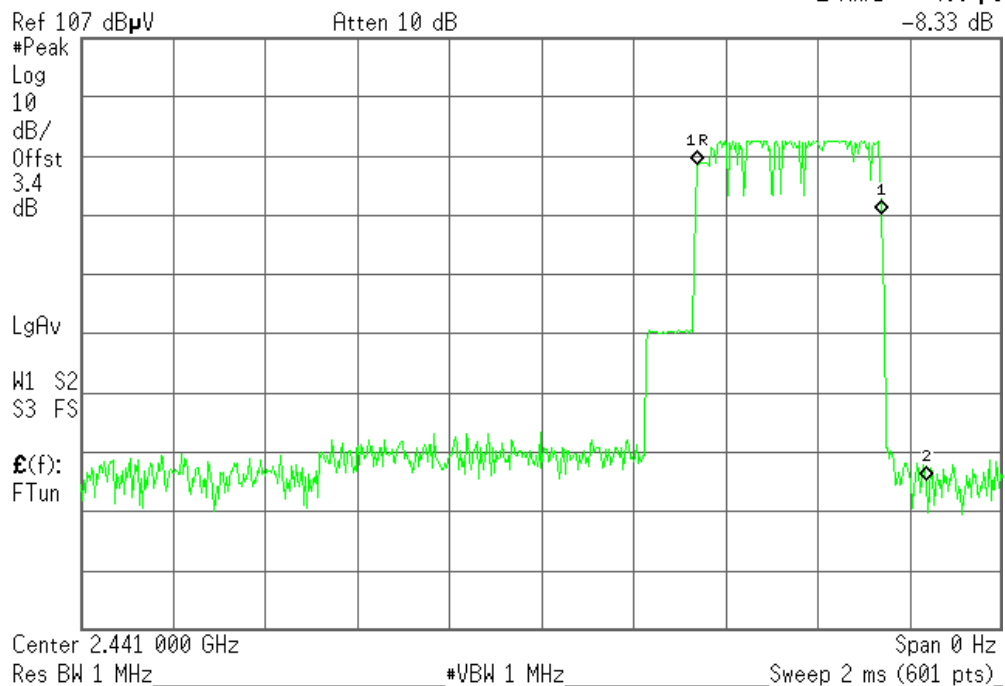




(CH High)

Agilent 12:00:20 26 Jul 2009

R T

Mkr1 400 μ s
-8.34 dB

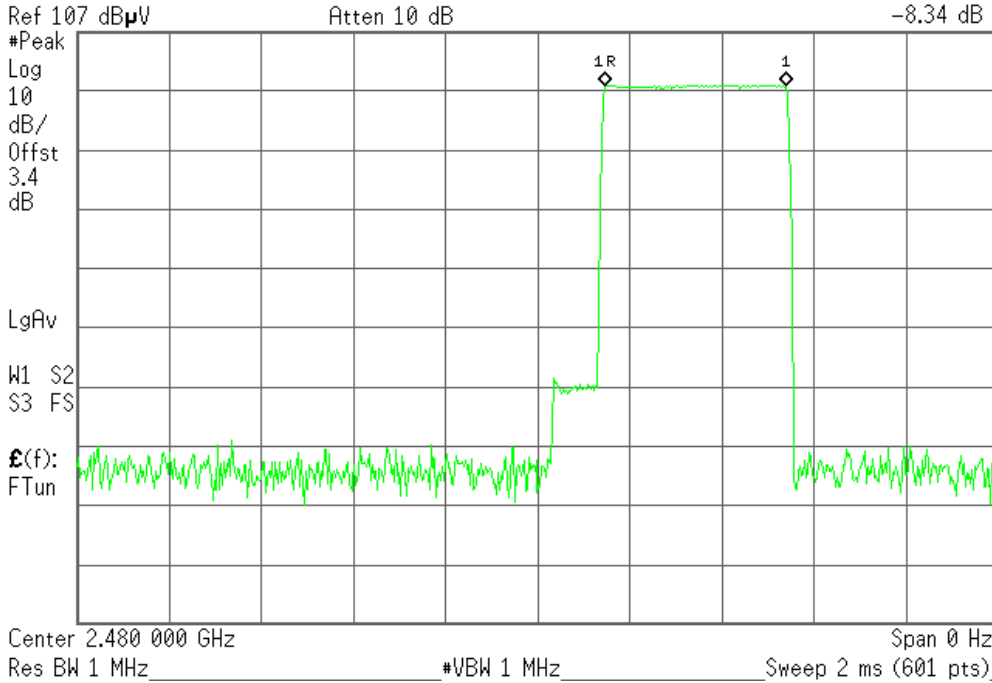


DH 3

(CH Low)

Agilent 14:00:14 26 Jul 2009

R T

Mkr1 1.66 ms
-0.80 dB

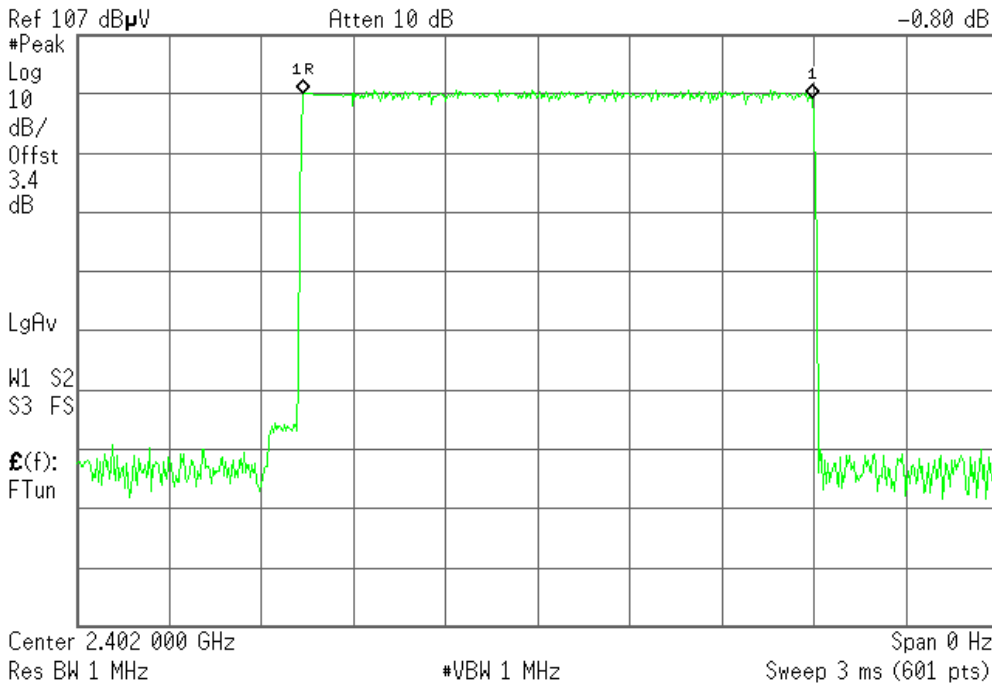




(CH Mid)

Agilent 13:30:02 26 Jul 2009

R T

▲ Mkr1 1.655 ms
0.20 dB

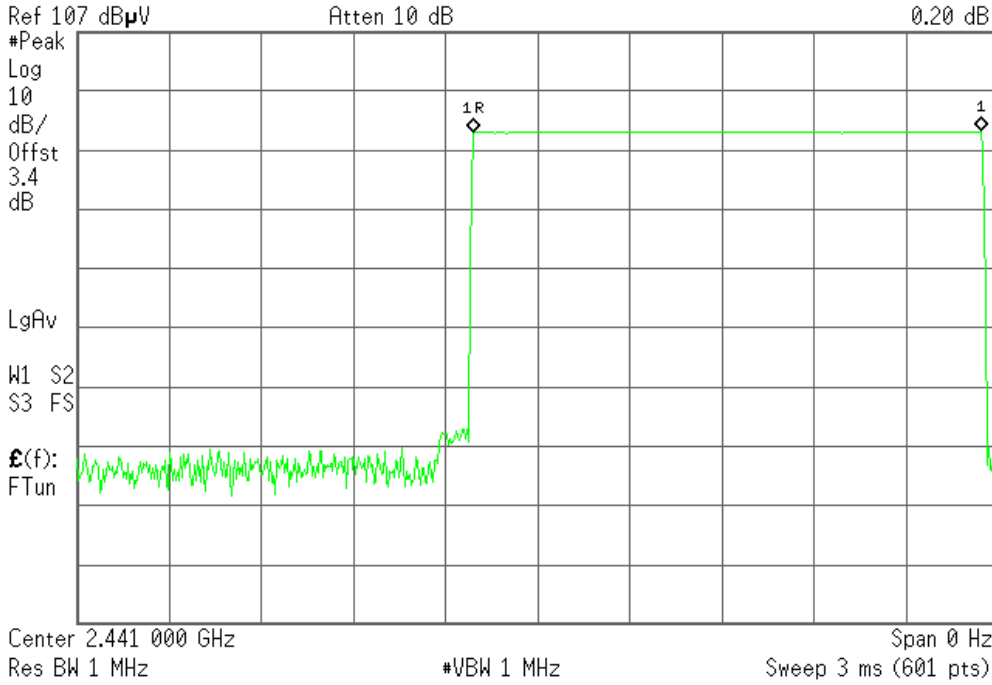


(CH High)

Agilent 13:31:25 26 Jul 2009

R T

▲ Mkr1 1.655 ms
5.09 dB

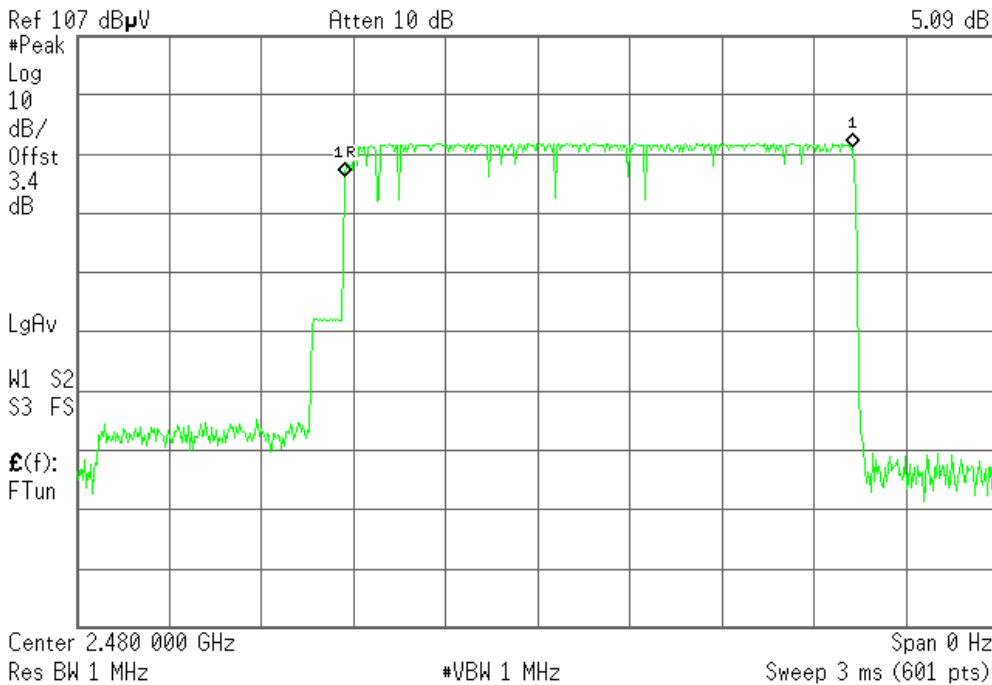




DH 5

(CH Low)

Agilent 13:42:26 26 Jul 2009

R T

Mkr1 2.875 ms
3.40 dB

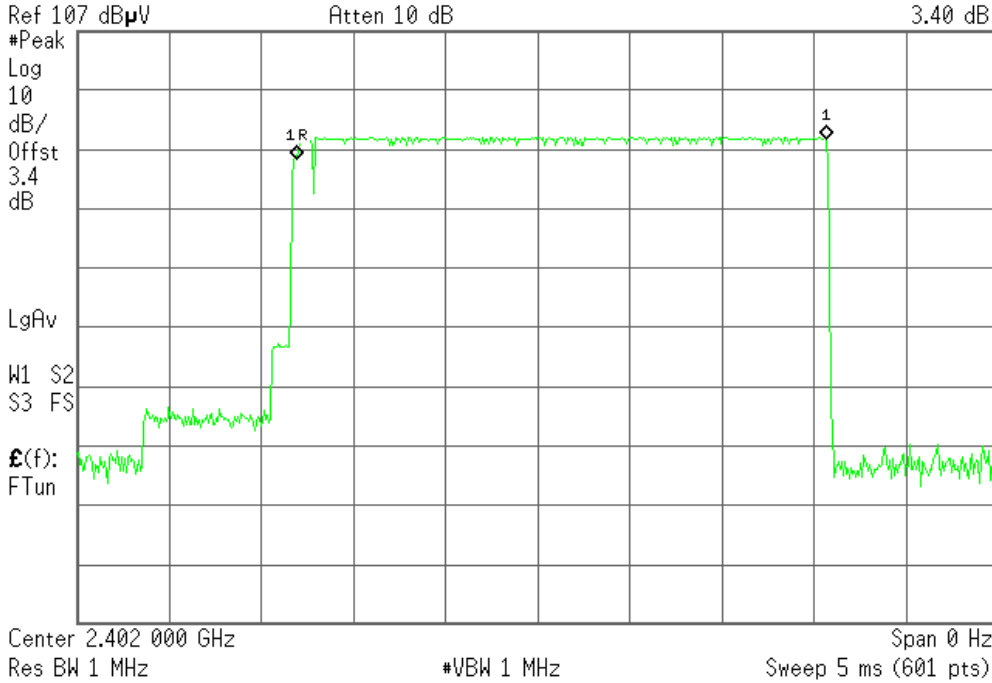


(CH Mid)

Agilent 13:36:59 26 Jul 2009

R T

Mkr1 2.908 ms
-2.78 dB

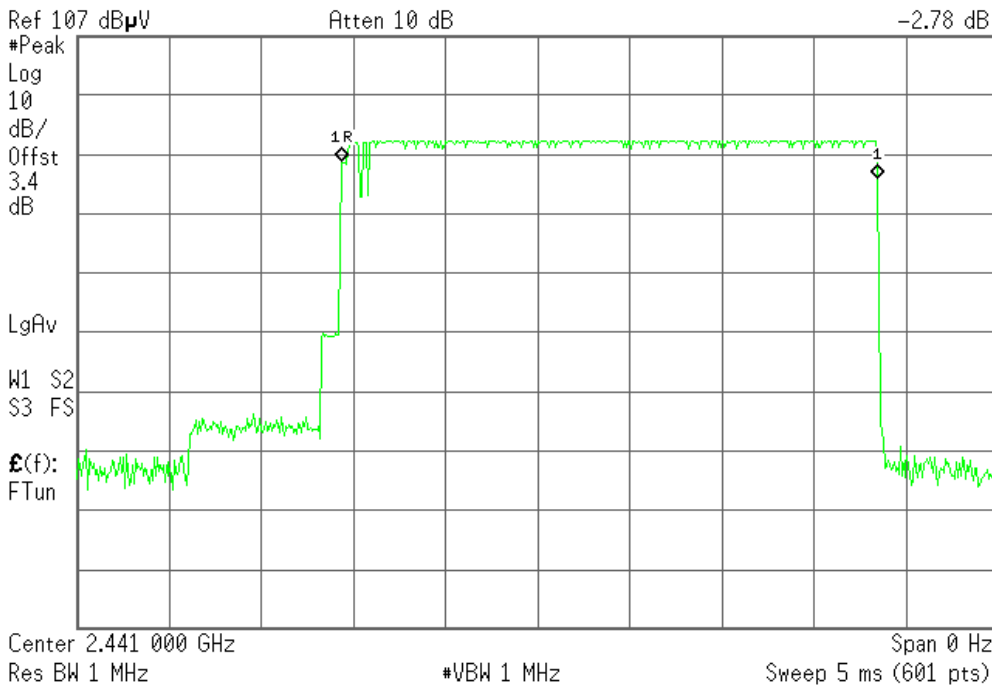




(CH High)

Agilent 13:34:42 26 Jul 2009

R T

Δ Mkr1 2.908 ms
0.09 dB

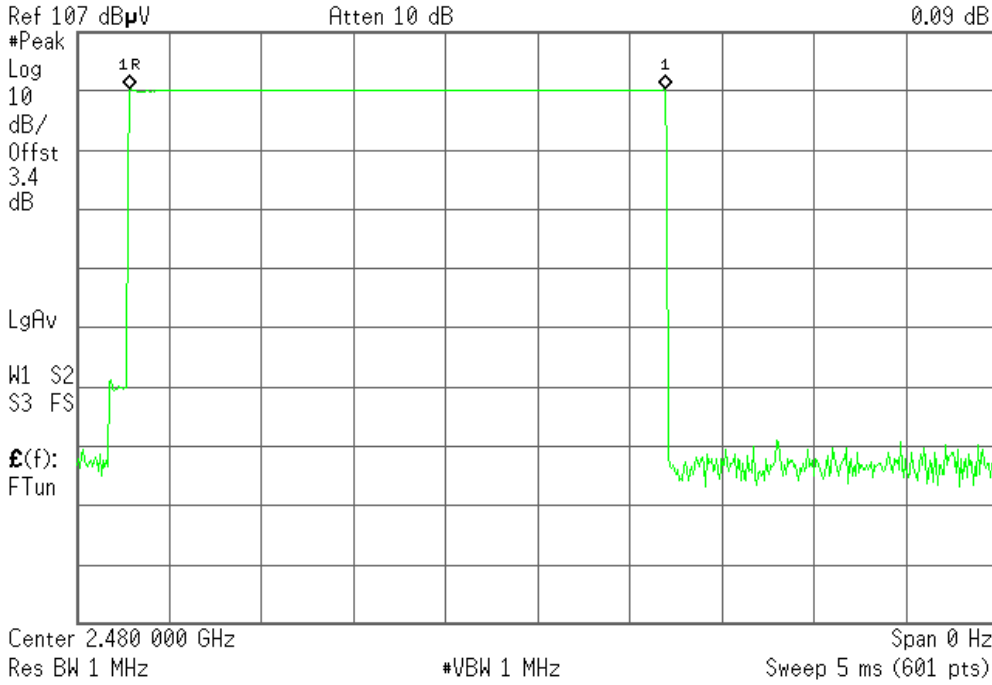

8DPSK


DH 1

(CH Low)

Agilent 13:46:39 26 Jul 2009

R T

Δ Mkr1 406.7 μ s
-2.62 dB

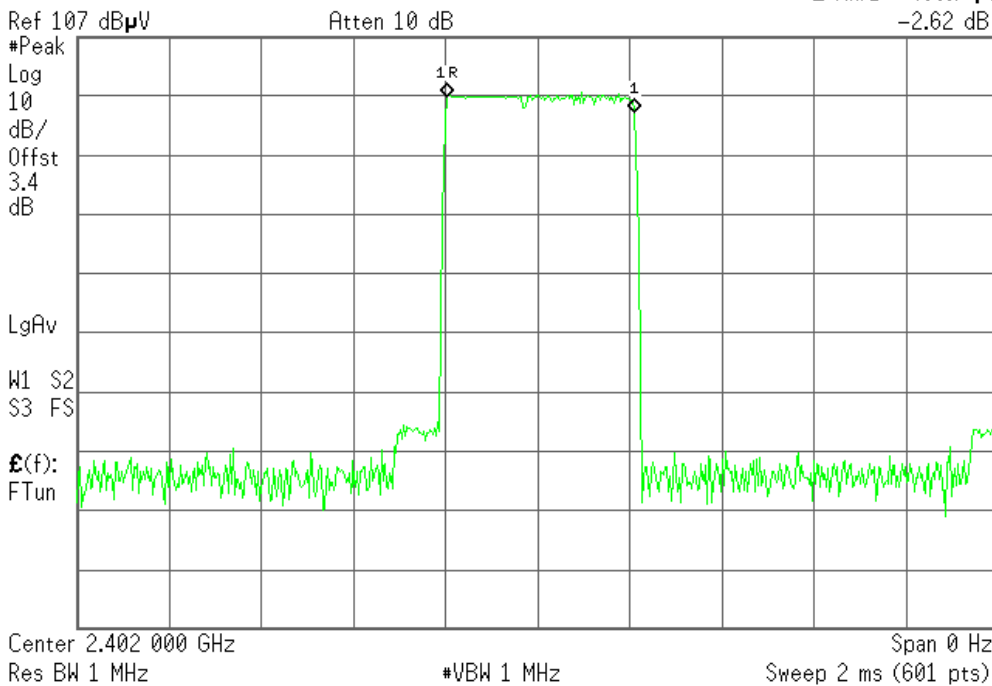




(CH Mid)

Agilent 13:47:37 26 Jul 2009

R T

Δ Mkr1 410 μs
-4.42 dB

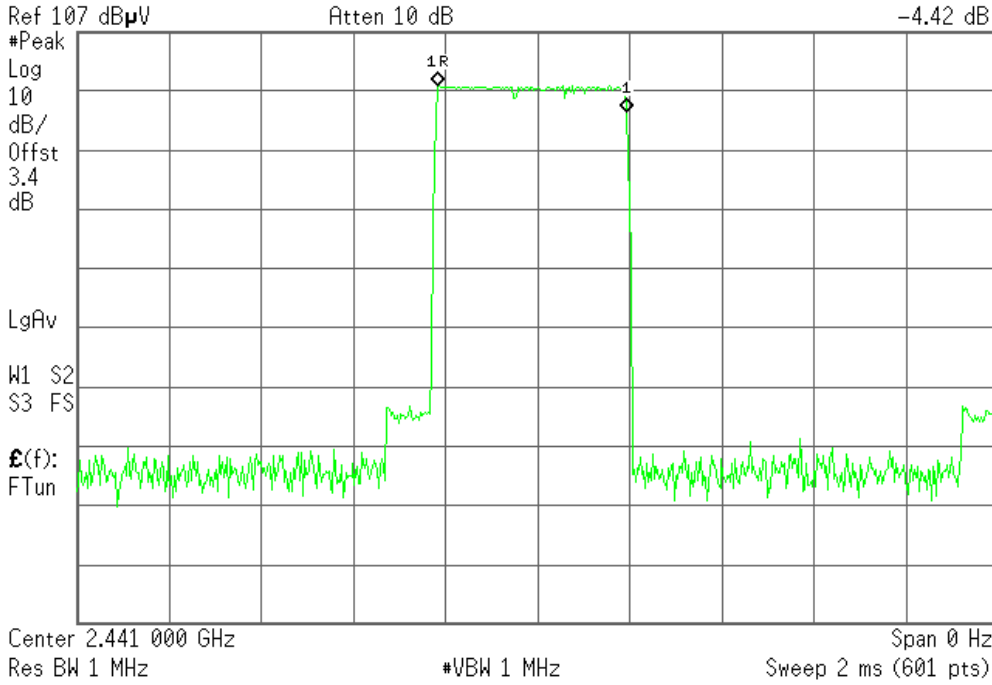


(CH High)

Agilent 13:48:59 26 Jul 2009

R T

Δ Mkr1 410 μs
-0.86 dB

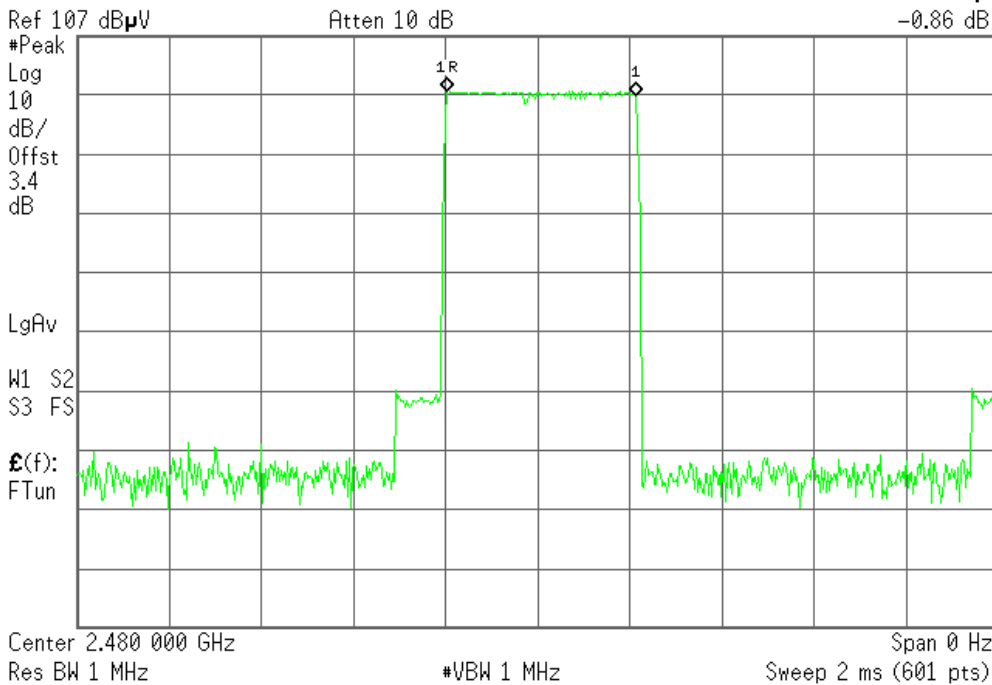




DH 3

(CH Low)

Agilent 14:00:14 26 Jul 2009

R T

Mkr1 1.66 ms
-0.80 dB

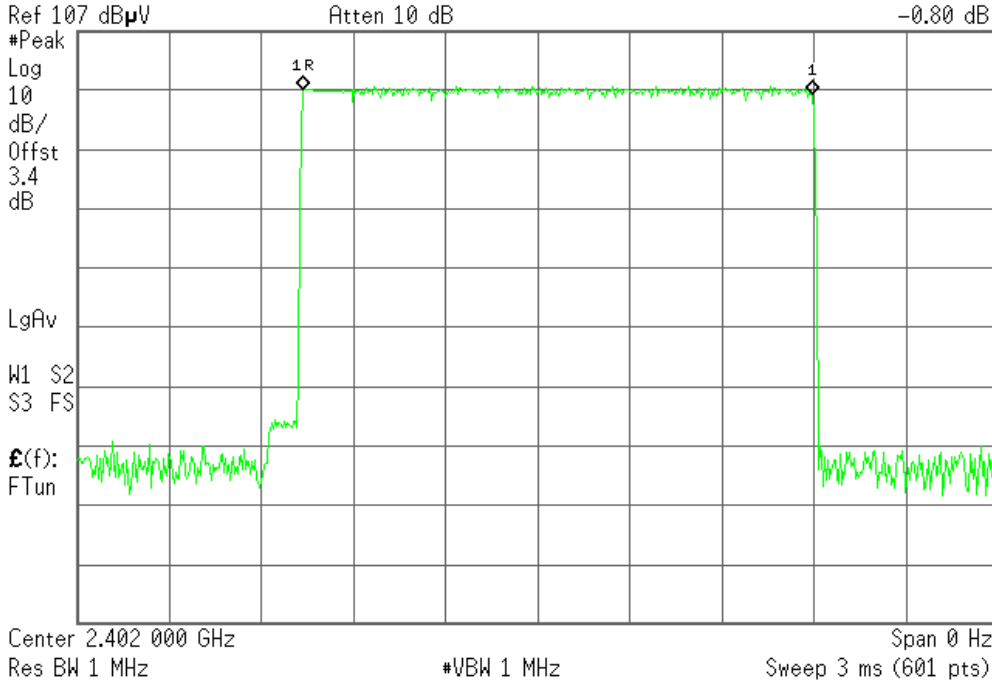


(CH Mid)

Agilent 13:59:17 26 Jul 2009

R T

Mkr1 1.665 ms
-2.11 dB

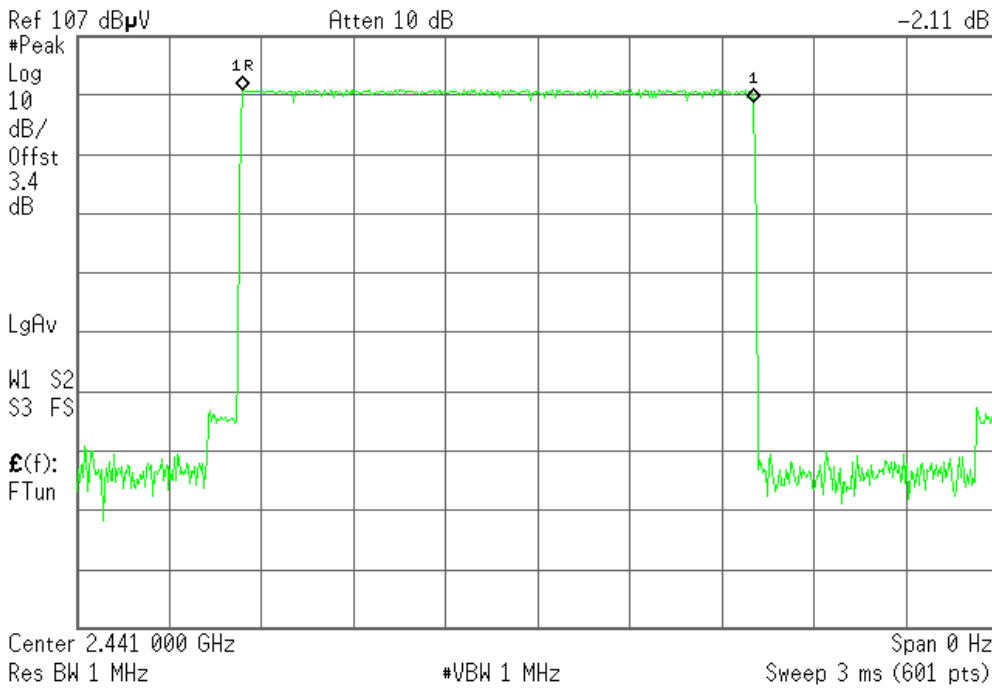




(CH High)

Agilent 13:58:19 26 Jul 2009

R T

Δ Mkr1 1.665 ms
-0.50 dB

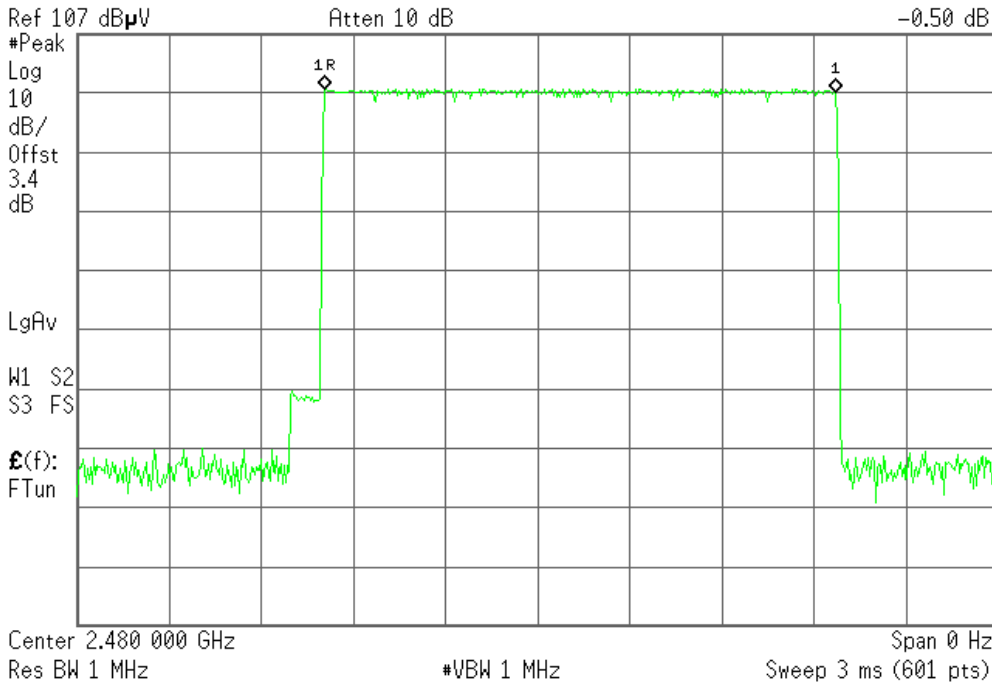


DH 5

(CH Low)

Agilent 14:05:15 26 Jul 2009

R T

Δ Mkr1 2.917 ms
-2.37 dB

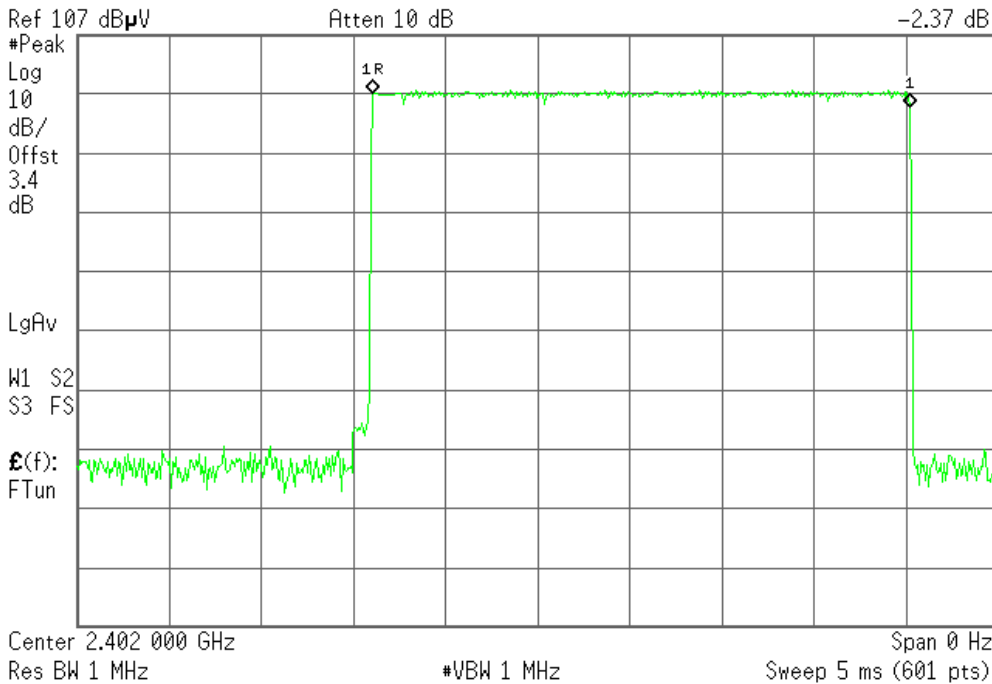




(CH Mid)

Agilent 14:09:08 26 Jul 2009

R T

Δ Mkr1 2.867 ms
1.43 dB

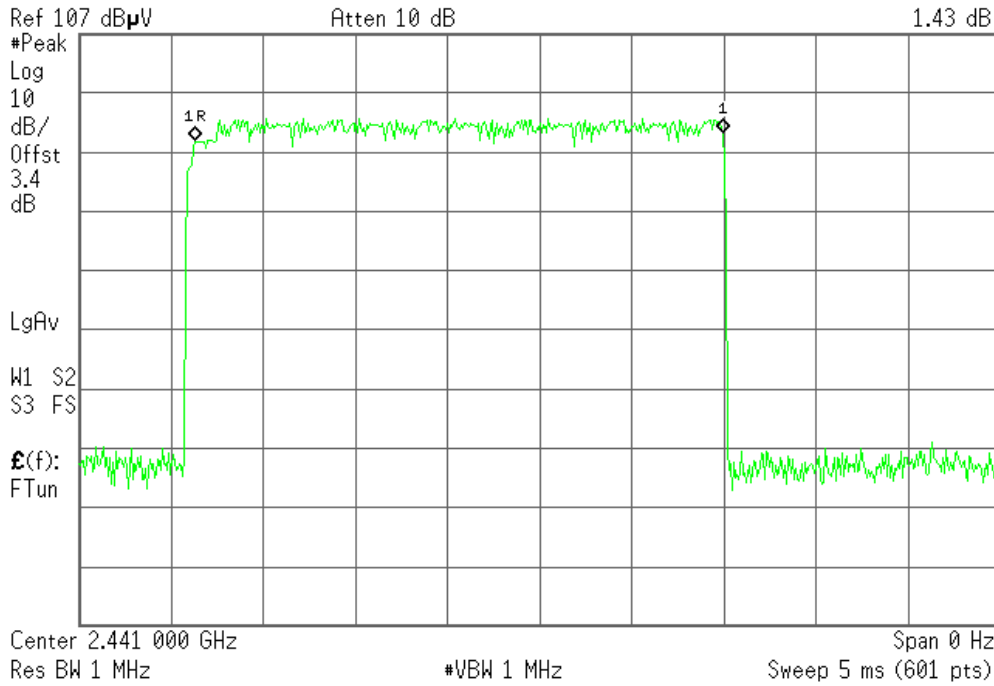


(CH High)

Agilent 14:11:36 26 Jul 2009

R T

Δ Mkr1 2.875 ms
-3.94 dB

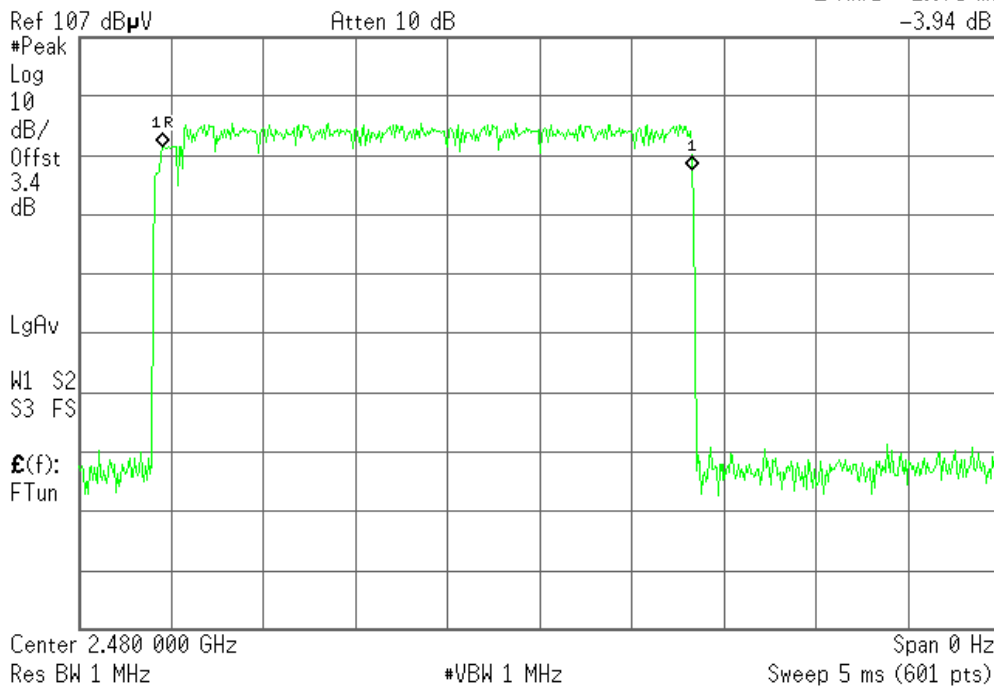



7.8 SPURIOUS EMISSIONS

7.7 Conducted Measurement

LIMIT


In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)).

MEASUREMENT EQUIPMENT USED

Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due
Spectrum Analyzer	Agilent	E4446A	US44300399	02/24/2010

Remark: Each piece of equipment is scheduled for calibration once a year.

Test Configuration



TEST PROCEDURE

Conducted RF measurements of the transmitter output were made to confirm that the EUT antenna port conducted emissions meet the specified limit and to identify any spurious signals that require further investigation or measurements on the radiated emissions site.

The transmitter output is connected to the spectrum analyzer. The resolution bandwidth is set to 100 KHz. The video bandwidth is set to 100 KHz.

Measurements are made over the 30MHz to 26GHz range with the transmitter set to the lowest, middle, and highest channels.

TEST RESULTS

No non-compliance noted



Test Plot


GFSK

CH Low

30MHz – 2.9GHz

Agilent 13:14:49 26 Jul 2009


R T

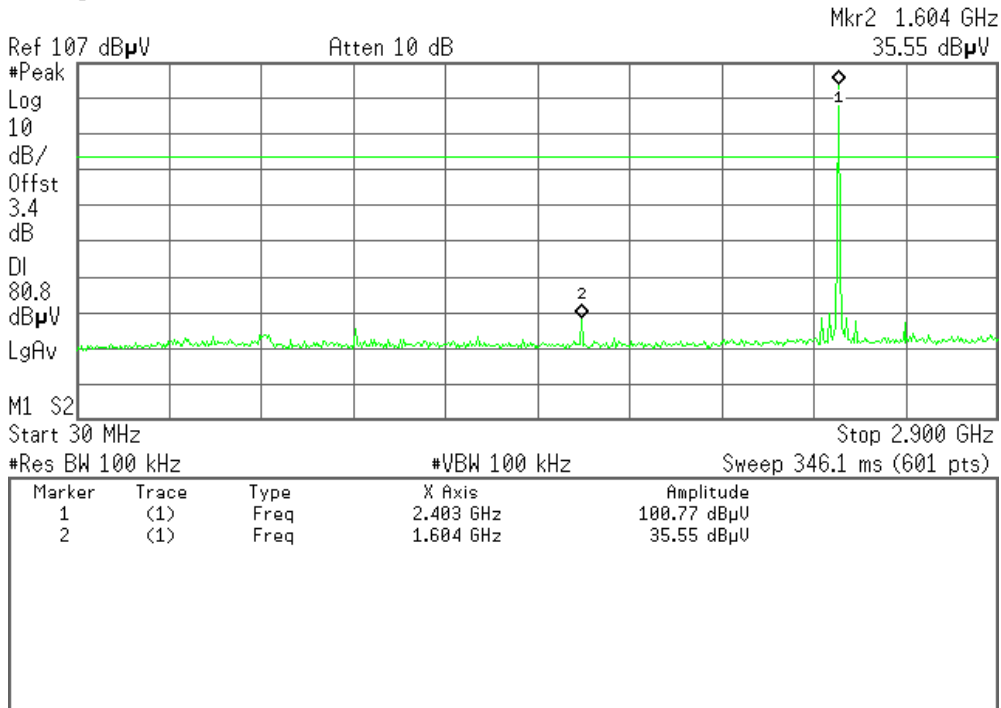

2.9GHz – 26.5GHz

Agilent 13:15:53 26 Jul 2009

R T

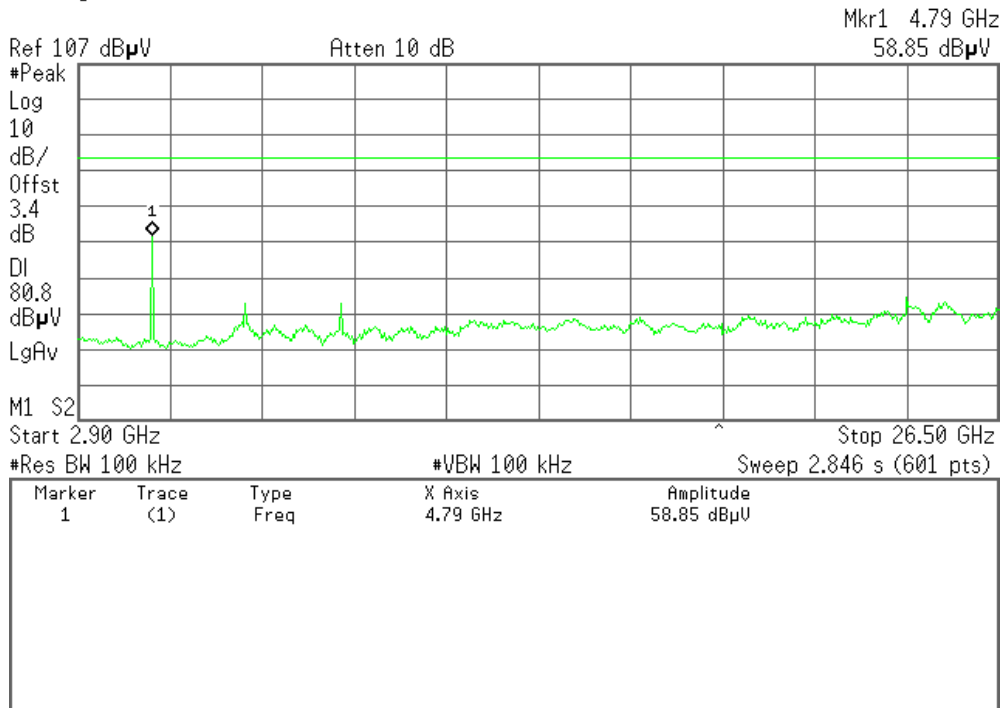




CH Mid

30MHz – 2.9GHz

Agilent 13:17:57 26 Jul 2009


R T

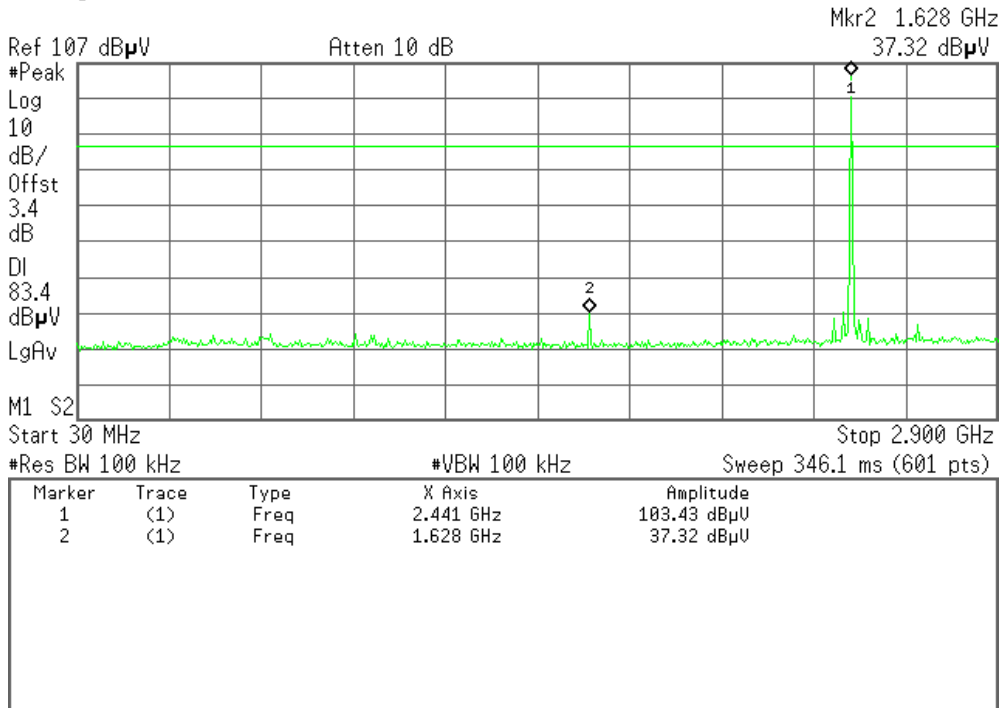

2.9GHz – 26.5GHz

Agilent 13:18:50 26 Jul 2009

R T

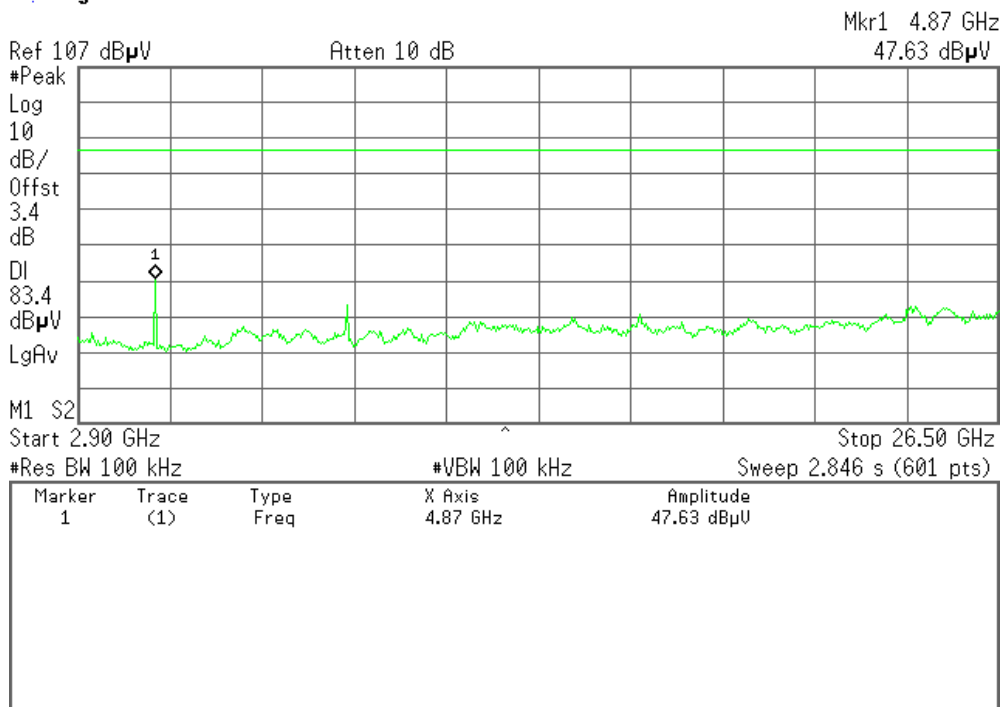




CH High

30MHz – 2.9GHz

Agilent 13:07:08 26 Jul 2009


R T

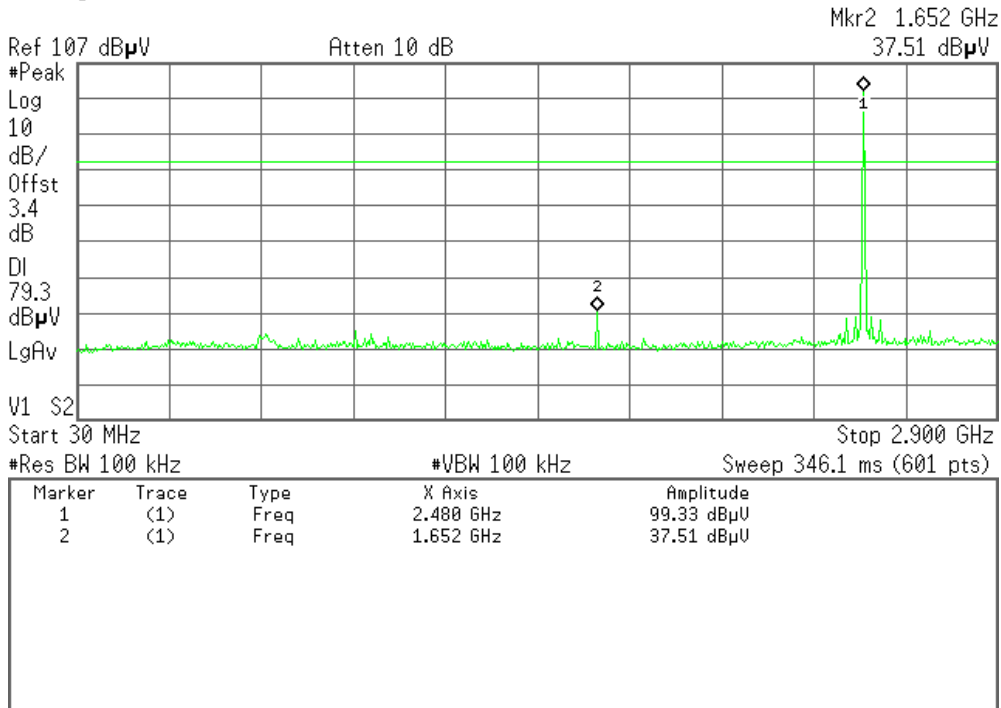

2.9GHz – 26.5GHz

Agilent 13:08:44 26 Jul 2009

R T

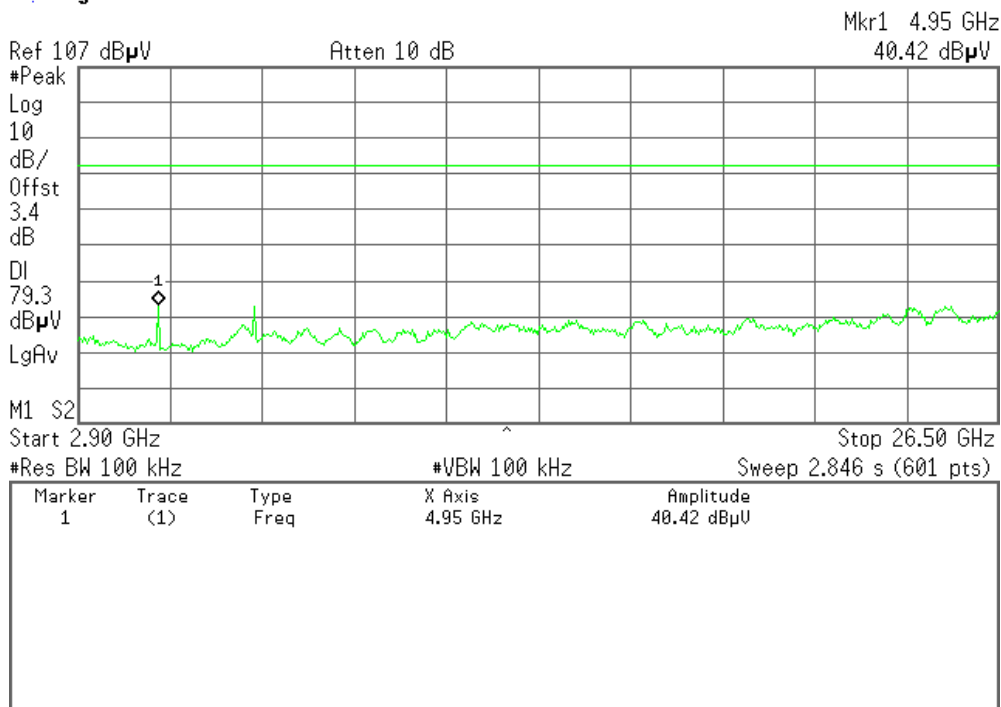




8DPSK

CH Low

30MHz – 2.9GHz

Agilent 14:47:45 26 Jul 2009


R T

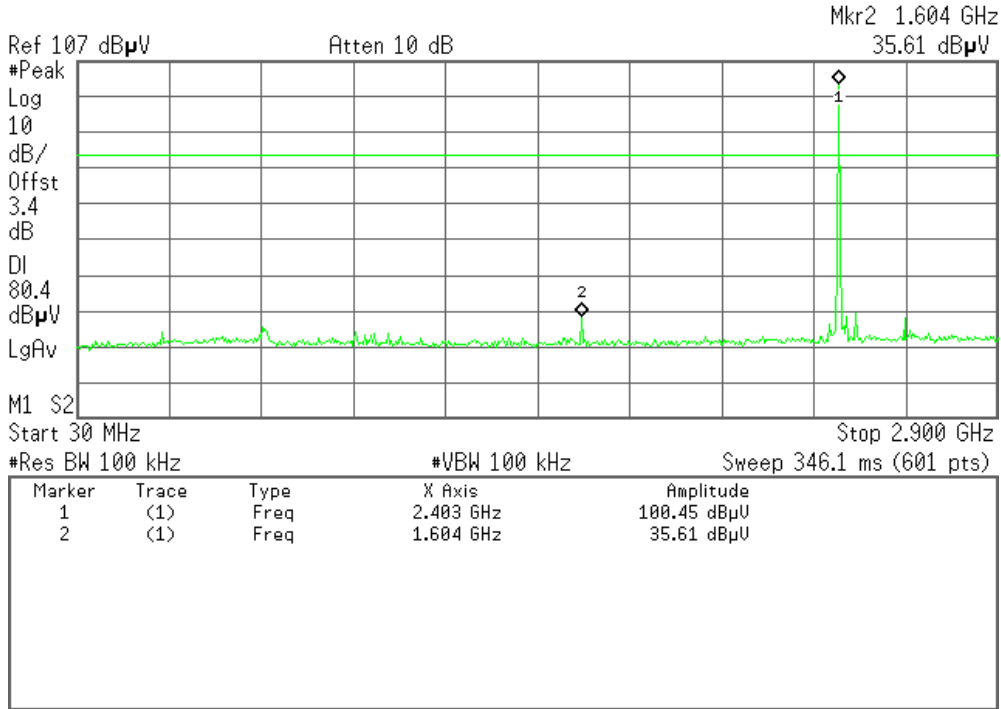

2.9GHz – 26.5GHz

Agilent 14:49:40 26 Jul 2009

R T

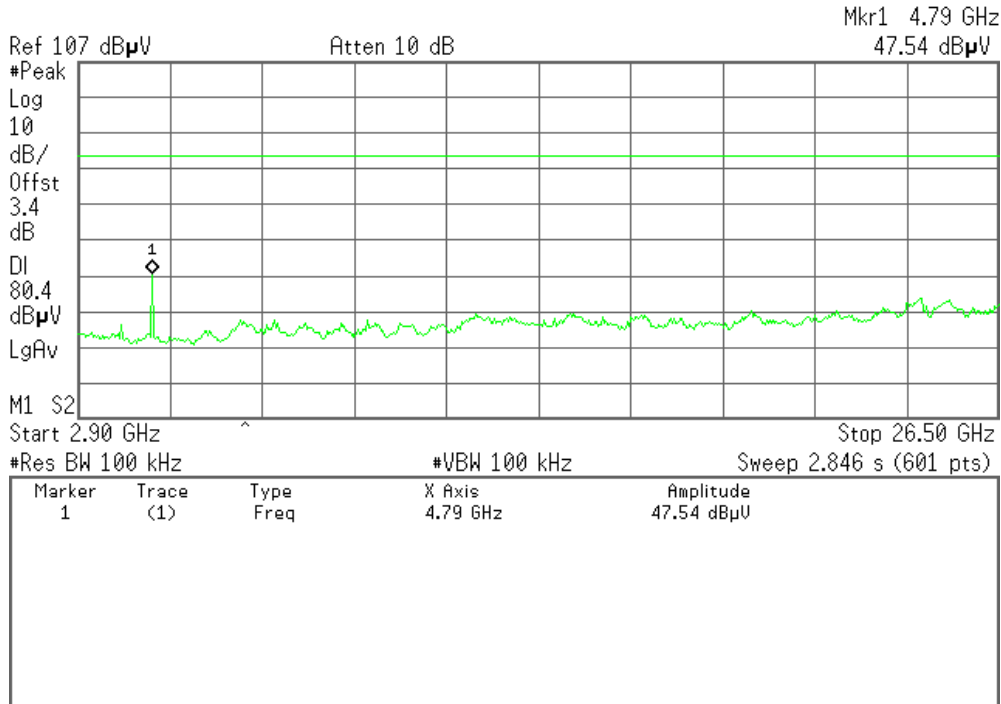




CH Mid

30MHz – 2.9GHz

Agilent 14:43:21 26 Jul 2009


R T

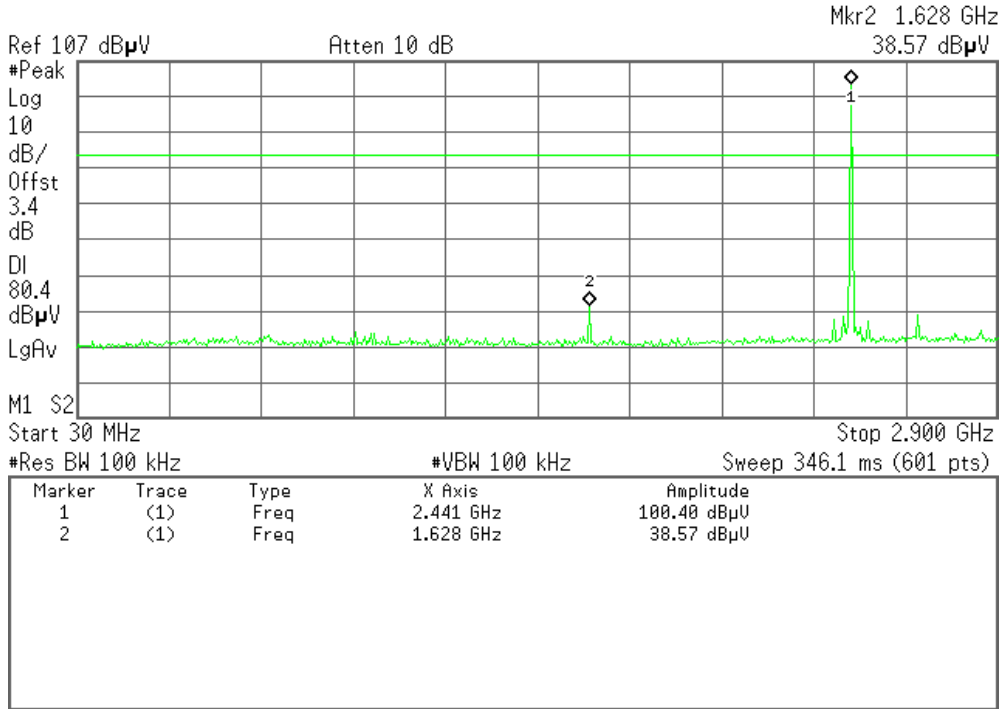

2.9GHz – 26.5GHz

Agilent 14:45:54 26 Jul 2009

R L

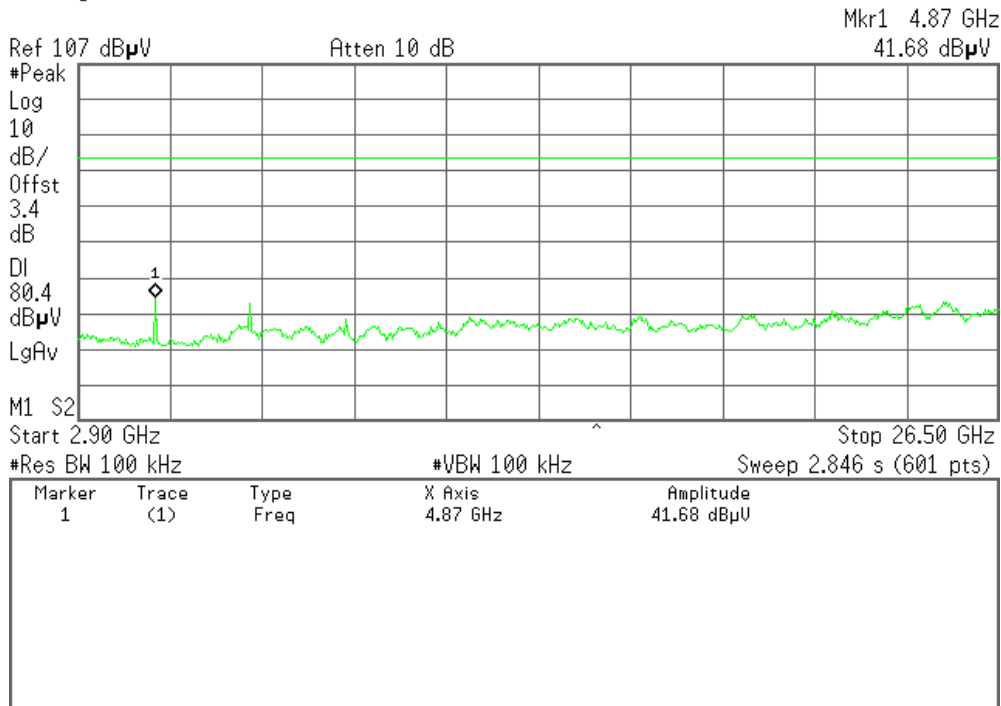




CH High

30MHz – 2.9GHz

Agilent 14:34:13 26 Jul 2009


R T

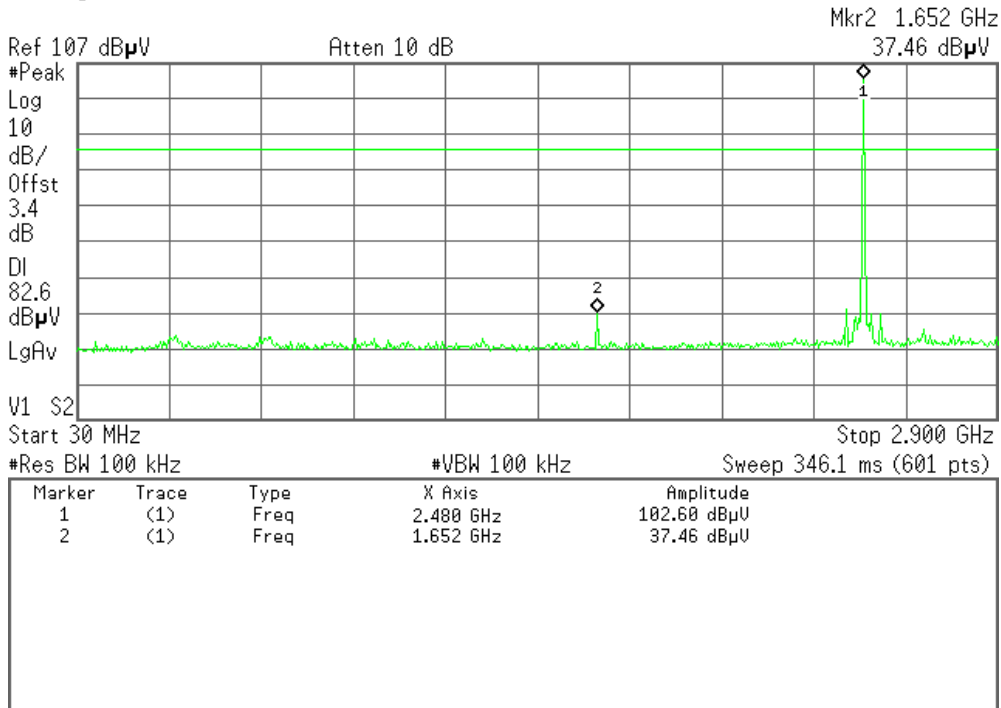

2.9GHz – 26.5GHz

Agilent 14:35:33 26 Jul 2009

R T

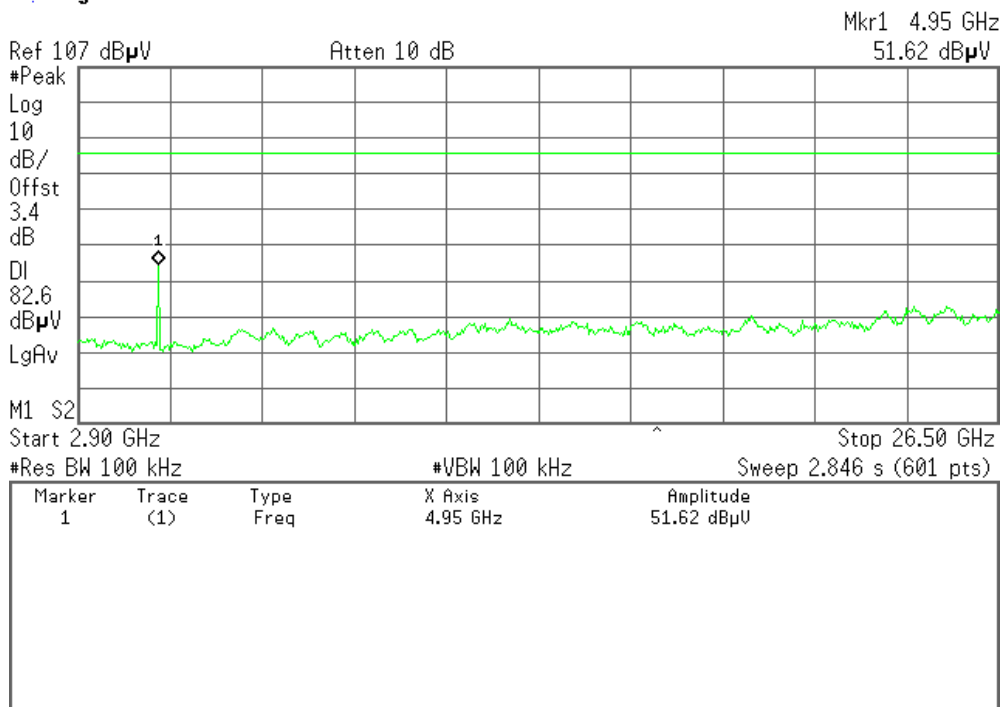



7.7.2 Radiated Emissions

LIMIT

1. Except as provided elsewhere in this Subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field Strength (mV/m)	Measurement Distance (m)
30-88	100*	3
88-216	150*	3
216-960	200*	3
Above 960	500	3

Note: Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this Part, e.g., Sections 15.231 and 15.241.

2. In the above emission table, the tighter limit applies at the band edges.

Frequency (Hz)	Field Strength (μ V/m at 3-meter)	Field Strength (dB μ V/m at 3-meter)
30-88	100	40
88-216	150	43.5
216-960	200	46
Above 960	500	54


MEASUREMENT EQUIPMENT USED

EQUIPMENT TYPE	MFR	MODEL NUMBER	SERIAL NUMBER	CAL. DUE
ESCI EMI TEST RECEIVE.ESCI	ROHDE&SCHWARZ	1166.5950 03	100783	03/20/2010
Spectrum Analyzer	Agilent	E4446A	US44300399	03/01/2010
Low Noise Amplifier	MITEQ	AM-1604-3000	1123808	02/06/2010
Turn Table	EMCO	2081-1.21	N/A	N.C.R
Controller	CT	N/A	N/A	N.C.R
High Noise Amplifier	Agilent	8449B	3008A01838	05/29/2010
Site NSA	C&C	N/A	N/A	N.C.R
BILOG ANTENNA	SCHAFFNER	CBL6143	5082	06/09/2010
Horn Antenna	SCHAFFNER	BBHA9120D	1201	03/19/2010
Signal Generator	Anritsu	MG3694A	#050125	03/01/2010


Remark: Each piece of equipment is scheduled for calibration once a year.

Test Configuration

Below 1 GHz

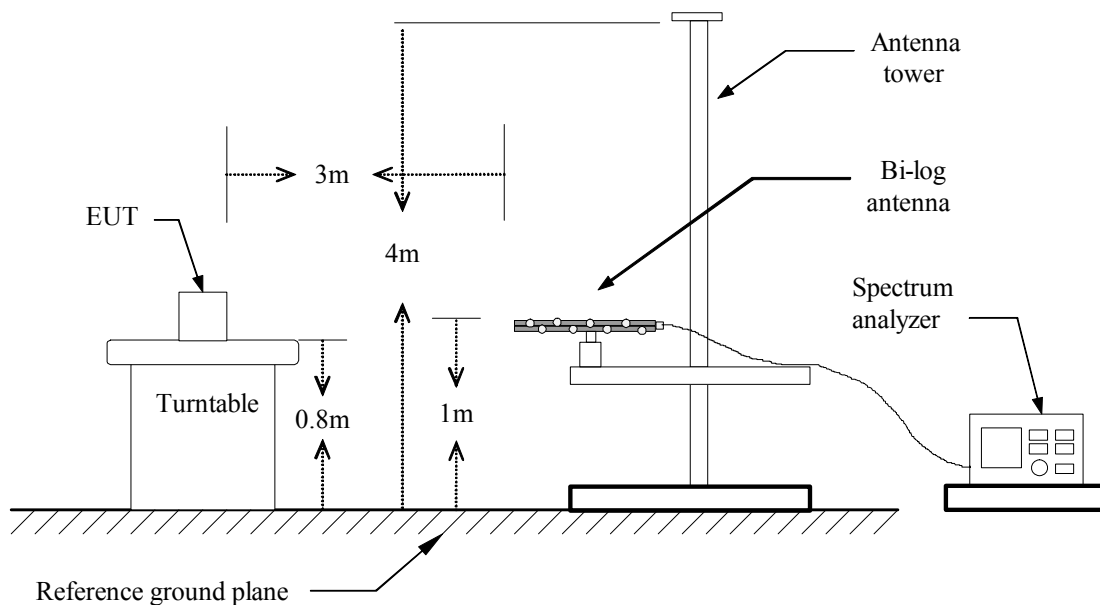

Above 1 GHz

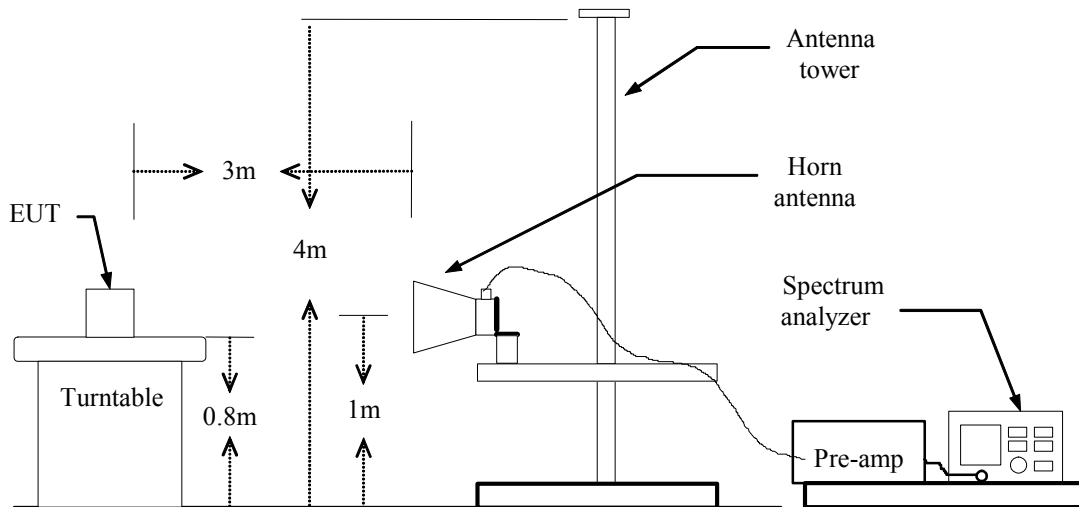

TEST PROCEDURE

1. The EUT is placed on a turntable, which is 0.8m above ground plane.
2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
3. EUT is set 3m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emissions.
4. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
5. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
6. Repeat above procedures until the measurements for all frequencies are complete.



TEST RESULTS

Below 1 GHz

Operation Mode: Normal

Test Date: July 27, 2009

Temperature: 25°C

Tested by: Firetree

Humidity: 60 % RH

Polarity: Ver. / Hor.

Freq. (MHz)	Ant.Pol. H/V	Detector Mode (PK/Q.P)	Reading (dBuV)	Factor (dB)	Actual FS (dBuV/m)	Limits 3m (dBuV/m)	Safe Margin (dBuV/m)
33.600	V	Peak	35.47	-18.39	17.08	40.00	-22.92
68.250	V	Peak	37.82	-23.64	14.18	40.00	-25.82
97.500	V	Peak	38.51	-24.64	13.87	43.50	-29.63
114.200	V	Peak	39.59	-23.95	15.64	43.50	-27.86
145.200	V	Peak	36.66	-23.00	13.66	43.50	-29.84
707.166	V	Peak	37.17	-11.10	26.07	46.00	-19.93
33.600	H	Peak	39.07	-18.39	20.68	40.00	-19.32
61.500	H	Peak	38.07	-23.21	14.86	40.00	-25.14
99.930	H	Peak	39.66	-24.71	14.95	43.50	-28.55
139.350	H	Peak	40.65	-23.09	17.56	43.50	-25.94
209.550	H	Peak	37.46	-20.91	16.55	43.50	-26.95
252.300	H	Peak	40.21	-19.70	20.51	46.00	-25.49

****Remark:** No emission found between lowest internal used/generated frequency to 30 MHz.

Notes:

1. Measuring frequencies from 9kHz to the 1GHz.
2. Radiated emissions measured in frequency range from 30MHz to 1GHz were made with an instrument using Peak/Quasi-peak detector mode.
3. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
4. The IF bandwidth of SPA between 30MHz to 1GHz was 100kHz.



Above 1 GHz

GFSK

Operation Mode: TX(CH Low)

Test Date: July 27, 2009

Temperature: 25°C

Tested by: Firetree

Humidity: 60 % RH

Polarity: Ver. / Hor.

Freq. (MHz)	Ant. Pol H/V	Peak Reading (dBuV)	AV Reading (dBuV)	Ant. / CL CF (dB)	Actual Fs		Peak Limit (dBuV/m)	AV Limit (dBuV/m)	Margin (dB)	Remark
					Peak (dBuV/m)	AV (dBuV/m)				
1066.66	V	57.27	---	-11.80	45.47	---	74.00	54.00	-8.53	Peak
1200.00	V	53.75	---	-11.07	42.68	---	74.00	54.00	-11.32	Peak
1600.00	V	52.09	---	-8.63	43.46	---	74.00	54.00	-10.54	Peak
4800.00	V	52.99	45.72	2.64	55.63	48.36	74.00	54.00	-5.64	AVG.
N/A										
1153.33	H	51.82	---	-11.33	40.49	---	74.00	54.00	-13.51	Peak
1200.00	H	60.67	---	-11.07	49.60	---	74.00	54.00	-4.40	Peak
1906.66	H	47.19	---	-6.20	40.99	---	74.00	54.00	-13.01	Peak
4800.00	H	49.28	---	2.64	51.92	---	74.00	54.00	-2.08	Peak
N/A										

Notes:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Spectrum setting:
 - a. Peak Setting 1GHz - 26GHz, RBW = 1MHz, VBW = 1MHz, Sweep time = 200 ms.
 - b. AV Setting 1GHz - 26GHz, RBW = 1MHz, VBW = 10Hz, Sweep time = 200 ms.

**Operation Mode:** TX(CH Mid)**Test Date:** July 27, 2009**Temperature:** 25°C**Tested by:** Firetree**Humidity:** 60 % RH**Polarity:** Ver. / Hor.

Freq. (MHz)	Ant. Pol H/V	Peak Reading (dBuV)	AV Reading (dBuV)	Ant. / CL CF (dB)	Actual Fs		Peak Limit (dBuV/m)	AV Limit (dBuV/m)	Margin (dB)	Remark
					Peak (dBuV/m)	AV (dBuV/m)				
1066.66	V	56.86	---	-11.80	45.06	---	74.00	54.00	-8.94	Peak
1600.00	V	52.43	---	-8.63	43.80	---	74.00	54.00	-10.20	Peak
1716.66	V	53.23	---	-7.70	45.53	---	74.00	54.00	-8.47	Peak
4883.33	V	57.75	48.24	2.78	60.53	51.02	74.00	54.00	-2.98	AVG.
N/A										
1150.00	H	51.48	---	-11.35	40.13	---	74.00	54.00	-13.87	Peak
1833.33	H	48.90	---	-6.78	42.12	---	74.00	54.00	-11.88	Peak
2173.33	H	48.49	---	-4.77	43.72	---	74.00	54.00	-10.28	Peak
4883.33	H	56.50	48.64	2.78	59.28	51.42	74.00	54.00	-2.58	AVG.
N/A										

Notes:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Spectrum setting:
 - a. Peak Setting 1GHz - 26GHz, RBW = 1MHz, VBW = 1MHz, Sweep time = 200 ms.
 - b. AV Setting 1GHz - 26GHz, RBW = 1MHz, VBW = 10Hz, Sweep time = 200 ms.



Operation Mode: TX(CH High)

Test Date: July 27, 2009

Temperature: 25°C

Tested by: Firetree

Humidity: 60 % RH

Polarity: Ver. / Hor.

Freq. (MHz)	Ant. Pol H/V	Peak Reading (dBuV)	AV Reading (dBuV)	Ant. / CL CF (dB)	Actual Fs		Peak Limit (dBuV/m)	AV Limit (dBuV/m)	Margin (dB)	Remark
					Peak (dBuV/m)	AV (dBuV/m)				
1600.00	V	60.43	---	-8.63	51.80	---	74.00	54.00	-2.20	Peak
1796.66	V	56.73	---	-7.07	49.66	---	74.00	54.00	-4.34	Peak
2000.00	V	49.65	---	-5.46	44.19	---	74.00	54.00	-9.81	Peak
4958.33	V	54.24	47.05	2.91	57.15	49.96	74.00	54.00	-4.04	AVG.
N/A										
1440.00	H	49.27	---	-9.75	39.52	---	74.00	54.00	-14.48	Peak
1820.00	H	48.33	---	-6.89	41.44	---	74.00	54.00	-12.56	Peak
1853.33	H	49.82	---	-6.62	43.20	---	74.00	54.00	-10.80	Peak
4958.33	H	53.54	46.36	2.91	56.45	49.27	74.00	54.00	-4.73	AVG.
N/A										

Notes:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Spectrum setting:
 - a. Peak Setting 1GHz - 26GHz, RBW = 1MHz, VBW = 1MHz, Sweep time = 200 ms.
 - b. AV Setting 1GHz - 26GHz, RBW = 1MHz, VBW = 10Hz, Sweep time = 200 ms.



8DPSK

Operation Mode: TX(CH Low)

Test Date: July 27, 2009

Temperature: 25°C

Tested by: Firetree

Humidity: 60 % RH

Polarity: Ver. / Hor.

Freq. (MHz)	Ant. Pol H/V	Peak Reading (dBuV)	AV Reading (dBuV)	Ant. / CL CF (dB)	Actual Fs		Peak Limit (dBuV/m)	AV Limit (dBuV/m)	Margin (dB)	Remark
					Peak (dBuV/m)	AV (dBuV/m)				
1850.00	V	47.96	---	-6.65	41.31	---	74.00	54.00	-12.69	Peak
2040.00	V	47.04	---	-5.30	41.74	---	74.00	54.00	-12.26	Peak
2173.33	V	48.01	---	-4.77	43.24	---	74.00	54.00	-10.76	Peak
4800.00	V	50.63	43.56	2.64	53.27	46.20	74.00	54.00	-7.80	AVG.
N/A										
1063.33	H	55.76	---	-11.82	43.94	---	74.00	54.00	-10.06	Peak
1200.00	H	53.06	---	-8.65	44.41	---	74.00	54.00	-9.59	Peak
1866.66	H	50.18	---	-6.52	43.66	---	74.00	54.00	-10.34	Peak
4800.00	H	50.27	42.60	2.64	52.91	45.24	74.00	54.00	-8.76	AVG.
N/A										

Notes:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Spectrum setting:
 - a. Peak Setting 1GHz - 26GHz, RBW = 1MHz, VBW = 1MHz, Sweep time = 200 ms.
 - b. AV Setting 1GHz - 26GHz, RBW = 1MHz, VBW = 10Hz, Sweep time = 200 ms.

**Operation Mode:** TX(CH Mid)**Test Date:** July 27, 2009**Temperature:** 25°C**Tested by:** Firetree**Humidity:** 60 % RH**Polarity:** Ver. / Hor.

Freq. (MHz)	Ant. Pol H/V	Peak Reading (dBuV)	AV Reading (dBuV)	Ant. / CL CF (dB)	Actual Fs		Peak Limit (dBuV/m)	AV Limit (dBuV/m)	Margin (dB)	Remark
					Peak (dBuV/m)	AV (dBuV/m)				
1066.66	V	54.94	---	-11.80	43.14	---	74.00	54.00	-10.86	Peak
2040.00	V	48.16	---	-5.30	42.86	---	74.00	54.00	-11.14	Peak
2170.00	V	48.68	---	-4.79	43.89	---	74.00	54.00	-10.11	Peak
4883.33	V	54.65	46.49	2.78	57.43	49.27	74.00	54.00	-4.73	AVG.
N/A										
1626.66	H	49.33	---	-8.42	40.91	---	74.00	54.00	-13.09	Peak
1900.00	H	47.99	---	-6.25	41.74	---	74.00	54.00	-12.26	Peak
2170.00	H	47.49	---	-4.79	42.70	---	74.00	54.00	-11.30	Peak
4883.33	H	52.22	45.64	2.78	55.00	48.42	74.00	54.00	-5.58	AVG.
N/A										

Notes:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Spectrum setting:
 - a. Peak Setting 1GHz - 26GHz, RBW = 1MHz, VBW = 1MHz, Sweep time = 200 ms.
 - b. AV Setting 1GHz - 26GHz, RBW = 1MHz, VBW = 10Hz, Sweep time = 200 ms.



Operation Mode: TX(CH High)

Test Date: July 27, 2009

Temperature: 25°C

Tested by: Firetree

Humidity: 60 % RH

Polarity: Ver. / Hor.

Freq. (MHz)	Ant. Pol H/V	Peak Reading (dBuV)	AV Reading (dBuV)	Ant. / CL CF (dB)	Actual Fs		Peak Limit (dBuV/m)	AV Limit (dBuV/m)	Margin (dB)	Remark
					Peak (dBuV/m)	AV (dBuV/m)				
1063.33	V	54.30	---	-11.82	42.48	---	74.00	54.00	-11.52	Peak
1200.00	V	54.37	---	-11.07	43.30	---	74.00	54.00	-10.70	Peak
1596.66	V	54.14	---	-8.65	45.49	---	74.00	54.00	-8.51	Peak
4958.33	V	50.34	43.36	2.91	53.25	46.27	74.00	54.00	-7.73	AVG.
N/A										
1100.00	H	52.64	---	-11.62	41.02	---	74.00	54.00	-12.98	Peak
1973.33	H	47.27	---	-5.67	41.60	---	74.00	54.00	-12.40	Peak
2210.00	H	47.72	---	-4.63	43.09	---	74.00	54.00	-10.91	Peak
4958.33	H	48.08	---	2.91	50.99	---	74.00	54.00	-3.01	Peak
N/A										

Notes:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Spectrum setting:
 - a. Peak Setting 1GHz - 26GHz, RBW = 1MHz, VBW = 1MHz, Sweep time = 200 ms.
 - b. AV Setting 1GHz - 26GHz, RBW = 1MHz, VBW = 10Hz, Sweep time = 200 ms.



7.9 POWERLINE CONDUCTED EMISSIONS

LIMIT

For an intentional radiator which is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed 250 microvolts (The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz). The limits at specific frequency range is listed as follows:

Frequency Range (MHz)	Limits (dB μ V)	
	Quasi-peak	Average
0.15 to 0.50	66 to 56	56 to 46
0.50 to 5	56	46
5 to 30	60	50


Compliance with this provision shall be based on the measurement of the radio frequency voltage between each power line (LINE and NEUTRAL) and ground at the power terminals.

MEASUREMENT EQUIPMENT USED

Conducted Emission Test Site					
EQUIPMENT TYPE	MFR	MODEL NUMBER	SERIAL NUMBER	LAST CAL.	CAL. DUE
ESCI EMI TEST RECEIVE.ESCI	ROHDE&SCHWARZ	1166.5950 03	100145	03/20/2009	03/20/2010
LISN	FCC	FCC-LISN-50-50-2-M	01068	03/01/2009	03/01/2010
LISN	EMCO	3825/2	8901-1459	03/01/2009	03/01/2010
CDN	FCC	FCC-TILISN-T4	20182	03/01/2009	03/01/2010
CDN	FCC	FCC-TLISN-T8-02	20183	03/01/2009	03/01/2010
CDN	FCC	FCC-TLISN-T4-02	20382	03/01/2009	03/01/2010
CDN	FCC	FCC-TLISN-T4-02	20383	03/01/2009	03/01/2010
CDN	FCC	FCC-801-T8-RJ45	04030	03/01/2009	03/01/2010
Current Probe	STODDART AIRCRAFT	91550-1	345-73	03/01/2009	03/01/2010

Remark: Each piece of equipment is scheduled for calibration once a year.

Test Configuration

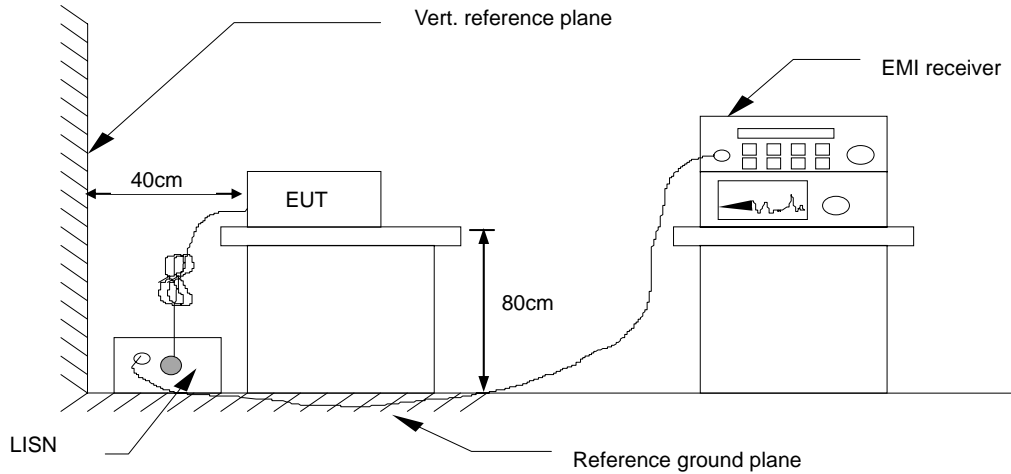

See test photographs attached in Appendix 1 for the actual connections between EUT and support equipment.

TEST PROCEDURE

1. The EUT was placed on a table, which is 0.8m above ground plane.
2. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
3. Repeat above procedures until all frequency measured were complete.

TEST RESULTS

The initial step in collecting conducted data is a spectrum analyzer peak scan of the measurement range. Significant peaks are then marked as shown on the following data page, and these signals are then quasi-peaked.

**Test Data**

Model No.	RF-QX3	Test Mode	Charge with the adapter
Environmental Conditions	25°C,60% RH, 991 hPa	RBW,VBW	9 KHz
Tested by	Firetree		

(The chart below shows the highest readings taken from the final data.)

FREQ MHz	PEAK RAW dBuV	Q.P. RAW dBuV	AVG RAW dBuV	Q.P. Limit dBuV	AVG Limit dBuV	Q.P. Margin dB	AVG Margin dB	NOTE
0.168	10.02	---	---	65.47	55.47	---	-45.45	L1
0.227	47.36	44.32	32.99	63.78	53.78	-19.46	-20.79	L1
0.342	48.71	43.56	37.20	60.49	50.49	-16.93	-13.29	L1
0.795	41.95	34.15	26.41	56.00	46.00	-21.85	-19.59	L1
1.303	40.96	31.86	24.00	56.00	46.00	-24.14	-22.00	L1
2.104	38.98	28.62	21.04	56.00	46.00	-27.38	-24.96	L1
0.172	54.03	51.80	40.37	65.36	55.36	-13.56	-14.99	L2
0.224	51.11	48.98	40.08	63.88	53.88	-14.90	-13.80	L2
0.287	47.58	45.67	37.59	62.08	52.08	-16.41	-14.49	L2
0.342	51.43	48.47	43.33	60.49	50.49	-12.02	-7.16	L2
1.202	43.49	35.66	27.77	56.00	46.00	-20.34	-18.23	L2
1.658	41.66	34.76	26.97	56.00	46.00	-21.24	-19.03	L2

Remark:

1. The measuring frequencies range between 0.15 MHz and 30 MHz.
2. The emissions measured in the frequency range between 0.15 MHz and 30MHz were made with an instrument using Quasi-peak detector and Average detector.
3. “---” denotes the emission level was or more than 2dB below the Average limit, and no re-check was made.
4. The IF bandwidth of SPA between 0.15MHz and 30MHz was 10KHz. The IF bandwidth of Test Receiver between 0.15MHz and 30MHz was 9kHz.
5. L1 = Line One (Live Line) / L2 = Line Two (Neutral Line)

Note:

Freq. = Emission frequency in MHz

RAW dBuV = Uncorrected Analyzer/Received Reading +INSERTION LOSS of LISN+CABLE LOSS+pulse limiter loss

Q.P. Limit dBuV = Limit stated in standard

AVG Limit dBuV = Limit stated in standard

Q.P. Margin dB = Q.P. RAW (dBuV) – Q.P. Limit (dBuV)

AVG Margin dB = AVG RAW (dBuV) – AVG Limit (dBuV)

Note = Current carrying line of reading

Q.P.: =Quasi-Peak



8. ANNEX DECLARATION FOR BLUETOOTH DEVICE ACC to Part 15.247

1 Output power and channel separation of a Bluetooth device in the different operating modes:

The different operating modes (data-mode, acquisition-mode) of a Bluetooth device has no influence on the output power and the channel spacing. There is only one transmitter which is driven by identical input parameters concerning these two parameters. Only a different hopping sequence will be used. For this reason the check of these

RF parameters in one op-mode is sufficient.

2 Frequency range of a Bluetooth device:

Hereby we declare that the maximum frequency of this device is: 2402 – 2480 MHz. This is according to the Bluetooth Core Specification (+ critical errata) for devices which will be operated in the USA. This was checked during the Bluetooth Qualification tests (Test Case: TRM/CA/04E). Other frequency ranges (e.g. for Spain, France, Japan) which are allowed according the Core Specification are not supported by this device.

3 Co-ordination of the hopping sequence in data mode to avoid simultaneous occupancy by multiple transmitters:

Bluetooth units which want to communicate with other units must be organised in a structure called piconet. This piconet consist of max. 8 Bluetooth units. One unit is the master the other seven are the slaves. The master co-ordinates frequency occupation in this piconet for all units. As the master hop sequence is derived from its BD address which is unique for each Bluetooth device, additional masters intending to establish new piconets will always use different hop sequences.

4 Example of a hopping sequence in data mode:

Example of a 79 hopping sequence in data mode: 40, 21, 44, 23, 42, 53, 46, 55, 48, 33, 52, 35, 50, 65, 54, 67, 56, 37, 60, 39, 58, 69, 62, 71, 64, 25, 68, 27, 66, 57, 70, 59, 72, 29, 76, 31, 74, 61, 78, 63, 01, 41, 05, 43, 03, 73, 07, 75, 09, 45, 13, 47, 11, 77, 15, 00, 64, 49, 66, 53, 68, 02, 70, 06, 01, 51, 03, 55, 05, 04

5 Equally average use of frequencies in data mode and behaviour for short transmissions:

The generation of the hopping sequence in connection mode depends essentially on two input values:

1. LAP/UAP of the master of the connection
2. Internal master clock

The LAP (lower address part) are the 24 LSB's of the 48 BD_ADDRESS. The BD_ADDRESS is an unambiguous number of every Bluetooth unit. The UAP (upper address part) are the 24 MSB's of the 48 BD_ADDRESS.

The internal clock of a Bluetooth unit is derived from a free running clock which is never adjusted and is never turned off. For synchronisation with other units only offset are used. It has no relation to the time of the day. Its resolution is at least half the RX/TX slot length of 312.5 μ s. The clock has a cycle of about one day (23h30). In most case it is implemented as 28 bit counter. For the deriving of the hopping sequence the entire LAP (24 bits), 4 LSB's (4 bits) (Input 1) and the 27 MSB's of the clock (Input 2) are used. With this input values different mathematical procedures (permutations, additions, XOR-operations) are performed to generate the sequence. This will be done at the beginning of every new transmission.

Regarding short transmissions the Bluetooth system has the following behaviour: The first connection between the two devices is established, a hopping sequence was generated. For transmitting the wanted data the complete hopping sequence was not used. The connection ended. The second connection will be established. A new hopping sequence is generated. Due to the fact that the Bluetooth clock has a different value, because the period between the two transmission is longer (and it cannot be shorter) than the minimum resolution of the clock (312.5 μ s). The hopping sequence will always differ from the first one.

6 Receiver input bandwidth and behaviour for repeated single or multiple packets:

The input bandwidth of the receiver is 1 MHz. In every connection one Bluetooth device is the master and the other one is the slave. The master determines the hopping sequence (see chapter 5). The slave follows this sequence. Both devices shift between RX and TX time slot according to the clock of the master. Additionally the type of connection (e.g. single or multislot packet) is set up at the beginning of the connection. The master adapts its hopping frequency and its TX/RX timing according to the packet type of the connection. Also the slave of the connection will use these settings. Repeating of a packet has no influence on the hopping sequence. The hopping sequence generated by the master of the connection will be followed in any case. That means, a repeated packet will not be send on the same frequency, it is send on the next frequency of the hopping sequence.



7 Dwell time in data mode

The dwell time of 0.3797s within a 30 second period in data mode is independent from the packet type (packet length). The calculation for a 30 second period is as follows:

Dwell time = time slot length * hop rate / number of hopping channels * 30s

Example for a DH1 packet (with a maximum length of one time slot) Dwell time = $625 \mu\text{s} * 1600 \text{ 1/s} / 79 * 30\text{s} = 0.3797\text{s}$ (in a 30s period)

For multislot packet the hopping is reduced according to the length of the packet.

Example for a DH5 packet (with a maximum length of five time slots) Dwell time = $5 * 625 \mu\text{s} * 1600 * 1/5 * 1/s / 79 * 30\text{s} = 0.3797\text{s}$ (in a 30s period).

This is according to the Bluetooth Core Specification V 1.0B (+ critical errata) for all Bluetooth devices. Therefore all Bluetooth devices comply with the FCC dwell time requirement in data mode. This was checked during the Bluetooth Qualification tests. The Dwell time in hybrid mode is measured and stated in the test report.

8 Channel Separation in hybrid mode

The nominal channel spacing of the Bluetooth system is 1MHz independent of the operating mode. The maximum "initial carrier frequency tolerance" which is allowed for Bluetooth is $f_{\text{center}} = 75 \text{ kHz}$. This was checked during the Bluetooth Qualification tests (Test Case: TRM/CA/07E) for three frequencies (2402, 2441, 2480 MHz). Additionally an example for the channel separation is given in the test report

9 Derivation and examples for a hopping sequence in hybrid mode

For the generation of the inquiry and page hop sequences the same procedures as described for the data mode are used (see chapter 5), but this time with different input vectors:

- For the inquiry hop sequence, a predefined fixed address is always used. This results in the same 32 frequencies used by all devices doing an inquiry but every time with a different start frequency and phase in this sequence.
- For the page hop sequence, the device address of the paged unit is used as input vector. This results in the use of a subset of 32 frequencies which is specific for that initial state of the connection establishment between the two units. A page to different devices would result in a different subset of 32 frequencies.

So it is ensured that also in hybrid mode the frequency use is equally averaged.

Example of a hopping sequence in inquiry mode: 48, 50, 09, 13, 52, 54, 41, 45, 56, 58, 11, 15, 60, 62, 43, 47, 00, 02, 64, 68, 04, 06, 17, 21, 08, 10, 66, 70, 12, 14, 19, 23



Example of a hopping sequence in paging mode:08, 57, 68, 70, 51, 02, 42, 40, 04, 61, 44, 46, 63, 14, 50, 48, 16, 65, 52, 54, 67, 18, 58, 56, 20, 53, 60, 62, 55, 06, 66, 64

10 Receiver input bandwidth and synchronisation in hybrid mode:

The receiver input bandwidth is the same as in the data mode (1 MHz). When two Bluetooth devices establish contact for the first time, one device sends an inquiry access code, the other device is scanning for this inquiry access code. If two devices have been connected previously and want to start a new transmission, a similar procedure takes place. The only difference is, instead of the inquiry access code, a special access code, derived from the BD_ADDRESS of the paged device will be, will be sent by the master of this connection. Due to the fact that both units have been connected before (in the inquiry procedure) the paging unit has timing and frequency information about the page scan of the paged unit. For this reason the time to establish the connection is reduced considerable.

11 Spread rate / data rate of the direct sequence signal

The Spread rate / Data rate in inquiry and paging mode can be defined via the access code. The access code is the only criterion for the system to check if there is a valid transmission or not. If you regard the presence of a valid access code as one bit of information, and compare it with the length of the access code of 68 bits, the Spread rate/ Data rate will be 68/1.

12 Spurious emission in hybrid mode

The dwell time in hybrid mode is shorter than in data mode. For this reason the spurious emissions average level in data mode is worst case. The spurious emissions peak level is the same for both modes.

13 Peak power spectral density measurement

Since the transmitter is only active for some milliseconds on one channel you would get a result with many interruptions if using a sweep time of e.g. 1s as stated in the FCC rules. Therefore a fast sweep in maxhold function is used instead and the EUT is activated several times until the measurement curve has stabilized.