

# TEST REPORT

**Product Name** : B36VM Bluetooth Headphones  
**Model Number** : SM-B36VM.EXv0, M<sub>1</sub>- B36VM M<sub>2</sub>M<sub>3</sub>M<sub>4</sub>M<sub>5</sub>M<sub>6</sub>M<sub>7</sub>M<sub>8</sub>  
M<sub>9</sub>M<sub>10</sub> ( M<sub>1</sub> – M<sub>10</sub>, please refer to model no. table)  
**FCC ID** : EMOB36A

**Prepared for** : SDI Technologies Inc.  
**Address** : 1299, Main Street, Rahway, NJ 07065, U.S.A.

**Prepared by** : EMTEK (DONGGUAN) CO., LTD.  
**Address** : -1&2/F., Building 2, Zone A, Zhongda Marine Biotechnology  
Reserch and Development Base, No.9, Xincheng Avenue,  
Songshanhu High-technology Industrial Development Zone,  
Dongguan, Guangdong, China

TEL: +86-0769-22807078  
FAX: +86-0769-22807079

**Report Number** : ES200117053E  
**Date(s) of Tests** : January 17, 2020 to March 03, 2020  
**Date of issue** : March 03, 2020

**VERIFICATION OF COMPLIANCE**

Applicant:	SDI Technologies Inc 1299, Main Street, Rahway, NJ 07065, U.S.A.
Manufacturer:	eKids, LLC 1299, Main Street, Rahway, NJ 07065, U.S.A.
Factory:	Dongguan CHINA ETECH GROUPS Co.,LTD Building 6,Room 501,Hong Jin Road No.2, Li Zhou Jiao Village,Hongmei Town
Product Description:	B36VM Bluetooth Headphones
Trade Mark:	N/A
Model Number:	SM-B36VM.EXv0, M <sub>1</sub> - B36VM M <sub>2</sub> M <sub>3</sub> M <sub>4</sub> M <sub>5</sub> M <sub>6</sub> M <sub>7</sub> M <sub>8</sub> M <sub>9</sub> M <sub>10</sub> ( M <sub>1</sub> – M <sub>10</sub> , please refer to model no. table)(note: The models are the same except color of appearance and model number, here we prepare SM-B36VM.EXv0 for the all test)

**We hereby certify that:**


The above equipment was tested by EMTEK(SHENZHEN) CO., LTD. The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI C63.10-2013 and the energy emitted by the sample EUT tested as described in this report is in compliance with conducted and radiated emission limits of FCC Rules Part 15.247(2018).

Date of Test : January 17, 2020 to March 03, 2020

Prepared by :   
Loren Luo /Editor


Reviewer :   
Tim Dong /Supervisor

Approved & Authorized Signer :   
Lisa Wang /Manager



## Modified Information

Version	Summary	Revision Date	Report No.
Ver.1.0	Original Report	/	ES200117053E

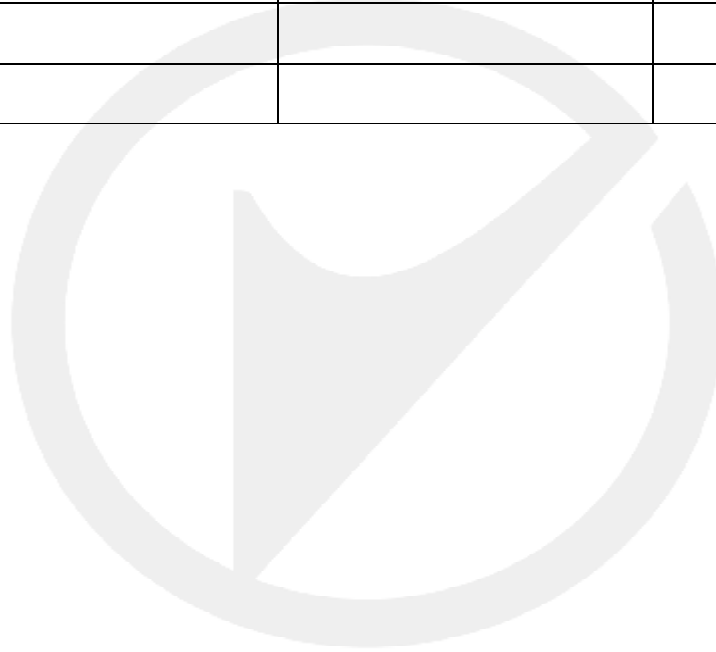

## Table of Contents

<b>1. GENERAL INFORMATION</b> .....	<b>6</b>
1.1 PRODUCT DESCRIPTION.....	6
1.2 TEST METHODOLOGY.....	7
1.3 TEST FACILITY.....	8
<b>2. SYSTEM TEST CONFIGURATION</b> .....	<b>9</b>
2.1 EUT CONFIGURATION.....	9
2.2 EUT EXERCISE.....	9
2.3 TEST PROCEDURE.....	9
2.4 CONFIGURATION OF TESTED SYSTEM.....	10
<b>3. SUMMARY OF TEST RESULTS</b> .....	<b>11</b>
<b>4. DESCRIPTION OF TEST MODES</b> .....	<b>12</b>
<b>5. TEST SYSTEM UNCERTAINTY</b> .....	<b>13</b>
<b>6. CONDUCTED EMISSIONS TEST</b> .....	<b>14</b>
6.1 MEASUREMENT PROCEDURE:.....	14
6.2 TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION).....	14
6.3 MEASUREMENT EQUIPMENT USED:.....	14
6.4 MEASUREMENT RESULT:.....	15
6.5 CONDUCTED MEASUREMENT PHOTOS:.....	18
<b>7. RADIATED EMISSION TEST</b> .....	<b>19</b>
7.1 MEASUREMENT PROCEDURE.....	19
7.2 TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION).....	21
7.3 MEASUREMENT EQUIPMENT USED:.....	22
7.4 RADIATED EMISSION LIMIT.....	23
7.5 MEASUREMENT RESULT.....	24
7.5 RADIATED MEASUREMENT PHOTOS:.....	29
<b>8. CHANNEL SEPARATION TEST</b> .....	<b>30</b>
8.1 MEASUREMENT PROCEDURE.....	30
8.2 TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION).....	30
8.3 MEASUREMENT EQUIPMENT USED:.....	30
8.4 MEASUREMENT RESULTS:.....	30
<b>9. 20DB BANDWIDTH TEST</b> .....	<b>37</b>
9.1 MEASUREMENT PROCEDURE.....	37
9.2 TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION).....	37
9.3 MEASUREMENT EQUIPMENT USED:.....	37
9.4 MEASUREMENT RESULTS:.....	37
<b>10. QUANTITY OF HOPPING CHANNEL TEST</b> .....	<b>44</b>

10.1 MEASUREMENT PROCEDURE .....	44
10.2 TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION) .....	44
10.3 MEASUREMENT EQUIPMENT USED:.....	44
10.4 MEASUREMENT RESULTS:.....	44
<b>11. TIME OF OCCUPANCY (DWELL TIME) TEST.....</b>	<b>45</b>
11.1 TEST DESCRIPTION.....	45
11.2 TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION) .....	45
11.3 MEASUREMENT EQUIPMENT USED:.....	45
11.4 TEST REQUIREMENTS / LIMITS .....	45
11.5 TEST RESULT .....	46
<b>12. MAXIMUM PEAK OUTPUT POWER TEST.....</b>	<b>48</b>
12.1 MEASUREMENT PROCEDURE .....	48
12.2 TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION) .....	48
12.3 MEASUREMENT EQUIPMENT USED:.....	48
12.4 MEASUREMENT RESULTS:.....	49
<b>13. BAND EDGE TEST .....</b>	<b>55</b>
13.1 MEASUREMENT PROCEDURE .....	55
13.2 TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION) .....	56
13.3 MEASUREMENT EQUIPMENT USED:.....	56
13.4 MEASUREMENT RESULTS:.....	57
<b>14. ANTENNA APPLICATION.....</b>	<b>73</b>
14.1 ANTENNA REQUIREMENT .....	73
14.2 RESULT .....	73
<b>15. PHOTOS OF EUT .....</b>	<b>74</b>

## 1. GENERAL INFORMATION

### 1.1 Product Description

Characteristics	Description
Product Name	B36VM Bluetooth Headphones
Model number	SM-B36VM.EXv0, M <sub>1</sub> - B36VM M <sub>2</sub> M <sub>3</sub> M <sub>4</sub> M <sub>5</sub> M <sub>6</sub> M <sub>7</sub> M <sub>8</sub> M <sub>9</sub> M <sub>10</sub> ( M <sub>1</sub> – M <sub>10</sub> , please refer to model no. table)
Power Supply	DC 5V from adapter, DC 3.7V Battery
Kind of Device	Bluetooth Ver.5.0
Modulation	GFSK, $\pi/4$ -DQPSK, 8DPSK
Operating Frequency Range	2402-2480MHz
Number of Channels	79
Transmit Power Max(PK)	1.35dBm(0.001365 W)
Antenna Type	Internal PCB antenna
Antenna Gain	0dBi

## 1.2 Model list

Part of model #	M <sub>1</sub>	M <sub>2</sub>	M <sub>3</sub>	M <sub>4</sub>	M <sub>5</sub>	M <sub>6</sub>	M <sub>7</sub>	M <sub>8</sub>	M <sub>9</sub>	M <sub>10</sub>
Number of digit(s)	2	2	1	1	1 to 2	1	1 to 2	1	2	1
Description	2 digits alphabets by "a" – "Z" for brand	2 digits alphabets combination by "a" – "Z" special character Or blank	"." Or blank	"U" for Europe Or blank	"E" for English content Or "F" for English & French Or "3" for 3 language version Or "11" for Europe version with 11 languages	"X" for no sound chip Or "E" for Sound chip with speech or sound effect Or "M" for sound chip with Music	"0"-"9" for year version Or "V0" – "V9" for year version	"M" for Movie version brand Or blank	"AK" for Walmart exclusive Or "AP" for Apple exclusive Or "KS" for Kohl's exclusive Or "TG" for Target exclusive blank	"i" for inner carton required Or "z" for direct to consumer on-line packaging Or blank

## 1.3 Test Methodology

Both conducted and radiated testing was performed according to the procedures in ANSI C63.10-2013. Radiated testing was performed at an antenna to EUT distance 3 meters.

## 1.4 Test Facility

### Site Description

EMC Lab. : Accredited by CNAS, 2016.10.24  
The certificate is valid until 2022.10.28  
The Laboratory has been assessed and proved to be in compliance with CNAS-CL01:2006 (identical to ISO/IEC 17025:2005)  
The Certificate Registration Number is L2291.

Accredited by TUV Rheinland Shenzhen 2016.5.19  
The Laboratory has been assessed according to the requirements ISO/IEC 17025.

Accredited by FCC, August 03, 2017  
Designation Number: CN1204  
Test Firm Registration Number: 882943

Accredited by Industry Canada, November 24, 2015  
The Certificate Registration Number is 4480A.

Accredited by A2LA, July 31, 2017  
The Certificate Number is 4321.01.

Name of Firm : EMTEK(SHENZHEN) CO., LTD.  
Site Location : Bldg 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, China.



## 2. System Test Configuration

### 2.1 EUT Configuration

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner which intends to maximize its emission characteristics in a continuous normal application.

### 2.2 EUT Exercise

The Transmitter was operated in the normal operating mode. The Tx frequency was fixed which was for the purpose of the measurements.

### 2.3 Test Procedure

#### 2.3.1 Conducted Emissions

The EUT is a placed on as turn table which is 0.8 m above ground plane. According to the requirements in Section 13.1.4.1 of ANSI C63.10-2013. Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30MHz using CISPR Quasi-Peak and average detector mode.

#### 2.3.2 Radiated Emissions

Below 1000MHz, The EUT was placed on a turn table which is 0.8m above ground plane. And above 1000MHz, The EUT was placed on a styrofoam table which is 1.5m above ground plane. The turn table shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3m away from the receiving antenna which varied from 1m to 4m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the max. emission, the relative positions of EUT was fixed in a particular direction according to the requirements in Section 13.1.4.1 of ANSI C63.10-2013.

## 2.4 Configuration of Tested System

**Fig. 2-1 Configuration of Tested System**



**Table 2-1 Equipment Used in Tested System**

Item	Equipment	Trademark	Model No.	FCC ID	Note
1.	B36VM Bluetooth Headphones	N/A	SM-B36VM.EXv0	EMOB36A	<b><i>EUT</i></b>
2	Adapter	N/A	Model:ASSA44A-050230 Input:100-240V 50/60Hz 0.5A Max Output:5V	N/A	<b><i>Support Equipment</i></b>

**Note:**

- (1) Unless otherwise denoted as EUT in 『Remark』 column , device(s) used in tested system is a support equipment.

### 3. Summary of Test Results

FCC Rules	Description Of Test	Result
§15.207	AC Power Conducted Emission	Compliant
§15.247(d), §15.209	Radiated Emission	Compliant
§15.247(a)(1)	Channel Separation test	Compliant
§15.247(a)(1)	20dB Bandwidth	Compliant
§15.247(a)(1)(iii)	Quantity of Hopping Channel	Compliant
§15.247(a)(1)(iii)	Time of Occupancy(Dwell Time)	Compliant
§15.247(b)	Max Peak output Power test	Compliant
§15.247(d)	Band edge test	Compliant
§15.203	Antenna Requirement	Compliant



#### 4. Description of test modes

The EUT has been tested under its typical operating condition and fully-charged battery for EUT tested alone. Pre-defined engineering program for regulatory testing used to control the EUT for staying in continuous transmitting. Only the worst case data were reported.

The EUT has been associated with peripherals pursuant to ANSI C63.10-2013 and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: radiation (9 KHz to the 10th harmonics of the highest fundamental frequency or to 40 GHz, whichever is lower).

The EUT has been tested under TX operating condition. This EUT is a FHSS system, were conducted to determine the final configuration from all possible combinations. We use software control the EUT, Let EUT hopping on and transmit with highest power, all the modes GFSK,  $\pi/4$ -DQPSK, 8DPSK have been tested. 79 Channels are provided by EUT. The 3 channels of lower, medium and higher were chosen for test.


Channel	Frequency(MHz)
1	2402
40	2441
79	2480

## 5. TEST SYSTEM UNCERTAINTY

The following measurement uncertainty levels have been estimated for tests performed on the apparatus:

Parameter	Uncertainty
Radio Frequency	$\pm 1 \times 10^{-5}$
Maximum Peak Output Power Test	$\pm 1.0\text{dB}$
Conducted Emissions Test	$\pm 2.0\text{dB}$
Radiated Emission Test	$\pm 2.0\text{dB}$
Power Density	$\pm 2.0\text{dB}$
Occupied Bandwidth Test	$\pm 1.0\text{dB}$
Band Edge Test	$\pm 3\text{dB}$
All emission, radiated	$\pm 3\text{dB}$
Antenna Port Emission	$\pm 3\text{dB}$
Temperature	$\pm 0.5^\circ\text{C}$
Humidity	$\pm 3\%$

Remark: The coverage Factor ( $k=2$ ), and measurement Uncertainty for a level of Confidence of 95%

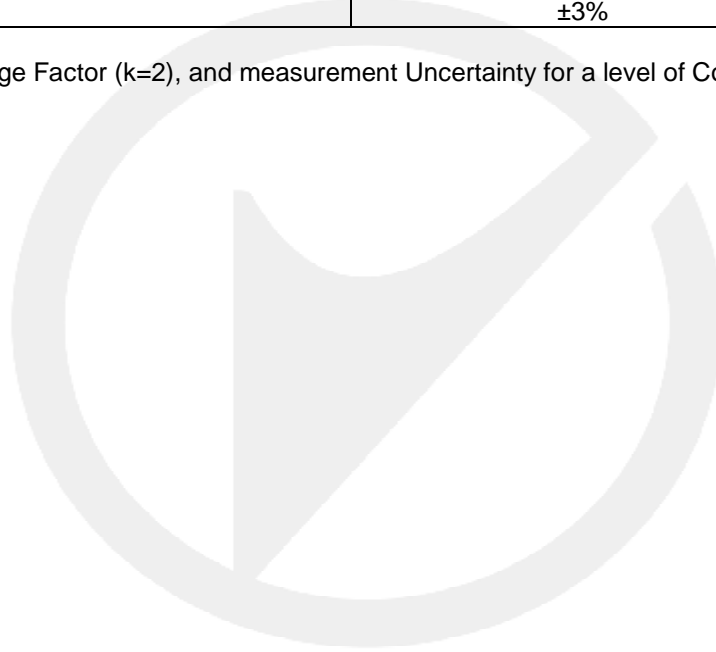


## 6. Conducted Emissions Test

### 6.1 Measurement Procedure:

1. The EUT was placed on a table, which is 0.8m above ground plane.
2. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
3. Repeat above procedures until all frequency measured was complete.

### 6.2 Test SET-UP (Block Diagram of Configuration)

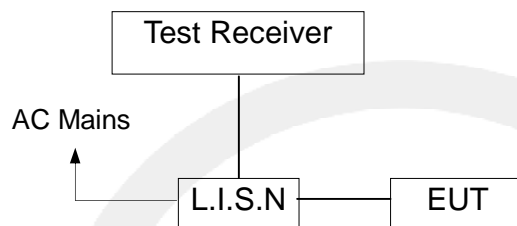

### 6.3 Measurement Equipment Used:

Conducted Emission Test Site						
EQUIPMENT TYPE	MFR	MODEL NUMBER	SERIAL NUMBER	Characteristics	Last Cal.	Due date
Test Receiver	Rohde & Schwarz	ESCS30	100018	9kHz~3GHz	05/23/2019	05/22/2020
L.I.S.N	Rohde & Schwarz	ENV216	100017	9KHz-300MHz	05/23/2019	05/22/2020
RF Switching Unit	CDS	RSU-M2	38401	9KHz-300MHz	05/23/2019	05/22/2020
Coaxial Cable	CDS	79254	46107086	9kHz~3GHz	05/23/2019	05/22/2020

#### 6.4 Measurement Result:


Operation Mode:	TX	Test Date :	February 17, 2020
Frequency Range:	0.15MHz~30MHz	Temperature :	28°C
Test Result:	PASS	Humidity :	65 %
Test By:	Loren		

Pass.

Conducted emission at both 120V & 240V, and emission at 120V represents the worst case. All the modulation modes were tested the data of the worst mode (GFSK TX 2402MHz) are recorded in the following pages and the others modulation methods do not exceed the limits.

Please refer to the following data.



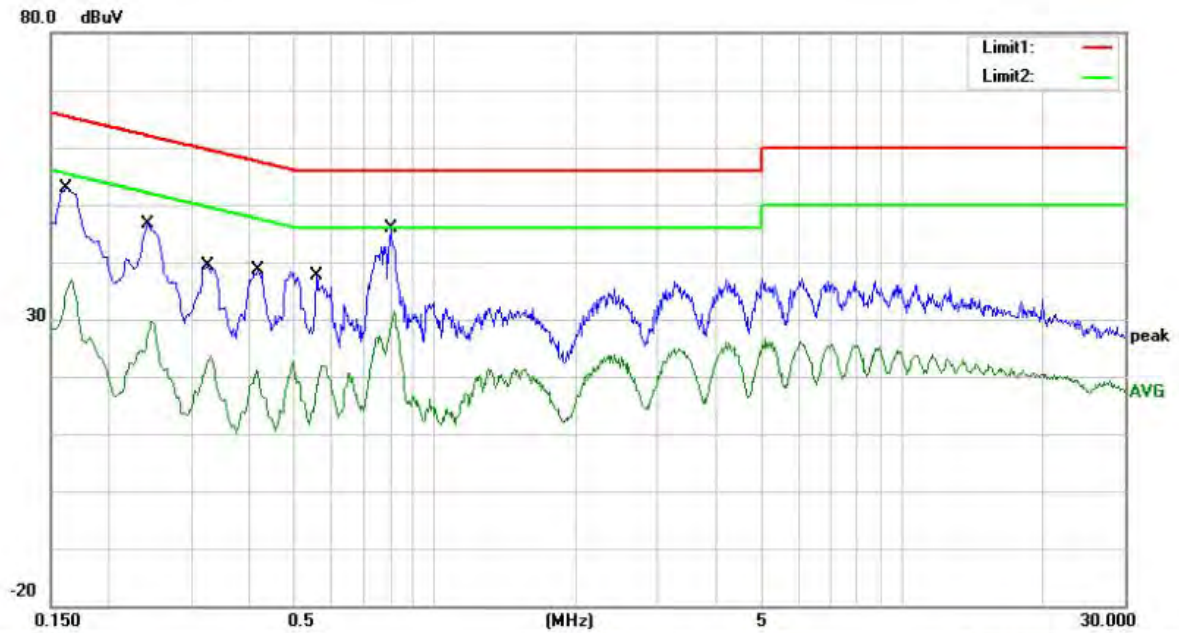


Site site #1 Phase: **L1** Temperature: 25  
 Limit: (CE)FCC PART 15 C\_QP Power: AC 120V/60Hz Humidity: 55 %  
 Mode: BT TX2402  
 Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector	Comment
1		0.1620	42.91	10.02	52.93	65.36	-12.43	QP	
2		0.1620	26.93	10.02	36.95	55.36	-18.41	AVG	
3		0.2420	36.48	10.05	46.53	62.03	-15.50	QP	
4		0.2420	19.68	10.05	29.73	52.03	-22.30	AVG	
5		0.3260	29.19	10.10	39.29	59.55	-20.26	QP	
6		0.3260	13.62	10.10	23.72	49.55	-25.83	AVG	
7		0.4180	28.42	10.14	38.56	57.49	-18.93	QP	
8		0.4180	11.02	10.14	21.16	47.49	-26.33	AVG	
9		0.5580	27.33	10.18	37.51	56.00	-18.49	QP	
10		0.5580	12.46	10.18	22.64	46.00	-23.36	AVG	
11	*	0.8020	35.57	10.18	45.75	56.00	-10.25	QP	
12		0.8020	21.25	10.18	31.43	46.00	-14.57	AVG	

\*:Maximum data x:Over limit !:over margin Comment: Factor build in receiver. Operator: Lian



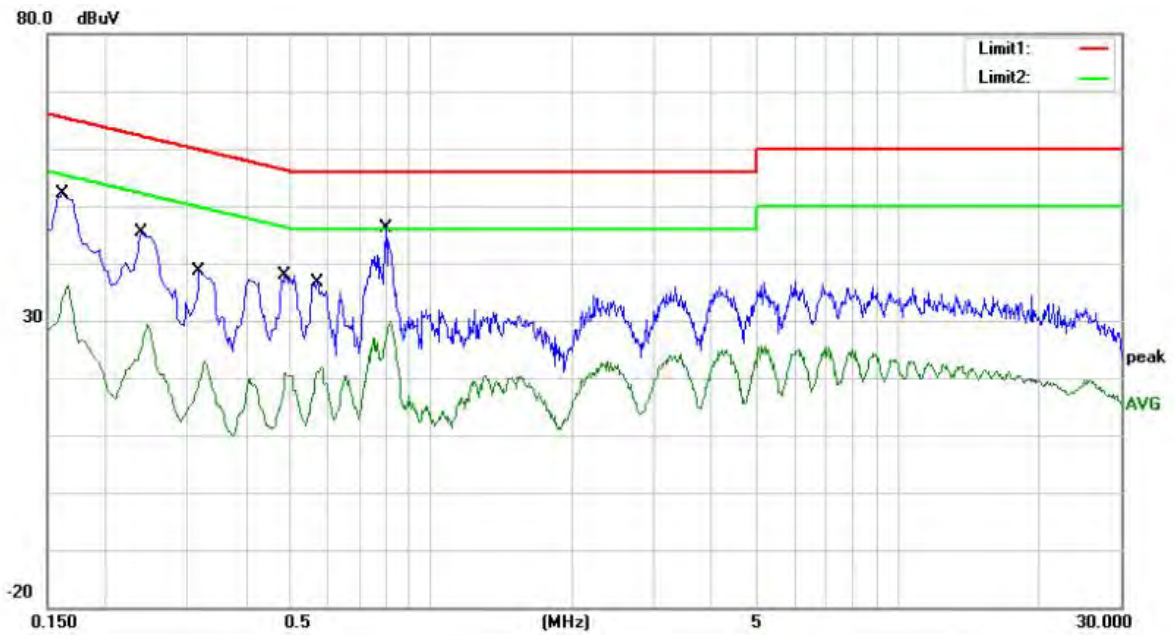

Site site #1 Phase: **N** Temperature: 25  
 Limit: (CE)FCC PART 15 C\_QP Power: AC 120V/60Hz Humidity: 55 %  
 Mode: BT TX2402  
 Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector	Comment
1		0.1620	41.99	10.02	52.01	65.36	-13.35	QP	
2		0.1620	26.00	10.02	36.02	55.36	-19.34	AVG	
3		0.2404	34.99	10.05	45.04	62.08	-17.04	QP	
4		0.2404	19.33	10.05	29.38	52.08	-22.70	AVG	
5		0.3180	28.64	10.09	38.73	59.76	-21.03	QP	
6		0.3180	12.72	10.09	22.81	49.76	-26.95	AVG	
7		0.4860	27.76	10.17	37.93	56.24	-18.31	QP	
8		0.4860	9.82	10.17	19.99	46.24	-26.25	AVG	
9		0.5700	26.49	10.18	36.67	56.00	-19.33	QP	
10		0.5700	10.79	10.18	20.97	46.00	-25.03	AVG	
11	*	0.7980	35.99	10.18	46.17	56.00	-9.83	QP	
12		0.7980	19.66	10.18	29.84	46.00	-16.16	AVG	

\*:Maximum data x:Over limit !:over margin Comment: Factor build in receiver. Operator: Lian

### 6.5 Conducted Measurement Photos:



## 7. Radiated Emission Test

### 7.1 Measurement Procedure

1. The testing follows the guidelines in Spurious Radiated Emissions of ANSI C63.10-2013.
2. Below 1000MHz, The EUT was placed on a turn table which is 0.8m above ground plane. And above 1000MHz, The EUT was placed on a styrofoam table which is 1.5m above ground plane.
3. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
4. For each suspected emission, the EUT was arranged to its worst case and then tune the Antenna tower (From 1m to 4m) and turntable (from 0 degree to 360 degree) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level to comply with the guidelines.
5. Set to the maximum power setting and enable the EUT transmit continuously.
6. Final measurement (Above 1GHz): The frequency range will be divided into different sub ranges depending of the frequency range of the used horn antenna. The EMI Receiver set to peak and average mode and a resolution bandwidth of 1MHz. The measurement will be performed in horizontal and vertical polarization of the measuring antenna and while rotating the EUT in its vertical axis in the range of 0 degree to 360 degree in order to have the antenna inside the cone of radiation.
7. Test Procedure of measurement (For Above 1GHz):
  - 1) Monitor the frequency range at horizontal polarization and move the antenna over all sides of the EUT(if necessary move the EUT to another orthogonal axis).
  - 2) Change the antenna polarization and repeat 1) with vertical polarization.
  - 3) Make a hardcopy of the spectrum.
  - 4) Measure the frequency of the detected emissions with a lower span and resolution bandwidth to increase the accuracy and note the frequency value.
  - 5) Change the analyser mode to Clear/ Write and found the cone of emission.
  - 6) Rotate and move the EUT, so that the measuring distance can be enlarged to 3m and the antenna will be still inside the cone of emission.
  - 7) Measure the level of the detected frequency with the correct resolution bandwidth, with the antenna polarization and azimuth and the peak and average detector, which causes the maximum emission.
  - 8) Repeat steps 1) to 7) for the next antenna spot if the EUT is larger than the antenna beamwidth.

Use the following spectrum analyzer settings:

When spectrum scanned from 30MHz to 1GHz setting resolution bandwidth 120KHz and video bandwidth 300KHz:

EMI Test Receiver	Setting
Attenuation	Auto
RB	120KHz
VB	300KHz
Detector	QP
Trace	Max hold

When spectrum scanned above 1GHz setting resolution bandwidth 1MHz, video bandwidth 3MHz:


EMI Test Receiver	Setting
Attenuation	Auto
RB	1MHz
VB	3MHz
Detector	Peak
Trace	Max hold

When spectrum scanned above 1GHz setting resolution bandwidth 1MHz, video bandwidth 10Hz:


EMI Test Receiver	Setting
Attenuation	Auto
RB	1MHz
VB	10Hz
Detector	Average
Trace	Max hold

## 7.2 Test SET-UP (Block Diagram of Configuration)


(A) Radiated Emission Test Set-Up, Frequency Below 30MHz

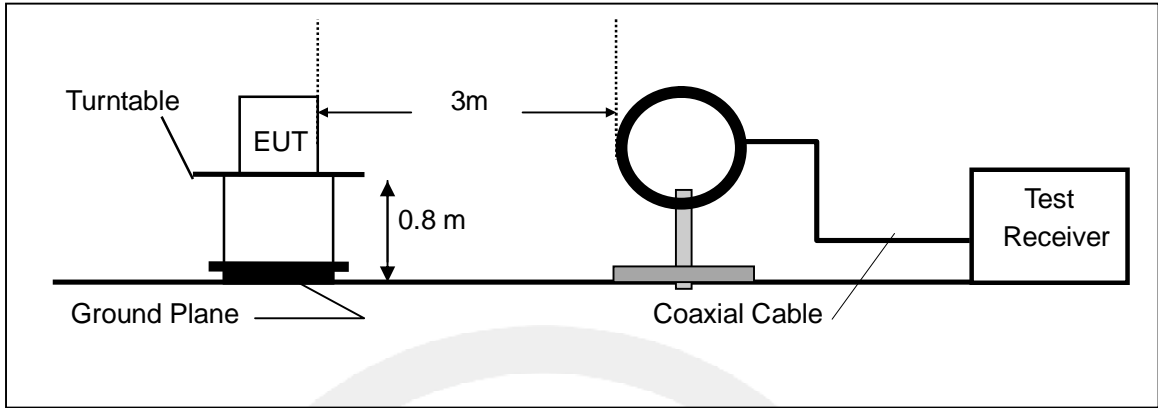

(B) Radiated Emission Test Set-Up, Frequency Below 1000MHz

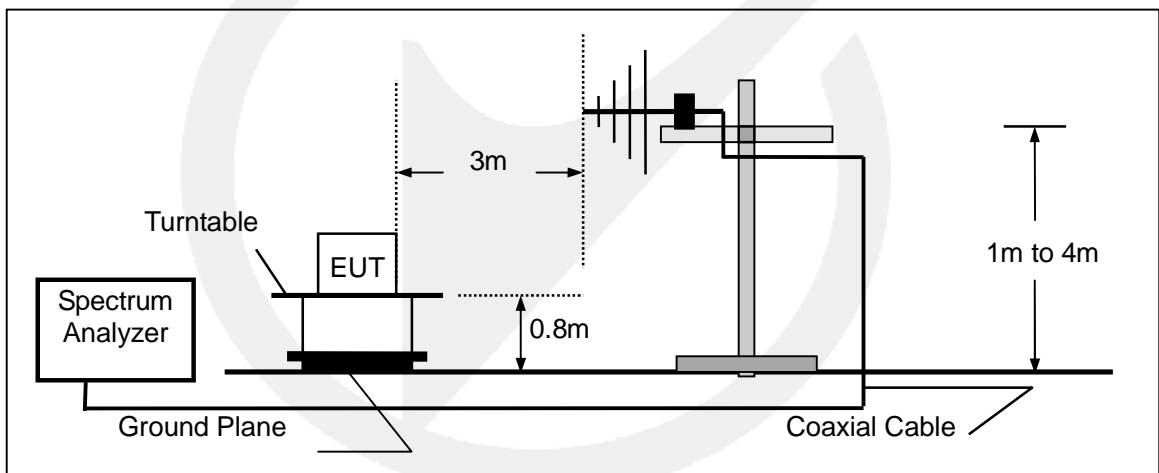

(C) Radiated Emission Test Set-Up, Frequency above 1000MHz

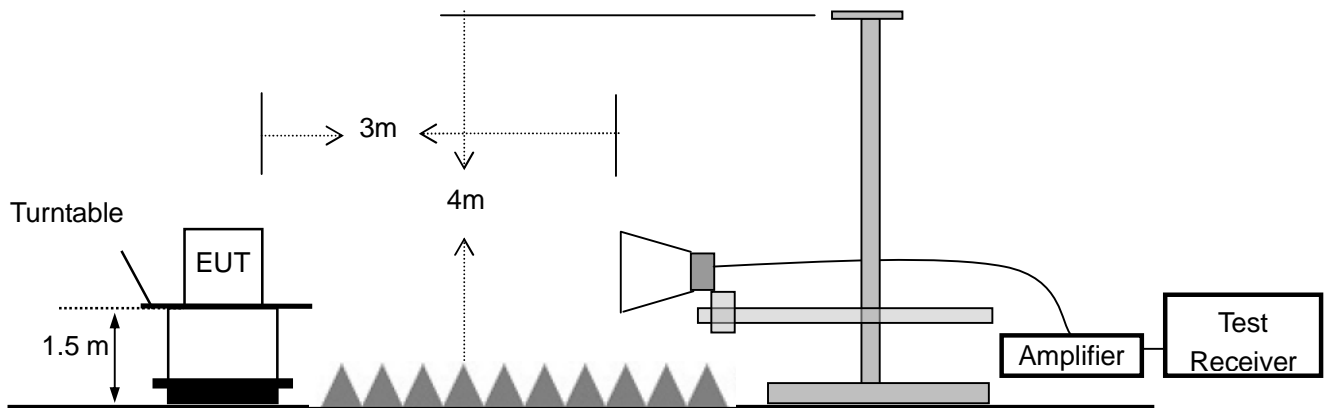

### 7.3 Measurement Equipment Used:

Item	Equipment	Manufacturer	Model No.	Serial No.	Characteristics	Last Cal.	Cal. Interval
1.	Test Receiver	Rohde & Schwarz	ESCI	1166.5950.03	9KHz-3GHz	05/23/2019	1 Year
2.	Loop Antenna	Schwarzbeck	FMZB 1519	012	9 KHz -30MHz	05/23/2019	1 Year
3.	Bilog Antenna	Schwarzbeck	VULB9163	000141	25MHz-2GHz	05/23/2019	1 Year
4.	Power Amplifier	CDS	RSU-M352	818	1MHz-1GHz	05/23/2019	1 Year
5.	Power Amplifier	HP	8447F	OPT H64	1GHz-26.5GHz	05/23/2019	1 Year
6.	Color Monitor	SUNSPO	SP-140A	N/A	--	05/23/2019	1 Year
7.	Single Line Filter	JIANLI	XL-3	N/A	--	05/23/2019	1 Year
8.	Single Phase Power Line Filter	JIANLI	DL-2X100B	N/A	--	05/23/2019	1 Year
9.	3 Phase Power Line Filter	JIANLI	DL-4X100B	N/A	--	05/23/2019	1 Year
10.	DC Power Filter	JIANLI	DL-2X50B	N/A	--	05/23/2019	1 Year
11.	Cable	Schwarzbeck	PLF-100	549489	9KHz-3GHz	05/23/2019	1 Year
12.	Cable	Rosenberger	CIL02	A0783566	9KHz-3GHz	05/23/2019	1 Year
13.	Cable	Rosenberger	RG 233/U	525178	9KHz-3GHz	05/23/2019	1 Year
14.	Signal Analyzer	Rohde & Schwarz	FSV30	103040	9KHz-40GHz	05/23/2019	1 Year
15.	Horn Antenna	Schwarzbeck	BBHA9120D	9120D-1272	1GHz-18GHz	05/23/2019	1 Year
16.	Horn Antenna	Schwarzbeck	BBHA 9170	BBHA9170399	14GHz -26.5GHz	05/23/2019	1 Year
17.	Power Amplifier	LUNAR EM	LNA1G18-40	J10100000081	1GHz-26.5GHz	05/23/2019	1 Year
18.	Cable	H+S	CBL-26	N/A	1GHz-26.5GHz	05/23/2019	1 Year
19.	Cable	H+S	CBL-26	N/A	1GHz-26.5GHz	05/23/2019	1 Year
20.	Cable	H+S	CBL-26	N/A	1GHz-26.5GHz	05/23/2019	1 Year

## 7.4 Radiated Emission Limit

The emissions from an intentional radiator shall not exceed the field strength levels specified in the following table 15.209(a):

Frequencies (MHz)	Field Strength (microrvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

### 15.205 Restricted bands of operation

MHz	MHz	MHz	GHz
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
<sup>1</sup> 0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 - 156.52525	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.7 - 156.9	2690 - 2900	22.01 - 23.12
8.41425 - 8.41475	162.0125 - 167.17	3260 - 3267	23.6 - 24.0
12.29 - 12.293	167.72 - 173.2	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	240 - 285	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	322 - 335.4	3600 - 4400	( <sup>2</sup> )

- Remark 1. Emission level in dBuV/m=20 log (uV/m)  
 : 2. Measurement was performed at an antenna to the closed point of EUT distance of meters.  
 3. Only spurious frequency is permitted to locate within the Restricted Bands specified in provision of x 15.205, and the emissions located in restricted bands also comply with 15.209 limit.

## 7.5 Measurement Result

Operation Mode:	TX	Test Date :	February 17, 2020
Test By:	Loren	Temperature :	28°C
Test Result:	PASS	Humidity :	65 %
Measured Distance:	3m		

### Below 30MHz:

Freq. (MHz)	Ant.Pol. H/V	Emission Level (dBuV/m)	Limit 3m (dBuV/m)	Over (dB)
--	--	--	--	--

Note: The low frequency, which started from 9KHz-30MHz, was pre-scanned and the result which was 20dB lower than the limit line per 15.31(o) was not reported.


### Below 1000MHz:

Pass.

All modulation modes have been tested, the worst mode is (GFSK TX 2402MHz), the data is recorded on the following page, other modulation modes do not exceed this limit.

Please refer to the following data.



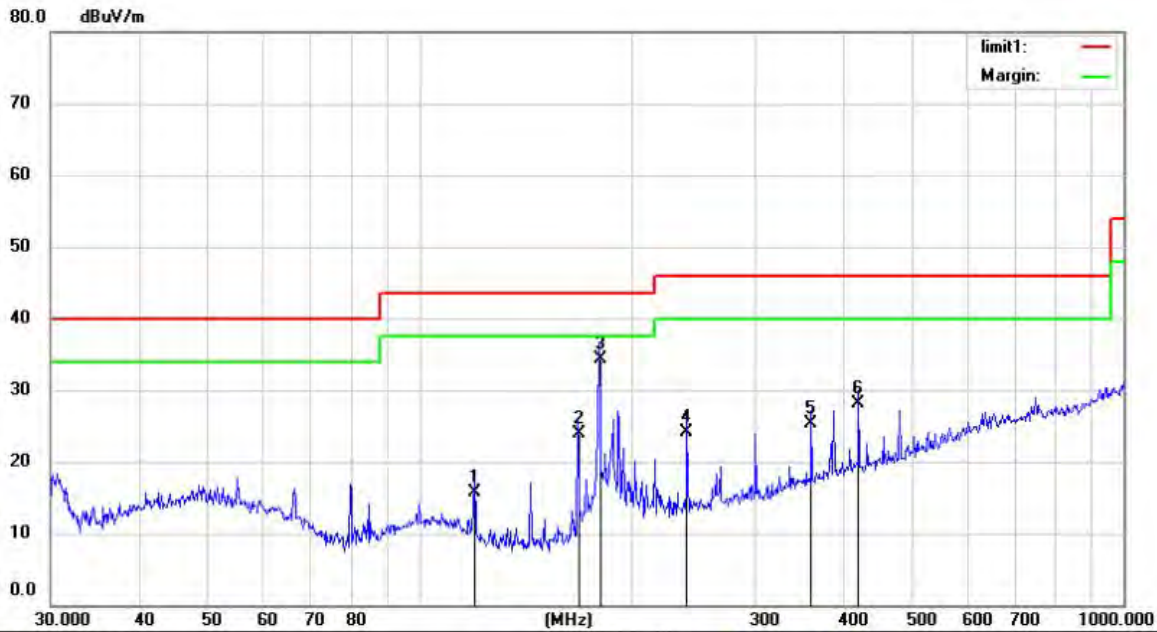


Site Chamber #1 Polarization: **Horizontal** Temperature: 26  
 Limit: (RE)FCC PART 15 C 3m Power: AC 120V/60Hz Humidity: 55 %  
 Mode: BT TX2402  
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		119.8556	35.59	-19.93	15.66	43.50	-27.84			QP
2		167.8243	44.19	-20.24	23.95	43.50	-19.55			QP
3	*	180.0165	53.69	-19.43	34.26	43.50	-9.24			QP
4		239.9873	39.78	-15.75	24.03	46.00	-21.97			QP
5		360.4476	37.52	-12.13	25.39	46.00	-20.61			QP
6		420.5803	38.61	-10.49	28.12	46.00	-17.88			QP

\*:Maximum data x:Over limit !:over margin

Operator: Lian

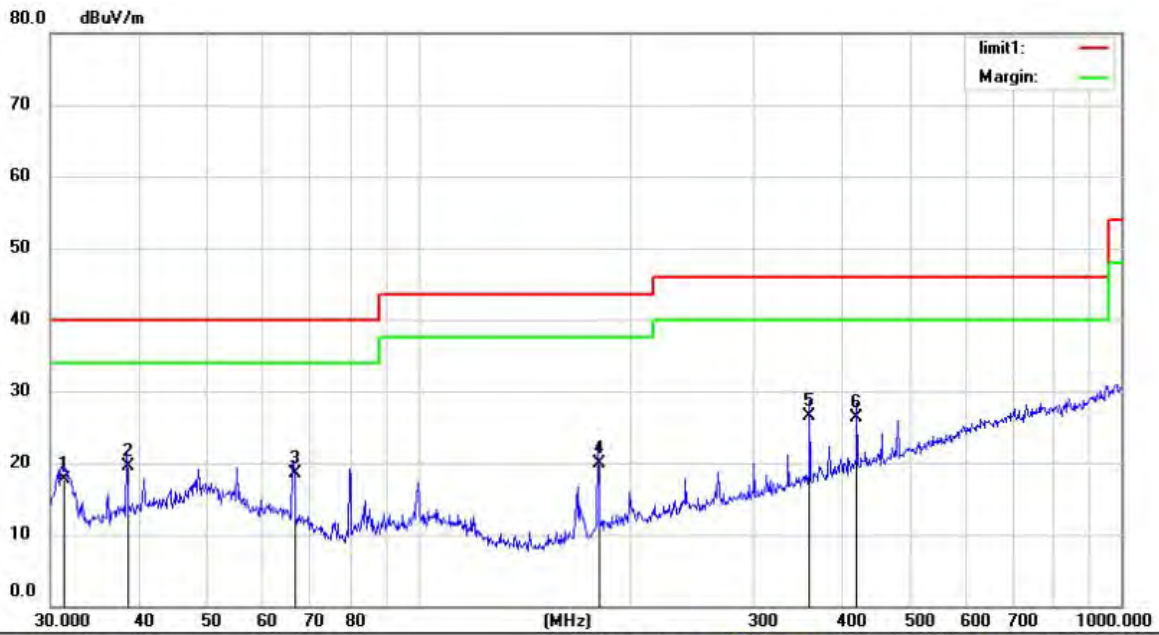

Site Chamber #1 Polarization: **Vertical** Temperature: 26  
 Limit: (RE)FCC PART 15 C 3m Power: AC 120V/60Hz Humidity: 55 %  
 Mode: BT TX2402  
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		31.3992	36.70	-18.94	17.76	40.00	-22.24	QP		
2		38.4810	36.58	-17.14	19.44	40.00	-20.56	QP		
3		66.4990	36.74	-18.32	18.42	40.00	-21.58	QP		
4		180.0165	39.25	-19.43	19.82	43.50	-23.68	QP		
5	*	360.4476	38.70	-12.13	26.57	46.00	-19.43	QP		
6		420.5803	36.73	-10.49	26.24	46.00	-19.76	QP		

\*:Maximum data x:Over limit !:over margin

Operator: Lian

### Above 1000MHz~10<sup>th</sup> Harmonics:

All modulation modes have been tested, the worst mode is (GFSK), the data is recorded on the following page, other modulation modes do not exceed this limit. Please refer to the following data.

Operation Mode: GFSK (CH1: 2402MHz)

Test Date : February 17, 2020

Freq. (MHz)	Ant. Pol. H/V	Reading Level(dBuV/m)		Correct Factor dB	Emission Level(dBuV/m)		Limit 3m		Margin(dB)	
		PK	AV		PK	AV	PK	AV	PK	AV
4804	V	94.54	70.38	-32.3	62.24	38.08	74	54	-11.76	-15.92
7206	V	92.63	72.56	-37.2	55.43	35.36	74	54	-18.57	-18.64
9608	V	98.60	74.89	-39.8	58.80	35.09	74	54	-15.20	-18.91
12010	V	96.58	74.56	-40.5	56.08	34.06	74	54	-17.92	-19.94
14412	V	95.88	70.56	-41.7	54.18	28.86	74	54	-19.82	-25.14
16814	V	91.61	71.39	-40	51.61	31.39	74	54	-22.39	-22.61
4804	H	97.44	75.80	-31.6	65.84	44.20	74	54	-8.16	-9.80
7206	H	96.32	70.07	-35.5	60.82	34.57	74	54	-13.18	-19.43
9608	H	93.18	70.99	-38.3	54.88	32.69	74	54	-19.12	-21.31
12010	H	92.86	71.21	-39	53.86	32.21	74	54	-20.14	-21.79
14412	H	98.41	71.74	-42	56.41	29.74	74	54	-17.59	-24.26
16814	H	97.70	75.01	-39.3	58.40	35.71	74	54	-15.60	-18.29

Operation Mode: GFSK (CH40: 2441MHz)

Test Date : February 17, 2020

Freq. (MHz)	Ant. Pol. H/V	Reading Level(dBuV/m)		Correct Factor dB	Emission Level(dBuV/m)		Limit 3m(dBuV/m)		Margin(dB)	
		PK	AV		PK	AV	PK	AV	PK	AV
4882	V	91.88	75.09	-32.3	59.58	42.79	74	54	-14.42	-11.21
7323	V	98.30	71.24	-37.2	61.1	34.04	74	54	-12.9	-19.96
9764	V	94.76	76.88	-39.8	54.96	37.08	74	54	-19.04	-16.92
12205	V	93.74	72.14	-40.5	53.24	31.64	74	54	-20.76	-22.36
14646	V	97.32	73.81	-41	56.32	32.81	74	54	-17.68	-21.19
17087	V	95.64	71.82	-41.1	54.54	30.72	74	54	-19.46	-23.28
4882	H	91.50	70.36	-31.6	59.9	38.76	74	54	-14.1	-15.24
7323	H	97.82	73.15	-35.5	62.32	37.65	74	54	-11.68	-16.35
9764	H	94.11	74.12	-38.3	55.81	35.82	74	54	-18.19	-18.18
12205	H	91.70	74.05	-39	52.7	35.05	74	54	-21.3	-18.95
14646	H	97.75	73.47	-42	55.75	31.47	74	54	-18.25	-22.53
17087	H	91.88	76.82	-41.5	50.38	35.32	74	54	-23.62	-18.68

Operation Mode: GFSK (CH79: 2480MHz)

Test Date : February 17, 2020

Freq. (MHz)	Ant. Pol. H/V	Reading Level(dBuV/m)		Correct Factor dB	Emission Level(dBuV/m)		Limit 3m(dBuV/m)		Margin(dB)	
		PK	AV		PK	AV	PK	AV	PK	AV
4960	V	98.68	70.11	-32.3	66.38	37.81	74	54	-7.62	-16.19
7440	V	98.92	76.97	-37.2	61.72	39.77	74	54	-12.28	-14.23
9920	V	91.95	73.28	-39.8	52.15	33.48	74	54	-21.85	-20.52
12400	V	91.03	70.38	-40.5	50.53	29.88	74	54	-23.47	-24.12
14880	V	96.63	76.67	-41	55.63	35.67	74	54	-18.37	-18.33
17360	V	92.84	71.10	-41.1	51.74	30	74	54	-22.26	-24
4960	H	98.71	73.54	-31.6	67.11	41.94	74	54	-6.89	-12.06
7440	H	94.26	74.87	-35.5	58.76	39.37	74	54	-15.24	-14.63
9920	H	96.87	73.31	-38.3	58.57	35.01	74	54	-15.43	-18.99
12400	H	97.20	75.18	-39	58.2	36.18	74	54	-15.8	-17.82
14880	H	95.19	70.18	-42	53.19	28.18	74	54	-20.81	-25.82
17360	H	94.18	70.59	-41.5	52.68	29.09	74	54	-21.32	-24.91

Other harmonics emissions are lower than 20dB below the allowable limit.

- Note:**
- (1) All Readings are Peak Value and AV.
  - (2) Emission Level= Reading Level+ Probe Factor +Cable Loss.
  - (3) The average measurement was not performed when the peak measured data under the limit of average detection.
  - (4) Measuring frequencies from 1GHz to 25GHz.

### 7.5 Radiated Measurement Photos:




## 8. Channel Separation test

### 8.1 Measurement Procedure

The EUT was operating in hopping mode or could be controlled its channel. Printed out the test result from the spectrum by hard copy function.

### 8.2 Test SET-UP (Block Diagram of Configuration)



### 8.3 Measurement Equipment Used:

EQUIPMENT TYPE	MFR	MODEL NUMBER	SERIAL NUMBER	Characteristics	LAST CAL.	CAL DUE.
Spectrum Analyzer	Rohde & Schwarz	FSV30	1321.3008K	10Hz-30GHz	05/23/2019	05/22/2020
Coaxial Cable	CDS	79254	46107086	10Hz-30GHz	05/23/2019	05/22/2020
Antenna Connector	ARTHUR-YANG	2244-N1TG1	N/A	10Hz-30GHz	05/23/2019	05/22/2020

Remark: The temporary antenna connector is soldered on the PCB board in order to perform conducted tests and this temporary antenna connector is listed in the equipment list.


### 8.4 Measurement Results:

Refer to attached data chart.

Spectrum Detector:	PK	Test Date :	February 17, 2020
Test By:	Loren	Temperature :	24°C
Test Result:	PASS	Humidity :	53 %
Modulation:	GFSK		

Channel number	Channel frequency (MHz)	Separation Read Value (kHz)	Separation Limit 2/3 20dB Down BW(kHz)
1	2402	898	>736
40	2441	999	>742
79	2480	997	>736




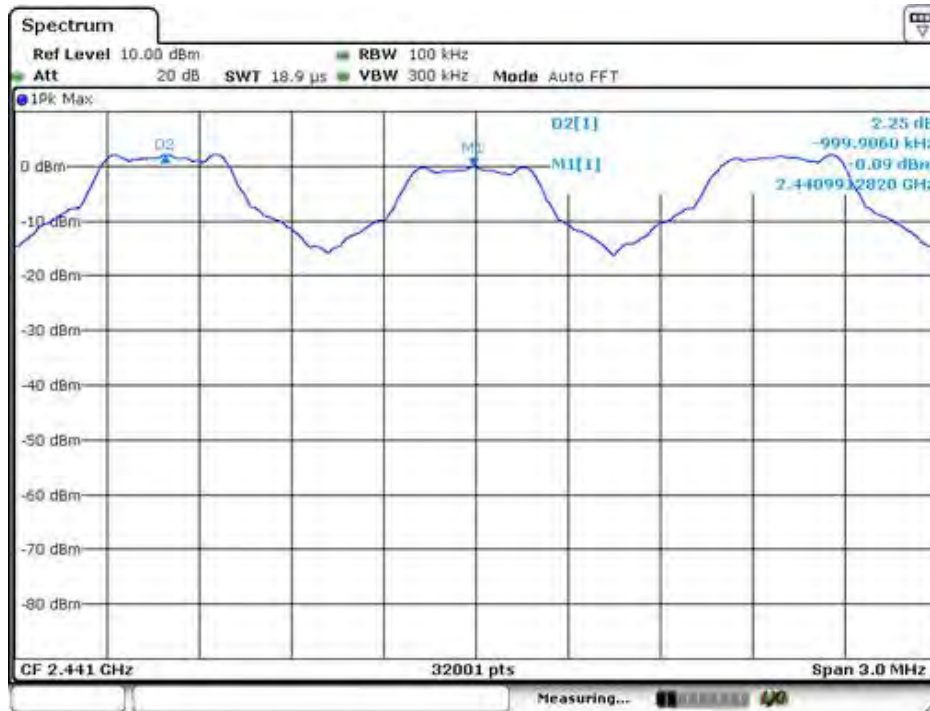




Spectrum Detector:	PK	Test Date :	February 17, 2020
Test By:	Loren	Temperature :	24°C
Test Result:	PASS	Humidity :	53 %
Modulation:	Π/4-DQPSK		

Channel number	Channel frequency (MHz)	Separation Read Value (kHz)	Separation Limit 2/3 20dB Down BW(kHz)
1	2402	1000	>906
40	2441	1000	>908
79	2480	1000	>906

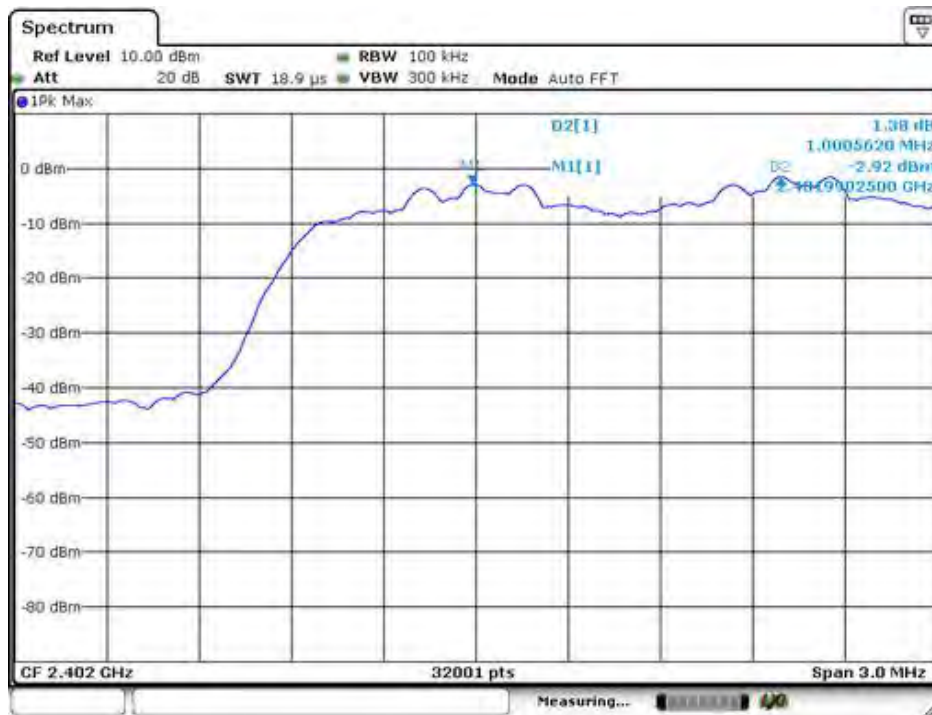


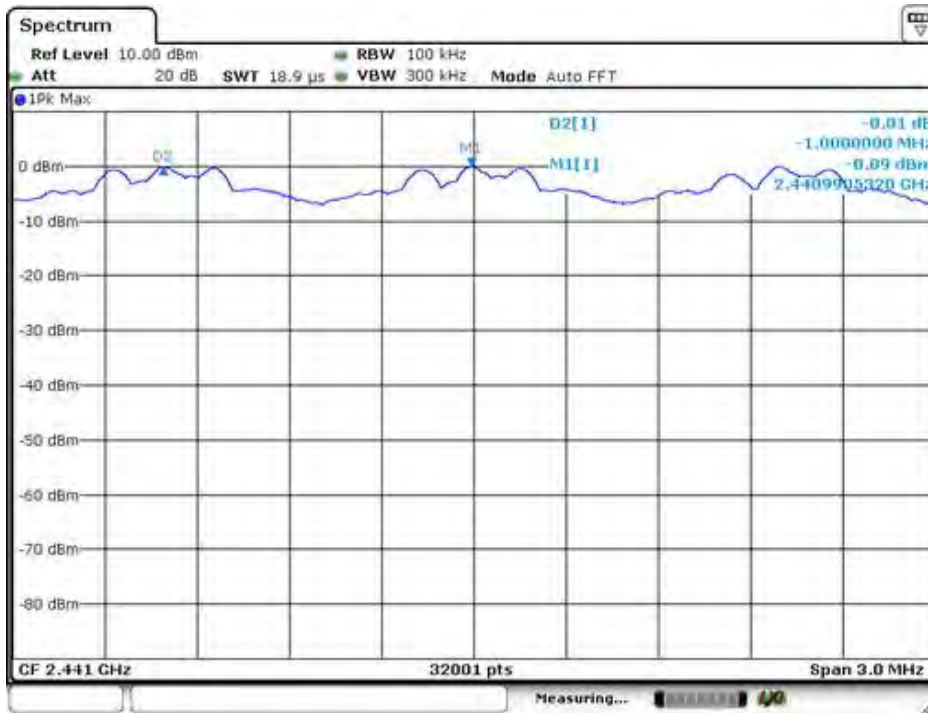

Spectrum Detector:	PK	Test Date :	February 17, 2020
Test By:	Loren	Temperature :	24°C
Test Result:	PASS	Humidity :	53 %
Modulation:	8DPSK		

Channel number	Channel frequency (MHz)	Separation Read Value (kHz)	Separation Limit 2/3 20dB Down BW(kHz)
1	2402	1000	>911
40	2441	1000	>912
79	2480	999	>912



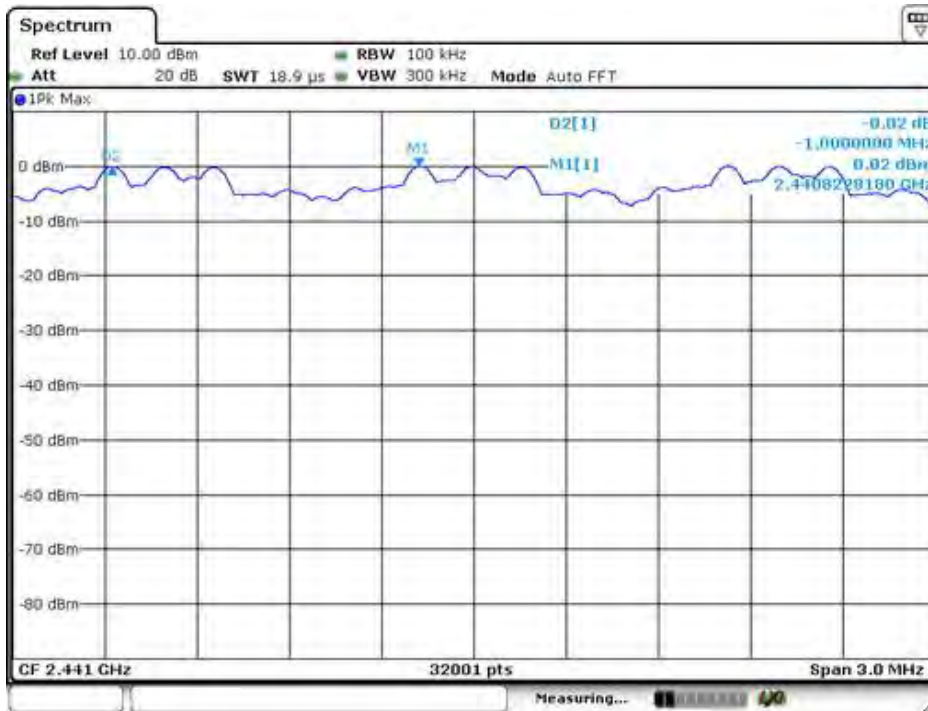


## 9. 20dB Bandwidth test

### 9.1 Measurement Procedure

The EUT was operating in hopping mode or could be controlled its channel. Printed out the test result from the spectrum by hard copy function.

### 9.2 Test SET-UP (Block Diagram of Configuration)



### 9.3 Measurement Equipment Used:

EQUIPMENT TYPE	MFR	MODEL NUMBER	SERIAL NUMBER	Characteristics	LAST CAL.	CAL DUE.
Spectrum Analyzer	Rohde & Schwarz	FSV30	1321.3008K	10Hz-30GHz	05/23/2019	05/22/2020
Coaxial Cable	CDS	79254	46107086	10Hz-30GHz	05/23/2019	05/22/2020
Antenna Connector	ARTHUR-YANG	2244-N1TG1	N/A	10Hz-30GHz	05/23/2019	05/22/2020



Remark: The temporary antenna connector is soldered on the PCB board in order to perform conducted tests and this temporary antenna connector is listed in the equipment list.

### 9.4 Measurement Results:

Refer to attached data chart.

Spectrum Detector:	PK	Test Date :	February 17, 2020
Test By:	Loren	Temperature :	24°C
Test Result:	PASS	Humidity :	53 %
Modulation:	GFSK		


Channel number	Channel frequency (MHz)	20dB Down BW(kHz)
1	2402	1104
40	2441	1113
79	2480	1104

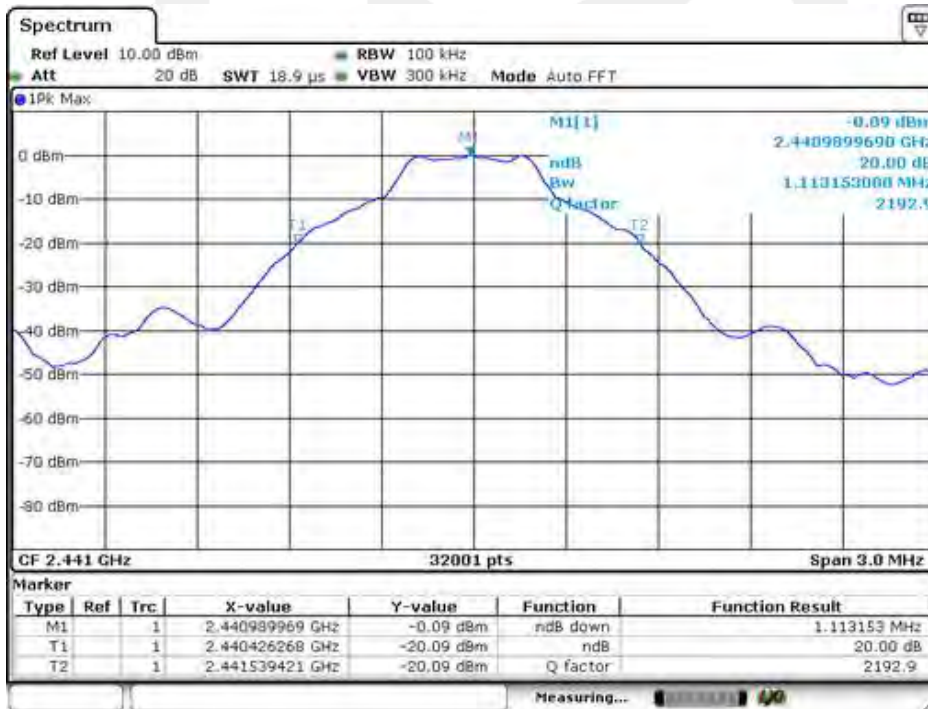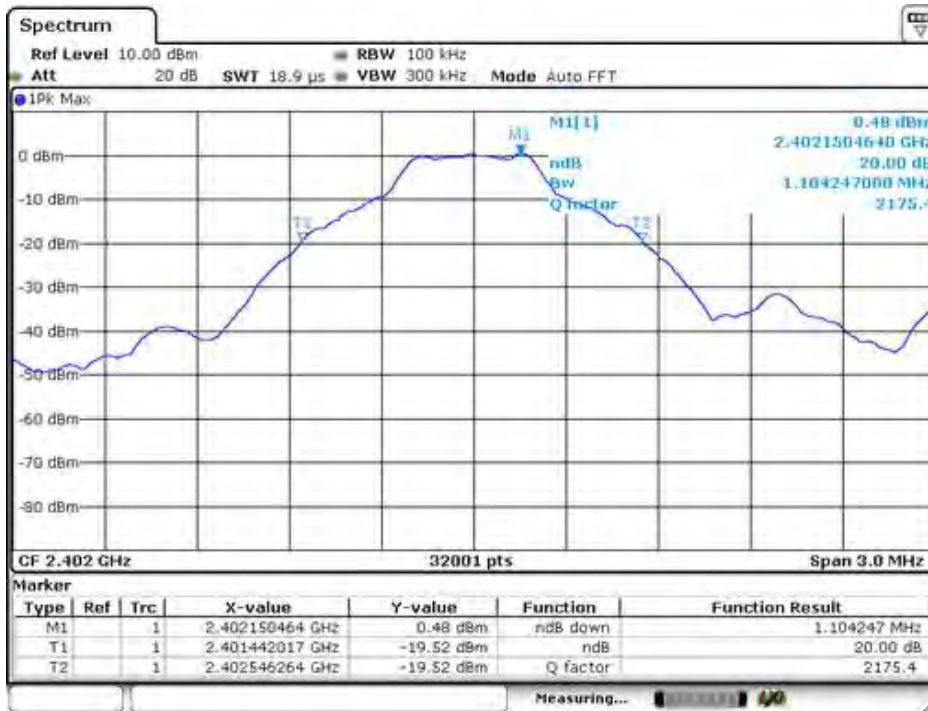



Spectrum Detector: PK                      Test Date : February 17, 2020  
 Test By: Loren                              Temperature : 24°C  
 Test Result: PASS                         Humidity : 53 %  
 Modulation: Π/4-DQPSK

Channel number	Channel frequency (MHz)	20dB Down BW(kHz)
1	2402	1359
40	2441	1362
79	2480	1359

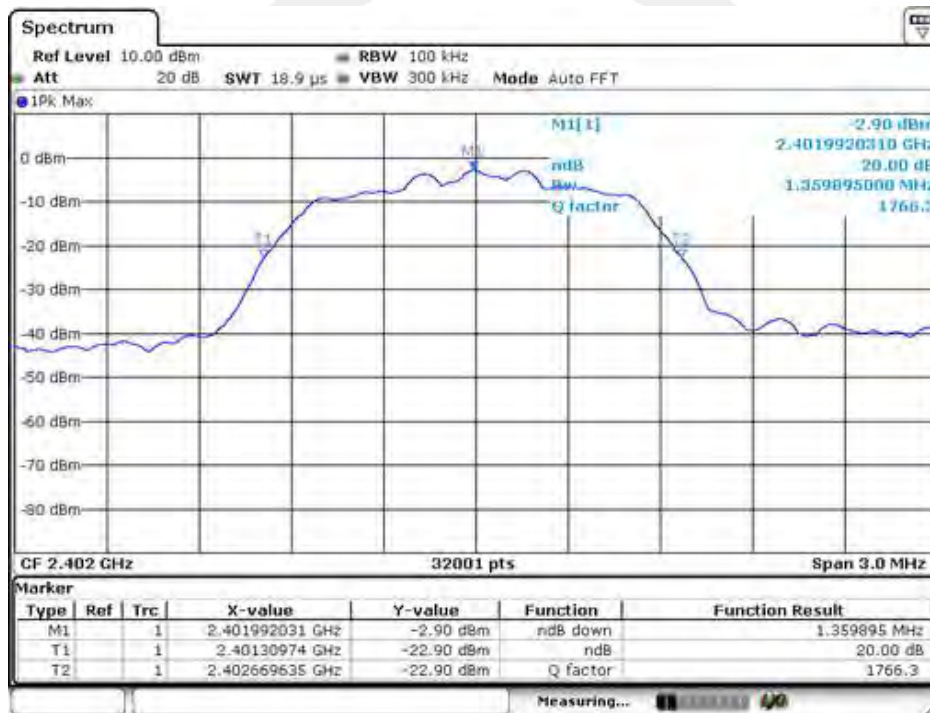





Spectrum Detector:	PK	Test Date :	February 17, 2020
Test By:	Loren	Temperature :	24°C
Test Result:	PASS	Humidity :	53 %
Modulation:	8DPSK		

Channel number	Channel frequency (MHz)	20dB Down BW(kHz)
1	2402	1367
40	2441	1369
79	2480	1368






## 10. Quantity of Hopping Channel Test

### 10.1 Measurement Procedure

The EUT was operating in hopping mode or could be controlled its channel. Printed out the test result from the spectrum by hard copy function.

### 10.2 Test SET-UP (Block Diagram of Configuration)



### 10.3 Measurement Equipment Used:

EQUIPMENT TYPE	MFR	MODEL NUMBER	SERIAL NUMBER	Characteristics	LAST CAL.	CAL DUE.
Spectrum Analyzer	Rohde & Schwarz	FSV30	1321.3008K	10Hz-30GHz	05/23/2019	05/22/2020
Coaxial Cable	CDS	79254	46107086	10Hz-30GHz	05/23/2019	05/22/2020
Antenna Connector	ARTHUR-YANG	2244-N1TG1	N/A	10Hz-30GHz	05/23/2019	05/22/2020


Remark: The temporary antenna connector is soldered on the PCB board in order to perform conducted tests and this temporary antenna connector is listed in the equipment list.

### 10.4 Measurement Results:

Refer to attached data chart.

Worst Test Mode	GFSK	Test Date :	February 17, 2020
Test By:	Loren	Temperature :	25 °C
Test Result:	PASS	Humidity :	50 %

Hopping Channel Frequency Range	Quantity of Hopping Channel	Quantity of Hopping Channel
2402-2480	79	> 15

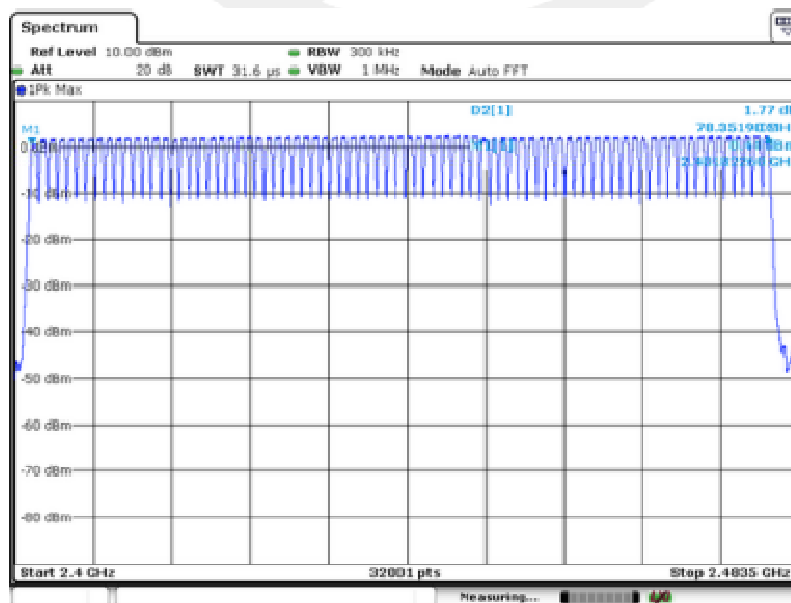

## 11. Time of Occupancy (Dwell Time) test

### 11.1 Test Description

The Equipment Under Test (EUT) was set up to perform the dwell time measurements. The EUT was connected to the spectrum analyzer via a short coax cable. The dwell time is calculated by:


$$\text{Dwell time} = \text{time slot length} * \text{hop rate} / \text{number of hopping channels} * 31.6\text{s}$$

with:

- hop rate =  $1600 * 1/\text{s}$  for DH1 packets =  $1600 \text{ s}^{-1}$
- hop rate =  $1600/3 * 1/\text{s}$  for DH3 packets =  $533.33 \text{ s}^{-1}$
- number of hopping channels = 79
- $31.6 \text{ s} = 0.4 \text{ seconds multiplied by the number of hopping channels} = 0.4 \text{ s} * 79$

The highest value of the dwell time is reported.

### 11.2 Test SET-UP (Block Diagram of Configuration)



### 11.3 Measurement Equipment Used:

EQUIPMENT TYPE	MFR	MODEL NUMBER	SERIAL NUMBER	Characteristics	LAST CAL.	CAL DUE.
Spectrum Analyzer	Rohde & Schwarz	FSV30	1321.3008K	10Hz-30GHz	05/23/2019	05/22/2020
Coaxial Cable	CDS	79254	46107086	10Hz-30GHz	05/23/2019	05/22/2020
Antenna Connector	ARTHUR-YANG	2244-N1TG1	N/A	10Hz-30GHz	05/23/2019	05/22/2020

Remark: The temporary antenna connector is soldered on the PCB board in order to perform conducted tests and this temporary antenna connector is listed in the equipment list.

### 11.4 Test Requirements / Limits

FCC Part 15, Subpart C, §15.247 (a) (1) (iii)

Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Since the Bluetooth technology uses 79 channels this period is calculated to be 31.6seconds. Refer to attached data chart.


Modulation:	GFSK	Test Date :	February 17, 2020
Test By:	Loren	Temperature :	25 °C
Test Result:	PASS	Humidity :	50 %

### 11.5 Test result


Mode	Number of transmission in a 31.6( 79 Hopping*0.4)	Length of transmissions time(msec)	Result (msec)	Limit (msec)
DH1	$1600/(2*79) \times 31.6 = 320$	0.376	120.32	400
DH3	$1600/(4*79) \times 31.6 = 160$	1.636	261.76	400
DH5	$1600/(6*79) \times 31.6 = 106.67$	2.872	306.35	400

Remark: The results of worst cased was recorded.


DH1:

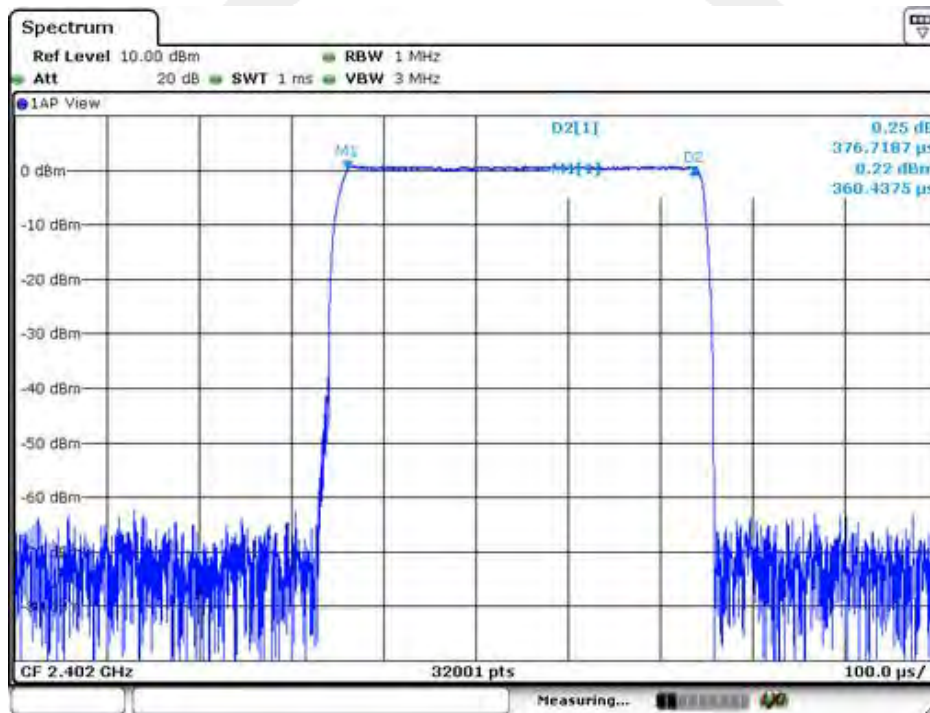

DH3:

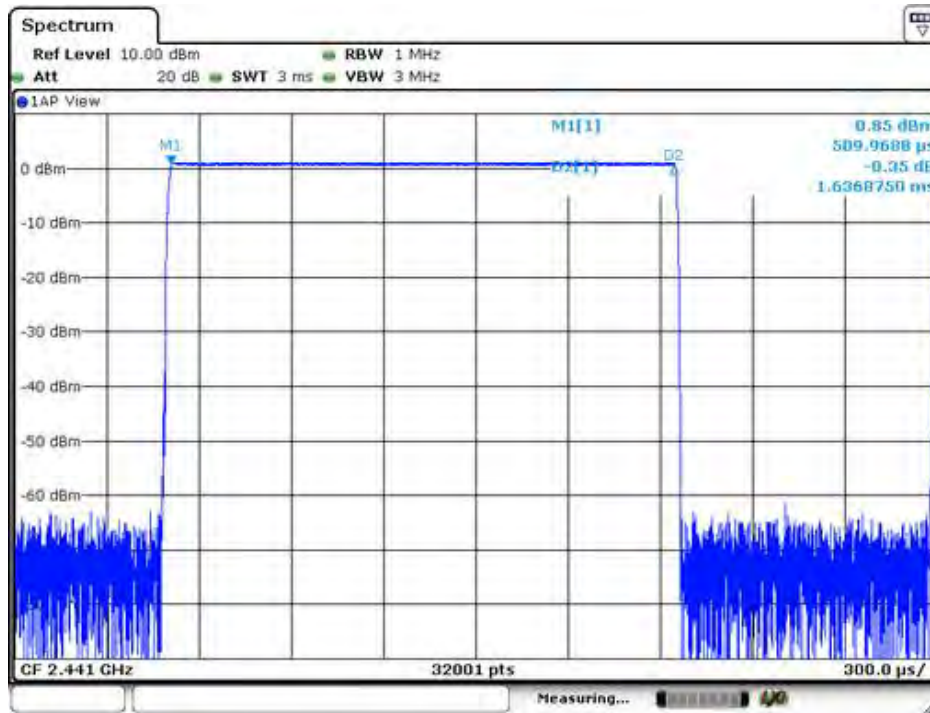

DH5:

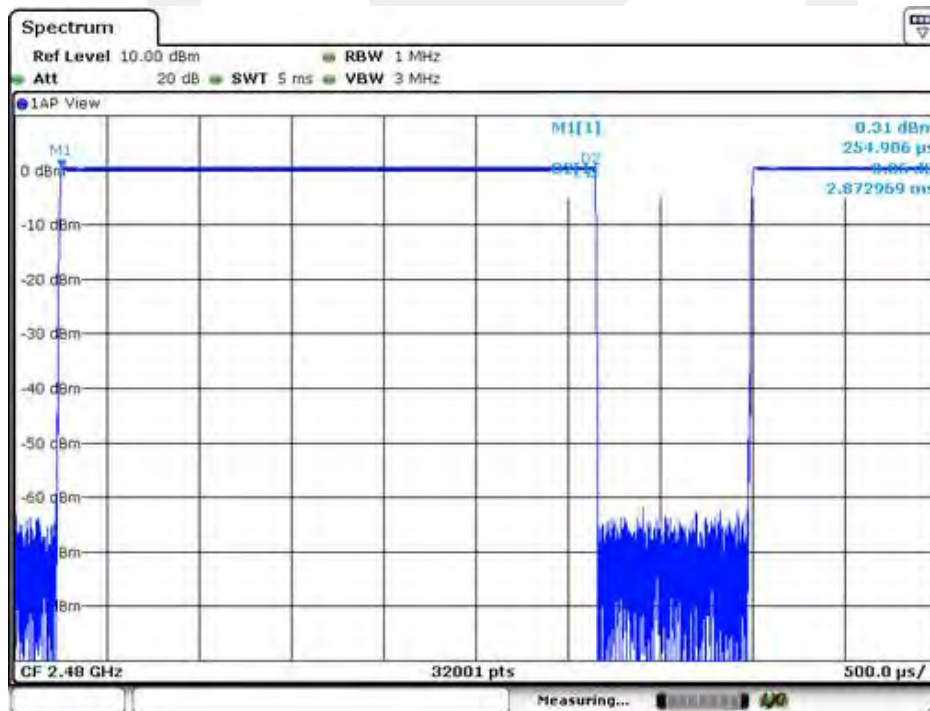

## 12. MAXIMUM PEAK OUTPUT POWER TEST

### 12.1 Measurement Procedure

- a. Check the calibration of the measuring instrument(SA) using either an internal calibrator or a known signal from an external generator.
- b. Turn on the EUT and connect it to measurement instrument. Then set it to any one convenient frequency within its operating range. Set a reference level on the measuring instrument equal to the highest peak value.
- c. The center frequency of the spectrum analyzer is set to the fundamental frequency and using proper RBW and VBW setting.
- d. Measure the captured power within the band and recording the plot.
- e. Repeat above procedures until all frequencies required were complete.

### 12.2 Test SET-UP (Block Diagram of Configuration)



### 12.3 Measurement Equipment Used:

EQUIPMENT TYPE	MFR	MODEL NUMBER	SERIAL NUMBER	Characteristics	LAST CAL.	CAL DUE.
Spectrum Analyzer	Rohde & Schwarz	FSV30	1321.3008K	10Hz-30GHz	05/23/2019	05/22/2020
Coaxial Cable	CDS	79254	46107086	10Hz-30GHz	05/23/2019	05/22/2020
Antenna Connector	ARTHUR-YANG	2244-N1TG1	N/A	10Hz-30GHz	05/23/2019	05/22/2020

Remark: The temporary antenna connector is soldered on the PCB board in order to perform conducted tests and this temporary antenna connector is listed in the equipment list.





### 12.4 Measurement Results:

Refer to attached data chart.

Spectrum Detector:	PK	Test Date :	February 17, 2020
Test By:	Loren	Temperature :	25 °C
Test Result:	PASS	Humidity :	50 %
Modulation:	GFSK		


Channel number	Channel Frequency (MHz)	Peak Power output(dBm)	Peak Power output(mW)	Peak Power Limit(mW)	Pass/Fail
01	2402	0.79	1.199	1000	PASS
40	2441	0.24	1.057	1000	PASS
79	2480	0.61	1.151	1000	PASS




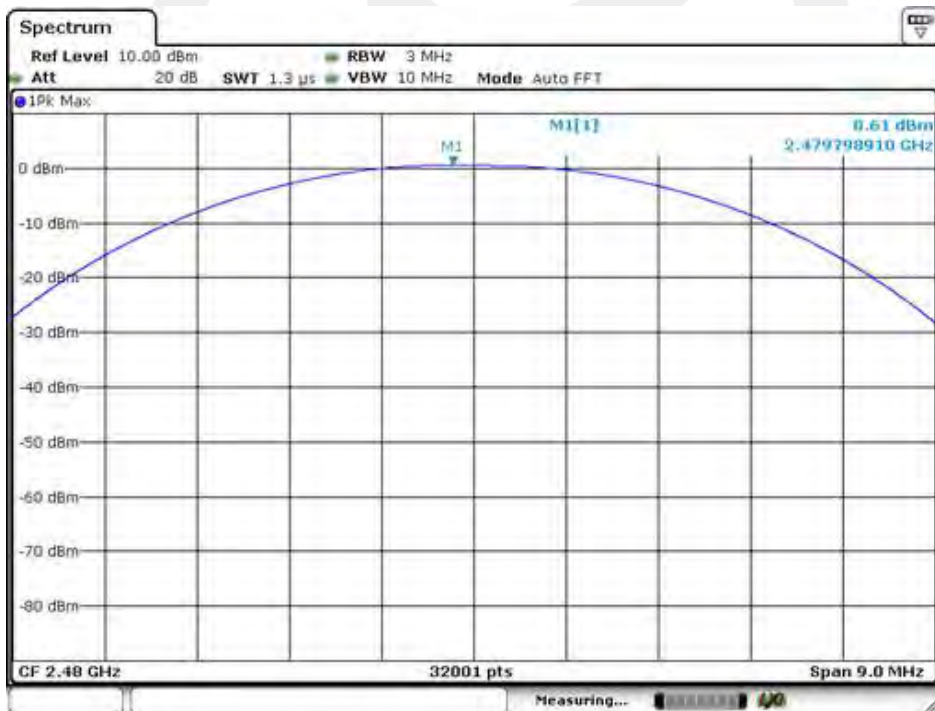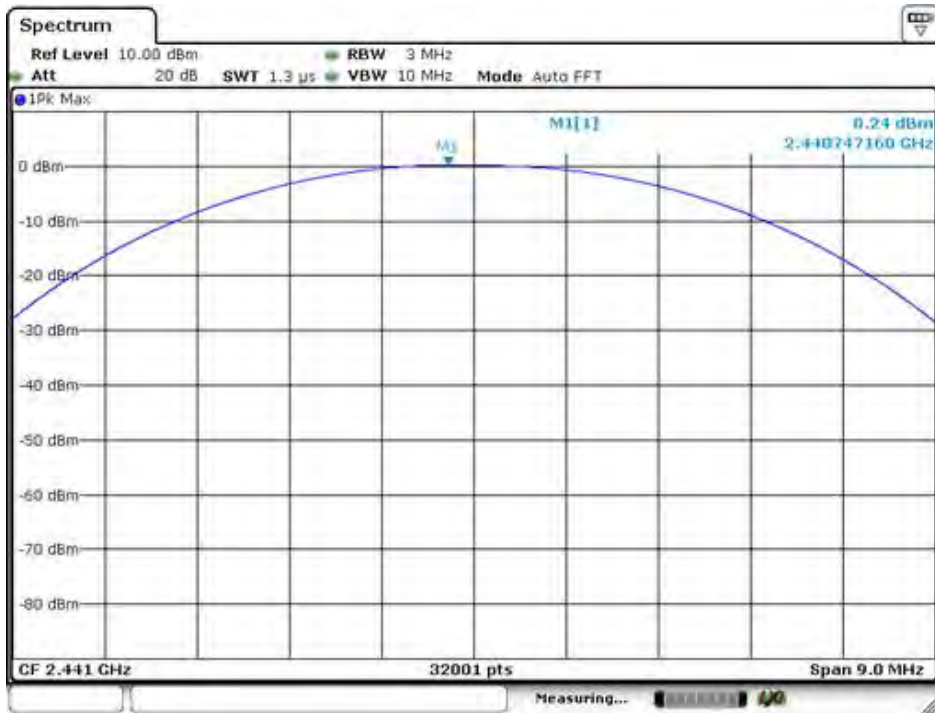

Spectrum Detector:	PK	Test Date :	February 17, 2020
Test By:	Loren	Temperature :	25 °C
Test Result:	PASS	Humidity :	50 %
Modulation:	Π/4-DQPSK		

Channel number	Channel Frequency (MHz)	Peak Power output(dBm)	Peak Power output(mW)	Peak Power Limit(mW)	Pass/Fail
01	2402	-1.62	0.689	125	PASS
40	2441	0.9	1.230	125	PASS
79	2480	1.28	1.343	125	PASS

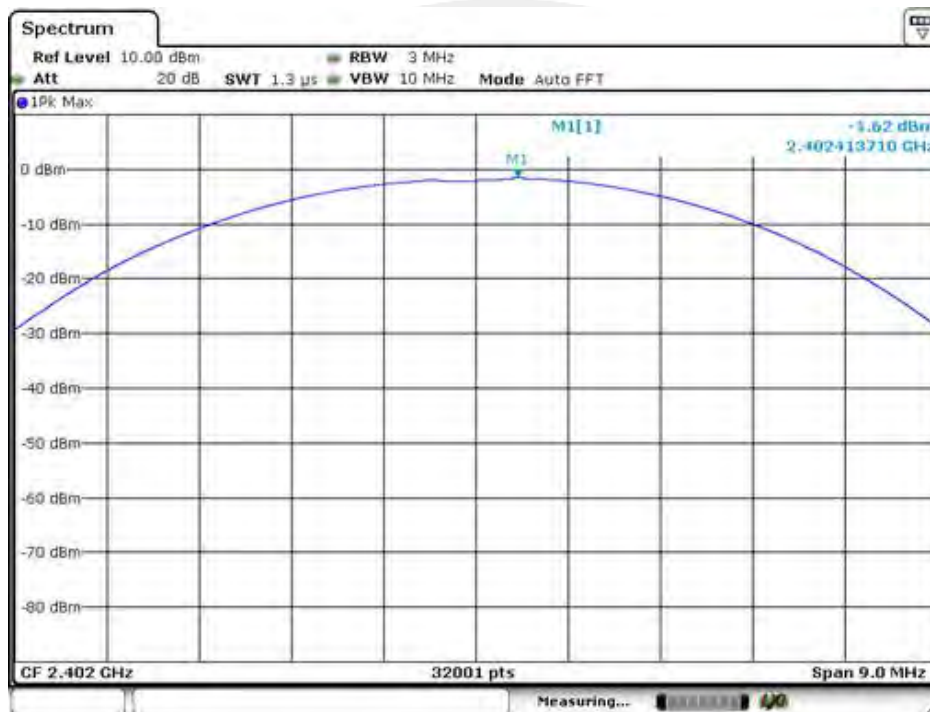

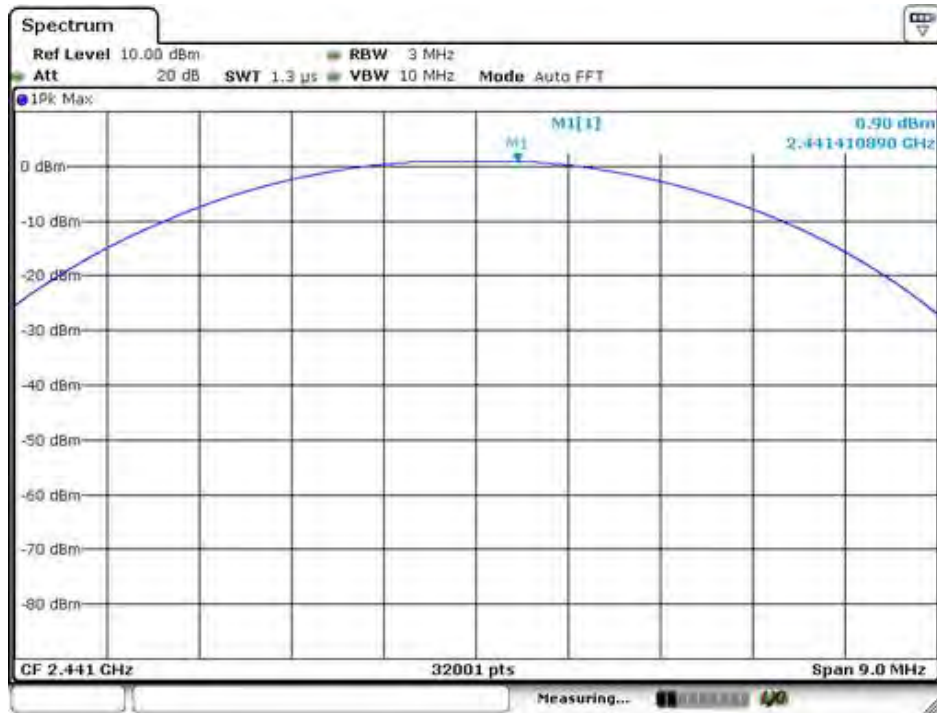


Spectrum Detector: PK  
 Test By: Loren  
 Test Result: PASS  
 Modulation: 8DPSK

Test Date : February 17, 2020  
 Temperature : 25 °C  
 Humidity : 50 %

Channel number	Channel Frequency (MHz)	Peak Power output(dBm)	Peak Power output(mW)	Peak Power Limit(mW)	Pass/Fail
01	2402	-1.25	0.750	125	PASS
40	2441	1.12	1.294	125	PASS
79	2480	1.35	1.365	125	PASS



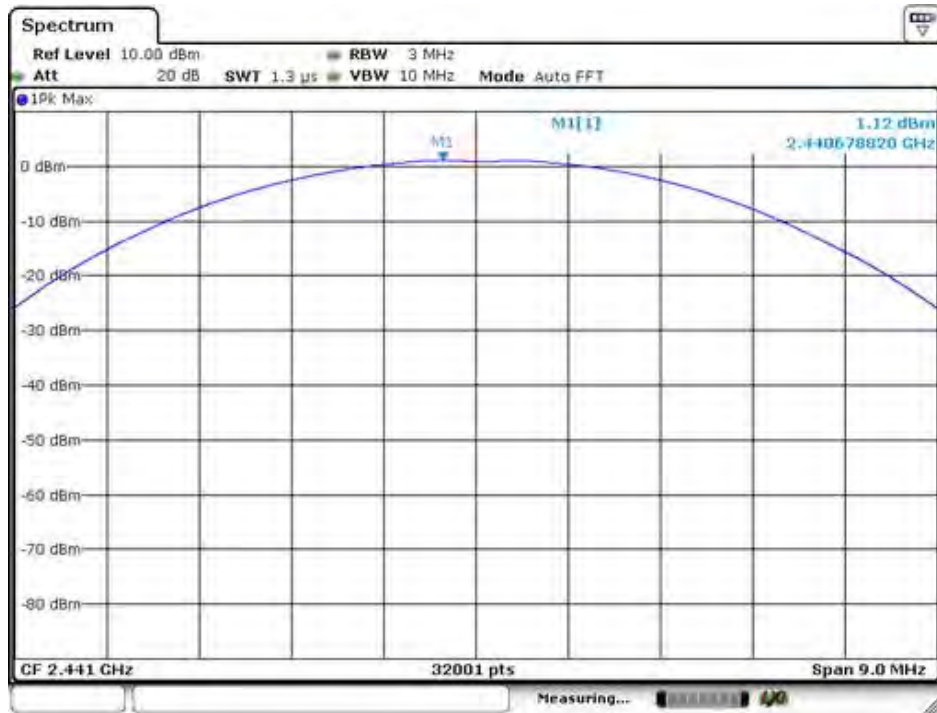

## 13. Band EDGE test

### 13.1 Measurement Procedure

#### For Conducted Test

1. The transmitter output is connected to a spectrum analyzer. The resolution bandwidth is set to 100KHz. The video bandwidth is set to 300KHz.
2. The spectrum from 30MHz to 26 GHz is investigated with the transmitter set to the lowest, middle, and highest channels.

EMI Test Receiver	Setting
Attenuation	Auto
RBW	100KHz
VBW	300KHz
Detector	Peak
Trace	Max hold

#### For Radiated emission Test

The EUT was placed on a styrofoam table which is 1.5m above ground plane.

The measurement procedure at the band edges was simplified by performing the measurement in just one plot. Both, the in-band-emission and the unwanted emission were encompassed by the span. After trace stabilization, the maximum peak was determined by a peak detector and the value was marked by an appropriate limit line. The second limit line, which is 20dB below the first, marks the limit for the emissions in the unrestricted band. A maximum-peak-detector marks the highest emission in the unrestricted band next to the band edge.

The measurements were performed at the lower end of the 2.4GHz band.

Use the following spectrum analyzer settings:

For Restricted Band, When spectrum scanned above 1GHz setting resolution bandwidth 1MHz, video bandwidth 3MHz:


EMI Test Receiver	Setting
Attenuation	Auto
RBW	1MHz
VBW	3MHz
Detector	Peak
Trace	Max hold

For Non-Restricted Band, When spectrum scanned above 1GHz setting resolution bandwidth 100KHz, video bandwidth 300KHz:


EMI Test Receiver	Setting
Attenuation	Auto
RBW	100KHz
VBW	300KHz
Detector	Peak
Trace	Max hold

### 13.2 Test SET-UP (Block Diagram of Configuration)

For Conducted Test



For Radiated emission Test

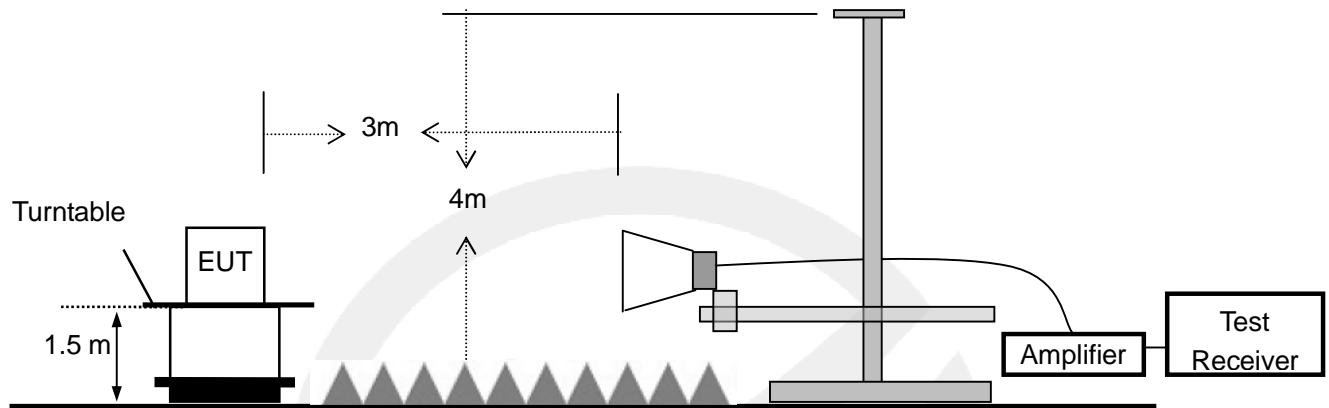

### 13.3 Measurement Equipment Used:

For Conducted Test

EQUIPMENT TYPE	MFR	MODEL NUMBER	SERIAL NUMBER	Characteristics	LAST CAL.	CAL DUE.
Spectrum Analyzer	Rohde & Schwarz	FSV30	1321.3008K	10Hz-30GHz	05/23/2019	05/22/2020
Coaxial Cable	CDS	79254	46107086	10Hz-30GHz	05/23/2019	05/22/2020
Antenna Connector	ARTHUR-YANG	2244-N1TG1	N/A	10Hz-30GHz	05/23/2019	05/22/2020

Remark: The temporary antenna connector is soldered on the PCB board in order to perform conducted tests and this temporary antenna connector is listed in the equipment list.

For Radiated emission Test

Item	Equipment	Manufacturer	Model No.	Serial No.	Characteristics	Last Cal.	Cal. Interval
1	Signal Analyzer	Rohde & Schwarz	FSV30	103040	9KHz-40GHz	05/23/2019	1 Year
2	Horn Antenna	Schwarzbeck	BBHA9120D	9120D-1272	1GHz-18GHz	05/23/2019	1 Year
3	Power Amplifier	LUNAR EM	LNA1G18-40	J10100000081	1GHz-26.5GHz	05/23/2019	1 Year
4	Cable	H+S	CBL-26	N/A	1GHz-26.5GHz	05/23/2019	1 Year
5	Cable	H+S	CBL-26	N/A	1GHz-26.5GHz	05/23/2019	1 Year
6	Cable	H+S	CBL-26	N/A	1GHz-26.5GHz	05/23/2019	1 Year



### 13.4 Measurement Results:

Refer to attached data chart.


Spectrum Detector: PK                      Test Date : February 17, 2020  
 Test By: Loren                              Temperature : 25 °C  
 Test Result: PASS                         Humidity : 50 %

#### 1. Conducted Test

For Non-Hopping Mode:

Frequency (MHz)	Modulation	Peak Power Output(dBm)	Result of Band edge(dBc)	Band edge Limit(dBc)
2401.82	GFSK	-3.60	30.11	>20dBc
2401.82	pi/4-DQPSK	-2.67	45.53	>20dBc
2401.82	8DPSK	-3.66	30.18	>20dBc
2479.82	GFSK	-2.74	45.78	>20dBc
2479.82	pi/4-DQPSK	-6.53	43.97	>20dBc
2479.82	8DPSK	-3.87	51.31	>20dBc

#### Test plots of GFSK

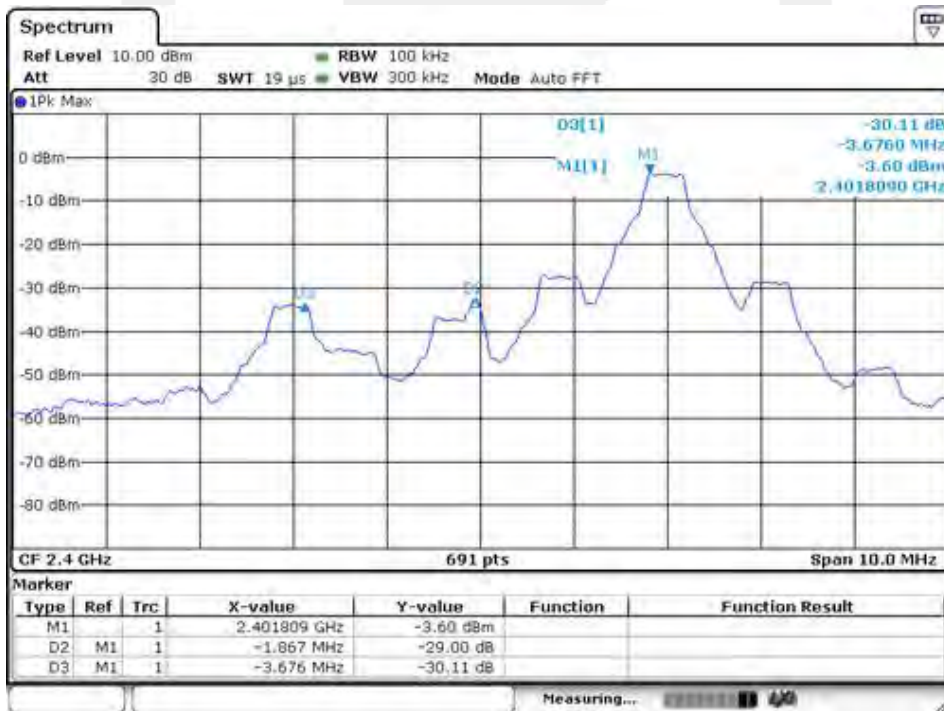





## Test plots of pi/4-DQPSK





## Test plots of 8DPSK

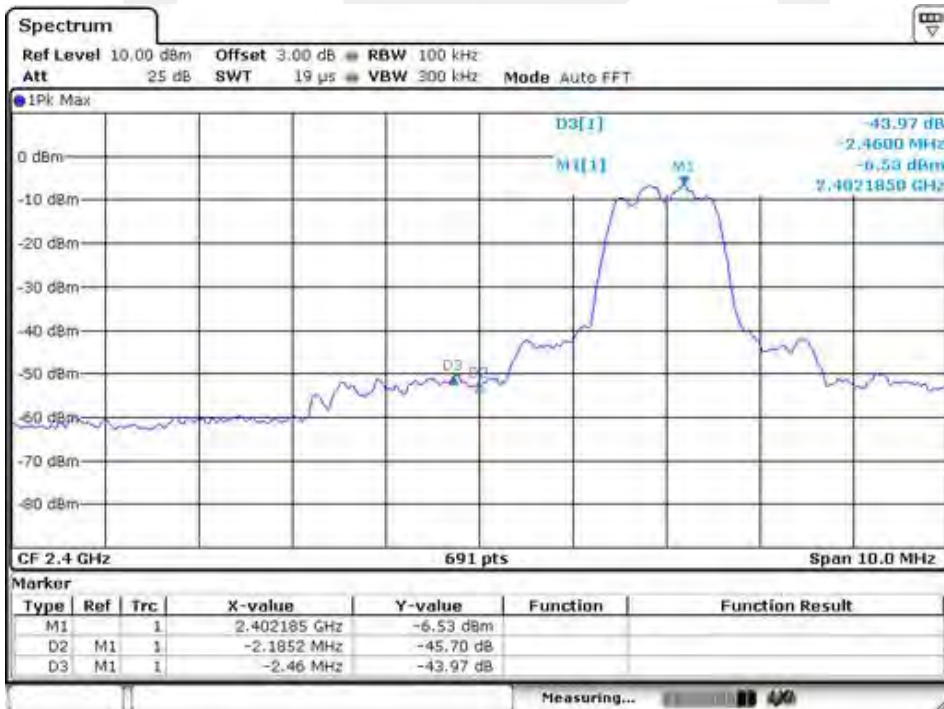


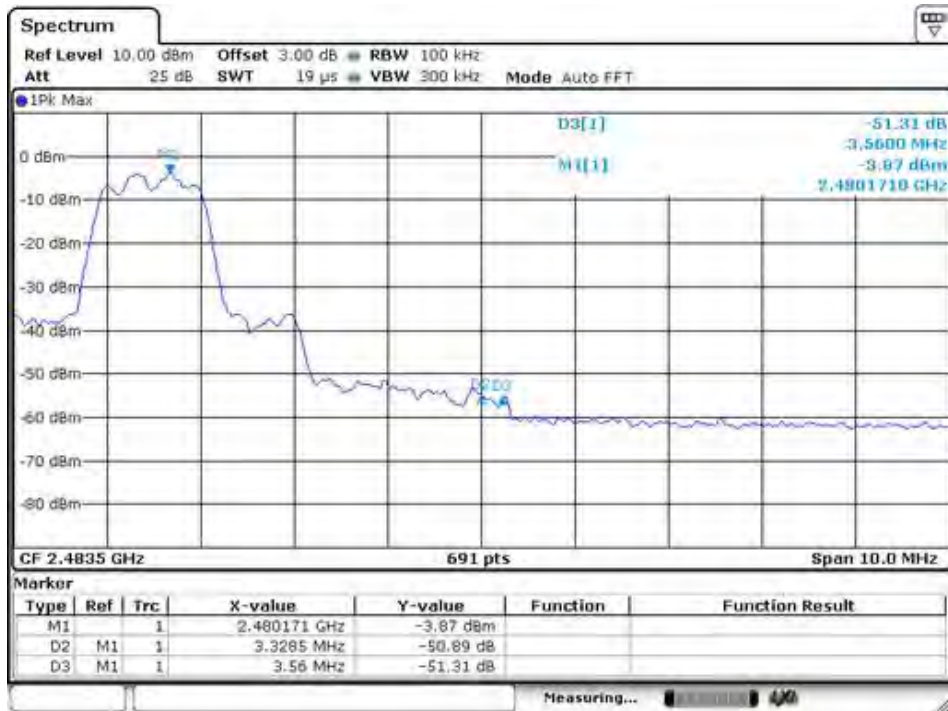

For Hopping Mode:


Frequency (MHz)	Modulation	Peak Power Output(dBm)	Result of Band edge(dBc)	Band edge Limit(dBc)
2401.82	GFSK	-3.87	30.52	>20dBc
2401.82	pi/4-DQPSK	-2.71	46.53	>20dBc
2401.82	8DPSK	-3.74	30.30	>20dBc
2479.82	GFSK	-2.89	47.42	>20dBc
2479.82	pi/4-DQPSK	-0.77	55.72	>20dBc
2479.82	8DPSK	2.14	58.25	>20dBc

### Test plots of GFSK

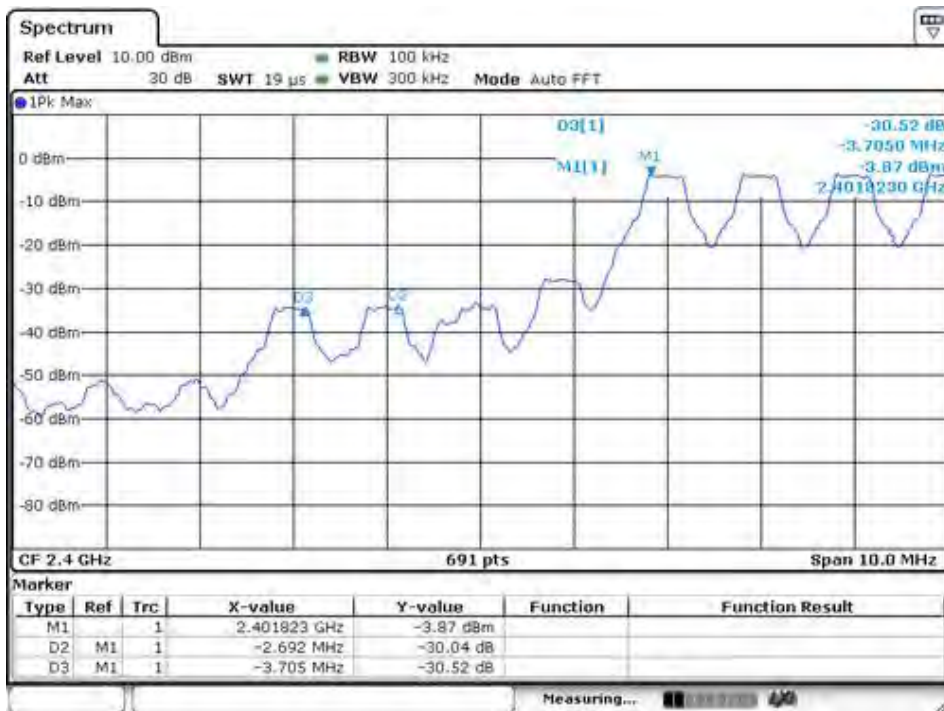





## Test plots of pi/4-DQPSK

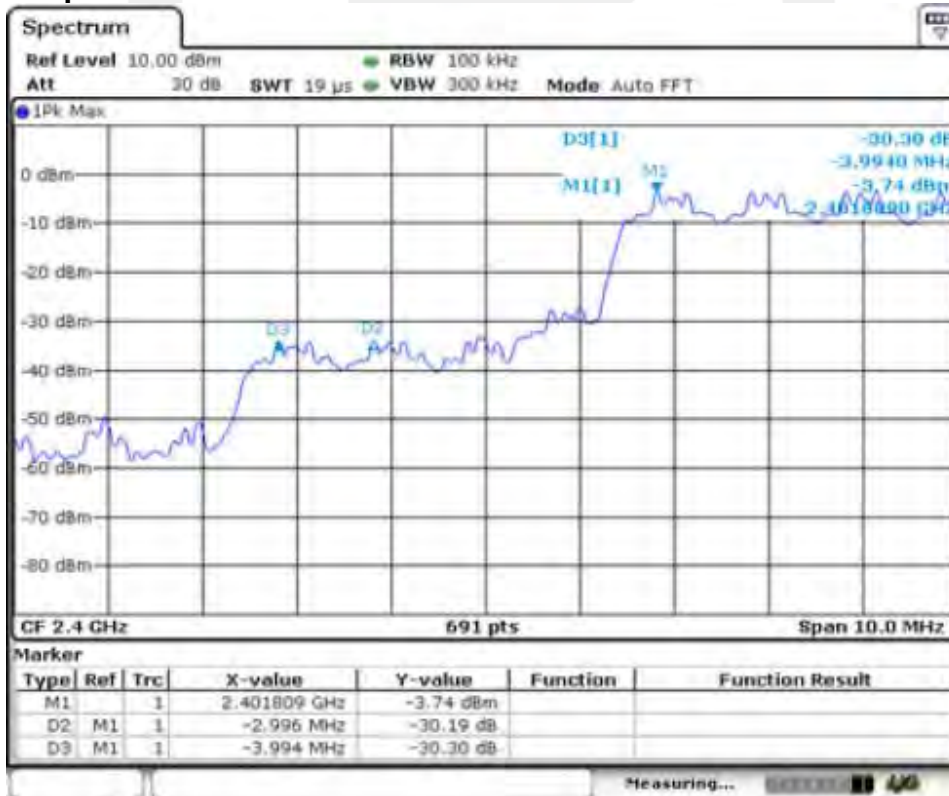




## Test plots of 8DPSK

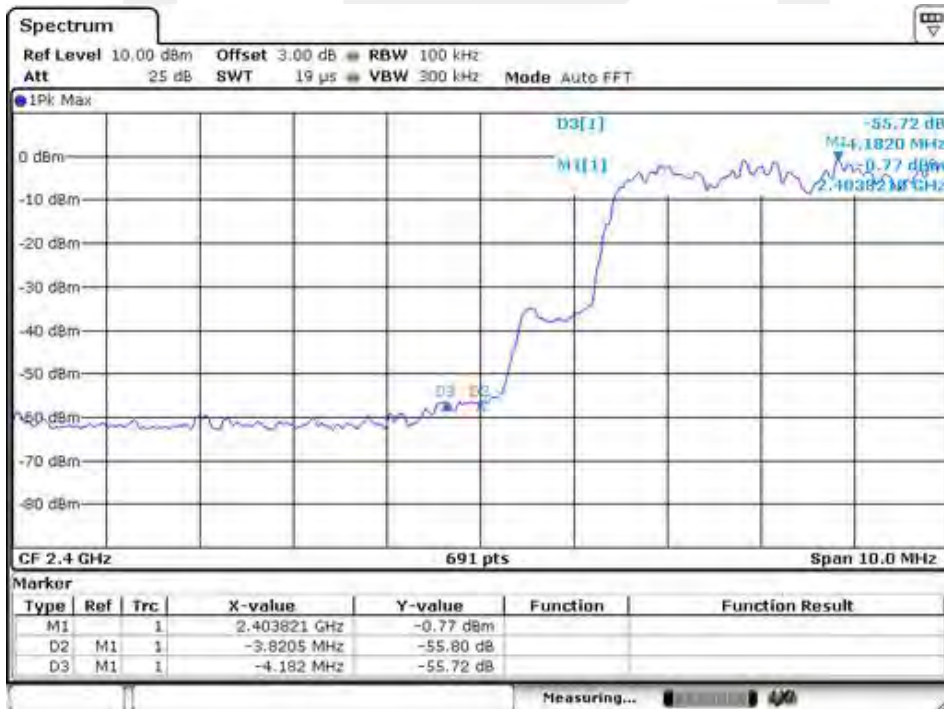

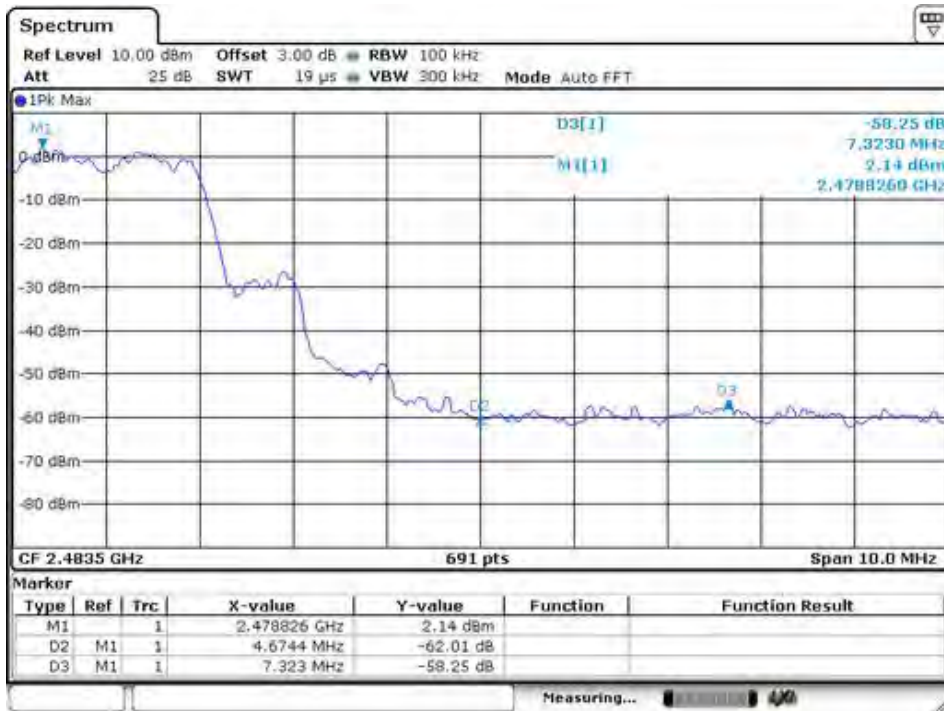



2. Radiated emission Test  
**Worst test modulation 8DPSK**  
 For Non-Hopping Mode:

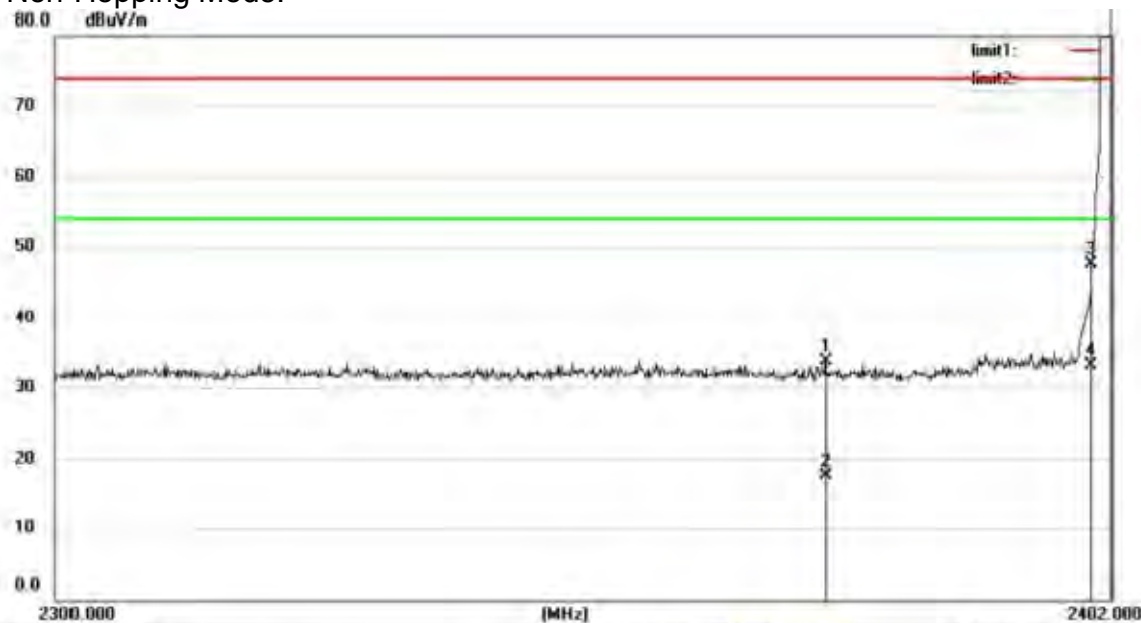

Site Chamber #1 Polarization: **Horizontal** Temperature: 26  
 Limit: (RE)RSS 247 3m\_PEAK Power: Battery 3.7V Humidity: 55 %


Mode: DSS (TX2402)

Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Antenna Height cm	Table Degree	Comment
1		2373.950	54.70	-21.00	33.70	74.00	-40.30	peak			
2		2373.950	38.54	-21.00	17.54	54.00	-36.46	AVG			
3		2400.000	68.52	-20.93	47.59	74.00	-26.41	peak			
4		2400.000	54.10	-20.93	33.17	54.00	-20.83	AVG			
5	*	2401.796	107.40	-20.93	86.47	74.00	12.47	peak			

\*:Maximum data x:Over limit l:over margin

Operator: washington

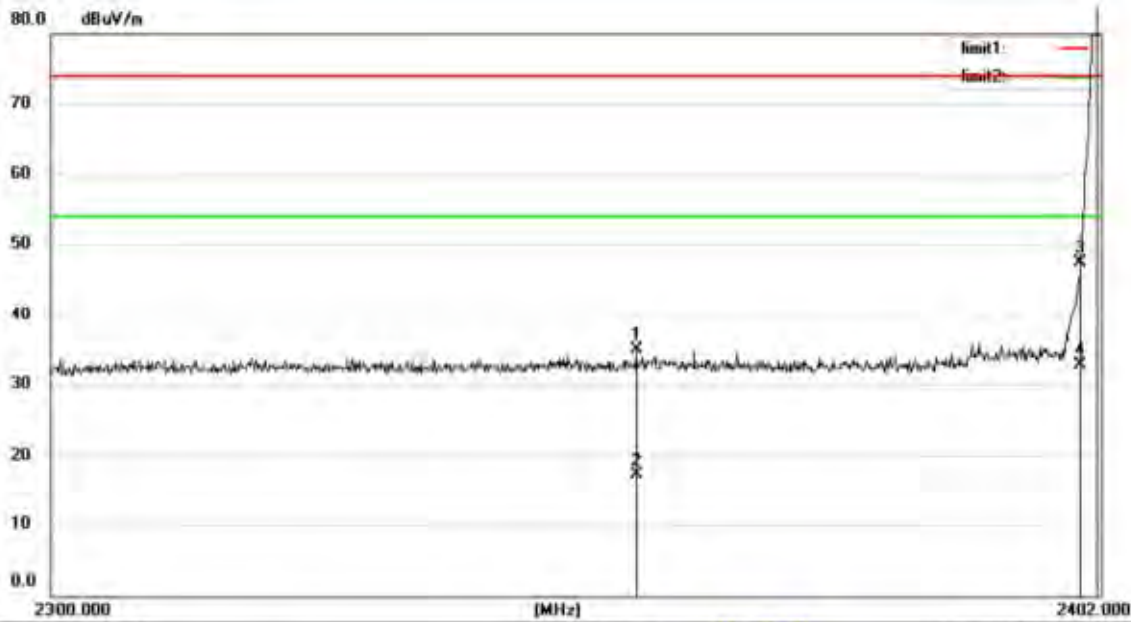


Site: Chamber #1      Polarization: **Vertical**      Temperature: 26  
 Limit: (RE)RSS 247 3m\_PEAK      Power: Battery 3.7V      Humidity: 55 %  
 Mode: DSS (TX2402)  
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		2356.202	54.98	-20.04	34.94	74.00	-39.06			peak
2		2356.202	37.15	-20.04	17.11	54.00	-36.89			AVG
3		2400.000	67.12	-19.77	47.35	74.00	-26.65			peak
4		2400.000	52.44	-19.77	32.67	54.00	-21.33			AVG
5	*	2401.592	106.03	-19.76	86.27	74.00	12.27			peak

\*:Maximum data    x:Over limit    !:over margin

Operator: washington

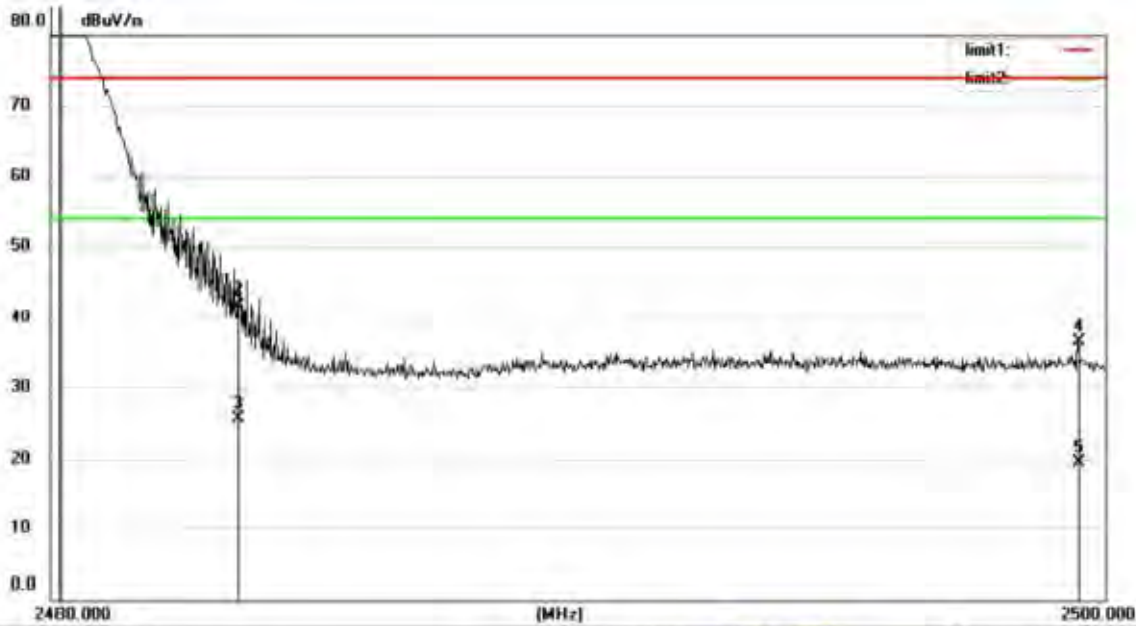


Site Chamber #1 Polarization: **Horizontal** Temperature: 26  
 Limit: (RE)RSS 247 3m\_PEAK Power: Battery 3.7V Humidity: 55 %  
 Mode: DSS (TX2480)  
 Note:

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	Antenna	Table	
		MHz	Level	Factor	ment			Height	Degree	Comment
			dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	
1	*	2480.140	112.76	-20.71	92.05	74.00	18.05			peak
2		2483.500	62.49	-20.72	41.77	74.00	-32.23			peak
3		2483.500	46.25	-20.72	25.53	54.00	-28.47			AVG
4		2499.480	57.22	-20.66	36.56	74.00	-37.44			peak
5		2499.480	40.15	-20.66	19.49	54.00	-34.51			AVG

\*:Maximum data x:Over limit l:over margin

Operator: washington

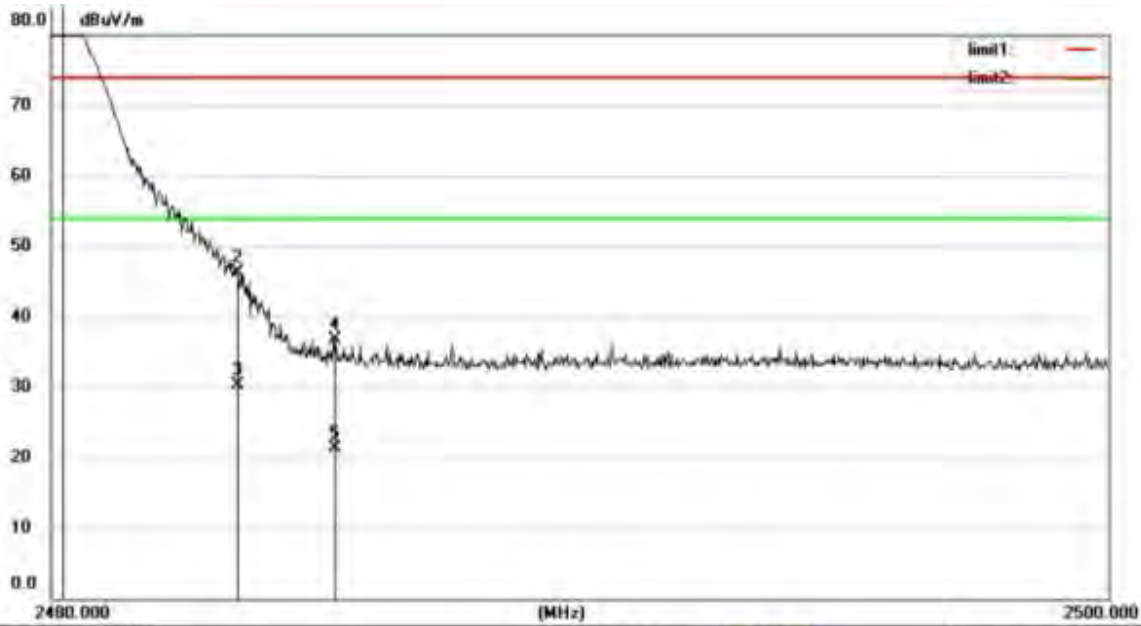


Site Chamber #1      Polarization: **Vertical**      Temperature 26  
 Limit: (RE)RSS 247 3m\_PEAK      Power: Battery 3.7V      Humidity: 55 %  
 Mode: DSS (TX2480)  
 Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Antenna Height cm	Table Degree	Comment
1	*	2480.200	110.19	-19.28	90.91	74.00	16.91	peak			
2		2483.500	65.64	-19.27	46.37	74.00	-27.63	peak			
3		2483.500	49.58	-19.27	30.31	54.00	-23.69	AVG			
4		2485.340	56.03	-19.25	36.78	74.00	-37.22	peak			
5		2485.340	40.50	-19.25	21.25	54.00	-32.75	AVG			

\*:Maximum data    x:Over limit    l:over margin

Operator: washington

For Hopping Mode:

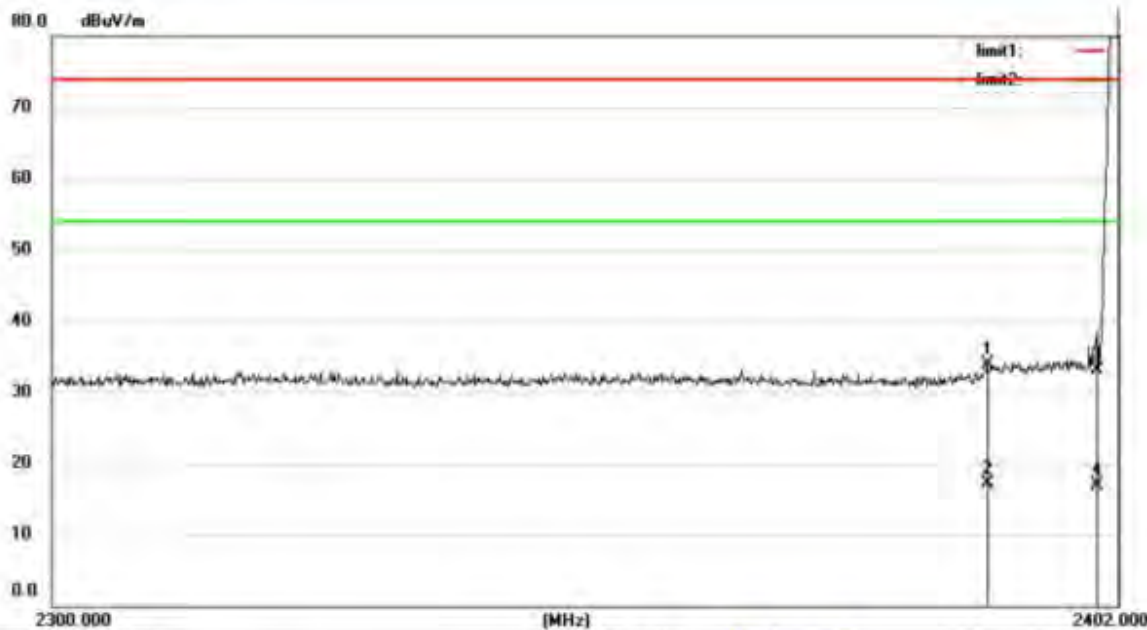

Site Chamber #1 Polarization: *Horizontal* Temperature 26  
 Limit: (RE)RSS 247 3m\_PEAK Power: Battery 3.7V Humidity 55 %


Mode:Hopping

Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		2389.250	54.77	-20.96	33.81	74.00	-40.19			peak
2		2389.250	38.15	-20.96	17.19	54.00	-36.81			AVG
3		2400.000	54.05	-20.93	33.12	74.00	-40.88			peak
4		2400.000	37.89	-20.93	16.96	54.00	-37.04			AVG
5	*	2402.000	109.15	-20.93	88.22	74.00	14.22			peak

\*:Maximum data x:Over limit l:over margin

Operator: washington

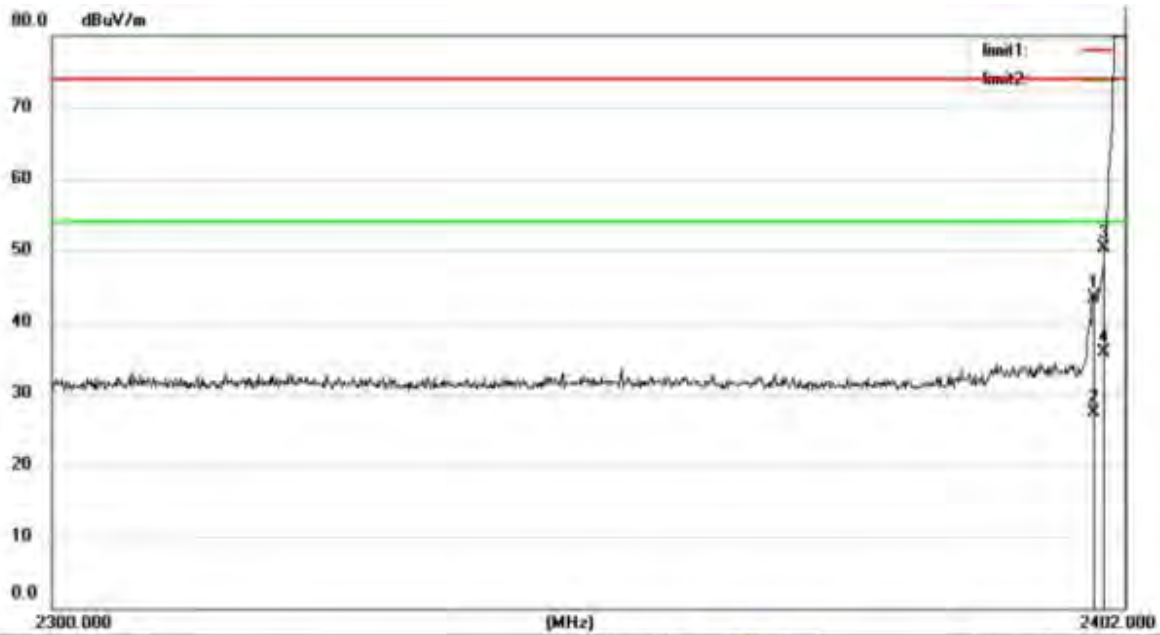

Site Chamber #1

Polarization: *Vertical*

Temperature: 26

Limit: (RE)RSS 247 3m\_PEAK

Power: Battery 3.7V

Humidity: 55 %


Mode:Hopping

Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Antenna Height cm	Table Degree degree	Comment
1		2398.940	64.14	-20.93	43.21	74.00	-30.79	peak			
2		2398.940	48.15	-20.93	27.22	54.00	-26.78	AVG			
3		2400.000	71.15	-20.93	50.22	74.00	-23.78	peak			
4		2400.000	56.69	-20.93	35.76	54.00	-18.24	AVG			
5	*	2401.898	108.80	-20.93	87.87	74.00	13.87	peak			

\*:Maximum data x:Over limit l:over margin

Operator: washington

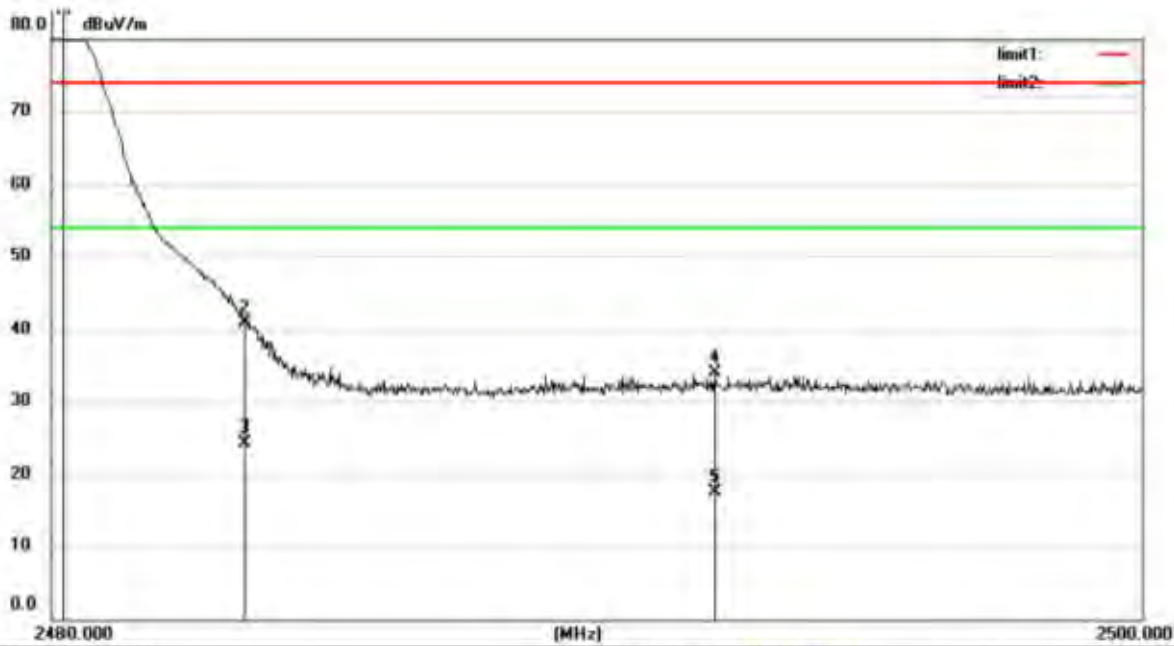


Site Chamber #1      Polarization: **Horizontal**      Temperature: 26  
 Limit: (RE)RSS 247 3m\_PEAK      Power: Battery 3.7V      Humidity: 55 %  
 Mode: Hopping  
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1	*	2480.200	105.06	-20.71	84.35	74.00	10.35			peak
2		2483.500	61.72	-20.72	41.00	74.00	-33.00			peak
3		2483.500	45.12	-20.72	24.40	54.00	-29.60			AVG
4		2492.160	54.54	-20.69	33.85	74.00	-40.15			peak
5		2492.160	38.14	-20.69	17.45	54.00	-36.55			AVG

\*:Maximum data    x:Over limit    !:over margin

Operator: washington

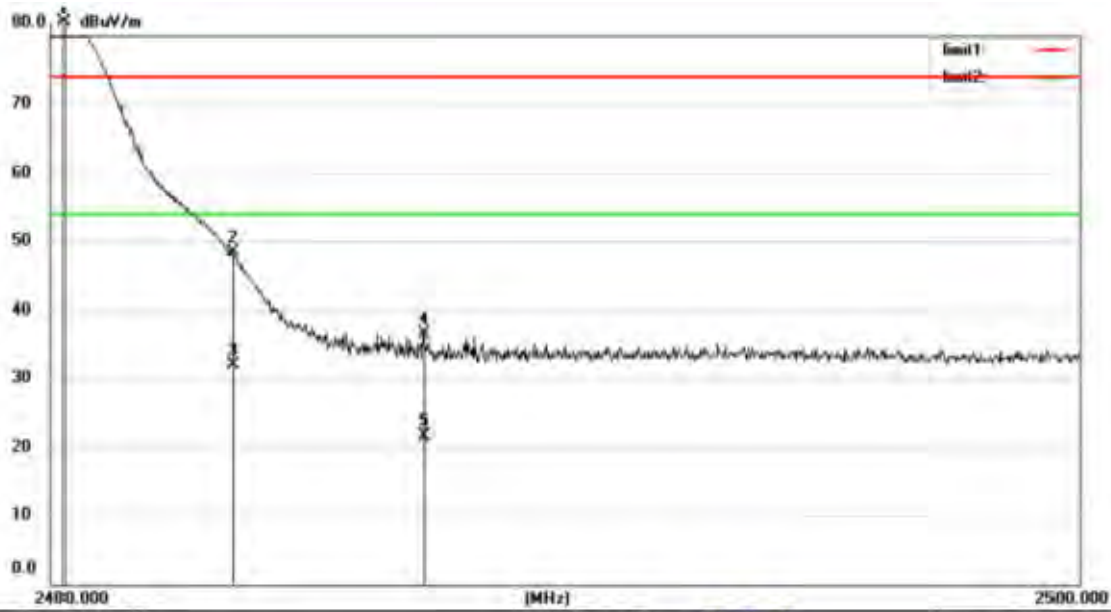

Site: Chamber #1      Polarization: *Vertical*      Temperature: 26  
 Limit: (RE)RSS 247 3m\_PEAK      Power: Battery 3.7V      Humidity: 55 %  
 Mode: Hopping  
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1	*	2480.220	101.30	-19.28	82.02	74.00	8.02			peak
2		2483.500	67.62	-19.27	48.35	74.00	-25.65			peak
3		2483.500	51.20	-19.27	31.93	54.00	-22.07			AVG
4		2487.240	55.65	-19.24	36.41	74.00	-37.59			peak
5		2487.240	40.69	-19.24	21.45	54.00	-32.55			AVG

\*:Maximum data    x:Over limit    !:over margin

Operator: washington



## 14. Antenna Application

### 14.1 Antenna requirement


The EUT'S antenna is met the requirement of FCC part 15C section 15.203 and 15.247.

FCC part 15C section 15.247 requirements:

Systems operating in the 2402-2480MHz band that are used exclusively for fixed, point-to-point operations may employ transmitting antennas with directional gain greater than 6dBi provided the maximum peak output power of the intentional radiator is reduced by 1dB for every 3dB that the directional gain of the antenna exceeds 6dBi.

### 14.2 Result


The EUT's antenna, permanent attached antenna, used a PCB antenna and integrated on PCB, The antenna's gain is 0 Bi and meets the requirement.


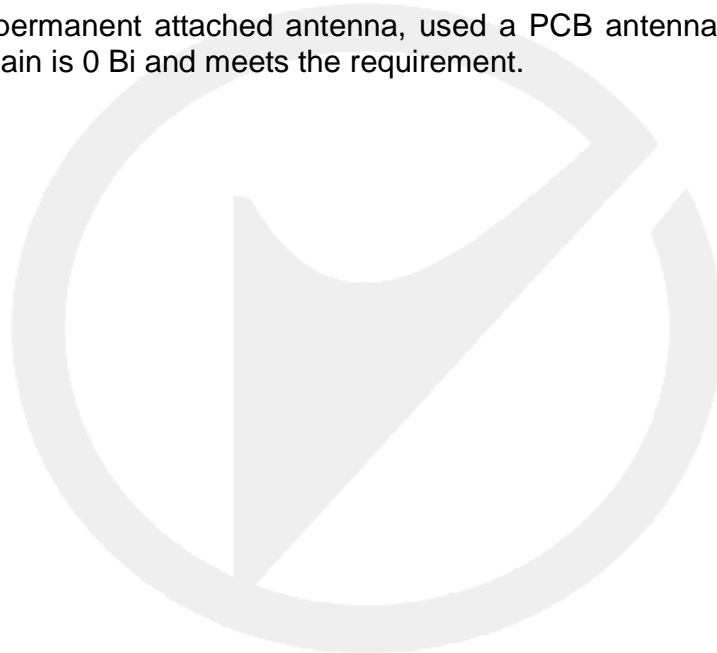


## 15. Photos of EUT





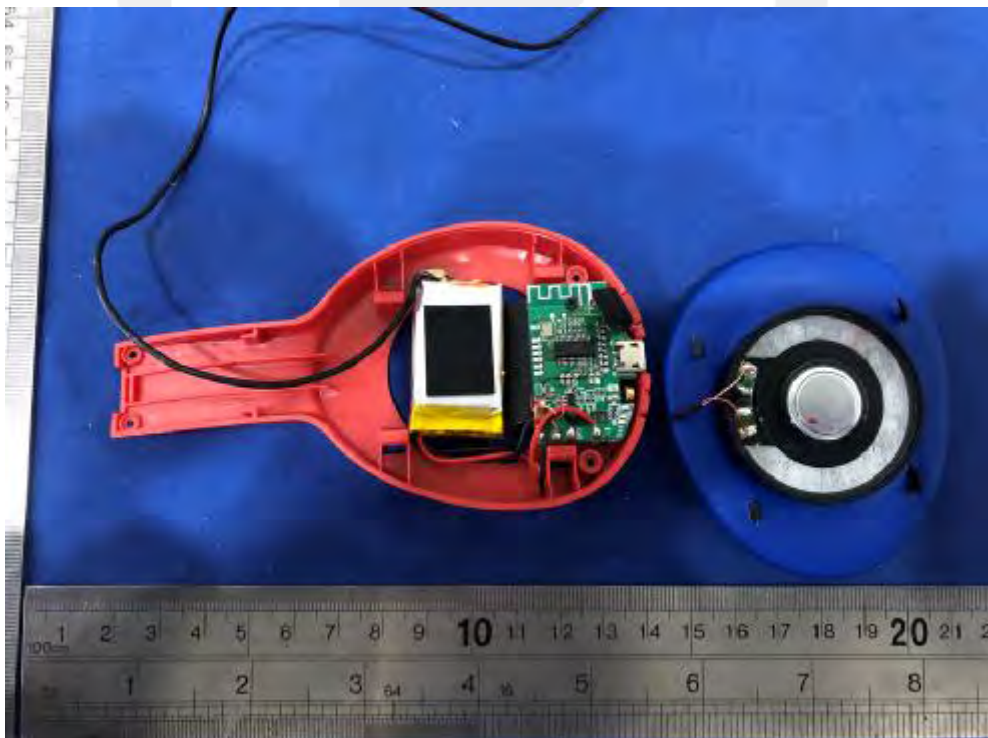

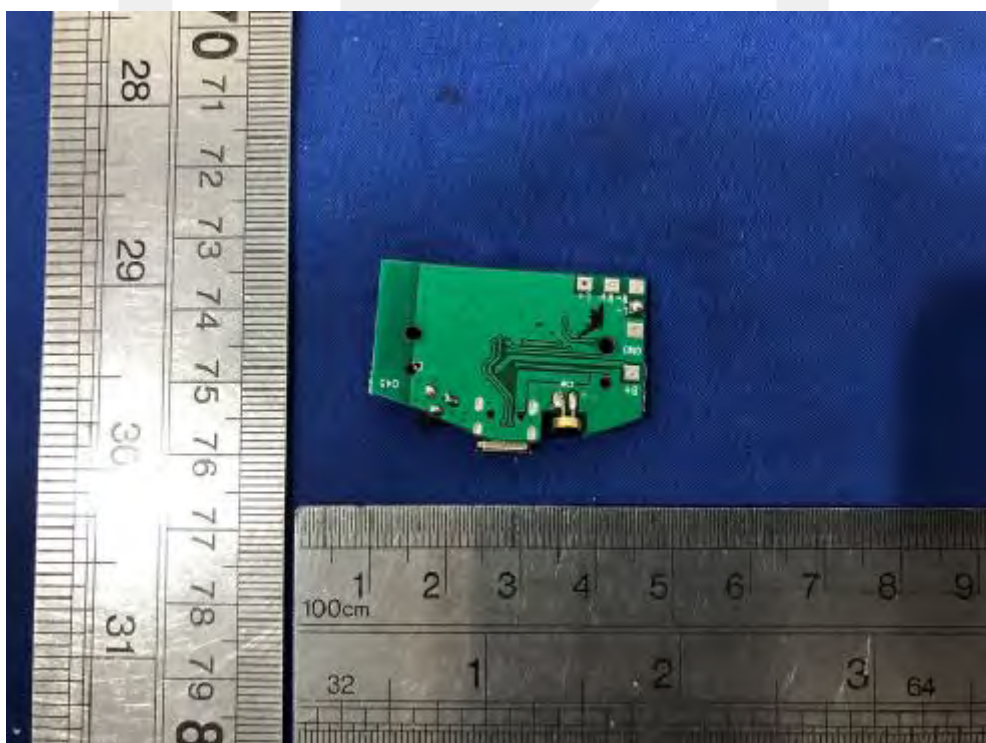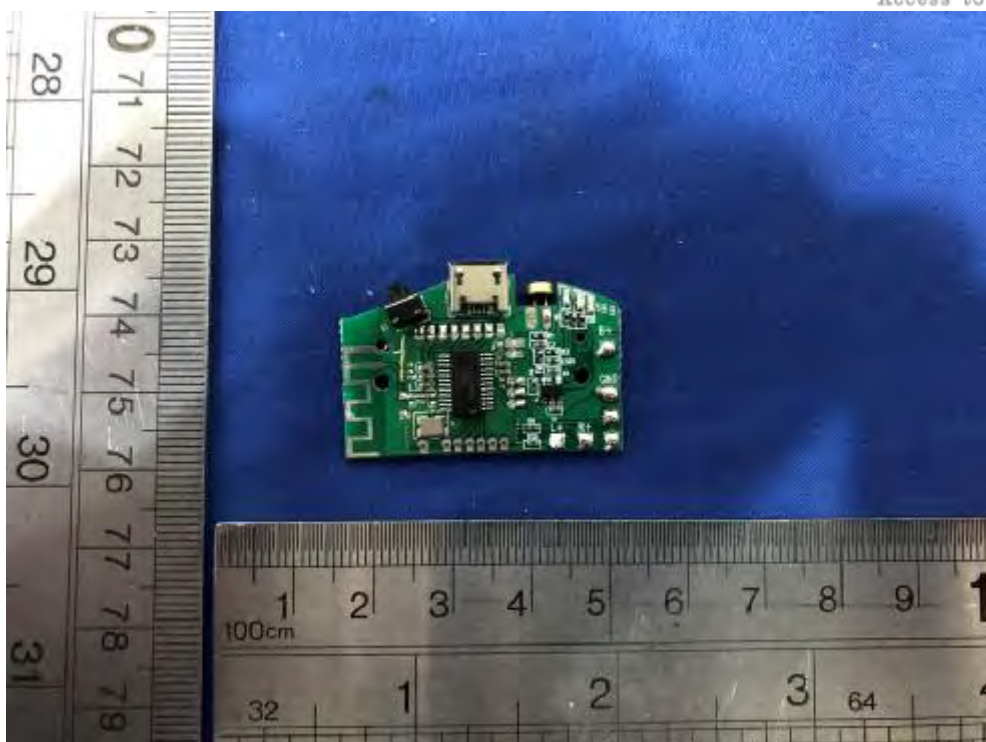



\*\*\* End of Report \*\*\*

# 声明 Statement

1. 本报告无授权批准人签字及“检验报告专用章”无效；  
This report will be void without authorized signature or special seal for testing report.
2. 未经许可本报告不得部分复制；  
This report shall not be copied partly without authorization.
3. 本报告的检测结果仅对送测样品有效，委托方对样品的代表性和资料的真实性负责；  
The test results or observations are applicable only to tested sample. Client shall be responsible for representativeness of the sample and authenticity of the material.
4. 本检测报告中检测项目标注有特殊符号则该项目不在资质认定范围内，仅作为客户委托、科研、教学或内部质量控制等目的使用；  
The observations or tests with special mark fall outside the scope of accreditation, and are only used for purpose of commission, research, training, internal quality control etc.
5. 本检测报告以实测值进行符合性判定，未考虑不确定度所带来的风险，本实验室不承担相关责任，特别约定、标准或规范中有明确规定的除外；  
The test results or observations are provided in accordance with measured value, without taking risks caused by uncertainty into account. Without explicit stipulation in special agreements, standards or regulations, EMTEK shall not assume any responsibility.
6. 对本检测报告若有异议，请于收到报告之日起 20 日内提出；  
Objections shall be raised within 20 days from the date receiving the report.