

# Itron, Inc.

## TEST REPORT FOR

### CCU100

**Models: CCU100C\* and CCU100RC\***  
(\*See Appendix A for Manufacturer Declaration)

### Tested to The Following Standards:

#### FCC Part 15 Subpart C Section(s)

**15.207 & 15.247**  
**(FHSS 902-928 MHz)**

**Report No.: 103221-2**

**Date of issue: April 17, 2020**



**Test Certificate # 803.01**

This test report bears the accreditation symbol indicating that the testing performed herein meets the test and reporting requirements of ISO/IEC 17025 under the applicable scope of testing for CKC Laboratories, Inc.

We strive to create long-term, trust based relationships by providing sound, adaptive, customer first testing services. We embrace each of our customers' unique EMC challenges, not as an interruption to set processes, but rather as the reason we are in business.

This report contains a total of 136 pages and may be reproduced in full only. Partial reproduction may only be done with the written consent of CKC Laboratories, Inc.

**TABLE OF CONTENTS**

Administrative Information ..... 3

    Test Report Information ..... 3

    Report Authorization ..... 3

    Test Facility Information ..... 4

    Software Versions ..... 4

    Site Registration & Accreditation Information ..... 4

    Summary of Results ..... 5

    Modifications During Testing ..... 5

    Conditions During Testing ..... 5

    Equipment Under Test ..... 6

    General Product Information ..... 7

FCC Part 15 Subpart C ..... 8

    15.247(a) Transmitter Characteristics ..... 8

        15.247(a)(1)(i) 20 dB Bandwidth ..... 9

        15.247(a)(1) Carrier Separation ..... 15

        15.247(a)(1)(i) Number of Hopping Channels ..... 17

    15.247(b)(1) Output Power ..... 20

        15.35(c) Duty Cycle Correction Factor ..... 26

    15.247(d) RF Conducted Emissions & Band Edge ..... 27

    15.247(d) Radiated Emissions & Band Edge ..... 53

    15.207 AC Conducted Emissions ..... 121

Appendix A: Manufacturer Declaration ..... 134

Supplemental Information ..... 135

    Measurement Uncertainty ..... 135

    Emissions Test Details ..... 135

## ADMINISTRATIVE INFORMATION

### Test Report Information

**REPORT PREPARED FOR:**

Itron, Inc.  
2111 N. Molter Road  
Liberty Lake WA 99019

Representative: Jay Holcomb  
Customer Reference Number: 193369

**DATE OF EQUIPMENT RECEIPT:**

**DATE(S) OF TESTING:**

**REPORT PREPARED BY:**

Terri Rayle  
CKC Laboratories, Inc.  
5046 Sierra Pines Drive  
Mariposa, CA 95338

Project Number: 103221

December 13, 2019

December 13-18, 2019, January 21-25, 2020

April 15-16, 2020 and May 1, 2020

### Report Authorization

The test data contained in this report documents the observed testing parameters pertaining to and are relevant for only the equipment provided by the client, tested in the agreed upon operational mode(s) and configuration(s) as identified herein. Compliance assessment remains the client's responsibility. This report may not be used to claim product endorsement by A2LA or any government agencies. This test report has been authorized for release under quality control from CKC Laboratories, Inc.



**Steve Behm**  
*Director of Quality Assurance & Engineering Services*  
*CKC Laboratories, Inc.*

## Test Facility Information



Our laboratories are configured to effectively test a wide variety of product types. CKC utilizes first class test equipment, anechoic chambers, data acquisition and information services to create accurate, repeatable and affordable test results.

TEST LOCATION(S):  
CKC Laboratories, Inc.  
22116 23rd Drive S.E., Suite A  
Canyon Park, Bothell, WA 98021

## Software Versions

CKC Laboratories Proprietary Software	Version
EMITest Emissions	5.03.12

## Site Registration & Accreditation Information

Location	*NIST CB #	FCC	Japan
Canyon Park, Bothell, WA	US0081	US1022	A-0136
Brea, CA	US0060	US1025	A-0136
Fremont, CA	US0082	US1023	A-0136
Mariposa, CA	US0103	US1024	A-0136

\*CKC's list of NIST designated countries can be found at: <https://standards.gov/cabs/designations.html>

## SUMMARY OF RESULTS

### Standard / Specification: FCC Part 15 Subpart C - 15.247 (FHSS 902-928MHz)

Test Procedure	Description	Modifications	Results
15.247(a)(1)(i)	Occupied Bandwidth	Mod. #1 and #2	Pass
15.247(a)(1)	Carrier Separation	Mod. #1 and #2	Pass
15.247(a)(1)(i)	Number of Hopping Channels	Mod. #1 and #2	Pass
15.247(a)(1)(i)	Average Time of Occupancy	Mod. #1 and #2	NP
15.247(b)(2)	Output Power	Mod. #1 and #2	Pass
15.247(d)	RF Conducted Emissions & Band Edge	Mod. #1 and #2	Pass
15.247(d)	Radiated Emissions & Band Edge	Mod. #1 and #2	Pass
15.207	AC Conducted Emissions	Mod. #1 and #2	Pass

NA = Not Applicable

NP = CKC Laboratories was not contracted to perform test.

#### ISO/IEC 17025 Decision Rule

The declaration of pass or fail herein is based upon assessment to the specification(s) listed above, including where applicable, assessment of measurement uncertainties. For performance related tests, equipment was monitored for specified criteria identified in that section of testing.

## Modifications During Testing

This list is a summary of the modifications made to the equipment during testing.

#### Summary of Conditions

Modification #1: Added ferrite Laird Technologies – 28B0355-000 with no turns on battery cable.

Modification #2: Mounting plate ground was removed

**Modifications listed above must be incorporated into all production units.**

## Conditions During Testing

This list is a summary of the conditions noted to the equipment during testing.

#### Summary of Conditions

The models tested are the CCU100C and the CCU100RC.

The CCU100C becomes the CCU100RC with a different set of antennas installed. (The R is for remote, so for the remote set of antennas installed).

Models CCU100C and CCU100RC configurations were checked and worst-case provided for testing unless referenced differently in the test section.

## EQUIPMENT UNDER TEST (EUT)

During testing, numerous configurations may have been utilized. The configurations listed below support compliance to the standard(s) listed in the Summary of Results section.

### Configuration 1

*Equipment Tested:*

Device	Manufacturer	Model #	S/N
CCU100	Itron, Inc.	CCU100C	74048330

*Support Equipment:*

Device	Manufacturer	Model #	S/N
Omnidirectional Antenna	PCTEL	BOA9025NM-ITR	NA
Omnidirectional Antenna	PCTEL	MHO3G4G02NM	NA

### Configuration 2

*Equipment Tested:*

Device	Manufacturer	Model #	S/N
CCU100	Itron, Inc.	CCU100RC	74048330

*Support Equipment:*

Device	Manufacturer	Model #	S/N
Omnidirectional Antenna	PCTEL	BOA9028	NA
Omnidirectional Antenna	Taoglas	OMB.6912.03F21	NA
Attenuator 1dB (x2)	Mini Circuits	UNAT-1+	NA

### Configuration 3

*Equipment Tested:*

Device	Manufacturer	Model #	S/N
CCU100	Itron, Inc.	CCU100C	74048333


*Support Equipment:*

Device	Manufacturer	Model #	S/N
Omnidirectional Antenna	PCTEL	BOA9025NM-ITR	NA

## General Product Information:

Product Information	Manufacturer-Provided Details
Equipment Type:	Stand-Alone Equipment
Type of Wideband System:	FHSS
Operating Frequency Range:	903-926.8 MHz (FSK 12.5k and FSK 37.5k) 908-923.8MHz (AM)
Number of Hopping Channels:	120 (FSK 12.5k and FSK 37.5k) 80 (AM)
Receiver Bandwidth and Synchronization:	The manufacturer declares the receiver input bandwidth matches the transmit channel bandwidth and shifts frequencies in synchronization with the transmitter.
Modulation Type(s):	37.5 kbit/sec FM (FSK) 12.5kbit/sec FM (FSK) 16.384kbit/sec AM (OOK)
Maximum Duty Cycle:	Tested 100% Modulated
Number of TX Chains:	1
Antenna Type(s) and Gain:	Omnidirectional, 5.5dBi Omnidirectional, 8.15dBi with 2dB attenuation
Beamforming Type:	NA
Antenna Connection Type:	External Connector
Nominal Input Voltage:	115VAC
Firmware / Software used for Test:	ARM = Version 2.27.0.0, DSP = Version 7.22.0.0 and FPGA = Version 4.14, SR Test 100 version 4.11.1.42

### Test Setup Block Diagram

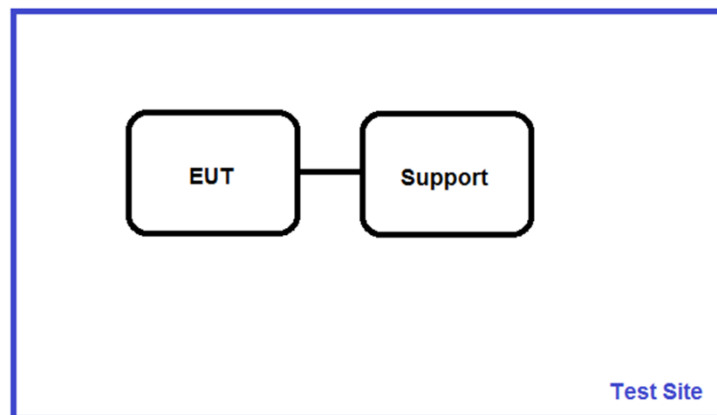

## FCC Part 15 Subpart C

### 15.247(a) Transmitter Characteristics

#### Test Setup/Conditions

Test Location:	Bothell Lab Bench	Test Engineer:	M. Harrison
Test Method:	ANSI C63.10 (2013)	Test Date(s):	4/16/2020
Configuration:	1		
Test Setup:	<p>The equipment under test (EUT) is placed on the tabletop.          The output of the EUT is connected to the spectrum analyzer using a coaxial cable and attenuator.          The EUT is transmitting at its rated output power.</p> <p>Modification #1 and #2 were in place during testing.</p>		

#### Environmental Conditions

Temperature (°C)	22	Relative Humidity (%):	35
------------------	----	------------------------	----

#### Test Equipment


Asset#	Description	Manufacturer	Model	Cal Date	Cal Due
02871	Spectrum Analyzer	Agilent	E4440A	10/15/2019	10/15/2021
P07227	Attenuator	Pasternack	PE7004-6	10/2/2019	10/2/2021




### 15.247(a)(1)(i) 20 dB Bandwidth

Test Data Summary					
Frequency (MHz)	Antenna Port	Modulation	Measured (kHz)	Limit (kHz)	Results
903	1	FM 12.5kbps	143.61	≤500	Pass
915	1	FM 12.5kbps	145.47	≤500	Pass
926.8	1	FM 12.5kbps	143.76	≤500	Pass
903	1	FM 37.5kbps	83.58	≤500	Pass
915	1	FM 37.5kbps	85.55	≤500	Pass
926.8	1	FM 37.5kbps	86.4	≤500	Pass
908	1	AM	297.54	≤500	Pass
915	1	AM	269.1	≤500	Pass
923.8	1	AM	313.45	≤500	Pass


**Plot(s)**

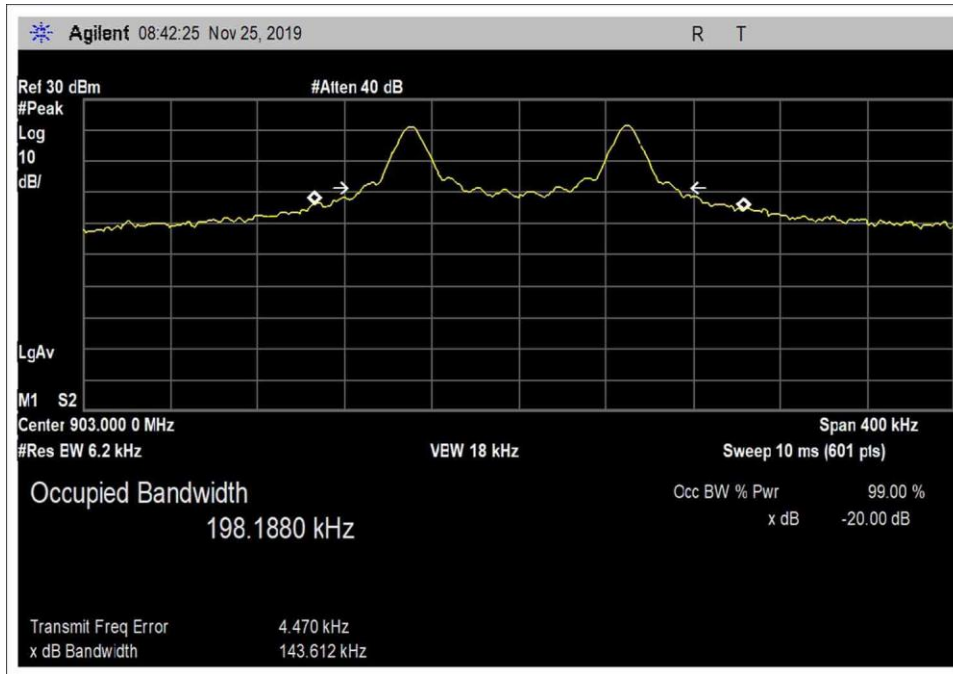


FSK Low Channel

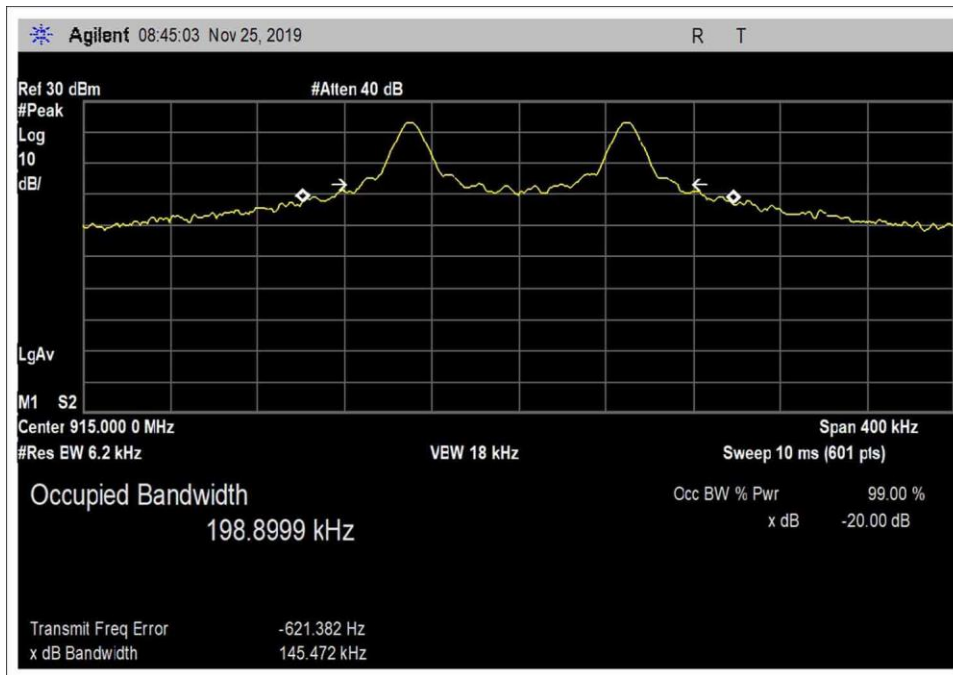


FSK Middle Channel

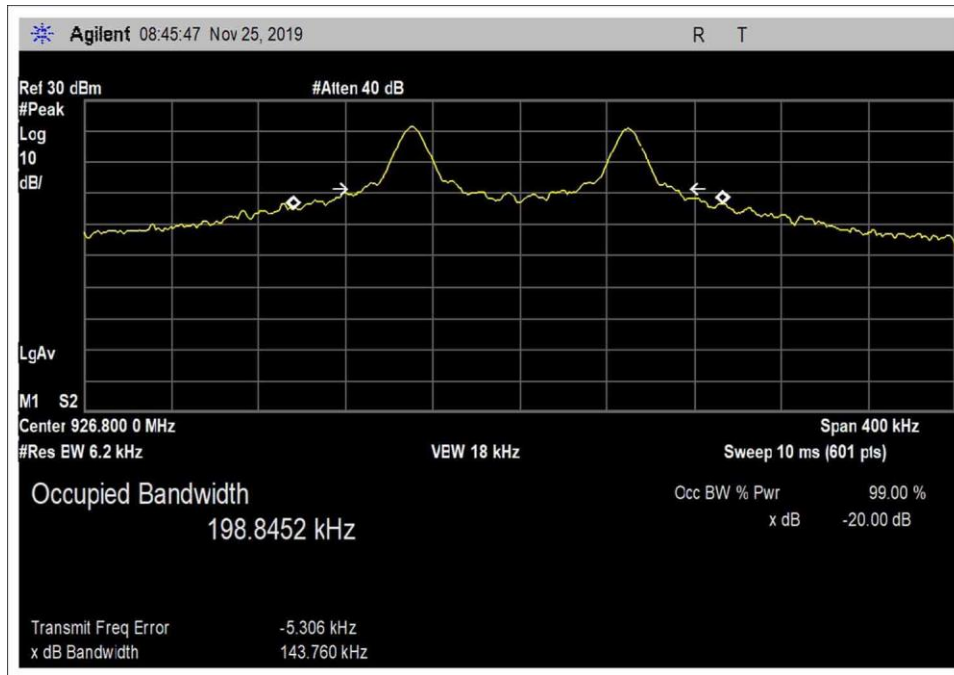


FSK High Channel

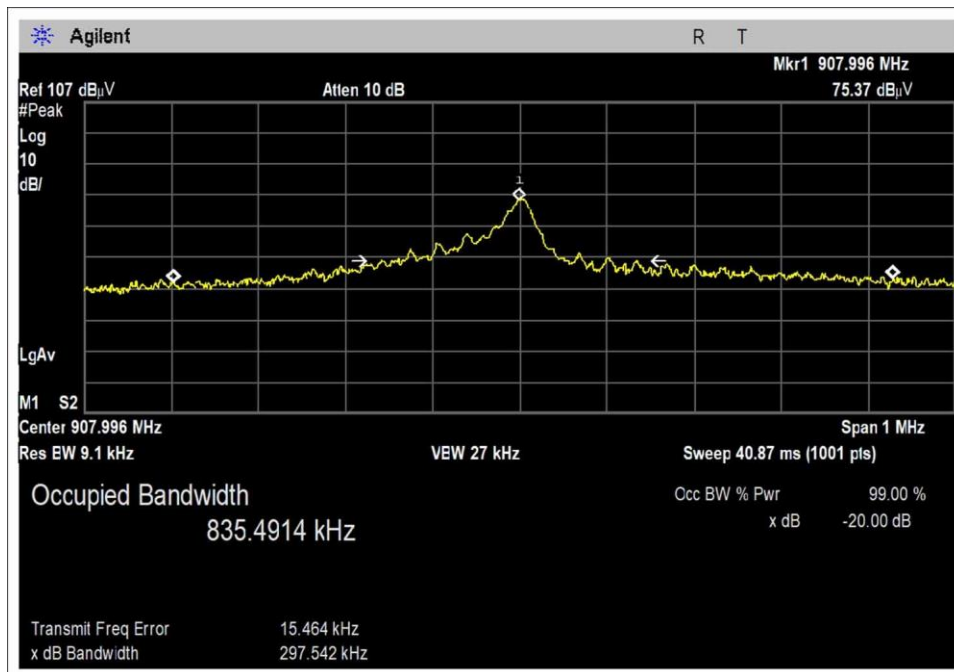


AM Low Channel

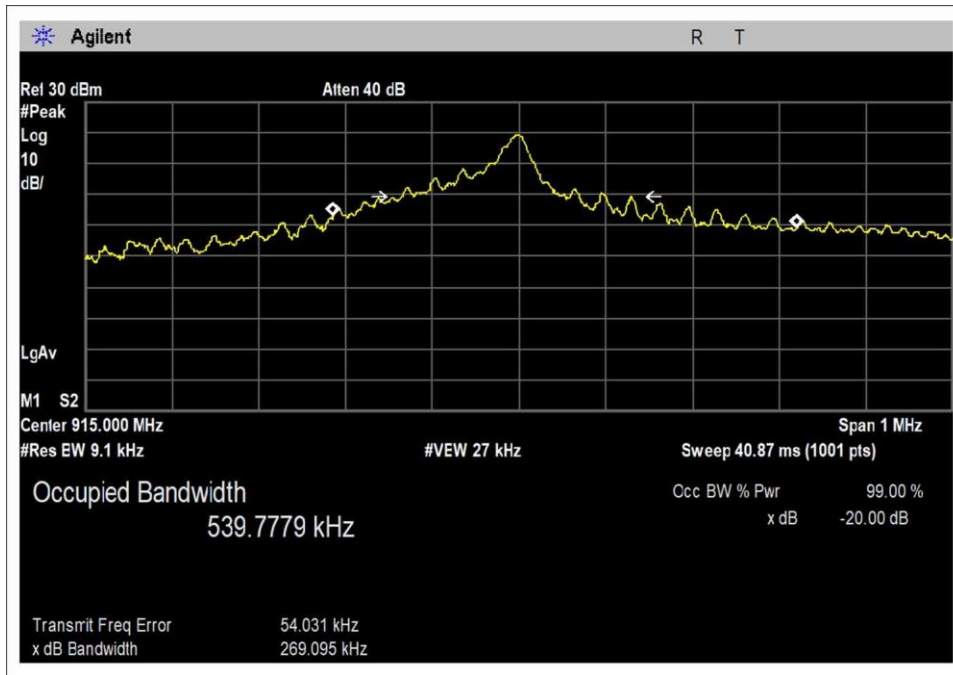


AM Middle Channel

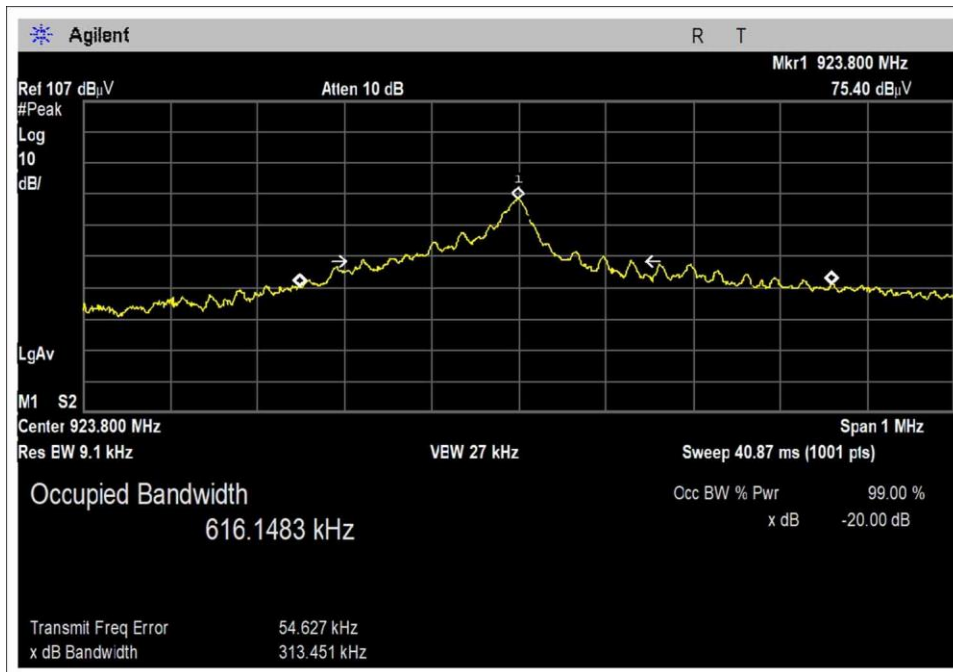


AM High Channel

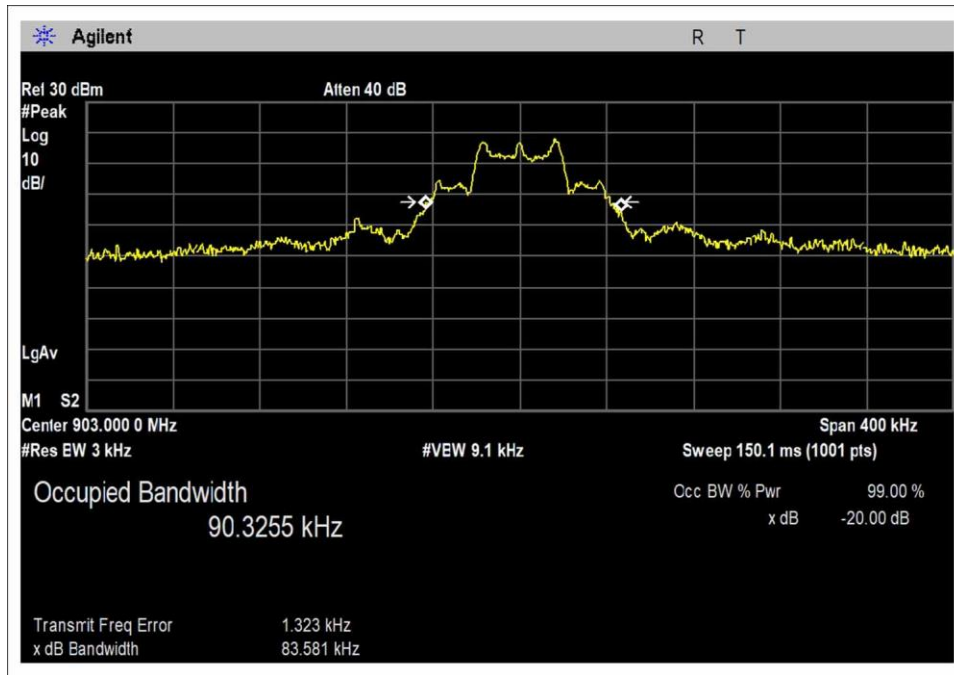

FM 37.5kbps Low Channel

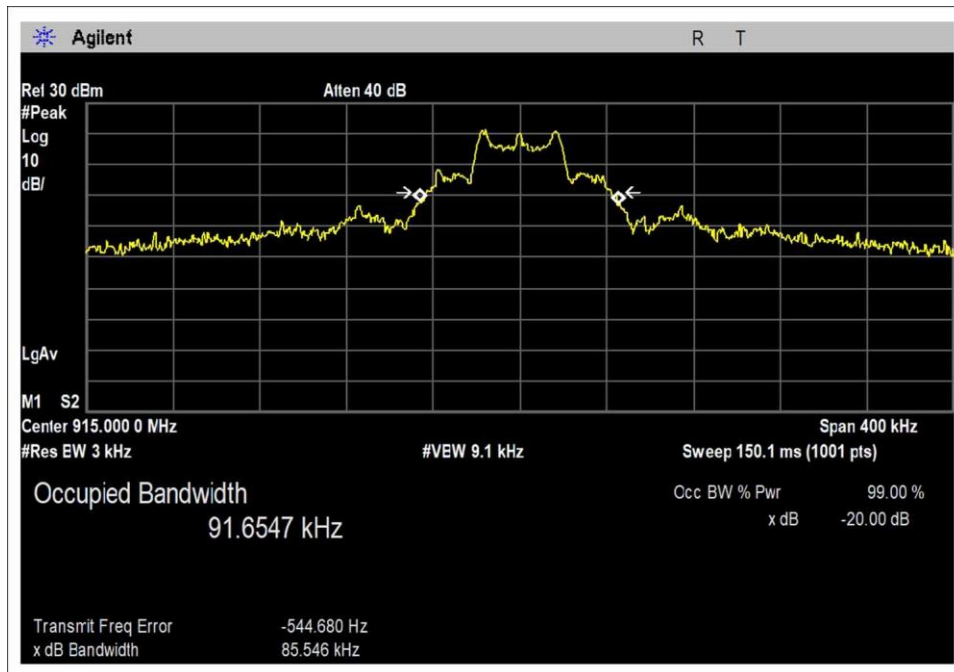

FM 37.5kbps Middle Channel

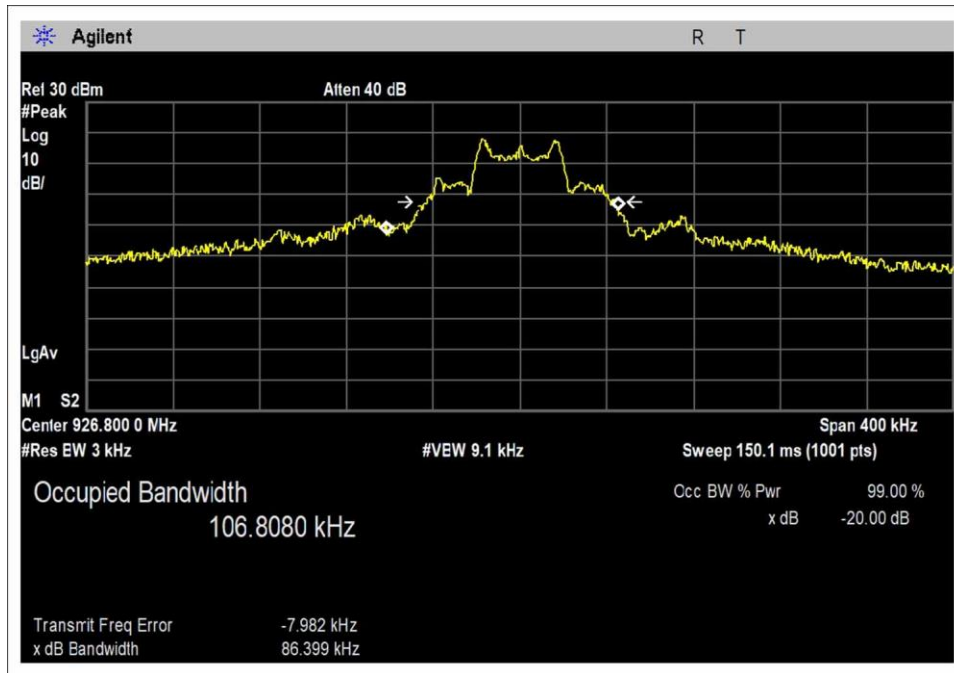



FM 37.5kbps High Channel

### 15.247(a)(1) Carrier Separation

Test Data Summary				
Limit applied: minimum 25kHz.				
Antenna Port	Operational Mode	Measured (kHz)	Limit (kHz)	Results
1	Transmitting, FSK Channel Plan	200.2	>25	Pass
1	Transmitting, AM Channel Plan	200.0	>25	Pass

### Plot(s)

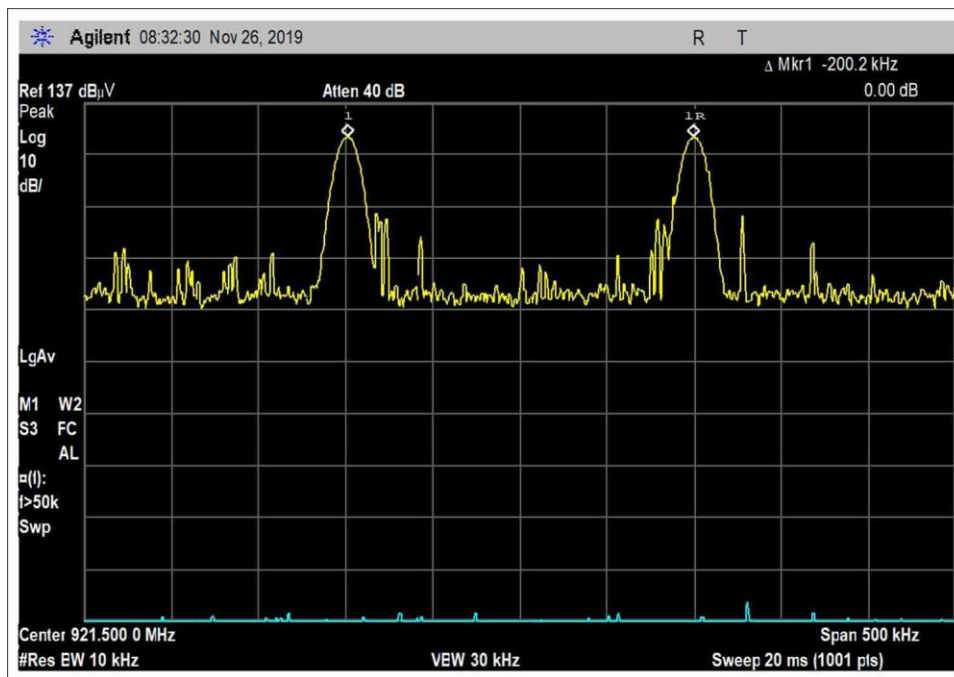

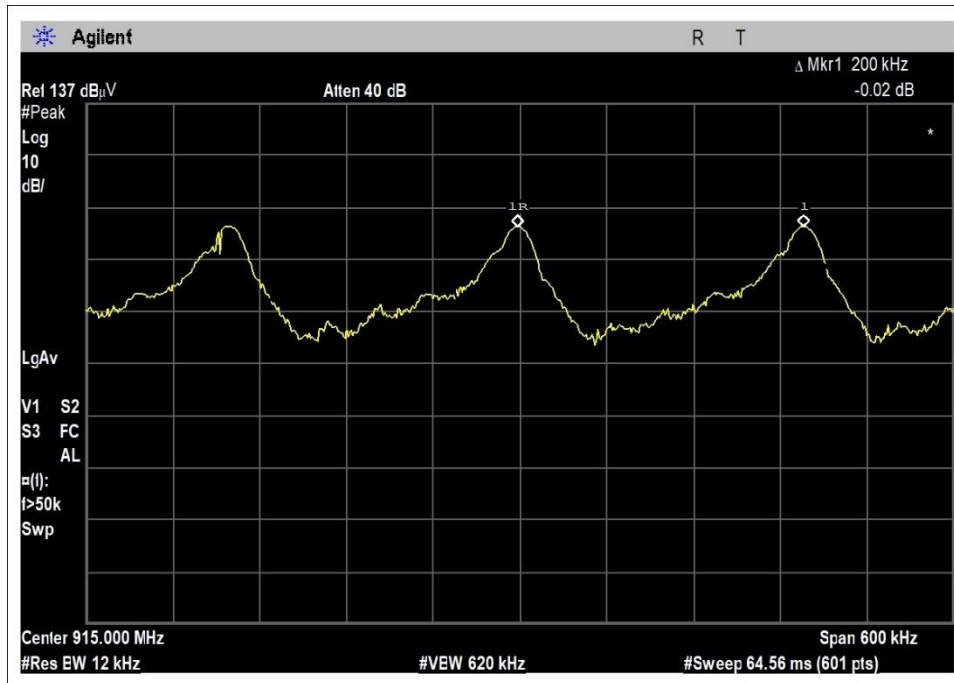






### 15.247(a)(1)(i) Number of Hopping Channels

Test Data Summary				
$Limit = \begin{cases} 50 \text{ Channels} &   20 \text{ dB BW} < 250\text{kHz} \\ 25 \text{ Channels} &   20 \text{ dB BW} \geq 250\text{kHz} \end{cases}$				
Antenna Port	Operational Mode	Measured (Channels)	Limit (Channels)	Results
1	Transmitting, FSK Channel Plan	120	$\geq 25$	Pass
1	Transmitting, AM Channel Plan	80	$\geq 25$	Pass

### Plot(s)

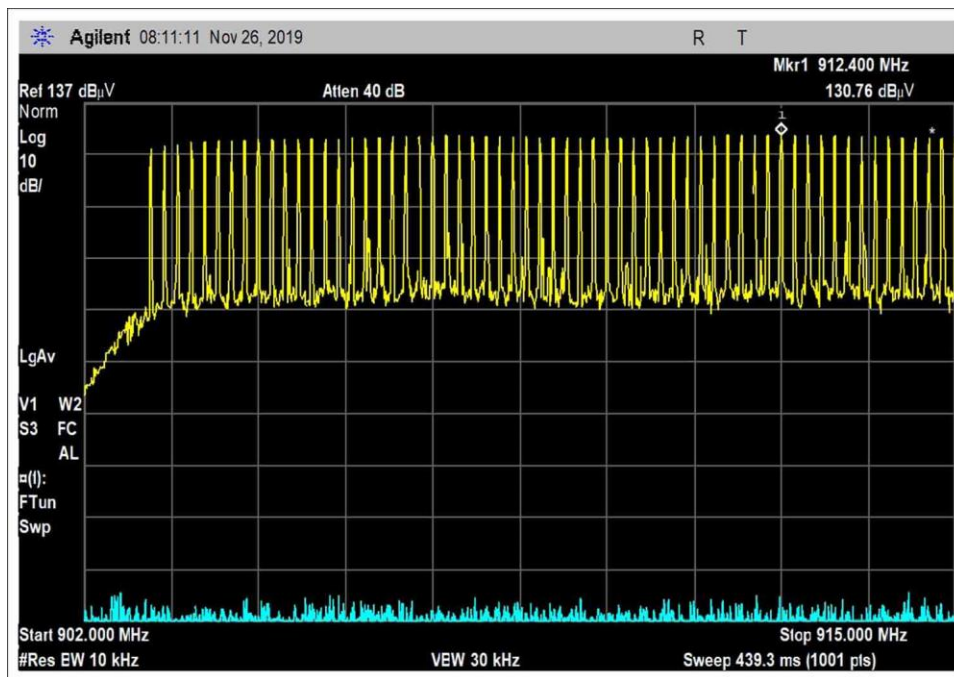

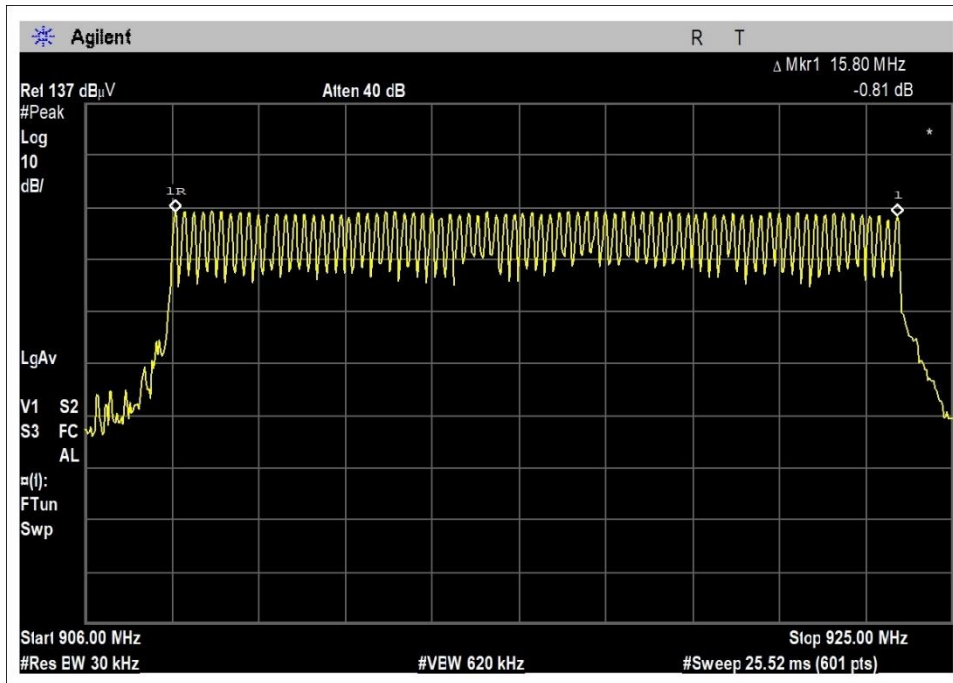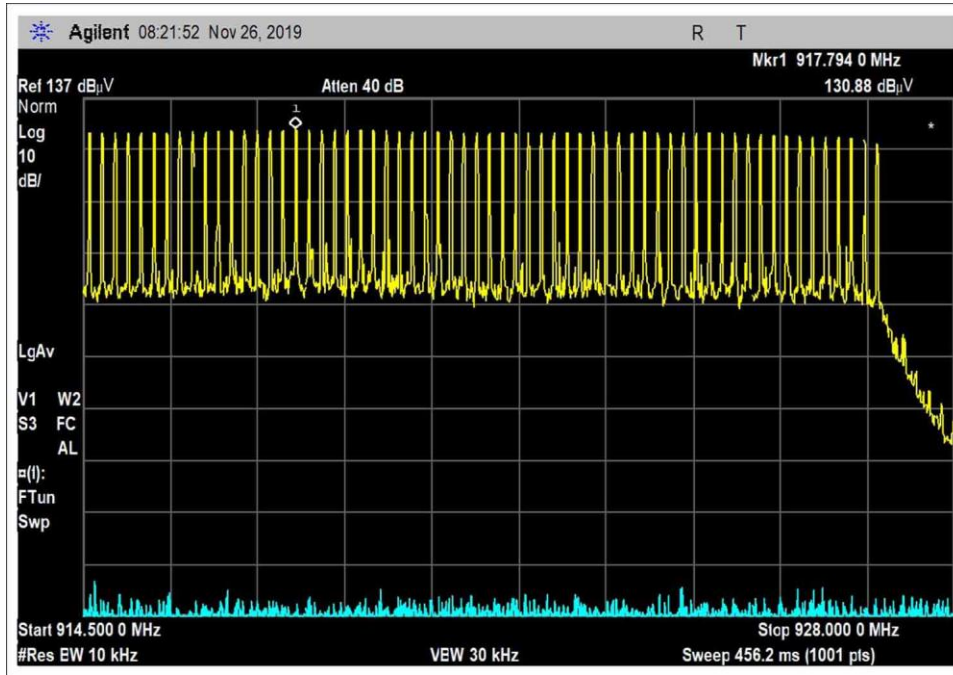

**Test Setup Photo(s)**



## 15.247(b)(1) Output Power

Test Data Summary - Voltage Variations					
Frequency (MHz)	Modulation / Ant Port	V <sub>Minimum</sub> (dBm)	V <sub>Nominal</sub> (dBm)	V <sub>Maximum</sub> (dBm)	Max Deviation from V <sub>Nominal</sub> (dB)
903	FSK 12.5kbps (worst case)/ 1	28.1	28.3	28.2	0.2
915	FSK 12.5kbps (worst case)/ 1	29.7	29.7	29.7	0.0
926.8	FSK 12.5kbps (worst case)/ 1	28.0	27.9	28.0	0.1

Test performed using operational mode with the highest output power, representing worst case.

### Parameter Definitions:

Measurements performed at input voltage V<sub>Nominal</sub> ± 15%.


Parameter	Value
V <sub>Nominal</sub> :	115
V <sub>Minimum</sub> :	98
V <sub>Maximum</sub> :	132

Test Data Summary - RF Conducted Measurement					
Configuration 1					
$\text{Limit} = \begin{cases} 30\text{dBm Conducted}/36\text{dBm EIRP} &   \geq 50 \text{ Channels} \\ 24\text{dBm Conducted}/30\text{dBm EIRP} &   < 50 \text{ Channels (min 25)} \end{cases}$					
Frequency (MHz)	Modulation / Ant Port	Ant. Type / Gain (dBi)	Measured (dBm)	Limit (dBm)	Results
903	FSK 12.5kbps (worst case)/ 1	Omnidirectional/5.5	28.3	≤30	Pass
915	FSK 12.5kbps (worst case)/ 1	Omnidirectional/5.5	29.7	≤30	Pass
926.8	FSK 12.5kbps (worst case)/ 1	Omnidirectional/5.5	27.9	≤30	Pass


Test Data Summary - RF Conducted Measurement					
Configuration 2					
$\text{Limit} = \begin{cases} 30\text{dBm Conducted}/36\text{dBm EIRP} &   \geq 50 \text{ Channels} \\ 24\text{dBm Conducted}/30\text{dBm EIRP} &   < 50 \text{ Channels (min 25)} \end{cases}$					
Frequency (MHz)	Modulation / Ant Port	Ant. Type / Gain (dBi)	Measured (dBm)	Limit (dBm)	Results
903	FSK 12.5kbps (worst case)/ 1	Omnidirectional/8.15*	28.3	≤30	Pass
915	FSK 12.5kbps (worst case)/ 1	Omnidirectional/8.15*	29.7	≤30	Pass
926.8	FSK 12.5kbps (worst case)/ 1	Omnidirectional/8.15*	27.9	≤30	Pass

\*Manufacturer declares 2 dB of system loss via cable and attenuators to be attached before antenna


## Plots

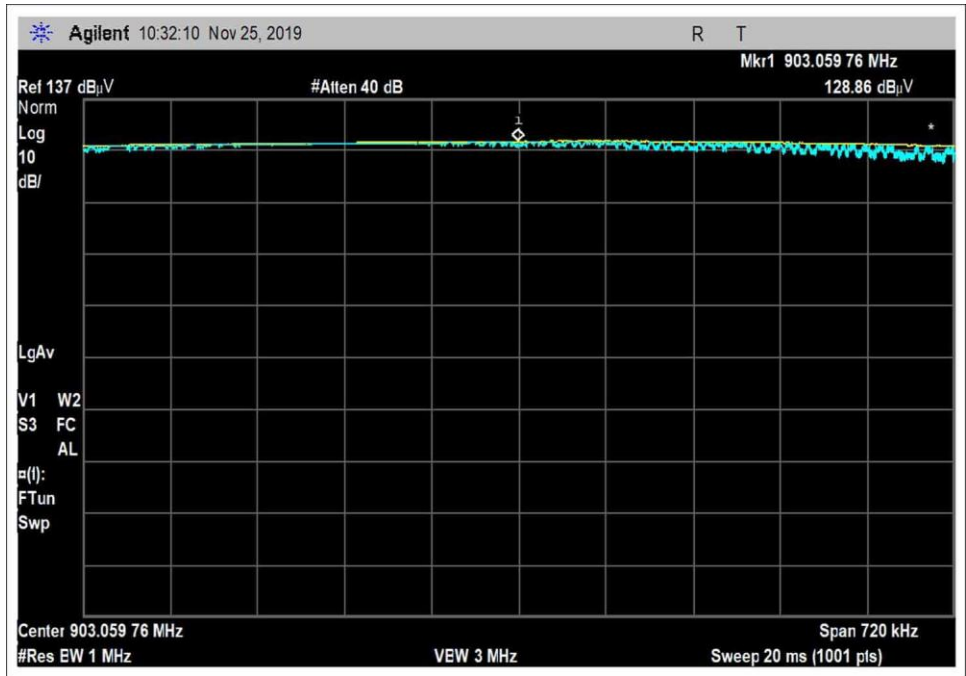

Low Channel

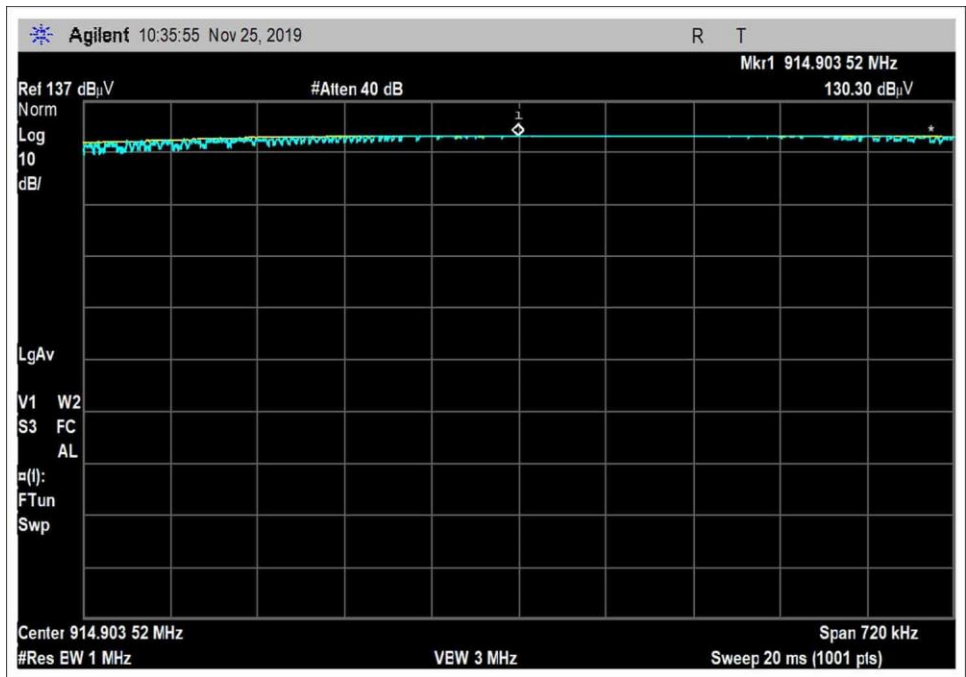

Middle Channel

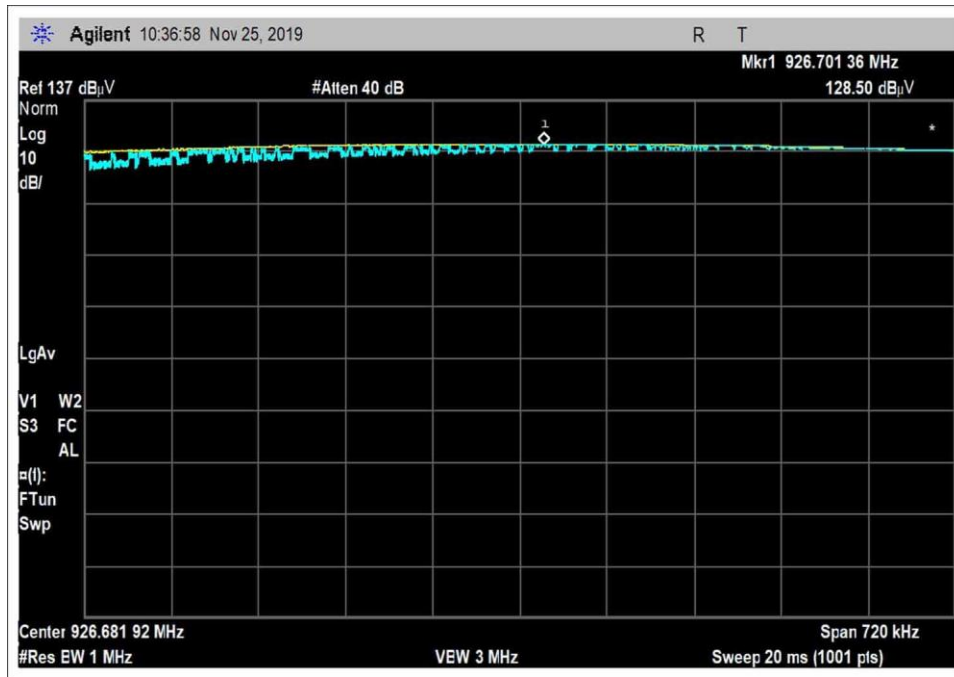

High Channel

**Test Setup / Conditions / Data**

Test Location: CKC Laboratories, Inc. · 22116 23rd Dr SE · Bothell, WA 98021 · 800-500-4362  
 Customer: **Itron, Inc.**  
 Specification: **15.247(b) Power Output (902-928 MHz DTS)**  
 Work Order #: **103221** Date: 11/25/2019  
 Test Type: **Conducted Emissions** Time: 10:36:17  
 Tested By: Matthew Harrison Sequence#: 19  
 Software: EMITest 5.03.12 120V 60Hz

*Equipment Tested:*

Device	Manufacturer	Model #	S/N
Configuration 1			

*Support Equipment:*

Device	Manufacturer	Model #	S/N
Configuration 1			

*Test Conditions / Notes:*

Temperature: 23° C  
 Humidity: 39%  
 Pressure: 101.1 kPa

Frequency Range: 903-926.8MHz  
 Frequency tested: 903, 915, 926.8 MHz  
 Firmware power setting: Max

Antenna type: Omnidirectional  
 Antenna Gain: 5.5 dBi.


Duty Cycle: 100% Modulated

Test Method: ANSI C63.10: 2013  
 Test Mode: Transmitting

The equipment under test (EUT) is placed on the tabletop. The output of the EUT is connected to the spectrum analyzer using a coaxial cable and attenuator. The EUT is transmitting at its rated output power.

Modification #1 and #2 were in place during testing.

Itron, Inc. WD#: 103221 Sequence#: 19 Date: 11/25/2019  
 15.247(b) Power Output (902-928 MHz DTS) Test Lead: 120V 60Hz Antenna Port

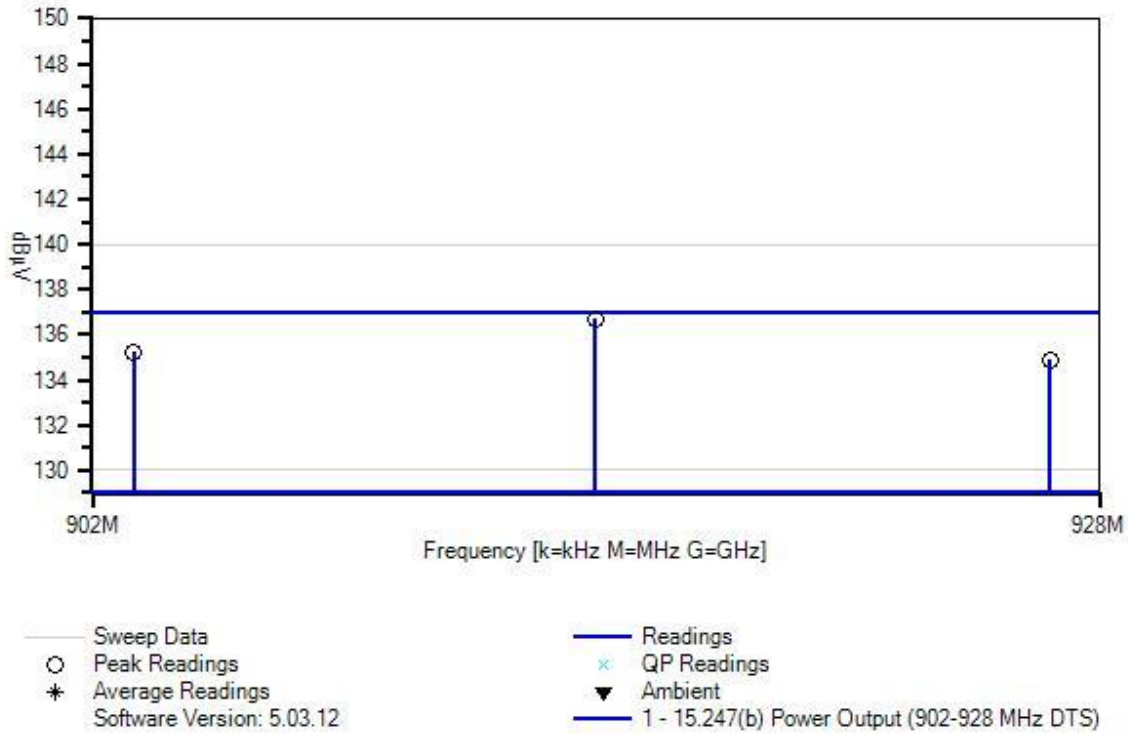

**Test Equipment:**

ID	Asset #	Description	Model	Calibration Date	Cal Due Date
T1	ANP07227	Attenuator	PE7004-6	10/2/2019	10/2/2021
T2	ANP05546	Cable	Heliac	8/24/2018	8/24/2020
	AN02871	Spectrum Analyzer	E4440A	10/15/2019	10/15/2021

**Measurement Data:** Reading listed by margin.

Test Lead: Antenna Port

#	Freq MHz	Rdng dBµV	T1 dB	T2 dB		Dist dB	Corr dBµV	Spec dBµV	Margin dB	Polar Anten
1	914.904M	130.3	+5.9	+0.5		+0.0	136.7	137.0	-0.3	Anten
2	903.060M	128.9	+5.9	+0.5		+0.0	135.3	137.0	-1.7	Anten
3	926.701M	128.5	+5.9	+0.5		+0.0	134.9	137.0	-2.1	Anten





**Test Setup Photo(s)**



**15.35(c) Duty Cycle Correction Factor**

Test Data Summary			
Antenna Port	Operational Mode	Declared On Time (mS / P <sub>obs</sub> )	Declared DCCF (dB)
1	Normal	23.8	12.5

## 15.247(d) RF Conducted Emissions & Band Edge

### Test Setup / Conditions / Data

Test Location: CKC Laboratories, Inc. · 22116 23rd Dr SE · Bothell, WA 98021 · 800-500-4362  
 Customer: **Itron, Inc.**  
 Specification: **15.247(d) Conducted Spurious Emissions**  
 Work Order #: **103221** Date: 11/25/2019  
 Test Type: **Conducted Emissions** Time: 1:03:56 PM  
 Tested By: Matthew Harrison Sequence#: 21  
 Software: EMITest 5.03.12 120V 60Hz

*Equipment Tested:*

Device	Manufacturer	Model #	S/N
Configuration 1			


*Support Equipment:*

Device	Manufacturer	Model #	S/N
Configuration 1			

*Test Conditions / Notes:*

Temperature: 23° C  
 Humidity: 39%  
 Pressure: 101.1 kPa  
  
 Frequency Range: 9k-10GHz  
 Frequency tested: Low  
 Firmware power setting: Max  
 Modulation: FSK 12.5, FSK 37.5, and AM investigated, overall worst case spur reported for each, otherwise FSK 12.5k is representative of worst case.  
  
 Duty Cycle: 100% Modulated  
  
 Test Method: ANSI C63.10: 2013  
 Test Mode: Transmitting  
 Test Setup: EUT is setup in for conducted measurements.  
 Modifications #1 and #2 were in place during testing.

Itron, Inc. WD#: 103221 Sequence#: 21 Date: 11/25/2019  
 15.247(d) Conducted Spurious Emissions Test Lead: 120V 60Hz Antenna Port

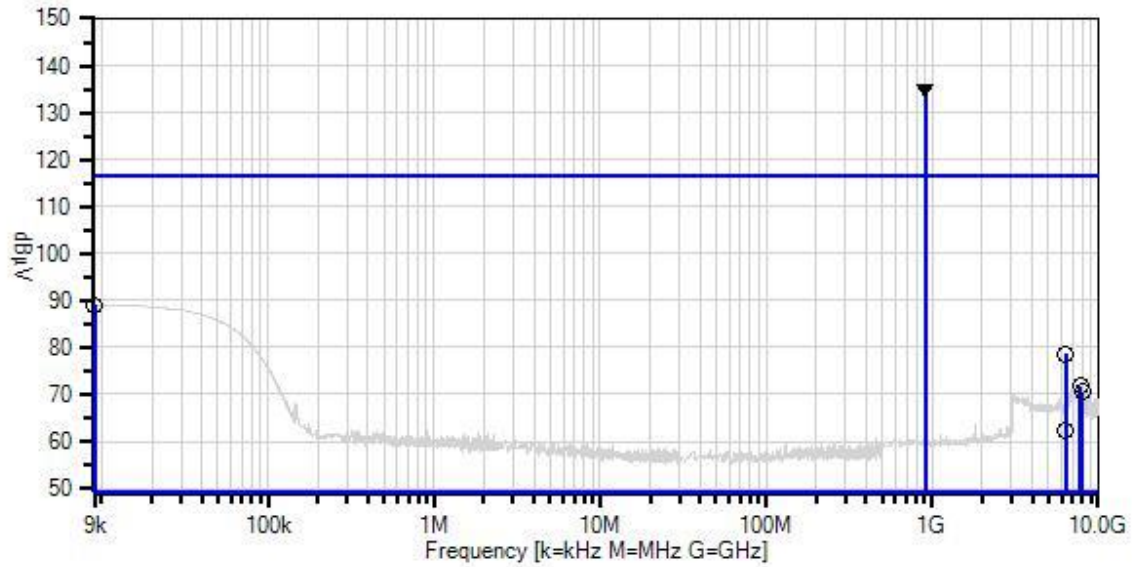

Sweep Data  
 ○ Peak Readings  
 \* Average Readings  
 Software Version: 5.03.12

Readings  
 × QP Readings  
 ▼ Ambient  
 1 - 15.247(d) Conducted Spurious Emissions

**Test Equipment:**

ID	Asset #	Description	Model	Calibration Date	Cal Due Date
T1	ANP07227	Attenuator	PE7004-6	10/2/2019	10/2/2021
T2	ANP05546	Cable	Heliac	8/24/2018	8/24/2020
T3	AN02871	Spectrum Analyzer	E4440A	10/15/2019	10/15/2021

**Measurement Data:** Reading listed by margin.

Test Lead: Antenna Port

#	Freq MHz	Rdng dBμV	T1 dB	T2 dB	T3 dB	Dist dB	Table	Corr dBμV	Spec dBμV	Margin dB	Polar Ant
1	905.936M	128.5	+5.9	+0.5	+0.0	+0.0		134.9	116.7	+18.2	Anten
Ambient											
2	9.000k	83.2	+5.8	+0.0	+0.0	+0.0		89.0	116.7	-27.7	Anten
3	6318.773M	70.8	+6.1	+1.8	+0.0	+0.0		78.7	116.7	-38.0	Anten
12k FSK											
4	6319.400M	70.7	+6.1	+1.8	+0.0	+0.0		78.6	116.7	-38.1	Anten
37.5k FSK											
5	7742.040M	63.0	+6.3	+2.5	+0.0	+0.0		71.8	116.7	-44.9	Anten
12k FSK											
6	8001.269M	61.8	+6.3	+2.5	+0.0	+0.0		70.6	116.7	-46.1	Anten
12k FSK											
7	6356.010M	54.4	+6.1	+1.8	+0.0	+0.0		62.3	116.7	-54.4	Anten
AM											

Test Location: CKC Laboratories, Inc. · 22116 23rd Dr SE · Bothell, WA 98021 · 800-500-4362  
 Customer: **Itron, Inc.**  
 Specification: **15.247(d) Conducted Spurious Emissions**  
 Work Order #: **103221** Date: 11/25/2019  
 Test Type: **Conducted Emissions** Time: 1:42:19 PM  
 Tested By: Matthew Harrison Sequence#: 22  
 Software: EMITest 5.03.12 120V 60Hz

***Equipment Tested:***

Device	Manufacturer	Model #	S/N
Configuration 1			

***Support Equipment:***

Device	Manufacturer	Model #	S/N
Configuration 1			

***Test Conditions / Notes:***

Temperature: 23° C  
 Humidity: 39%  
 Pressure: 101.1 kPa

Frequency Range: 9kHz-10GHz  
 Frequency tested: 915 MHz  
 Firmware power setting: Max


Antenna type: Omnidirectional  
 Antenna Gain: 5.5 dBi.

Duty Cycle: 100% Modulated

Test Method: ANSI C63.10: 2013  
 Test Mode: Transmitting  
 Test Setup: EUT is setup for conducted measurements.

Modification #1 and #2 were in place during testing.

Itron, Inc. WD#: 103221 Sequence#: 22 Date: 11/25/2019  
 15.247(d) Conducted Spurious Emissions Test Lead: 120V 60Hz Antenna Port

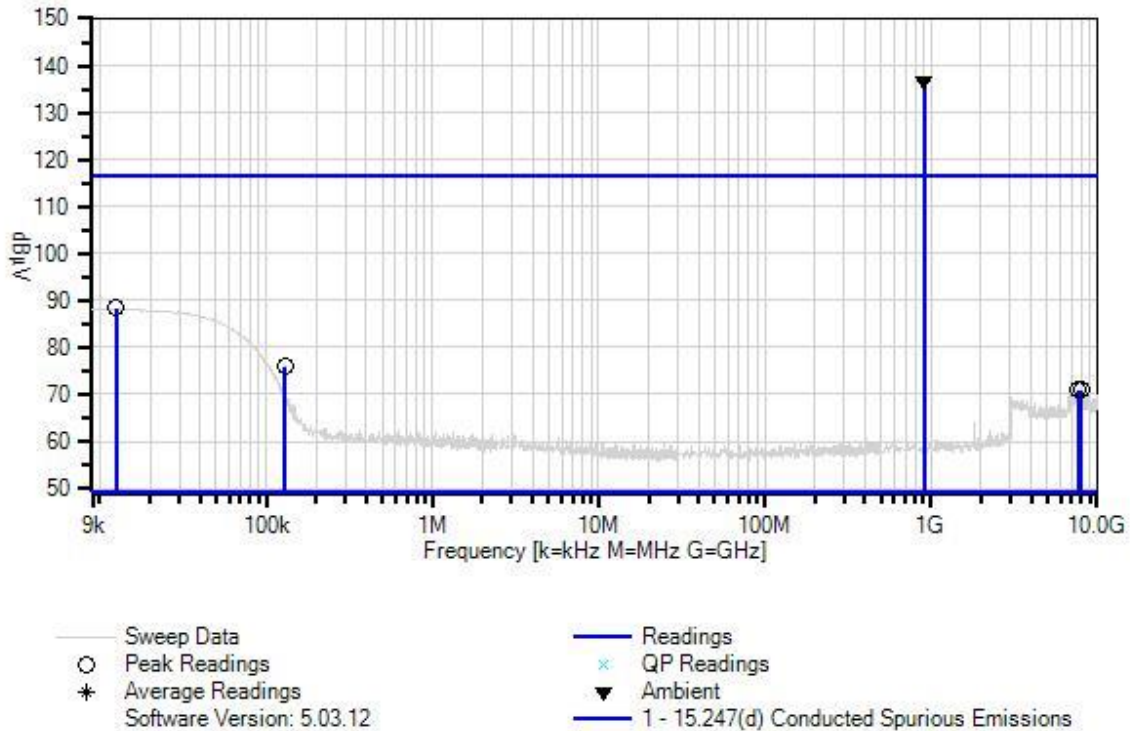

**Test Equipment:**

ID	Asset #	Description	Model	Calibration Date	Cal Due Date
T1	ANP07227	Attenuator	PE7004-6	10/2/2019	10/2/2021
T2	ANP05546	Cable	Heliac	8/24/2018	8/24/2020
T3	AN02871	Spectrum Analyzer	E4440A	10/15/2019	10/15/2021

**Measurement Data:** Reading listed by margin. Test Lead: Antenna Port

#	Freq MHz	Rdng dBµV	T1 dB	T2 dB	T3 dB	Dist dB	Table	Corr dBµV	Spec dBµV	Margin dB	Polar Anten
1	913.311M	130.3	+5.9	+0.5	+0.0	+0.0		136.7	116.7	+20.0	Anten
Ambient											
2	12.553k	82.5	+5.8	+0.0	+0.0	+0.0		88.3	116.7	-28.4	Anten
3	130.370k	70.2	+5.8	+0.0	+0.0	+0.0		76.0	116.7	-40.7	Anten

4	7653.547M				+0.0	+0.0	71.0	116.7	-45.7	Anten
		62.2	+6.3	+2.5						
5	7988.429M				+0.0	+0.0	71.0	116.7	-45.7	Anten
		62.2	+6.3	+2.5						



Test Location: CKC Laboratories, Inc. · 22116 23rd Dr SE · Bothell, WA 98021 · 800-500-4362  
 Customer: **Itron, Inc.**  
 Specification: **15.247(d) Conducted Spurious Emissions**  
 Work Order #: **103221** Date: 11/25/2019  
 Test Type: **Conducted Emissions** Time: 1:53:24 PM  
 Tested By: Matthew Harrison Sequence#: 23  
 Software: EMITest 5.03.12 120V 60Hz

***Equipment Tested:***

Device	Manufacturer	Model #	S/N
Configuration 1			

***Support Equipment:***

Device	Manufacturer	Model #	S/N
Configuration 1			

***Test Conditions / Notes:***

Temperature: 23° C  
 Humidity: 39%  
 Pressure: 101.1 kPa

Frequency Range: 9kHz-10GHz  
 Frequency tested: 926.8 MHz  
 Firmware power setting: Max


Antenna type: Omnidirectional  
 Antenna Gain: 5.5 dBi.

Duty Cycle: 100% Modulated

Test Method: ANSI C63.10: 2013  
 Test Mode: Transmitting  
 Test Setup: EUT is setup for conducted measurements.

Modification #1 and #2 were in place during testing.

Itron, Inc. WD#: 103221 Sequence#: 23 Date: 11/25/2019  
 15.247(d) Conducted Spurious Emissions Test Lead: 120V 60Hz Antenna Port

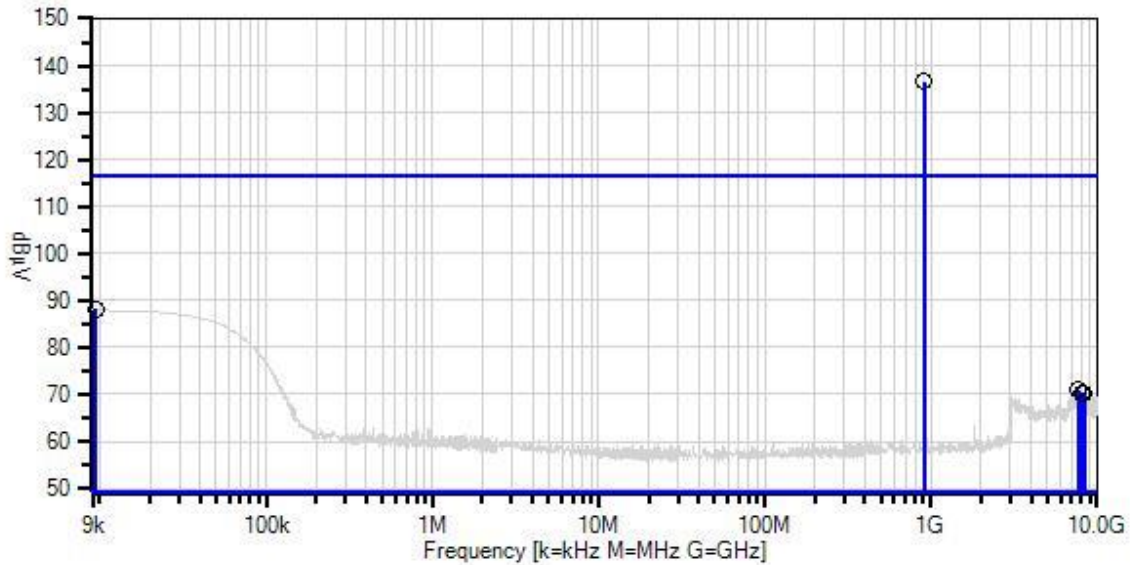

— Sweep Data  
 ○ Peak Readings  
 \* Average Readings  
 Software Version: 5.03.12  
 — Readings  
 × QP Readings  
 ▼ Ambient  
 — 1 - 15.247(d) Conducted Spurious Emissions

**Test Equipment:**

ID	Asset #	Description	Model	Calibration Date	Cal Due Date
T1	ANP07227	Attenuator	PE7004-6	10/2/2019	10/2/2021
T2	ANP05546	Cable	Heliac	8/24/2018	8/24/2020
	AN02871	Spectrum Analyzer	E4440A	10/15/2019	10/15/2021

**Measurement Data:** Reading listed by margin.

Test Lead: Antenna Port

#	Freq MHz	Rdng dBμV	T1 dB	T2 dB		Dist dB	Corr dB	Spec dBμV	Margin dB	Polar Anten
1	913.311M	130.2	+5.9	+0.5		+0.0	136.6	116.7	+19.9	Anten
2	9.410k	82.3	+5.8	+0.0		+0.0	88.1	116.7	-28.6	Anten
3	7734.665M	62.2	+6.3	+2.5		+0.0	71.0	116.7	-45.7	Anten

4	8022.669M				+0.0	70.4	116.7	-46.3	Anten
		61.6	+6.3	+2.5					
5	8288.025M				+0.0	70.4	116.7	-46.3	Anten
		61.6	+6.3	+2.5					

Test Location: CKC Laboratories, Inc. · 22116 23rd Dr SE · Bothell, WA 98021 · 800-500-4362  
 Customer: **Itron, Inc.**  
 Specification: **15.247(d) Conducted Spurious Emissions**  
 Work Order #: **103221** Date: 12/13/2019  
 Test Type: **Conducted Emissions** Time: 09:47:11  
 Tested By: Michael Atkinson Sequence#: 34  
 Software: EMITest 5.03.12 120V 60Hz

***Equipment Tested:***


Device	Manufacturer	Model #	S/N
Configuration 1			

***Support Equipment:***

Device	Manufacturer	Model #	S/N
Configuration 1			

***Test Conditions / Notes:***

Temperature: 23° C  
 Humidity: 39%  
 Pressure: 101.1 kPa  
  
 Frequency Range: 9kHz-10GHz  
 Frequency tested: Hopping  
 Firmware power setting: Max  
  
 Duty Cycle: 100% Modulated  
  
 Test Method: ANSI C63.10: 2013  
 Test Mode: Transmitting  
 Test Setup: EUT is setup for conducted measurements.  
  
 Modification #1 and #2 were in place during testing.

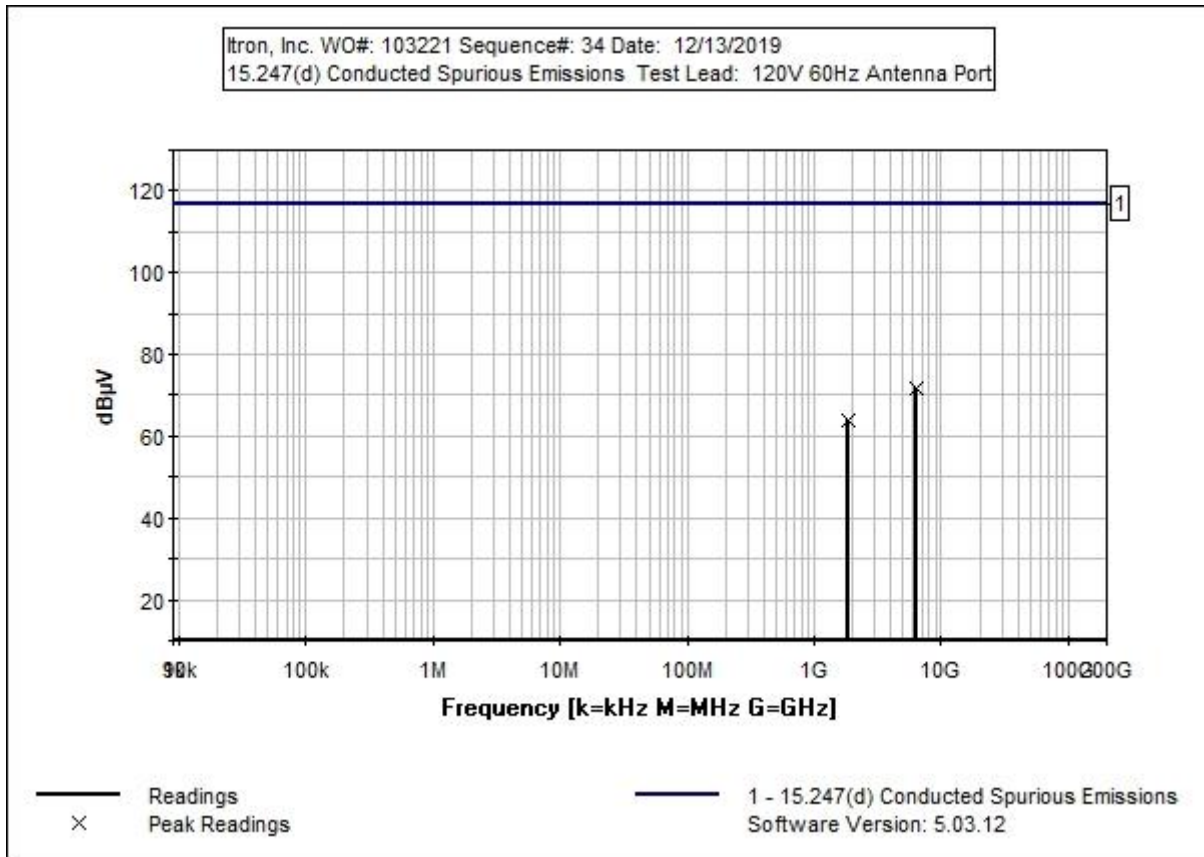

**Test Equipment:**

ID	Asset #	Description	Model	Calibration Date	Cal Due Date
T1	ANP07227	Attenuator	PE7004-6	10/2/2019	10/2/2021
T2	ANP05546	Cable	Helix	8/24/2018	8/24/2020
	AN02871	Spectrum Analyzer	E4440A	10/15/2019	10/15/2021

**Measurement Data:** Reading listed by margin.

Test Lead: Antenna Port

#	Freq MHz	Rdng dBµV	T1 dB	T2 dB	Dist dB	Corr dB	Spec dBµV	Margin dB	Polar Ant
1	6341.410M	63.7	+6.1	+1.8	+0.0	71.6	116.7	-45.1	Anten
2	1836.190M	57.0	+5.9	+0.9	+0.0	63.8	116.7	-52.9	Anten

**Band Edge**

**Band Edge Summary**

Limit applied: Max Power/100kHz - 20dB.  
Operating Mode: Single Channel (Low and High)



Frequency (MHz)	Modulation	Measured (dBm)	Limit (dBm)	Results
902	FM 12.5k	-8.8	<9.7	Pass
928	FM 12.5k	-22	<9.7	Pass
902	FM 37.5k	-12.3	<9.7	Pass
928	FM 37.5k	-25.2	<9.7	Pass
902	AM	-24	<9.7	Pass
928	AM	-26.6	<9.7	Pass



**Band Edge Summary**

Limit applied: Max Power/100kHz - 20dB.  
Operating Mode: Hopping



Frequency (MHz)	Modulation	Measured (dBm)	Limit (dBm)	Results
902	FM 12.5k	-10.4	<9.7	Pass
928	FM 12.5k	-21.6	<9.7	Pass
902	FM 37.5k	-13.9	<9.7	Pass
928	FM 37.5k	-26.4	<9.7	Pass
902	AM	-23.8	<9.7	Pass
928	AM	-21.8	<9.7	Pass



## Band Edge Plots

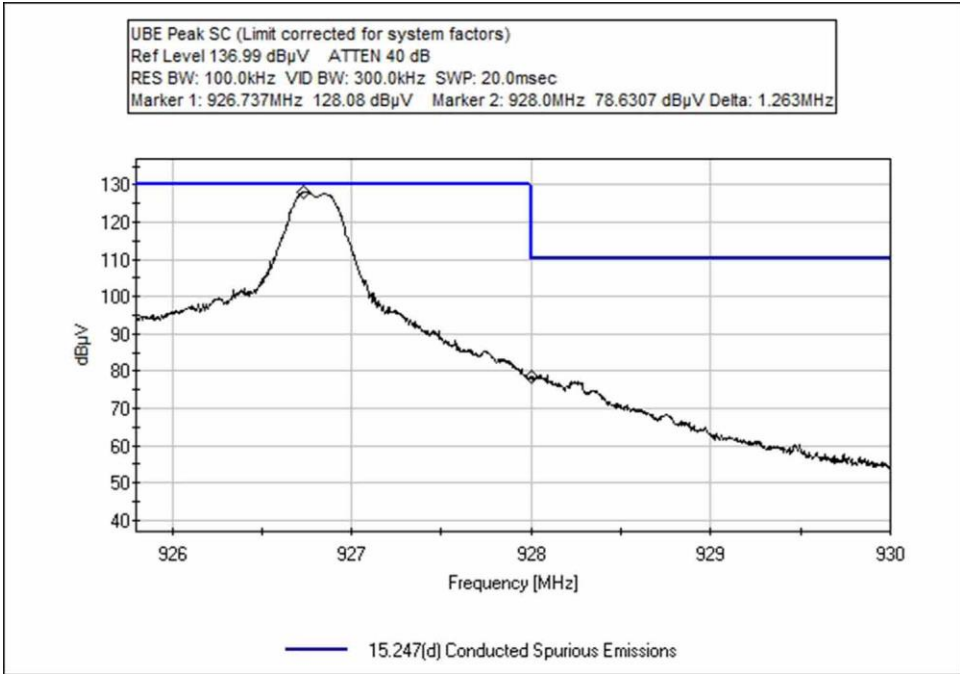
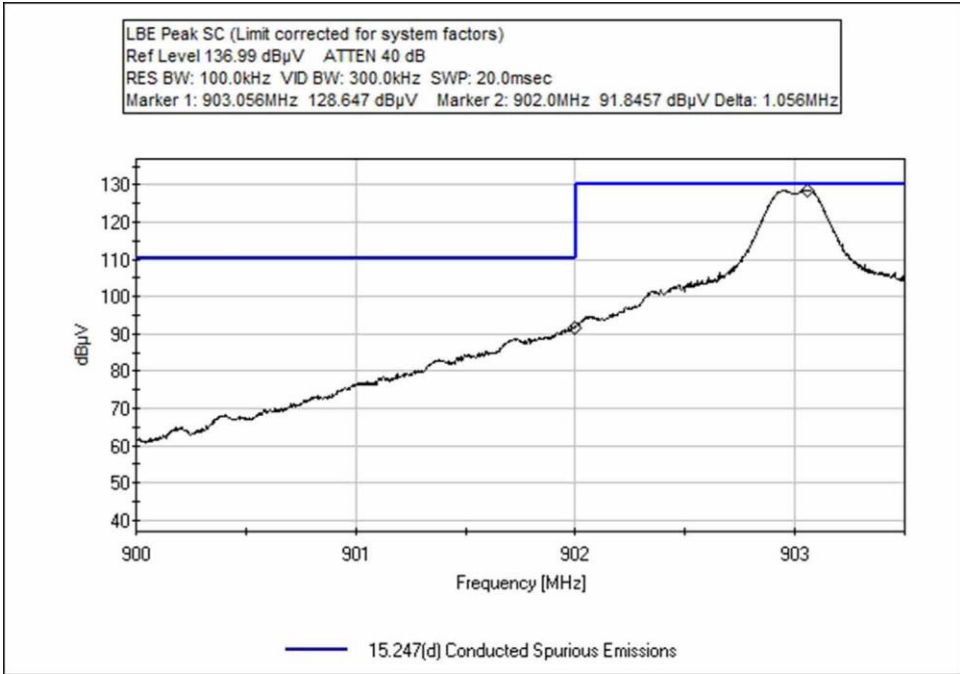


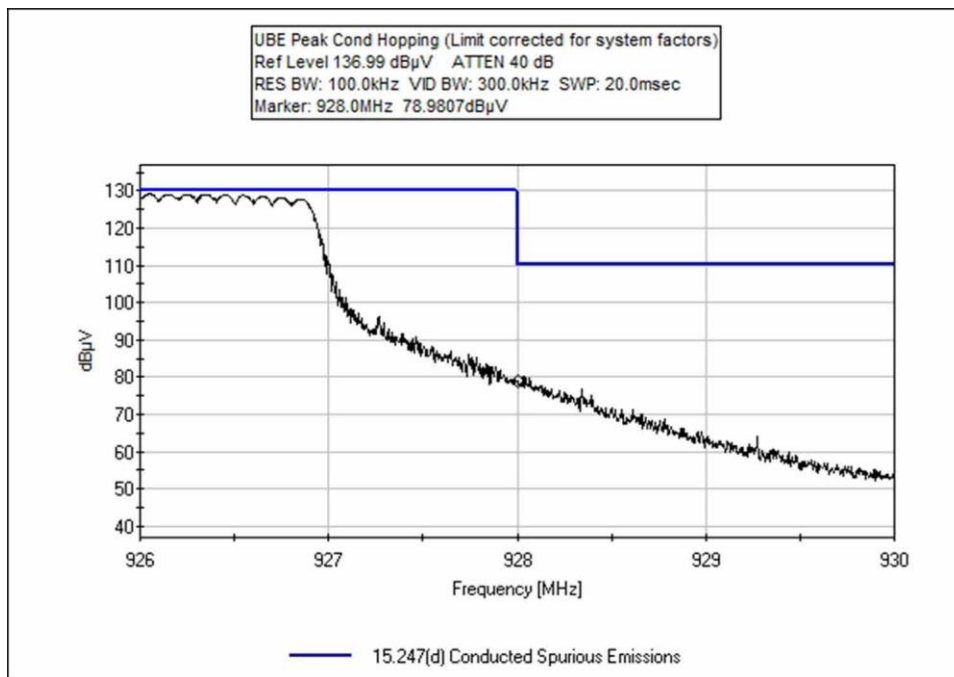
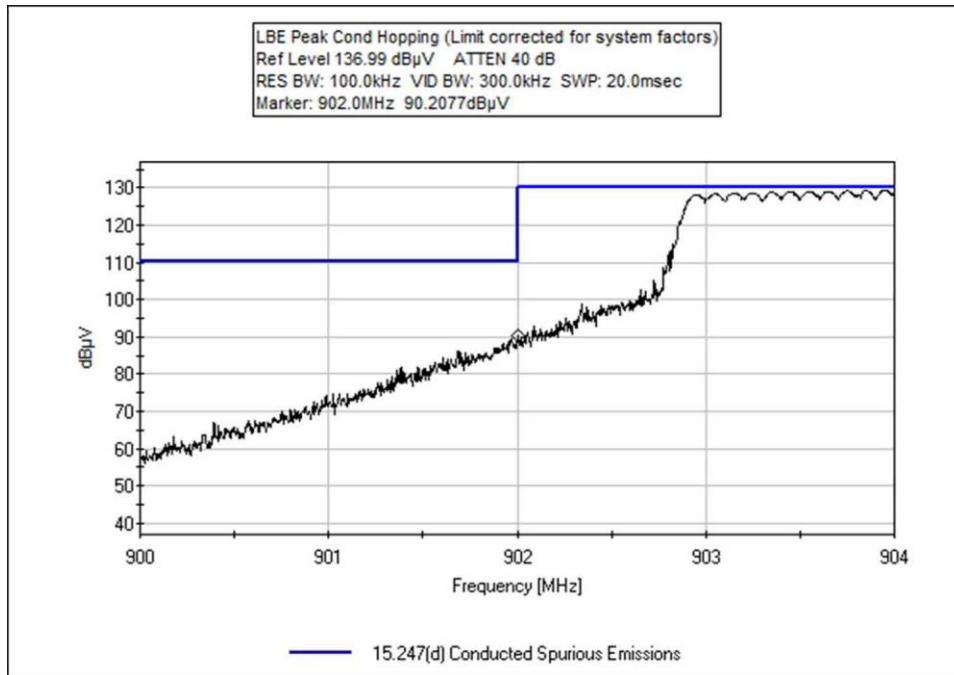




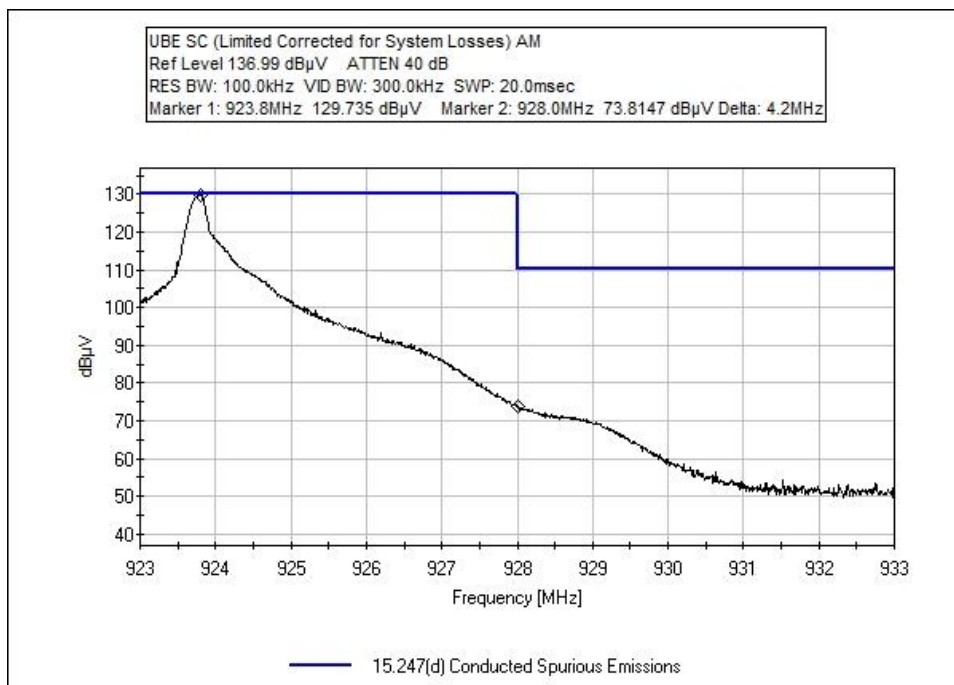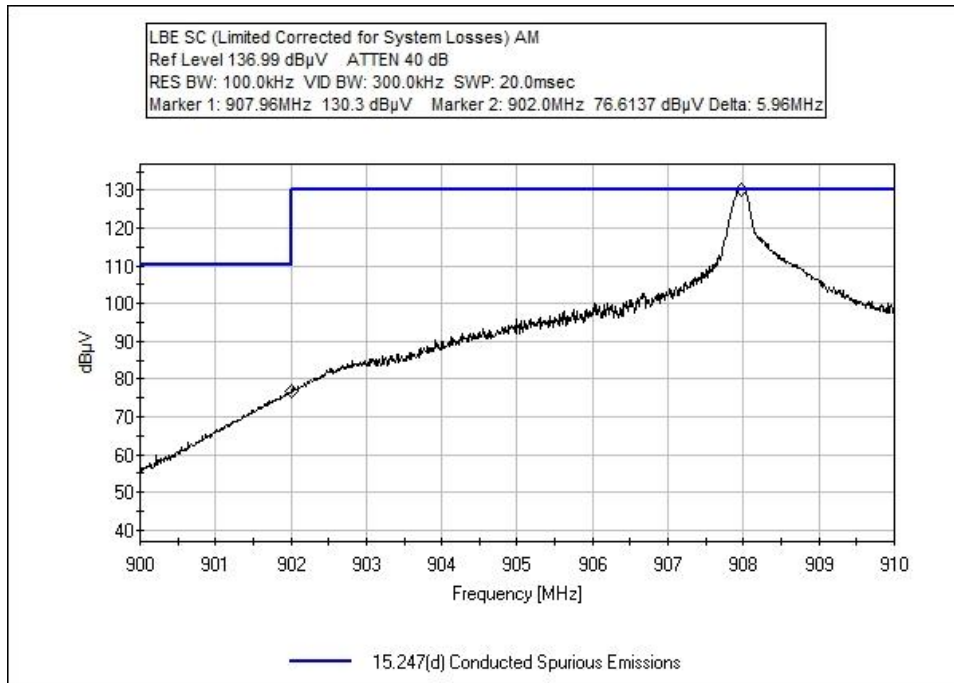

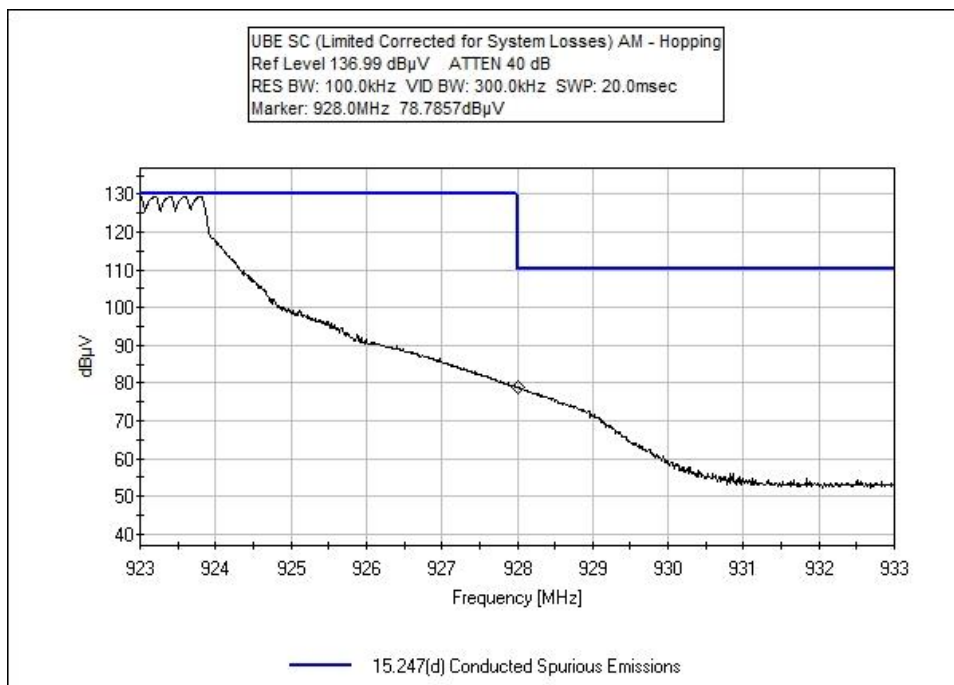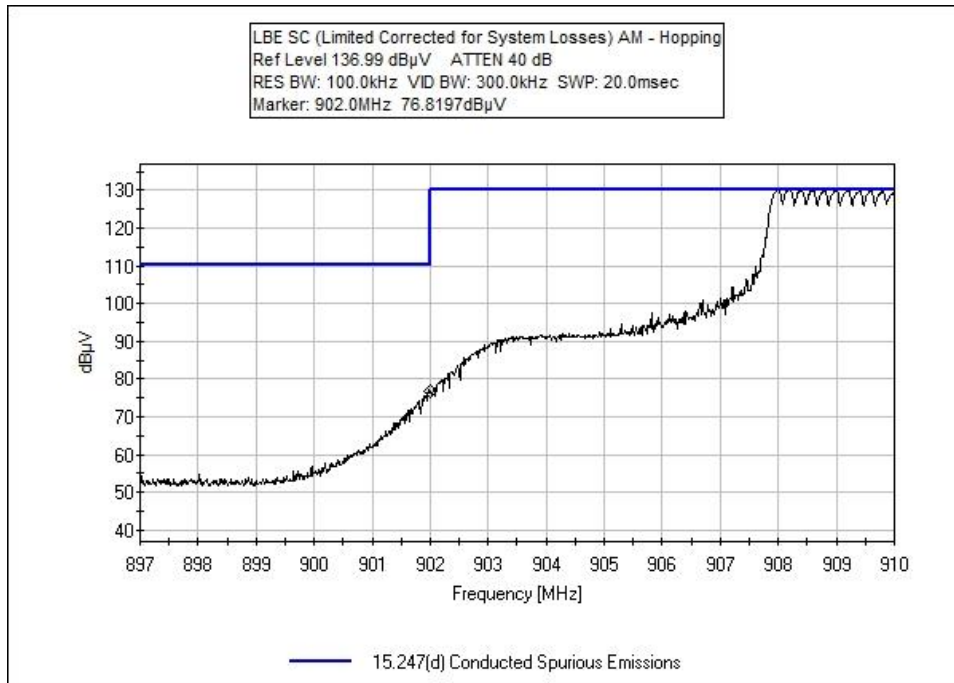

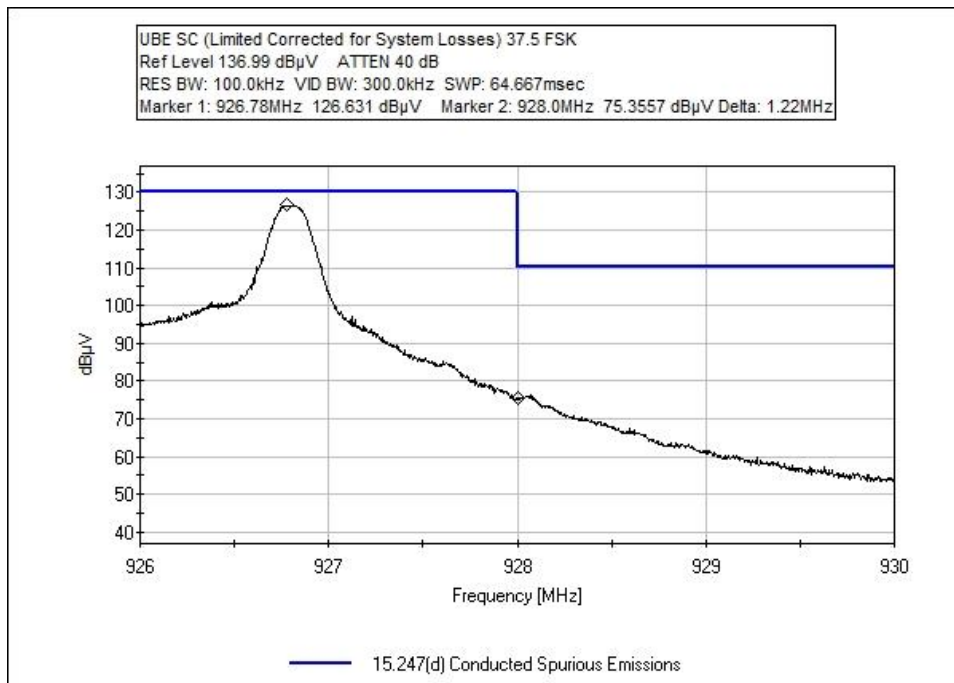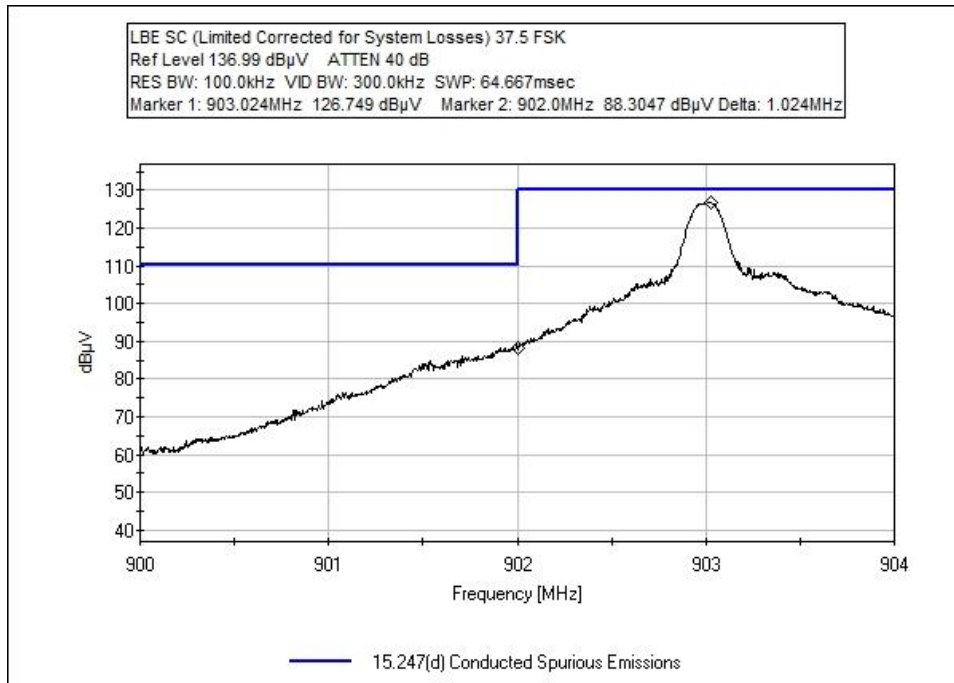

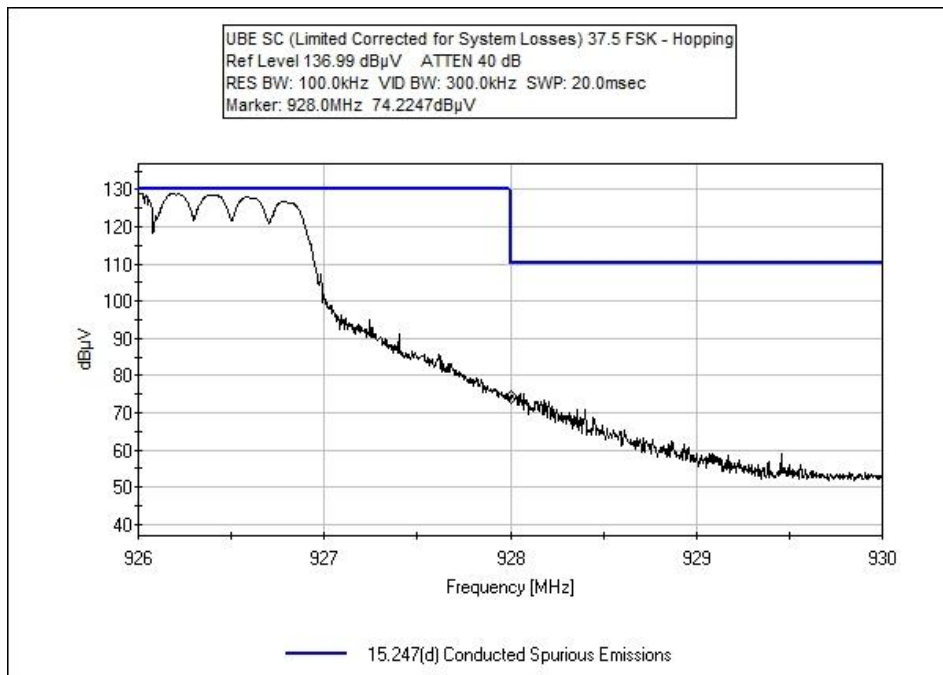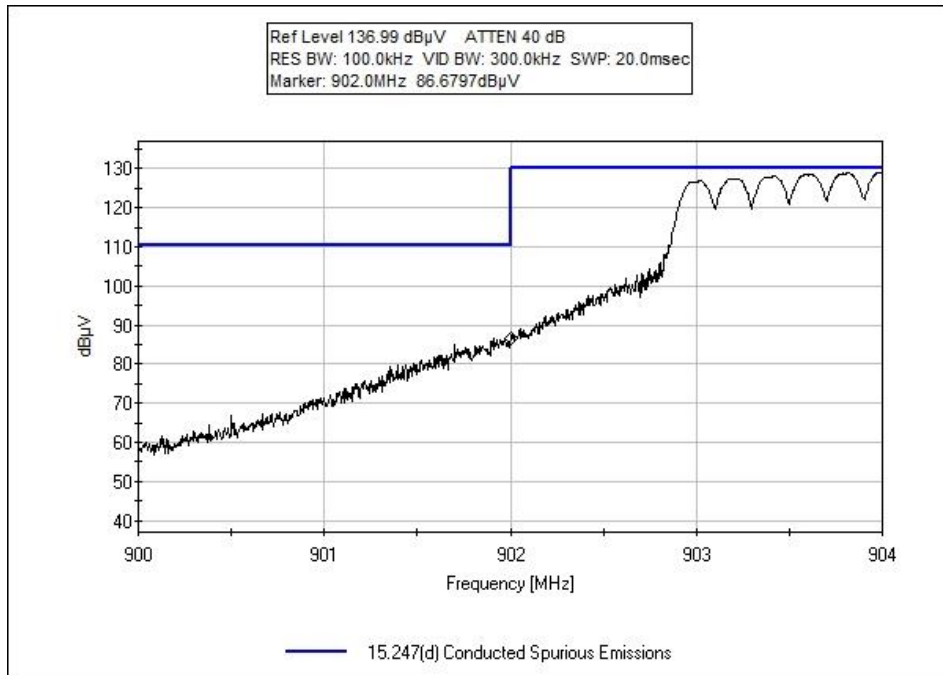

**Test Setup / Conditions / Data**

Test Location: CKC Laboratories, Inc. · 22116 23rd Dr SE · Bothell, WA 98021 · 800-500-4362  
 Customer: **Itron, Inc.**  
 Specification: **15.247(d) Conducted Spurious Emissions**  
 Work Order #: **103221** Date: 12/13/2019  
 Test Type: **Conducted Emissions** Time: 09:38:08  
 Tested By: Michael Atkinson Sequence#: 24  
 Software: EMITest 5.03.12 120V 60Hz

*Equipment Tested:*

Device	Manufacturer	Model #	S/N
Configuration 1			

*Support Equipment:*

Device	Manufacturer	Model #	S/N
Configuration 1			

*Test Conditions / Notes:*

Temperature: 23° C  
 Humidity: 39%  
 Pressure: 101.1 kPa


Frequency Range: 900-930MHz  
 Frequency tested: 903, 926.8 MHz  
 Firmware power setting: Max  
 Modulation: FSK 12.5k

Duty Cycle: 100% Modulated

Test Method: ANSI C63.10: 2013  
 Test Mode: Transmitting  
 Test Setup: EUT is setup in for conducted measurements.

Modification #1 and #2 were in place during testing.

Itron, Inc. WD#: 103221 Sequence#: 24 Date: 12/13/2019  
 15.247(d) Conducted Spurious Emissions Test Lead: 120V 60Hz Antenna Port

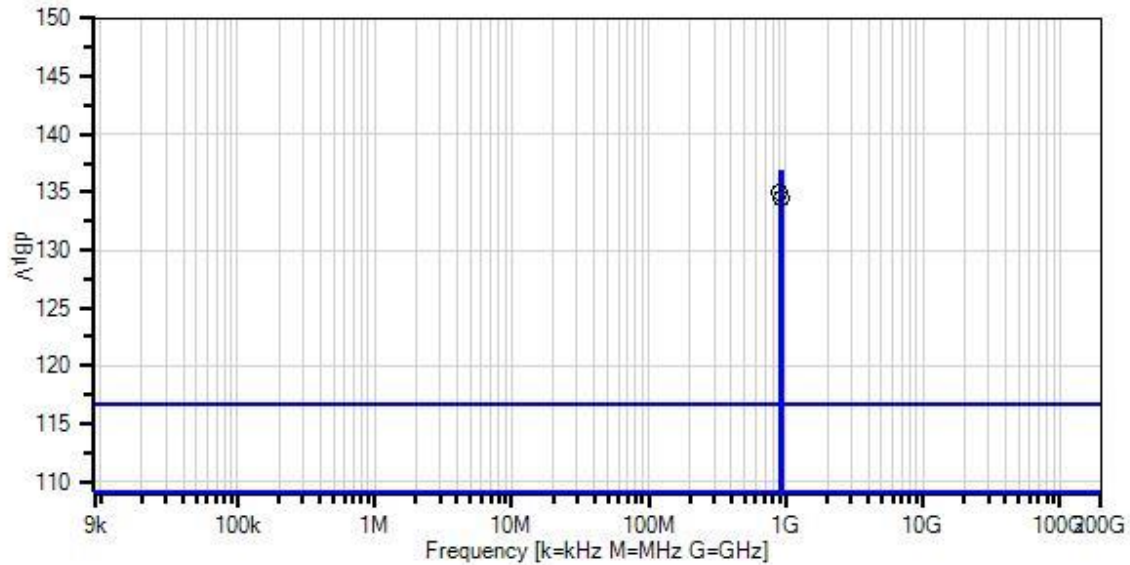

— Sweep Data  
 ○ Peak Readings  
 \* Average Readings  
 Software Version: 5.03.12  
 — Readings  
 × QP Readings  
 ▼ Ambient  
 — 1 - 15.247(d) Conducted Spurious Emissions

**Test Equipment:**

ID	Asset #	Description	Model	Calibration Date	Cal Due Date
T1	ANP07227	Attenuator	PE7004-6	10/2/2019	10/2/2021
T2	ANP05546	Cable	Heliac	8/24/2018	8/24/2020
T3	AN02871	Spectrum Analyzer	E4440A	10/15/2019	10/15/2021

**Measurement Data:** Reading listed by margin. Test Lead: Antenna Port

#	Freq MHz	Rdng dBμV	T1 dB	T2 dB	T3 dB	Dist dB	Table	Corr dBμV	Spec dBμV	Margin dB	Polar Anten
1	903.056M	128.6	+5.9	+0.5	+0.0	+0.0		135.0	136.7	-1.7	Anten
2	926.737M	128.1	+5.9	+0.5	+0.0	+0.0		134.5	136.7	-2.2	Anten
3	902.000M	91.8	+5.9	+0.5	+0.0	+0.0		98.2	116.7	-18.5	Anten

4	902.000M				+0.0	+0.0	96.6	116.7	-20.1	Anten
		90.2	+5.9	+0.5						
										Hopping
5	928.000M				+0.0	+0.0	85.4	116.7	-31.3	Anten
		79.0	+5.9	+0.5						
										Hopping
6	928.000M				+0.0	+0.0	85.0	116.7	-31.7	Anten
		78.6	+5.9	+0.5						

Test Location: CKC Laboratories, Inc. · 22116 23rd Dr SE · Bothell, WA 98021 · 800-500-4362  
 Customer: **Itron, Inc.**  
 Specification: **15.247(d) Conducted Spurious Emissions**  
 Work Order #: **103221** Date: 4/29/2020  
 Test Type: **Conducted Emissions** Time: 15:24:27  
 Tested By: Michael Atkinson Sequence#: 24  
 Software: EMITest 5.03.12 120V 60Hz

***Equipment Tested:***

Device	Manufacturer	Model #	S/N
Configuration 1			

***Support Equipment:***

Device	Manufacturer	Model #	S/N
Configuration 1			

***Test Conditions / Notes:***

Temperature: 23° C  
 Humidity: 39%  
 Pressure: 101.1 kPa


Frequency Range: 900-930MHz  
 Frequency tested: 903, 926.8 MHz  
 Firmware power setting: Max  
 Modulation: FSK 37.5k

Duty Cycle: 100% Modulated

Test Method: ANSI C63.10: 2013  
 Test Mode: Transmitting  
 Test Setup: EUT is setup in for conducted measurements.  
 Modification #1 and #2 were in place during testing.



Itron, Inc. WO#: 103221 Sequence#: 24 Date: 4/29/2020  
 15.247(d) Conducted Spurious Emissions Test Lead: 120V 60Hz Antenna Port

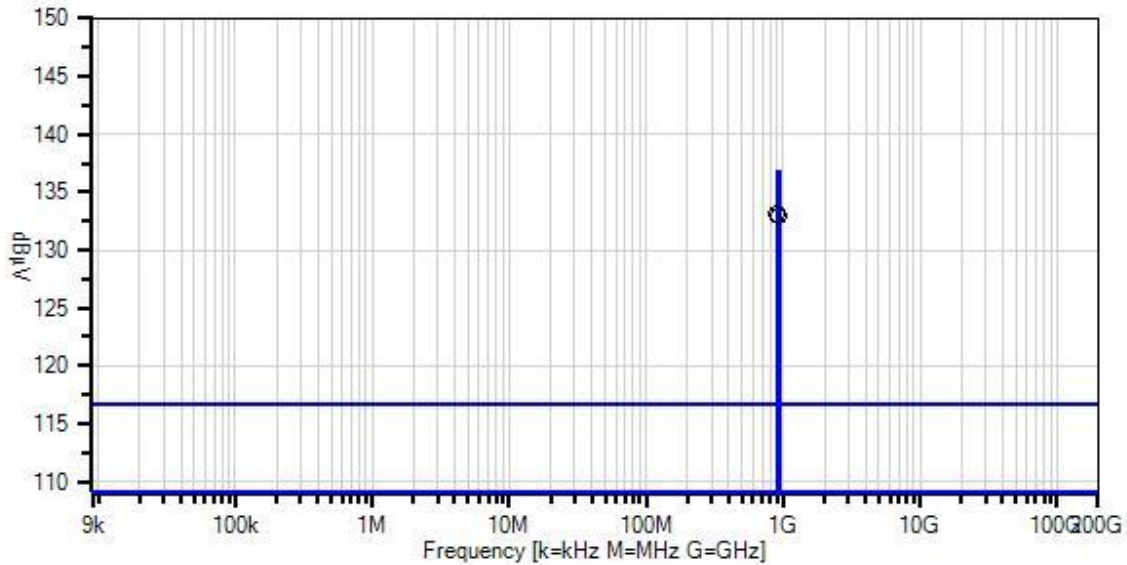

— Sweep Data  
 ○ Peak Readings  
 \* Average Readings  
 Software Version: 5.03.12

— Readings  
 × QP Readings  
 ▼ Ambient  
 1 - 15.247(d) Conducted Spurious Emissions

**Test Equipment:**

ID	Asset #	Description	Model	Calibration Date	Cal Due Date
T1	ANP07227	Attenuator	PE7004-6	10/2/2019	10/2/2021
T2	ANP05546	Cable	Heliac	8/24/2018	8/24/2020
T3	AN02871	Spectrum Analyzer	E4440A	10/15/2019	10/15/2021

**Measurement Data:** Reading listed by margin.

Test Lead: Antenna Port

#	Freq MHz	Rdng dBµV	T1 dB	T2 dB	T3 dB	Dist dB	Table	Corr dBµV	Spec dBµV	Margin dB	Polar Anten
1	903.024M	126.7	+5.9	+0.5	+0.0	+0.0		133.1	136.7	-3.6	Anten
2	926.780M	126.6	+5.9	+0.5	+0.0	+0.0		133.0	136.7	-3.7	Anten
3	902.000M	88.3	+5.9	+0.5	+0.0	+0.0		94.7	116.7	-22.0	Anten

4	902.000M				+0.0	+0.0	93.1	116.7	-23.6	Anten
		86.7	+5.9	+0.5						
Hopping										
5	928.000M				+0.0	+0.0	81.8	116.7	-34.9	Anten
		75.4	+5.9	+0.5						
6	928.000M				+0.0	+0.0	80.6	116.7	-36.1	Anten
		74.2	+5.9	+0.5						
Hopping										

Test Location: CKC Laboratories, Inc. · 22116 23rd Dr SE · Bothell, WA 98021 · 800-500-4362  
 Customer: **Itron, Inc.**  
 Specification: **15.247(d) Conducted Spurious Emissions**  
 Work Order #: **103221** Date: 4/29/2020  
 Test Type: **Conducted Emissions** Time: 15:50:02  
 Tested By: Michael Atkinson Sequence#: 25  
 Software: EMITest 5.03.12 120V 60Hz

**Equipment Tested:**

Device	Manufacturer	Model #	S/N
Configuration 1			


**Support Equipment:**

Device	Manufacturer	Model #	S/N
Configuration 1			

**Test Conditions / Notes:**

Temperature: 23° C  
 Humidity: 39%  
 Pressure: 101.1 kPa  
  
 Frequency Range: 900-930MHz  
 Frequency tested: 908, 923.8 MHz  
 Firmware power setting: Max  
 Modulation: AM  
  
 Duty Cycle: 100% Modulated  
  
 Test Method: ANSI C63.10: 2013  
 Test Mode: Transmitting  
 Test Setup: EUT is setup in for conducted measurements.  
 Modification #1 and #2 were in place during testing.

Itron, Inc. WD#: 103221 Sequence#: 25 Date: 4/29/2020  
 15.247(d) Conducted Spurious Emissions Test Lead: 120V 60Hz Antenna Port

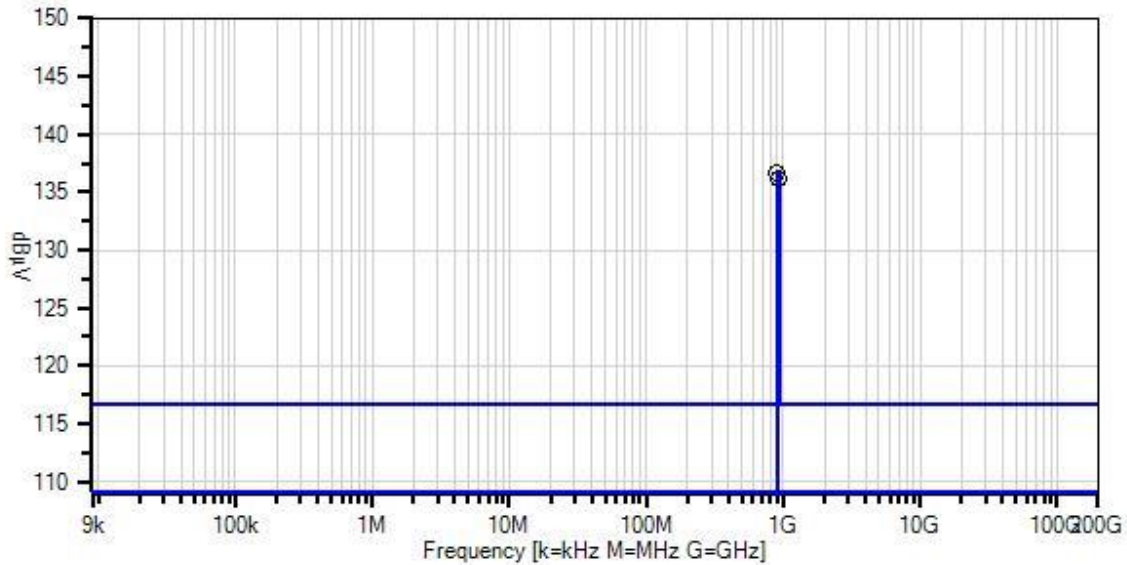

— Sweep Data  
 ○ Peak Readings  
 \* Average Readings  
 — Readings  
 × QP Readings  
 ▼ Ambient  
 — 1 - 15.247(d) Conducted Spurious Emissions  
 Software Version: 5.03.12

**Test Equipment:**

ID	Asset #	Description	Model	Calibration Date	Cal Due Date
T1	ANP07227	Attenuator	PE7004-6	10/2/2019	10/2/2021
T2	ANP05546	Cable	Heliac	8/24/2018	8/24/2020
T3	AN02871	Spectrum Analyzer	E4440A	10/15/2019	10/15/2021

**Measurement Data:** Reading listed by margin. Test Lead: Antenna Port

#	Freq MHz	Rdng dBμV	T1 dB	T2 dB	T3 dB	Dist dB	Table	Corr dBμV	Spec dBμV	Margin dB	Polar Anten
1	907.960M	130.3	+5.9	+0.5	+0.0	+0.0		136.7	136.7	+0.0	Anten
2	923.800M	129.7	+5.9	+0.5	+0.0	+0.0		136.1	136.7	-0.6	Anten
3	928.000M	78.8	+5.9	+0.5	+0.0	+0.0		85.2	116.7	-31.5	Anten

Hopping

4	902.000M				+0.0	+0.0	83.2	116.7	-33.5	Anten
		76.8	+5.9	+0.5						
Hopping										
5	902.000M				+0.0	+0.0	83.0	116.7	-33.7	Anten
		76.6	+5.9	+0.5						
6	928.000M				+0.0	+0.0	80.4	116.7	-36.3	Anten
		74.0	+5.9	+0.5						

### Test Setup Photo(s)



## 15.247(d) Radiated Emissions & Band Edge

### Test Setup / Conditions / Data

Test Location: CKC Laboratories, Inc. · 22116 23rd Dr SE · Bothell, WA 98021 · 800-500-4362  
 Customer: **Itron, Inc.**  
 Specification: **15.247(d) / 15.209 Radiated Spurious Emissions**  
 Work Order #: **103221** Date: 4/29/2020  
 Test Type: **Radiated Scan** Time: 16:17:40  
 Tested By: Matthew Harrison Sequence#: 11  
 Software: EMITest 5.03.12

*Equipment Tested:*

Device	Manufacturer	Model #	S/N
Configuration 1			

*Support Equipment:*

Device	Manufacturer	Model #	S/N
Configuration 1			

*Test Conditions / Notes:*

Temperature: 23° C  
 Humidity: 39%  
 Pressure: 101.1 kPa

Frequency Range: 9kHz-10GHz  
 Frequency tested: Low, Mid High  
 Firmware power setting: Max  
 Modulation: FSK 12.5, FSK 37.5, and AM investigated, overall worst case reported. Worst case spur for each modulation type noted in table. This antenna configuration also worst produced worst case spurs compared to 8.15dBi configuration.

Antenna type: Omnidirectional  
 Antenna Gain: 5.5 dBi.


Duty Cycle: 100% Modulated

Test Method: ANSI C63.10: 2013  
 Test Mode: Transmitting  
 Test Setup: EUT is setup in a tabletop configuration on a Styrofoam table.  
 Below 1GHz set 80cm high.  
 Above 1GHz set 1.5m high

Co-Location testing was performed with Wi-Fi, Cell, and FHSS radios transmitting simultaneously in both CCU100C and CCU100RC configurations.

Modification #1 and #2 were in place during testing.

Iron, Inc. WO#: 103221 Sequence#: 11 Date: 4/29/2020  
 15.247(d) / 15.209 Radiated Spurious Emissions Test Distance: 3 Meters Vert

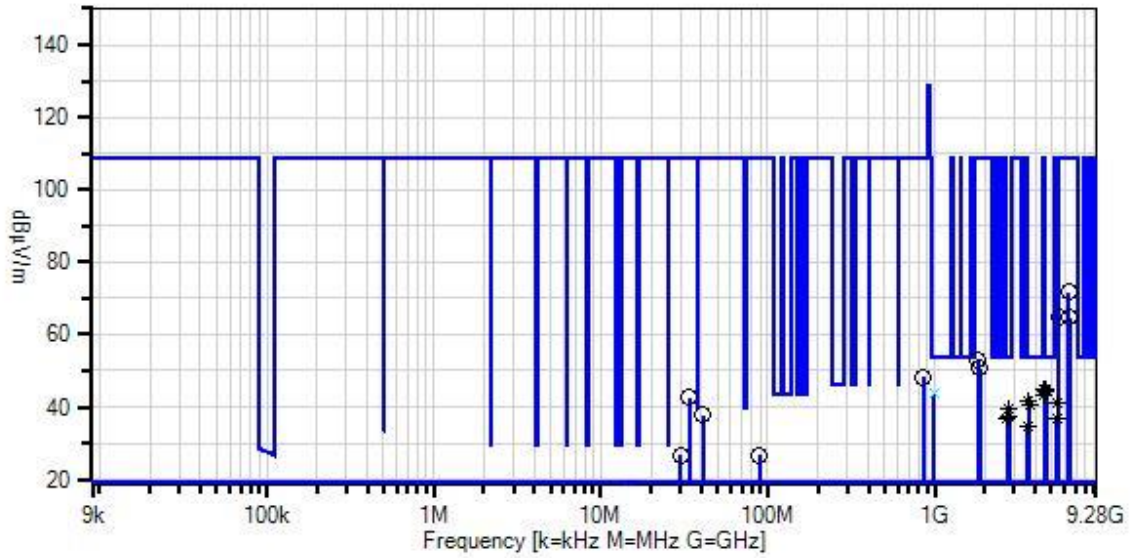

- Sweep Data
- Peak Readings
- \* Average Readings
- Software Version: 5.03.12
- Readings
- × QP Readings
- ▼ Ambient
- 1 - 15.247(d) / 15.209 Radiated Spurious Emissions

**Test Equipment:**

ID	Asset #	Description	Model	Calibration Date	Cal Due Date
T1	AN02307	Preamp	8447D	1/15/2018	1/15/2020
T2	AN03628	Biconilog Antenna	3142E	6/11/2019	6/11/2021
T3	ANP06123	Attenuator	18N-6	4/5/2019	4/5/2021
T4	ANP05305	Cable	ETSI-50T	9/6/2019	9/6/2021
T5	ANP05360	Cable	RG214	1/31/2018	1/31/2020
T6	ANP06540	Cable	Heliac	8/23/2019	8/23/2021
T7	AN02673	Spectrum Analyzer	E4446A	2/22/2019	2/22/2021
T8	AN00052	Loop Antenna	6502	5/7/2018	5/7/2020
T9	ANP06515	Cable	Heliac	6/29/2018	6/29/2020
T10	AN03540	Preamp	83017A	5/13/2019	5/13/2021
T11	AN01467	Horn Antenna- ANSI C63.5 Calibration	3115	7/5/2019	7/5/2021
T12	ANP07504	Cable	CLU40-KMKM- 02.00F	1/17/2019	1/17/2021
T13	ANP06242	Attenuator	54A-10	3/13/2018	3/13/2020
T14	AN03170	High Pass Filter	HM1155-11SS	10/23/2019	10/23/2021
T15	ANDCCF	Duty Cycle Correction Factor	Multiple	10/1/2019	10/1/2021

**Measurement Data:** Reading listed by margin. Test Distance: 3 Meters

#	Freq	Rdng	T1	T2	T3	T4	Dist	Corr	Spec	Margin	Polar
			T5	T6	T7	T8					
			T9	T10	T11	T12					
			T13	T14	T15						
	MHz	dBµV	dB	dB	dB	dB	Table	dBµV/m	dBµV/m	dB	Ant
1	4514.910M				+0.0	+0.0	+0.0	45.0	54.0	-9.0	Vert
		43.4	+0.0	+0.0	+0.0	+0.0					
	Ave		+0.0	+0.9	+31.8	+0.7			37.5k FSK		
			+3.9	-33.7	+12.5						
			+9.9	+0.6							
2	4575.000M				+0.0	+0.0	+0.0	44.8	54.0	-9.2	Vert
		43.0	+0.0	+0.0	+0.0	+0.0					
	Ave		+0.0	+0.9	+31.9	+0.7					
			+4.0	-33.7	+12.5						
			+9.9	+0.6							
^	4575.000M				+0.0	+0.0	+0.0	62.9	54.0	+8.9	Vert
		48.6	+0.0	+0.0	+0.0	+0.0					
			+0.0	+0.9	+31.9	+0.7					
			+4.0	-33.7	+0.0						
			+9.9	+0.6							

4	4634.350M										
	Ave	42.2	+0.0	+0.0	+0.0	+0.0	44.2	54.0	-9.8	Vert	
			+0.0	+0.9	+32.1	+0.6					
			+4.0	-33.6	+12.5						
			+9.9	+0.6							
^	4634.350M										
		49.8	+0.0	+0.0	+0.0	+0.0	64.3	54.0	+10.3	Vert	
			+0.0	+0.9	+32.1	+0.6					
			+4.0	-33.6	+0.0						
			+9.9	+0.6							
6	991.310M										
	QP	35.8	-	+25.0	+0.0	+0.0	43.7	54.0	-10.3	Horiz	
			+2.1	+0.4	+0.0	+0.0					
			+0.0	+0.0	+0.0						
			+0.0	+0.0							
^	991.310M										
		41.2	-	+25.0	+0.0	+0.0	49.1	54.0	-4.9	Horiz	
			+2.1	+0.4	+0.0	+0.0					
			+0.0	+0.0	+0.0						
			+0.0	+0.0							
8	4540.010M										
	Ave	41.5	+0.0	+0.0	+0.0	+0.0	43.2	54.0	-10.8	Vert	
			+0.0	+0.9	+31.9	+0.7		AM			
			+3.9	-33.7	+12.5						
			+9.9	+0.6							
9	4514.930M										
	Ave	41.5	+0.0	+0.0	+0.0	+0.0	43.1	54.0	-10.9	Vert	
			+0.0	+0.9	+31.8	+0.7		12.5 FSK			
			+3.9	-33.7	+12.5						
			+9.9	+0.6							
^	4514.910M										
		49.8	+0.0	+0.0	+0.0	+0.0	63.9	54.0	+9.9	Vert	
			+0.0	+0.9	+31.8	+0.7					
			+3.9	-33.7	+0.0						
			+9.9	+0.6							
11	3660.020M										
	Ave	41.9	+0.0	+0.0	+0.0	+0.0	41.5	54.0	-12.5	Vert	
			+0.0	+0.9	+30.5	+0.5					
			+3.7	-33.7	+12.5						
			+9.7	+0.5							
^	3660.020M										
		48.1	+0.0	+0.0	+0.0	+0.0	60.2	54.0	+6.2	Vert	
			+0.0	+0.9	+30.5	+0.5					
			+3.7	-33.7	+0.0						
			+9.7	+0.5							



13	3707.030M					+0.0	+0.0	+0.0	40.5	54.0	-13.5	Vert
	Ave	40.7	+0.0	+0.0	+0.0	+0.0	+0.0	+0.0				
			+0.0	+0.9	+30.6	+0.5						
			+3.8	-33.7	+12.5							
			+9.7	+0.5								
^	3707.030M					+0.0	+0.0	+0.0	60.7	54.0	+6.7	Vert
		48.4	+0.0	+0.0	+0.0	+0.0	+0.0					
			+0.0	+0.9	+30.6	+0.5						
			+3.8	-33.7	+0.0							
			+9.7	+0.5								
15	2780.520M					+0.0	+0.0	+0.0	39.7	54.0	-14.3	Vert
	Ave	44.0	+0.0	+0.0	+0.0	+0.0	+0.0					
			+0.0	+0.7	+28.5	+0.2						
			+2.6	-34.1	+12.5							
			+9.9	+0.4								
^	2780.520M					+0.0	+0.0	+0.0	57.9	54.0	+3.9	Vert
		49.7	+0.0	+0.0	+0.0	+0.0	+0.0					
			+0.0	+0.7	+28.5	+0.2						
			+2.6	-34.1	+0.0							
			+9.9	+0.4								
17	2745.070M					+0.0	+0.0	+0.0	37.1	54.0	-16.9	Vert
	Ave	41.5	+0.0	+0.0	+0.0	+0.0	+0.0					
			+0.0	+0.7	+28.4	+0.2						
			+2.6	-34.1	+12.5							
			+9.9	+0.4								
^	2745.070M					+0.0	+0.0	+0.0	56.2	54.0	+2.2	Vert
		48.1	+0.0	+0.0	+0.0	+0.0	+0.0					
			+0.0	+0.7	+28.4	+0.2						
			+2.6	-34.1	+0.0							
			+9.9	+0.4								
19	5417.610M					+0.0	+0.0	+0.0	36.9	54.0	-17.1	Vert
	Ave	33.6	+0.0	+0.0	+0.0	+0.0	+0.0					
			+0.0	+1.0	+33.4	+0.4						
			+4.5	-33.7	+12.5							
			+9.8	+0.4								
^	5417.610M					+0.0	+0.0	+0.0	61.4	54.0	+7.4	Vert
		45.6	+0.0	+0.0	+0.0	+0.0	+0.0					
			+0.0	+1.0	+33.4	+0.4						
			+4.5	-33.7	+0.0							
			+9.8	+0.4								
21	2709.110M					+0.0	+0.0	+0.0	36.6	54.0	-17.4	Vert
	Ave	41.1	+0.0	+0.0	+0.0	+0.0	+0.0					
			+0.0	+0.7	+28.3	+0.2						
			+2.6	-34.1	+12.5							
			+9.9	+0.4								

^	2709.110M										
		48.0	+0.0	+0.0	+0.0	+0.0	56.0	54.0	+2.0	Vert	
			+0.0	+0.7	+28.3	+0.2					
			+2.6	-34.1	+0.0						
			+9.9	+0.4							
23	3611.770M										
		35.6	+0.0	+0.0	+0.0	+0.0	34.8	54.0	-19.2	Vert	
	Ave		+0.0	+0.8	+30.3	+0.6					
			+3.6	-33.8	+12.5						
			+9.7	+0.5							
^	3611.770M										
		46.3	+0.0	+0.0	+0.0	+0.0	58.0	54.0	+4.0	Vert	
			+0.0	+0.8	+30.3	+0.6					
			+3.6	-33.8	+0.0						
			+9.7	+0.5							
25	6319.940M										
		54.0	+0.0	+0.0	+0.0	+0.0	71.7	108.8	-37.1	Horiz	
			+0.0	+1.0	+34.6	+0.5					
			+5.2	-34.1	+0.0						
			+10.0	+0.5							
26	5560.480M										
		48.8	+0.0	+0.0	+0.0	+0.0	64.9	108.8	-43.9	Vert	
			+0.0	+1.0	+33.7	+0.4					
			+4.5	-33.7	+0.0						
			+9.8	+0.4							
27	6404.630M										
		46.8	+0.0	+0.0	+0.0	+0.0	64.7	108.8	-44.1	Vert	
			+0.0	+1.1	+34.6	+0.6					
			+5.4	-34.2	+0.0						
			+9.9	+0.5							
28	1806.180M										
		48.2	+0.0	+0.0	+0.0	+0.0	52.8	108.8	-56.0	Vert	
			+0.0	+0.5	+26.1	+0.2					
			+2.2	-34.8	+0.0						
			+9.9	+0.5							
29	1853.600M										
		45.7	+0.0	+0.0	+0.0	+0.0	50.8	108.8	-58.0	Horiz	
			+0.0	+0.5	+26.5	+0.2					
			+2.3	-34.7	+0.0						
			+9.9	+0.4							
30	1830.090M										
		45.8	+0.0	+0.0	+0.0	+0.0	50.6	108.8	-58.2	Vert	
			+0.0	+0.5	+26.3	+0.2					
			+2.3	-34.8	+0.0						
			+9.9	+0.4							

31	855.500M	-	+5.8	+1.4	+0.0	48.4	108.8	-60.4	Vert
	42.8	27.6	+23.8	+0.0	+0.0				
		+1.9	+0.3	+0.0	+0.0				
		+0.0	+0.0	+0.0					
		+0.0	+0.0						
32	33.900M	-	+5.8	+0.3	+0.0	42.5	108.8	-66.3	Vert
	49.2	28.0	+14.8	+0.0	+0.0				
		+0.3	+0.1	+0.0	+0.0				
		+0.0	+0.0	+0.0					
		+0.0	+0.0						
33	5489.780M		+0.0	+0.0	+0.0	40.9	108.8	-67.9	Vert
	37.5	+0.0	+0.0	+0.0	+0.0				
	Ave	+0.0	+1.0	+33.5	+0.4				
		+4.5	-33.7	+12.5					
		+9.8	+0.4						
^	5489.780M		+0.0	+0.0	+0.0	62.4	108.8	-46.4	Vert
	46.5	+0.0	+0.0	+0.0	+0.0				
		+0.0	+1.0	+33.5	+0.4				
		+4.5	-33.7	+0.0					
		+9.8	+0.4						
35	40.700M	-	+5.8	+0.3	+0.0	37.8	108.8	-71.0	Vert
	47.4	27.9	+11.8	+0.0	+0.0				
		+0.3	+0.1	+0.0	+0.0				
		+0.0	+0.0	+0.0					
		+0.0	+0.0						
36	89.200M	-	+5.8	+0.4	+0.0	26.6	108.8	-82.2	Horiz
	40.5	27.8	+7.1	+0.0	+0.0				
		+0.5	+0.1	+0.0	+0.0				
		+0.0	+0.0	+0.0					
		+0.0	+0.0						
37	30.000M		+0.0	+0.0	+0.0	26.6	108.8	-82.2	Para
	20.6	+0.0	+0.0	+0.0	+5.6				
		+0.0	+0.1	+0.0	+0.0				
		+0.3	+0.0	+0.0					
		+0.0	+0.0						
38	14.150M		+0.0	+0.0	-40.0	-9.5	108.8	-118.3	Perp
	21.2	+0.0	+0.0	+0.0	+9.1				
		+0.0	+0.0	+0.0	+0.0				
		+0.2	+0.0	+0.0					
		+0.0	+0.0						
39	15.165M		+0.0	+0.0	-40.0	-11.0	108.8	-119.8	Perp
	19.6	+0.0	+0.0	+0.0	+9.1				
		+0.0	+0.1	+0.0	+0.0				
		+0.2	+0.0	+0.0					
		+0.0	+0.0						

40	29.254M				+0.0	+0.0	-40.0	-14.2	108.8	-123.0	Perp
		19.6	+0.0	+0.0	+0.0	+5.8					
			+0.0	+0.1	+0.0	+0.0					
			+0.3	+0.0	+0.0						
			+0.0	+0.0							
41	29.343M				+0.0	+0.0	-40.0	-16.6	108.8	-125.4	Para
		17.2	+0.0	+0.0	+0.0	+5.8					
			+0.0	+0.1	+0.0	+0.0					
			+0.3	+0.0	+0.0						
			+0.0	+0.0							
42	13.935k				+0.0	+0.0	-80.0	-18.9	108.8	-127.7	Perp
		48.1	+0.0	+0.0	+0.0	+13.0					
			+0.0	+0.0	+0.0	+0.0					
			+0.0	+0.0	+0.0						
			+0.0	+0.0							
43	62.298k				+0.0	+0.0	-80.0	-30.1	108.8	-138.9	Para
		40.2	+0.0	+0.0	+0.0	+9.7					
			+0.0	+0.0	+0.0	+0.0					
			+0.0	+0.0	+0.0						
			+0.0	+0.0							



Test Location: CKC Laboratories, Inc. · 22116 23rd Dr SE · Bothell, WA 98021 · 800-500-4362  
 Customer: **Itron, Inc.**  
 Specification: **15.247(d) / 15.209 Radiated Spurious Emissions**  
 Work Order #: **103221** Date: 11/23/2019  
 Test Type: **Radiated Scan** Time: 10:51:05  
 Tested By: Matthew Harrison Sequence#: 16  
 Software: EMITest 5.03.12

**Equipment Tested:**

Device	Manufacturer	Model #	S/N
Configuration 2			


**Support Equipment:**

Device	Manufacturer	Model #	S/N
Configuration 2			

**Test Conditions / Notes:**

Temperature: 23° C  
 Humidity: 39%  
 Pressure: 101.1 kPa  
  
 Frequency Range: 9kHz-10GHz  
 Frequency tested:  
 Firmware power setting: Max  
  
 Antenna type: Omnidirectional  
 Antenna Gain: 8.15 dBi.  
  
 Duty Cycle: 100% Modulated  
  
 Test Method: ANSI C63.10: 2013  
 Test Mode: Transmitting  
 Test Setup: EUT is setup in a tabletop configuration on a Styrofoam table:  
 Below 1GHz set 80cm high.  
 Above 1GHz set 1.5m high  
  
 Co-Location testing was performed with Wi-Fi, Cell, and FHSS radios transmitting simultaneously in both CCU100C and CCU100RC configurations.  
  
 Modification #1 and #2 were in place during testing.

Itron, Inc. WO#: 103221 Sequence#: 16 Date: 11/23/2019  
 15.247(d) / 15.209 Radiated Spurious Emissions Test Distance: 3 Meters Horiz

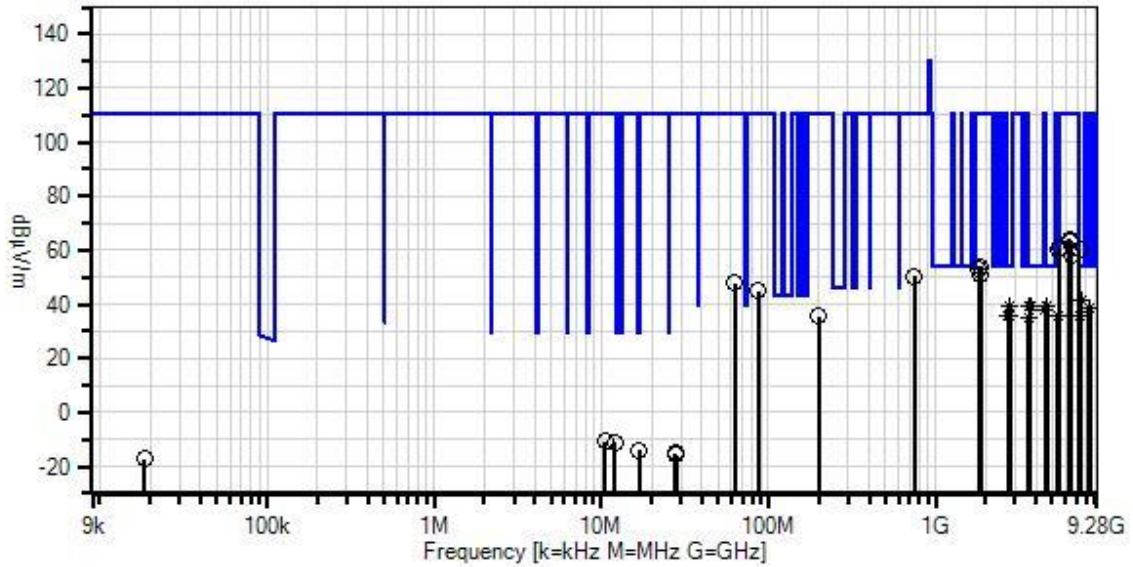

- Readings
  - × QP Readings
  - ▼ Ambient
  - Peak Readings
  - \* Average Readings
- Software Version: 5.03.12
- 1 - 15.247(d) / 15.209 Radiated Spurious Emissions

**Test Equipment:**

ID	Asset #	Description	Model	Calibration Date	Cal Due Date
T1	AN03628	Biconilog Antenna	3142E	6/11/2019	6/11/2021
T2	ANP06123	Attenuator	18N-6	4/5/2019	4/5/2021
T3	ANP05305	Cable	ETSI-50T	9/6/2019	9/6/2021
T4	ANP05360	Cable	RG214	1/31/2018	1/31/2020
T5	ANP06540	Cable	Heliac	8/23/2019	8/23/2021
	AN02673	Spectrum Analyzer	E4446A	2/22/2019	2/22/2021
T6	AN00052	Loop Antenna	6502	5/7/2018	5/7/2020
T7	ANP06515	Cable	Heliac	6/29/2018	6/29/2020
T8	AN03540	Preamplifier	83017A	5/13/2019	5/13/2021
T9	AN01467	Horn Antenna-ANSI C63.5 Calibration	3115	7/5/2019	7/5/2021
T10	ANP07504	Cable	CLU40-KMKM- 02.00F	1/17/2019	1/17/2021
T11	ANP06242	Attenuator	54A-10	3/13/2018	3/13/2020
T12	AN03170	High Pass Filter	HM1155-11SS	10/23/2019	10/23/2021
T13	ANDCCF	Duty Cycle Correction Factor	Multiple	10/1/2019	10/1/2021

**Measurement Data:** Reading listed by margin. Test Distance: 3 Meters

#	Freq	Rdng	T1	T2	T3	T4	Dist	Corr	Spec	Margin	Polar
			T5	T6	T7	T8					
			T9	T10	T11	T12					
			T13								
	MHz	dBµV	dB	dB	dB	dB	Table	dBµV/m	dBµV/m	dB	Ant
1	7414.020M				+0.0	+0.0	+0.0	41.7	54.0	-12.3	Horiz
		33.9	+0.0	+0.0	+5.4	-34.6					
	Ave		+1.5	+0.0	+9.9	+0.6					
			+37.1	+0.4							
			+12.5								
^	7414.020M				+0.0	+0.0	+0.0	63.6	54.0	+9.6	Horiz
		43.3	+0.0	+0.0	+5.4	-34.6					
			+1.5	+0.0	+9.9	+0.6					
			+37.1	+0.4							
			+0.0								
3	4634.170M				+0.0	+0.0	+0.0	39.6	54.0	-14.4	Vert
		37.6	+0.0	+0.0	+4.0	-33.6					
	Ave		+0.9	+0.0	+9.9	+0.6					
			+32.1	+0.6							
			+12.5								
^	4634.170M				+0.0	+0.0	+0.0	59.5	54.0	+5.5	Vert
		45.0	+0.0	+0.0	+4.0	-33.6					
			+0.9	+0.0	+9.9	+0.6					
			+32.1	+0.6							
			+0.0								

5	2780.305M			+0.0	+0.0	+0.0	39.6	54.0	-14.4	Vert
	Ave	43.9	+0.0	+0.0	+2.6	-34.1				
			+0.7	+0.0	+9.9	+0.4				
			+28.5	+0.2						
			+12.5							
^	2780.305M			+0.0	+0.0	+0.0	56.8	54.0	+2.8	Vert
		48.6	+0.0	+0.0	+2.6	-34.1				
			+0.7	+0.0	+9.9	+0.4				
			+28.5	+0.2						
			+0.0							
7	3660.200M			+0.0	+0.0	+0.0	39.4	54.0	-14.6	Vert
	Ave	39.8	+0.0	+0.0	+3.7	-33.7				
			+0.9	+0.0	+9.7	+0.5				
			+30.5	+0.5						
			+12.5							
^	3660.200M			+0.0	+0.0	+0.0	58.6	54.0	+4.6	Vert
		46.5	+0.0	+0.0	+3.7	-33.7				
			+0.9	+0.0	+9.7	+0.5				
			+30.5	+0.5						
			+0.0							
9	3706.950M			+0.0	+0.0	+0.0	39.3	54.0	-14.7	Vert
	Ave	39.5	+0.0	+0.0	+3.8	-33.7				
			+0.9	+0.0	+9.7	+0.5				
			+30.6	+0.5						
			+12.5							
^	3706.950M			+0.0	+0.0	+0.0	58.9	54.0	+4.9	Vert
		46.6	+0.0	+0.0	+3.8	-33.7				
			+0.9	+0.0	+9.7	+0.5				
			+30.6	+0.5						
			+0.0							
11	4574.885M			+0.0	+0.0	+0.0	39.3	54.0	-14.7	Vert
	Ave	37.5	+0.0	+0.0	+4.0	-33.7				
			+0.9	+0.0	+9.9	+0.6				
			+31.9	+0.7						
			+12.5							
^	4574.885M			+0.0	+0.0	+0.0	59.0	54.0	+5.0	Vert
		44.7	+0.0	+0.0	+4.0	-33.7				
			+0.9	+0.0	+9.9	+0.6				
			+31.9	+0.7						
			+0.0							
13	8340.870M			+0.0	+0.0	+0.0	38.7	54.0	-15.3	Horiz
	Ave	30.4	+0.0	+0.0	+5.8	-34.9				
			+1.7	+0.0	+9.9	+0.8				
			+37.0	+0.5						
			+12.5							



^	8340.870M			+0.0	+0.0	+0.0	62.6	54.0	+8.6	Horiz
		41.8	+0.0	+0.0	+5.8	-34.9				
			+1.7	+0.0	+9.9	+0.8				
			+37.0	+0.5						
			+0.0							
15	8234.270M			+0.0	+0.0	+0.0	38.5	54.0	-15.5	Vert
		30.3	+0.0	+0.0	+5.7	-35.0				
	Ave		+1.7	+0.0	+9.9	+0.9				
			+37.0	+0.5						
			+12.5							
^	8234.270M			+0.0	+0.0	+0.0	63.4	54.0	+9.4	Vert
		42.7	+0.0	+0.0	+5.7	-35.0				
			+1.7	+0.0	+9.9	+0.9				
			+37.0	+0.5						
			+0.0							
17	4514.585M			+0.0	+0.0	+0.0	37.8	54.0	-16.2	Vert
		36.2	+0.0	+0.0	+3.9	-33.7				
	Ave		+0.9	+0.0	+9.9	+0.6				
			+31.8	+0.7						
			+12.5							
^	4514.585M			+0.0	+0.0	+0.0	59.5	54.0	+5.5	Vert
		45.4	+0.0	+0.0	+3.9	-33.7				
			+0.9	+0.0	+9.9	+0.6				
			+31.8	+0.7						
			+0.0							

19	5418.380M			+0.0	+0.0	+0.0	36.1	54.0	-17.9	Vert
		32.8	+0.0	+0.0	+4.5	-33.7				
	Ave		+1.0	+0.0	+9.8	+0.4				
			+33.4	+0.4						
			+12.5							
^	5418.380M			+0.0	+0.0	+0.0	59.5	54.0	+5.5	Vert
		43.7	+0.0	+0.0	+4.5	-33.7				
			+1.0	+0.0	+9.8	+0.4				
			+33.4	+0.4						
			+0.0							
21	2744.715M			+0.0	+0.0	+0.0	35.9	54.0	-18.1	Vert
		40.3	+0.0	+0.0	+2.6	-34.1				
	Ave		+0.7	+0.0	+9.9	+0.4				
			+28.4	+0.2						
			+12.5							
^	2744.715M			+0.0	+0.0	+0.0	55.9	54.0	+1.9	Vert
		47.8	+0.0	+0.0	+2.6	-34.1				
			+0.7	+0.0	+9.9	+0.4				
			+28.4	+0.2						
			+0.0							
23	2709.120M			+0.0	+0.0	+0.0	35.7	54.0	-18.3	Vert
		40.2	+0.0	+0.0	+2.6	-34.1				
	Ave		+0.7	+0.0	+9.9	+0.4				
			+28.3	+0.2						
			+12.5							
^	2709.120M			+0.0	+0.0	+0.0	54.8	54.0	+0.8	Vert
		46.8	+0.0	+0.0	+2.6	-34.1				
			+0.7	+0.0	+9.9	+0.4				
			+28.3	+0.2						
			+0.0							
25	7319.185M			+0.0	+0.0	+0.0	35.5	54.0	-18.5	Vert
		28.2	+0.0	+0.0	+5.4	-34.6				
	Ave		+1.3	+0.0	+9.9	+0.6				
			+36.8	+0.4						
			+12.5							
^	7319.185M			+0.0	+0.0	+0.0	61.9	54.0	+7.9	Vert
		42.1	+0.0	+0.0	+5.4	-34.6				
			+1.3	+0.0	+9.9	+0.6				
			+36.8	+0.4						
			+0.0							
27	3612.340M			+0.0	+0.0	+0.0	34.9	54.0	-19.1	Vert
		35.7	+0.0	+0.0	+3.6	-33.8				
	Ave		+0.8	+0.0	+9.7	+0.5				
			+30.3	+0.6						
			+12.5							

3612.340M				+0.0	+0.0	+0.0	57.0	54.0	+3.0	Vert
	45.3	+0.0	+0.0	+3.6	-33.8					
		+0.8	+0.0	+9.7	+0.5					
		+30.3	+0.6							
		+0.0								
29 6319.895M				+0.0	+0.0	+0.0	64.1	110.4	-46.3	Horiz
	46.4	+0.0	+0.0	+5.2	-34.1					
		+1.0	+0.0	+10.0	+0.5					
		+34.6	+0.5							
		+0.0								
30 6405.410M				+0.0	+0.0	+0.0	63.5	110.4	-46.9	Horiz
	45.6	+0.0	+0.0	+5.4	-34.2					
		+1.1	+0.0	+9.9	+0.5					
		+34.6	+0.6							
		+0.0								
31 5560.445M				+0.0	+0.0	+0.0	61.0	110.4	-49.4	Horiz
	44.9	+0.0	+0.0	+4.5	-33.7					
		+1.0	+0.0	+9.8	+0.4					
		+33.7	+0.4							
		+0.0								
32 5489.770M				+0.0	+0.0	+0.0	60.5	110.4	-49.9	Vert
	44.6	+0.0	+0.0	+4.5	-33.7					
		+1.0	+0.0	+9.8	+0.4					
		+33.5	+0.4							
		+0.0								
33 7224.790M				+0.0	+0.0	+0.0	60.1	110.4	-50.3	Horiz
	40.9	+0.0	+0.0	+5.3	-34.5					
		+1.1	+0.0	+9.9	+0.4					
		+36.5	+0.5							
		+0.0								
34 6487.975M				+0.0	+0.0	+0.0	58.0	110.4	-52.4	Horiz
	39.9	+0.0	+0.0	+5.6	-34.2					
		+1.2	+0.0	+9.9	+0.5					
		+34.5	+0.6							
		+0.0								
35 1853.665M				+0.0	+0.0	+0.0	53.5	110.4	-56.9	Vert
	48.4	+0.0	+0.0	+2.3	-34.7					
		+0.5	+0.0	+9.9	+0.4					
		+26.5	+0.2							
		+0.0								
36 1806.220M				+0.0	+0.0	+0.0	53.2	110.4	-57.2	Vert
	48.6	+0.0	+0.0	+2.2	-34.8					
		+0.5	+0.0	+9.9	+0.5					
		+26.1	+0.2							
		+0.0								

37	1829.650M				+0.0	+0.0	+0.0	51.0	110.4	-59.4	Horiz
		46.2	+0.0	+0.0	+2.3	-34.8					
			+0.5	+0.0	+9.9	+0.4					
			+26.3	+0.2							
			+0.0								
38	749.700M				+1.3	+1.7	+0.0	50.4	110.4	-60.0	Horiz
		18.1	+23.2	+5.8	+0.0	+0.0					
			+0.3	+0.0	+0.0	+0.0					
			+0.0	+0.0							
			+0.0								
39	63.000M				+0.4	+0.4	+0.0	48.0	110.4	-62.4	Vert
		33.7	+7.6	+5.8	+0.0	+0.0					
			+0.1	+0.0	+0.0	+0.0					
			+0.0	+0.0							
			+0.0								
40	86.300M				+0.4	+0.5	+0.0	44.9	110.4	-65.5	Vert
		31.1	+7.0	+5.8	+0.0	+0.0					
			+0.1	+0.0	+0.0	+0.0					
			+0.0	+0.0							
			+0.0								
41	198.800M				+0.7	+0.8	+0.0	35.7	110.4	-74.7	Vert
		18.4	+9.8	+5.8	+0.0	+0.0					
			+0.2	+0.0	+0.0	+0.0					
			+0.0	+0.0							
			+0.0								
42	10.568M				+0.0	+0.0	-40.0	-10.8	110.4	-121.2	Perp
		19.8	+0.0	+0.0	+0.2	+0.0					
			+0.0	+9.2	+0.0	+0.0					
			+0.0	+0.0							
			+0.0								
43	12.090M				+0.0	+0.0	-40.0	-10.9	110.4	-121.3	Perp
		19.7	+0.0	+0.0	+0.2	+0.0					
			+0.0	+9.2	+0.0	+0.0					
			+0.0	+0.0							
			+0.0								
44	16.896M				+0.0	+0.0	-40.0	-13.9	110.4	-124.3	Perp
		17.2	+0.0	+0.0	+0.2	+0.0					
			+0.1	+8.6	+0.0	+0.0					
			+0.0	+0.0							
			+0.0								
45	27.702M				+0.0	+0.0	-40.0	-14.9	110.4	-125.3	Para
		18.5	+0.0	+0.0	+0.3	+0.0					
			+0.1	+6.2	+0.0	+0.0					
			+0.0	+0.0							
			+0.0								

46	28.209M				+0.0	+0.0	-40.0	-15.6	110.4	-126.0	Perp
		17.9	+0.0	+0.0	+0.3	+0.0					
			+0.1	+6.1	+0.0	+0.0					
			+0.0	+0.0							
			+0.0								
47	18.588k				+0.0	+0.0	-80.0	-17.3	110.4	-127.7	Perp
		50.6	+0.0	+0.0	+0.0	+0.0					
			+0.0	+12.1	+0.0	+0.0					
			+0.0	+0.0							
			+0.0								
48	80.346k				+0.0	+0.0	-80.0	-30.4	110.4	-140.8	Para
		39.9	+0.0	+0.0	+0.0	+0.0					
			+0.0	+9.7	+0.0	+0.0					
			+0.0	+0.0							
			+0.0								

## Band Edge

### Band Edge Summary

Configuration 1

Operating Mode: Single Channel (Low and High)

Frequency (MHz)	Modulation	Ant. Type	Field Strength (dBuV/m @3m)	Limit (dBuV/m @3m)	Results
614	FM 12.5k	Omnidirectional	39.4	<46	Pass
902	FM 12.5k	Omnidirectional	92.3	<108.8	Pass
928	FM 12.5k	Omnidirectional	78.1	< 108.8	Pass
960	FM 12.5k	Omnidirectional	48.2	<54	Pass
614	FM 37.5k	Omnidirectional	43.2	<46	Pass
902	FM 37.5k	Omnidirectional	89.3	<108.8	Pass
928	FM 37.5k	Omnidirectional	85.1	< 108.8	Pass
960	FM 37.5k	Omnidirectional	49.3	<54	Pass
614	AM	Omnidirectional	38.2	<46	Pass
902	AM	Omnidirectional	76.0	<108.8	Pass
928	AM	Omnidirectional	73.3	< 108.8	Pass
960	AM	Omnidirectional	42.5	<54	Pass

### Band Edge Summary

Configuration 1

Operating Mode: Hopping

Frequency (MHz)	Modulation	Ant. Type	Field Strength (dBuV/m @3m)	Limit (dBuV/m @3m)	Results
614	FM 12.5k	Omnidirectional	43.7	<46	Pass
902	FM 12.5k	Omnidirectional	87.7	<108.8	Pass
928	FM 12.5k	Omnidirectional	77.1	< 108.8	Pass
960	FM 12.5k	Omnidirectional	47.4	<54	Pass
614	FM 37.5k	Omnidirectional	25.1	<46	Pass
902	FM 37.5k	Omnidirectional	86.7	<108.8	Pass
928	FM 37.5k	Omnidirectional	83	< 108.8	Pass
960	FM 37.5k	Omnidirectional	50.4	<54	Pass
614	AM	Omnidirectional	38.3	<46	Pass
902	AM	Omnidirectional	73.3	<108.8	Pass
928	AM	Omnidirectional	76.0	< 108.8	Pass
960	AM	Omnidirectional	42.8	<54	Pass

Band Edge Summary					
Configuration 2					
Operating Mode: Single Channel (Low and High)					
Frequency (MHz)	Modulation	Ant. Type	Field Strength (dBuV/m @3m)	Limit (dBuV/m @3m)	Results
614	FM 12.5k	Omnidirectional	39.3	<46	Pass
902	FM 12.5k	Omnidirectional	90.0	<110.4	Pass
928	FM 12.5k	Omnidirectional	77.7	< 110.4	Pass
960	FM 12.5k	Omnidirectional	46.1	<54	Pass
614	FM 37.5k	Omnidirectional	25.8	<46	Pass
902	FM 37.5k	Omnidirectional	88.8	<110.4	Pass
928	FM 37.5k	Omnidirectional	81.3	< 110.4	Pass
960	FM 37.5k	Omnidirectional	48.5	<54	Pass
614	AM	Omnidirectional	38.3	<46	Pass
902	AM	Omnidirectional	76.2	<110.4	Pass
928	AM	Omnidirectional	74.4	< 110.4	Pass
960	AM	Omnidirectional	42.5	<54	Pass

Band Edge Summary					
Configuration 2					
Operating Mode: Hopping					
Frequency (MHz)	Modulation	Ant. Type	Field Strength (dBuV/m @3m)	Limit (dBuV/m @3m)	Results
614	FM 12.5k	Omnidirectional	44.7	<46	Pass
902	FM 12.5k	Omnidirectional	87.8	<110.4	Pass
928	FM 12.5k	Omnidirectional	77.1	< 110.4	Pass
960	FM 12.5k	Omnidirectional	48.6	<54	Pass
614	FM 37.5k	Omnidirectional	25.6	<46	Pass
902	FM 37.5k	Omnidirectional	84	<110.4	Pass
928	FM 37.5k	Omnidirectional	80.3	< 110.4	Pass
960	FM 37.5k	Omnidirectional	50.9	<54	Pass
614	AM	Omnidirectional	38.2	<46	Pass
902	AM	Omnidirectional	74.7	<110.4	Pass
928	AM	Omnidirectional	75.7	< 110.4	Pass
960	AM	Omnidirectional	42.5	<54	Pass

## Band Edge Plots

### Configuration 1 - FSK 12.5 kbps

