



element

Starkey Laboratories, Inc.

Livio BLE CIC Hearing Aid

FCC 15.247:2021

Bluetooth Low Energy (DTS) Radio

Report: STAK0237, Issue Date: July 16, 2021



NVLAP LAB CODE: 200881-0



This report must not be used to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the U.S. Government. This Report shall not be reproduced, except in full without written approval of the laboratory.



CERTIFICATE OF TEST

Last Date of Test: May 6, 2021
Starkey Laboratories, Inc.
EUT: Livio BLE CIC Hearing Aid

Radio Equipment Testing

Standards

Specification	Method
FCC 15.247:2021	ANSI C63.10:2013, KDB 558074

Results

Method Clause	Test Description	Applied	Results	Comments
6.2	Powerline Conducted Emissions	No	N/A	Not required for a battery powered EUT.
11.12.1, 11.13.2, 6.5, 6.6	Spurious Radiated Emissions	Yes	Pass	
11.6	Duty Cycle	Yes	Pass	
11.8.2	Occupied Bandwidth	Yes	Pass	
11.9.1.1	Output Power	Yes	Pass	
11.9.1.1	Equivalent Isotropic Radiated Power	Yes	Pass	
11.10.2	Power Spectral Density	Yes	Pass	
11.11	Band Edge Compliance	Yes	Pass	
11.11	Spurious Conducted Emissions	Yes	Pass	

Deviations From Test Standards

None

Approved By:

Eric Brandon, Department Manager

Product compliance is the responsibility of the client; therefore, the tests and equipment modes of operation represented in this report were agreed upon by the client, prior to testing. The results of this test pertain only to the sample(s) tested. The specific description is noted in each of the individual sections of the test report supporting this certificate of test. This report reflects only those tests from the referenced standards shown in the certificate of test. It does not include inspection or verification of labels, identification, marking or user information. As indicated in the Statement of Work sent with the quotation, Element's standard process is to always use the latest published version of the test methods even when earlier versions are cited in the test specification. Issuance of a purchase order was de facto acceptance of this approach. Otherwise, the client would have advised Element in writing of the specific version of the test methods they wanted applied to the subject testing.

REVISION HISTORY



Revision Number	Description	Date (yyyy-mm-dd)	Page Number
00	None		

ACCREDITATIONS AND AUTHORIZATIONS



United States

FCC - Designated by the FCC as a Telecommunications Certification Body (TCB). Certification chambers, Open Area Test Sites, and conducted measurement facilities are listed with the FCC.

A2LA - Accredited by A2LA to ISO / IEC 17065 as a product certifier. This allows Element to certify transmitters to FCC and IC specifications.

NVLAP - Each laboratory is accredited by NVLAP to ISO 17025

Canada

ISED - Recognized by Innovation, Science and Economic Development Canada as a Certification Body (CB) and as a CAB for the acceptance of test data.

European Union

European Commission – Recognized as an EU Notified Body validated for the EMCD and RED Directives.

United Kingdom

BEIS – Recognized by the UK as an Approved Body under the UK Radio Equipment and UK EMC Regulations.

Australia/New Zealand

ACMA - Recognized by ACMA as a CAB for the acceptance of test data.

Korea

MSIT / RRA - Recognized by KCC's RRA as a CAB for the acceptance of test data.

Japan

VCCI - Associate Member of the VCCI. Conducted and radiated measurement facilities are registered.

Taiwan

BSMI – Recognized by BSMI as a CAB for the acceptance of test data.

NCC - Recognized by NCC as a CAB for the acceptance of test data.

Singapore

IDA – Recognized by IDA as a CAB for the acceptance of test data.

Israel

MOC – Recognized by MOC as a CAB for the acceptance of test data.

Hong Kong

OFCA – Recognized by OFCA as a CAB for the acceptance of test data.

Vietnam

MIC – Recognized by MIC as a CAB for the acceptance of test data.


SCOPE

For details on the Scopes of our Accreditations, please visit:
<https://www.nwemc.com/emc-testing-accreditations>

FACILITIES



California Labs OC01-17 41 Tesla Irvine, CA 92618 (949) 861-8918	Minnesota Labs MN01-11 9349 W Broadway Ave. Brooklyn Park, MN 55445 (612)-638-5136	Oregon Labs EV01-12 6775 NE Evergreen Pkwy #400 Hillsboro, OR 97124 (503) 844-4066	Texas Labs TX01-09 3801 E Plano Pkwy Plano, TX 75074 (469) 304-5255	Washington Labs NC01-05 19201 120 th Ave NE Bothell, WA 98011 (425)984-6600
NVLAP				
NVLAP Lab Code: 200676-0	NVLAP Lab Code: 200881-0	NVLAP Lab Code: 200630-0	NVLAP Lab Code:201049-0	NVLAP Lab Code: 200629-0
Innovation, Science and Economic Development Canada				
2834B-1, 2834B-3	2834E-1, 2834E-3	2834D-1	2834G-1	2834F-1
BSMI				
SL2-IN-E-1154R	SL2-IN-E-1152R	SL2-IN-E-1017	SL2-IN-E-1158R	SL2-IN-E-1153R
VCCI				
A-0029	A-0109	A-0108	A-0201	A-0110
Recognized Phase I CAB for ISED, ACMA, BSMI, IDA, KCC/RRA, MIC, MOC, NCC, OFCA				
US0158	US0175	US0017	US0191	US0157

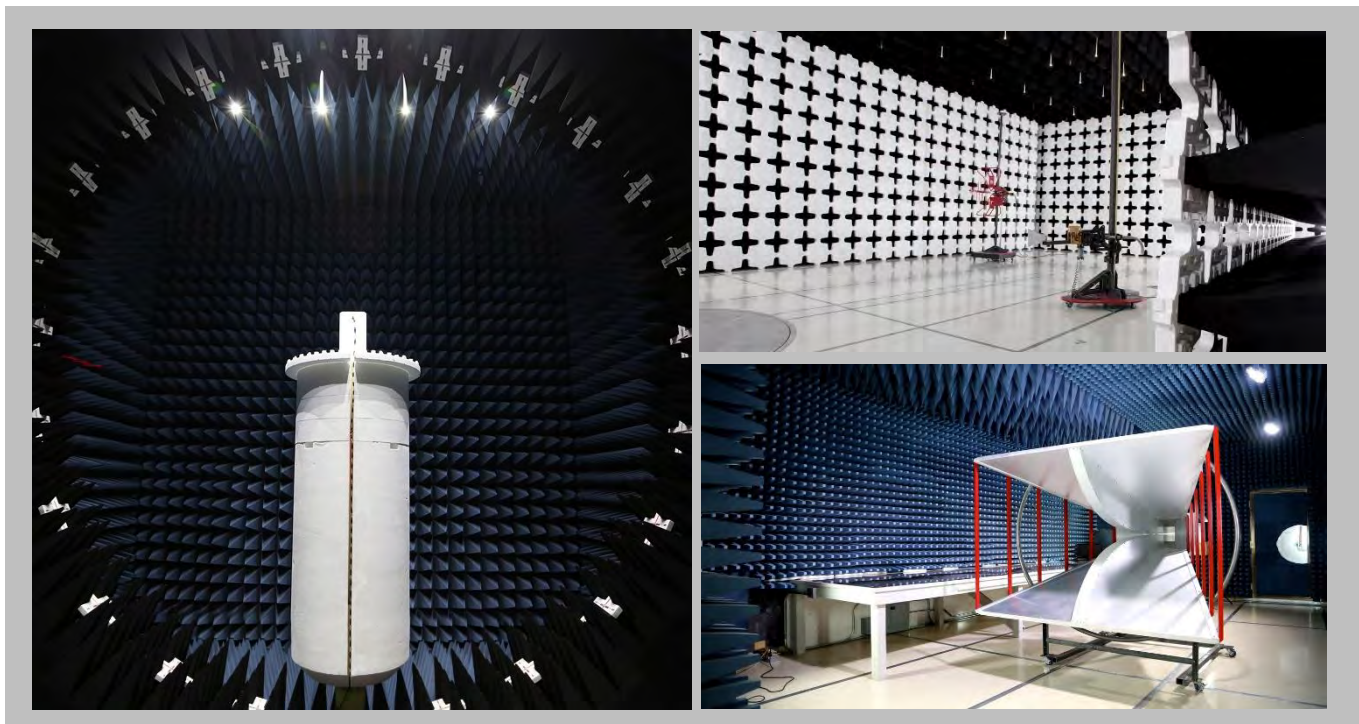

MEASUREMENT UNCERTAINTY



Measurement Uncertainty

When a measurement is made, the result will be different from the true or theoretically correct value. The difference is the result of tolerances in the measurement system that cannot be completely eliminated. To the extent that technology allows us, it has been our aim to minimize this error. Measurement uncertainty is a statistical expression of measurement error qualified by a probability distribution.


A measurement uncertainty estimation has been performed for each test per our internal quality document QM205.4.6. The estimation is used to compare the measured result with its "true" or theoretically correct value. The expanded measurement uncertainty (K=2) can be found in the table below. A lab specific value may also be found in the applicable test description section. Our measurement data meets or exceeds the measurement uncertainty requirements of the applicable specification; therefore, the test data can be compared directly to the specification limit to determine compliance. The calculations for estimating measurement uncertainty are based upon ETSI TR 100 028 (or CISPR 16-4-2 as applicable), and are available upon request.

The following table represents the Measurement Uncertainty (MU) budgets for each of the tests that may be contained in this report.


Test	+ MU	- MU
Frequency Accuracy	0.0007%	-0.0007%
Amplitude Accuracy (dB)	1.2 dB	-1.2 dB
Conducted Power (dB)	1.2 dB	-1.2 dB
Radiated Power via Substitution (dB)	0.7 dB	-0.7 dB
Temperature (degrees C)	0.7°C	-0.7°C
Humidity (% RH)	2.5% RH	-2.5% RH
Voltage (AC)	1.0%	-1.0%
Voltage (DC)	0.7%	-0.7%
Field Strength (dB)	5.2 dB	-5.2 dB
AC Powerline Conducted Emissions (dB)	2.6 dB	-2.6 dB

Test Setup Block Diagrams


Antenna Port Conducted Measurements

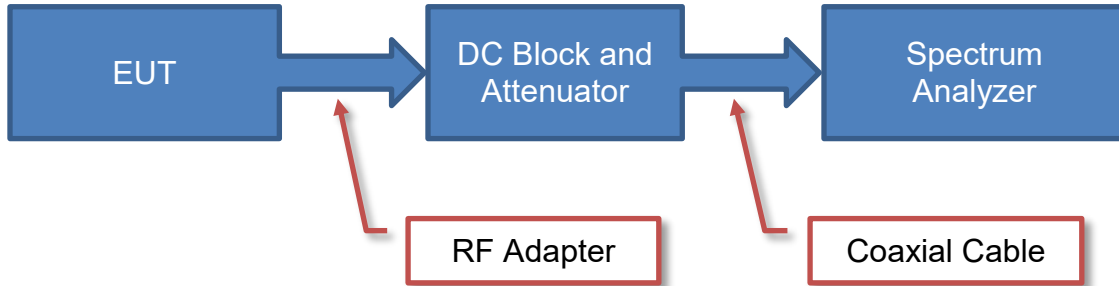

Near Field Test Fixture Measurements

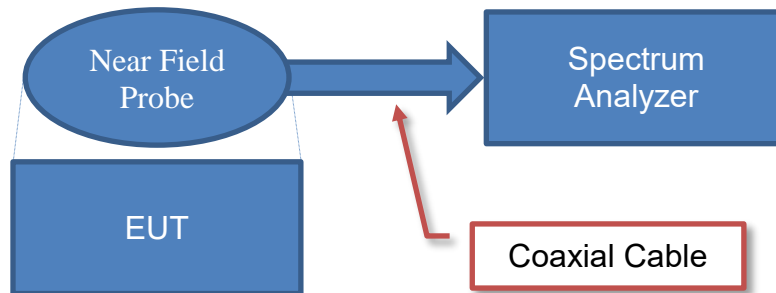


Spurious Radiated Emissions

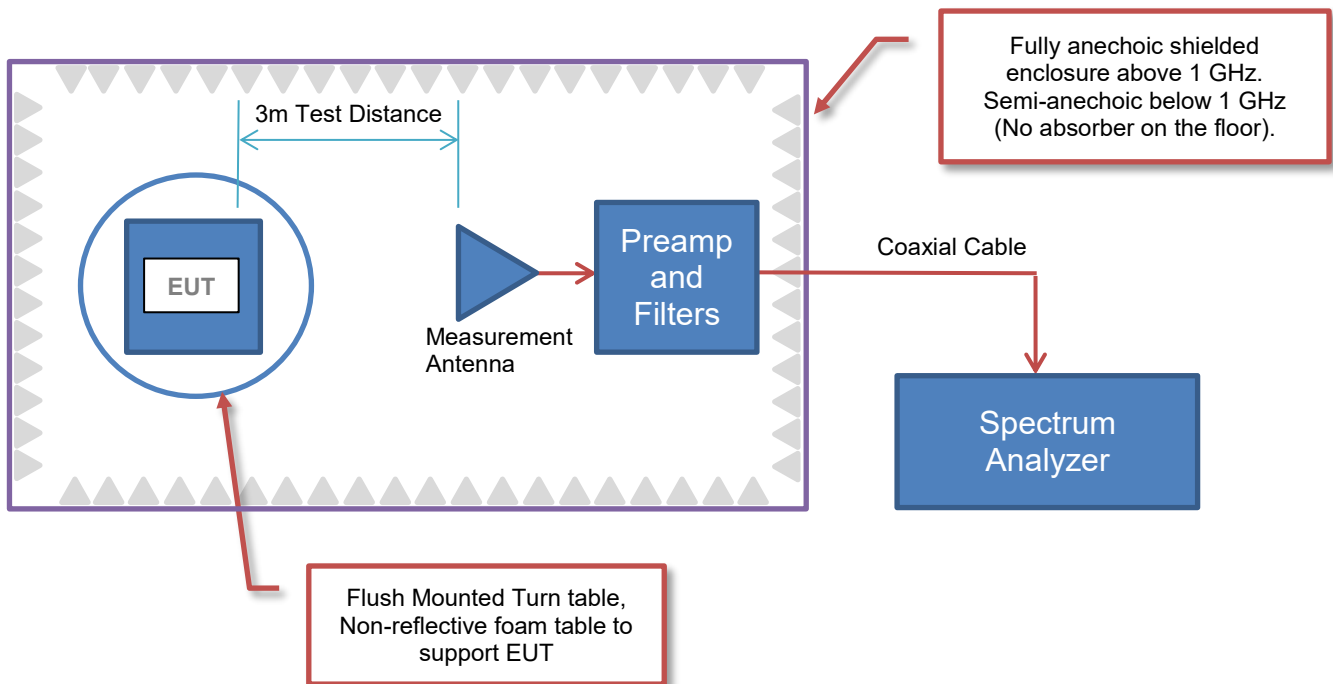

Test Setup Block Diagrams

Bore Sighting (>1GHz)

The diameter of the illumination area is the dimension of the line tangent to the EUT formed by 3 dB beamwidth of the measurement antenna at the measurement distance. At a 3 meter test distance, the diameter of the illumination area was 3.8 meters at 1 GHz and greater than 2.1 meters up to 6 GHz. Above 1 GHz, when required by the measurement standard, the antenna is pointed for both azimuth and elevation to maintain the receive antenna within the cone of radiation from the EUT. The specified measurement detectors were used for comparison of the emissions to the peak and average specification limits.

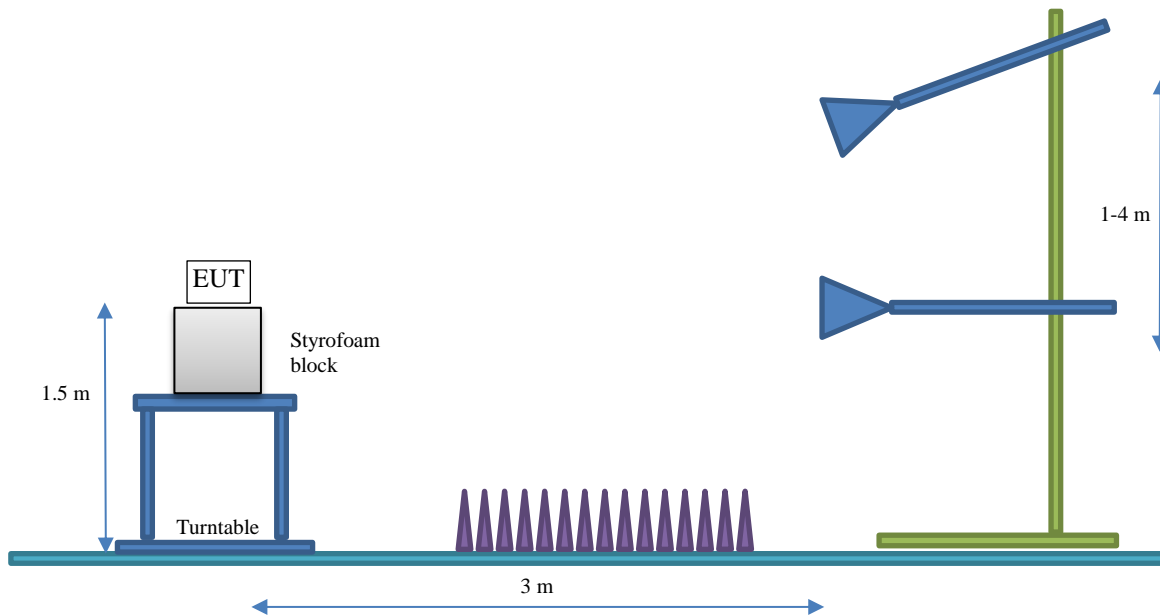

PRODUCT DESCRIPTION

Client and Equipment Under Test (EUT) Information

Company Name:	Starkey Laboratories, Inc.
Address:	6600 Washington Ave S
City, State, Zip:	Eden Prairie, MN 55344-3404
Test Requested By:	Bill Mitchell
EUT:	Livio BLE CIC Hearing Aid
First Date of Test:	May 3, 2021
Last Date of Test:	May 6, 2021
Receipt Date of Samples:	May 3, 2021
Equipment Design Stage:	Production
Equipment Condition:	No Damage
Purchase Authorization:	Verified

Information Provided by the Party Requesting the Test

Functional Description of the EUT:

Custom CIC Hearing Aid

Model Equivalency Statement:

Product will be sold as these specific model names:

Evolv AI 2400 CIC

Evolv AI 2000 CIC

Evolv AI 1600 CIC

Evolv AI 1200 CIC

Evolv AI 1000 CIC

Hardware and RF performance is identical. Firmware is identical. The different numbers indicate represent different levels of features (such as the number of noise reduction levels) that are unlocked in the device firmware when the device is programmed at manufacture. The level is set at manufacture and cannot be changed in the field. This allows the various levels to be sold at different price points.

Testing Objective:

To demonstrate compliance of the Bluetooth radio to FCC 15.247 requirements.

CONFIGURATIONS



Configuration STAK0237- 1

EUT			
Description	Manufacturer	Model/Part Number	Serial Number
Hearing Aid	Starkey Laboratories, Inc.	Evolv AI CIC	2911330746

Configuration STAK0237- 2

EUT			
Description	Manufacturer	Model/Part Number	Serial Number
Hearing Aid	Starkey Laboratories, Inc.	Evolv AI CIC	2911330747

MODIFICATIONS



Equipment Modifications

Item	Date	Test	Modification	Note	Disposition of EUT
1	2021-05-03	Spurious Radiated Emissions	Tested as delivered to Test Station.	No EMI suppression devices were added or modified during this test.	EUT was taken home by the client before the next scheduled test.
2	2021-05-06	Duty Cycle	Tested as delivered to Test Station.	No EMI suppression devices were added or modified during this test.	EUT remained at Element following the test.
3	2021-05-06	Occupied Bandwidth	Tested as delivered to Test Station.	No EMI suppression devices were added or modified during this test.	EUT remained at Element following the test.
4	2021-05-06	Output Power	Tested as delivered to Test Station.	No EMI suppression devices were added or modified during this test.	EUT remained at Element following the test.
5	2021-05-06	Equivalent Isotropic Radiated Power	Tested as delivered to Test Station.	No EMI suppression devices were added or modified during this test.	EUT remained at Element following the test.
6	2021-05-06	Power Spectral Density	Tested as delivered to Test Station.	No EMI suppression devices were added or modified during this test.	EUT remained at Element following the test.
7	2021-05-06	Band Edge Compliance	Tested as delivered to Test Station.	No EMI suppression devices were added or modified during this test.	EUT remained at Element following the test.
8	2021-05-06	Spurious Conducted Emissions	Tested as delivered to Test Station.	No EMI suppression devices were added or modified during this test.	Scheduled testing was completed.

POWER SETTINGS



The power settings, antenna gain value(s) and cable loss (if applicable) used for the testing contained in this report were provided by the customer and will affect the validity of the results. Element assumes no responsibility for the accuracy of this information.

ANTENNA GAIN (dBi)

Type	Provided by:	Frequency Range (MHz)	Gain (dBi)
Monopole	Manufacturer	2402-2480	-4.6

The EUT was tested using the power settings provided by the manufacturer:

SETTINGS FOR ALL TESTS IN THIS REPORT

Modulation Types	Channel	Position	Frequency (MHz)	Power Setting
1 Mbps, 2 Mbps	0	Low Channel	2402	0 dBm EIRP
	20	Mid Channel	2442	0 dBm EIRP
	39	High Channel	2480	0 dBm EIRP

SPURIOUS RADIATED EMISSIONS



TEST DESCRIPTION

The highest gain antenna of each type to be used with the EUT was tested. The EUT was configured for the required transmit frequencies and the modes as showed in the data sheets.

For each configuration, the spectrum was scanned throughout the specified range as part of the exploratory investigation of the emissions. These “pre-scans” are not included in the report. Final measurements on individual emissions were then made and included in this test report.

The individual emissions from the EUT were maximized by rotating the EUT on a turntable, adjusting the position of the EUT and EUT antenna in three orthogonal axis if required, and adjusting the measurement antenna height and polarization (per ANSI C63.10). A preamp and high pass filter (and notch filter) were used for this test in order to provide sufficient measurement sensitivity.

Measurements were made with the required detectors and annotated on the data for each individual point using the following annotation:

- QP = Quasi-Peak Detector
- PK = Peak Detector
- AV = RMS Detector

Measurements were made to satisfy the specific requirements of the test specification for out of band emissions as well as the restricted band requirements.

If there are no detectable emissions above the noise floor, the data included may show noise floor measurements for reference only.

Measurements within 2 MHz of the allowable band may have been taken using the integration method from ANSI C63.10 clause 11.13.3. This procedure uses the channel power feature of the spectrum analyzer to integrate the power of the emission within a 1 MHz bandwidth.

Where the radio test software does not provide for a duty cycle at continuous transmit conditions (> 98%) and the RMS (power average) measurements were made across the on and off times of the EUT transmissions, a duty cycle correction is added to the measurements using the formula of $10 \cdot \log(1/dc)$.

TEST EQUIPMENT

Description	Manufacturer	Model	ID	Last Cal.	Cal. Due
Analyzer - Spectrum Analyzer	Keysight	N9010A (EXA)	AFQ	2020-12-27	2021-12-27
Antenna - Standard Gain	ETS Lindgren	3160-09	AHG	NCR	NCR
Cable	ESM Cable Corp.	TTBJ141 KMKM-72	MNP	2020-09-11	2021-09-11
Amplifier - Pre-Amplifier	Miteq	JSD4-18002600-26-8P	APU	2020-09-11	2021-09-11
Antenna - Standard Gain	ETS Lindgren	3160-08	AIQ	NCR	NCR
Antenna - Double Ridge	ETS-Lindgren	3115	AJQ	2021-01-25	2023-01-25
Amplifier - Pre-Amplifier	Miteq	AMF-3D-00100800-32-13P	AVT	2021-01-15	2022-01-15
Amplifier - Pre-Amplifier	Miteq	AMF-6F-08001200-30-10P	AVV	2021-01-15	2022-01-15
Amplifier - Pre-Amplifier	Miteq	AMF-6F-12001800-30-10P	AVW	2021-01-15	2022-01-15
Antenna - Biconilog	ETS Lindgren	3142D	AXO	2019-09-03	2021-09-03
Antenna - Standard Gain	ETS Lindgren	3160-07	AXP	NCR	NCR
Filter - Low Pass	Micro-Tronics	LPM50004	LFK	2020-09-24	2021-09-24
Filter - High Pass	Micro-Tronics	HPM50111	LFN	2020-09-14	2021-09-14
Cable	ESM Cable Corp.	Bilog Cables	MNH	2020-10-06	2021-10-06
Cable	ESM Cable Corp.	Double Ridge Guide Horn Cables	MNI	2021-01-15	2022-01-15
Cable	ESM Cable Corp.	Standard Gain Horn Cables	MNJ	2021-03-07	2022-03-07
Attenuator	Fairview Microwave	SA18E-20	TWZ	2020-09-14	2021-09-14
Amplifier - Pre-Amplifier	Miteq	AM-1616-1000	AVO	2020-10-06	2021-10-06

SPURIOUS RADIATED EMISSIONS



MEASUREMENT UNCERTAINTY

Description		
Expanded k=2	5.2 dB	-5.2 dB

FREQUENCY RANGE INVESTIGATED

30 MHz TO 26500 MHz

POWER INVESTIGATED

Internal Battery

CONFIGURATIONS INVESTIGATED

STAK0237-1

MODES INVESTIGATED

Transmitting Bluetooth Low Energy channels 0, 20, and 39 (2402, 2442, and 2480 MHz), 1 Mbps and 2 Mbps
Transmitting Bluetooth Low Energy channels 0, 39 (2402, 2480 MHz), 1 Mbps and 2 Mbps

SPURIOUS RADIATED EMISSIONS



EUT:	Livio BLE CIC Hearing Aid	Work Order:	STAK0237
Serial Number:	2911330746	Date:	2021-05-03
Customer:	Starkey Laboratories, Inc.	Temperature:	22.1°C
Attendees:	Aaron Anderson	Relative Humidity:	40.2%
Customer Project:	None	Bar. Pressure:	1005 mb
Tested By:	Christopher Heintzleman	Job Site:	MN05
Power:	Internal Battery	Configuration:	STAK0237-1

TEST SPECIFICATIONS

Specification:	Method:
FCC 15.247:2021	ANSI C63.10:2013

TEST PARAMETERS

Run #:	12	Test Distance (m):	3	Ant. Height(s) (m):	1 to 4(m)
--------	----	--------------------	---	---------------------	-----------

COMMENTS


See comments for EUT orientation and data rate. EUT is transmitting at its operational duty cycle. KDB 558074 answer 3b allows for the EUT to be in its operational DC, and therefore no DCCF was applied.

EUT OPERATING MODES

Transmitting Bluetooth Low Energy channels 0, 20, and 39 (2402, 2442, and 2480 MHz), 1 Mbps and 2 Mbps

DEVIATIONS FROM TEST STANDARD

None

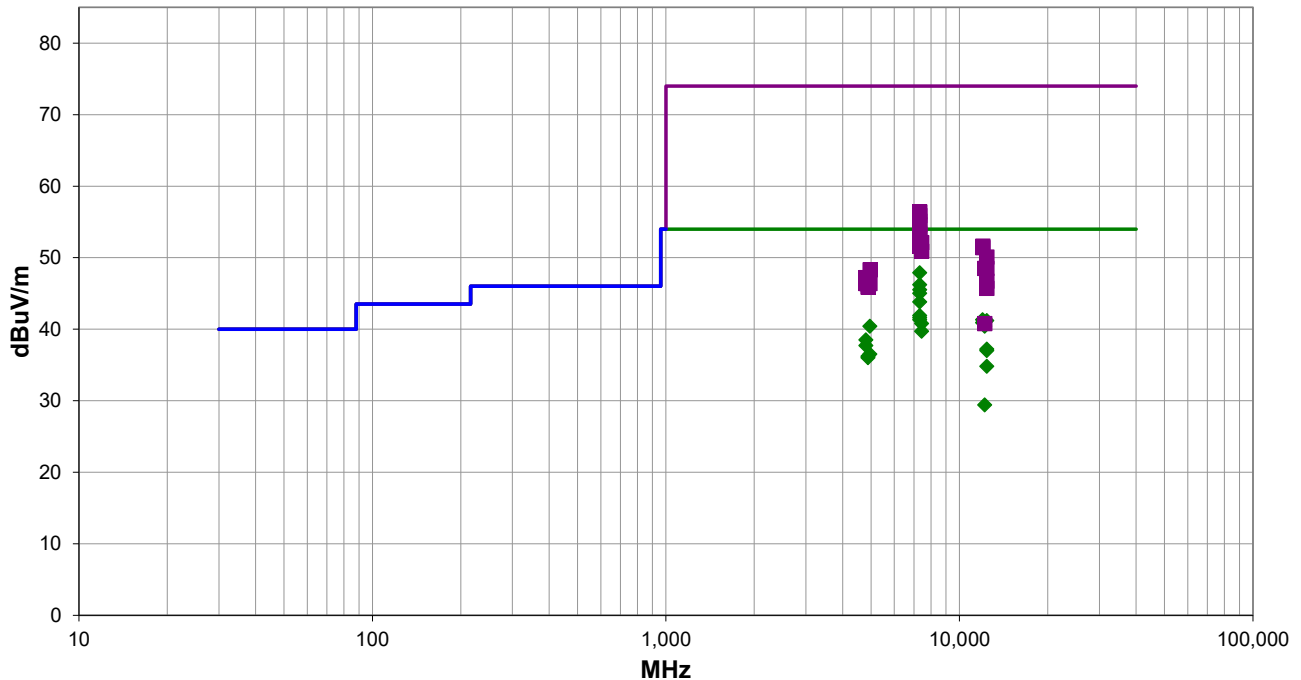

Run #: 12

■ PK ◆ AV ● QP

SPURIOUS RADIATED EMISSIONS

RESULTS - Run #12

Freq (MHz)	Amplitude (dBuV)	Factor (dB/m)	Antenna Height (meters)	Azimuth (degrees)	Test Distance (meters)	External Attenuation (dB)	Polarity/Transducer Type	Detector	Distance Adjustment (dB)	Adjusted (dBuV/m)	Spec. Limit (dBuV/m)	Compared to Spec. (dB)	Comments
7325.325	38.7	9.2	2.5	142.0	3.0	0.0	Horz	AV	0.0	47.9	54.0	-6.1	EUT On Side, Mid Ch, 1 Mbps
7325.508	37.0	9.2	2.7	211.9	3.0	0.0	Vert	AV	0.0	46.2	54.0	-7.8	EUT Vert, Mid Ch, 1 Mbps
7325.433	36.3	9.2	1.5	80.1	3.0	0.0	Horz	AV	0.0	45.5	54.0	-8.5	EUT Horz, Mid Ch, 1 Mbps
7324.608	35.8	9.2	2.4	236.9	3.0	0.0	Horz	AV	0.0	45.0	54.0	-9.0	EUT On Side, Mid Ch, 2 Mbps
7325.400	34.6	9.2	1.5	44.0	3.0	0.0	Vert	AV	0.0	43.8	54.0	-10.2	EUT Horz, Mid Ch, 1 Mbps
7324.717	32.7	9.2	2.6	221.0	3.0	0.0	Vert	AV	0.0	41.9	54.0	-12.1	EUT Vert, Mid Ch, 2 Mbps
7325.367	32.4	9.2	1.4	271.9	3.0	0.0	Vert	AV	0.0	41.6	54.0	-12.4	EUT On Side, Mid Ch, 1 Mbps
7325.342	32.1	9.2	1.2	37.9	3.0	0.0	Horz	AV	0.0	41.3	54.0	-12.7	EUT Vert, Mid Ch, 1 Mbps
12008.720	41.4	-0.1	2.7	91.9	3.0	0.0	Horz	AV	0.0	41.3	54.0	-12.7	EUT On Side, Low Ch, 1 Mbps
12398.830	40.2	1.0	1.8	128.9	3.0	0.0	Horz	AV	0.0	41.2	54.0	-12.8	EUT On Side, High Ch, 1 Mbps
12008.700	41.0	-0.1	2.5	101.0	3.0	0.0	Vert	AV	0.0	40.9	54.0	-13.1	EUT Vert, Low Ch, 1 Mbps
7439.200	31.6	9.2	3.7	87.0	3.0	0.0	Vert	AV	0.0	40.8	54.0	-13.2	EUT Vert, High Ch, 1 Mbps
12208.630	40.3	0.1	1.5	128.9	3.0	0.0	Vert	AV	0.0	40.4	54.0	-13.6	EUT Vert, Mid Ch, 1 Mbps
4959.808	37.8	2.6	2.3	153.0	3.0	0.0	Horz	AV	0.0	40.4	54.0	-13.6	EUT On Side, High Ch, 1 Mbps
7438.292	30.5	9.2	1.5	13.0	3.0	0.0	Horz	AV	0.0	39.7	54.0	-14.3	EUT On Side, High Ch, 1 Mbps
4803.908	36.2	2.3	2.7	198.0	3.0	0.0	Vert	AV	0.0	38.5	54.0	-15.5	EUT Vert, Low Ch, 1 Mbps
4803.792	35.4	2.3	1.5	196.0	3.0	0.0	Horz	AV	0.0	37.7	54.0	-16.3	EUT On Side, Low Ch, 1 Mbps
12400.920	31.2	6.0	1.5	120.0	3.0	0.0	Horz	AV	0.0	37.2	54.0	-16.8	EUT On Side, High Ch, 1 Mbps
12398.620	36.0	1.0	1.5	78.9	3.0	0.0	Vert	AV	0.0	37.0	54.0	-17.0	EUT Vert, High Ch, 1 Mbps
4959.908	33.9	2.6	1.5	48.0	3.0	0.0	Vert	AV	0.0	36.5	54.0	-17.5	EUT Vert, High Ch, 1 Mbps
7326.783	47.2	9.2	2.5	142.0	3.0	0.0	Horz	PK	0.0	56.4	74.0	-17.6	EUT On Side, Mid Ch, 1 Mbps
4883.625	33.7	2.5	1.4	142.0	3.0	0.0	Vert	AV	0.0	36.2	54.0	-17.8	EUT Vert, Mid Ch, 1 Mbps
4883.883	33.5	2.5	1.5	74.9	3.0	0.0	Horz	AV	0.0	36.0	54.0	-18.0	EUT On Side, Mid Ch, 1 Mbps
7325.900	46.7	9.2	2.4	236.9	3.0	0.0	Horz	PK	0.0	55.9	74.0	-18.1	EUT On Side, Mid Ch, 2 Mbps
7325.342	45.9	9.2	2.7	211.9	3.0	0.0	Vert	PK	0.0	55.1	74.0	-18.9	EUT Vert, Mid Ch, 1 Mbps
12400.880	28.8	6.0	1.5	41.9	3.0	0.0	Vert	AV	0.0	34.8	54.0	-19.2	EUT Vert, High Ch, 1 Mbps
7325.550	45.4	9.2	1.5	80.1	3.0	0.0	Horz	PK	0.0	54.6	74.0	-19.4	EUT Horz, Mid Ch, 1 Mbps
7327.292	44.1	9.2	1.5	44.0	3.0	0.0	Vert	PK	0.0	53.3	74.0	-20.7	EUT Horz, Mid Ch, 1 Mbps
7327.533	43.9	9.2	2.6	221.0	3.0	0.0	Vert	PK	0.0	53.1	74.0	-20.9	EUT Vert, Mid Ch, 2 Mbps
7438.308	42.9	9.2	3.7	87.0	3.0	0.0	Vert	PK	0.0	52.1	74.0	-21.9	EUT Vert, High Ch, 1 Mbps
7325.200	42.6	9.2	1.4	271.9	3.0	0.0	Vert	PK	0.0	51.8	74.0	-22.2	EUT On Side, Mid Ch, 1 Mbps
7325.300	42.4	9.2	1.2	37.9	3.0	0.0	Horz	PK	0.0	51.6	74.0	-22.4	EUT Vert, Mid Ch, 1 Mbps
12011.020	51.7	-0.1	2.7	91.9	3.0	0.0	Horz	PK	0.0	51.6	74.0	-22.4	EUT On Side, Low Ch, 1 Mbps
12010.910	51.5	-0.1	2.5	101.0	3.0	0.0	Vert	PK	0.0	51.4	74.0	-22.6	EUT Vert, Low Ch, 1 Mbps
7438.633	41.7	9.2	1.5	13.0	3.0	0.0	Horz	PK	0.0	50.9	74.0	-23.1	EUT On Side, High Ch, 1 Mbps
12398.680	49.1	1.0	1.8	128.9	3.0	0.0	Horz	PK	0.0	50.1	74.0	-23.9	EUT On Side, High Ch, 1 Mbps
12207.960	29.3	0.1	1.8	109.0	3.0	0.0	Horz	AV	0.0	29.4	54.0	-24.6	EUT On Side, Mid Ch, 1 Mbps
12208.580	48.4	0.1	1.5	128.9	3.0	0.0	Vert	PK	0.0	48.5	74.0	-25.5	EUT Vert, Mid Ch, 1 Mbps
12400.780	42.5	6.0	1.5	120.0	3.0	0.0	Horz	PK	0.0	48.5	74.0	-25.5	EUT On Side, High Ch, 1 Mbps
4960.692	45.7	2.6	2.3	153.0	3.0	0.0	Horz	PK	0.0	48.3	74.0	-25.7	EUT On Side, High Ch, 1 Mbps

SPURIOUS RADIATED EMISSIONS

Freq (MHz)	Amplitude (dBuV)	Factor (dB/m)	Antenna Height (meters)	Azimuth (degrees)	Test Distance (meters)	External Attenuation (dB)	Polarity/Transducer Type	Detector	Distance Adjustment (dB)	Adjusted (dBuV/m)	Spec. Limit (dBuV/m)	Compared to Spec. (dB)	Comments
4803.575	44.9	2.3	2.7	198.0	3.0	0.0	Vert	PK	0.0	47.2	74.0	-26.8	EUT Vert, Low Ch, 1 Mbps
12398.780	45.7	1.0	1.5	78.9	3.0	0.0	Vert	PK	0.0	46.7	74.0	-27.3	EUT Vert, High Ch, 1 Mbps
4803.392	44.1	2.3	1.5	196.0	3.0	0.0	Horz	PK	0.0	46.4	74.0	-27.6	EUT On Side, Low Ch, 1 Mbps
4959.375	43.8	2.6	1.5	48.0	3.0	0.0	Vert	PK	0.0	46.4	74.0	-27.6	EUT Vert, High Ch, 1 Mbps
4883.642	43.8	2.5	1.4	142.0	3.0	0.0	Vert	PK	0.0	46.3	74.0	-27.7	EUT Vert, Mid Ch, 1 Mbps
4884.467	43.4	2.5	1.5	74.9	3.0	0.0	Horz	PK	0.0	45.9	74.0	-28.1	EUT On Side, Mid Ch, 1 Mbps
12401.380	39.7	6.0	1.5	41.9	3.0	0.0	Vert	PK	0.0	45.7	74.0	-28.3	EUT Vert, High Ch, 1 Mbps
12207.880	40.7	0.1	1.8	109.0	3.0	0.0	Horz	PK	0.0	40.8	74.0	-33.2	EUT On Side, Mid Ch, 1 Mbps

CONCLUSION

Pass



Tested By

SPURIOUS RADIATED EMISSIONS



EUT:	Livio BLE CIC Hearing Aid	Work Order:	STAK0237
Serial Number:	2911330746	Date:	2021-05-03
Customer:	Starkey Laboratories, Inc.	Temperature:	22.1°C
Attendees:	Aaron Anderson	Relative Humidity:	40.2%
Customer Project:	None	Bar. Pressure:	1005 mb
Tested By:	Christopher Heintzleman	Job Site:	MN05
Power:	Internal Battery	Configuration:	STAK0237-1

TEST SPECIFICATIONS

Specification:	Method:
FCC 15.247:2021	ANSI C63.10:2013

TEST PARAMETERS

Run #:	18	Test Distance (m):	3	Ant. Height(s) (m):	1 to 4(m)
--------	----	--------------------	---	---------------------	-----------

COMMENTS


See comments for EUT orientation and data rate. EUT is transmitting at its operational duty cycle. KDB 558074 answer 3b allows for the EUT to be in its operational DC, and therefore no DCCF was applied.

EUT OPERATING MODES

Transmitting Bluetooth Low Energy channels 0, 39 (2402, 2480 MHz), 1 Mbps and 2 Mbps

DEVIATIONS FROM TEST STANDARD

None

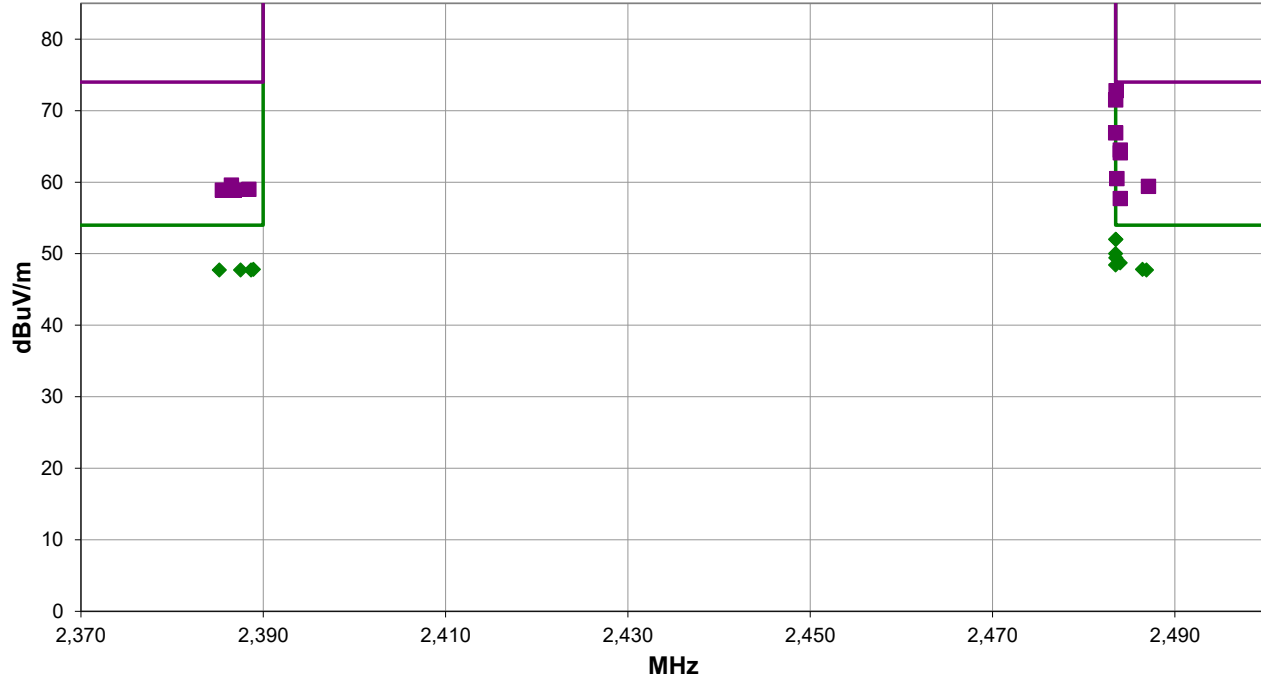

Run #: 18

■ PK ◆ AV ● QP

SPURIOUS RADIATED EMISSIONS

RESULTS - Run #18

Freq (MHz)	Amplitude (dBuV)	Factor (dB/m)	Antenna Height (meters)	Azimuth (degrees)	Test Distance (meters)	External Attenuation (dB)	Polarity/Transducer	Detector	Distance Adjustment (dB)	Adjusted (dBuV/m)	Spec. Limit (dBuV/m)	Compared to Spec. (dB)	Comments
2483.542	57.6	-4.8	1.5	1.0	3.0	20.0	Vert	PK	0.0	72.8	74.0	-1.2	EUT Vert, High Ch, 1 Mbps
2483.517	36.8	-4.8	1.12	106.9	3.0	20.0	Horz	AV	0.0	52.0	54.0	-2.0	1 EUT Horz, High Ch, 1 Mbps
2483.517	36.8	-4.8	1.12	106.9	3.0	20.0	Horz	AV	0.0	52.0	54.0	-2.0	2 EUT Horz, High Ch, 1 Mbps
2483.500	56.3	-4.8	1.5	351.0	3.0	20.0	Horz	PK	0.0	71.5	74.0	-2.5	EUT On Side, High Ch, 1 Mbps
2483.508	34.8	-4.8	1.5	1.0	3.0	20.0	Vert	AV	0.0	50.0	54.0	-4.0	EUT Vert, High Ch, 1 Mbps
2483.517	34.2	-4.8	1.5	351.0	3.0	20.0	Horz	AV	0.0	49.4	54.0	-4.6	EUT On Side, High Ch, 1 Mbps
2484.000	33.5	-4.8	2.58	98.0	3.0	20.0	Horz	AV	0.0	48.7	54.0	-5.3	Integration Method, EUT Horz, High Ch, 2 Mbps
2483.500	33.2	-4.8	3.63	29.0	3.0	20.0	Vert	AV	0.0	48.4	54.0	-5.6	EUT Horz, High Ch, 1 Mbps
2486.442	32.6	-4.8	1.5	59.0	3.0	20.0	Vert	AV	0.0	47.8	54.0	-6.2	EUT On Side, High Ch, 1 Mbps
2388.925	32.4	-4.6	1.68	240.9	3.0	20.0	Horz	AV	0.0	47.8	54.0	-6.2	EUT Horz, Low Ch, 1 Mbps
2486.892	32.5	-4.8	1.5	4.0	3.0	20.0	Horz	AV	0.0	47.7	54.0	-6.3	EUT Vert, High Ch, 1 Mbps
2388.675	32.3	-4.6	1.5	159.0	3.0	20.0	Vert	AV	0.0	47.7	54.0	-6.3	EUT Horz, Low Ch, 1 Mbps
2387.517	32.3	-4.6	3.06	354.0	3.0	20.0	Horz	AV	0.0	47.7	54.0	-6.3	EUT Horz, Low Ch, 2 Mbps
2385.183	32.3	-4.6	1.5	78.9	3.0	20.0	Vert	AV	0.0	47.7	54.0	-6.3	EUT Horz, Low Ch, 2 Mbps
2483.508	51.7	-4.8	3.63	29.0	3.0	20.0	Vert	PK	0.0	66.9	74.0	-7.1	EUT Horz, High Ch, 1 Mbps
2484.000	49.3	-4.8	1.12	106.9	3.0	20.0	Horz	PK	0.0	64.5	74.0	-9.5	Integration Method, EUT Horz, High Ch, 1 Mbps
2484.000	48.9	-4.8	2.58	98.0	3.0	20.0	Horz	PK	0.0	64.1	74.0	-9.9	Integration Method, EUT Horz, High Ch, 12 Mbps
2483.642	45.3	-4.8	1.5	4.0	3.0	20.0	Horz	PK	0.0	60.5	74.0	-13.5	EUT Vert, High Ch, 1 Mbps
2386.500	44.2	-4.6	1.68	240.9	3.0	20.0	Horz	PK	0.0	59.6	74.0	-14.4	EUT Horz, Low Ch, 1 Mbps
2487.092	44.2	-4.8	1.5	59.0	3.0	20.0	Vert	PK	0.0	59.4	74.0	-14.6	EUT On Side, High Ch, 1 Mbps
2388.417	43.6	-4.6	1.5	159.0	3.0	20.0	Vert	PK	0.0	59.0	74.0	-15.0	EUT Horz, Low Ch, 1 Mbps
2386.800	43.5	-4.6	3.06	354.0	3.0	20.0	Horz	PK	0.0	58.9	74.0	-15.1	EUT Horz, Low Ch, 2 Mbps
2385.525	43.5	-4.6	1.5	78.9	3.0	20.0	Vert	PK	0.0	58.9	74.0	-15.1	EUT Horz, Low Ch, 2 Mbps
2484.000	42.5	-4.8	1.12	106.9	3.0	20.0	Horz	PK	0.0	57.7	74.0	-16.3	Integration Method, EUT Horz, High Ch, 1 Mbps

CONCLUSION

Pass



Tested By

DUTY CYCLE



XMit 2020.12.30.0

Testing was performed using the mode(s) of operation and configuration(s) noted within the report. The individuals and/or the organization requesting the test provided the modes, configurations and settings used to complete the evaluation. The actual test parameters are specified in the test data, this includes items such as investigated frequency range (scanned) and test levels. The testing methods and performance specifications, as well as the test site used for the evaluation are indicated in the test data.

TEST EQUIPMENT

Description	Manufacturer	Model	ID	Last Cal.	Cal. Due
Generator - Signal	Agilent	N5183A	TIK	2019-04-30	2022-04-30
Analyzer - Spectrum Analyzer	Keysight	N9010A	AFM	2021-04-16	2022-04-16
Block - DC	Fairview Microwave	SD3379	AMZ	2020-11-04	2021-11-04
Attenuator	S.M. Electronics	SA26B-20	RFW	2021-02-05	2022-02-05
Cable	Micro-Coax	UFD150A-1-0720-200200	MNL	2020-09-14	2021-09-14

TEST DESCRIPTION

The Duty Cycle (x) of the single channel operation of the radio as controlled by the provided test software was measured for each of the EUT operating modes.

There is no compliance requirement to be met by this test, so therefore no Pass / Fail criteria.

The measurements were made using a zero span on the spectrum analyzer to see the pulses in the time domain. The transmit power was set to its default maximum.

The duty cycle was calculated by dividing the transmission pulse duration (T) by the total period of a single on and total off time.

If the transmit duty cycle < 98 percent, burst gating may have been used during some of the other tests in this report to only take the measurement during the burst duration.

DUTY CYCLE



XMIT 2020.12.30.0


EUT: Livio BLE CIC Hearing Aid		Work Order: STAK0237					
Serial Number: 2911330747		Date: 6-May-21					
Customer: Starkey Laboratories, Inc.		Temperature: 23.1 °C					
Attendees: John Quach		Humidity: 30.4% RH					
Project: None		Barometric Pres.: 1024 mbar					
Tested by: Andrew Rogstad		Power: Internal Battery					
Job Site: MN08		Test Method:					
TEST SPECIFICATIONS		FCC 15.247:2021					
ANSI C63.10:2013							
COMMENTS							
None							
DEVIATIONS FROM TEST STANDARD							
None							
Configuration #	2	Signature <i>Andrew Rogstad</i>					
	Pulse Width (ms)	Number of Pulses	Total On Time (ms)	Period (ms)	Value (%)	Limit (%)	Result
BLE/GFSK 1 Mbps Low Channel, 2402 MHz							
Pulse Length	0.38	N/A	N/A	N/A	N/A	N/A	N/A
Pulse Count	N/A	30	11.38	N/A	N/A	N/A	N/A
Overall Period	N/A	N/A	11.38	89.99	12.64	N/A	N/A
Repeatability	N/A	N/A	N/A	N/A	N/A	N/A	N/A
BLE/GFSK 1 Mbps Mid Channel, 2442 MHz							
Pulse Length	0.38	N/A	N/A	N/A	N/A	N/A	N/A
Pulse Count	N/A	30	11.36	N/A	N/A	N/A	N/A
Overall Period	N/A	N/A	11.36	90.02	12.62	N/A	N/A
Repeatability	N/A	N/A	N/A	N/A	N/A	N/A	N/A
BLE/GFSK 1 Mbps High Channel, 2480 MHz							
Pulse Length	0.38	N/A	N/A	N/A	N/A	N/A	N/A
Pulse Count	N/A	30	11.34	N/A	N/A	N/A	N/A
Overall Period	N/A	N/A	11.34	90.01	12.60	N/A	N/A
Repeatability	N/A	N/A	N/A	N/A	N/A	N/A	N/A
BLE/GFSK 2 Mbps Low Channel, 2402 MHz							
Pulse Length	0.19	N/A	N/A	N/A	N/A	N/A	N/A
Pulse Count	N/A	14	2.66	N/A	N/A	N/A	N/A
Overall Period	N/A	N/A	2.66	110.05	2.41	N/A	N/A
Repeatability	N/A	N/A	N/A	N/A	N/A	N/A	N/A
BLE/GFSK 2 Mbps Mid Channel, 2442 MHz							
Pulse Length	0.19	N/A	N/A	N/A	N/A	N/A	N/A
Pulse Count	N/A	14	2.65	N/A	N/A	N/A	N/A
Overall Period	N/A	N/A	2.65	189.95	1.40	N/A	N/A
Repeatability	N/A	N/A	N/A	N/A	N/A	N/A	N/A
BLE/GFSK 2 Mbps High Channel, 2480 MHz							
Pulse Length	0.19	N/A	N/A	N/A	N/A	N/A	N/A
Pulse Count	N/A	14	2.66	N/A	N/A	N/A	N/A
Overall Period	N/A	N/A	2.66	110.05	2.41	N/A	N/A
Repeatability	N/A	N/A	N/A	N/A	N/A	N/A	N/A

DUTY CYCLE




XMIT 2020.12.30.0

BLE/GFSK 1 Mbps Low Channel, 2402 MHz, Pulse Length						
Pulse Width (ms)	Number of Pulses	Total On Time (ms)	Period (ms)	Value (%)	Limit (%)	Result
0.38	N/A	N/A	N/A	N/A	N/A	N/A

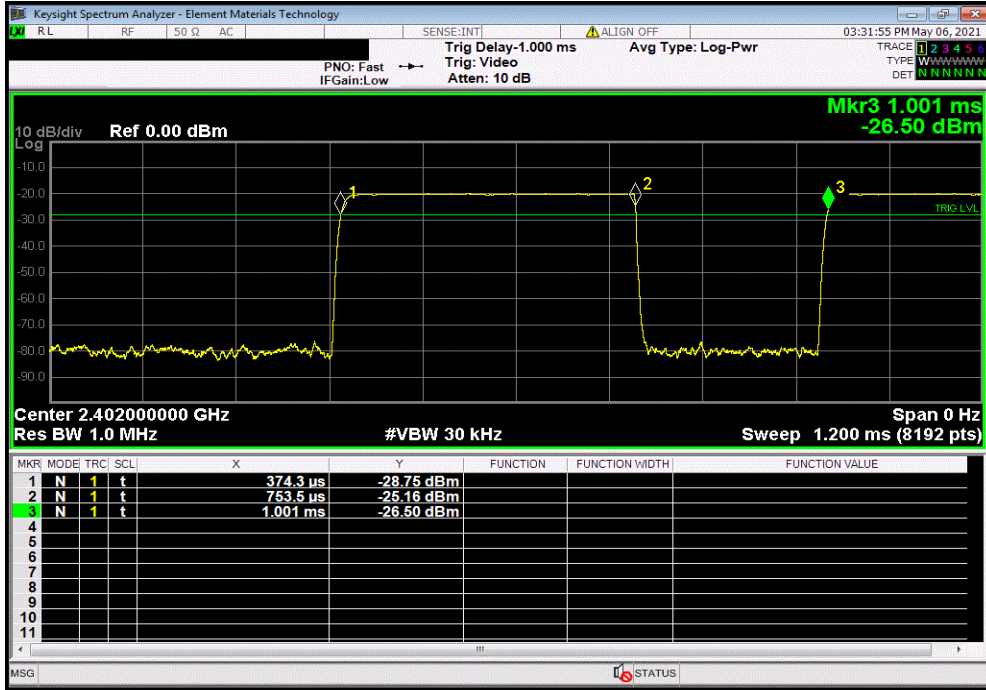

BLE/GFSK 1 Mbps Low Channel, 2402 MHz, Pulse Count						
Pulse Width (ms)	Number of Pulses	Total On Time (ms)	Period (ms)	Value (%)	Limit (%)	Result
N/A	30	11.38	N/A	N/A	N/A	N/A

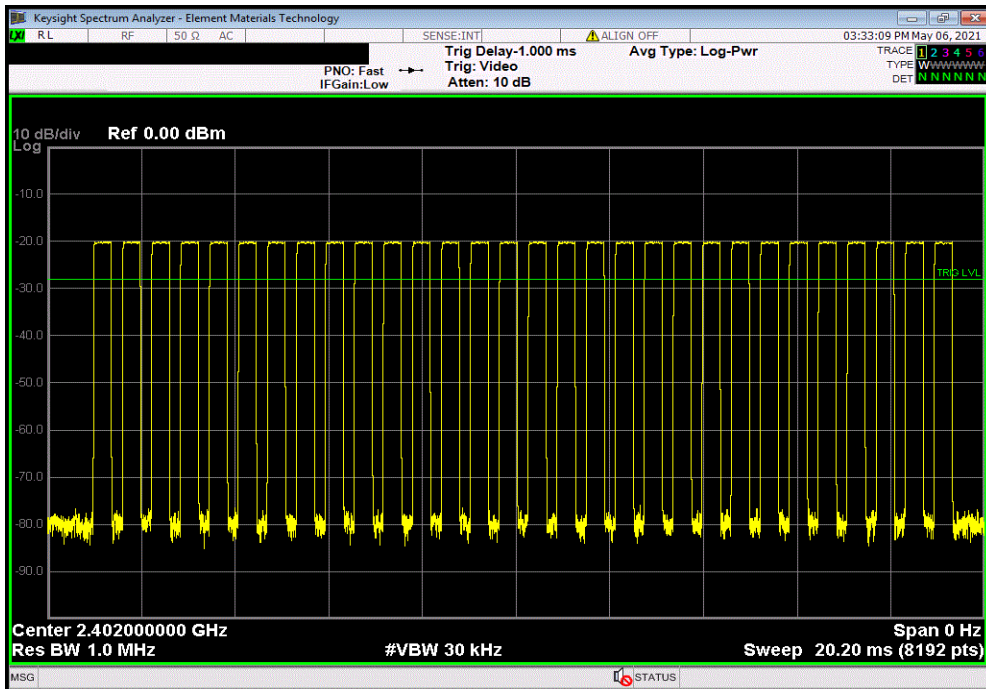


DUTY CYCLE




XMIT 2020.12.30.0

BLE/GFSK 1 Mbps Low Channel, 2402 MHz, Overall Period						
Pulse Width (ms)	Number of Pulses	Total On Time (ms)	Period (ms)	Value (%)	Limit (%)	Result
N/A	N/A	11.38	89.99	12.64	N/A	N/A

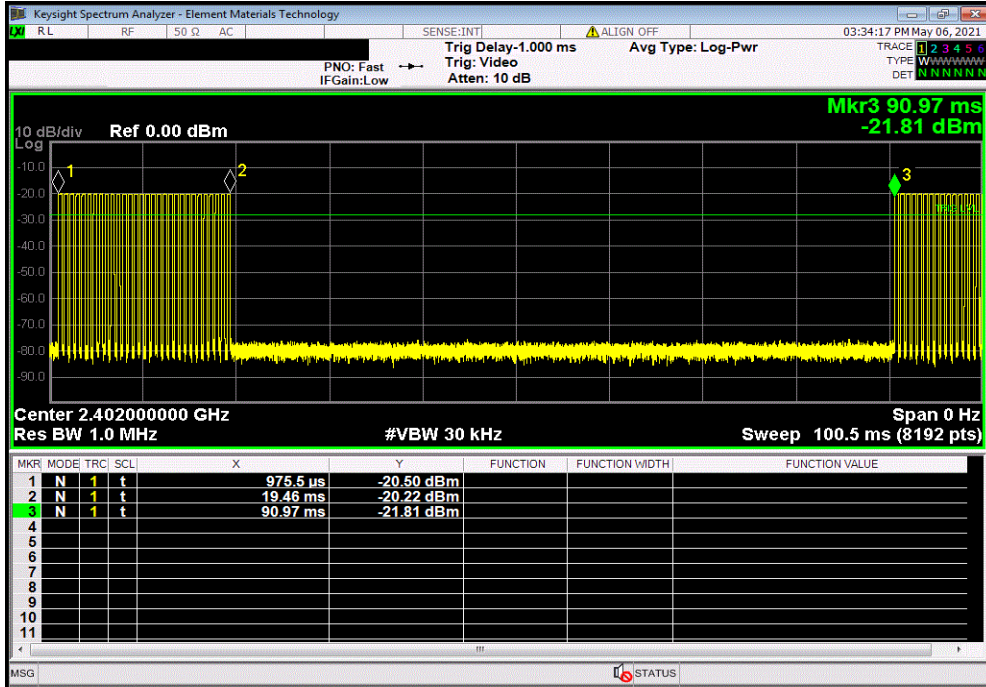

BLE/GFSK 1 Mbps Low Channel, 2402 MHz, Repeatability						
Pulse Width (ms)	Number of Pulses	Total On Time (ms)	Period (ms)	Value (%)	Limit (%)	Result
N/A	N/A	N/A	N/A	N/A	N/A	N/A

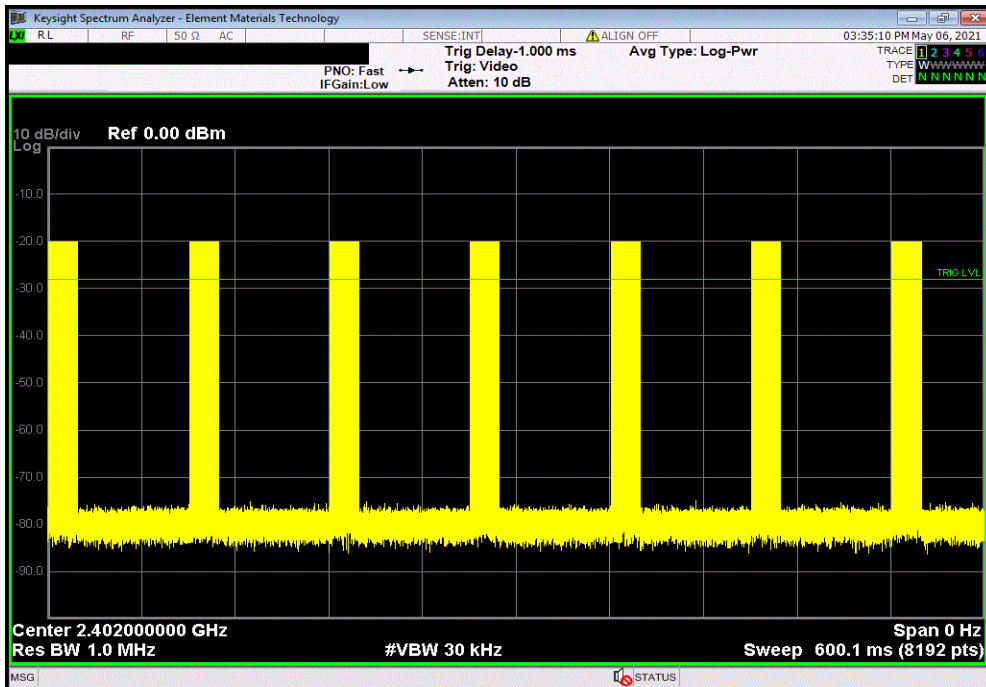


DUTY CYCLE




XMIT 2020.12.30.0

BLE/GFSK 1 Mbps Mid Channel, 2442 MHz, Pulse Length						
Pulse Width (ms)	Number of Pulses	Total On Time (ms)	Period (ms)	Value (%)	Limit (%)	Result
0.38	N/A	N/A	N/A	N/A	N/A	N/A

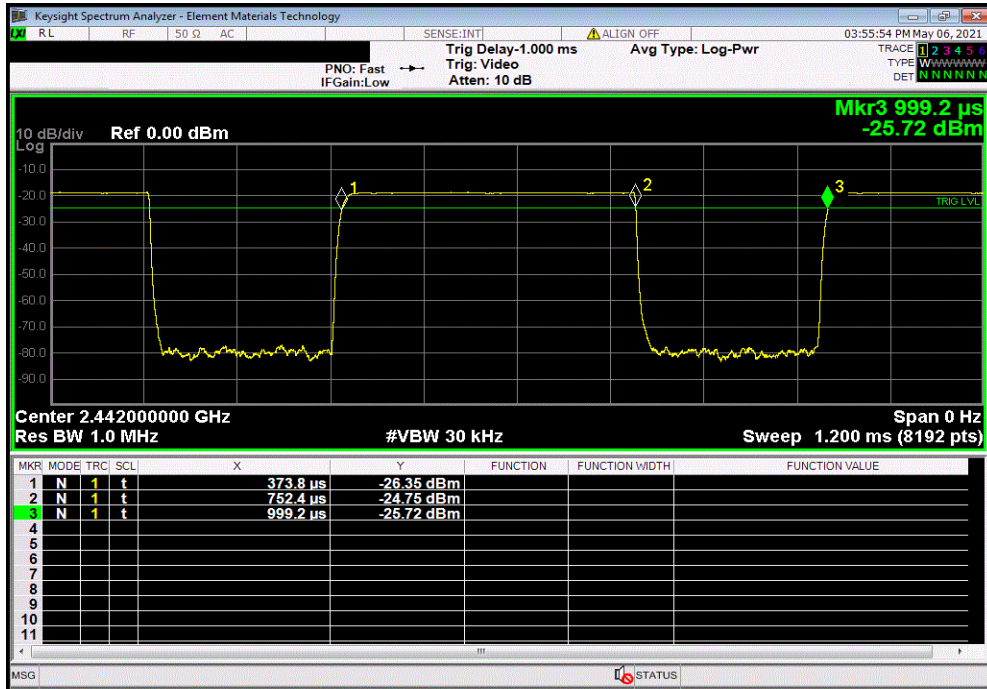

BLE/GFSK 1 Mbps Mid Channel, 2442 MHz, Pulse Count						
Pulse Width (ms)	Number of Pulses	Total On Time (ms)	Period (ms)	Value (%)	Limit (%)	Result
N/A	30	11.36	N/A	N/A	N/A	N/A

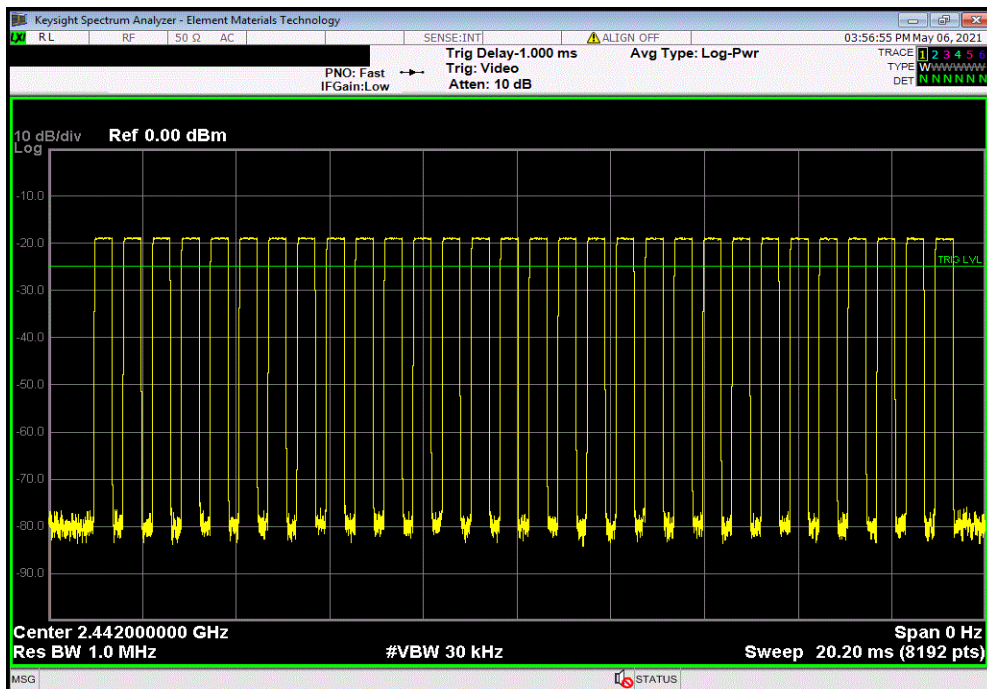


DUTY CYCLE




XMIT 2020.12.30.0

BLE/GFSK 1 Mbps Mid Channel, 2442 MHz, Overall Period						
Pulse Width (ms)	Number of Pulses	Total On Time (ms)	Period (ms)	Value (%)	Limit (%)	Result
N/A	N/A	11.36	90.02	12.62	N/A	N/A

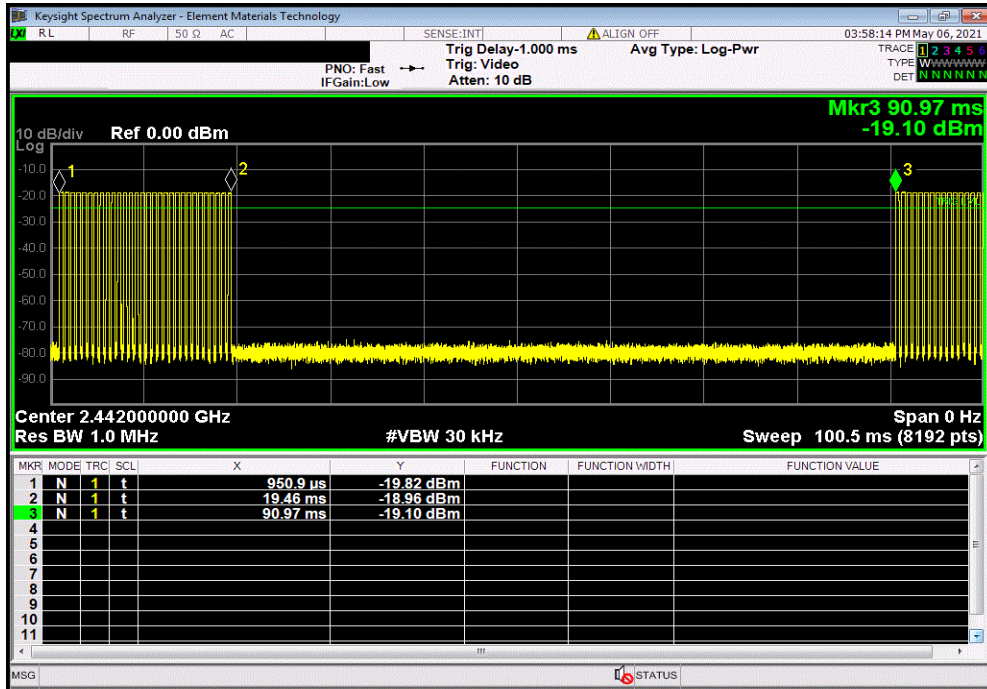

BLE/GFSK 1 Mbps Mid Channel, 2442 MHz, Repeatability						
Pulse Width (ms)	Number of Pulses	Total On Time (ms)	Period (ms)	Value (%)	Limit (%)	Result
N/A	N/A	N/A	N/A	N/A	N/A	N/A

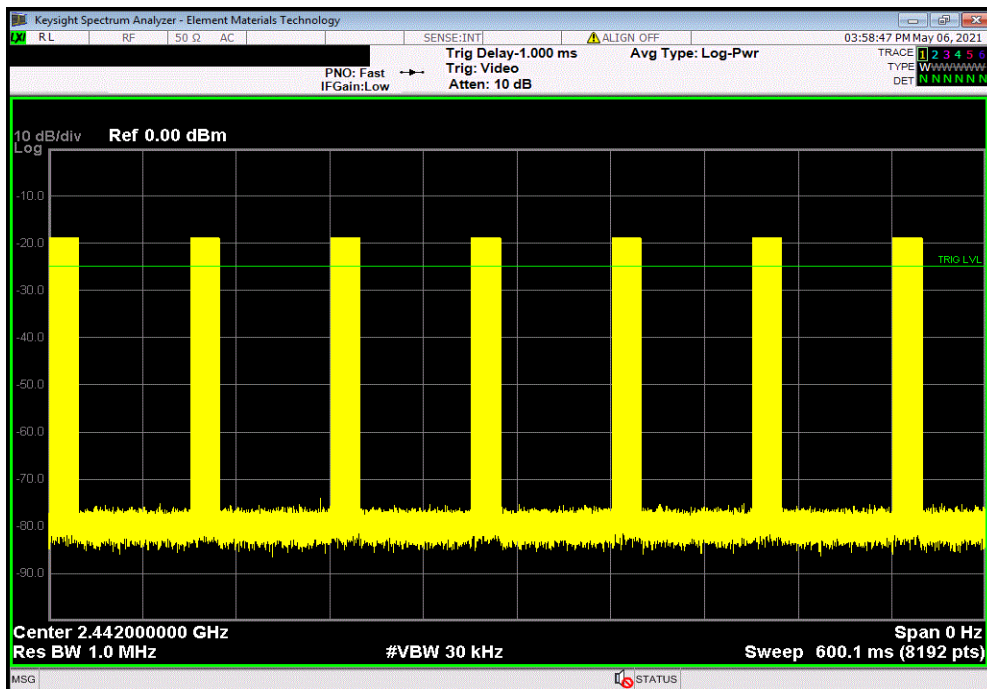


DUTY CYCLE




XMIT 2020.12.30.0

BLE/GFSK 1 Mbps High Channel, 2480 MHz, Pulse Length						
Pulse Width (ms)	Number of Pulses	Total On Time (ms)	Period (ms)	Value (%)	Limit (%)	Result
0.38	N/A	N/A	N/A	N/A	N/A	N/A

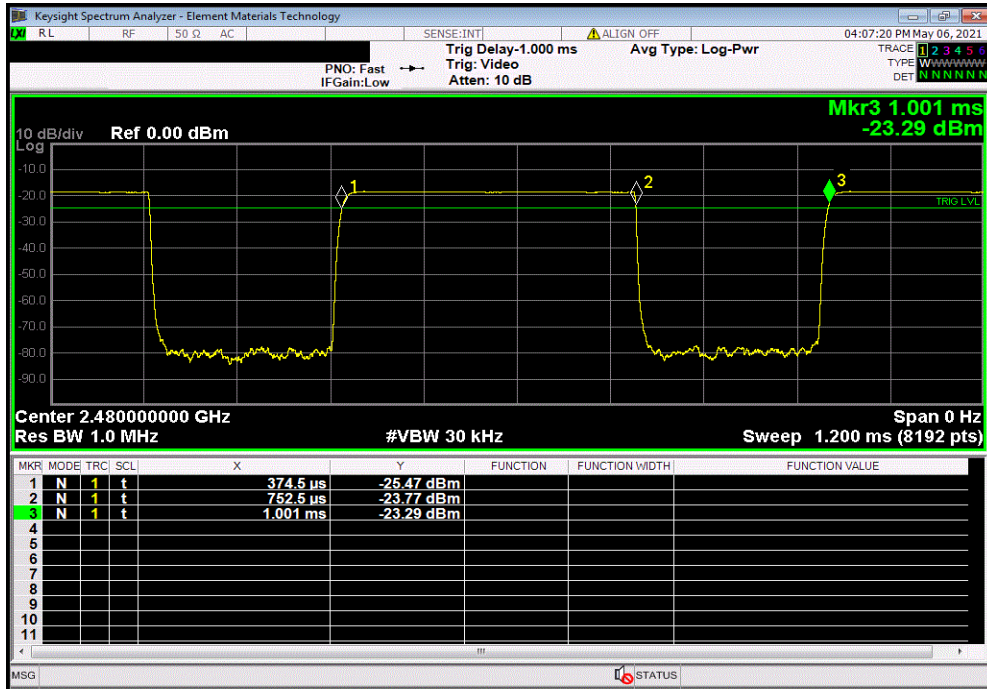

BLE/GFSK 1 Mbps High Channel, 2480 MHz, Pulse Count						
Pulse Width (ms)	Number of Pulses	Total On Time (ms)	Period (ms)	Value (%)	Limit (%)	Result
N/A	30	11.34	N/A	N/A	N/A	N/A

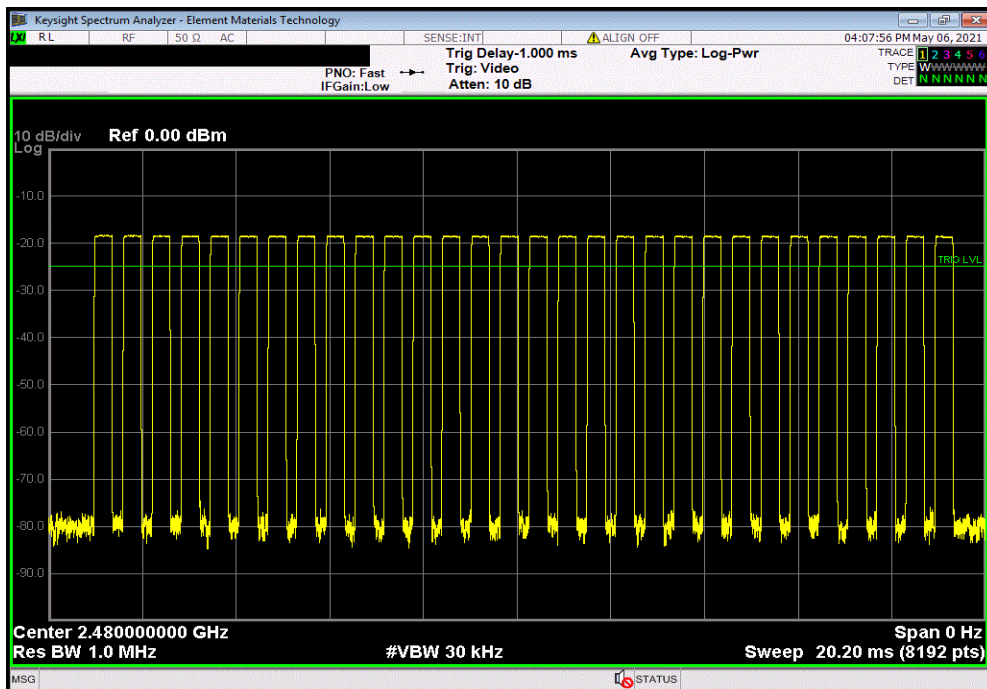


DUTY CYCLE




XMIT 2020.12.30.0

BLE/GFSK 1 Mbps High Channel, 2480 MHz, Overall Period						
Pulse Width (ms)	Number of Pulses	Total On Time (ms)	Period (ms)	Value (%)	Limit (%)	Result
N/A	N/A	11.34	90.01	12.60	N/A	N/A

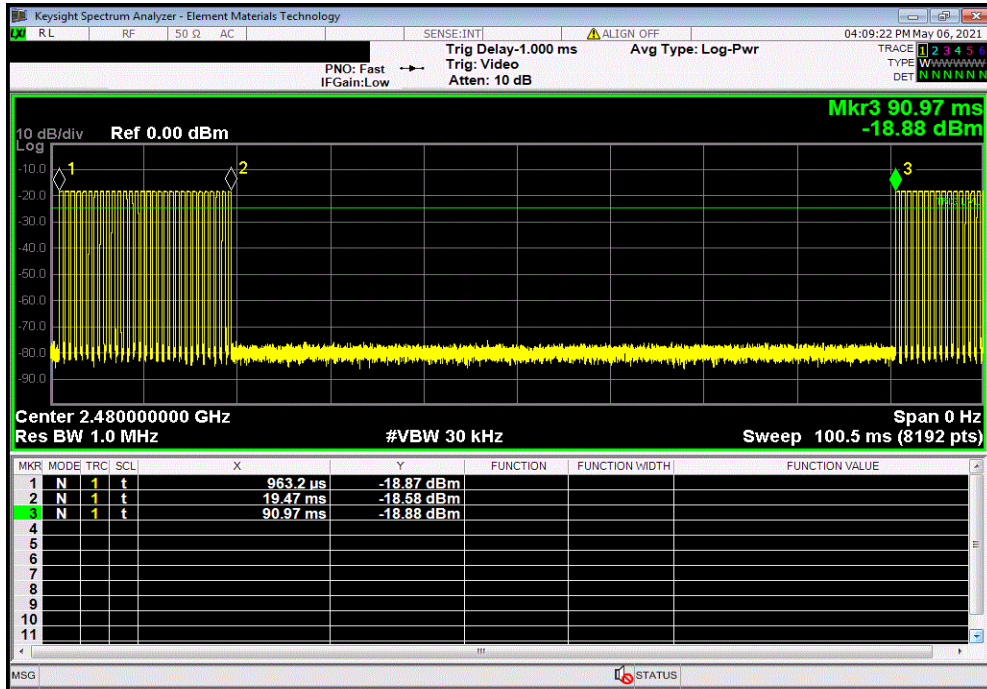

BLE/GFSK 1 Mbps High Channel, 2480 MHz, Repeatability						
Pulse Width (ms)	Number of Pulses	Total On Time (ms)	Period (ms)	Value (%)	Limit (%)	Result
N/A	N/A	N/A	N/A	N/A	N/A	N/A

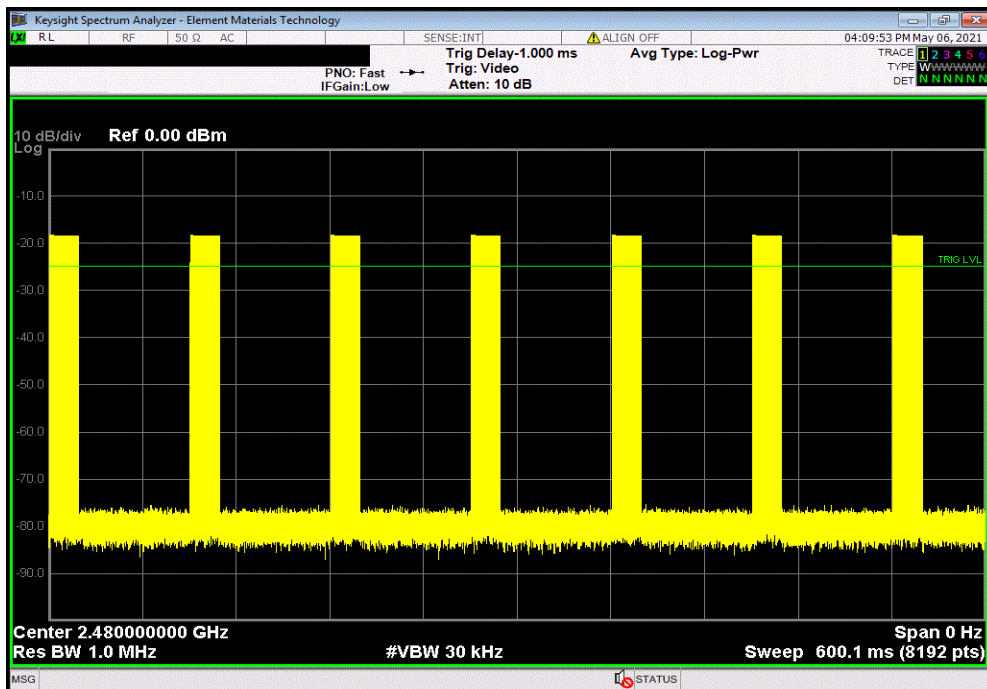


DUTY CYCLE




XMIT 2020.12.30.0

BLE/GFSK 2 Mbps Low Channel, 2402 MHz, Pulse Length						
Pulse Width (ms)	Number of Pulses	Total On Time (ms)	Period (ms)	Value (%)	Limit (%)	Result
0.19	N/A	N/A	N/A	N/A	N/A	N/A

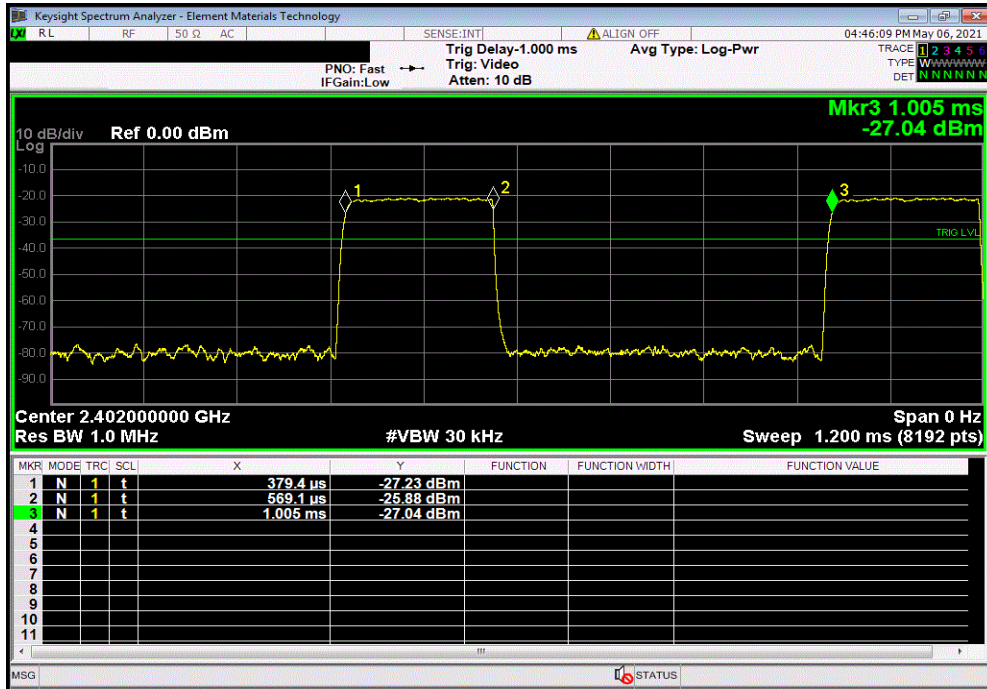

BLE/GFSK 2 Mbps Low Channel, 2402 MHz, Pulse Count						
Pulse Width (ms)	Number of Pulses	Total On Time (ms)	Period (ms)	Value (%)	Limit (%)	Result
N/A	14	2.66	N/A	N/A	N/A	N/A

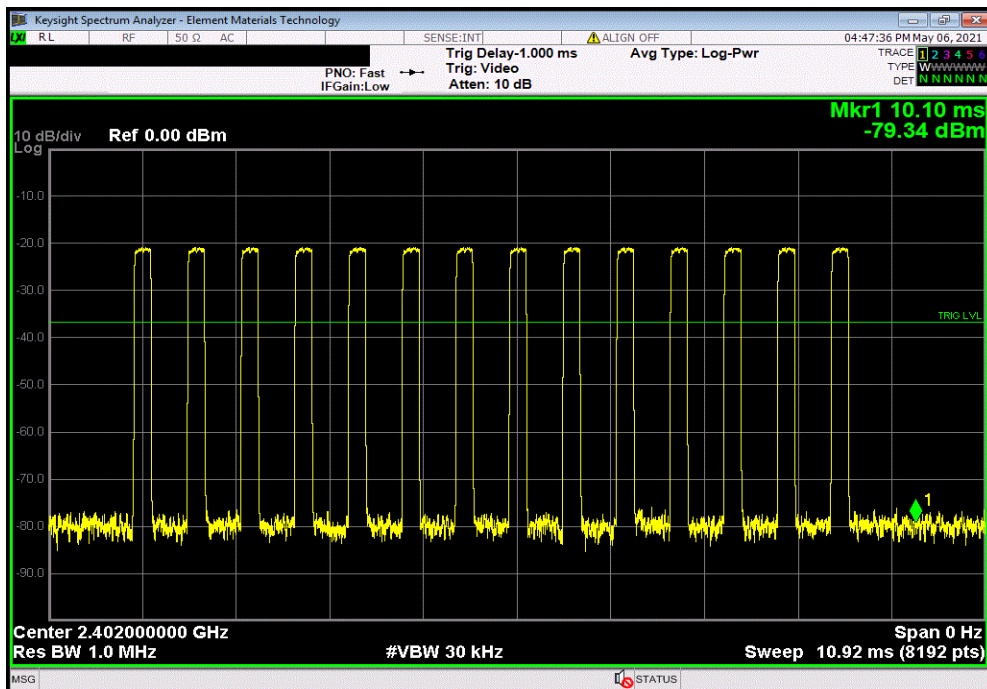


DUTY CYCLE




XMIT 2020.12.30.0

BLE/GFSK 2 Mbps Low Channel, 2402 MHz, Overall Period						
Pulse Width (ms)	Number of Pulses	Total On Time (ms)	Period (ms)	Value (%)	Limit (%)	Result
N/A	N/A	2.66	110.05	2.41	N/A	N/A

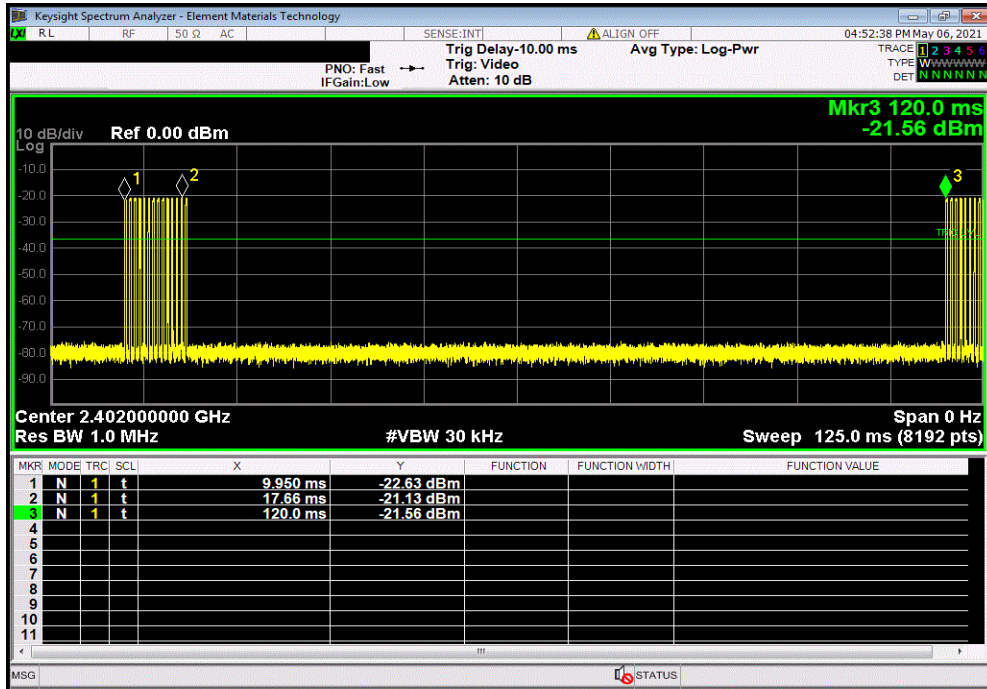

BLE/GFSK 2 Mbps Low Channel, 2402 MHz, Repeatability						
Pulse Width (ms)	Number of Pulses	Total On Time (ms)	Period (ms)	Value (%)	Limit (%)	Result
N/A	N/A	N/A	N/A	N/A	N/A	N/A

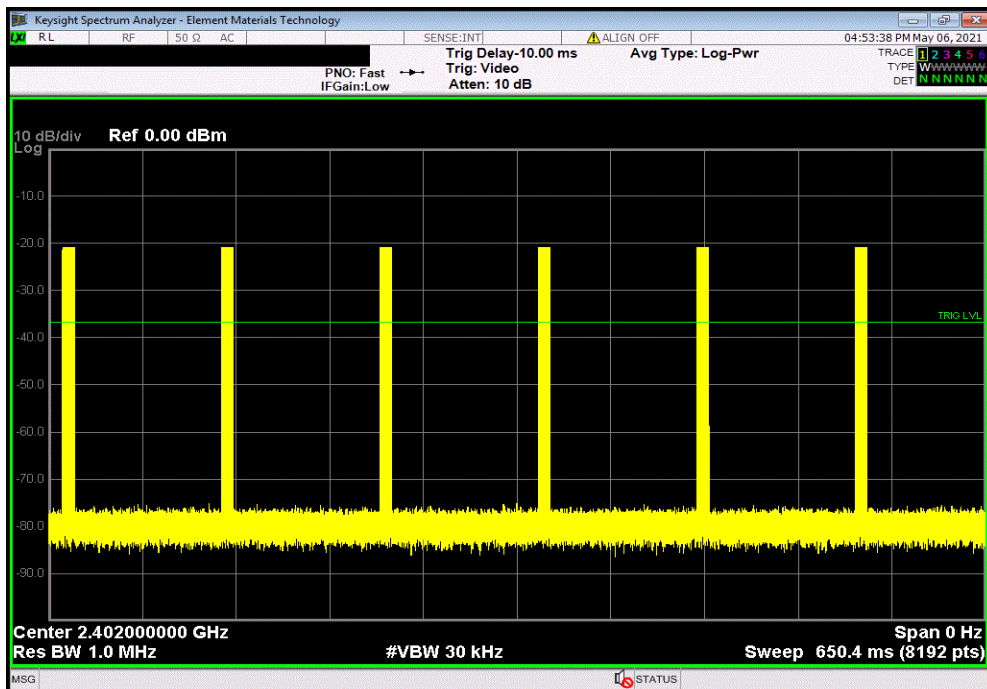


DUTY CYCLE




XMIT 2020.12.30.0

BLE/GFSK 2 Mbps Mid Channel, 2442 MHz, Pulse Length						
Pulse Width (ms)	Number of Pulses	Total On Time (ms)	Period (ms)	Value (%)	Limit (%)	Result
0.19	N/A	N/A	N/A	N/A	N/A	N/A

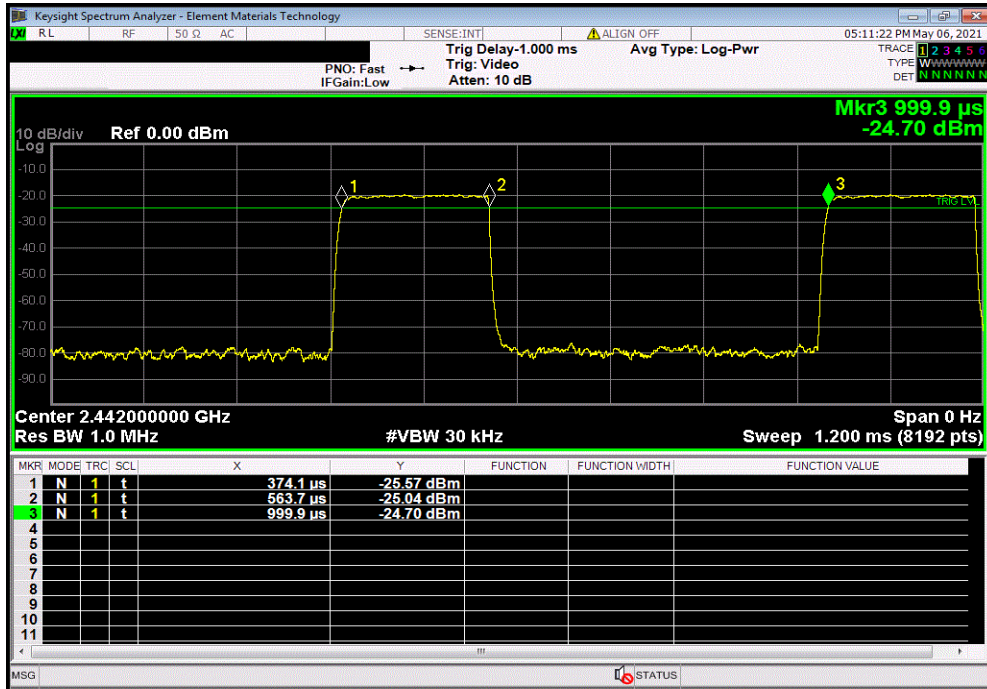

BLE/GFSK 2 Mbps Mid Channel, 2442 MHz, Pulse Count						
Pulse Width (ms)	Number of Pulses	Total On Time (ms)	Period (ms)	Value (%)	Limit (%)	Result
N/A	14	2.65	N/A	N/A	N/A	N/A

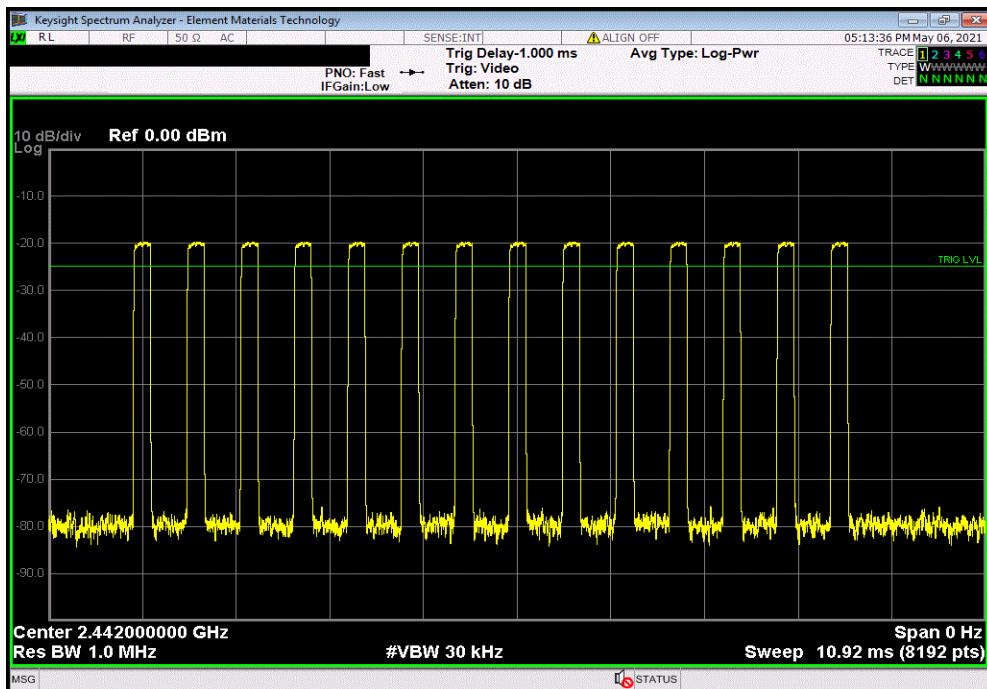


DUTY CYCLE




XMIT 2020.12.30.0

BLE/GFSK 2 Mbps Mid Channel, 2442 MHz, Overall Period						
Pulse Width (ms)	Number of Pulses	Total On Time (ms)	Period (ms)	Value (%)	Limit (%)	Result
N/A	N/A	2.65	189.95	1.40	N/A	N/A

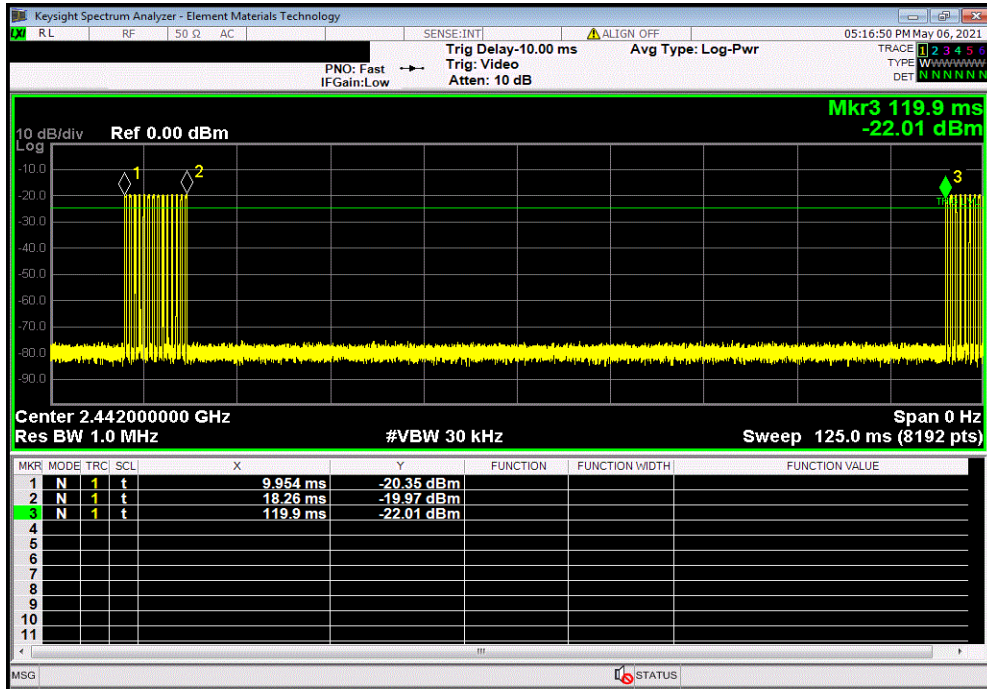

BLE/GFSK 2 Mbps Mid Channel, 2442 MHz, Repeatability						
Pulse Width (ms)	Number of Pulses	Total On Time (ms)	Period (ms)	Value (%)	Limit (%)	Result
N/A	N/A	N/A	N/A	N/A	N/A	N/A

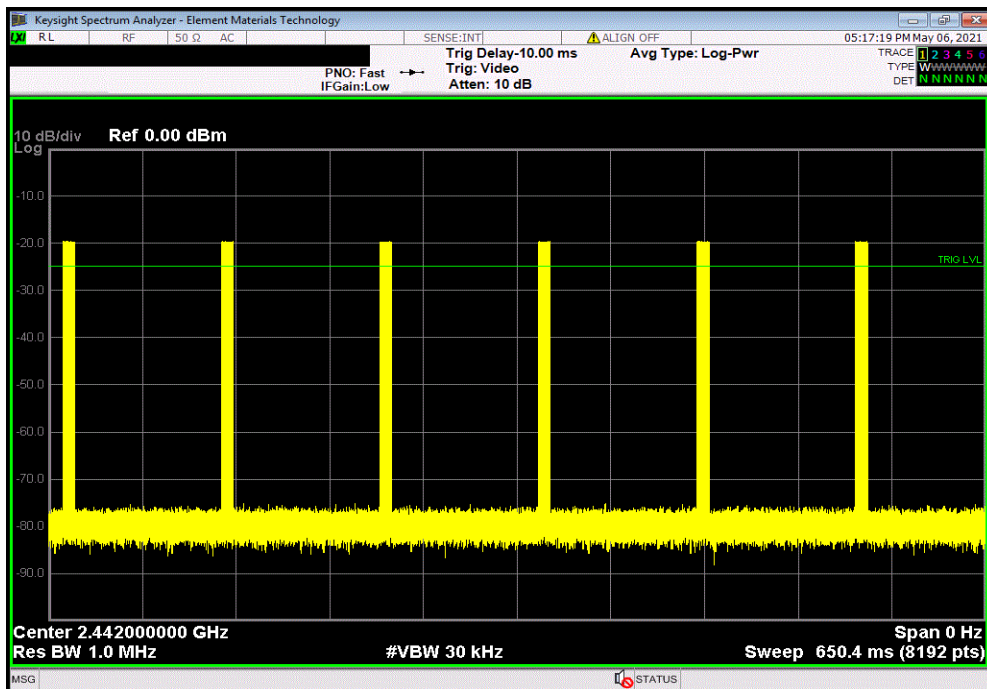


DUTY CYCLE




XMIT 2020.12.30.0

BLE/GFSK 2 Mbps High Channel, 2480 MHz, Pulse Length						
Pulse Width (ms)	Number of Pulses	Total On Time (ms)	Period (ms)	Value (%)	Limit (%)	Result
0.19	N/A	N/A	N/A	N/A	N/A	N/A

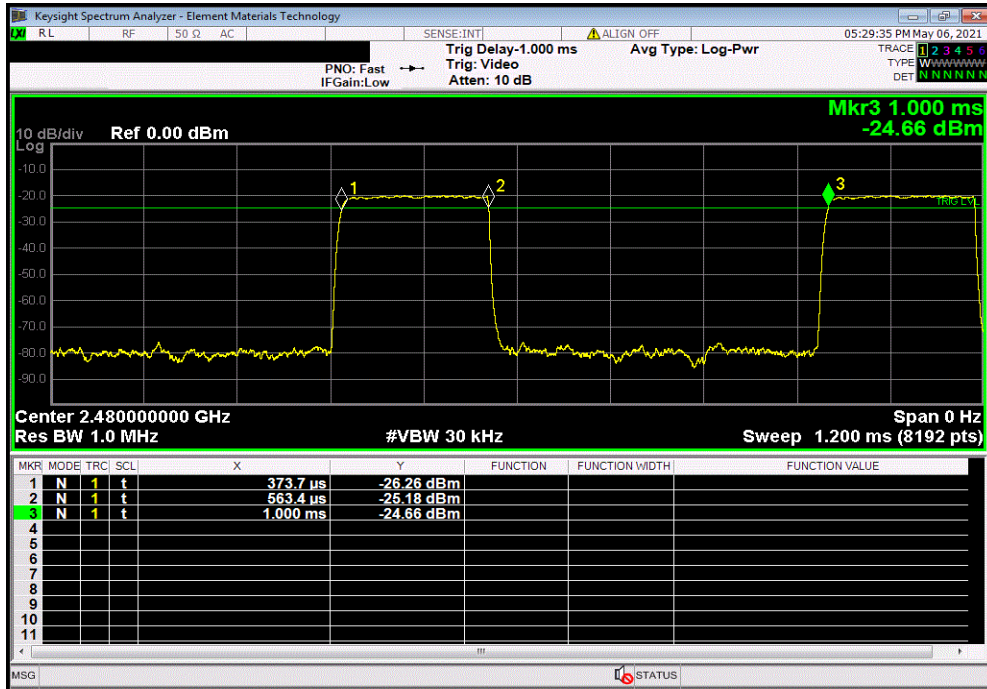

BLE/GFSK 2 Mbps High Channel, 2480 MHz, Pulse Count						
Pulse Width (ms)	Number of Pulses	Total On Time (ms)	Period (ms)	Value (%)	Limit (%)	Result
N/A	14	2.66	N/A	N/A	N/A	N/A

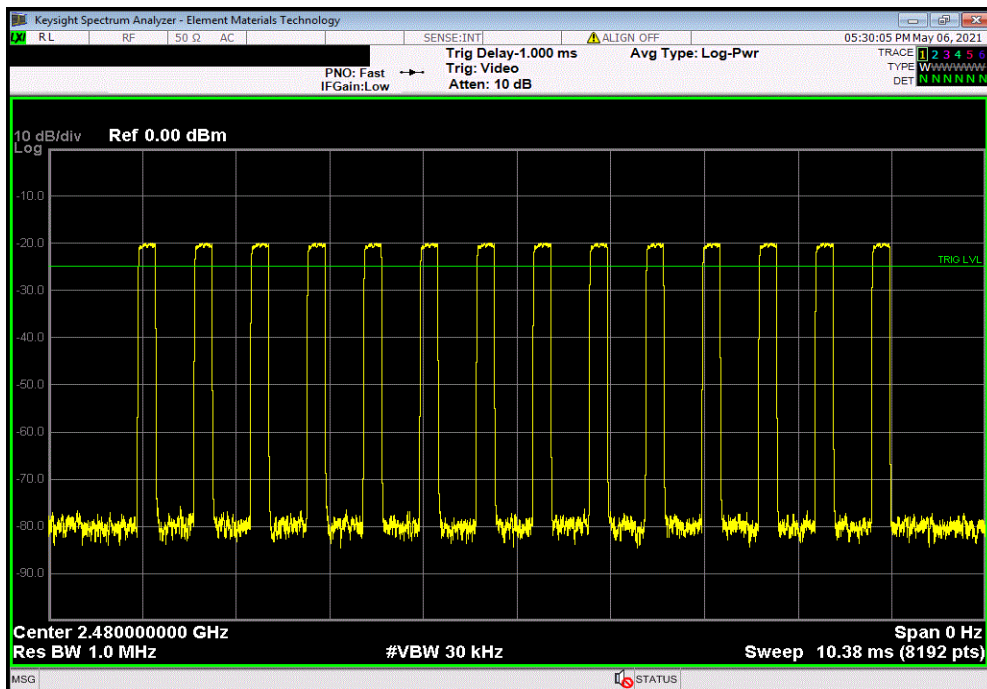


DUTY CYCLE




XMIT 2020.12.30.0

BLE/GFSK 2 Mbps High Channel, 2480 MHz, Overall Period						
Pulse Width (ms)	Number of Pulses	Total On Time (ms)	Period (ms)	Value (%)	Limit (%)	Result
N/A	N/A	2.66	110.05	2.41	N/A	N/A

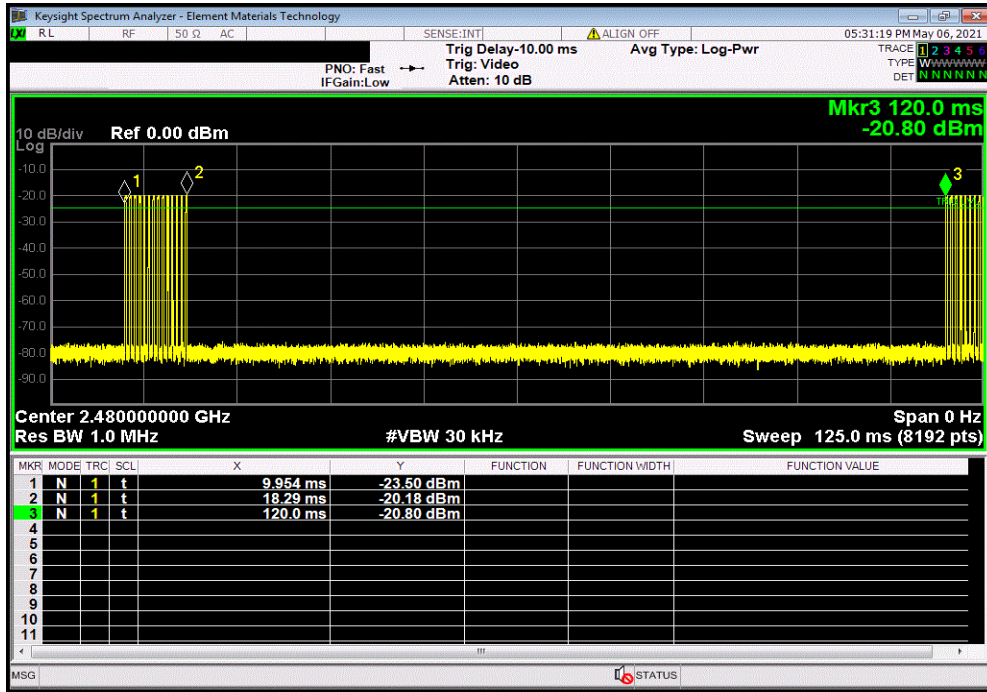

BLE/GFSK 2 Mbps High Channel, 2480 MHz, Repeatability						
Pulse Width (ms)	Number of Pulses	Total On Time (ms)	Period (ms)	Value (%)	Limit (%)	Result
N/A	N/A	N/A	N/A	N/A	N/A	N/A

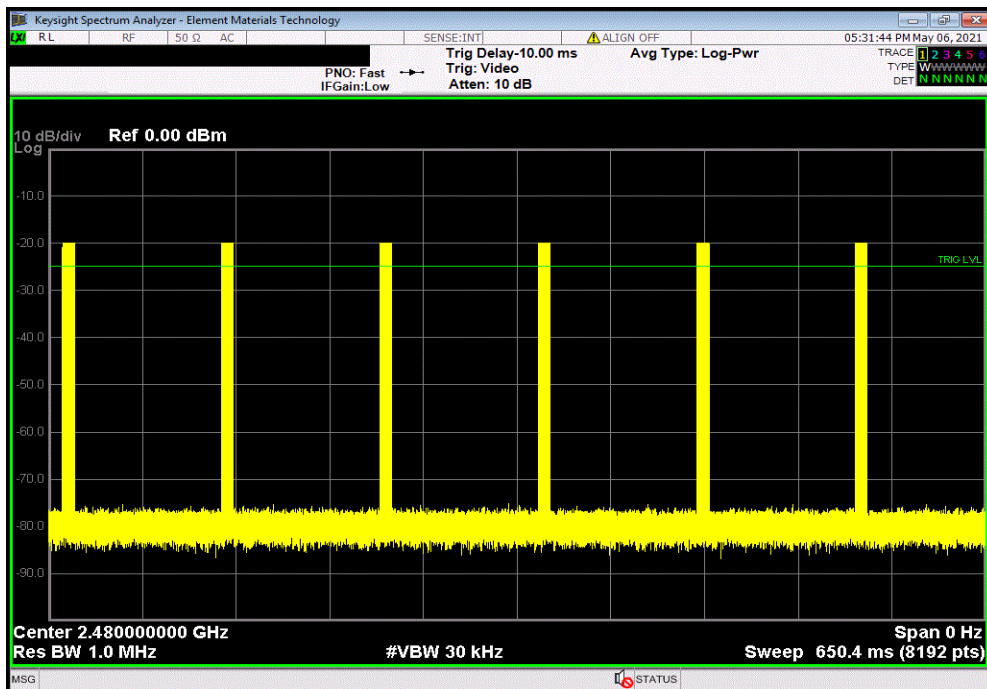

OCCUPIED BANDWIDTH



XMIT 2020.12.30.0

Testing was performed using the mode(s) of operation and configuration(s) noted within the report. The individuals and/or the organization requesting the test provided the modes, configurations and settings used to complete the evaluation. The actual test parameters are specified in the test data, this includes items such as investigated frequency range (scanned) and test levels. The testing methods and performance specifications, as well as the test site used for the evaluation are indicated in the test data.

TEST EQUIPMENT

Description	Manufacturer	Model	ID	Last Cal.	Cal. Due
Generator - Signal	Agilent	N5183A	TIK	2019-04-30	2022-04-30
Analyzer - Spectrum Analyzer	Keysight	N9010A	AFM	2021-04-16	2022-04-16
Block - DC	Fairview Microwave	SD3379	AMZ	2020-11-04	2021-11-04
Attenuator	S.M. Electronics	SA26B-20	RFW	2021-02-05	2022-02-05
Cable	Micro-Coax	UFD150A-1-0720-200200	MNL	2020-09-14	2021-09-14

TEST DESCRIPTION

The EUT was set to the channels and modes listed in the datasheet.

The 6dB occupied bandwidth was measured using 100 kHz resolution bandwidth and 300 kHz video bandwidth. The 99.0% occupied bandwidth was also measured at the same time which can be needed during Output Power depending on the applicable method.

OCCUPIED BANDWIDTH



TstTx 2019.08.30.0 XMI: 2020.12.30.0

EUT: Livio BLE CIC Hearing Aid		Work Order: STAK0237
Serial Number: 2911330747		Date: 6-May-21
Customer: Starkey Laboratories, Inc.		Temperature: 23.2 °C
Attendees: John Quach		Humidity: 31% RH
Project: None		Barometric Pres.: 1024 mbar
Tested by: Andrew Rogstad	Power: Internal Battery	Job Site: MN08
TEST SPECIFICATIONS		
FCC 15.247:2021		ANSI C63.10:2013
TEST METHOD		
COMMENTS		
Reference level offset includes measurement cable, attenuator, and DC block.		
DEVIATIONS FROM TEST STANDARD		
None		
Configuration #	2	Signature <i>Andrew Rogstad</i>


	Value	Limit (±)	Result
BLE/GFSK 1 Mbps Low Channel, 2402 MHz	745.804 kHz	500 kHz	Pass
BLE/GFSK 1 Mbps Mid Channel, 2442 MHz	738.163 kHz	500 kHz	Pass
BLE/GFSK 1 Mbps High Channel, 2480 MHz	733.418 kHz	500 kHz	Pass
BLE/GFSK 2 Mbps Low Channel, 2402 MHz	1.238 MHz	500 kHz	Pass
BLE/GFSK 2 Mbps Mid Channel, 2442 MHz	1.236 MHz	500 kHz	Pass
BLE/GFSK 2 Mbps High Channel, 2480 MHz	1.251 MHz	500 kHz	Pass

OCCUPIED BANDWIDTH




TbTx 2019.08.30.0 XMI 2020.12.30.0

BLE/GFSK 1 Mbps Low Channel, 2402 MHz						
				Value	Limit	Result
				745.804 kHz	500 kHz	Pass

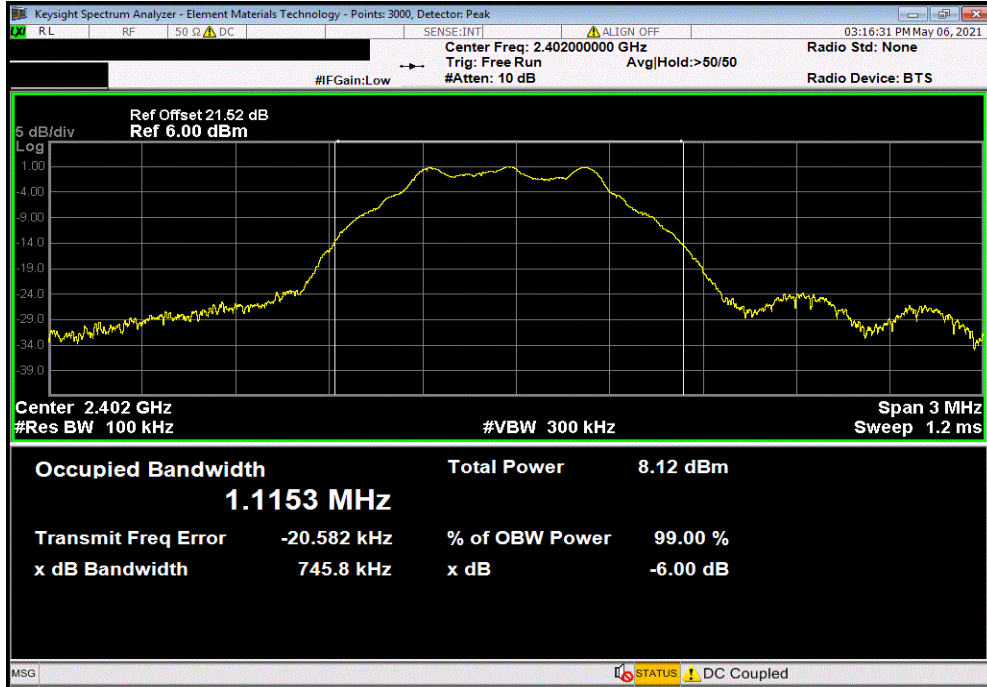

BLE/GFSK 1 Mbps Mid Channel, 2442 MHz						
				Value	Limit	Result
				738.163 kHz	500 kHz	Pass

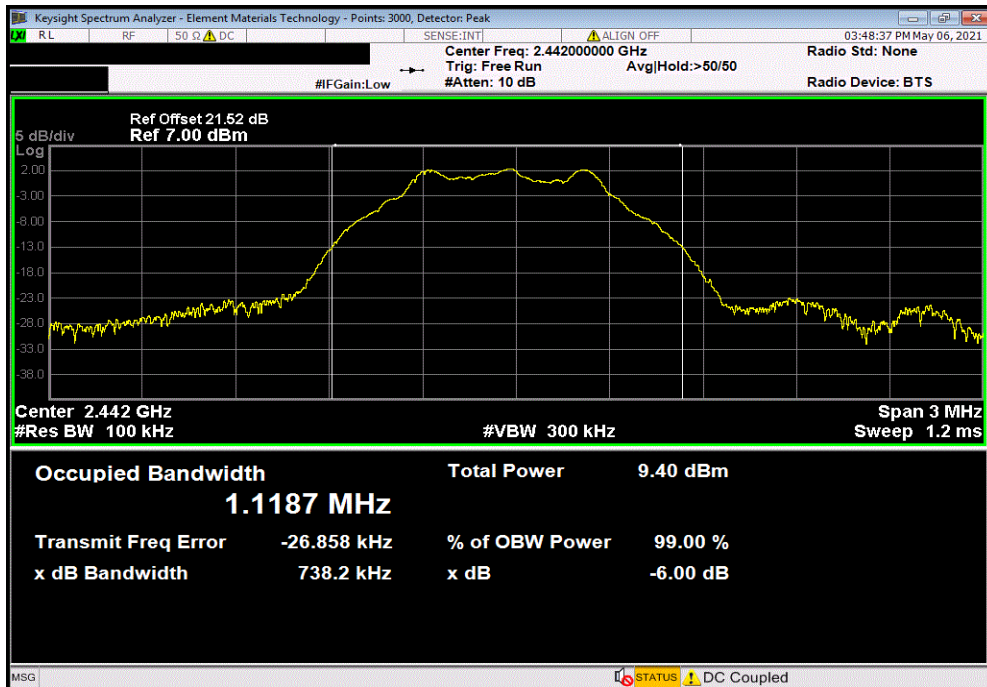


OCCUPIED BANDWIDTH




TbTx 2019.08.30.0 XMI 2020.12.30.0

BLE/GFSK 1 Mbps High Channel, 2480 MHz						
				Value	Limit	Result
					(≥)	
				733.418 kHz	500 kHz	Pass

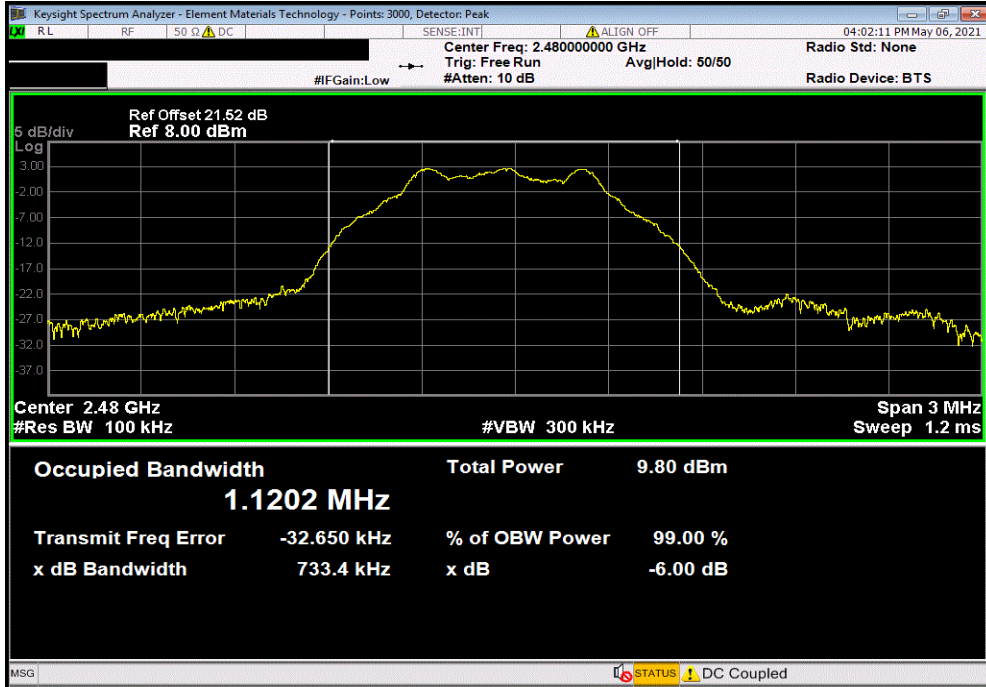

BLE/GFSK 2 Mbps Low Channel, 2402 MHz						
				Value	Limit	Result
					(≥)	
				1.238 MHz	500 kHz	Pass

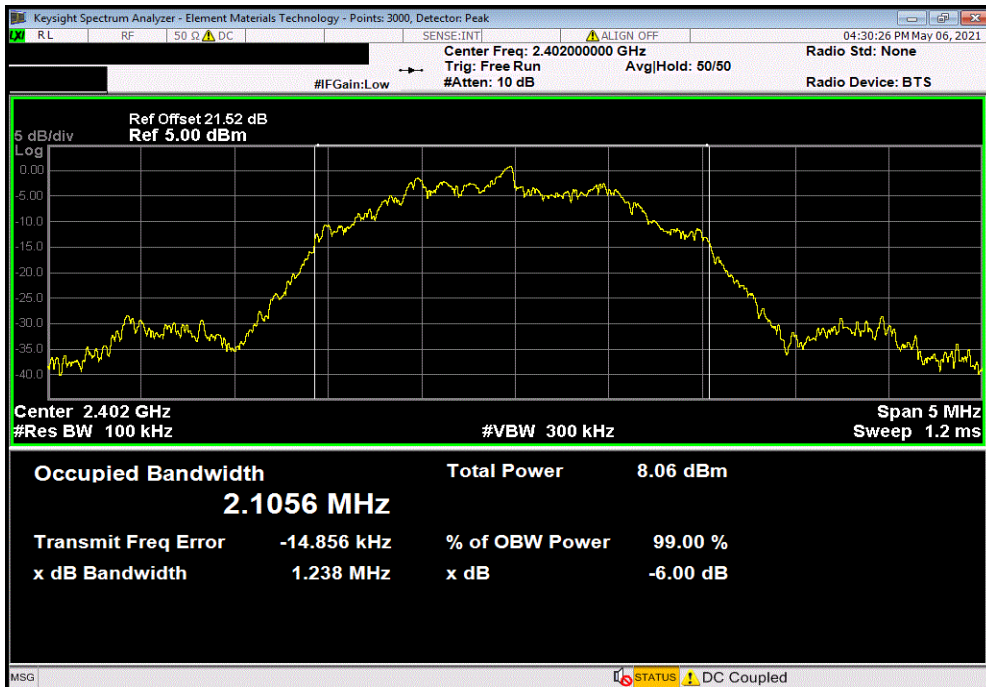


OCCUPIED BANDWIDTH




TbTx 2019.08.30.0 XMI 2020.12.30.0

BLE/GFSK 2 Mbps Mid Channel, 2442 MHz						
				Value	Limit	Result
					(≥)	
				1.236 MHz	500 kHz	Pass

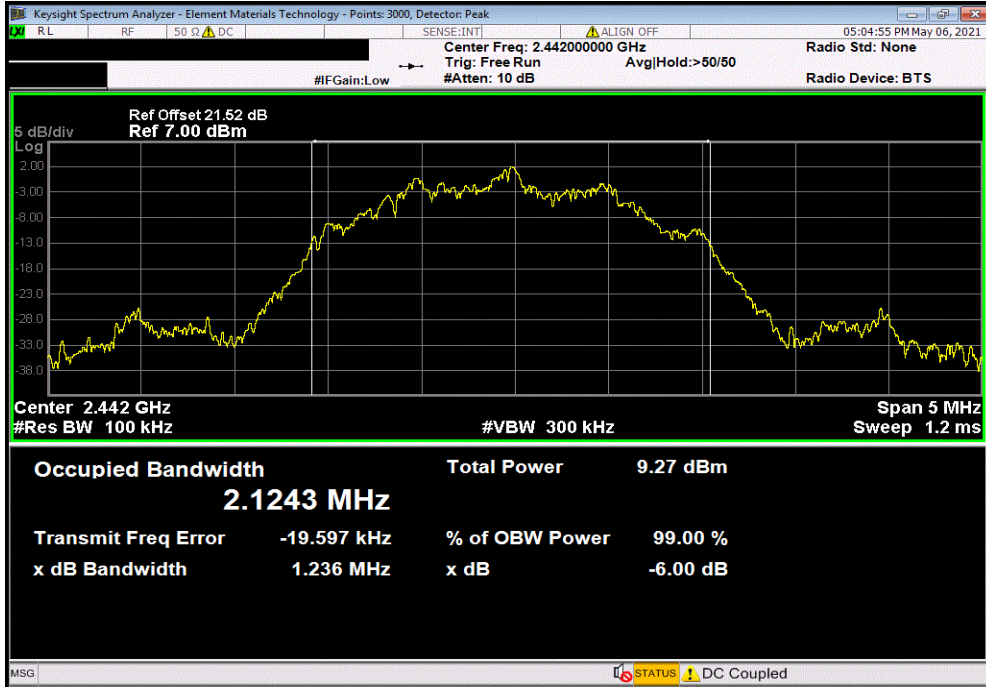

BLE/GFSK 2 Mbps High Channel, 2480 MHz						
				Value	Limit	Result
					(≥)	
				1.251 MHz	500 kHz	Pass

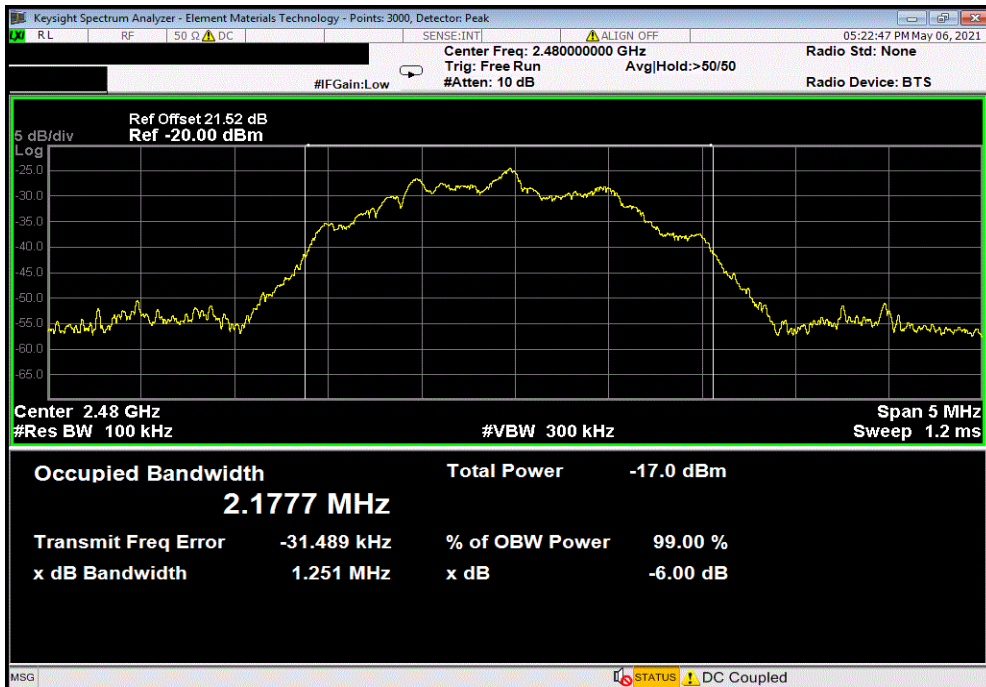

OUTPUT POWER



XMit 2020.12.30.0

Testing was performed using the mode(s) of operation and configuration(s) noted within the report. The individuals and/or the organization requesting the test provided the modes, configurations and settings used to complete the evaluation. The actual test parameters are specified in the test data, this includes items such as investigated frequency range (scanned) and test levels. The testing methods and performance specifications, as well as the test site used for the evaluation are indicated in the test data.

TEST EQUIPMENT

Description	Manufacturer	Model	ID	Last Cal.	Cal. Due
Generator - Signal	Agilent	N5183A	TIK	2019-04-30	2022-04-30
Analyzer - Spectrum Analyzer	Keysight	N9010A	AFM	2021-04-16	2022-04-16
Block - DC	Fairview Microwave	SD3379	AMZ	2020-11-04	2021-11-04
Attenuator	S.M. Electronics	SA26B-20	RFW	2021-02-05	2022-02-05
Cable	Micro-Coax	UFD150A-1-0720-200200	MNL	2020-09-14	2021-09-14

TEST DESCRIPTION

The transmit frequency was set to the required channels in each band. The transmit power was set to its default maximum.

Prior to measuring peak transmit power the DTS bandwidth (B) was measured.

The method found in ANSI C63.10:2013 Section 11.9.1.1 was used because the RBW on the analyzer was greater than the DTS Bandwidth of the radio.

OUTPUT POWER



TstTx 2019.08.30.0 XMI: 2020.12.30.0


EUT: Livio BLE CIC Hearing Aid		Work Order: STAK0237	
Serial Number: 2911330747		Date: 6-May-21	
Customer: Starkey Laboratories, Inc.		Temperature: 23.2 °C	
Attendees: John Quach		Humidity: 31.1% RH	
Project: None		Barometric Pres.: 1024 mbar	
Tested by: Andrew Rogstad		Power: Internal Battery	Job Site: MN08
TEST SPECIFICATIONS			
FCC 15.247:2021		ANSI C63.10:2013	
TEST METHOD			
COMMENTS			
Reference level offset includes measurement cable, attenuator, and DC block.			
DEVIATIONS FROM TEST STANDARD			
None			
Configuration #	2	Signature <i>Andrew Rogstad</i>	
		Out Pwr (dBm)	Limit (dBm) Result
BLE/GFSK 1 Mbps Low Channel, 2402 MHz		1.873	30 Pass
BLE/GFSK 1 Mbps Mid Channel, 2442 MHz		3.2	30 Pass
BLE/GFSK 1 Mbps High Channel, 2480 MHz		3.779	30 Pass
BLE/GFSK 2 Mbps Low Channel, 2402 MHz		1.917	30 Pass
BLE/GFSK 2 Mbps Mid Channel, 2442 MHz		3.169	30 Pass
BLE/GFSK 2 Mbps High Channel, 2480 MHz		2.752	30 Pass

OUTPUT POWER




TbTx 2019.08.30.0 XMit 2020.12.30.0

BLE/GFSK 1 Mbps Low Channel, 2402 MHz						
				Out Pwr (dBm)	Limit (dBm)	Result
				1.873	30	Pass

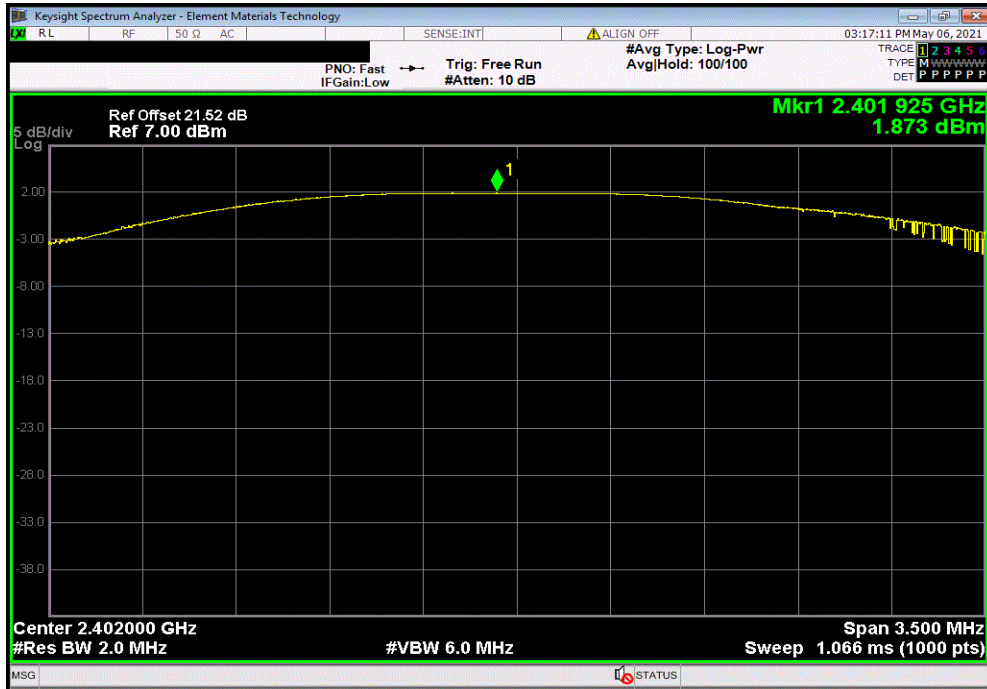

BLE/GFSK 1 Mbps Mid Channel, 2442 MHz						
				Out Pwr (dBm)	Limit (dBm)	Result
				3.2	30	Pass

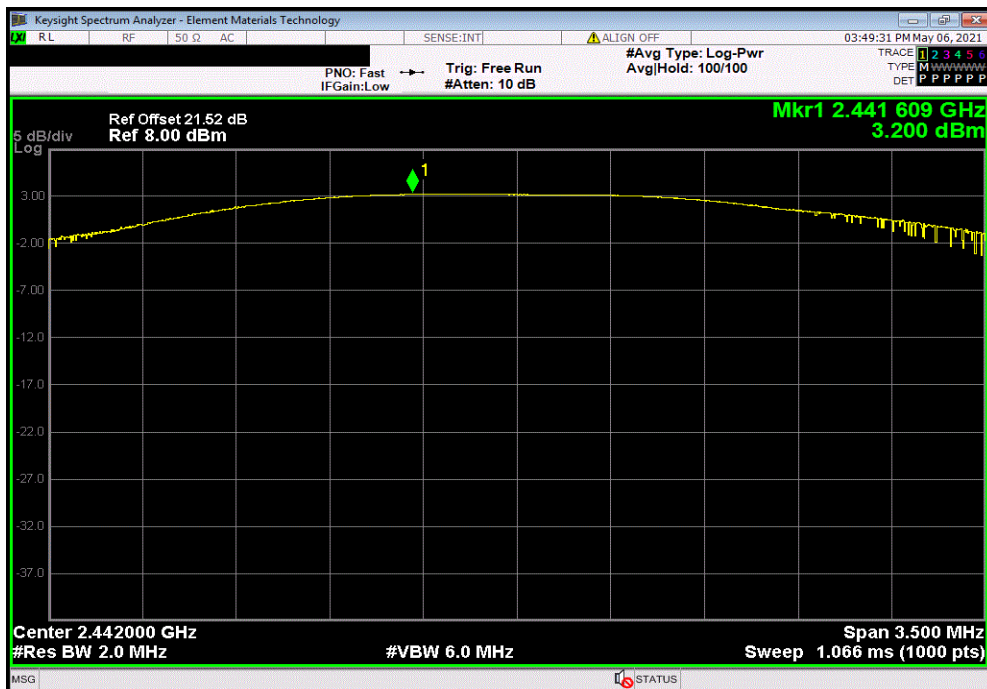


OUTPUT POWER




TbTx 2019.08.30.0 XMit 2020.12.30.0

BLE/GFSK 1 Mbps High Channel, 2480 MHz						
				Out Pwr (dBm)	Limit (dBm)	Result
				3.779	30	Pass

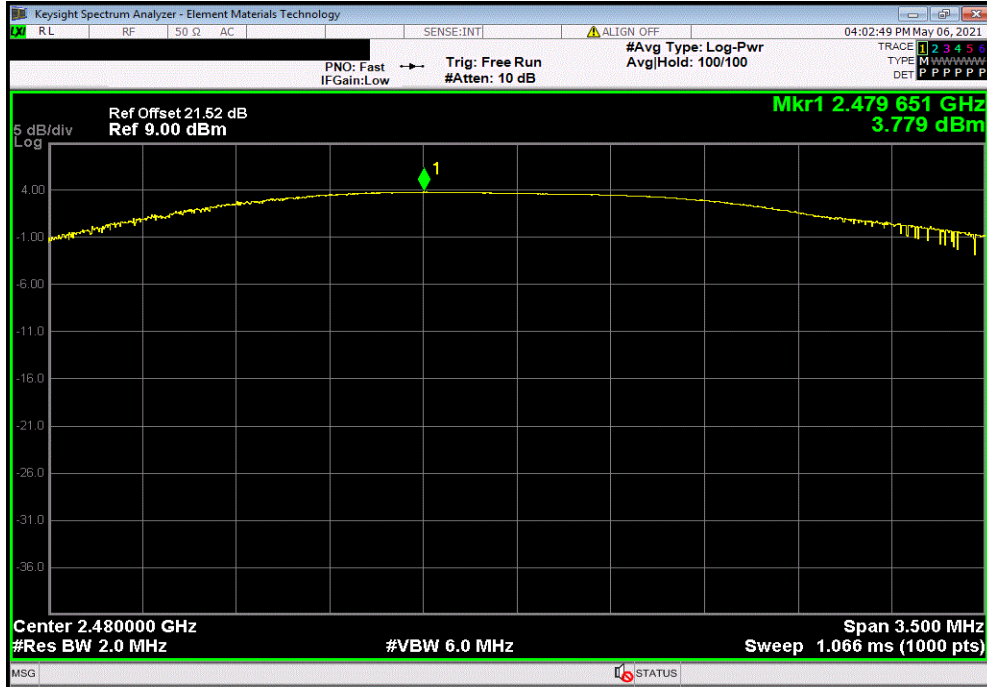

BLE/GFSK 2 Mbps Low Channel, 2402 MHz						
				Out Pwr (dBm)	Limit (dBm)	Result
				1.917	30	Pass

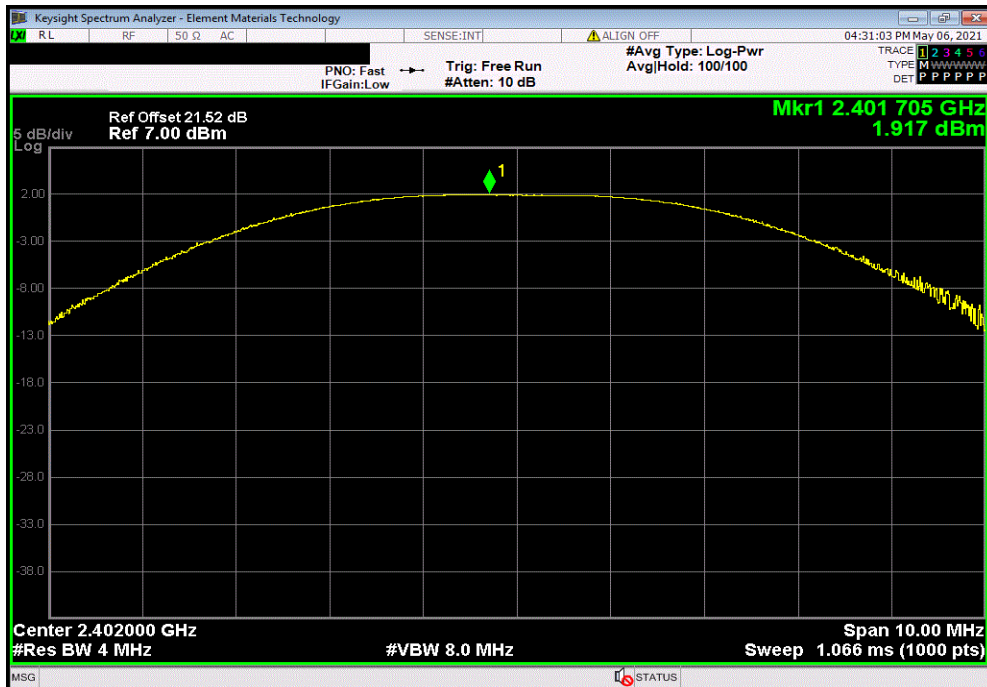


OUTPUT POWER




TbTx 2019.08.30.0 XMit 2020.12.30.0

BLE/GFSK 2 Mbps Mid Channel, 2442 MHz						
				Out Pwr (dBm)	Limit (dBm)	Result
				3.169	30	Pass

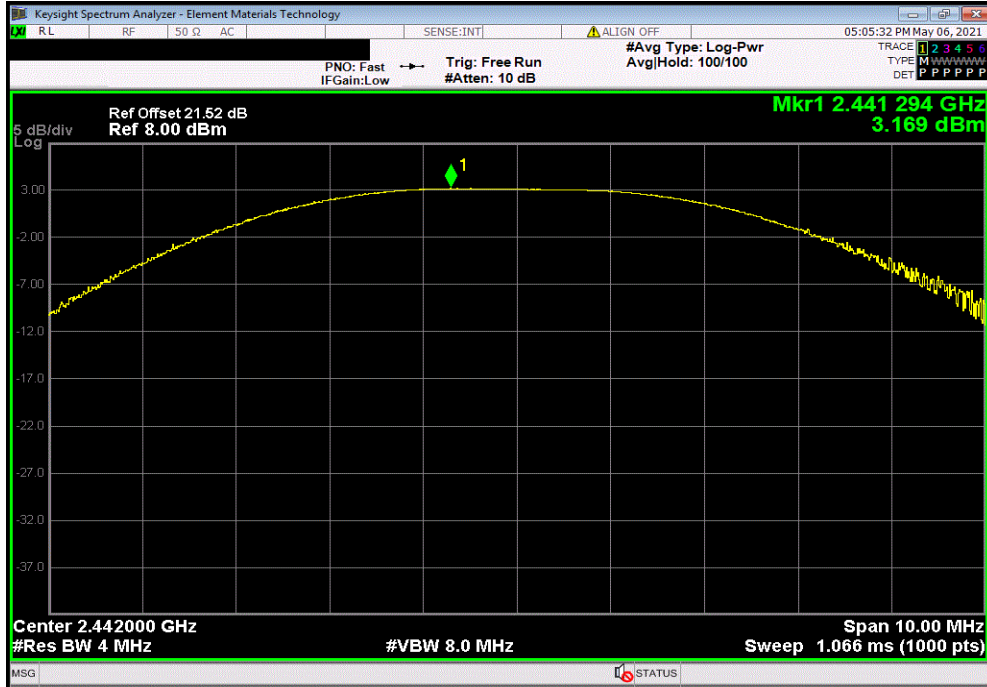

BLE/GFSK 2 Mbps High Channel, 2480 MHz						
				Out Pwr (dBm)	Limit (dBm)	Result
				2.752	30	Pass

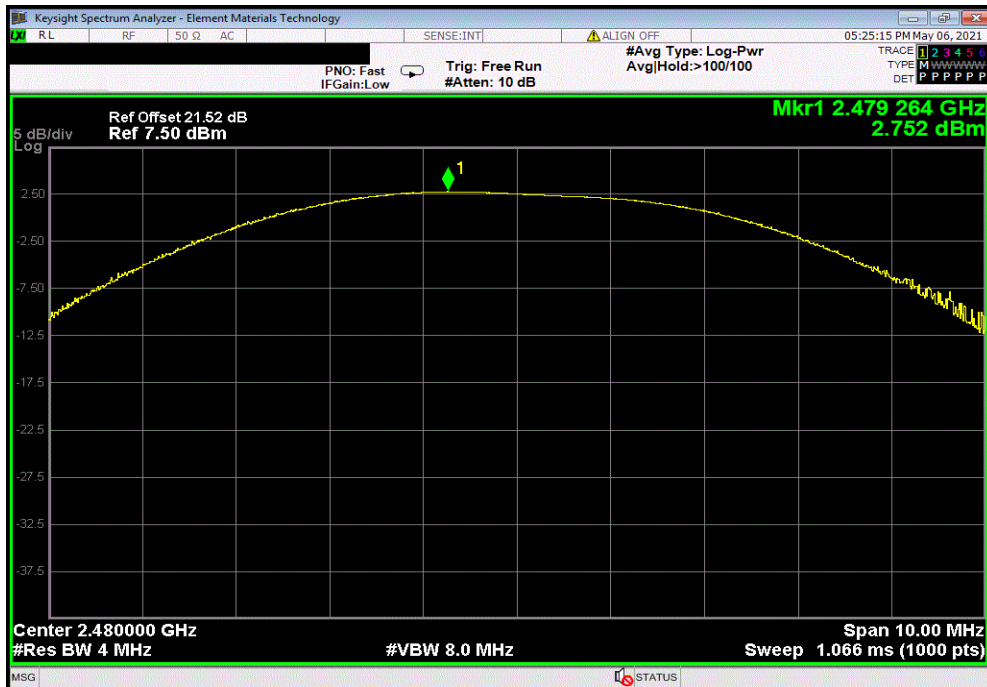

EQUIVALENT ISOTROPIC RADIATED POWER (EIRP)



XMit 2020.12.30.0

Testing was performed using the mode(s) of operation and configuration(s) noted within the report. The individuals and/or the organization requesting the test provided the modes, configurations and settings used to complete the evaluation. The actual test parameters are specified in the test data, this includes items such as investigated frequency range (scanned) and test levels. The testing methods and performance specifications, as well as the test site used for the evaluation are indicated in the test data.

TEST EQUIPMENT

Description	Manufacturer	Model	ID	Last Cal.	Cal. Due
Generator - Signal	Agilent	N5183A	TIK	2019-04-30	2022-04-30
Analyzer - Spectrum Analyzer	Keysight	N9010A	AFM	2021-04-16	2022-04-16
Block - DC	Fairview Microwave	SD3379	AMZ	2020-11-04	2021-11-04
Attenuator	S.M. Electronics	SA26B-20	RFW	2021-02-05	2022-02-05
Cable	Micro-Coax	UFD150A-1-0720-200200	MNL	2020-09-14	2021-09-14

TEST DESCRIPTION

The transmit frequency was set to the required channels in each band. The transmit power was set to its default maximum.

Prior to measuring peak transmit power the DTS bandwidth (B) was measured.

The method found in ANSI C63.10:2013 Section 11.9.1.1 was used because the RBW on the analyzer was greater than the DTS Bandwidth of the radio.

Equivalent Isotropic Radiated Power (EIRP) = Max Measured Power + Antenna gain (dBi)

EQUIVALENT ISOTROPIC RADIATED POWER (EIRP)



TstTx 2019.08.30.0 XMI 2020.12.30.0


EUT: Livio BLE CIC Hearing Aid		Work Order: STAK0237				
Serial Number: 2911330747		Date: 6-May-21				
Customer: Starkey Laboratories, Inc.		Temperature: 23.1 °C				
Attendees: John Quach		Humidity: 30.6% RH				
Project: None		Barometric Pres.: 1024 mbar				
Tested by: Andrew Rogstad		Power: Internal Battery				
		Job Site: MN08				
TEST SPECIFICATIONS						
FCC 15.247:2021		ANSI C63.10:2013				
TEST METHOD						
COMMENTS						
Reference level offset includes measurement cable, attenuator, and DC block.						
DEVIATIONS FROM TEST STANDARD						
None						
Configuration #	2	Signature <i>Andrew Rogstad</i>				
		Out Pwr (dBm)	Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	Result
BLE/GFSK 1 Mbps Low Channel, 2402 MHz		1.873	-4.6	-2.727	36	Pass
BLE/GFSK 1 Mbps Mid Channel, 2442 MHz		3.2	-4.6	-1.4	36	Pass
BLE/GFSK 1 Mbps High Channel, 2480 MHz		3.779	-4.6	-0.821	36	Pass
BLE/GFSK 2 Mbps Low Channel, 2402 MHz		1.917	-4.6	-2.683	36	Pass
BLE/GFSK 2 Mbps Mid Channel, 2442 MHz		3.169	-4.6	-1.431	36	Pass
BLE/GFSK 2 Mbps High Channel, 2480 MHz		2.752	-4.6	-1.848	36	Pass

EQUIVALENT ISOTROPIC RADIATED POWER (EIRP)




TbTx 2019.08.30.0 XMit 2020.12.30.0

BLE/GFSK 1 Mbps Low Channel, 2402 MHz						
Out Pwr (dBm)	Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	Result		
1.873	-4.6	-2.727	36	Pass		

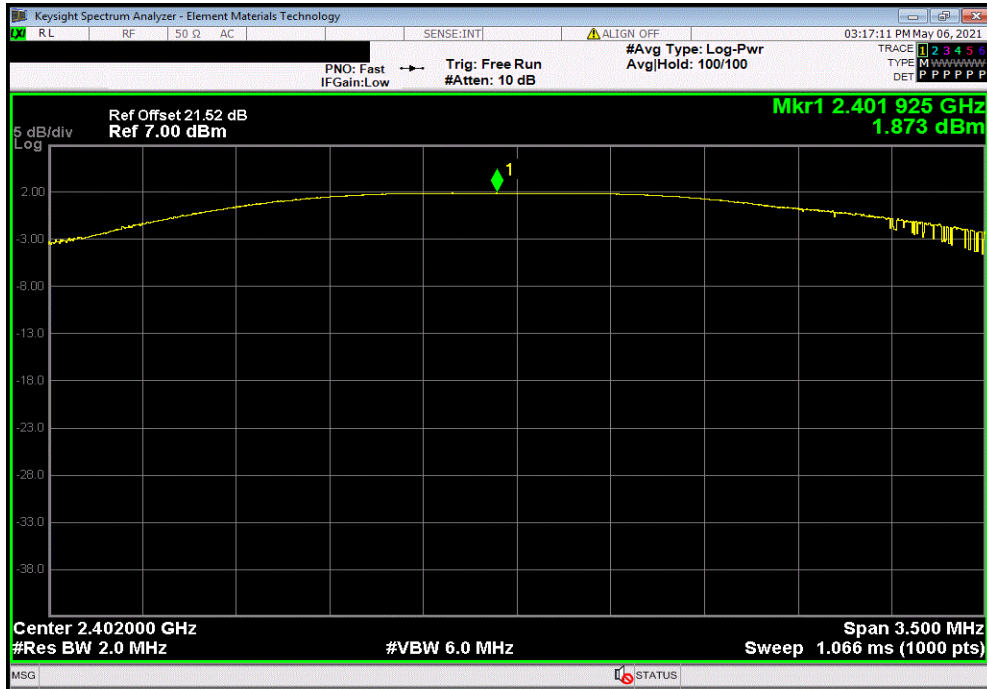

BLE/GFSK 1 Mbps Mid Channel, 2442 MHz						
Out Pwr (dBm)	Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	Result		
3.2	-4.6	-1.4	36	Pass		

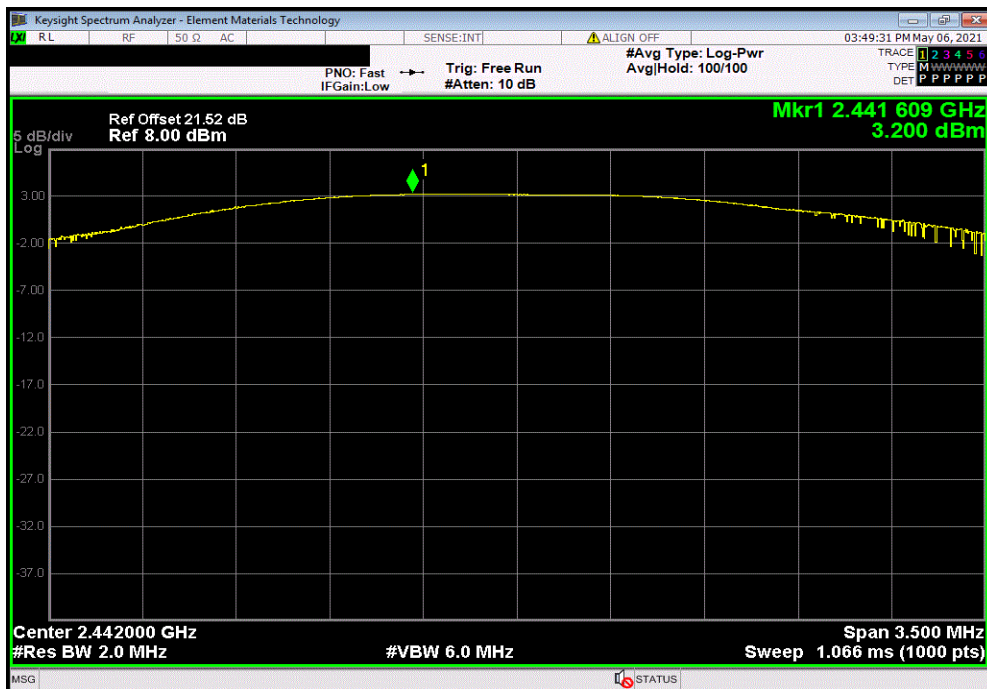

EQUIVALENT ISOTROPIC RADIATED POWER (EIRP)




TbTx 2019.08.30.0 XMI 2020.12.30.0

BLE/GFSK 1 Mbps High Channel, 2480 MHz						
Out Pwr (dBm)	Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	Result		
3.779	-4.6	-0.821	36	Pass		



BLE/GFSK 2 Mbps Low Channel, 2402 MHz						
Out Pwr (dBm)	Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	Result		
1.917	-4.6	-2.683	36	Pass		

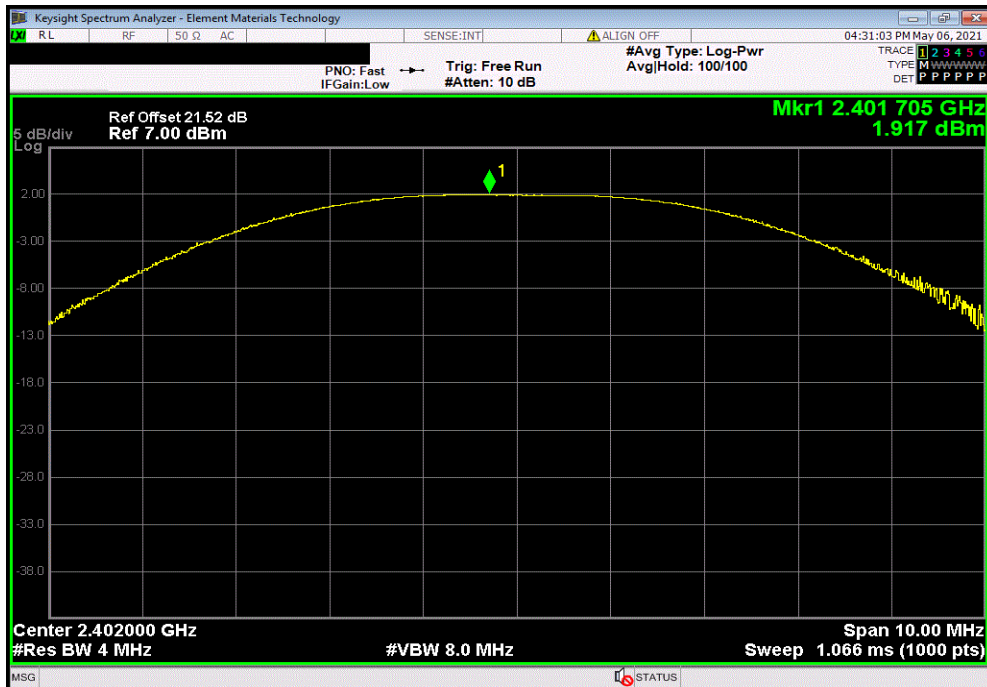


EQUIVALENT ISOTROPIC RADIATED POWER (EIRP)




TbTx 2019.08.30.0 XMI 2020.12.30.0

BLE/GFSK 2 Mbps Mid Channel, 2442 MHz						
Out Pwr (dBm)	Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	Result		
3.169	-4.6	-1.431	36	Pass		

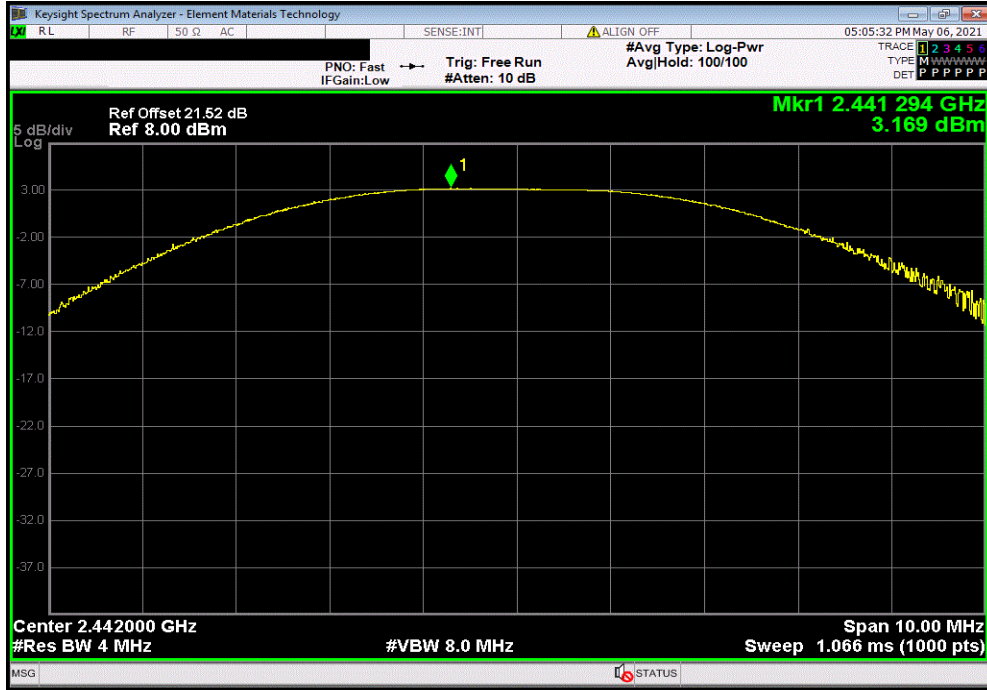

BLE/GFSK 2 Mbps High Channel, 2480 MHz						
Out Pwr (dBm)	Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	Result		
2.752	-4.6	-1.848	36	Pass		

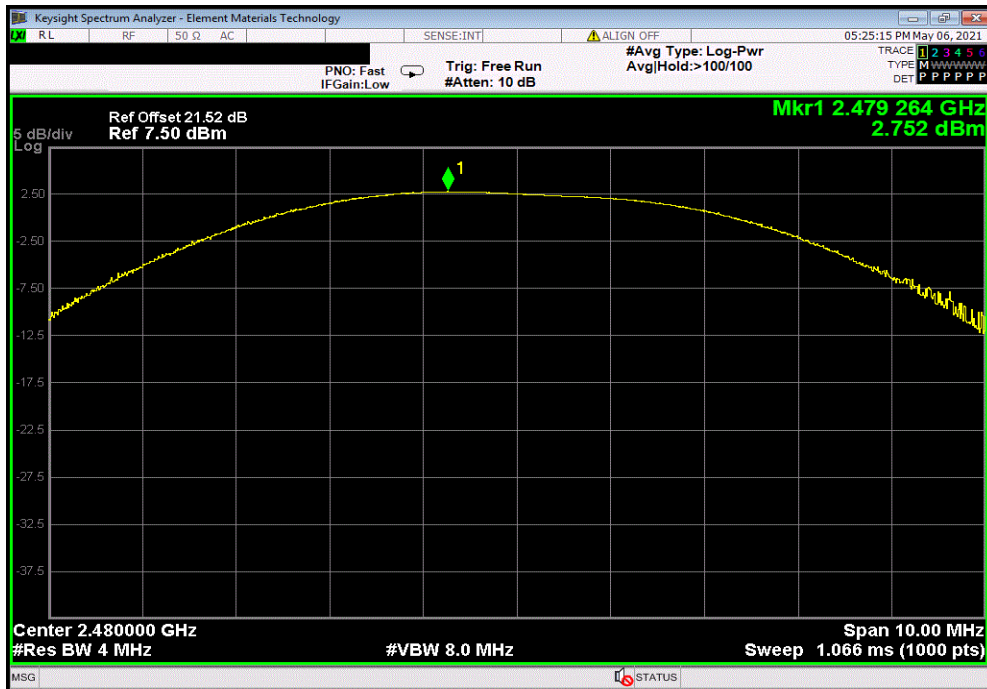

POWER SPECTRAL DENSITY



XMit 2020.12.30.0

Testing was performed using the mode(s) of operation and configuration(s) noted within the report. The individuals and/or the organization requesting the test provided the modes, configurations and settings used to complete the evaluation. The actual test parameters are specified in the test data, this includes items such as investigated frequency range (scanned) and test levels. The testing methods and performance specifications, as well as the test site used for the evaluation are indicated in the test data.

TEST EQUIPMENT

Description	Manufacturer	Model	ID	Last Cal.	Cal. Due
Generator - Signal	Agilent	N5183A	TIK	2019-04-30	2022-04-30
Analyzer - Spectrum Analyzer	Keysight	N9010A	AFM	2021-04-16	2022-04-16
Block - DC	Fairview Microwave	SD3379	AMZ	2020-11-04	2021-11-04
Attenuator	S.M. Electronics	SA26B-20	RFW	2021-02-05	2022-02-05
Cable	Micro-Coax	UFD150A-1-0720-200200	MNL	2020-09-14	2021-09-14

TEST DESCRIPTION

The maximum power spectral density measurements was measured using the channels and modes as called out on the following data sheets.

Per the procedure outlined in ANSI C63.10 the peak power spectral density was measured in a 3 kHz RBW.

POWER SPECTRAL DENSITY



TstTx 2019.08.30.0 XMI: 2020.12.30.0


EUT: Livio BLE CIC Hearing Aid		Work Order: STAK0237		
Serial Number: 2911330747		Date: 6-May-21		
Customer: Starkey Laboratories, Inc.		Temperature: 23.3 °C		
Attendees: John Quach		Humidity: 31.4% RH		
Project: None		Barometric Pres.: 1024 mbar		
Tested by: Andrew Rogstad	Power: Internal Battery	Job Site: MN08		
TEST SPECIFICATIONS				
FCC 15.247:2021		ANSI C63.10:2013		
TEST METHOD				
COMMENTS				
Reference level offset includes measurement cable, attenuator, and DC block.				
DEVIATIONS FROM TEST STANDARD				
None				
Configuration #	2	Signature <i>Andrew Rogstad</i>		
		Value	Limit	Results
		dBm/3kHz	< dBm/3kHz	
BLE/GFSK 1 Mbps Low Channel, 2402 MHz		-13.544	8	Pass
BLE/GFSK 1 Mbps Mid Channel, 2442 MHz		-12.21	8	Pass
BLE/GFSK 1 Mbps High Channel, 2480 MHz		-12.004	8	Pass
BLE/GFSK 2 Mbps Low Channel, 2402 MHz		-15.779	8	Pass
BLE/GFSK 2 Mbps Mid Channel, 2442 MHz		-14.601	8	Pass
BLE/GFSK 2 Mbps High Channel, 2480 MHz		-15.256	8	Pass

POWER SPECTRAL DENSITY




TbTx 2019.08.30.0 XMI 2020.12.30.0

BLE/GFSK 1 Mbps Low Channel, 2402 MHz						
	Value	Limit	Results			
	dBm/3kHz	< dBm/3kHz				
	-13.544	8	Pass			

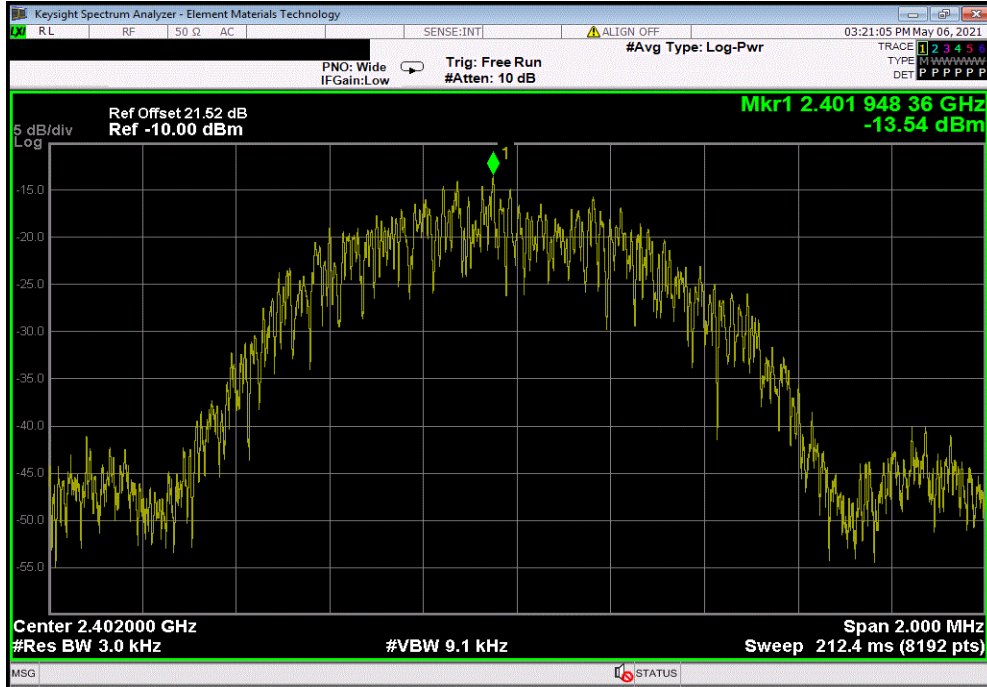

BLE/GFSK 1 Mbps Mid Channel, 2442 MHz						
	Value	Limit	Results			
	dBm/3kHz	< dBm/3kHz				
	-12.21	8	Pass			

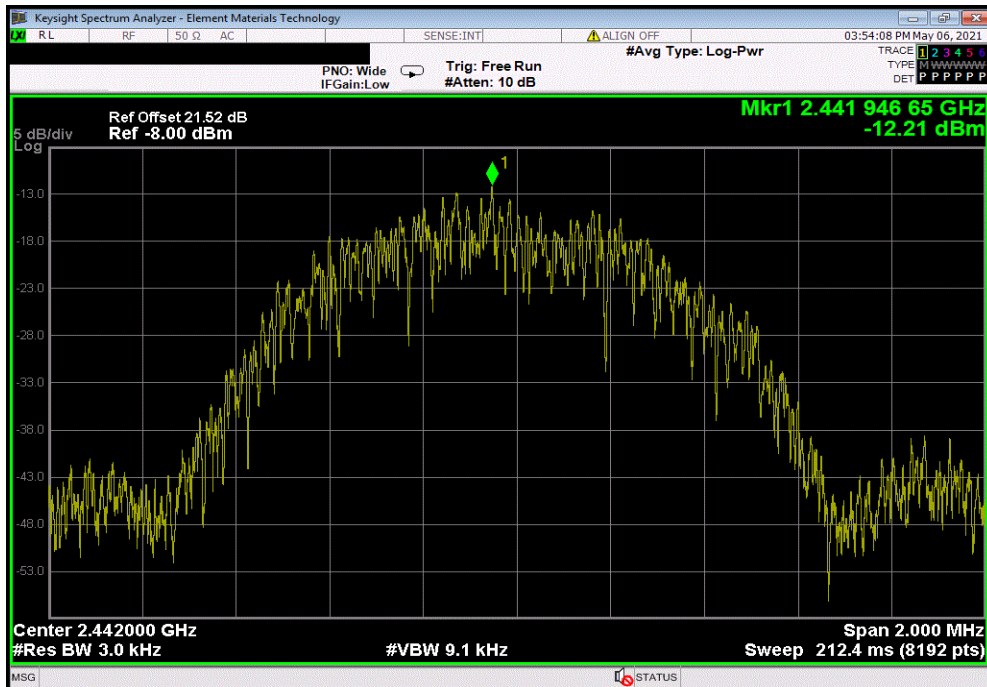


POWER SPECTRAL DENSITY




TbTx 2019.08.30.0 XMI 2020.12.30.0

BLE/GFSK 1 Mbps High Channel, 2480 MHz			
	Value	Limit	Results
	dBm/3kHz	< dBm/3kHz	
	-12.004	8	Pass

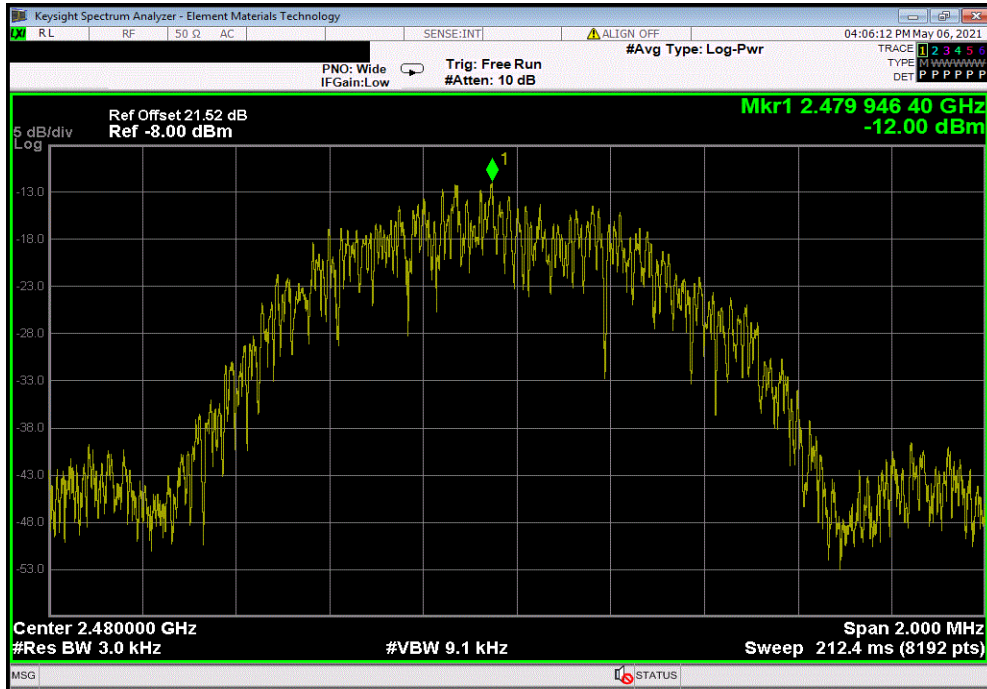

BLE/GFSK 2 Mbps Low Channel, 2402 MHz			
	Value	Limit	Results
	dBm/3kHz	< dBm/3kHz	
	-15.779	8	Pass

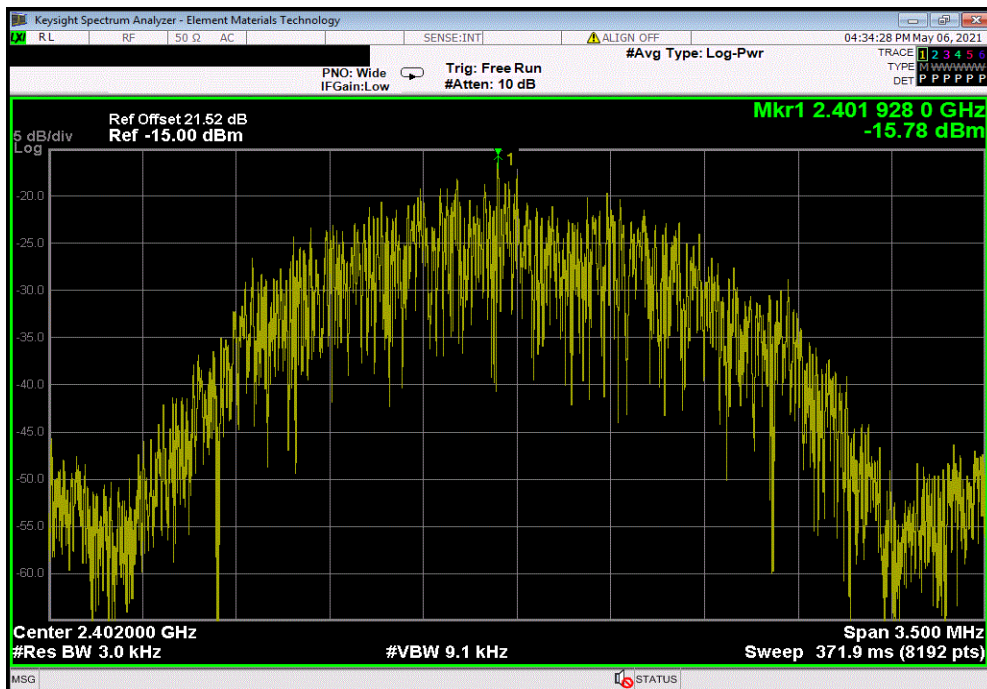


POWER SPECTRAL DENSITY




TbTx 2019.08.30.0 XMit 2020.12.30.0

BLE/GFSK 2 Mbps Mid Channel, 2442 MHz						
	Value	Limit	Results			
	dBm/3kHz	< dBm/3kHz				
	-14.601	8	Pass			

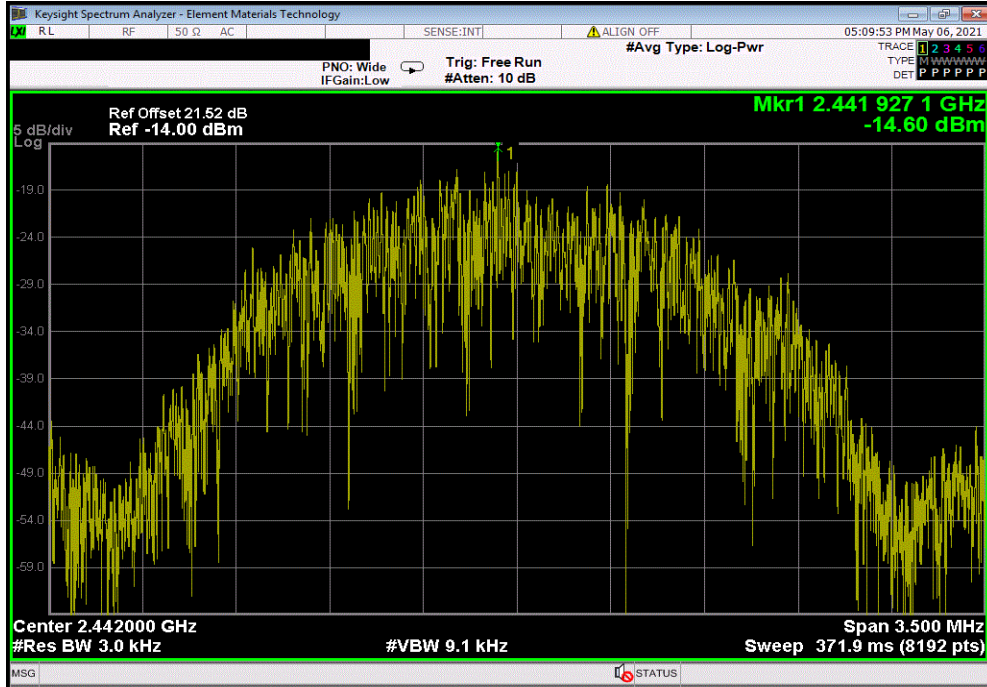

BLE/GFSK 2 Mbps High Channel, 2480 MHz						
	Value	Limit	Results			
	dBm/3kHz	< dBm/3kHz				
	-15.256	8	Pass			

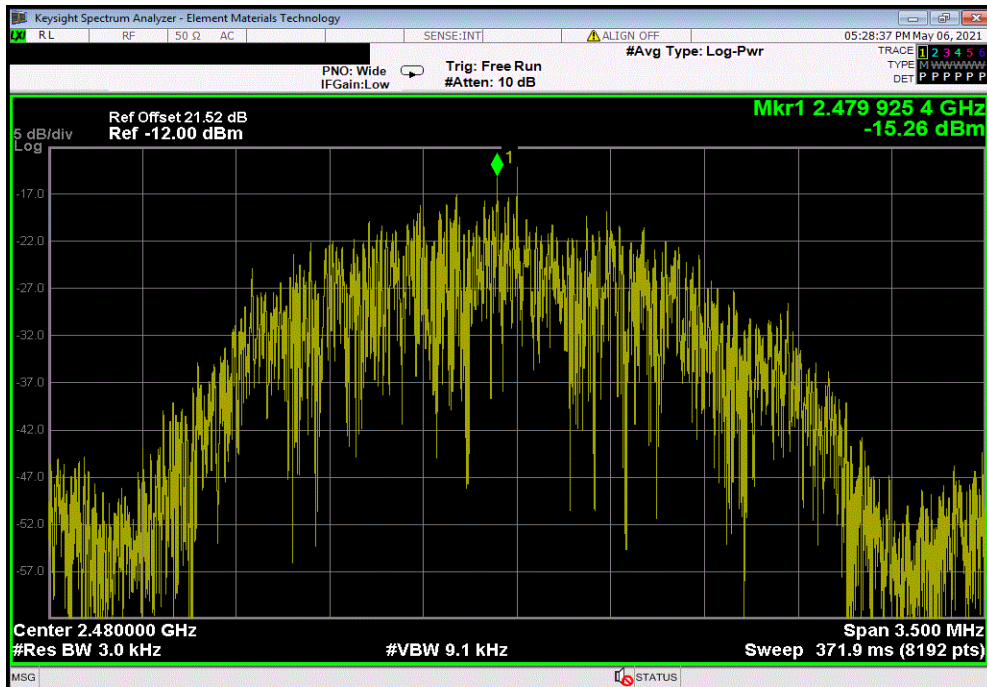

BAND EDGE COMPLIANCE



XMI 2020.12.30.0

Testing was performed using the mode(s) of operation and configuration(s) noted within the report. The individuals and/or the organization requesting the test provided the modes, configurations and settings used to complete the evaluation. The actual test parameters are specified in the test data, this includes items such as investigated frequency range (scanned) and test levels. The testing methods and performance specifications, as well as the test site used for the evaluation are indicated in the test data.

TEST EQUIPMENT

Description	Manufacturer	Model	ID	Last Cal.	Cal. Due
Generator - Signal	Agilent	N5183A	TIK	2019-04-30	2022-04-30
Analyzer - Spectrum Analyzer	Keysight	N9010A	AFM	2021-04-16	2022-04-16
Block - DC	Fairview Microwave	SD3379	AMZ	2020-11-04	2021-11-04
Attenuator	S.M. Electronics	SA26B-20	RFW	2021-02-05	2022-02-05
Cable	Micro-Coax	UFD150A-1-0720-200200	MNL	2020-09-14	2021-09-14

TEST DESCRIPTION

The spurious RF conducted emissions at the edges of the authorized bands were measured with the EUT set to low and high transmit frequencies in each available band. The channels closest to the band edges were selected. The EUT was transmitting at the data rate(s) listed in the datasheet.

The spectrum was scanned below the lower band edge and above the higher band edge.

BAND EDGE COMPLIANCE



TstTx 2019.08.30.0 XMIT 2020.12.30.0


EUT: Livio BLE CIC Hearing Aid		Work Order: STAK0237	
Serial Number: 2911330747		Date: 6-May-21	
Customer: Starkey Laboratories, Inc.		Temperature: 23.3 °C	
Attendees: John Quach		Humidity: 31.5% RH	
Project: None		Barometric Pres.: 1024 mbar	
Tested by: Andrew Rogstad		Power: Internal Battery	
		Job Site: MN08	
TEST SPECIFICATIONS			
FCC 15.247:2021		ANSI C63.10:2013	
TEST METHOD			
COMMENTS			
Reference level offset includes measurement cable, attenuator, and DC block.			
DEVIATIONS FROM TEST STANDARD			
None			
Configuration #	2	Signature <i>Andrew Rogstad</i>	
		Value (dBc)	Limit ≤ (dBc) Result
BLE/GFSK 1 Mbps Low Channel, 2402 MHz		-34.8	-20 Pass
BLE/GFSK 1 Mbps High Channel, 2480 MHz		-38.45	-20 Pass
BLE/GFSK 2 Mbps Low Channel, 2402 MHz		-29.72	-20 Pass
BLE/GFSK 2 Mbps High Channel, 2480 MHz		-39.74	-20 Pass

BAND EDGE COMPLIANCE




TbTx 2019.08.30.0 XMit 2020.12.30.0

BLE/GFSK 1 Mbps Low Channel, 2402 MHz						
				Value (dBc)	Limit ≤ (dBc)	Result
				-34.8	-20	Pass

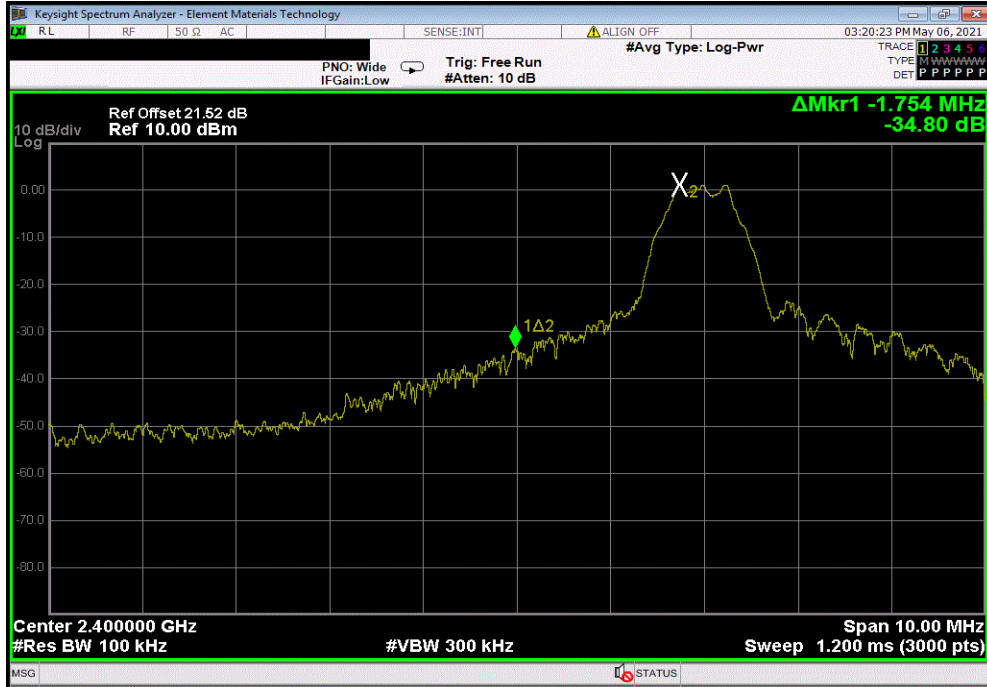

BLE/GFSK 1 Mbps High Channel, 2480 MHz						
				Value (dBc)	Limit ≤ (dBc)	Result
				-38.45	-20	Pass

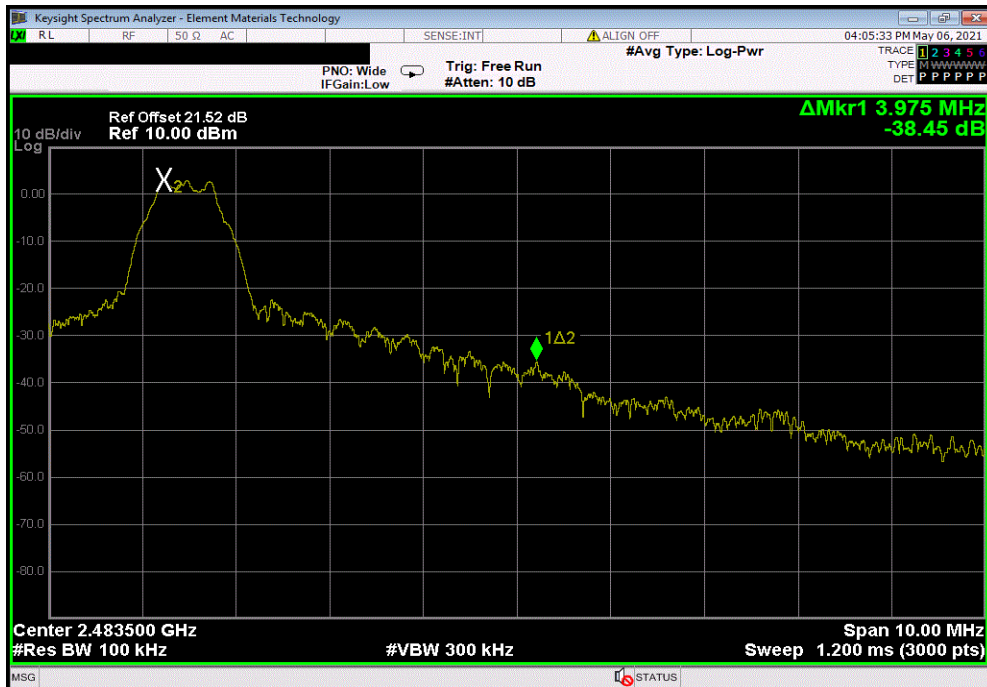


BAND EDGE COMPLIANCE




TbTx 2019.08.30.0 XMI 2020.12.30.0

BLE/GFSK 2 Mbps Low Channel, 2402 MHz						
	Value (dBc)	Limit ≤ (dBc)	Result			
	-29.72	-20	Pass			

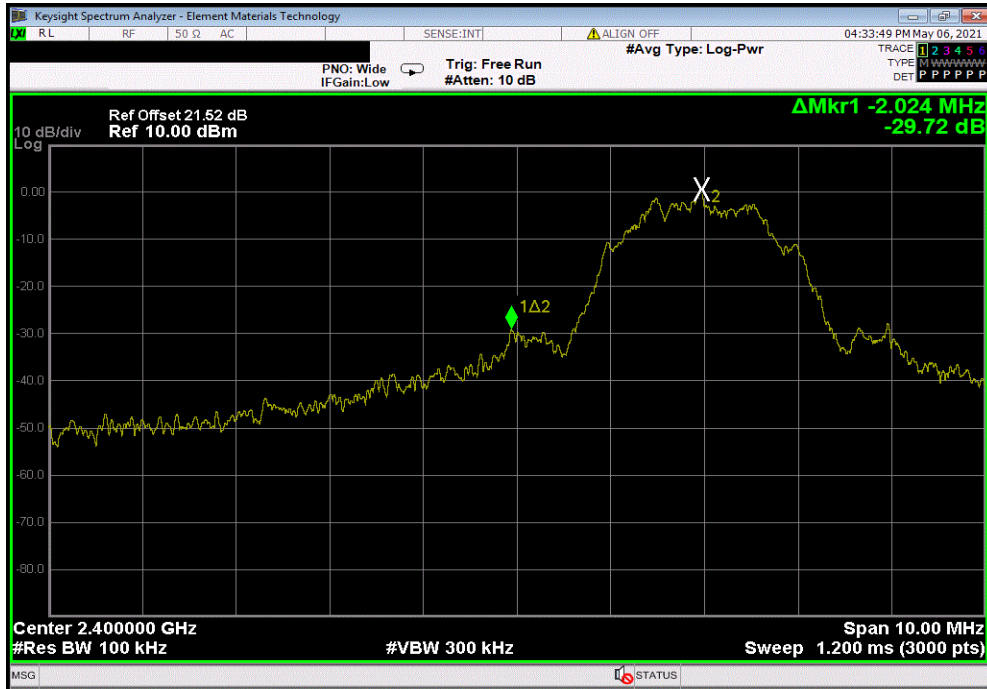

BLE/GFSK 2 Mbps High Channel, 2480 MHz						
	Value (dBc)	Limit ≤ (dBc)	Result			
	-39.74	-20	Pass			

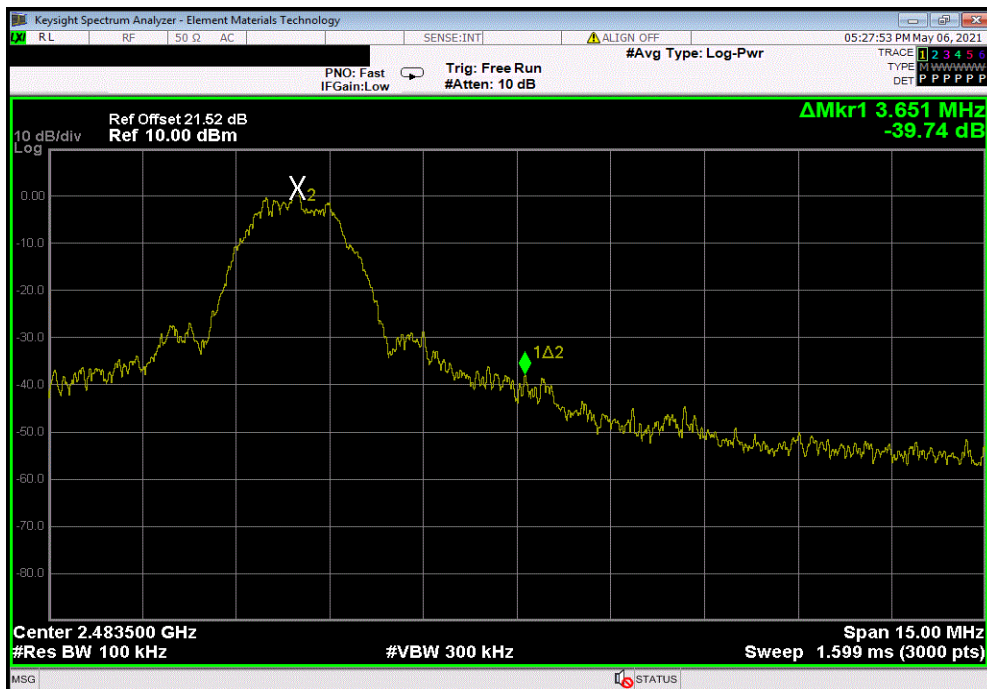

SPURIOUS CONDUCTED EMISSIONS



element

XMIT 2020.12.30.0

Testing was performed using the mode(s) of operation and configuration(s) noted within the report. The individuals and/or the organization requesting the test provided the modes, configurations and settings used to complete the evaluation. The actual test parameters are specified in the test data, this includes items such as investigated frequency range (scanned) and test levels. The testing methods and performance specifications, as well as the test site used for the evaluation are indicated in the test data.

TEST EQUIPMENT

Description	Manufacturer	Model	ID	Last Cal.	Cal. Due
Generator - Signal	Agilent	N5183A	TIK	2019-04-30	2022-04-30
Analyzer - Spectrum Analyzer	Keysight	N9010A	AFM	2021-04-16	2022-04-16
Block - DC	Fairview Microwave	SD3379	AMI	2020-08-05	2021-08-05
Attenuator	S.M. Electronics	SA26B-20	RFW	2021-02-05	2022-02-05
Cable	Micro-Coax	UFD150A-1-0720-200200	MNL	2020-09-14	2021-09-14

TEST DESCRIPTION

The spurious RF conducted emissions were measured with the EUT set to low, medium and high transmit frequencies. The EUT was transmitting at the data rate(s) listed in the datasheet. For each transmit frequency, the spectrum was scanned throughout the specified frequency range.

SPURIOUS CONDUCTED EMISSIONS



TotTx 2019.08.30.0 XMit 2020.12.30.0


EUT: Livio BLE CIC Hearing Aid		Work Order: STAK0237				
Serial Number: 2911330747		Date: 6-May-21				
Customer: Starkey Laboratories, Inc.		Temperature: 23.1 °C				
Attendees: John Quach		Humidity: 30.3% RH				
Project: None		Barometric Pres.: 1024 mbar				
Tested by: Andrew Rogstad		Power: Internal Battery				
		Job Site: MN08				
TEST SPECIFICATIONS						
FCC 15.247:2021		ANSI C63.10:2013				
TEST METHOD						
COMMENTS						
Reference level offset includes measurement cable, attenuator, and DC block.						
DEVIATIONS FROM TEST STANDARD						
None						
Configuration #	2	Signature <i>Andrew Rogstad</i>				
		Frequency Range	Measured Freq (MHz)	Max Value (dBc)	Limit ≤ (dBc)	Result
BLE/GFSK 1 Mbps Low Channel, 2402 MHz		Fundamental	2401.97	N/A	N/A	N/A
BLE/GFSK 1 Mbps Low Channel, 2402 MHz		30 MHz - 12.5 GHz	9607.44	-48.05	-20	Pass
BLE/GFSK 1 Mbps Low Channel, 2402 MHz		12.5 GHz - 25 GHz	24757.36	-39.61	-20	Pass
BLE/GFSK 1 Mbps Mid Channel, 2442 MHz		Fundamental	2441.98	N/A	N/A	N/A
BLE/GFSK 1 Mbps Mid Channel, 2442 MHz		30 MHz - 12.5 GHz	9768.81	-49.75	-20	Pass
BLE/GFSK 1 Mbps Mid Channel, 2442 MHz		12.5 GHz - 25 GHz	24984.74	-41.75	-20	Pass
BLE/GFSK 1 Mbps High Channel, 2480 MHz		Fundamental	2479.97	N/A	N/A	N/A
BLE/GFSK 1 Mbps High Channel, 2480 MHz		30 MHz - 12.5 GHz	9921.05	-47.16	-20	Pass
BLE/GFSK 1 Mbps High Channel, 2480 MHz		12.5 GHz - 25 GHz	24853.5	-42.57	-20	Pass
BLE/GFSK 2 Mbps Low Channel, 2402 MHz		Fundamental	2401.97	N/A	N/A	N/A
BLE/GFSK 2 Mbps Low Channel, 2402 MHz		30 MHz - 12.5 GHz	2397.34	-45.73	-20	Pass
BLE/GFSK 2 Mbps Low Channel, 2402 MHz		12.5 GHz - 25 GHz	24571.18	-39.74	-20	Pass
BLE/GFSK 2 Mbps Mid Channel, 2442 MHz		Fundamental	2441.97	N/A	N/A	N/A
BLE/GFSK 2 Mbps Mid Channel, 2442 MHz		30 MHz - 12.5 GHz	12069.16	-51.67	-20	Pass
BLE/GFSK 2 Mbps Mid Channel, 2442 MHz		12.5 GHz - 25 GHz	24922.17	-40.81	-20	Pass
BLE/GFSK 2 Mbps High Channel, 2480 MHz		Fundamental	2479.97	N/A	N/A	N/A
BLE/GFSK 2 Mbps High Channel, 2480 MHz		30 MHz - 12.5 GHz	2487.16	-50.5	-20	Pass
BLE/GFSK 2 Mbps High Channel, 2480 MHz		12.5 GHz - 25 GHz	24975.58	-40.82	-20	Pass

SPURIOUS CONDUCTED EMISSIONS




TbTx 2019.08.30.0 XMI 2020.12.30.0

BLE/GFSK 1 Mbps Low Channel, 2402 MHz					
Frequency Range	Measured Freq (MHz)	Max Value (dBc)	Limit ≤ (dBc)	Result	
Fundamental	2401.97	N/A	N/A	N/A	

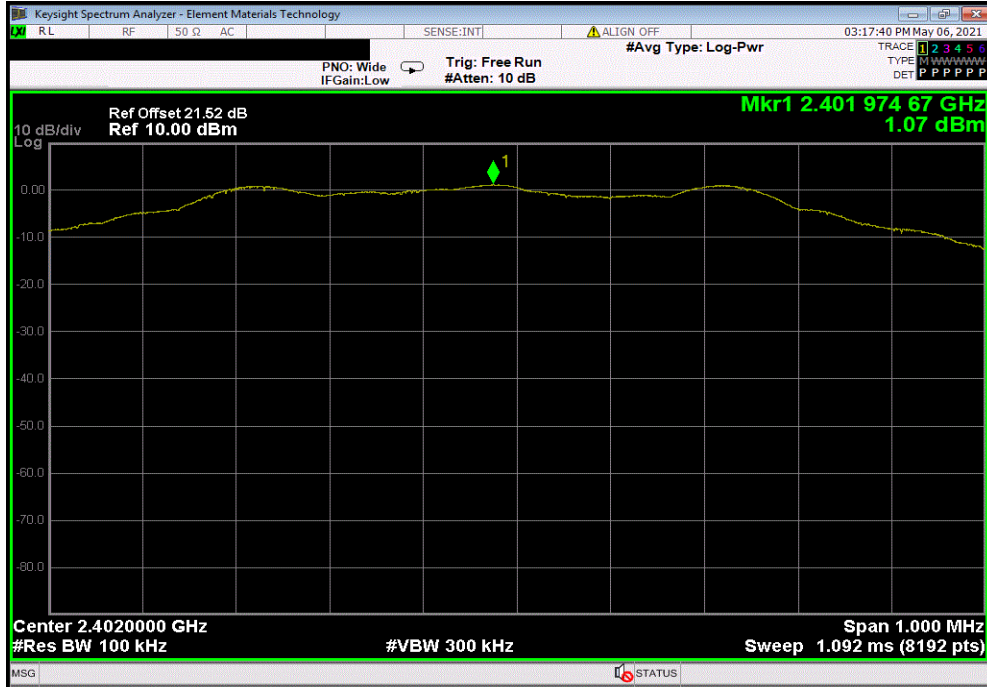

BLE/GFSK 1 Mbps Low Channel, 2402 MHz					
Frequency Range	Measured Freq (MHz)	Max Value (dBc)	Limit ≤ (dBc)	Result	
30 MHz - 12.5 GHz	9607.44	-48.05	-20	Pass	

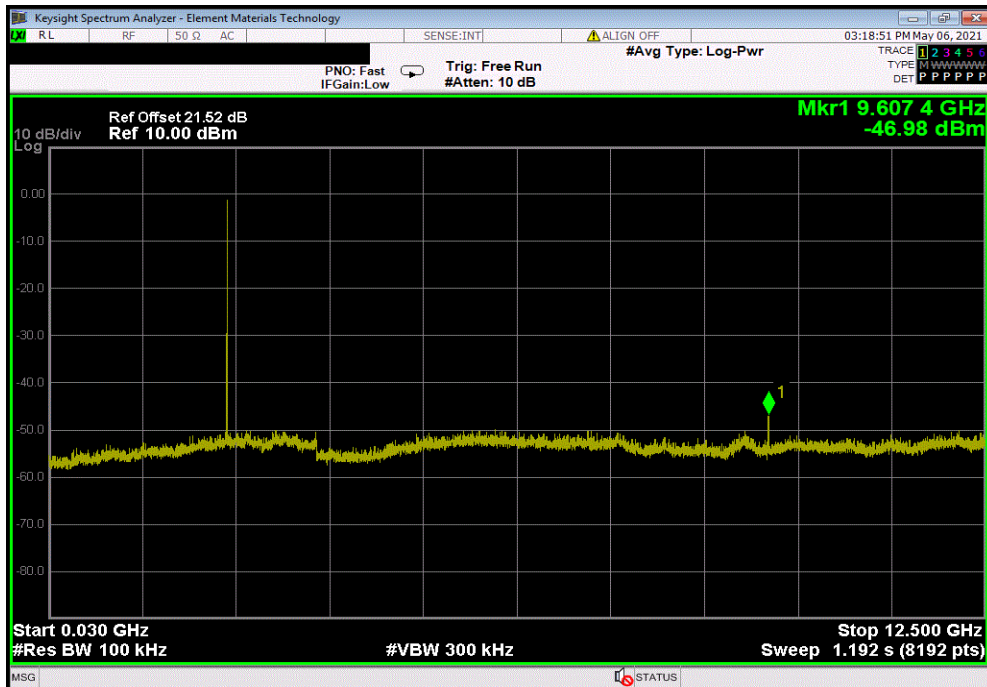


SPURIOUS CONDUCTED EMISSIONS




TbTx 2019.08.30.0 XMI 2020.12.30.0

BLE/GFSK 1 Mbps Low Channel, 2402 MHz					
Frequency Range	Measured Freq (MHz)	Max Value (dBc)	Limit ≤ (dBc)	Result	
12.5 GHz - 25 GHz	24757.36	-39.61	-20	Pass	

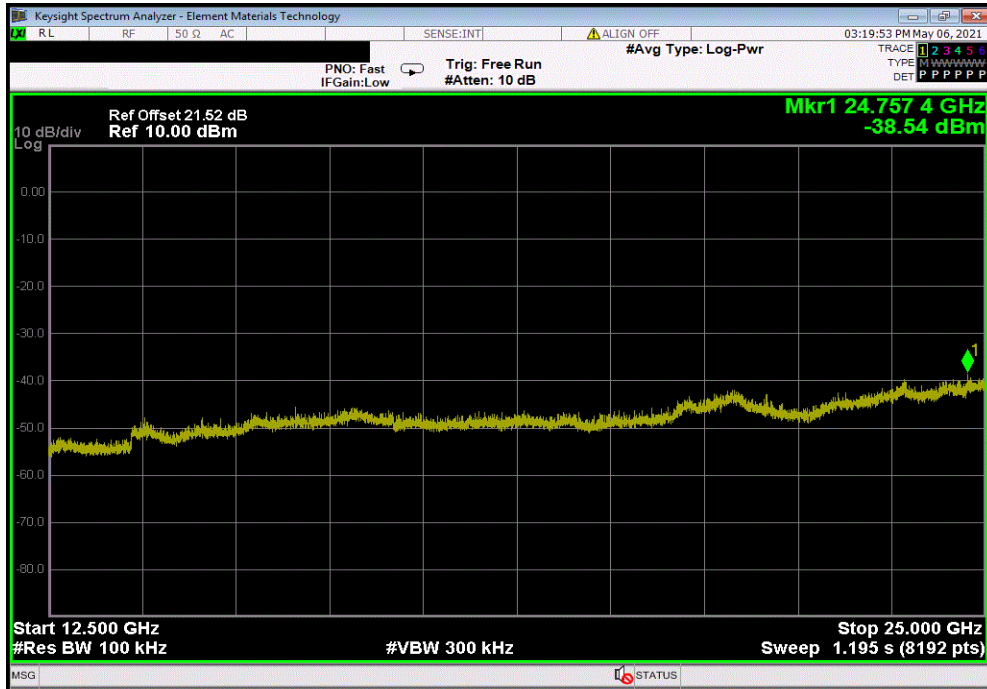

BLE/GFSK 1 Mbps Mid Channel, 2442 MHz					
Frequency Range	Measured Freq (MHz)	Max Value (dBc)	Limit ≤ (dBc)	Result	
Fundamental	2441.98	N/A	N/A	N/A	

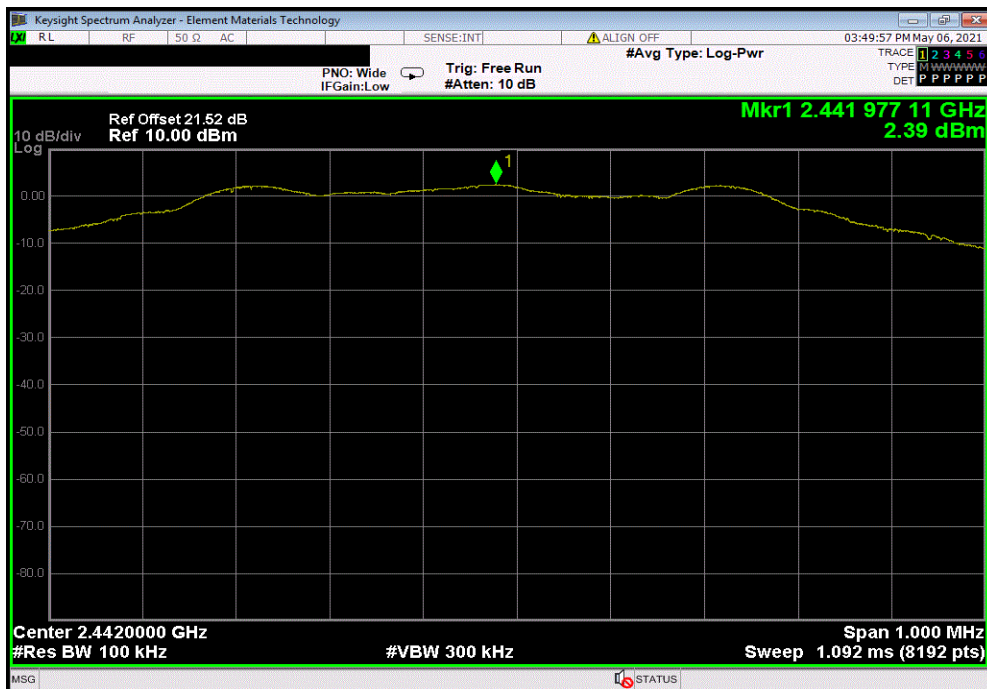


SPURIOUS CONDUCTED EMISSIONS




TbTx 2019.08.30.0 XMI 2020.12.30.0

BLE/GFSK 1 Mbps Mid Channel, 2442 MHz				
Frequency Range	Measured Freq (MHz)	Max Value (dBc)	Limit ≤ (dBc)	Result
30 MHz - 12.5 GHz	9768.81	-49.75	-20	Pass

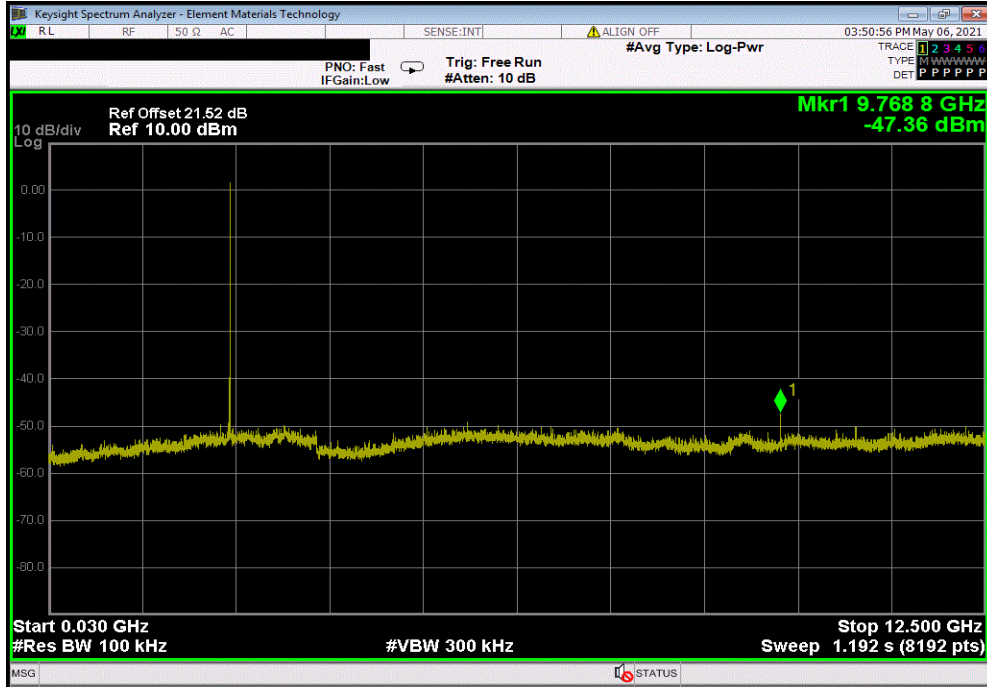

BLE/GFSK 1 Mbps Mid Channel, 2442 MHz				
Frequency Range	Measured Freq (MHz)	Max Value (dBc)	Limit ≤ (dBc)	Result
12.5 GHz - 25 GHz	24984.74	-41.75	-20	Pass

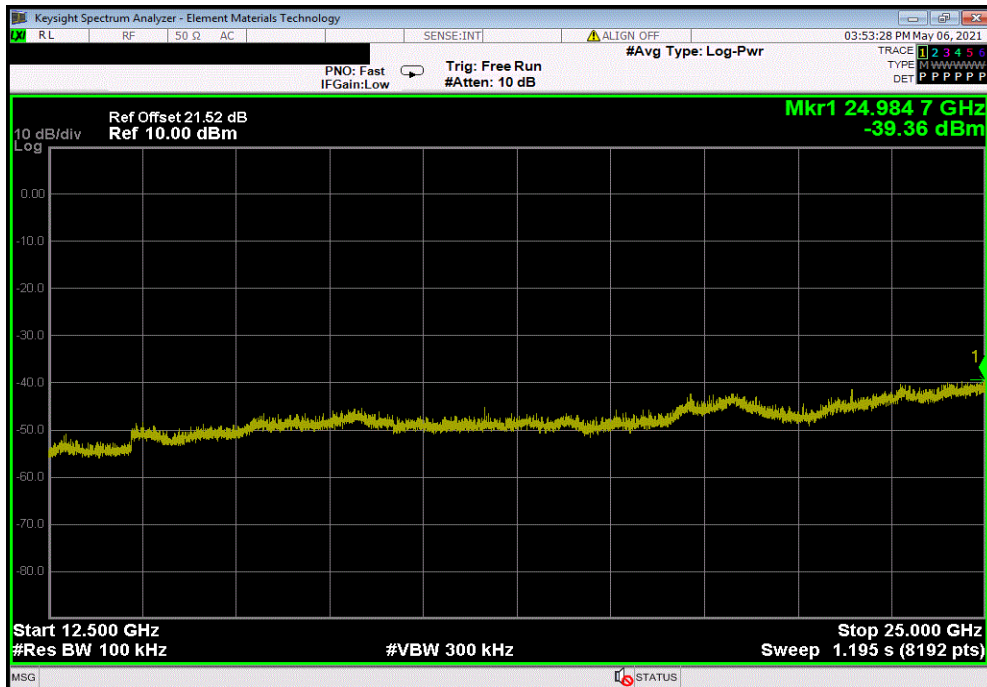


SPURIOUS CONDUCTED EMISSIONS




TbTx 2019.08.30.0 XMI 2020.12.30.0

BLE/GFSK 1 Mbps High Channel, 2480 MHz					
Frequency Range	Measured Freq (MHz)	Max Value (dBc)	Limit ≤ (dBc)	Result	
Fundamental	2479.97	N/A	N/A	N/A	

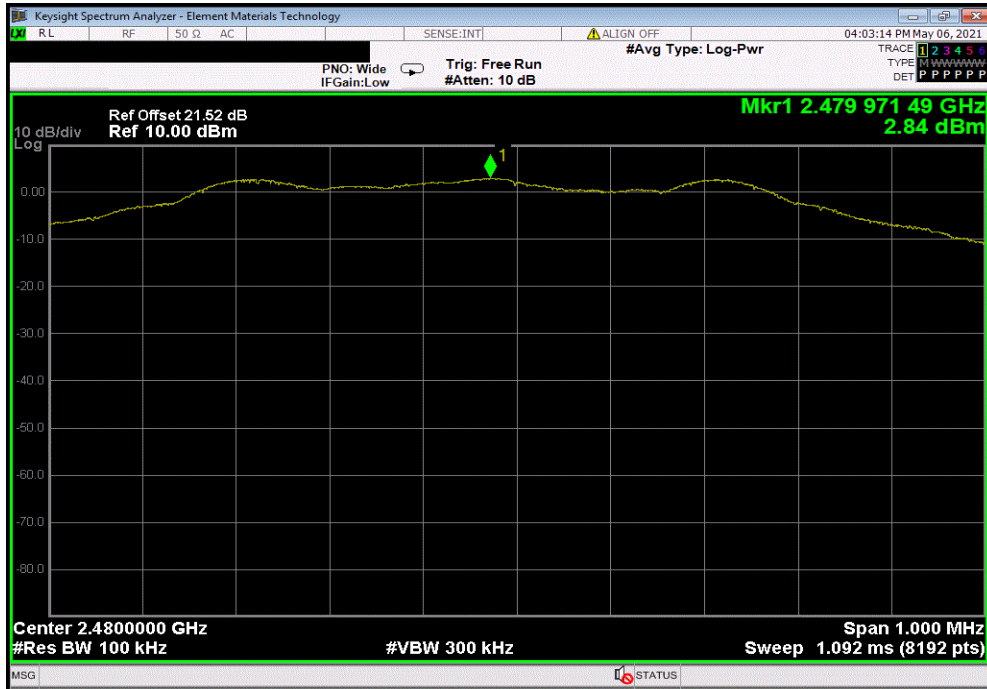

BLE/GFSK 1 Mbps High Channel, 2480 MHz					
Frequency Range	Measured Freq (MHz)	Max Value (dBc)	Limit ≤ (dBc)	Result	
30 MHz - 12.5 GHz	9921.05	-47.16	-20	Pass	

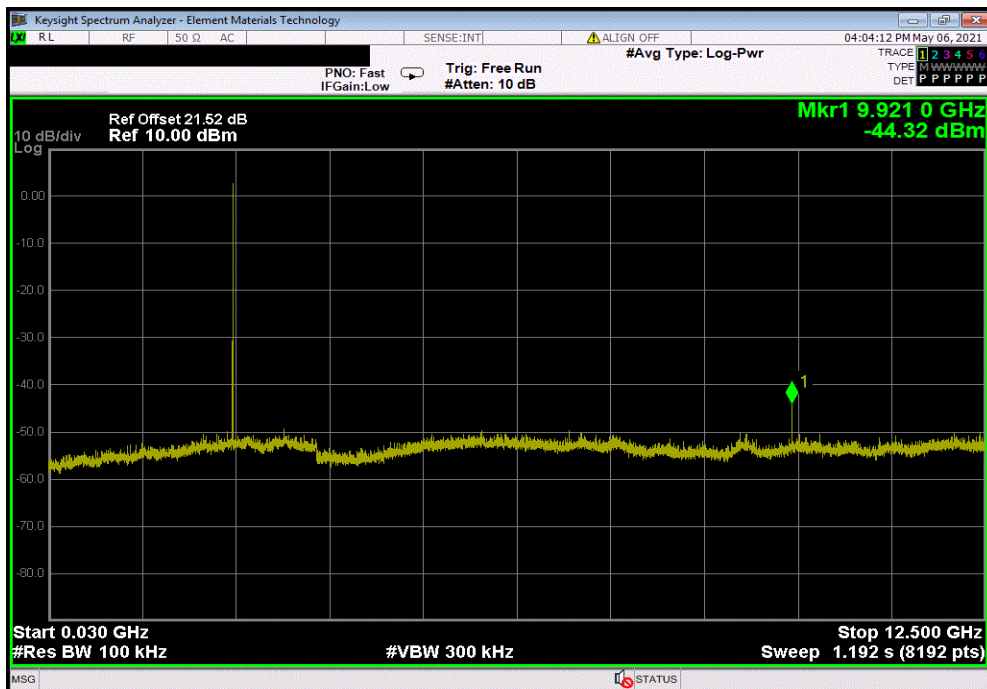


SPURIOUS CONDUCTED EMISSIONS




TbTx 2019.08.30.0 XMI 2020.12.30.0

BLE/GFSK 1 Mbps High Channel, 2480 MHz					
Frequency Range	Measured Freq (MHz)	Max Value (dBc)	Limit ≤ (dBc)	Result	
12.5 GHz - 25 GHz	24853.5	-42.57	-20	Pass	

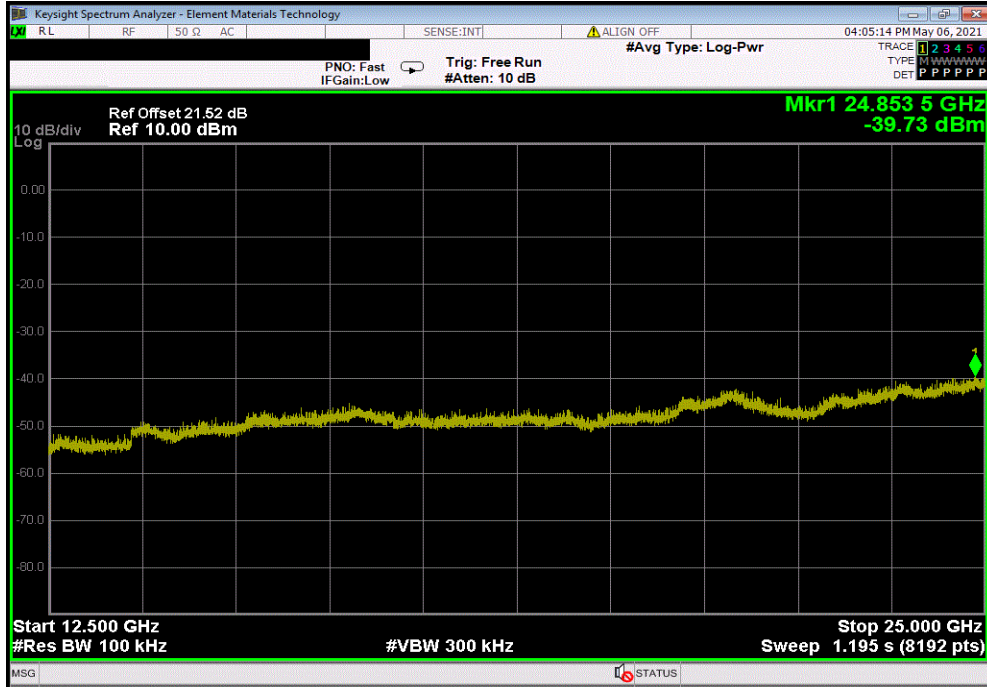

BLE/GFSK 2 Mbps Low Channel, 2402 MHz					
Frequency Range	Measured Freq (MHz)	Max Value (dBc)	Limit ≤ (dBc)	Result	
Fundamental	2401.97	N/A	N/A	N/A	

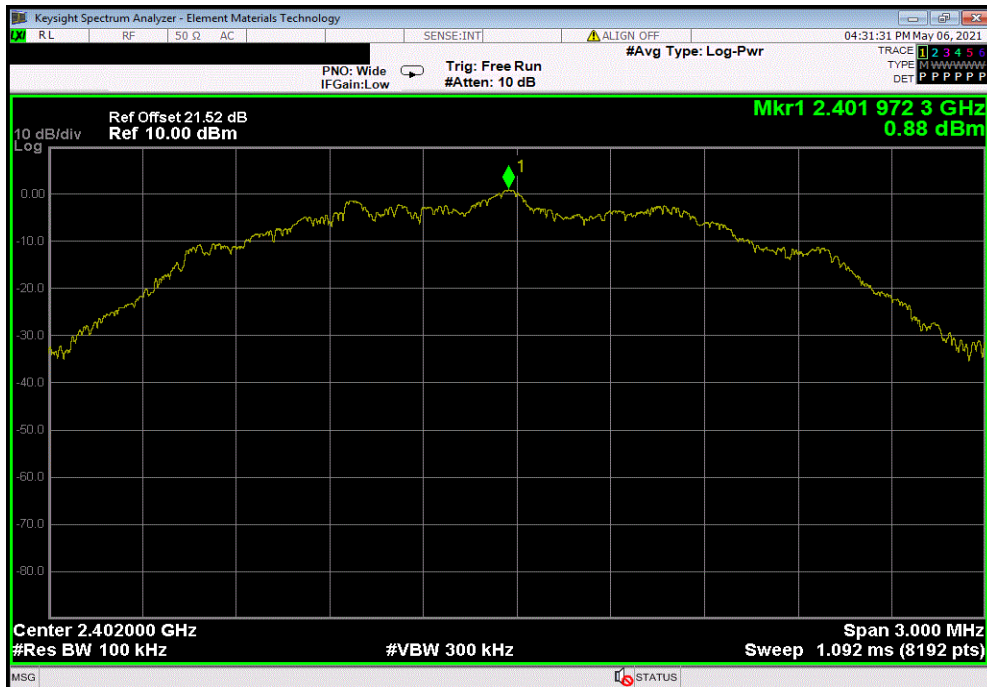


SPURIOUS CONDUCTED EMISSIONS




TbTx 2019.08.30.0 XMI 2020.12.30.0

BLE/GFSK 2 Mbps Low Channel, 2402 MHz				
Frequency Range	Measured Freq (MHz)	Max Value (dBc)	Limit ≤ (dBc)	Result
30 MHz - 12.5 GHz	2397.34	-45.73	-20	Pass

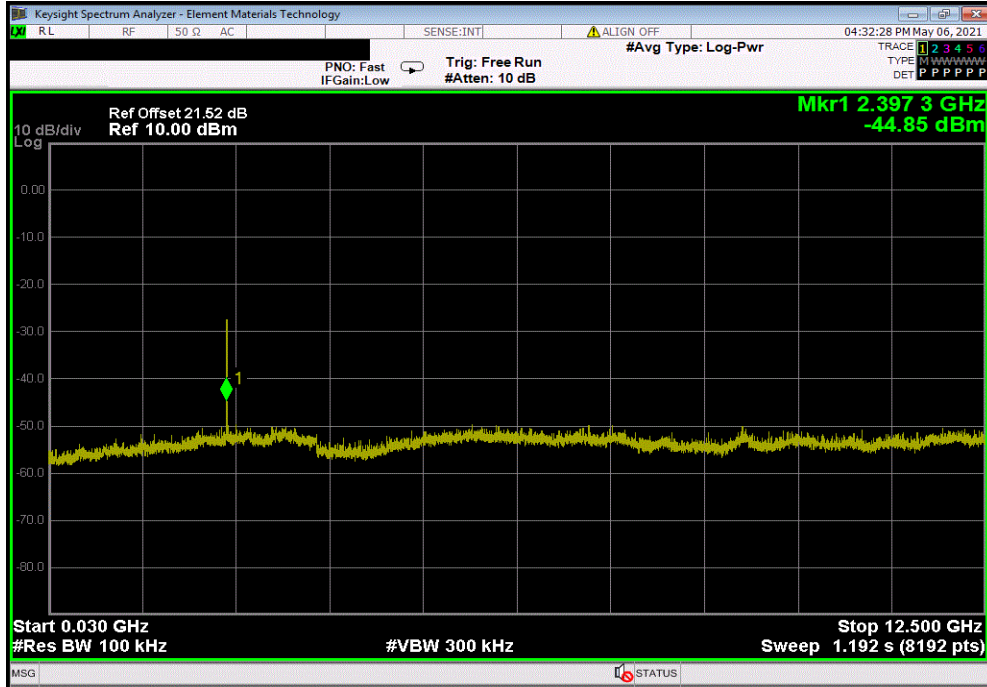

BLE/GFSK 2 Mbps Low Channel, 2402 MHz				
Frequency Range	Measured Freq (MHz)	Max Value (dBc)	Limit ≤ (dBc)	Result
12.5 GHz - 25 GHz	24571.18	-39.74	-20	Pass

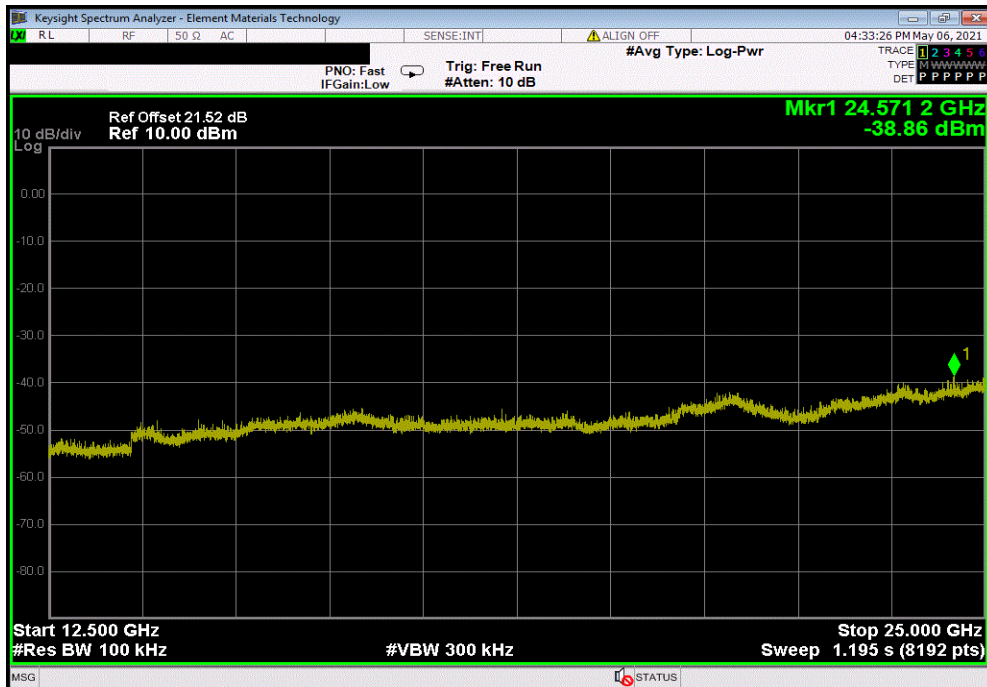


SPURIOUS CONDUCTED EMISSIONS




TbTx 2019.08.30.0 XMI 2020.12.30.0

BLE/GFSK 2 Mbps Mid Channel, 2442 MHz						
Frequency Range	Measured Freq (MHz)	Max Value (dBc)	Limit ≤ (dBc)	Result		
Fundamental	2441.97	N/A	N/A	N/A		

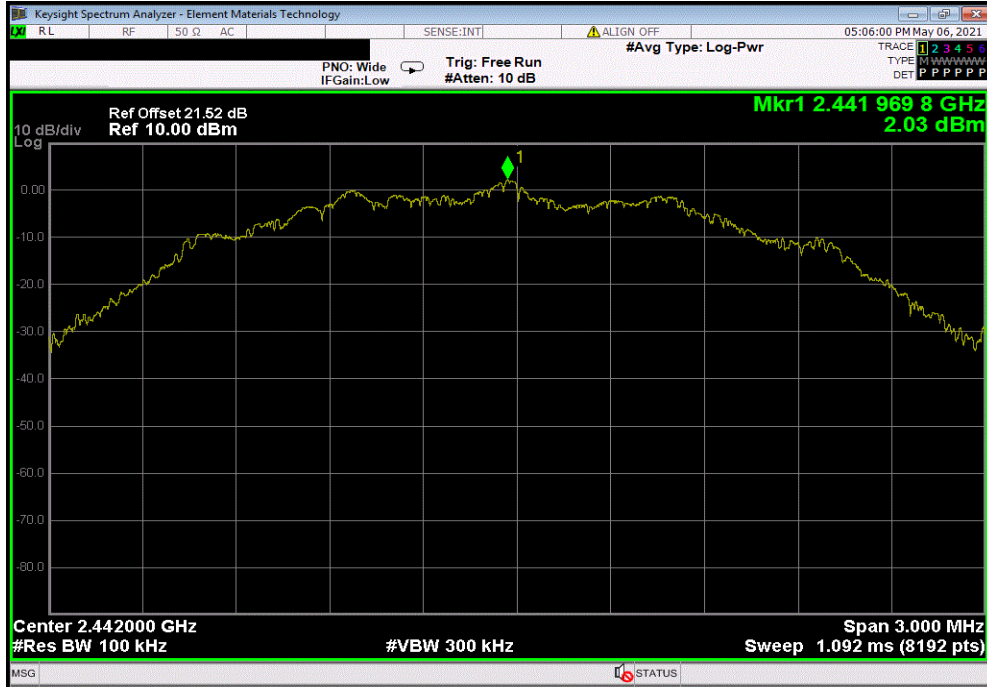

BLE/GFSK 2 Mbps Mid Channel, 2442 MHz						
Frequency Range	Measured Freq (MHz)	Max Value (dBc)	Limit ≤ (dBc)	Result		
30 MHz - 12.5 GHz	12069.16	-51.67	-20	Pass		

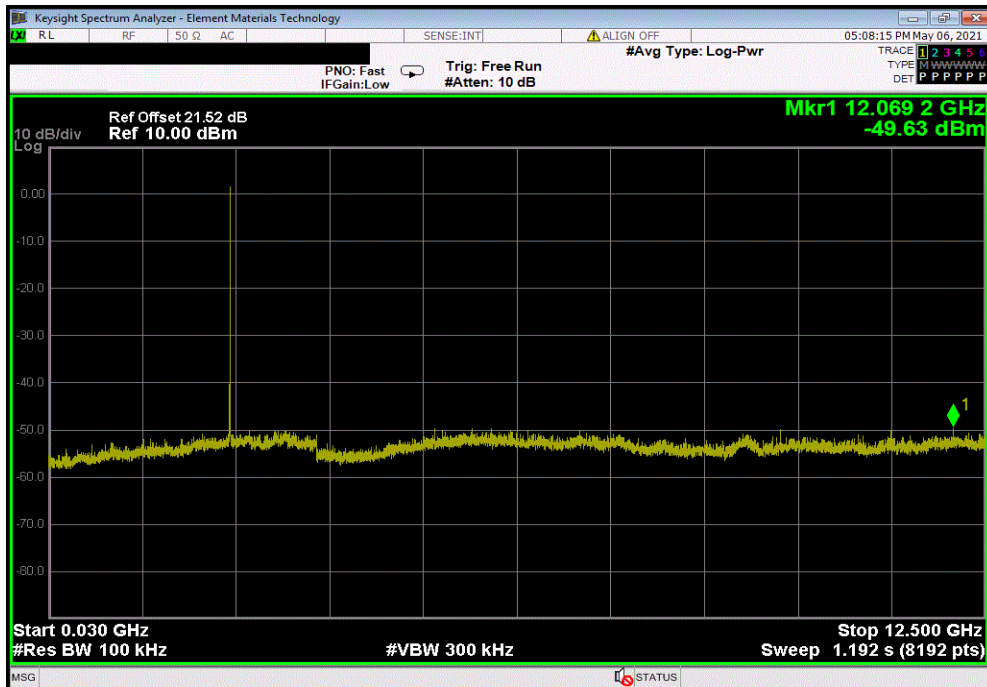


SPURIOUS CONDUCTED EMISSIONS




TbTx 2019.08.30.0 XMI 2020.12.30.0

BLE/GFSK 2 Mbps Mid Channel, 2442 MHz					
Frequency Range	Measured Freq (MHz)	Max Value (dBc)	Limit ≤ (dBc)	Result	
12.5 GHz - 25 GHz	24922.17	-40.81	-20	Pass	

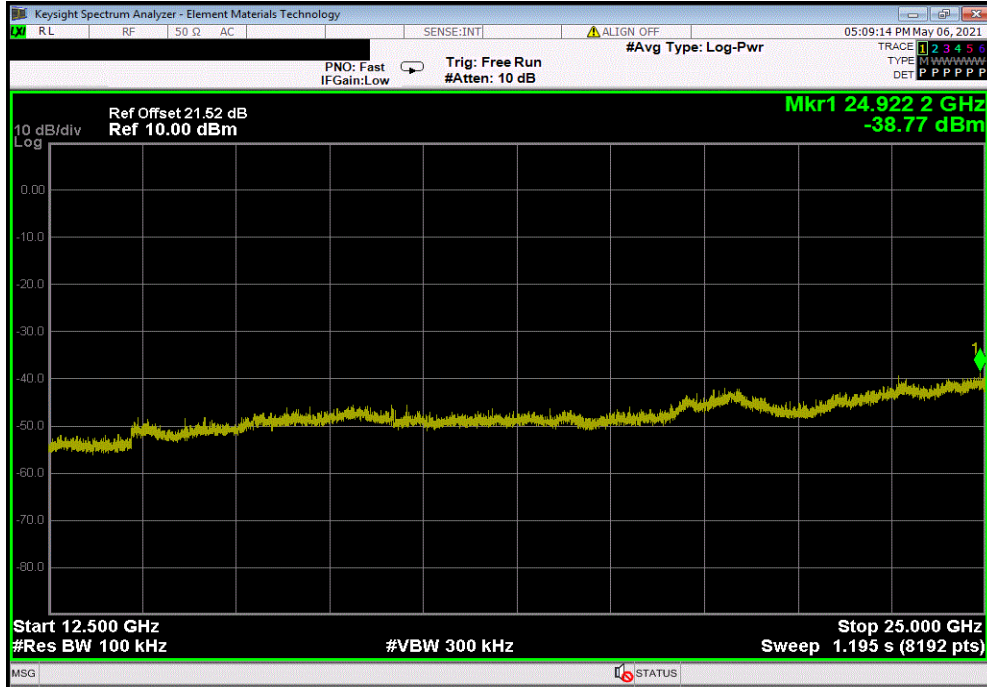

BLE/GFSK 2 Mbps High Channel, 2480 MHz					
Frequency Range	Measured Freq (MHz)	Max Value (dBc)	Limit ≤ (dBc)	Result	
Fundamental	2479.97	N/A	N/A	N/A	

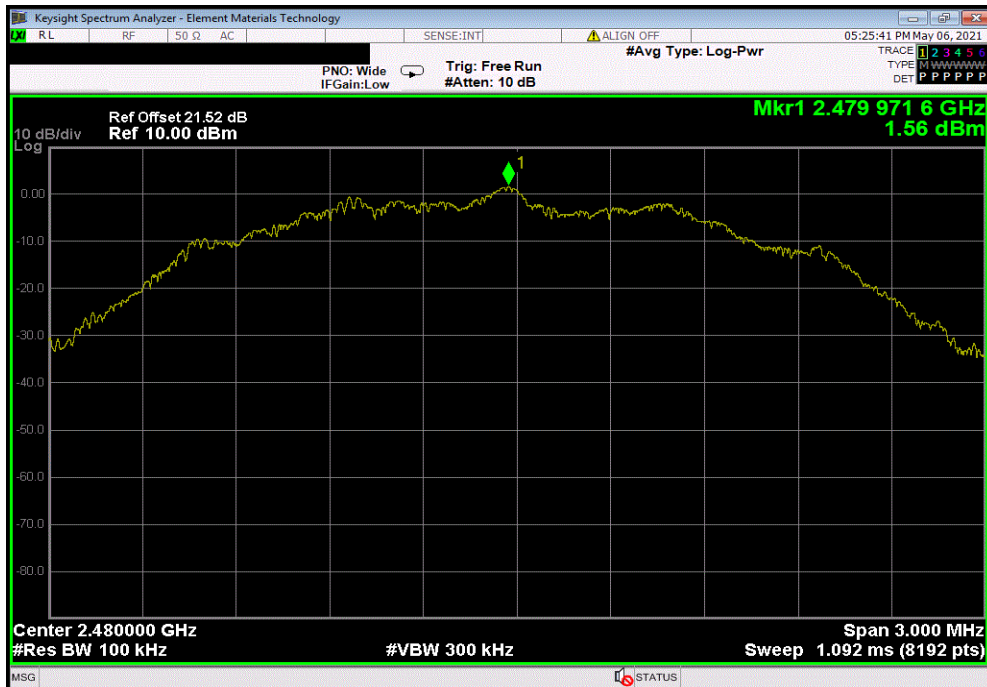


SPURIOUS CONDUCTED EMISSIONS



TbTx 2019.08.30.0 XMI 2020.12.30.0

BLE/GFSK 2 Mbps High Channel, 2480 MHz				
Frequency Range	Measured Freq (MHz)	Max Value (dBc)	Limit ≤ (dBc)	Result
30 MHz - 12.5 GHz	2487.16	-50.5	-20	Pass

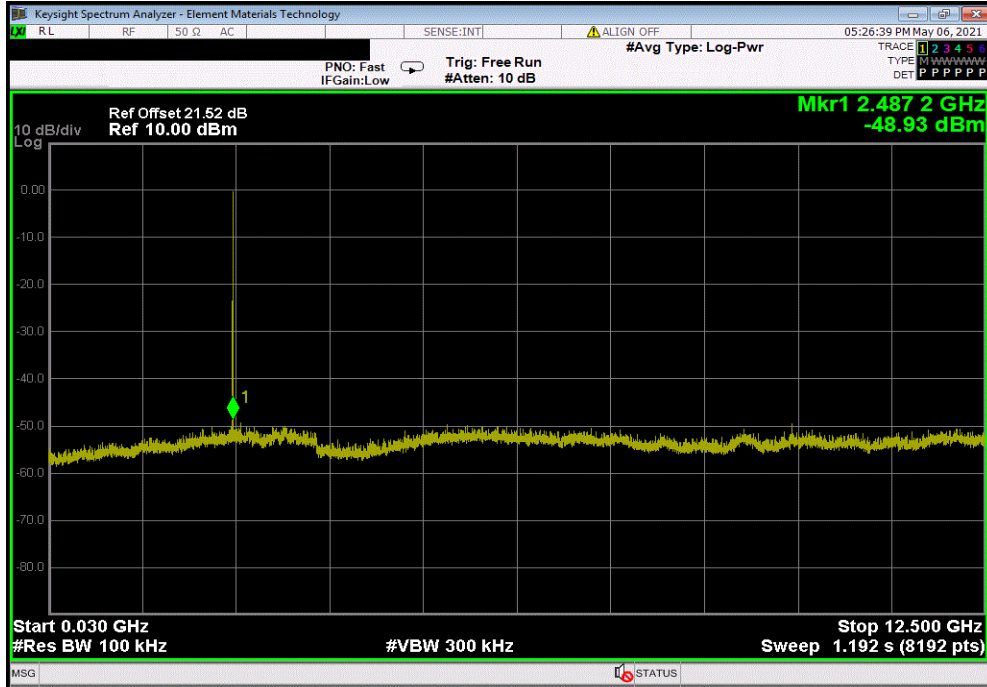

BLE/GFSK 2 Mbps High Channel, 2480 MHz				
Frequency Range	Measured Freq (MHz)	Max Value (dBc)	Limit ≤ (dBc)	Result
12.5 GHz - 25 GHz	24975.58	-40.82	-20	Pass



End of Test Report