



# element

**Starkey Laboratories, Inc.**

**Livio micro RIC 312**

**FCC 15.247:2019**

**Bluetooth Low Energy (DTS) Radio**

**Report # STAK0185**



NVLAP LAB CODE: 200881-0



*This report must not be used to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the U.S. Government. This Report shall not be reproduced, except in full without written approval of the laboratory.*



# CERTIFICATE OF TEST

Last Date of Test: October 3, 2019  
Starkey Laboratories, Inc.  
EUT: Livio micro RIC 312

## Radio Equipment Testing

### Standards

Specification	Method
FCC 15.247:2019	ANSI C63.10:2013, KDB 558074

### Results

Method Clause	Test Description	Applied	Results	Comments
6.2	Powerline Conducted Emissions	No	N/A	Not required for a battery powered EUT.
11.12.1, 11.13.2, 6.5, 6.6	Spurious Radiated Emissions	Yes	Pass	
11.6	Duty Cycle	Yes	Pass	
11.8.2	Occupied Bandwidth	Yes	Pass	
11.9.1.1	Output Power	Yes	Pass	
11.9.1.1	Equivalent Isotropic Radiated Power	Yes	Pass	
11.10.2	Power Spectral Density	Yes	Pass	
11.11	Band Edge Compliance	Yes	Pass	
11.11	Spurious Conducted Emissions	Yes	Pass	

### Deviations From Test Standards

None

### Approved By:

Matt Nuernberg, Operations Manager

*Product compliance is the responsibility of the client; therefore, the tests and equipment modes of operation represented in this report were agreed upon by the client, prior to testing. The results of this test pertain only to the sample(s) tested. The specific description is noted in each of the individual sections of the test report supporting this certificate of test. This report reflects only those tests from the referenced standards shown in the certificate of test. It does not include inspection or verification of labels, identification, marking or user information. As indicated in the Statement of Work sent with the quotation, Element's standard process is to always use the latest published version of the test methods even when earlier versions are cited in the test specification. Issuance of a purchase order was de facto acceptance of this approach. Otherwise, the client would have advised Element in writing of the specific version of the test methods they wanted applied to the subject testing.*

# REVISION HISTORY



Revision Number	Description	Date (yyyy-mm-dd)	Page Number
00	None		

# ACCREDITATIONS AND AUTHORIZATIONS



---

## United States

**FCC** - Designated by the FCC as a Telecommunications Certification Body (TCB). Certification chambers, Open Area Test Sites, and conducted measurement facilities are listed with the FCC.

**A2LA** - Accredited by A2LA to ISO / IEC 17065 as a product certifier. This allows Element to certify transmitters to FCC and IC specifications.

**NVLAP** - Each laboratory is accredited by NVLAP to ISO 17025

---

## Canada

**ISED** - Recognized by Innovation, Science and Economic Development Canada as a Certification Body (CB) and as a CAB for the acceptance of test data.

---

## European Union

**European Commission** – Within Element, we have a EU Notified Body validated for the EMCD and RED Directives.

---

## Australia/New Zealand

**ACMA** - Recognized by ACMA as a CAB for the acceptance of test data.

---

## Korea

**MSIT / RRA** - Recognized by KCC's RRA as a CAB for the acceptance of test data.

---

## Japan

**VCCI** - Associate Member of the VCCI. Conducted and radiated measurement facilities are registered.

---

## Taiwan

**BSMI** – Recognized by BSMI as a CAB for the acceptance of test data.

**NCC** - Recognized by NCC as a CAB for the acceptance of test data.

---

## Singapore

**IDA** – Recognized by IDA as a CAB for the acceptance of test data.

---

## Israel

**MOC** – Recognized by MOC as a CAB for the acceptance of test data.

---

## Hong Kong

**OFCA** – Recognized by OFCA as a CAB for the acceptance of test data.

---

## Vietnam

**MIC** – Recognized by MIC as a CAB for the acceptance of test data.

---

## SCOPE


For details on the Scopes of our Accreditations, please visit:

<https://www.nwemc.com/emc-testing-accreditations>

# FACILITIES



<b>California</b> Labs OC01-17 41 Tesla Irvine, CA 92618 (949) 861-8918	<b>Minnesota</b> Labs MN01-10 9349 W Broadway Ave. Brooklyn Park, MN 55445 (612)-638-5136	<b>Oregon</b> Labs EV01-12 6775 NE Evergreen Pkwy #400 Hillsboro, OR 97124 (503) 844-4066	<b>Texas</b> Labs TX01-09 3801 E Plano Pkwy Plano, TX 75074 (469) 304-5255	<b>Washington</b> Labs NC01-05 19201 120 <sup>th</sup> Ave NE Bothell, WA 98011 (425)984-6600
<b>NVLAP</b>				
NVLAP Lab Code: 200676-0	NVLAP Lab Code: 200881-0	NVLAP Lab Code: 200630-0	NVLAP Lab Code:201049-0	NVLAP Lab Code: 200629-0
<b>Innovation, Science and Economic Development Canada</b>				
2834B-1, 2834B-3	2834E-1, 2834E-3	2834D-1	2834G-1	2834F-1
<b>BSMI</b>				
SL2-IN-E-1154R	SL2-IN-E-1152R	SL2-IN-E-1017	SL2-IN-E-1158R	SL2-IN-E-1153R
<b>VCCI</b>				
A-0029	A-0109	A-0108	A-0201	A-0110
<b>Recognized Phase I CAB for ISED, ACMA, BSMI, IDA, KCC/RRA, MIC, MOC, NCC, OFCA</b>				
US0158	US0175	US0017	US0191	US0157

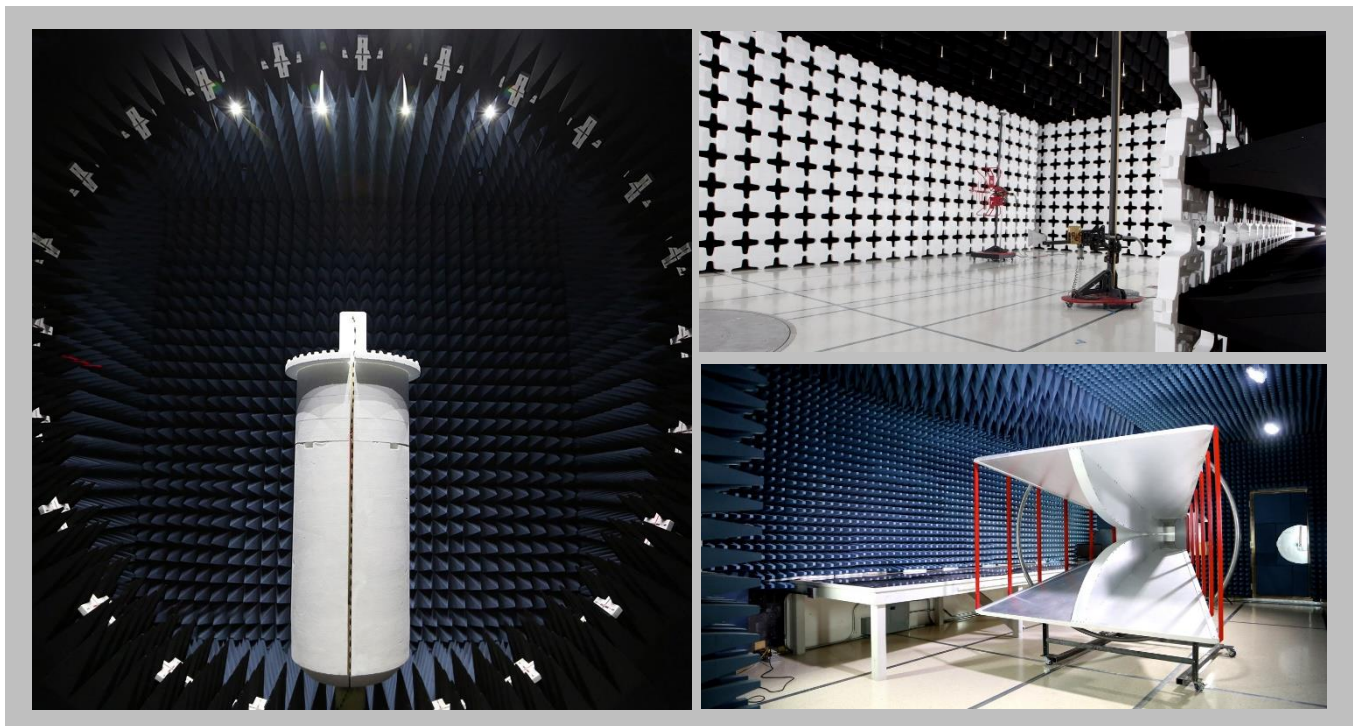

# MEASUREMENT UNCERTAINTY



## Measurement Uncertainty

When a measurement is made, the result will be different from the true or theoretically correct value. The difference is the result of tolerances in the measurement system that cannot be completely eliminated. To the extent that technology allows us, it has been our aim to minimize this error. Measurement uncertainty is a statistical expression of measurement error qualified by a probability distribution.


A measurement uncertainty estimation has been performed for each test per our internal quality document QM205.4.6. The estimation is used to compare the measured result with its "true" or theoretically correct value. The expanded measurement uncertainty (K=2) can be found included as part of the applicable test description page. Our measurement data meets or exceeds the measurement uncertainty requirements of the applicable specification; therefore, the test data can be compared directly to the specification limit to determine compliance. The calculations for estimating measurement uncertainty are based upon ETSI TR 100 028 (or CISPR 16-4-2 as applicable), and are available upon request.

The following table represents the Measurement Uncertainty (MU) budgets for each of the tests that may be contained in this report.


<b>Test</b>	<b>+ MU</b>	<b>- MU</b>
Frequency Accuracy	0.0007%	-0.0007%
Amplitude Accuracy (dB)	1.2 dB	-1.2 dB
Conducted Power (dB)	1.2 dB	-1.2 dB
Radiated Power via Substitution (dB)	0.7 dB	-0.7 dB
Temperature (degrees C)	0.7°C	-0.7°C
Humidity (% RH)	2.5% RH	-2.5% RH
Voltage (AC)	1.0%	-1.0%
Voltage (DC)	0.7%	-0.7%
Field Strength (dB)	5.2 dB	-5.2 dB
AC Powerline Conducted Emissions (dB)	2.4 dB	-2.4 dB

# Test Setup Block Diagrams


## Antenna Port Conducted Measurements

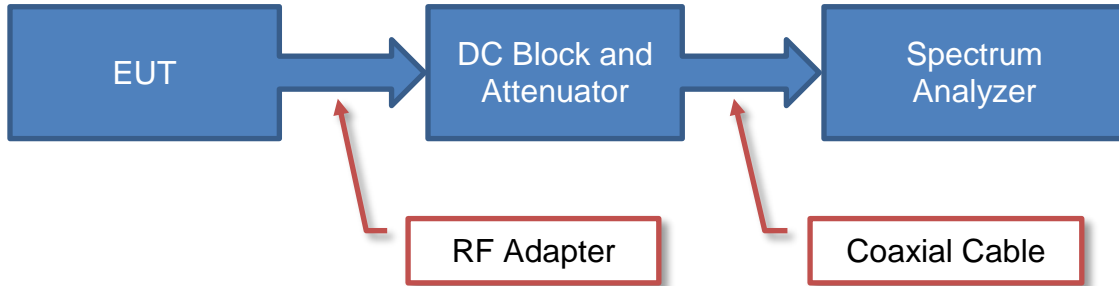

## Near Field Test Fixture Measurements

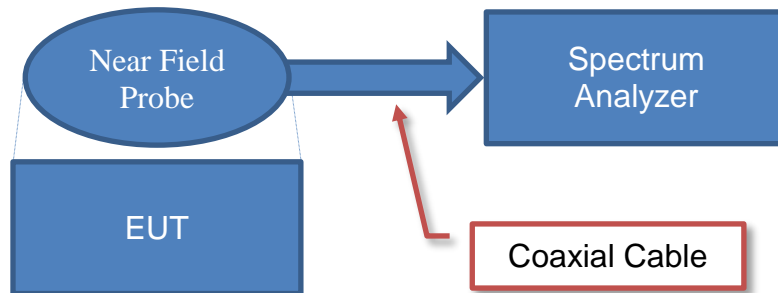

## Spurious Radiated Emissions

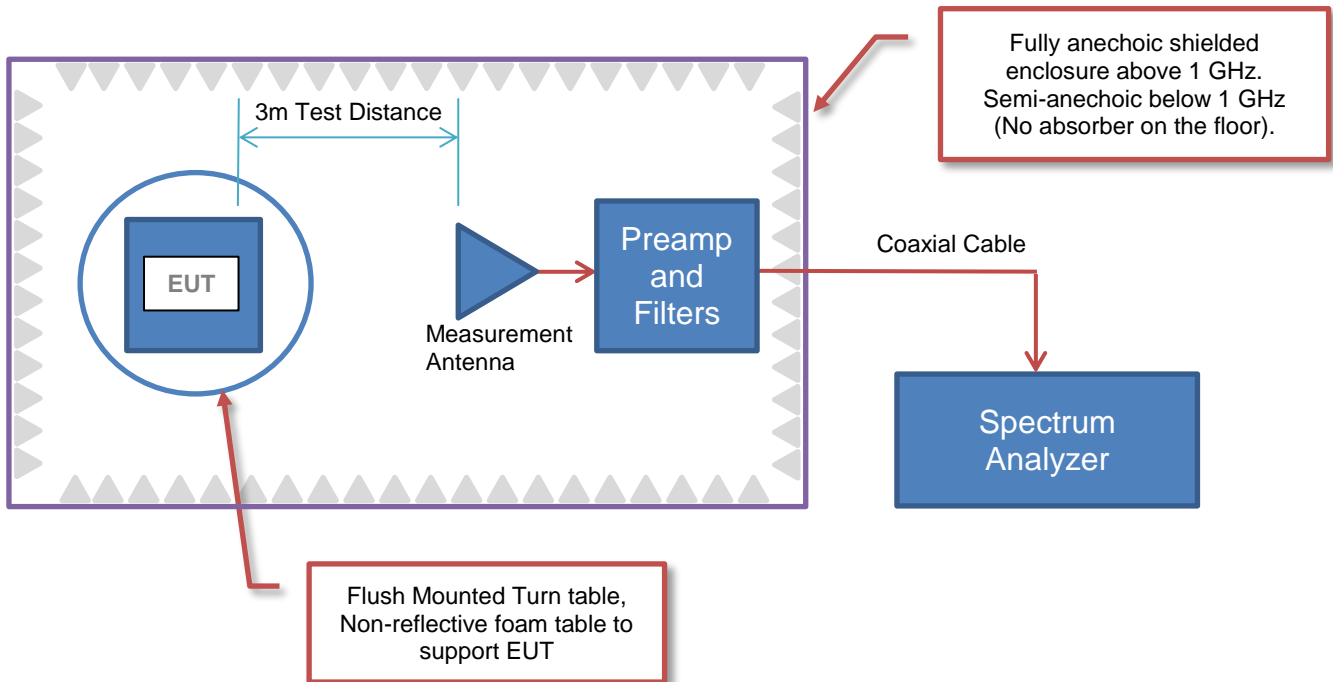



# PRODUCT DESCRIPTION



## Client and Equipment Under Test (EUT) Information

<b>Company Name:</b>	Starkey Laboratories, Inc.
<b>Address:</b>	6600 Washington Ave S
<b>City, State, Zip:</b>	Eden Prairie, MN 55344-3404
<b>Test Requested By:</b>	Bill Mitchell
<b>EUT:</b>	Livio micro RIC 312
<b>First Date of Test:</b>	October 2, 2019
<b>Last Date of Test:</b>	October 3, 2019
<b>Receipt Date of Samples:</b>	October 2, 2019
<b>Equipment Design Stage:</b>	Production
<b>Equipment Condition:</b>	No Damage
<b>Purchase Authorization:</b>	Verified

## Information Provided by the Party Requesting the Test

<b>Functional Description of the EUT:</b>
Hearing aid with 2.4 GHz radio
<b>Testing Objective:</b>
To demonstrate compliance of the Bluetooth Low Energy (DTS) radio to FCC 15.247 requirements.



# CONFIGURATIONS



## Configuration STAK0185- 1

Software/Firmware Running during test	
Description	Version
Firmware	7.1.2.2.25

EUT			
Description	Manufacturer	Model/Part Number	Serial Number
Hearing Aid	Starkey Laboratories, Inc.	Livio Micro RIC 312	192041412

## Configuration STAK0185- 3

Software/Firmware Running during test	
Description	Version
Firmware	7.1.2.2.25

EUT			
Description	Manufacturer	Model/Part Number	Serial Number
Hearing Aid	Starkey Laboratories, Inc.	Livio Micro RIC 312	192041403

# MODIFICATIONS



## Equipment Modifications

Item	Date	Test	Modification	Note	Disposition of EUT
1	2019-10-02	Spurious Radiated Emissions	Tested as delivered to Test Station.	No EMI suppression devices were added or modified during this test.	EUT remained at Element following the test.
2	2019-10-03	Duty Cycle	Tested as delivered to Test Station.	No EMI suppression devices were added or modified during this test.	EUT remained at Element following the test.
3	2019-10-03	Occupied Bandwidth	Tested as delivered to Test Station.	No EMI suppression devices were added or modified during this test.	EUT remained at Element following the test.
4	2019-10-03	Output Power	Tested as delivered to Test Station.	No EMI suppression devices were added or modified during this test.	EUT remained at Element following the test.
5	2019-10-03	Equivalent Isotropic Radiated Power	Tested as delivered to Test Station.	No EMI suppression devices were added or modified during this test.	EUT remained at Element following the test.
6	2019-10-03	Power Spectral Density	Tested as delivered to Test Station.	No EMI suppression devices were added or modified during this test.	EUT remained at Element following the test.
7	2019-10-03	Band Edge Compliance	Tested as delivered to Test Station.	No EMI suppression devices were added or modified during this test.	EUT remained at Element following the test.
8	2019-10-03	Spurious Conducted Emissions	Tested as delivered to Test Station.	No EMI suppression devices were added or modified during this test.	Scheduled testing was completed.

# SPURIOUS RADIATED EMISSIONS



PSA-ESCI 2019.05.10

Testing was performed using the mode(s) of operation and configuration(s) noted within the report. The individuals and/or the organization requesting the test provided the modes, configurations and settings used to complete the evaluation. The actual test parameters are specified in the test data, this includes items such as investigated frequency range (scanned) and test levels. The testing methods and performance specifications, as well as the test site used for the evaluation are indicated in the test data. The test data represents the configuration / operating mode/ model that produced the highest emission levels as compared to the specification limit.

## MODES OF OPERATION

Tx on Low channel (2402 MHz), Mid channel (2442 MHz), and High channel (2480 MHz); 2 Mbps BLE

## POWER SETTINGS INVESTIGATED

Battery

## CONFIGURATIONS INVESTIGATED

STAK0185 - 1

## FREQUENCY RANGE INVESTIGATED

Start Frequency | 1 GHz | Stop Frequency | 18 GHz

## SAMPLE CALCULATIONS

Radiated Emissions: Field Strength = Measured Level + Antenna Factor + Cable Factor - Amplifier Gain + Distance Adjustment Factor + External Attenuation

## TEST EQUIPMENT

Description	Manufacturer	Model	ID	Last Cal.	Interval
Antenna - Double Ridge	ETS-Lindgren	3115	AJQ	16-Jan-2019	24 mo
Cable	ESM Cable Corp.	Double Ridge Guide Horn Cables	MNI	17-Sep-2019	12 mo
Amplifier - Pre-Amplifier	Miteq	AMF-3D-00100800-32-13P	AVT	8-Feb-2019	12 mo
Antenna - Standard Gain	ETS Lindgren	3160-07	AXP	NCR	0 mo
Cable	ESM Cable Corp.	Standard Gain Horn Cables	MNJ	8-Mar-2019	12 mo
Amplifier - Pre-Amplifier	Miteq	AMF-6F-08001200-30-10P	AVV	8-Feb-2019	12 mo
Antenna - Standard Gain	ETS Lindgren	3160-08	AIQ	NCR	0 mo
Amplifier - Pre-Amplifier	Miteq	AMF-6F-12001800-30-10P	AVW	8-Feb-2019	12 mo
Analyzer - Spectrum Analyzer	Agilent	E4440A	AFD	28-Jul-2019	12 mo
Attenuator	Fairview Microwave	SA18E-20	TWZ	17-Sep-2019	12 mo
Attenuator	Fairview Microwave	SA18E-10	TYA	17-Sep-2019	12 mo
Filter - High Pass	Micro-Tronics	HPM50111	LFN	12-Sep-2019	12 mo

## TEST DESCRIPTION

The highest gain antenna of each type to be used with the EUT was tested. The EUT was configured for the required transmit frequencies and the modes as showed in the data sheets.

For each configuration, the spectrum was scanned throughout the specified range as part of the exploratory investigation of the emissions. These "pre-scans" are not included in the report. Final measurements on individual emissions were then made and included in this test report.

The individual emissions from the EUT were maximized by rotating the EUT on a turntable, adjusting the position of the EUT and EUT antenna in three orthogonal axis if required, and adjusting the measurement antenna height and polarization (per ANSIC63.10). A preamp and high pass filter (and notch filter) were used for this test in order to provide sufficient measurement sensitivity.

Measurements were made with the required detectors and annotated on the data for each individual point using the following annotation:

QP = Quasi-Peak Detector

PK = Peak Detector

AV = RMS Detector

Measurements were made to satisfy the specific requirements of the test specification for out of band emissions as well as the restricted band requirements.

If there are no detectable emissions above the noise floor, the data included may show noise floor measurements for reference only.

Measurements at the edges of the allowable band may be presented in an alternative method as provided for in the ANSI C63.10 Marker-Delta method. This method involves performing an in-band fundamental measurement followed by a screen capture of the fundamental and out-of-band emission using reduced measurement instrumentation bandwidths. The amplitude delta measured on this screen capture is applied to the fundamental emission value to show the out-of-band emission level as applied to the limit.

Where the radio test software does not provide for a duty cycle at continuous transmit conditions (> 98%) and the RMS (power average) measurements were made across the on and off times of the EUT transmissions, a duty cycle correction is added to the measurements using the formula of  $10 \cdot \text{LOG}(1/\text{dc})$ .

# SPURIOUS RADIATED EMISSIONS




EmiRS 2017.09.18.1 PSA-ESCI 2019.05.10

<b>Work Order:</b>	STAK0185	<b>Date:</b>	2-Oct-2019	
<b>Project:</b>	None	<b>Temperature:</b>	21.1 °C	
<b>Job Site:</b>	MN05	<b>Humidity:</b>	48.8% RH	
<b>Serial Number:</b>	192041412	<b>Barometric Pres.:</b>	1020 mbar	
<b>Tested by:</b> Andrew Rogstad				
<b>EUT:</b>	Livio micro RIC 312			
<b>Configuration:</b>	1			
<b>Customer:</b>	Starkey Laboratories, Inc.			
<b>Attendees:</b>	John Quach, Charlie Esch			
<b>EUT Power:</b>	Battery			
<b>Operating Mode:</b>	Tx on Low channel (2402 MHz), Mid channel (2442 MHz), and High channel (2480 MHz); 2 Mbps BLE			
<b>Deviations:</b>	None			
<b>Comments:</b>	A duty cycle of 31.4% was measured, so a Duty Cycle Correction Factor of 5.0 dB was added to the average measurements (DCCF = 10*Log(1/DC)). Testing at frequencies below 1 GHz and above 18 GHz is documented in STAK0145. See data comments for EUT orientation, Tx channel, and modulation			

<b>Test Specifications</b>	<b>Test Method</b>
FCC 15.247:2019	ANSI C63.10:2013

<b>Run #</b>	24	<b>Test Distance (m)</b>	3	<b>Antenna Height(s)</b>	1 to 4(m)	<b>Results</b>	Pass
--------------	----	--------------------------	---	--------------------------	-----------	----------------	------

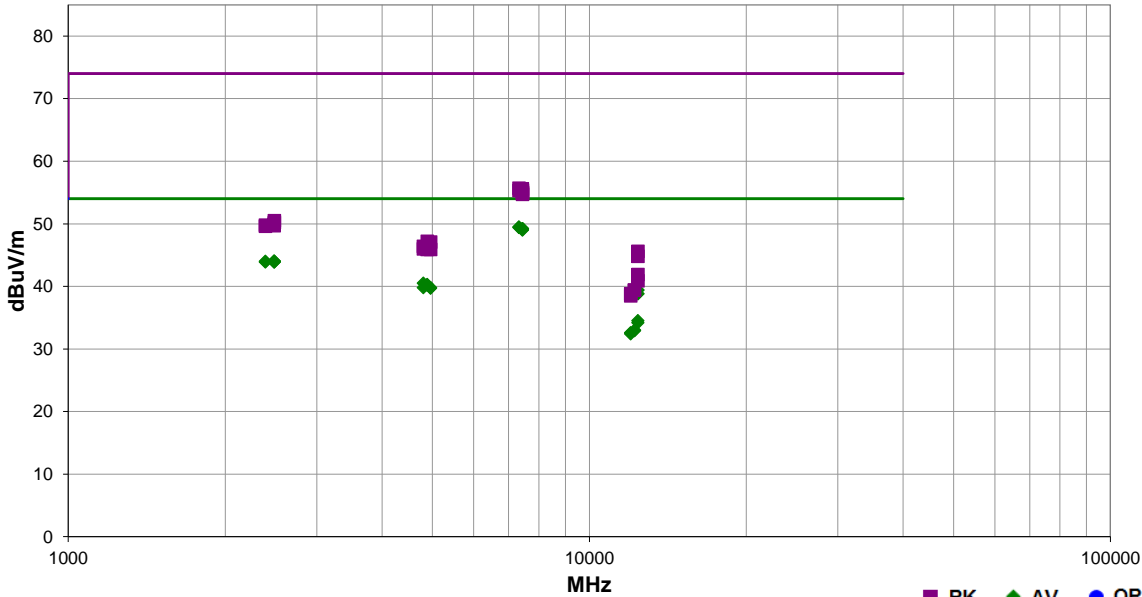

Freq (MHz)	Amplitude (dBuV)	Factor (dB)	Antenna Height (meters)	Azimuth (degrees)	Duty Cycle Correction Factor (dB)	External Attenuation (dB)	Polarity/Transducer Type	Detector	Distance Adjustment (dB)	Adjusted (dBuV/m)	Spec. Limit (dBuV/m)	Compared to Spec. (dB)	Comments
7325.993	31.0	13.5	2.8	62.0	5.0	0.0	Vert	AV	0.0	49.5	54.0	-4.5	EUT vert, Mid ch., 2 Mbps
7326.510	30.9	13.5	1.0	105.0	5.0	0.0	Horz	AV	0.0	49.4	54.0	-4.6	EUT vert, Mid ch., 2 Mbps
7440.913	31.0	13.2	1.0	47.0	5.0	0.0	Horz	AV	0.0	49.2	54.0	-4.8	EUT vert, High ch., 2 Mbps
7440.980	31.0	13.2	1.0	348.9	5.0	0.0	Vert	AV	0.0	49.2	54.0	-4.8	EUT vert, High ch., 2 Mbps
7440.383	31.0	13.2	1.0	94.0	5.0	0.0	Horz	AV	0.0	49.2	54.0	-4.8	EUT horz, High ch., 2 Mbps
7440.440	31.0	13.2	1.0	229.9	5.0	0.0	Horz	AV	0.0	49.2	54.0	-4.8	EUT on side, High ch., 2 Mbps
7440.977	30.9	13.2	1.0	336.9	5.0	0.0	Vert	AV	0.0	49.1	54.0	-4.9	EUT horz, High ch., 2 Mbps
7440.927	30.8	13.2	1.8	297.0	5.0	0.0	Vert	AV	0.0	49.0	54.0	-5.0	EUT on side, High ch., 2 Mbps
2485.263	32.7	-3.7	1.0	163.9	5.0	10.0	Horz	AV	0.0	44.0	54.0	-10.0	EUT on side, High ch., 2 Mbps
2483.553	32.8	-3.8	1.0	311.9	5.0	10.0	Horz	AV	0.0	44.0	54.0	-10.0	EUT horz, High ch., 2 Mbps
2483.683	32.8	-3.8	1.0	149.9	5.0	10.0	Horz	AV	0.0	44.0	54.0	-10.0	EUT horz, High ch., 2 Mbps
2483.577	32.8	-3.8	1.0	231.0	5.0	10.0	Vert	AV	0.0	44.0	54.0	-10.0	EUT on side, High ch., 2 Mbps
2389.473	32.6	-3.6	3.7	84.0	5.0	10.0	Vert	AV	0.0	44.0	54.0	-10.0	EUT on side, High ch., 2 Mbps
2483.933	32.7	-3.8	1.0	339.0	5.0	10.0	Vert	AV	0.0	43.9	54.0	-10.1	EUT vert, High ch., 2 Mbps
2484.890	32.7	-3.8	1.0	274.0	5.0	10.0	Vert	AV	0.0	43.9	54.0	-10.1	EUT horz, High ch., 2 Mbps
2389.990	32.5	-3.6	3.1	185.9	5.0	10.0	Horz	AV	0.0	43.9	54.0	-10.1	EUT vert, Low ch., 2 Mbps
4803.167	30.9	4.6	1.0	186.9	5.0	0.0	Vert	AV	0.0	40.5	54.0	-13.5	EUT vert, Low ch., 2 Mbps
4884.930	30.6	4.7	1.0	92.9	5.0	0.0	Vert	AV	0.0	40.3	54.0	-13.7	EUT vert, Mid ch., 2 Mbps
4883.193	30.5	4.7	1.0	160.9	5.0	0.0	Horz	AV	0.0	40.2	54.0	-13.8	EUT vert, Mid ch., 2 Mbps
4960.583	30.0	4.8	1.4	149.9	5.0	0.0	Vert	AV	0.0	39.8	54.0	-14.2	EUT horz, High ch., 2 Mbps
4803.407	30.2	4.6	1.0	214.0	5.0	0.0	Horz	AV	0.0	39.8	54.0	-14.2	EUT vert, Low ch., 2 Mbps
4959.717	29.9	4.8	1.0	329.0	5.0	0.0	Horz	AV	0.0	39.7	54.0	-14.3	EUT vert, High ch., 2 Mbps

Freq (MHz)	Amplitude (dBuV)	Factor (dB)	Antenna Height (meters)	Azimuth (degrees)	Duty Cycle Correction Factor (dB)	External Attenuation (dB)	Polarity/ Transducer Type	Detector	Distance Adjustment (dB)	Adjusted (dBuV/m)	Spec. Limit (dBuV/m)	Compared to Spec. (dB)	Comments
12402.500	29.0	5.4	1.0	337.9	5.0	0.0	Vert	AV	0.0	39.4	54.0	-14.6	EUT vert, High ch., 2 Mbps
12402.490	28.4	5.4	1.0	257.0	5.0	0.0	Horz	AV	0.0	38.8	54.0	-15.2	EUT vert, High ch., 2 Mbps
7326.050	42.2	13.5	1.0	105.0	0.0	0.0	Horz	PK	0.0	55.7	74.0	-18.3	EUT vert, Mid ch., 2 Mbps
7439.387	42.4	13.2	1.0	47.0	0.0	0.0	Horz	PK	0.0	55.6	74.0	-18.4	EUT vert, High ch., 2 Mbps
7439.047	42.2	13.2	1.0	94.0	0.0	0.0	Horz	PK	0.0	55.4	74.0	-18.6	EUT horz, High ch., 2 Mbps
7439.503	42.1	13.2	1.0	229.9	0.0	0.0	Horz	PK	0.0	55.3	74.0	-18.7	EUT on side, High ch., 2 Mbps
7326.103	41.8	13.5	2.8	62.0	0.0	0.0	Vert	PK	0.0	55.3	74.0	-18.7	EUT vert, Mid ch., 2 Mbps
7439.977	41.8	13.2	1.8	297.0	0.0	0.0	Vert	PK	0.0	55.0	74.0	-19.0	EUT on side, High ch., 2 Mbps
7439.270	41.7	13.2	1.0	336.9	0.0	0.0	Vert	PK	0.0	54.9	74.0	-19.1	EUT horz, High ch., 2 Mbps
7440.417	41.5	13.2	1.0	348.9	0.0	0.0	Vert	PK	0.0	54.7	74.0	-19.3	EUT vert, High ch., 2 Mbps
12397.500	30.1	-0.6	1.7	343.9	5.0	0.0	Vert	AV	0.0	34.5	54.0	-19.5	EUT vert, High ch., 2 Mbps
12397.530	29.8	-0.6	1.0	138.9	5.0	0.0	Horz	AV	0.0	34.2	54.0	-19.8	EUT vert, High ch., 2 Mbps
12211.000	29.7	-1.7	1.0	16.0	5.0	0.0	Vert	AV	0.0	33.0	54.0	-21.0	EUT vert, Mid ch., 2 Mbps
12210.740	29.6	-1.7	1.0	282.0	5.0	0.0	Horz	AV	0.0	32.9	54.0	-21.1	EUT vert, Mid ch., 2 Mbps
12009.060	29.8	-2.2	1.0	353.0	5.0	0.0	Vert	AV	0.0	32.6	54.0	-21.4	EUT vert, Low ch., 2 Mbps
12010.790	29.6	-2.2	1.0	141.0	5.0	0.0	Horz	AV	0.0	32.4	54.0	-21.6	EUT vert, Low ch., 2 Mbps
2485.420	44.2	-3.7	1.0	231.0	0.0	10.0	Vert	PK	0.0	50.5	74.0	-23.5	EUT on side, High ch., 2 Mbps
2485.440	43.9	-3.7	1.0	339.0	0.0	10.0	Vert	PK	0.0	50.2	74.0	-23.8	EUT vert, High ch., 2 Mbps
2484.747	43.7	-3.8	1.0	274.0	0.0	10.0	Vert	PK	0.0	49.9	74.0	-24.1	EUT horz, High ch., 2 Mbps
2483.890	43.7	-3.8	1.0	163.9	0.0	10.0	Horz	PK	0.0	49.9	74.0	-24.1	EUT on side, High ch., 2 Mbps
2484.150	43.6	-3.8	1.0	311.9	0.0	10.0	Horz	PK	0.0	49.8	74.0	-24.2	EUT vert, High ch., 2 Mbps
2389.100	43.4	-3.6	3.7	84.0	0.0	10.0	Vert	PK	0.0	49.8	74.0	-24.2	EUT on side, Low ch., 2 Mbps
2484.643	43.5	-3.8	1.0	149.9	0.0	10.0	Horz	PK	0.0	49.7	74.0	-24.3	EUT horz, High ch., 2 Mbps
2389.037	43.2	-3.6	3.1	185.9	0.0	10.0	Horz	PK	0.0	49.6	74.0	-24.4	EUT vert, Low ch., 2 Mbps
4884.683	42.5	4.7	1.0	160.9	0.0	0.0	Horz	PK	0.0	47.2	74.0	-26.8	EUT vert, Mid ch., 2 Mbps
4959.220	42.3	4.8	1.4	149.9	0.0	0.0	Vert	PK	0.0	47.1	74.0	-26.9	EUT vert, High ch., 2 Mbps
4803.413	41.8	4.6	1.0	186.9	0.0	0.0	Vert	PK	0.0	46.4	74.0	-27.6	EUT vert, Low ch., 2 Mbps
4804.143	41.4	4.6	1.0	214.0	0.0	0.0	Horz	PK	0.0	46.0	74.0	-28.0	EUT vert, Low ch., 2 Mbps
4884.003	41.2	4.7	1.0	92.9	0.0	0.0	Vert	PK	0.0	45.9	74.0	-28.1	EUT vert, Mid ch., 2 Mbps
4960.983	41.0	4.9	1.0	329.0	0.0	0.0	Horz	PK	0.0	45.9	74.0	-28.1	EUT vert, High ch., 2 Mbps
12401.920	40.2	5.4	1.0	337.9	0.0	0.0	Vert	PK	0.0	45.6	74.0	-28.4	EUT vert, High ch., 2 Mbps
12401.810	39.4	5.4	1.0	257.0	0.0	0.0	Horz	PK	0.0	44.8	74.0	-29.2	EUT vert, High ch., 2 Mbps
12397.500	42.5	-0.6	1.7	343.9	0.0	0.0	Vert	PK	0.0	41.9	74.0	-32.1	EUT vert, High ch., 2 Mbps
12399.900	41.5	-0.6	1.0	138.9	0.0	0.0	Horz	PK	0.0	40.9	74.0	-33.1	EUT vert, High ch., 2 Mbps
12209.130	41.1	-1.7	1.0	282.0	0.0	0.0	Horz	PK	0.0	39.4	74.0	-34.6	EUT vert, Mid ch., 2 Mbps
12210.200	41.1	-1.7	1.0	16.0	0.0	0.0	Vert	PK	0.0	39.4	74.0	-34.6	EUT vert, Mid ch., 2 Mbps
12009.840	41.0	-2.2	1.0	353.0	0.0	0.0	Vert	PK	0.0	38.8	74.0	-35.2	EUT vert, Low ch., 2 Mbps
12010.100	40.7	-2.2	1.0	141.0	0.0	0.0	Horz	PK	0.0	38.5	74.0	-35.5	EUT vert, Low ch., 2 Mbps

# DUTY CYCLE



XMI 2019.09.05

Testing was performed using the mode(s) of operation and configuration(s) noted within the report. The individuals and/or the organization requesting the test provided the modes, configurations and settings used to complete the evaluation. The actual test parameters are specified in the test data, this includes items such as investigated frequency range (scanned) and test levels. The testing methods and performance specifications, as well as the test site used for the evaluation are indicated in the test data.

## TEST EQUIPMENT

Description	Manufacturer	Model	ID	Last Cal.	Cal. Due
Generator - Signal	Agilent	N5173B	TIW	5-Jul-17	5-Jul-20
Cable	ESM Cable Corp.	TTBJ141-KMKM-72	MNU	11-Apr-19	11-Apr-20
Analyzer - Spectrum Analyzer	Keysight	N9010A	AFN	1-May-19	1-May-20
Block - DC	Fairview Microwave	SD3379	AMI	6-Aug-19	6-Aug-20
Attenuator	S.M. Electronics	SA26B-20	RFW	13-Feb-19	13-Feb-20

## TEST DESCRIPTION

The measurement was made using a direct connection between the RF output of the EUT and a spectrum analyzer. The Duty Cycle (x) of the single channel operation of the radio as controlled by the provided test software was measured for each of the EUT operating modes.

There is no compliance requirement to be met by this test, so therefore no Pass / Fail criteria.

The measurements were made using a zero span on the spectrum analyzer to see the pulses in the time domain. The transmit power was set to its default maximum.

The duty cycle was calculated by dividing the transmission pulse duration (T) by the total period of a single on and total off time.

If the transmit duty cycle < 98 percent, burst gating may have been used during some of the other tests in this report to only take the measurement during the burst duration.



# DUTY CYCLE



TelTx 2019.08.30.0 XMI 2019.09.05

EUT: Livio micro RIC 312		Work Order: STAK0185
Serial Number: 192041403		Date: 3-Oct-19
Customer: Starkey Laboratories, Inc.		Temperature: 20.9 °C
Attendees: Charlie Esch		Humidity: 44.6% RH
Project: None		Barometric Pres.: 1026 mbar
Tested by: Andrew Rogstad	Power: 1.4 VDC	Job Site: MN08
<b>TEST SPECIFICATIONS</b>		
FCC 15.247:2019		Test Method: ANSI C63.10:2013
<b>COMMENTS</b>		
Reference level offset includes Measurement Cable, DC Block, and 20 dB Attenuator.		
<b>DEVIATIONS FROM TEST STANDARD</b>		
None		
Configuration #	3	Signature <i>Andrew Rogstad</i>


	Pulse Width	Period	Number of Pulses	Value (%)	Limit (%)	Results
BLE/GFSK (2 Mbps) Low Channel, 2402 MHz	197.9 us	625.2 us	1	31.7	N/A	N/A
BLE/GFSK (2 Mbps) Low Channel, 2402 MHz	N/A	N/A	5	N/A	N/A	N/A
BLE/GFSK (2 Mbps) Mid Channel, 2442 MHz	198.2 us	625.1 us	1	31.7	N/A	N/A
BLE/GFSK (2 Mbps) Mid Channel, 2442 MHz	N/A	N/A	5	N/A	N/A	N/A
BLE/GFSK (2 Mbps) High Channel, 2480 MHz	198.1 us	625 us	1	31.7	N/A	N/A
BLE/GFSK (2 Mbps) High Channel, 2480 MHz	N/A	N/A	5	N/A	N/A	N/A

# DUTY CYCLE




TbTx 2019.08.30.0 XMI 2019.09.05

BLE/GFSK (2 Mbps) Low Channel, 2402 MHz						
Pulse Width	Period	Number of Pulses	Value (%)	Limit (%)	Results	
197.9 us	625.2 us	1	31.7	N/A	N/A	

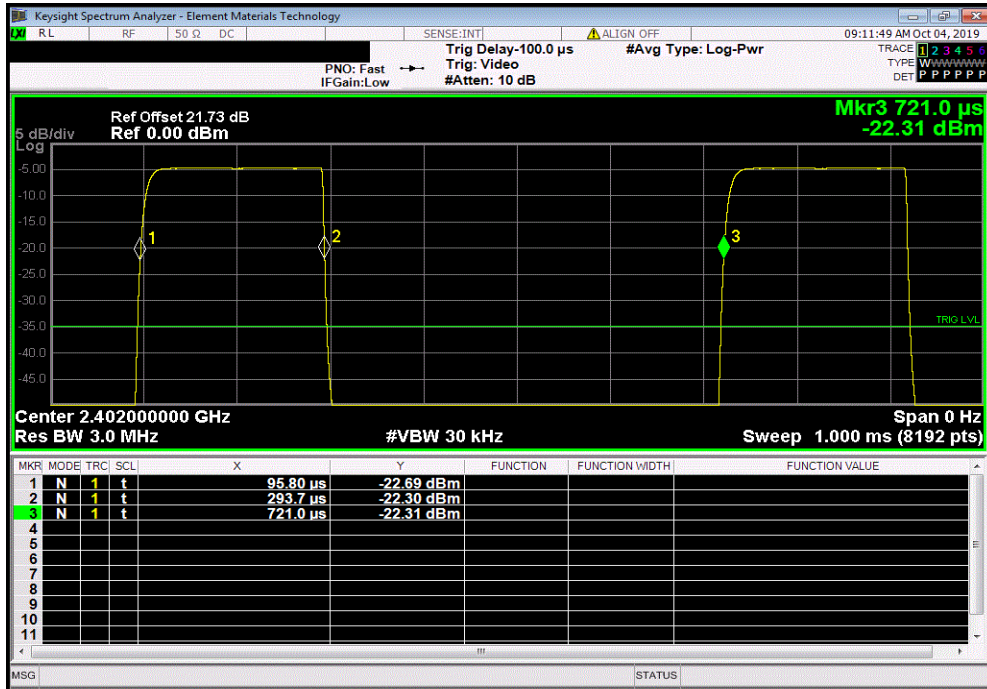

BLE/GFSK (2 Mbps) Low Channel, 2402 MHz						
Pulse Width	Period	Number of Pulses	Value (%)	Limit (%)	Results	
N/A	N/A	5	N/A	N/A	N/A	

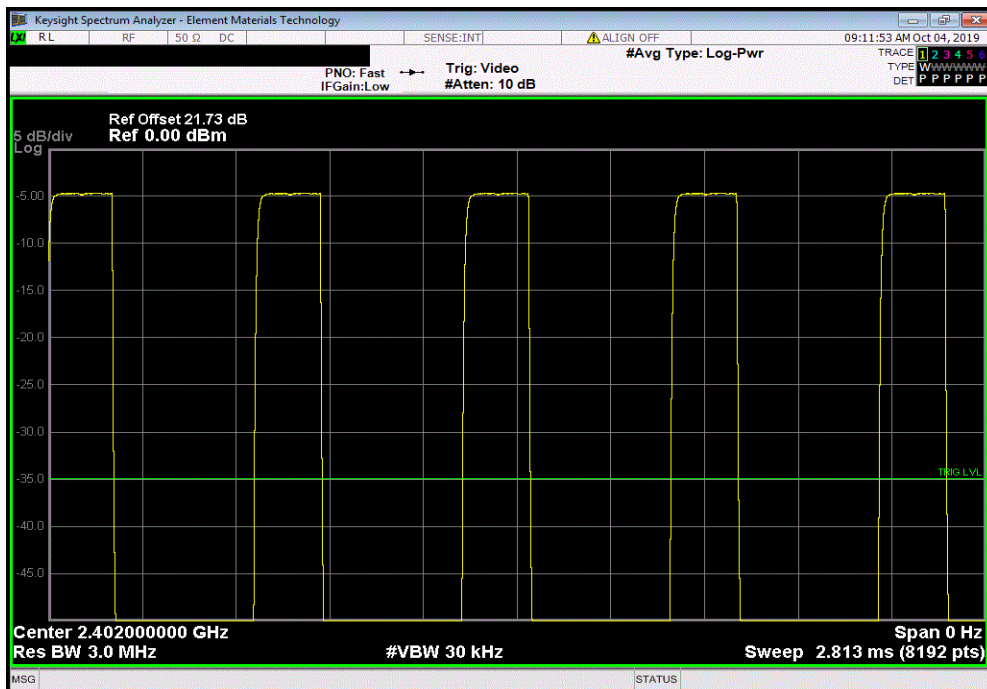


# DUTY CYCLE




TbTx 2019.08.30.0 XMI 2019.09.05

BLE/GFSK (2 Mbps) Mid Channel, 2442 MHz						
Pulse Width	Period	Number of Pulses	Value (%)	Limit (%)	Results	
198.2 us	625.1 us	1	31.7	N/A	N/A	

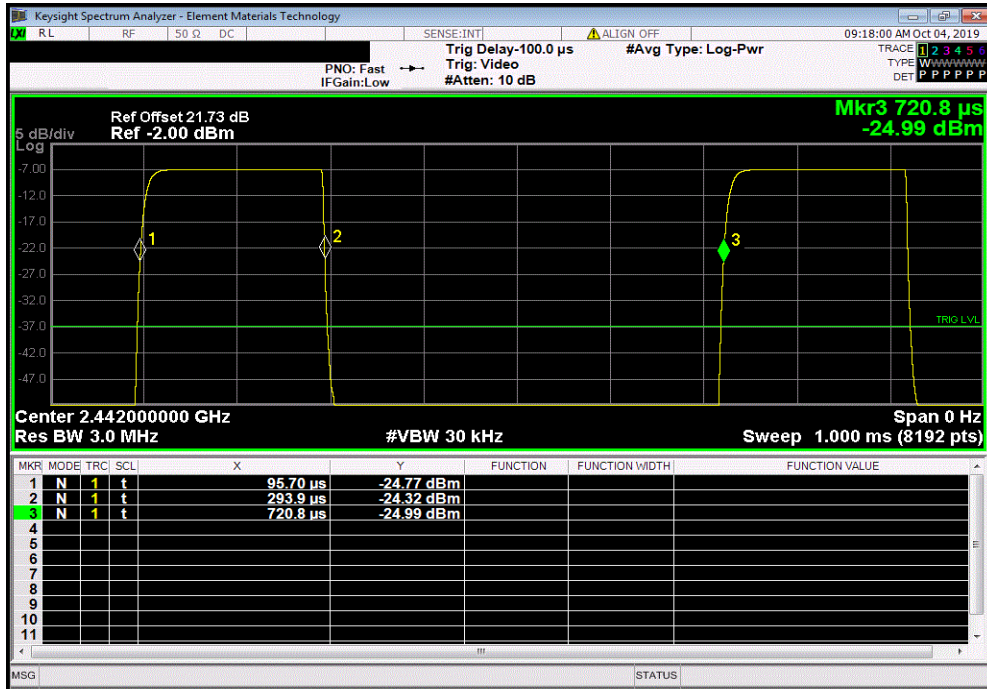

BLE/GFSK (2 Mbps) Mid Channel, 2442 MHz						
Pulse Width	Period	Number of Pulses	Value (%)	Limit (%)	Results	
N/A	N/A	5	N/A	N/A	N/A	

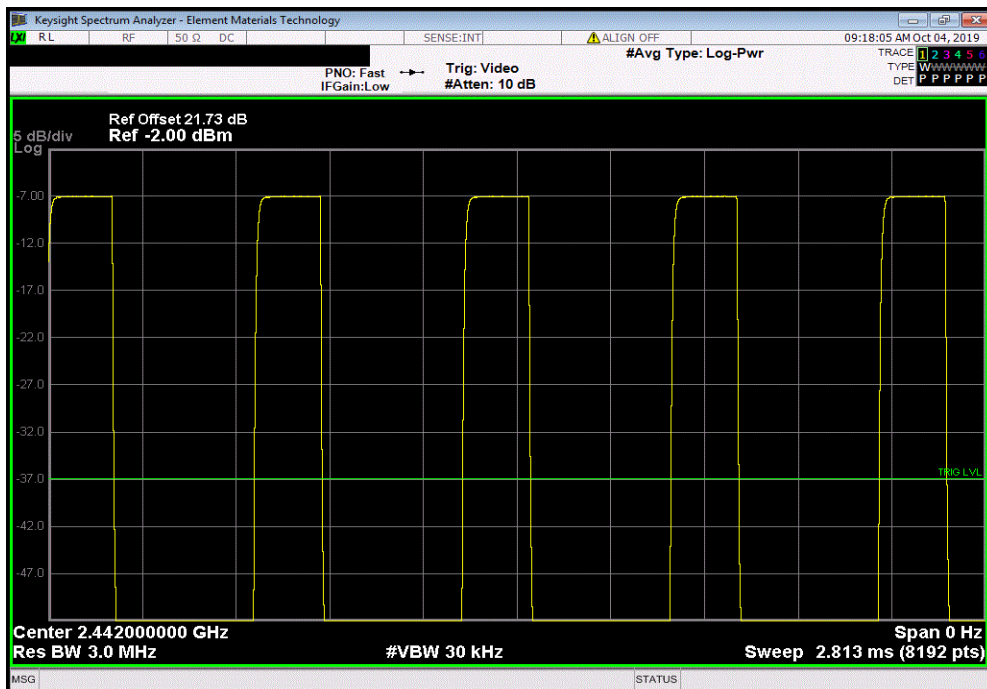


# DUTY CYCLE




TbTx 2019.08.30.0 XMI 2019.09.05

BLE/GFSK (2 Mbps) High Channel, 2480 MHz						
Pulse Width	Period	Number of Pulses	Value (%)	Limit (%)	Results	
198.1 us	625 us	1	31.7	N/A	N/A	

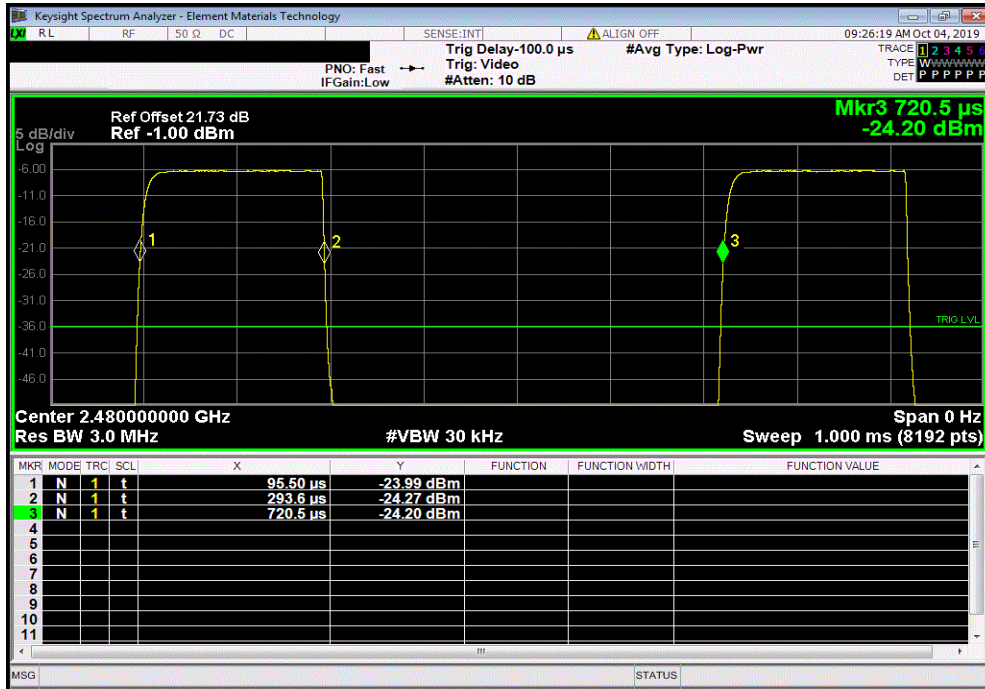

BLE/GFSK (2 Mbps) High Channel, 2480 MHz						
Pulse Width	Period	Number of Pulses	Value (%)	Limit (%)	Results	
N/A	N/A	5	N/A	N/A	N/A	

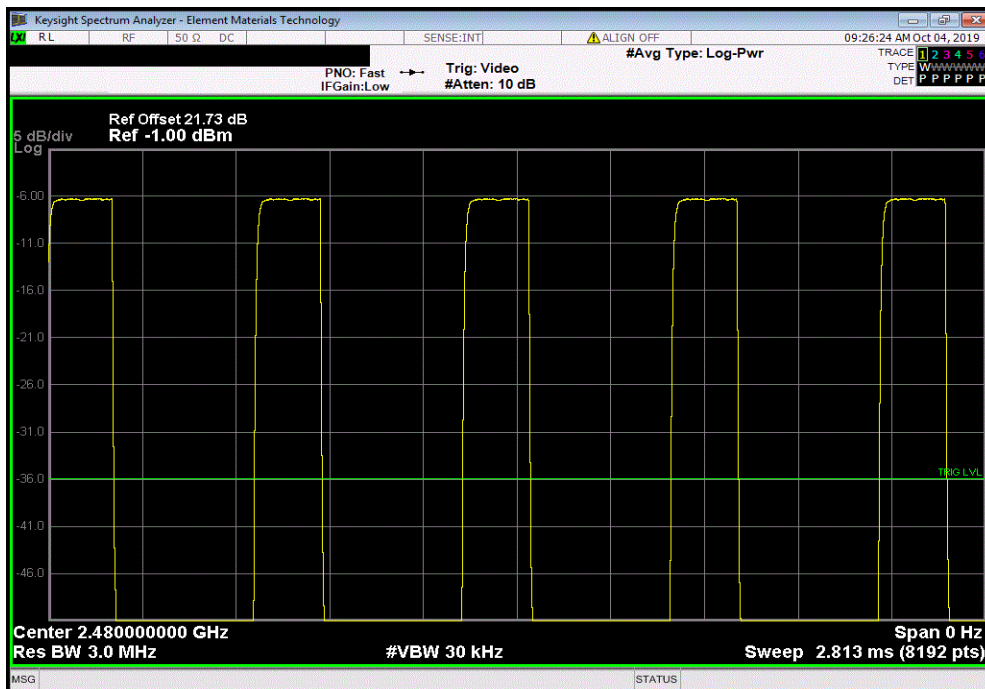

# OCCUPIED BANDWIDTH



XMR 2019.09.05

Testing was performed using the mode(s) of operation and configuration(s) noted within the report. The individuals and/or the organization requesting the test provided the modes, configurations and settings used to complete the evaluation. The actual test parameters are specified in the test data, this includes items such as investigated frequency range (scanned) and test levels. The testing methods and performance specifications, as well as the test site used for the evaluation are indicated in the test data.

## TEST EQUIPMENT

Description	Manufacturer	Model	ID	Last Cal.	Cal. Due
Generator - Signal	Agilent	N5173B	TIW	5-Jul-17	5-Jul-20
Cable	ESM Cable Corp.	TTBJ141-KMKM-72	MNU	11-Apr-19	11-Apr-20
Analyzer - Spectrum Analyzer	Keysight	N9010A	AFN	1-May-19	1-May-20
Block - DC	Fairview Microwave	SD3379	AMI	6-Aug-19	6-Aug-20
Attenuator	S.M. Electronics	SA26B-20	RFW	13-Feb-19	13-Feb-20

## TEST DESCRIPTION

The measurement was made using a direct connection between the RF output of the EUT and a spectrum analyzer. The EUT was set to the channels and modes listed in the datasheet.

The 6dB occupied bandwidth was measured using 100 kHz resolution bandwidth and 300 kHz video bandwidth. The 99.0% occupied bandwidth was also measured at the same time which can be needed during Output Power depending on the applicable method.




# OCCUPIED BANDWIDTH




TbTx 2019.08.30.0 XMI 2019.09.05

BLE/GFSK (2 Mbps) Low Channel, 2402 MHz						
				Value	Limit	Result
					(≥)	
				1.277 MHz	500 kHz	Pass

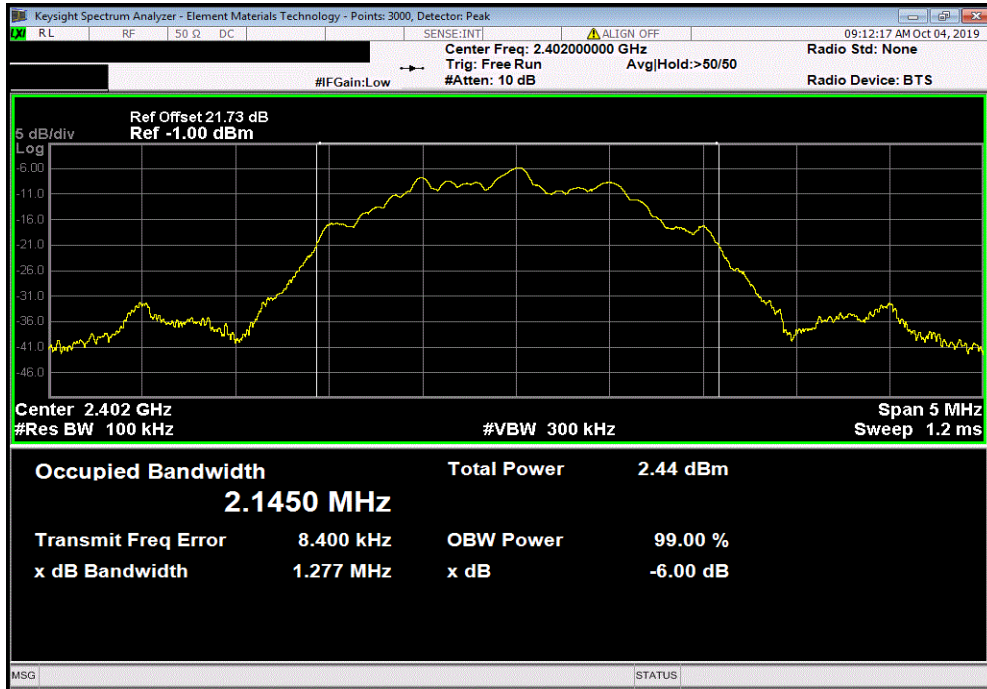

BLE/GFSK (2 Mbps) Mid Channel, 2442 MHz						
				Value	Limit	Result
					(≥)	
				1.277 MHz	500 kHz	Pass

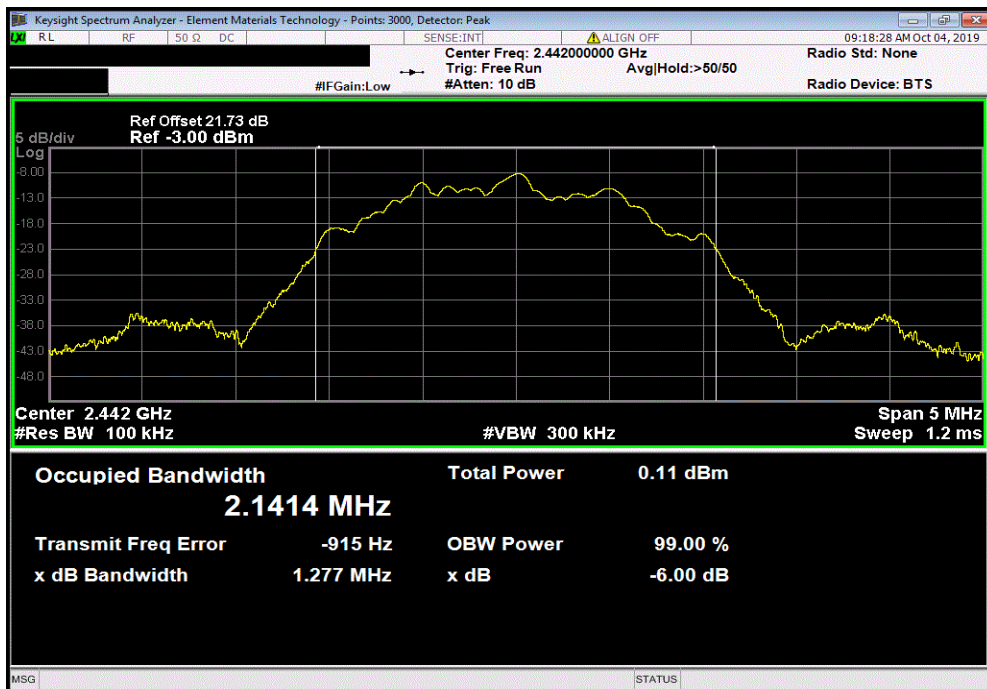




# OCCUPIED BANDWIDTH



TbTx 2019.08.30.0 XMI 2019.09.05

BLE/GFSK (2 Mbps) High Channel, 2480 MHz						
	Value	Limit	Result			
		(≥)				
	1.281 MHz	500 kHz	Pass			

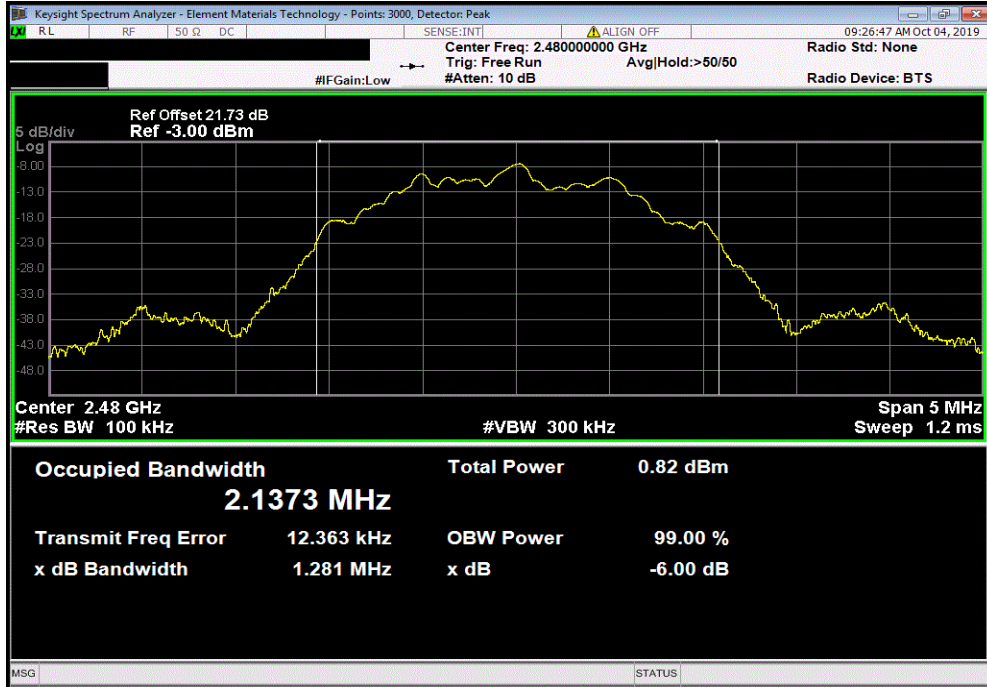

# OUTPUT POWER



XMIT 2019.09.05

Testing was performed using the mode(s) of operation and configuration(s) noted within the report. The individuals and/or the organization requesting the test provided the modes, configurations and settings used to complete the evaluation. The actual test parameters are specified in the test data, this includes items such as investigated frequency range (scanned) and test levels. The testing methods and performance specifications, as well as the test site used for the evaluation are indicated in the test data.

## TEST EQUIPMENT

Description	Manufacturer	Model	ID	Last Cal.	Cal. Due
Generator - Signal	Agilent	N5173B	TIW	5-Jul-17	5-Jul-20
Cable	ESM Cable Corp.	TTBJ141-KMKM-72	MNU	11-Apr-19	11-Apr-20
Analyzer - Spectrum Analyzer	Keysight	N9010A	AFN	1-May-19	1-May-20
Block - DC	Fairview Microwave	SD3379	AMI	6-Aug-19	6-Aug-20
Attenuator	S.M. Electronics	SA26B-20	RFW	13-Feb-19	13-Feb-20

## TEST DESCRIPTION

The measurement was made using a direct connection between the RF output of the EUT and a spectrum analyzer. The transmit frequency was set to the required channels in each band. The transmit power was set to its default maximum.

Prior to measuring peak transmit power the DTS bandwidth (B) was measured.

The method found in ANSI C63.10:2013 Section 11.9.1.1 was used because the RBW on the analyzer was greater than the DTS Bandwidth of the radio.

# OUTPUT POWER



TelTx 2019.08.30.0 XMI 2019.09.05


EUT: Livio micro RIC 312		Work Order: STAK0185	
Serial Number: 192041403		Date: 3-Oct-19	
Customer: Starkey Laboratories, Inc.		Temperature: 20.9 °C	
Attendees: Charlie Esch		Humidity: 45% RH	
Project: None		Barometric Pres.: 1026 mbar	
Tested by: Andrew Rogstad		Power: 1.4 VDC	
Job Site: MN08			
<b>TEST SPECIFICATIONS</b>			
FCC 15.247:2019		Test Method	
		ANSI C63.10:2013	
<b>COMMENTS</b>			
Reference level offset includes Measurement Cable, DC Block, and 20 dB Attenuator.			
<b>DEVIATIONS FROM TEST STANDARD</b>			
None			
Configuration #	3	Signature <i>Andrew Rogstad</i>	
		Out Pwr (dBm)	Limit (dBm) Result
BLE/GFSK (2 Mbps) Low Channel, 2402 MHz		-4.299	30 Pass
BLE/GFSK (2 Mbps) Mid Channel, 2442 MHz		-6.569	30 Pass
BLE/GFSK (2 Mbps) High Channel, 2480 MHz		-5.833	30 Pass

# OUTPUT POWER




TbTx 2019.08.30.0 XMI 2019.09.05

BLE/GFSK (2 Mbps) Low Channel, 2402 MHz						
				Out Pwr (dBm)	Limit (dBm)	Result
				-4.299	30	Pass

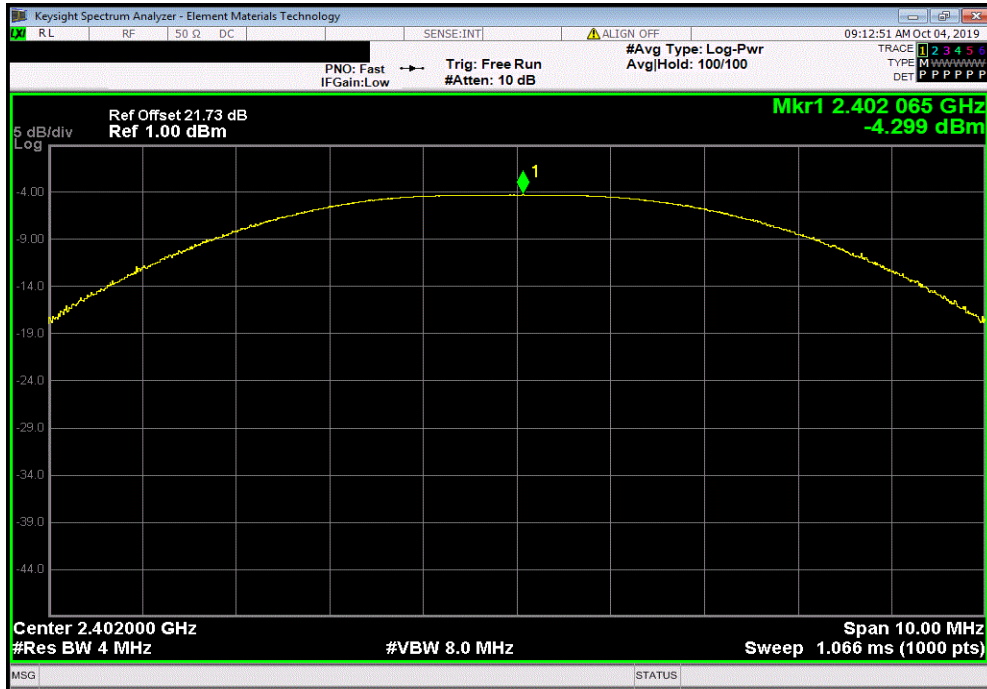

BLE/GFSK (2 Mbps) Mid Channel, 2442 MHz						
				Out Pwr (dBm)	Limit (dBm)	Result
				-6.569	30	Pass

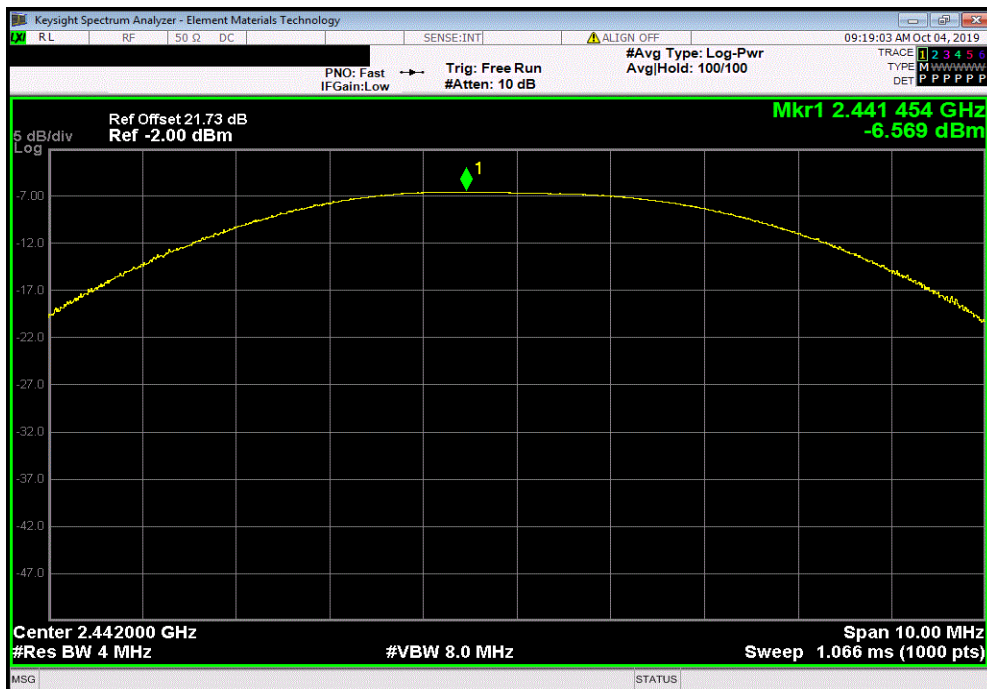



# EQUIVALENT ISOTROPIC RADIATED POWER (EIRP)



XMit 2019.09.05

Testing was performed using the mode(s) of operation and configuration(s) noted within the report. The individuals and/or the organization requesting the test provided the modes, configurations and settings used to complete the evaluation. The actual test parameters are specified in the test data, this includes items such as investigated frequency range (scanned) and test levels. The testing methods and performance specifications, as well as the test site used for the evaluation are indicated in the test data.

## TEST EQUIPMENT

Description	Manufacturer	Model	ID	Last Cal.	Cal. Due
Generator - Signal	Agilent	N5173B	TIW	5-Jul-17	5-Jul-20
Cable	ESM Cable Corp.	TTBJ141-KMKM-72	MNU	11-Apr-19	11-Apr-20
Analyzer - Spectrum Analyzer	Keysight	N9010A	AFN	1-May-19	1-May-20
Block - DC	Fairview Microwave	SD3379	AMI	6-Aug-19	6-Aug-20
Attenuator	S.M. Electronics	SA26B-20	RFW	13-Feb-19	13-Feb-20

## TEST DESCRIPTION

The measurement was made using a direct connection between the RF output of the EUT and a spectrum analyzer. The transmit frequency was set to the required channels in each band. The transmit power was set to its default maximum.

Prior to measuring peak transmit power the DTS bandwidth (B) was measured.

The method found in ANSI C63.10:2013 Section 11.9.1.1 was used because the RBW on the analyzer was greater than the DTS Bandwidth of the radio.

The antenna gain was added to the conducted output power value to calculate the EIRP.

# EQUIVALENT ISOTROPIC RADIATED POWER (EIRP)



TelTx 2019.08.30.0 XMt 2019.09.05

EUT: Livio micro RIC 312		Work Order: STAK0185				
Serial Number: 192041403		Date: 3-Oct-19				
Customer: Starkey Laboratories, Inc.		Temperature: 20.9 °C				
Attendees: Charlie Esch		Humidity: 44.7% RH				
Project: None		Barometric Pres.: 1026 mbar				
Tested by: Andrew Rogstad	Power: 1.4 VDC	Job Site: MN08				
TEST SPECIFICATIONS		Test Method				
FCC 15.247:2019		ANSI C63.10:2013				
COMMENTS						
Reference level offset includes Measurement Cable, DC Block, and 20 dB Attenuator.						
DEVIATIONS FROM TEST STANDARD						
None						
Configuration #	3	Signature <i>Andrew Rogstad</i>				
		Out Pwr (dBm)	Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	Result
BLE/GFSK (2 Mbps) Low Channel, 2402 MHz		-4.299	-13.51	-17.809	36	Pass
BLE/GFSK (2 Mbps) Mid Channel, 2442 MHz		-6.569	-13.51	-20.079	36	Pass
BLE/GFSK (2 Mbps) High Channel, 2480 MHz		-5.833	-13.51	-19.343	36	Pass




# EQUIVALENT ISOTROPIC RADIATED POWER (EIRP)




TbTx 2019.08.30.0 XMI 2019.09.05

BLE/GFSK (2 Mbps) Low Channel, 2402 MHz						
Out Pwr (dBm)	Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	Result		
-4.299	-13.51	-17.809	36	Pass		

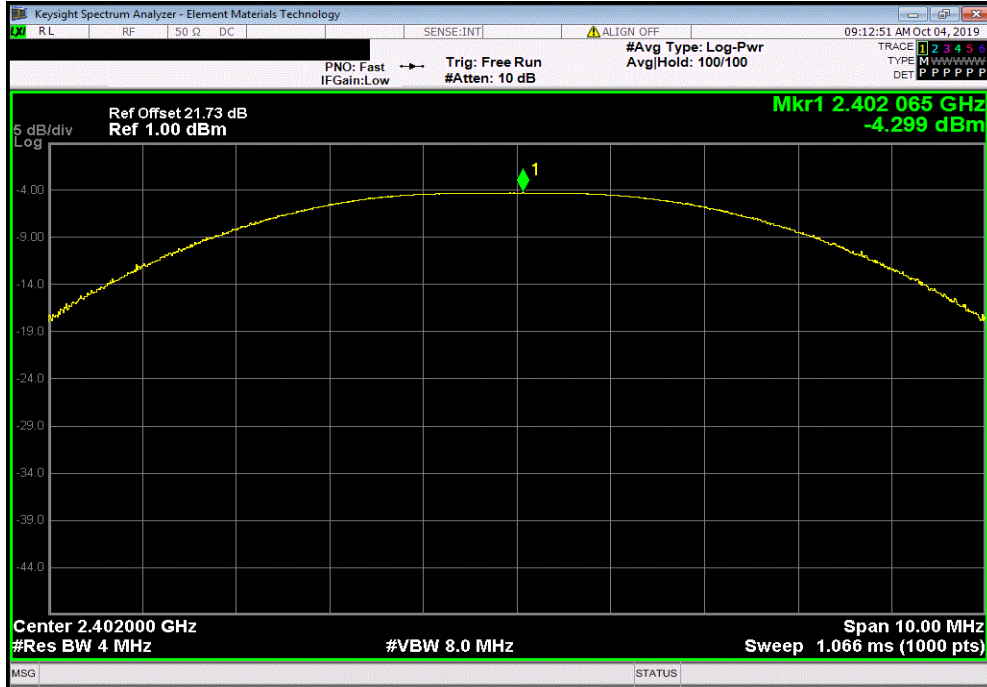

BLE/GFSK (2 Mbps) Mid Channel, 2442 MHz						
Out Pwr (dBm)	Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	Result		
-6.569	-13.51	-20.079	36	Pass		

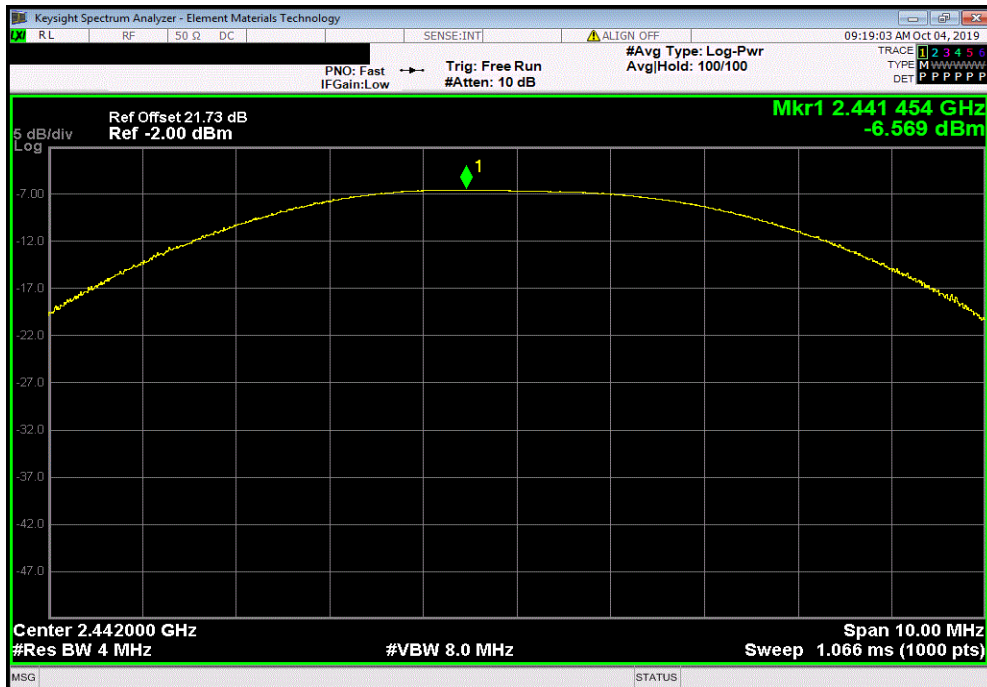


# EQUIVALENT ISOTROPIC RADIATED POWER (EIRP)



TbTx 2019.08.30.0 XMI 2019.09.05

BLE/GFSK (2 Mbps) High Channel, 2480 MHz					
Out Pwr (dBm)	Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	Result	
-5.833	-13.51	-19.343	36	Pass	

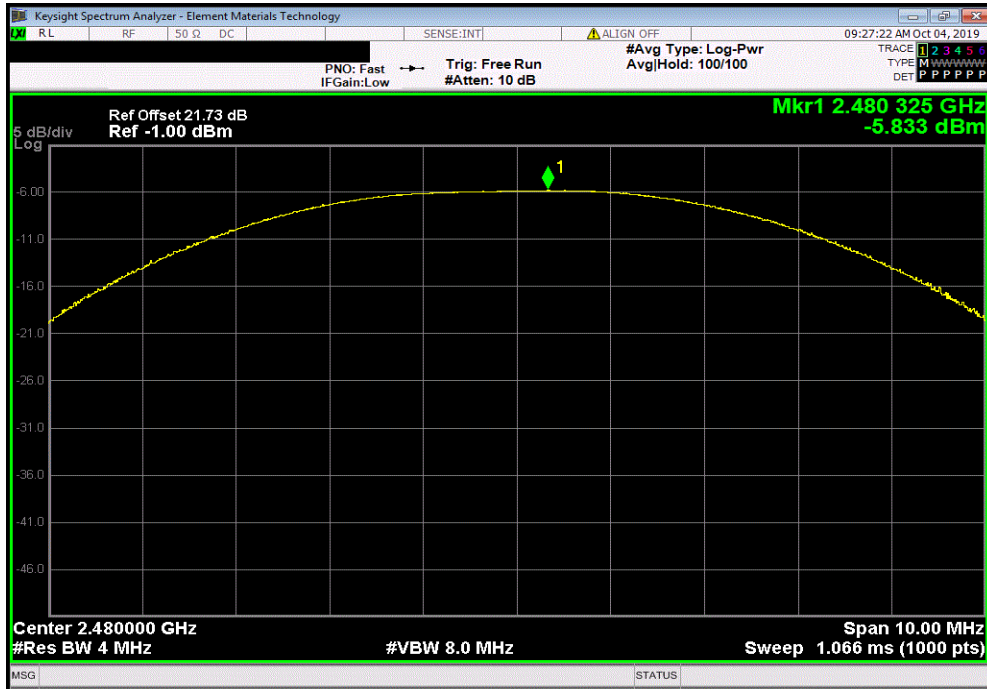

# POWER SPECTRAL DENSITY



XMI 2019.09.05

Testing was performed using the mode(s) of operation and configuration(s) noted within the report. The individuals and/or the organization requesting the test provided the modes, configurations and settings used to complete the evaluation. The actual test parameters are specified in the test data, this includes items such as investigated frequency range (scanned) and test levels. The testing methods and performance specifications, as well as the test site used for the evaluation are indicated in the test data.

## TEST EQUIPMENT

Description	Manufacturer	Model	ID	Last Cal.	Cal. Due
Generator - Signal	Agilent	N5173B	TIW	5-Jul-17	5-Jul-20
Cable	ESM Cable Corp.	TTBJ141-KMKM-72	MNU	11-Apr-19	11-Apr-20
Analyzer - Spectrum Analyzer	Keysight	N9010A	AFN	1-May-19	1-May-20
Antenna - Standard Gain	OML, Inc.	M05HWAX	AIM	17-Sep-19	17-Sep-22
Attenuator	S.M. Electronics	SA26B-20	RFW	13-Feb-19	13-Feb-20

## TEST DESCRIPTION

The measurement was made using a direct connection between the RF output of the EUT and a spectrum analyzer. The maximum power spectral density measurements was measured using the channels and modes as called out on the following data sheets.

Per the procedure outlined in ANSI C63.10 the peak power spectral density was measured in a 3 kHz RBW.

# POWER SPECTRAL DENSITY



TelTx 2019.08.30.0 XMI 2019.09.05


EUT: Livio micro RIC 312		Work Order: STAK0185	
Serial Number: 192041403		Date: 3-Oct-19	
Customer: Starkey Laboratories, Inc.		Temperature: 20.9 °C	
Attendees: Charlie Esch		Humidity: 45.2% RH	
Project: None		Barometric Pres.: 1026 mbar	
Tested by: Andrew Rogstad		Power: 1.4 VDC	
Job Site: MN08			
<b>TEST SPECIFICATIONS</b>			
FCC 15.247:2019		Test Method	
		ANSI C63.10:2013	
<b>COMMENTS</b>			
Reference level offset includes Measurement Cable, DC Block, and 20 dB Attenuator.			
<b>DEVIATIONS FROM TEST STANDARD</b>			
None			
Configuration #	3	Signature <i>Andrew Rogstad</i>	
		Value dBm/3kHz	Limit < dBm/3kHz
BLE/GFSK (2 Mbps) Low Channel, 2402 MHz		-22.369	8
BLE/GFSK (2 Mbps) Mid Channel, 2442 MHz		-24.695	8
BLE/GFSK (2 Mbps) High Channel, 2480 MHz		-24.037	8
			Results
			Pass
			Pass
			Pass

# POWER SPECTRAL DENSITY




TbTx 2019.08.30.0 XMI 2019.09.05

BLE/GFSK (2 Mbps) Low Channel, 2402 MHz						
	Value	Limit	Results			
	dBm/3kHz	< dBm/3kHz				
	-22.369	8	Pass			

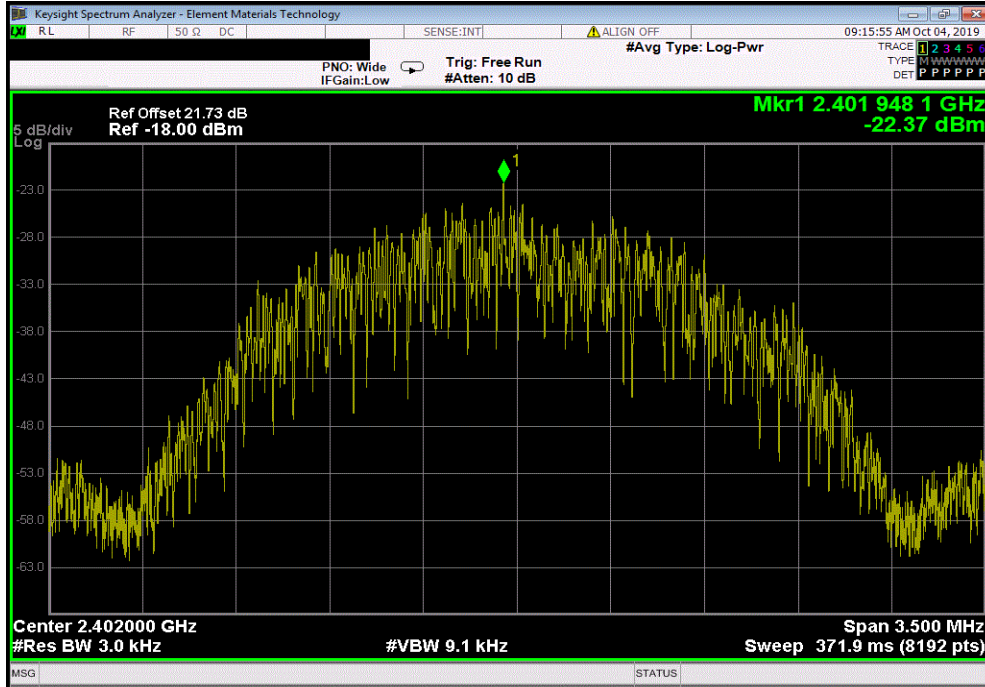

BLE/GFSK (2 Mbps) Mid Channel, 2442 MHz						
	Value	Limit	Results			
	dBm/3kHz	< dBm/3kHz				
	-24.695	8	Pass			

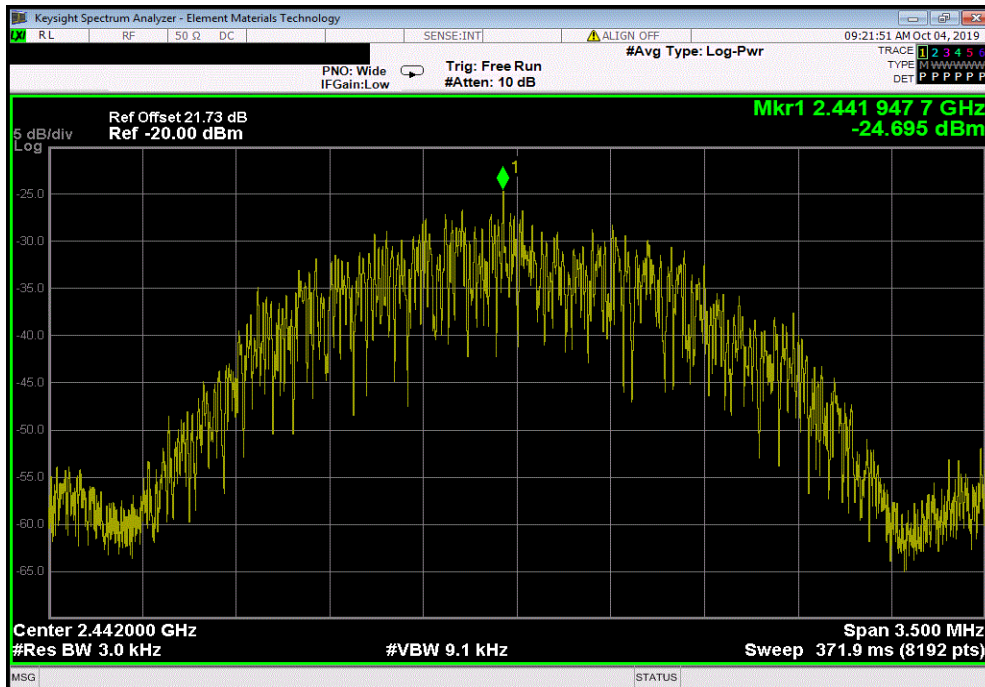


# POWER SPECTRAL DENSITY



TbTx 2019.08.30.0 XMI 2019.09.05

BLE/GFSK (2 Mbps) High Channel, 2480 MHz				Value	Limit	Results
				dBm/3kHz	< dBm/3kHz	
				-24.037	8	Pass

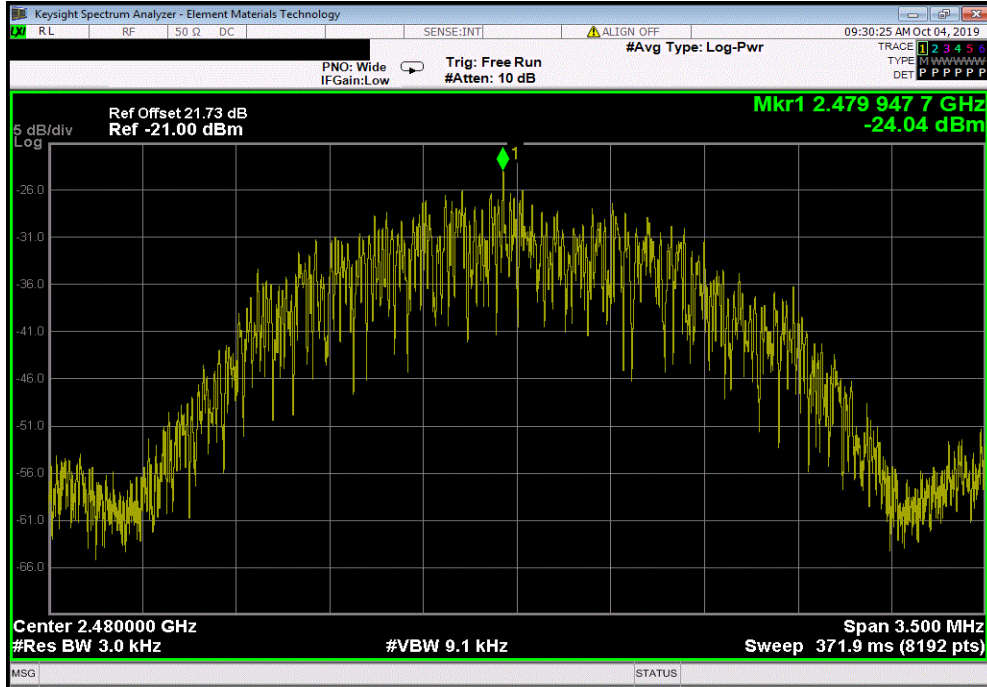

# BAND EDGE COMPLIANCE



XMI 2019.09.05

Testing was performed using the mode(s) of operation and configuration(s) noted within the report. The individuals and/or the organization requesting the test provided the modes, configurations and settings used to complete the evaluation. The actual test parameters are specified in the test data, this includes items such as investigated frequency range (scanned) and test levels. The testing methods and performance specifications, as well as the test site used for the evaluation are indicated in the test data.

## TEST EQUIPMENT

Description	Manufacturer	Model	ID	Last Cal.	Cal. Due
Generator - Signal	Agilent	N5173B	TIW	5-Jul-17	5-Jul-20
Cable	ESM Cable Corp.	TTBJ141-KMKM-72	MNU	11-Apr-19	11-Apr-20
Analyzer - Spectrum Analyzer	Keysight	N9010A	AFN	1-May-19	1-May-20
Block - DC	Fairview Microwave	SD3379	AMI	6-Aug-19	6-Aug-20
Attenuator	S.M. Electronics	SA26B-20	RFW	13-Feb-19	13-Feb-20

## TEST DESCRIPTION

The measurement was made using a direct connection between the RF output of the EUT and a spectrum analyzer. The spurious RF conducted emissions at the edges of the authorized bands were measured with the EUT set to low and high transmit frequencies in each available band. The channels closest to the band edges were selected. The EUT was transmitting at the data rate(s) listed in the datasheet.

The spectrum was scanned below the lower band edge and above the higher band edge.



# BAND EDGE COMPLIANCE



TelTx 2019.08.30.0 XMI 2019.09.05


EUT: Livio micro RIC 312		Work Order: STAK0185		
Serial Number: 192041403		Date: 3-Oct-19		
Customer: Starkey Laboratories, Inc.		Temperature: 20.9 °C		
Attendees: Charlie Esch		Humidity: 44.4% RH		
Project: None		Barometric Pres.: 1026 mbar		
Tested by: Andrew Rogstad	Power: 1.4 VDC	Job Site: MN08		
TEST SPECIFICATIONS				
FCC 15.247:2019		Test Method: ANSI C63.10:2013		
COMMENTS				
Reference level offset includes Measurement Cable, DC Block, and 20 dB Attenuator.				
DEVIATIONS FROM TEST STANDARD				
None				
Configuration #	3	Signature <i>Andrew Rogstad</i>		
		Value (dBc)	Limit ≤ (dBc)	Result
BLE/GFSK (2 Mbps) Low Channel, 2402 MHz		-26.24	-20	Pass
BLE/GFSK (2 Mbps) High Channel, 2480 MHz		-37.98	-20	Pass

# BAND EDGE COMPLIANCE




TbTx 2019.08.30.0 XMI 2019.09.05

BLE/GFSK (2 Mbps) Low Channel, 2402 MHz						
	Value (dBc)	Limit ≤ (dBc)	Result			
	-26.24	-20	Pass			

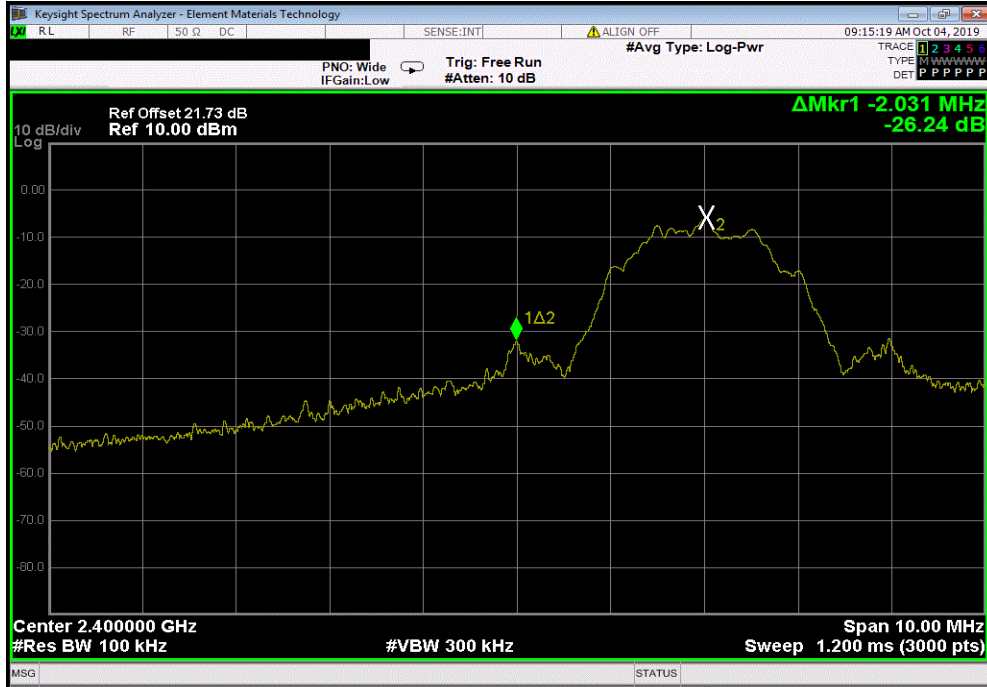

BLE/GFSK (2 Mbps) High Channel, 2480 MHz						
	Value (dBc)	Limit ≤ (dBc)	Result			
	-37.98	-20	Pass			

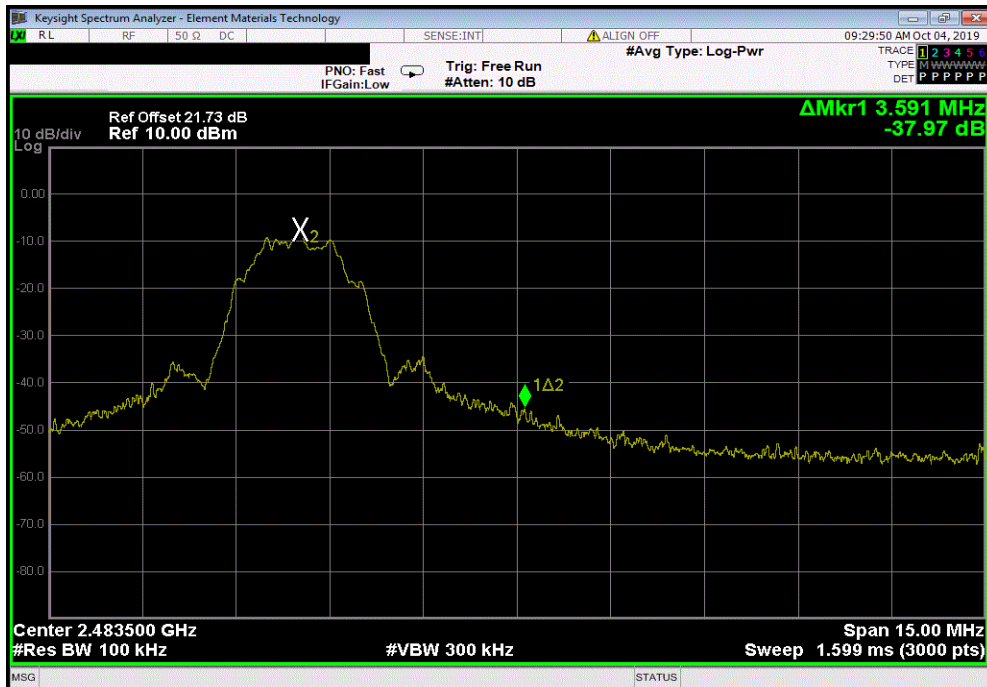

# SPURIOUS CONDUCTED EMISSIONS



XMI 2019.09.05

Testing was performed using the mode(s) of operation and configuration(s) noted within the report. The individuals and/or the organization requesting the test provided the modes, configurations and settings used to complete the evaluation. The actual test parameters are specified in the test data, this includes items such as investigated frequency range (scanned) and test levels. The testing methods and performance specifications, as well as the test site used for the evaluation are indicated in the test data.

## TEST EQUIPMENT

Description	Manufacturer	Model	ID	Last Cal.	Cal. Due
Generator - Signal	Agilent	N5173B	TIW	5-Jul-17	5-Jul-20
Cable	ESM Cable Corp.	TTBJ141-KMKM-72	MNU	11-Apr-19	11-Apr-20
Analyzer - Spectrum Analyzer	Keysight	N9010A	AFN	1-May-19	1-May-20
Block - DC	Fairview Microwave	SD3379	AMI	6-Aug-19	6-Aug-20
Attenuator	S.M. Electronics	SA26B-20	RFW	13-Feb-19	13-Feb-20

## TEST DESCRIPTION

The measurement was made using a direct connection between the RF output of the EUT and a spectrum analyzer. The spurious RF conducted emissions were measured with the EUT set to low, medium and high transmit frequencies. The EUT was transmitting at the data rate(s) listed in the datasheet. For each transmit frequency, the spectrum was scanned throughout the specified frequency range.

# SPURIOUS CONDUCTED EMISSIONS



TelTx 2019.08.30.0 XMt 2019.09.05

EUT: Livio micro RIC 312		Work Order: STAK0185
Serial Number: 192041403		Date: 3-Oct-19
Customer: Starkey Laboratories, Inc.		Temperature: 20.9 °C
Attendees: Charlie Esch		Humidity: 44.9% RH
Project: None		Barometric Pres.: 1026 mbar
Tested by: Andrew Rogstad	Power: 1.4 VDC	Job Site: MN08
TEST SPECIFICATIONS		
FCC 15.247:2019		Test Method: ANSI C63.10:2013
COMMENTS		
Reference level offset includes Measurement Cable, DC Block, and 20 dB Attenuator.		
DEVIATIONS FROM TEST STANDARD		
None		
Configuration #	3	Signature <i>Andrew Rogstad</i>


	Frequency Range	Measured Freq (MHz)	Max Value (dBc)	Limit ≤ (dBc)	Result
BLE/GFSK (2 Mbps) Low Channel, 2402 MHz	Fundamental	2402.02	N/A	N/A	N/A
BLE/GFSK (2 Mbps) Low Channel, 2402 MHz	30 MHz - 12.5 GHz	2397.34	-42.1	-20	Pass
BLE/GFSK (2 Mbps) Low Channel, 2402 MHz	12.5 GHz - 25 GHz	24575.75	-45.19	-20	Pass
BLE/GFSK (2 Mbps) Mid Channel, 2442 MHz	Fundamental	2442.01	N/A	N/A	N/A
BLE/GFSK (2 Mbps) Mid Channel, 2442 MHz	30 MHz - 12.5 GHz	3811.65	-44.96	-20	Pass
BLE/GFSK (2 Mbps) Mid Channel, 2442 MHz	12.5 GHz - 25 GHz	23739.47	-43.29	-20	Pass
BLE/GFSK (2 Mbps) High Channel, 2480 MHz	Fundamental	2480.01	N/A	N/A	N/A
BLE/GFSK (2 Mbps) High Channel, 2480 MHz	30 MHz - 12.5 GHz	3805.56	-45.43	-20	Pass
BLE/GFSK (2 Mbps) High Channel, 2480 MHz	12.5 GHz - 25 GHz	24519.29	-43.39	-20	Pass

# SPURIOUS CONDUCTED EMISSIONS




TbTx 2019.08.30.0 XMI 2019.09.05

BLE/GFSK (2 Mbps) Low Channel, 2402 MHz					
Frequency Range	Measured Freq (MHz)	Max Value (dBc)	Limit ≤ (dBc)	Result	
Fundamental	2402.02	N/A	N/A	N/A	

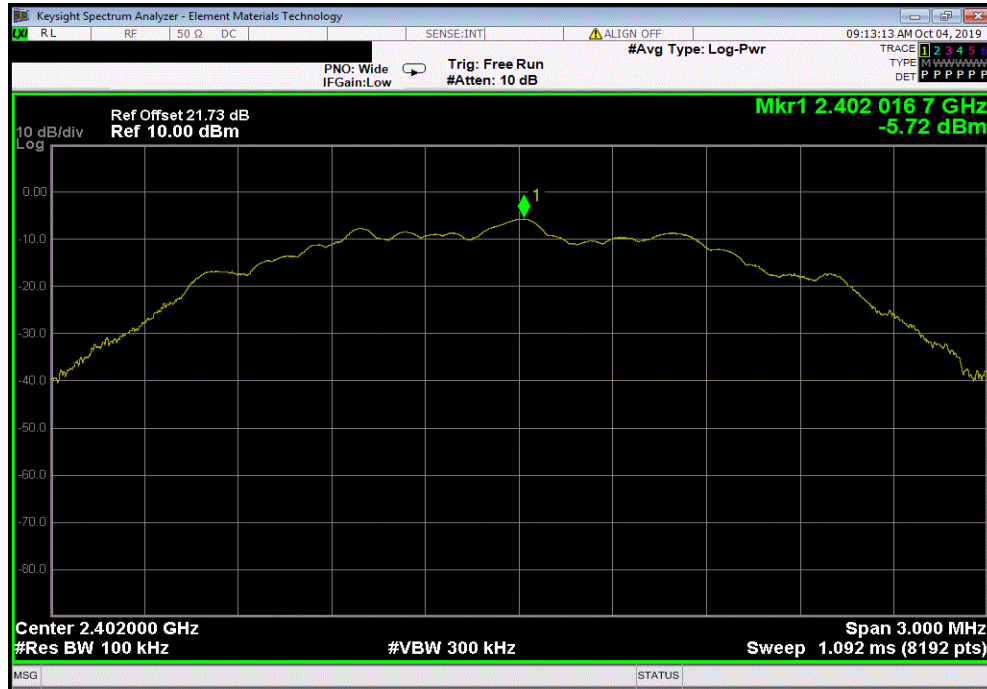

BLE/GFSK (2 Mbps) Low Channel, 2402 MHz					
Frequency Range	Measured Freq (MHz)	Max Value (dBc)	Limit ≤ (dBc)	Result	
30 MHz - 12.5 GHz	2397.34	-42.1	-20	Pass	

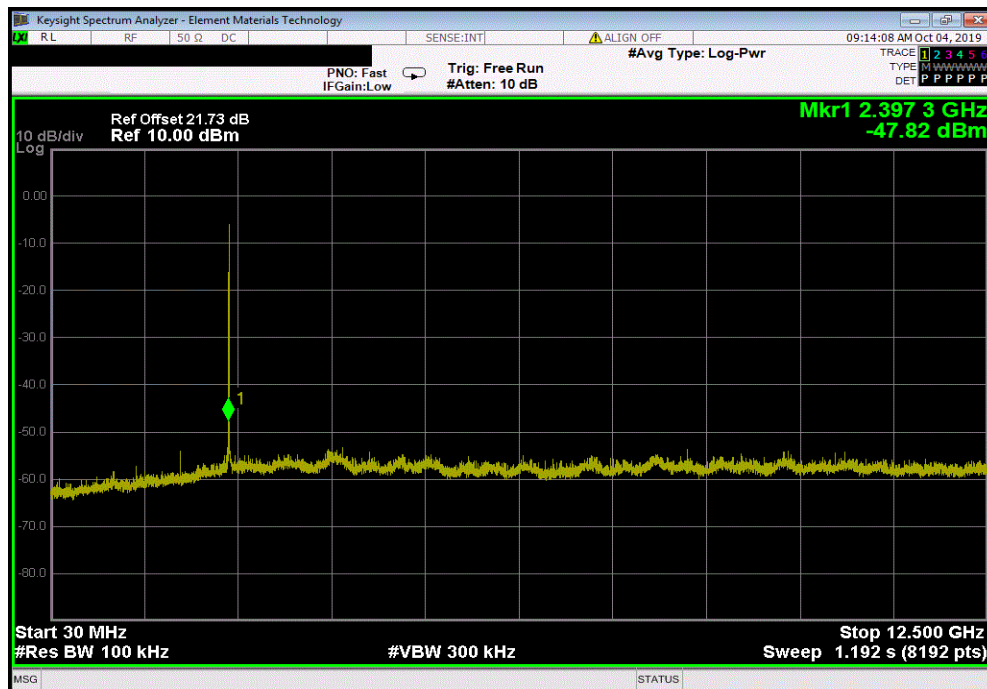


# SPURIOUS CONDUCTED EMISSIONS




TbTx 2019.08.30.0 XMI 2019.09.05

BLE/GFSK (2 Mbps) Low Channel, 2402 MHz					
Frequency Range	Measured Freq (MHz)	Max Value (dBc)	Limit ≤ (dBc)	Result	
12.5 GHz - 25 GHz	24575.75	-45.19	-20	Pass	

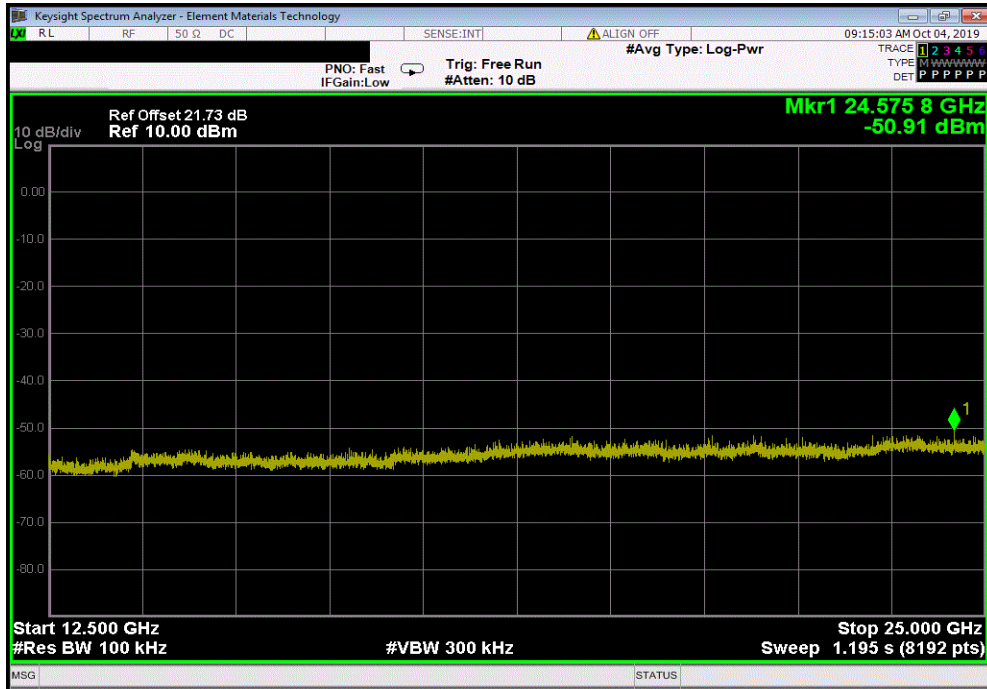

BLE/GFSK (2 Mbps) Mid Channel, 2442 MHz					
Frequency Range	Measured Freq (MHz)	Max Value (dBc)	Limit ≤ (dBc)	Result	
Fundamental	2442.01	N/A	N/A	N/A	

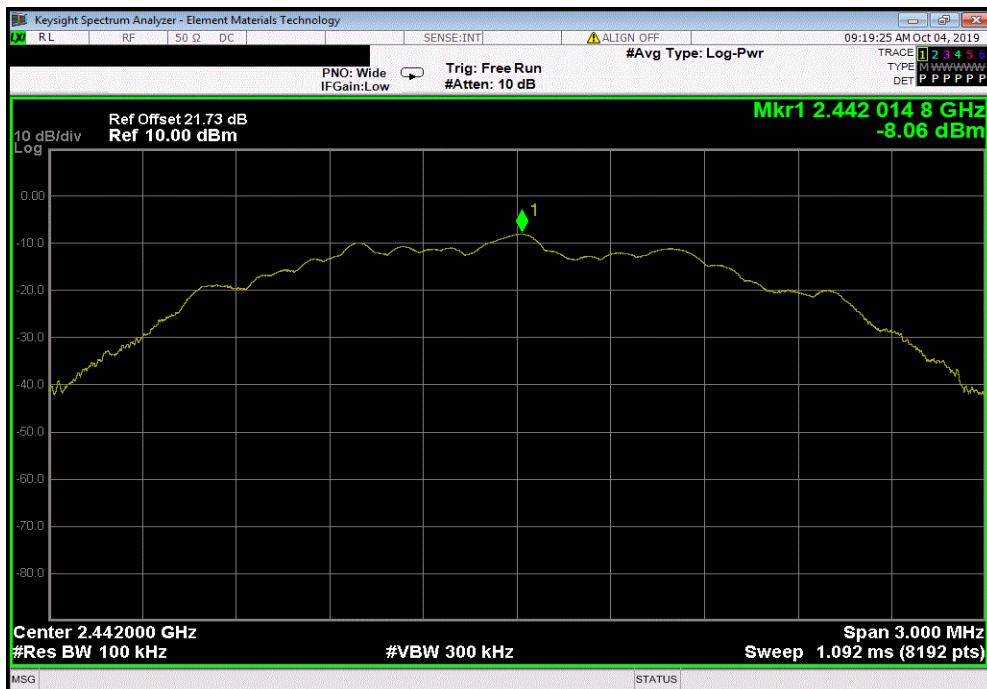


# SPURIOUS CONDUCTED EMISSIONS




TbTx 2019.08.30.0 XMI 2019.09.05

BLE/GFSK (2 Mbps) Mid Channel, 2442 MHz				
Frequency Range	Measured Freq (MHz)	Max Value (dBc)	Limit ≤ (dBc)	Result
30 MHz - 12.5 GHz	3811.65	-44.96	-20	Pass

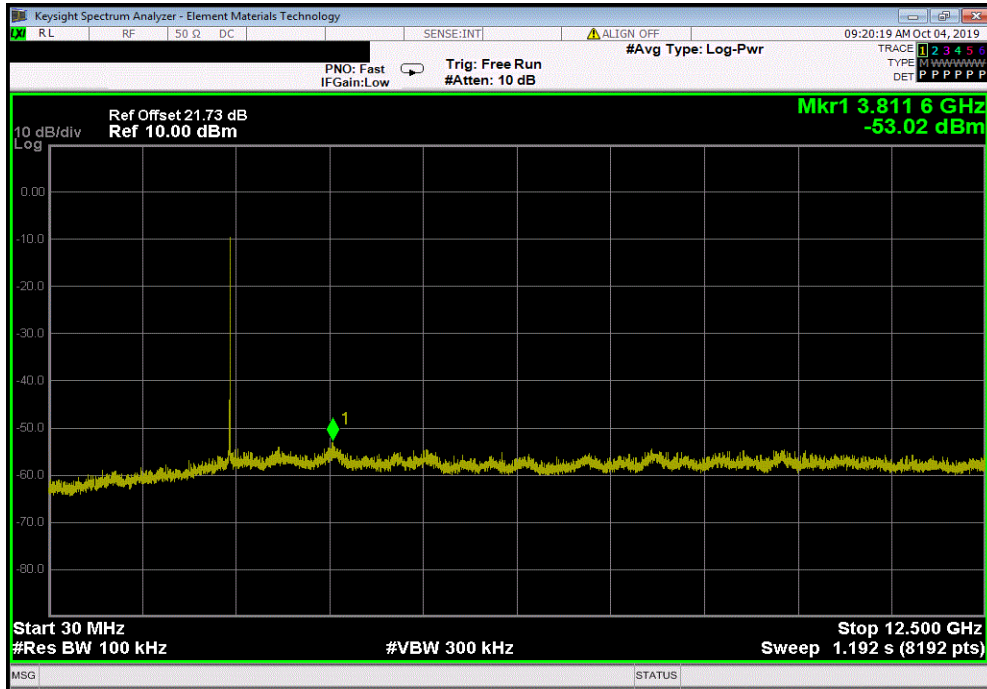

BLE/GFSK (2 Mbps) Mid Channel, 2442 MHz				
Frequency Range	Measured Freq (MHz)	Max Value (dBc)	Limit ≤ (dBc)	Result
12.5 GHz - 25 GHz	23739.47	-43.29	-20	Pass

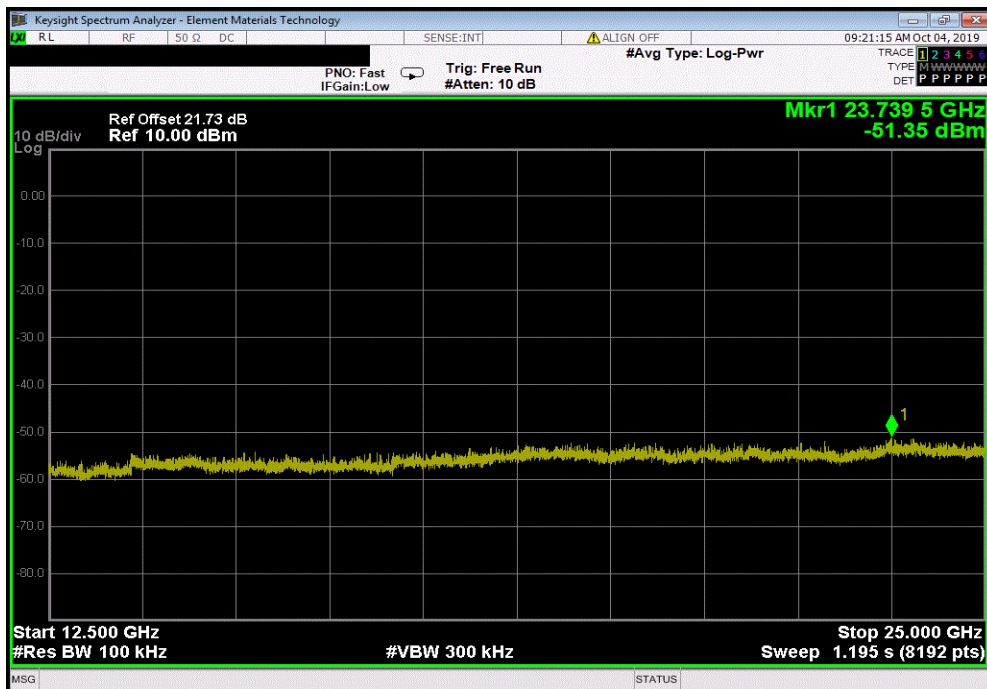




# SPURIOUS CONDUCTED EMISSIONS




TbTx 2019.08.30.0 XMI 2019.09.05

BLE/GFSK (2 Mbps) High Channel, 2480 MHz					
Frequency Range	Measured Freq (MHz)	Max Value (dBc)	Limit ≤ (dBc)	Result	
Fundamental	2480.01	N/A	N/A	N/A	

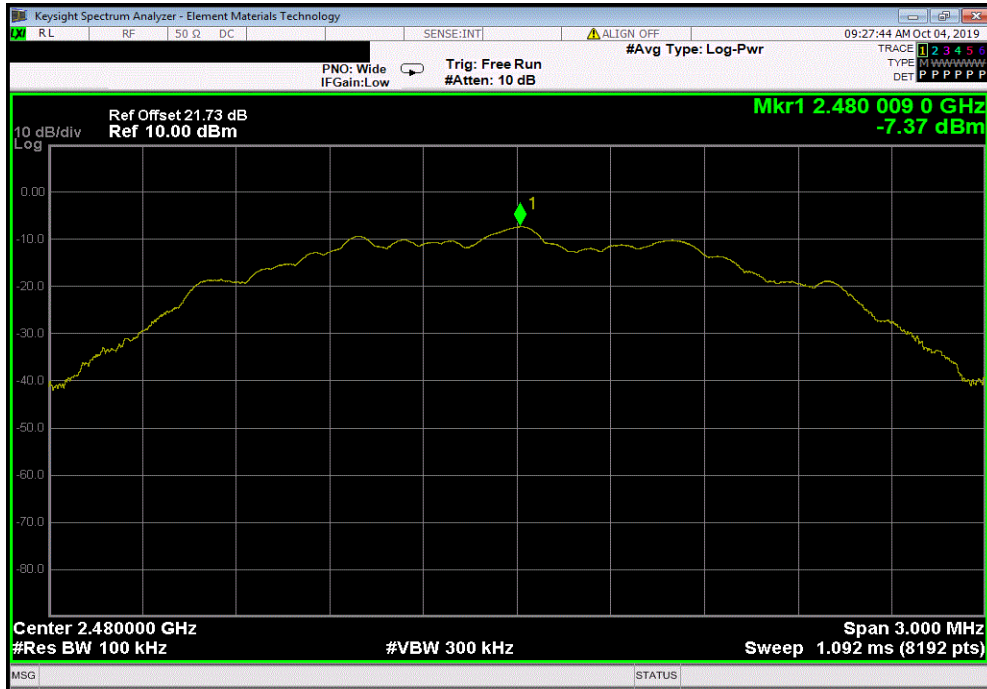

BLE/GFSK (2 Mbps) High Channel, 2480 MHz					
Frequency Range	Measured Freq (MHz)	Max Value (dBc)	Limit ≤ (dBc)	Result	
30 MHz - 12.5 GHz	3805.56	-45.43	-20	Pass	

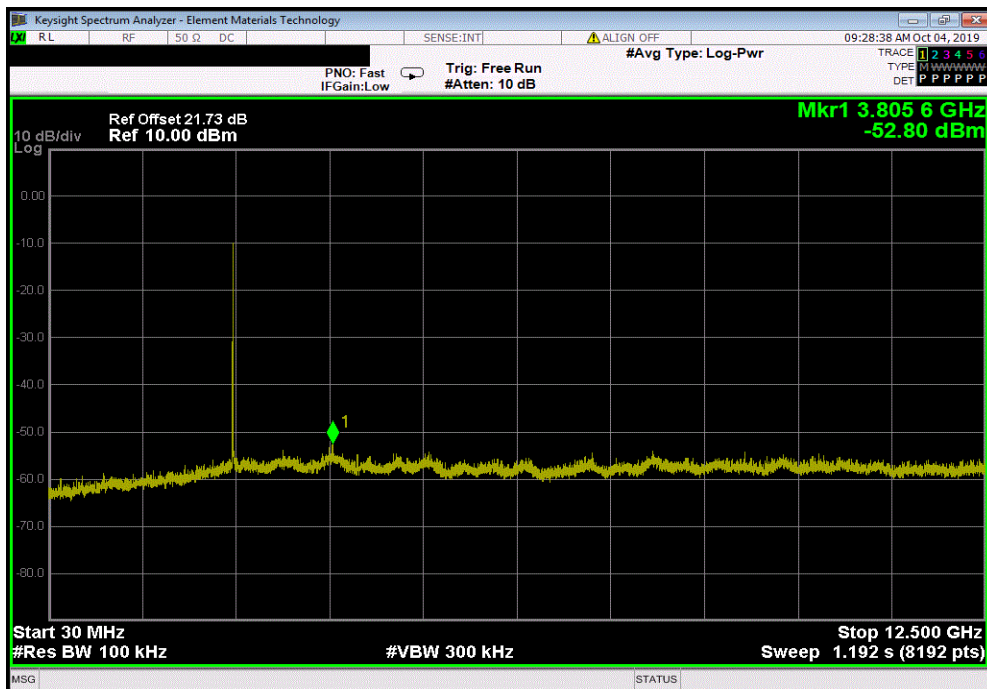



# SPURIOUS CONDUCTED EMISSIONS



TbTx 2019.08.30.0 XMI 2019.09.05

BLE/GFSK (2 Mbps) High Channel, 2480 MHz				
Frequency Range	Measured Freq (MHz)	Max Value (dBc)	Limit ≤ (dBc)	Result
12.5 GHz - 25 GHz	24519.29	-43.39	-20	Pass

