

**Engineering Exhibit in Support of
Class II Permissive Change Request
FCC Form 731**

for the

Mobile Data Platform Transceiver (800 MHz MDP)

With the

Dataradio Gemini Modem

**FCC ID: EOTGPDA
Trade Name: GEMINI/PD+**

December 5, 2002

AFFIDAVIT

The technical data included in this report has been accumulated through tests that were performed by me or by engineers under my direction. To the best of my knowledge, all of the data is true and correct.

Norman D Pearl
Vice-president Engineering, Dataradio Inc.

Dataradio Inc.
Montreal, Canada

**ENGINEERING STATEMENT
OF CONSTANTIN PINTILEI**

The application consisting of the attached engineering exhibit and associated FCC form 731 has been prepared in support of a request for a Class II Permissive Change for EOTGPDA.

The certification EOTGPDA has been granted to Dataradio Inc for its Gemini/PD+ radio modem. Gemini/PD+ is comprised of the Dataradio COR Ltd. (DRL) Mobile Data Platform (MDP) UHF Transceiver with the Dataradio Inc Gemini Modem. Dataradio Inc does the final assembly and markets the Gemini/PD unit. The EOTGPDA certificate has been granted for a 2-level FSK (DGMSK) and a 4-level FSK (xRC4FSK) types of modulation scheme together with associated maximum deviation levels at various rates. The change consists of the addition of a 8-level FSK modulation scheme with 4 new proposed rates. This change involves the firmware only, with no change whatsoever occurring in the hardware.

EXISTING CONDITIONS

The unit utilized for these occupied bandwidth and mask-compliance measurements was a prototype built from production EOTGPDA with beta-level firmware used to create the modulation scheme. The transceiver operates on frequencies ranging from 403.000 MHz to 512.000 MHz. The frequency tolerance of the transceiver is .00015% (1.5parts per million) as granted in EOTGPDA.

PROPOSED CONDITIONS

It is proposed to accept the request for the GEMINI/PD, 403-512 MHz Transceiver/Modem/GPS for operation in the band of frequencies previously outlined. The applicant anticipates marketing the device for use in wireless transmission of data.

PERFORMANCE MEASUREMENTS

All measurements for Occupied Bandwidth and mask compliance as per 2.1043 (b)(2) were conducted in accordance with the Rules and Regulations Section 2.1041 and 2.1049 of Rules Service Co rev.2-163,Sep15,2002. Equipment performance measurements were made in the engineering laboratory located at 5500 Royalmount ave, Montreal, Canada. All measurements were made and recorded by myself or under my direction. The performance measurements were made between Nov 15, 2002 and Nov 30, 2002

CONCLUSION

Given the results of the measurements contained herein, the applicant requests to have appended the new emission designators 9K67F1D,16K4F1D and 17K0F1D in the list of the Certificate EOTGPDA and to have accepted the use of 8K17F1D with a 8-FSK modulation following the Class II Permissive Change, as per FCC part 2.1043(b)(2).



12/05/02

Constantin Pintilei, Eng
R&D Test Engineer, Dataradio Inc.

TABLE OF CONTENTS

AFFIDAVIT2
 ENGINEERING STATEMENT3
 TABLE OF CONTENTS4
 QUALIFICATIONS OF ENGINEERING PERSONNEL.....5
 CLASS II PERMISSIVE CHANGE INFORMATION REQUESTED BY GRANTEE - Rule part 2.1043 (b)(2).....6
 GENERAL INFORMATION ABOUT THE GRANTEE AND CERTIFICATED EQUIPMENT -2.1043 (b)(2).....7
 DATA AND CHARACTERISTICS NOT AFFECTED BY THE CHANGE - Rule Part Number: 2.1033
 (c).(8),(9),(10),(11),(12),(15),(16).....8
 DATA AND CHARACTERISTICS AFFECTED BY THE CHANGE - Rule Part Number:2.1033(c)
 (3)(4)(13)(14)9
 TEST DATA Rule Part Number: 2.1033 (c)(14)10
 Emission Designator Determination.....11
 Mask compliance data in support of emission designator 17K0F1D12
 MASK: C, 50W14
 MASK: C, 10W15
 Mask compliance data in support of emission designator 16K4F1D16
 MASK: C, 50W18
 MASK: C, 10W19
 Mask compliance data in support of Emission Designator 8K17F1D.....20
 MASK: D, 50W22
 MASK: D , 10W23
 Mask compliance data in support of Emission Designator 9K67F1D.....24
 MASK: D, 50W26
 MASK: D , 10W27

ANNEXES:

Annex A: Instruction Manual

QUALIFICATIONS OF ENGINEERING PERSONNEL

NAME: Norman Pearl
TITLE: Vice-president Engineering
TECHNICAL EDUCATION: Bachelor of Engineering (Electrical)
(1979) McGill University, Montreal, Canada.
TECHNICAL EXPERIENCE: Professional engineer since 1979
25 Years experience in radio communications

NAME: Constantin Pintilei
TITLE: R&D Test Engineer
TECHNICAL EDUCATION: Bachelor of Science Degree in Radiotechnique Electronic Engineering
(1993) Technical University of Iasi, Romania.
TECHNICAL EXPERIENCE: Professional Engineer since 2001
8 Years experience in radio frequency measurements.

CLASS II PERMISSIVE CHANGE INFORMATION REQUESTED BY GRANTEE - Rule part 2.1043 (b)(2)

The latest certification EOTGPDA has been granted to Dataradio Inc on 12/04/2001 for its Gemini/PD radio modem. Gemini/PD is comprised of the Dataradio COR Ltd. (DRL) Mobile Data Platform (MDP) UHF (403 MHz-512MHz) Transceiver with the Dataradio Inc Gemini Modem. Dataradio Inc does the final assembly and markets the Gemini/PD unit.

- The certificate, comprising its several Class II permissive changes already underwent, has been granted for:
- 8K60, 15K0 and 15K3F1D for respectively 9.6, 16.0 and 19.2kbps DGMSK– Differential Gaussian Minimum Shift Keying digital modulation
 - 16K8,15K6,16K0, 8K17 and 8K67F1D for respectively 32.0, 25.6,19.2,16.0 and 14.4kbps xRC4FSK – family of Raised Cosine 4-level Frequency Shift Keying

The current Class II permissive change request asks for following four new 8-FSK modulations along with their emission designators: 17K0, 16K4, 8K17 and 9K67F1D for respectively 48.0, 43.2, 24.0 and 21.6 kbps 8-FSK SRRC digital modulations.

Only the 17K0, 16K4, and 9K67F1D emission designators are suggested to be appended to the current list, 8K17F1D value is already in use for other above mentioned speeds.

Following the FCC part 2.1043(b)(2) rule, in order to market the proposed change we must obtain the acknowledgment of the Commission that the change is acceptable. Therefore a Class II Permissive Change request from the certificate granted on 12/04/2001 has been considered.

The characteristics affected are :

- | | |
|--|------------------------------|
| Digital Modulation Techniques | - part 2.1033.(c)(13) |
| Type of emission and Emission designators list | - part 2.1033 (c)(4), 90.209 |
| Occupied bandwidth and mask compliance requirement | - part 2.1049,90.210(j) |

They are entirely documented with the current report.

Because this change is implemented in the operating firmware only, there are no change whatsoever occurring in schematics, part list, mechanical assembly, shape, label or any other hardware related issues. A preliminary version of the manual that contains appended service-related information for 8 level FSK modulation rates is provided as appendix of the report.

GENERAL INFORMATION ABOUT THE GRANTEE AND CERTIFICATED EQUIPMENT -2.1043 (b)(2)

(as per Rule Part Number: 2.1033 (c).(1),(2),(5),(6),(7))

APPLICANT/GRANTEE: Dataradio Inc.,
5500 Royalmount Ave, suite 200,
Town of Mount Royal, Quebec, Canada, H4P 1H7

MANUFACTURER: Dataradio COR Ltd., Waseca, MN 56093 (MDP Transceiver)
DATARADIO Inc., Town of Mount Royal, Quebec, Canada, H4P 1H7
(Gemini- final assembly)

MODEL NUMBER: GEMINI/PD
PART NUMBER: GPDD-6045-xyz

SERIAL NUMBER (S): 0000-prototype 8-level FSK Gemini modem
6045- 11321 -154 production MDP transceiver

FCC ID NUMBER: EOTGPDA
FCC RULES AND REGS: FCC Part (s) 90

FREQUENCY RANGE: 403.000 MHz - 512.000 MHz (406-406.1 MHz software blocked)

MAXIMUM POWER RATING: 50.00 Watts (10-50 watts variable).

NUMBER OF CHANNELS: 16 Channel Modem


INPUT IMPEDANCE: 50 ohms, Nominal

VOLTAGE REQUIREMENTS: 10.9-16.3VDC (13.6 VDC Nominal)

EQUIPMENT IDENTIFICATION:

<u>TRADE NAME</u>	<u>DESCRIPTION</u>	<u>DRI PART NUMBER</u>
MDP6000	403-520 XCVR	242-604C-MRB
Gemini	Modem	050-03322-00x

DRL Part Number System for MDP:

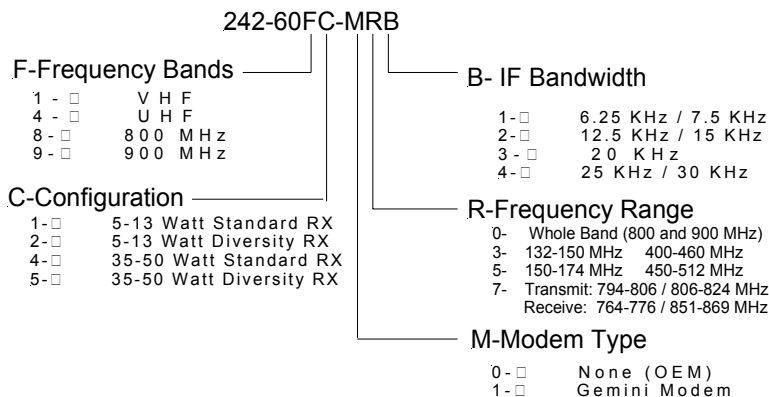

DATA AND CHARACTERISTICS NOT AFFECTED BY THE CHANGE - Rule Part Number: 2.1033 (c).(8),(9),(10),(11),(12),(15),(16)

DC Voltages And Currents Into Final Amplifier	2.1033 (c).(8)
Transmitter Tune Up Procedure	2.1033 (c).(9)
Description Of Circuitry	2.1033 (c).(10)
Schematics	2.1033 (c).(10)
Transistor, Diode, And IC Functions	2.1033 (c).(10)
FCC Label	2.1033 (c).(11)
Photographs	2.1033 (c). (12)
Data addressing Rule Part Number	2.1033 (c).(15),(16): this unit is not designed for the mentioned purposes
Spectrum efficiency standard	90.203 (j) (48000 bps /25kHz)>(4*4800 bps/4*6.25kHz)
Test results not affected by the change	2.1033(c).(14) , 2.1041
Test data according to:	
	Part 2: 2.1046, 2.1051, 2.1053, and 2.1055
	Part 90, Subpart I: 90.213.
as follow:	
Transmitter Rated Power Output	2.1046
Transmitter Spurious And Harmonic Outputs	2.1051
Field Strength Of Spurious Radiation	2.1053
Frequency Stability and Frequency Tolerance	2.1055,90.213

**DATA AND CHARACTERISTICS AFFECTED BY THE CHANGE - Rule Part Number:2.1033(c)
(3)(4)(13)(14)**

INSTRUCTION BOOK 2.1033 (c) (3)
Annex A . The attached Installation Guide for the GEMINI/PD Transceiver/Modem/GPS is a preliminary version.

TYPE OF EMISSION: 2.1033(c)(4)

For Class II Permissive Change 8levelFSK 25kHz BW (16000baud, 8 FSK) **17K0F1D**
25kHz BW (14400baud, 8 FSK) **16K0F1D**
12.5kHz BW (8000baud, 8 FSK) **8K17F1D**
12.5kHz BW (7200baud, 8 FSK) **9K67F1D**

Previously granted for EOTGPDA 12.5KHz BW (9600bps) **8K60F1D**
25KHz BW (16.0Kbps) **15K3F1D**
25KHz BW (19.2Kbps) **15K0F1D**
25kHz BW (12800baud, 4 FSK) **15K6F1D**
25kHz BW (9600baud, 4 FSK) **16K0F1D**
12.5kHz BW (8000baud, 4 FSK) **8K17F1D**
12.5kHz BW (7200baud, 4 FSK) **8K67F1D**
25kHz BW (16000baud, 4 FSK) **16K8F1D**

DIGITAL MODULATION TECHNIQUES 2.1033 (c)(13)

The Gemini modem generates 2 level Differential Gaussian Frequency Shift Keying (DGFSK) and 2ⁿ level family Raised Cosine Frequency Shift Keying. (xRC nFSK). 2-level DGFSK and 4-level xRC has been granted with the certificate EOTGPDA. This measurement concerns only 8-level xRC (raised cosine family) modulation, its description follows.

This digital modulation scheme is produced by the main CPU in conjunction with the DSP. The main CPU processes incoming binary data, applying Forward Error Correction (FEC), interleaving and scrambling, and from it generates an NRZ signal that is fed to the DSP processor for encoding and pulse shaping. The DSP processor assigns to every incoming group of three bits a symbol recorded in a level of frequency shift. The mapping follows a Gray scheme:100-highest positive frequency, 101-next highest positive, etc, to 000-lowest negative, resulting signal being a 8-DC level digital.

This 8-level signaling transmits three information bits per symbol (baud) which yields a bit rate of three times the on-air baud rate, hence the 28.8 kbps references in the Installation Guide correspond to a transmitter baud rate of 9600 baud. That digital signal is digitally filtered (Squared Root or pure Raised Cosine pulse shaping with roll off factor 0.4) by the DSP then fed to the CODEC for digital to analogue conversion. This xRC8FSK wave shape applied to the FM modulator will then produce a compact RF spectrum, when using proper frequency deviation, to fit inside the restrictive masks inherent to the intended channel bandwidth.

The transmitter deviation level and digital filter cutoff frequency (which is based on the raised cosine filter equation) are set according to the bit rate selected and channel bandwidth as shown in page 10.

Modulation Characteristic Part 2.1047 (d), 90.209 (b) 90.210(c),(d): Other types of equipment: this equipment is not provided with hardware audio low-pass filters, the filtering is entirely result of DSP firmware.

The transmitter deviation level and digital filter cutoff frequency (which is based on the raised cosine filter equation) are set according to the bit rate selected and channel bandwidth as follows:

Bit rate	Baud rate	Raised Cosine filter's 3dB cut-off frequency	Deviation
48000 b/s	16000bauds	8.0 kHz	± 5.1 kHz
43200 b/s	14400bauds	7.2kHz	± 5.2 kHz
24000 b/s	8000bauds	4.0 kHz	± 2.5 kHz
21600 b/s	7200bauds	3.6 kHz	± 3.9 kHz

TEST DATA Rule Part Number: 2.1033 (c)(14)

All applicable test data according to:

-Part 2: 2.1043 (b)(2), 2.1049

-Part 90, Subpart I: 90.209 and 90.210(c),(d)

are provided in next section of this Engineering Report

The following test reports have been generated for Class II Permissive Change notification for EOTGPDA, Gemini/PD radio modem. Gemini/PD is comprised of the Dataradio COR Ltd. (DRL) Mobile Data Platform (MDP) UHF Transceiver with the Dataradio Inc Gemini Modem. Dataradio Inc does the final assembly and markets the Gemini/PD unit

The measurements were conducted following the procedures set forth in the TIA/EIA-603 revA standards.

NAME OF TEST:

Transmitter Occupied Bandwidth

RULE PART NUMBER: 2.201, 2.202, 2.1033 c (14), 2.1049 (h), 2.1041

Emission Designator Determination

Necessary Bandwidth Measurement (90.209.(b))

This radiomodem uses digital modulation signals, passing through a Raised Cosine $\alpha=0.4$ DSP implemented low-pass filter to an FM transceiver. The necessary bandwidth calculation for this type of modulation (xRC8FSK) is not covered by paragraphs (1), (2) or (3) from 2.202(c), the result exceeding the real 99% necessary bandwidth obtained through simulations or measurement.

Therefore, the approach outlined in (2.202(c)(4)) is applicable in this case.

The results of 99% Occupied Bandwidth measurement are:

Bit rate	Baud rate	Deviation	Occupied Bandwidth	Authorised Bandwidth	Proposed Emission Designator
48000 b/s	16000bauds	± 5.1 KHz	17000 Hz	20000Hz	17K0F1D
43200 b/s	14400bauds	± 5.2 KHz	16330 Hz	20000Hz	16K4F1D
24000 b/s	8000bauds	± 2.5 KHz	8167 Hz	11250Hz	8K17F1D
21600 b/s	7200bauds	± 3.0 KHz	9667 Hz	11250Hz	9K67F1D

The measurement theory and set-up explanations follow.


Occupied Bandwidth Measurement

The Occupied Bandwidth measurement option of the instrument (8563EC spectrum analyzer from Agilent) calculates and provides the values used above for the emission designator.

The percentage setting of the measurement has been set to 99% following the definition of the **Occupied Bandwidth** “the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers radiated are each equal to 0.5 percent of the total mean power radiated by a given emission” (FCC 2.202)

The measurement has been performed during the tests for compliance with mask G, the resulting value was recorded as Occupied Bandwidth.

The measurement set-up is:

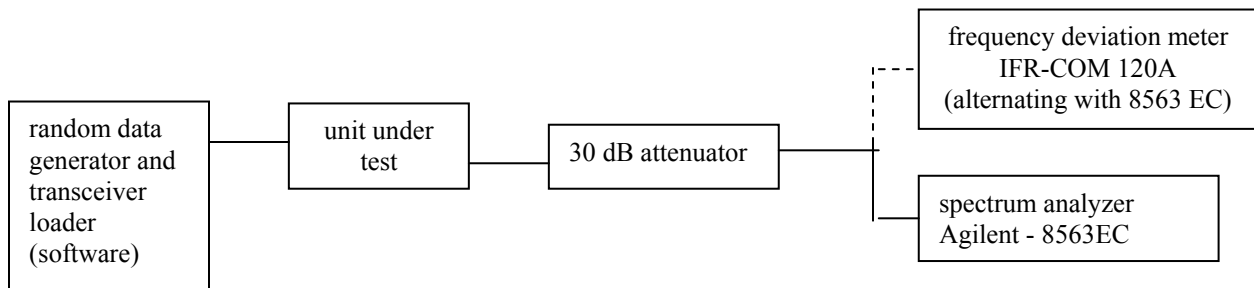

NAME OF TEST: Transmitter Occupied Bandwidth
GEMINI Modem at 16000bauds xRC8FSK

Mask compliance data in support of emission designator 17K0F1D

RULE PART NUMBER: 2.201, 2.202, 2.1033 c (14), 2.1041, 2.1049, 90.209 (b)(5), 90.210 (c)

MINIMUM STANDARD: Mask C
 Sidebands and Spurious [Rule 90.210 (c)]
 Authorized Bandwidth = 20 kHz [Rule 90.209(b) (5)]
 Fo to 5.0 kHz Attenuation = 0 dB
 >5.0 kHz to 10.0 kHz Attenuation= 83*log(f_d /5) dB
 >10.0 kHz to 250% Auth BW Attenuation = Lesser of:
 29*log(f_d^2 /11) dB or 50dB
 >250% Auth BW 43 + 10*log(P) dB

Corner Points:
 Fo to 5.0 kHz Attenuation = 0 dB
 >5.0 kHz to 10.0 kHz Attenuation= 0 dB to 25 dB
 >10.0 kHz to 20 kHz Attenuation = 27.8 dB to 45.2 dB
 >20 kHz to 24 kHz Attenuation =45.2 dB to 50 dB
 >24 kHz to 50kHz Attenuation =50dB
 >250% Authorized BW Attenuation = 63 dB

TEST RESULTS: Meets minimum standard (see data on the following pages)

TEST CONDITIONS: Standard Test Conditions, 25 C

TEST EQUIPMENT: Attenuator, BIRD Model / 150-A-MFN-30 / 30 dB / 150 Watt
 Splitter Minicircuits model ZFSC-2-4
 DC Power Source, Model Astron VS 20M
 Communication Analyzer, Model IFR COM120B (deviation meter)
 Spectrum Analyzer, Model HP E4401


PERFORMED BY: 

 Constantin Pintilei

DATE: 11/25/2001

NAME OF TEST: Transmitter Occupied Bandwidth (Continued)
 GEMINI Modem at 16000 bauds / RC8FSK

TEST SET-UP:

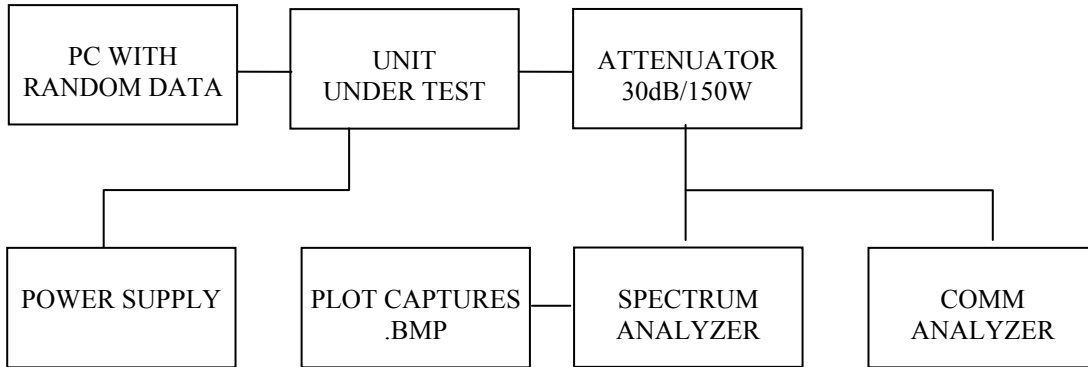

MODULATION SOURCE DESCRIPTION:

TX Data Test Pattern:

The transmit “test data” pattern command produces a 2047 bit pseudo-random pattern. This pattern is generated by the internal software using the polynomial $X^{11}+X^9+1$ form and a 12-bit shift register. Initial value of the register is 11111111110 (FFE hex). The 2047 bit sequence is repeated thereafter as long is necessary to complete the test duration (55 sec). This pattern is applied to the DSP processor data input for encoding and 4 FSK RC $\alpha=0.4$ pulse shaping .

This data follows same modulation process as described in Digital Modulation Techniques (page 9) and the resulting base band signal feeds the modulator's input of the transceiver.

For 16000 baud rate the deviation is set to 5.10kHz using a 1kHz tone to control the deviation level.

NECESSARY BANDWIDTH (Bn) CALCULATION

See Page 11 for emission designator determination.

The corresponding emission designator prefix for necessary bandwidth = **17K0F1D**

TEST DATA: Refer to the following graphs:

MASK: C, 50W


OUTPUT POWER: 50 Watts

48000 bps /16000 bauds 8 level FSK

Digital filters RC 0.4

PEAK DEVIATION = 5100 Hz

SPAN = 100 kHz

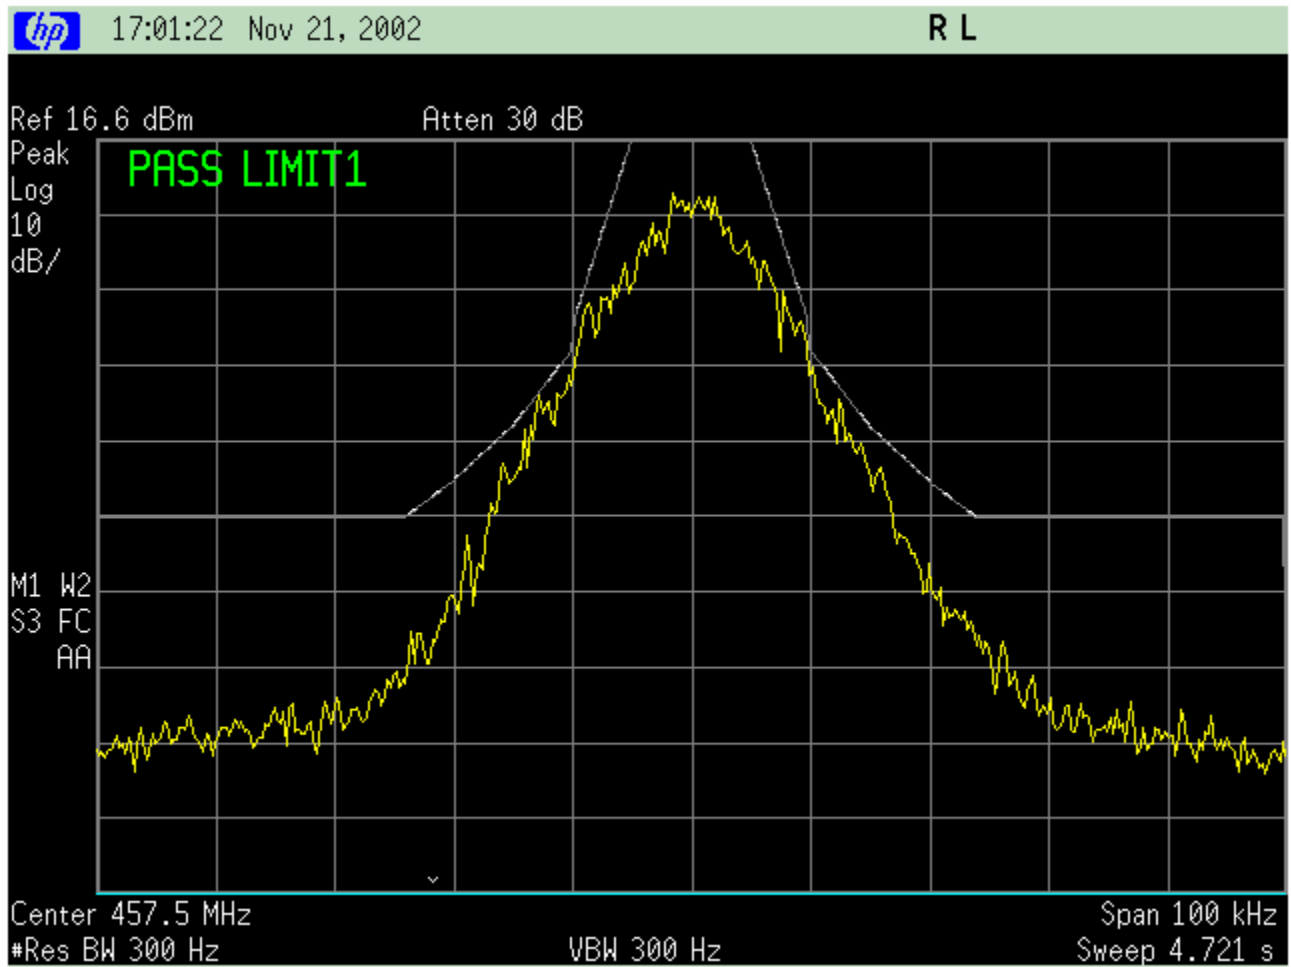

MASK: C, 10W


OUTPUT POWER: 10 Watts

48000 bps /16000 bauds 8 level FSK

Digital filter RC 0.4

PEAK DEVIATION = 5100 Hz

SPAN = 100 kHz

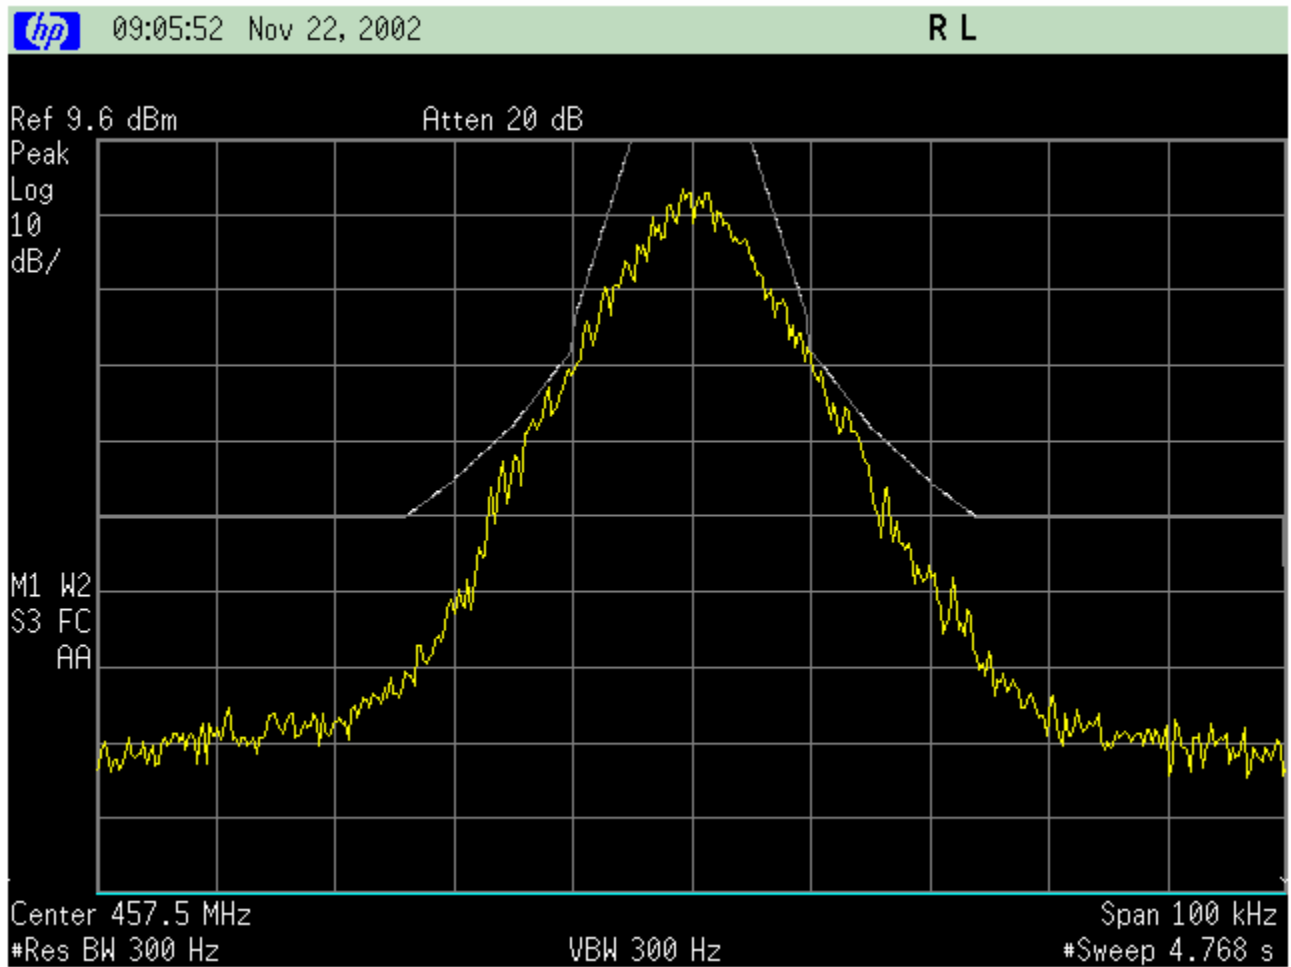

NAME OF TEST: Transmitter Occupied Bandwidth
GEMINI Modem at 11400bauds xRC8FSK

Mask compliance data in support of emission designator 16K4F1D

RULE PART NUMBER: 2.201, 2.202, 2.1033 c (14), 2.1041, 2.1049, 90.209 (b)(5), 90.210 (c)

MINIMUM STANDARD: Mask C
 Sidebands and Spurious [Rule 90.210 (c)]
 Authorized Bandwidth = 20 kHz [Rule 90.209(b) (5)]
 Fo to 5.0 kHz Attenuation = 0 dB
 >5.0 kHz to 10.0 kHz Attenuation= 83*log(f_d /5) dB
 >10.0 kHz to 250% Auth BW Attenuation = Lesser of:
 29*log(f_d^2 /11) dB or 50dB
 >250% Auth BW 43 + 10*log(P) dB

Corner Points:
 Fo to 5.0 kHz Attenuation = 0 dB
 >5.0 kHz to 10.0 kHz Attenuation= 0 dB to 25 dB
 >10.0 kHz to 20 kHz Attenuation = 27.8 dB to 45.2 dB
 >20 kHz to 24 kHz Attenuation =45.2 dB to 50 dB
 >24 kHz to 50kHz Attenuation =50dB
 >250% Authorized BW Attenuation = 63 dB

TEST RESULTS: Meets minimum standard (see data on the following pages)

TEST CONDITIONS: Standard Test Conditions, 25 C

TEST EQUIPMENT: Attenuator, BIRD Model / 150-A-MFN-30 / 30 dB / 150 Watt
 Splitter Minicircuits model ZFSC-2-4
 DC Power Source, Model Astron VS 20M
 Communication Analyzer, Model IFR COM120B (deviation meter)
 Spectrum Analyzer, Model HP E4401


PERFORMED BY: 

 Constantin Pintilei

DATE: 11/25/2001

NAME OF TEST: Transmitter Occupied Bandwidth (Continued)
 GEMINI Modem at 14400 bauds / RC8FSK

TEST SET-UP:

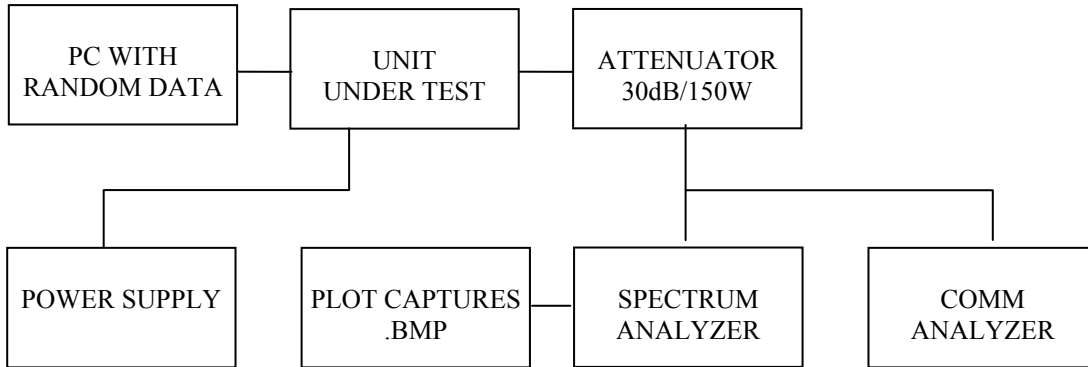

MODULATION SOURCE DESCRIPTION:

TX Data Test Pattern:

The transmit “test data” pattern command produces a 2047 bit pseudo-random pattern. This pattern is generated by the internal software using the polynomial $X^{11}+X^9+1$ form and a 12-bit shift register. Initial value of the register is 11111111110 (FFE hex). The 2047 bit sequence is repeated thereafter as long is necessary to complete the test duration (55 sec). This pattern is applied to the DSP processor data input for encoding and 4 FSK RC $\alpha=0.4$ pulse shaping .

This data follows same modulation process as described in Digital Modulation Techniques (page 9) and the resulting base band signal feeds the modulator's input of the transceiver.

For 14400 baud rate the deviation is set to 5.23kHz using a 1kHz tone to control the deviation level.

NECESSARY BANDWIDTH (Bn) CALCULATION

See Page 11 for emission designator determination.

The corresponding emission designator prefix for necessary bandwidth = **16K4F1D**

TEST DATA: Refer to the following graphs:

MASK: C, 10W


OUTPUT POWER: 10 Watts

43200 bps /14400 bauds 8 level FSK

Digital filter RC 0.4

PEAK DEVIATION = 5230 Hz

SPAN = 100 kHz

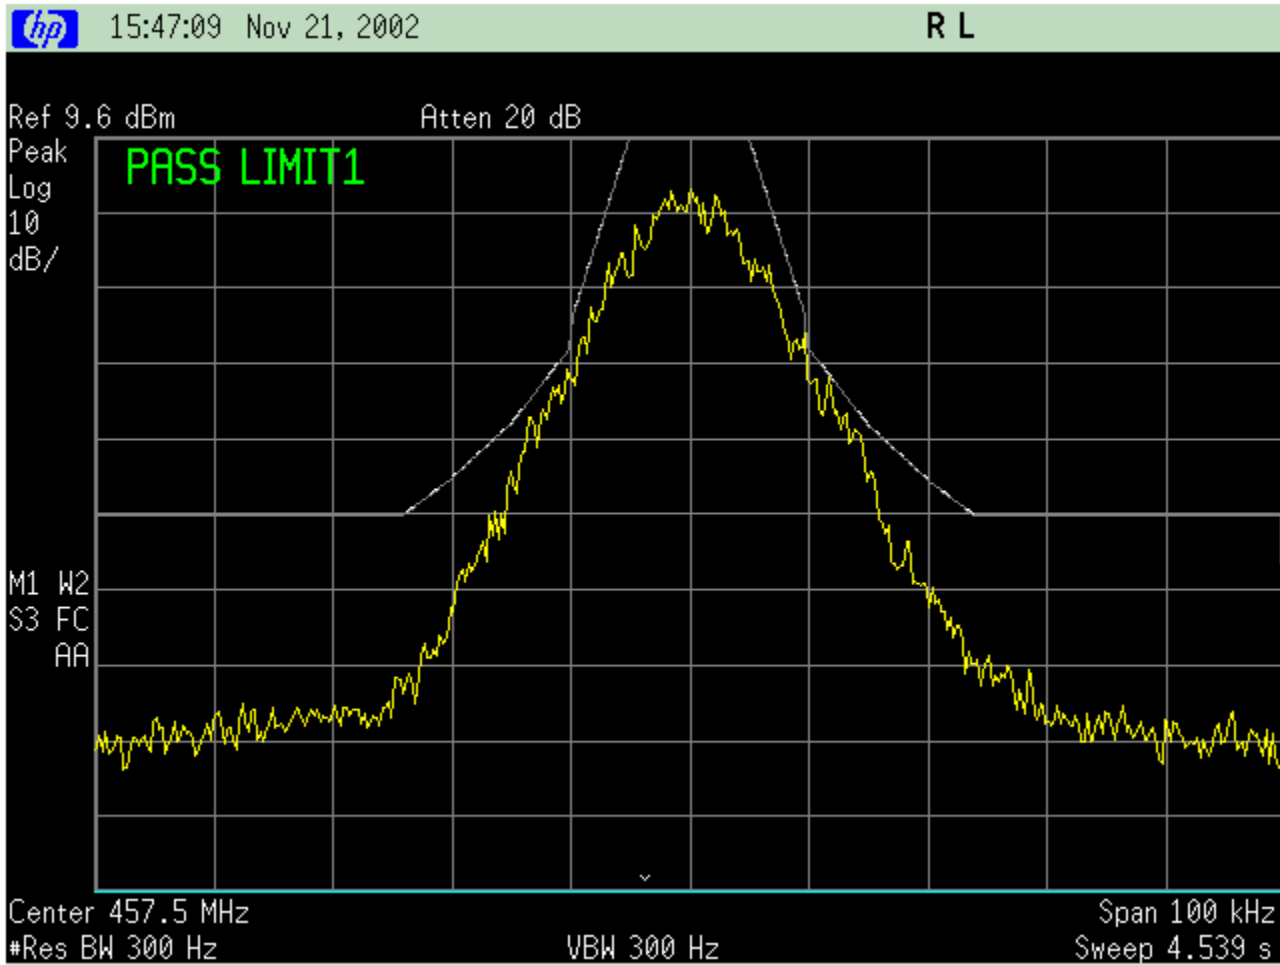

NAME OF TEST: Transmitter Occupied Bandwidth
GEMINI Modem at 8000bauds 8FSK

Mask compliance data in support of Emission Designator 8K17F1D

RULE PART NUMBER: 2.201, 2.202, 2.1033 c (14), 2.1049 (h), 2.1041, 90.209 (b)(5), 90.210 (d)

MINIMUM STANDARD: Mask D
Sidebands and Spurious [Rule 90.210 (d)]
Authorized Bandwidth = 11.25 kHz [Rule 90.209(b) (5)]
Fo to 5.625 kHz Attenuation = 0 dB
>5.625 kHz to 12.5 kHz Attenuation= 7.27(f_d -2.88kHz) dB
>12.5 kHz Lesser of [50 + 10*log(P)] dB or 70dB
Corner Points:
Fo to 5.625 kHz Attenuation = 0 dB
>5.625 kHz to 12.5 kHz Attenuation= 20 dB to 70 dB
>12.5 kHz Attenuation =60dB (10W), 67dB (50W)


TEST RESULTS: Meets minimum standard (see data on the following pages)

TEST CONDITIONS: Standard Test Conditions, 25 C
TEST EQUIPMENT: Attenuator, BIRD Model / 50-A-MFN-30 / 30 dB / 50 Watt
DC Power Source, Model Astron VS 20M
Communication Analyzer, Model IFR COM120A (deviation meter)
Spectrum Analyzer, Model Agilent (HP) 8563EC

Constantin Pintilei

PERFORMED BY: _____ DATE: 11/25/02
Constantin Pintilei

TEST SET-UP:

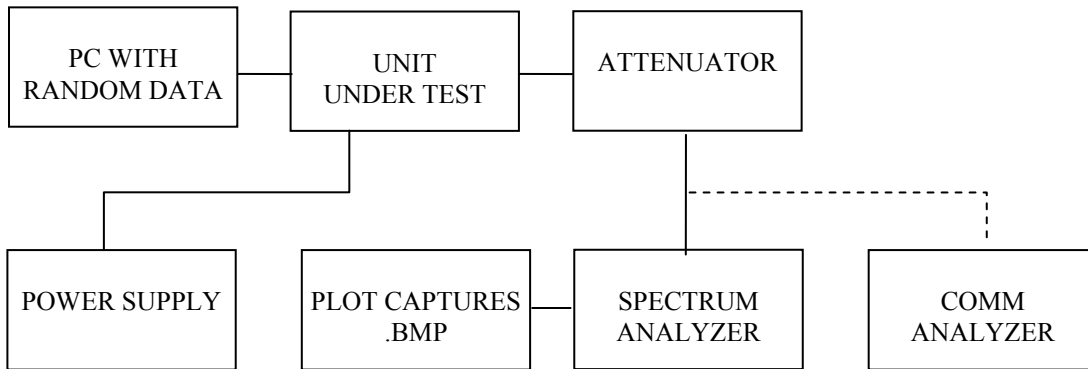

NAME OF TEST: Transmitter Occupied Bandwidth (Continued)
GEMINI Modem at 8000 bauds, 8FSK
In Support of Emission Designator **8K17F1D**

MODULATION SOURCE DESCRIPTION:

TX Data Test Pattern:

The transmit “test data” pattern command produces a 2047 bit pseudo-random pattern. This pattern is generated by the internal software using the polynomial $X^{11}+X^9+1$ form and a 12-bit shift register. Initial value of the register is 11111111110 (FFE hex). The 2047 bit sequence is repeated thereafter as long is necessary to complete the test duration (55 sec). This pattern is applied to the DSP processor data input for encoding and pulse shaping as described above.

This data follows same modulation process as described in Digital Modulation Techniques (page 9) and the resulting base band signal feeds the modulator's input of the transceiver.

For 8000 baud rate the deviation is set to 2.53kHz.

NECESSARY BANDWIDTH (Bn) CALCULATION

See Page 11 for emission designator determination.

The corresponding emission designator prefix for necessary bandwidth = **8K17F1D**

TEST DATA: Refer to the following graphs:

MASK: D, 50W


SPECTRUM FOR EMISSION 8K17F1D

OUTPUT POWER: 50 Watts

8000 bauds 8 level FSK

PEAK DEVIATION = 2530 Hz

SPAN = 100 kHz

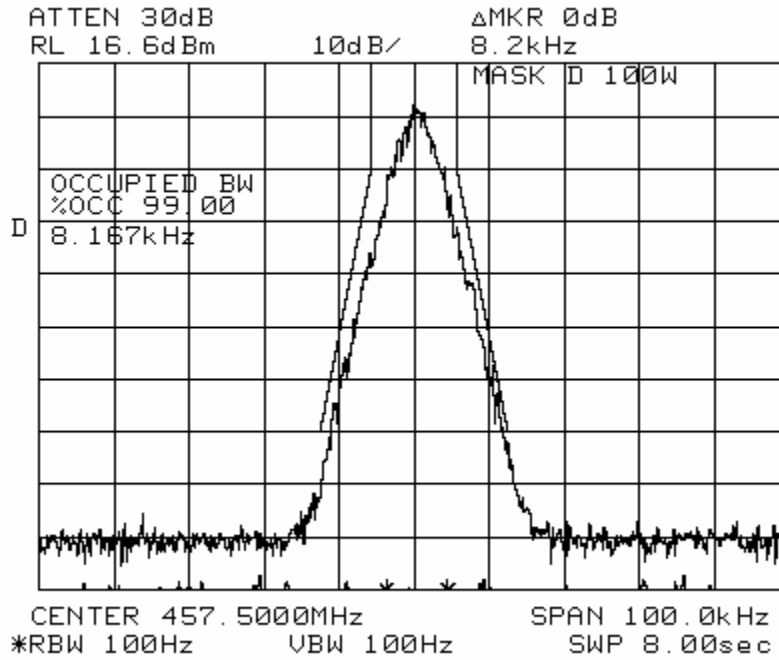

Note: For frequencies spaced more than 12.5kHz from the central frequency the required attenuation is 67dBc at 50W.

MASK: D, 10W


SPECTRUM FOR EMISSION 8K17F1D

OUTPUT POWER: 10 Watts

8000 bauds 8 level FSK

PEAK DEVIATION = 2530 Hz

SPAN = 100 kHz

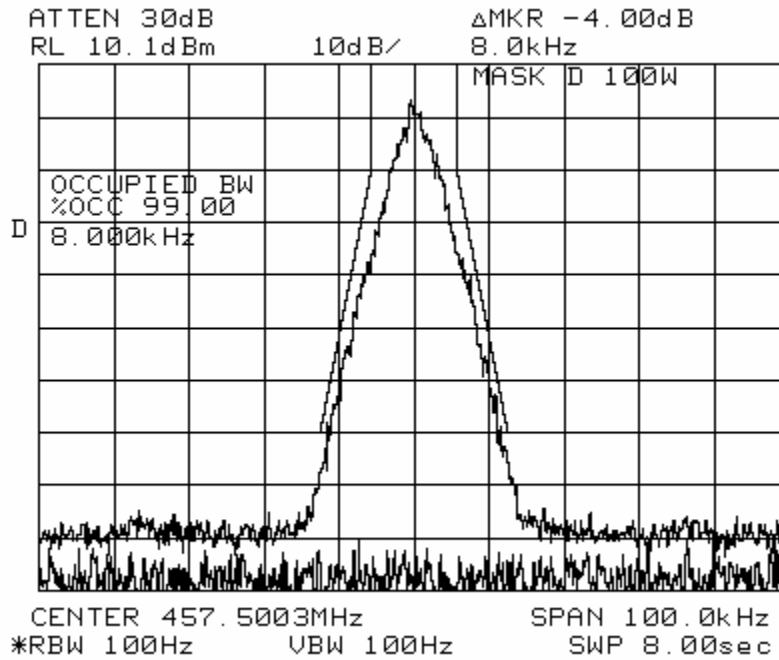

Note: For frequencies spaced more than 12.5kHz from the central frequency the required attenuation is 60dBc at 10W.

NAME OF TEST: Transmitter Occupied Bandwidth
GEMINI Modem at 7200bauds 8FSK

Mask compliance data in support of Emission Designator 9K67F1D

RULE PART NUMBER: 2.201, 2.202, 2.1033 c (14), 2.1049 (h), 2.1041, 90.209 (b)(5), 90.210 (d)

MINIMUM STANDARD: Mask D
Sidebands and Spurious [Rule 90.210 (d)]
Authorized Bandwidth = 11.25 kHz [Rule 90.209(b) (5)]
Fo to 5.625 kHz Attenuation = 0 dB
>5.625 kHz to 12.5 kHz Attenuation= 7.27(f_d -2.88kHz) dB
>12.5 kHz Lesser of [50 + 10*log(P)] dB or 70dB

Corner Points:
Fo to 5.625 kHz Attenuation = 0 dB
>5.625 kHz to 12.5 kHz Attenuation= 20 dB to 70 dB
>12.5 kHz Attenuation =60dB (10W), 67dB (50W)


TEST RESULTS: Meets minimum standard (see data on the following pages)

TEST CONDITIONS: Standard Test Conditions, 25 C
TEST EQUIPMENT: Attenuator, BIRD Model / 50-A-MFN-30 / 30 dB / 50 Watt
DC Power Source, Model Astron VS 20M
Communication Analyzer, Model IFR COM120A (deviation meter)
Spectrum Analyzer, Model Agilent (HP) 8563EC

Constantin Pintilei

PERFORMED BY: _____ DATE: 11/25/02
Constantin Pintilei

TEST SET-UP:

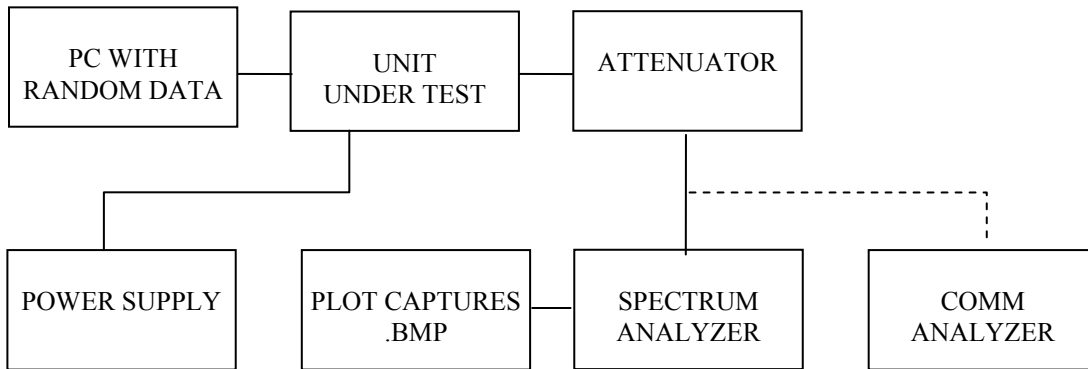

NAME OF TEST: Transmitter Occupied Bandwidth (Continued)
GEMINI Modem at 7200 bauds, 8FSK
In Support of Emission Designator **9K67F1D**

MODULATION SOURCE DESCRIPTION:

TX Data Test Pattern:

The transmit “test data” pattern command produces a 2047 bit pseudo-random pattern. This pattern is generated by the internal software using the polynomial $X^{11}+X^9+1$ form and a 12-bit shift register. Initial value of the register is 11111111110 (FFE hex). The 2047 bit sequence is repeated thereafter as long is necessary to complete the test duration (55 sec). This pattern is applied to the DSP processor data input for encoding and pulse shaping as described above.

This data follows same modulation process as described in Digital Modulation Techniques (page 9) and the resulting base band signal feeds the modulator's input of the transceiver.

For 7200 baud rate the deviation is set to 3.03kHz.

NECESSARY BANDWIDTH (Bn) CALCULATION

See Page 11 for emission designator determination.

The corresponding emission designator prefix for necessary bandwidth = **9K67F1D**

TEST DATA: Refer to the following graphs:

MASK: D, 50W


SPECTRUM FOR EMISSION 9K67F1D

OUTPUT POWER: 50 Watts

7200 bauds 8 level FSK

PEAK DEVIATION = 3030 Hz

SPAN = 100 kHz

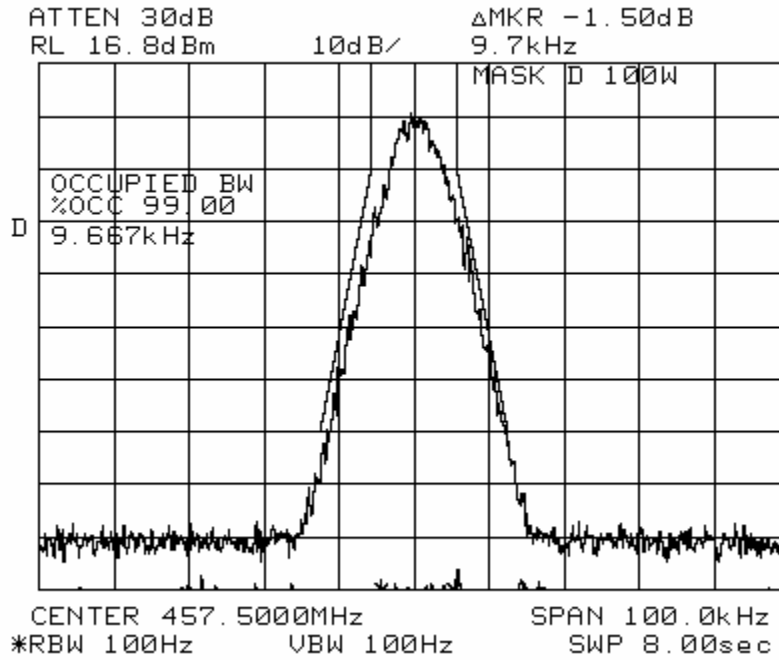

Note: For frequencies spaced more than 12.5kHz from the central frequency the required attenuation is 67dBc at 50W.

MASK: D, 10W


SPECTRUM FOR EMISSION 9K67F1D

OUTPUT POWER: 10 Watts

7200 bauds 8 level FSK

PEAK DEVIATION = 3030 Hz

SPAN = 100 kHz

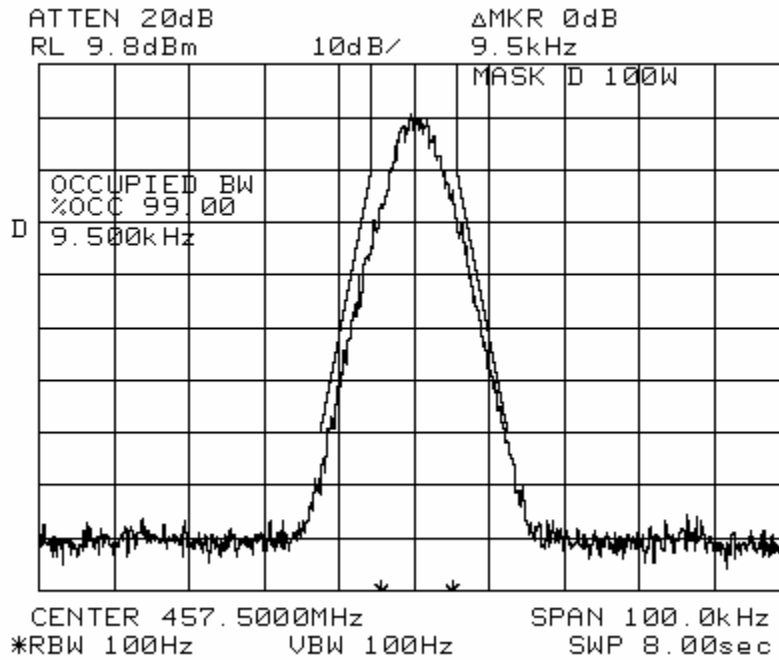

Note: For frequencies spaced more than 12.5kHz from the central frequency the required attenuation is 60dBc at 10W.