

Report No.:

316761853.001

Page 1 of 28

Electromagnetic Compatibility Test Report

Tested to FCC Part 15C & RSS-210 Issue 9 and ANSI C63.10:2013

On

OmniMOVE

Model: M328A

**Timex Group USA Inc.
555 Christian Rd.
Middlebury CT 06787 USA**

Prepared by:

TUV Rheinland of North America, Inc.

The test results contained in this report refer exclusively to the product(s) presented for testing. No liability may be assumed for models or products not referred to herein. This test report may not be published or duplicated in part without permission of the testing body. This test report by itself does not constitute authorization for the use of any TUV Rheinland test mark. The report must not be used by the client to claim product certification, approval, or endorsement by A2LA.

Manufacturer's statement - attestation

The manufacturer; Timex Group USA Inc., as the responsible party for the equipment tested, hereby affirms:

- a) That he has reviewed and concurs that the test shown in this report are reflective of the operational characteristics of the device for which certification is sought;
- b) That the device in this test report will be representative of production units;
- c) That all changes (in hardware and software/firmware) to the subject device will be reviewed.
- d) That any changes impacting the attributes, functionality or operational characteristics documented in this report will be communicated to the body responsible for approving (certifying) the subject equipment.

Sam Everett

Printed name of official

Timex Group USA Inc.
555 Christian Road
Middlebury CT 06787 USA

Address

203-346-5603

Telephone number



Signature of official

17 July 2017

Date




severett@timexgroup.com

Email address of official

The test results contained in this report refer exclusively to the product(s) presented for testing. No liability may be assumed for models or products not referred to herein. This test report may not be published or duplicated in part without permission of the testing body. This test report by itself does not constitute authorization for the use of any TUV Rheinland test mark. The report must not be used by the client to claim product certification, approval, or endorsement by A2LA.

Report No.:
316761853.001

Page 3 of 28

Client:	TIMEX GROUP	Timex Group USA Inc. 555 Christian Rd. Middlebury CT 06787 USA	Sam Everett Ph: 203-346-5603 Fax: 203-346-7163 severett@timexgroup.com
Identification:	OmniMOVE	Serial No.:	PRODUCTION PROTOTYPE
Test item:	Model: M328A	Date tested:	30 June 2017
Testing location:	TUV Rheinland of North America 762 Park Avenue Youngsville, NC 27596-9470 U.S.A.	Tel: (919) 554-3668 Fax: (919) 554-3542	
Test specification:	Emissions: FCC Part 15, Subpart C, RSS-210 Issue 9: FCC Parts 15.207(a):2017 and RSS-GEN I4 clause 8.8, FCC Parts 15.249(d), 15.209, 15.215(c), RSS-210 I9 clause B.10, RSS-GEN I4 clauses 8.9 and 8.10, FCC Part 15.249:2017 and RSS-210 Annex B.10, FCC Parts 15.249(a):2017, 15.249(c):2017, RSS-210 B.10(a), FCC Part 2.1093:2017 and RSS-102, Issue 4		
Test Result	The above product was found to be Compliant to the above test standard(s)		
tested by: Mark Ryan		reviewed by: Robert Richards	
18 July 2017 <i>Signature</i>		18 July 2017 <i>Signature</i>	
Other Aspects:	None		
Abbreviations:	OK, Pass, Compliant, Complies = passed Fail, Not Compliant, Does Not Comply = failed N/A = not applicable		
			Industry Canada
90552 and 100881	Testing Cert #3331.05		2932H-1 and 2932H-2

The test results contained in this report refer exclusively to the product(s) presented for testing. No liability may be assumed for models or products not referred to herein. This test report may not be published or duplicated in part without permission of the testing body. This test report by itself does not constitute authorization for the use of any TUV Rheinland test mark. The report must not be used by the client to claim product certification, approval, or endorsement by A2LA.

TABLE OF CONTENTS

1	GENERAL INFORMATION	5
1.1	SCOPE	5
1.2	PURPOSE	5
1.3	REVISION HISTORY	5
1.1	SUMMARY OF TEST RESULTS	6
2	LABORATORY INFORMATION	7
2.1	ACCREDITATIONS	7
2.2	EXPANDED MEASUREMENT UNCERTAINTY	8
2.3	CALIBRATION TRACEABILITY	9
2.4	MEASUREMENT EQUIPMENT USED	10
3	PRODUCT INFORMATION	10
3.1	PRODUCT DESCRIPTION	10
3.2	EQUIPMENT MODIFICATIONS	10
3.3	EQUIVALENT MODELS	10
3.4	TEST PLAN	10
4	RADIATED EMISSIONS IN TRANSMIT MODE	11
4.1	RADIATED EMISSIONS - FCC PARTS 15.249, RSS-210 B.10	11
4.2	BAND EDGE REQUIREMENTS - FCC PART 15.249(D), RSS-GEN	21
4.1	CONDUCTED EMISSIONS ON AC MAINS – FCC 207(A) AND RSS-GEN 8.8	24
4.2	99% POWER BANDWIDTH	25
5	TEST DOCUMENTATION REQUIREMENTS - TRANSMITTERS	27
5.1	GENERAL INFORMATION	27

The test results contained in this report refer exclusively to the product(s) presented for testing. No liability may be assumed for models or products not referred to herein. This test report may not be published or duplicated in part without permission of the testing body. This test report by itself does not constitute authorization for the use of any TUV Rheinland test mark. The report must not be used by the client to claim product certification, approval, or endorsement by A2LA.

1 General Information

1.1 Scope

This report is intended to document the status of conformance with the requirements of the standard(s), based on the results of testing performed on 30 June 2017 on the OmniMOVE, Model No. M328A, manufactured by Timex Group USA Inc. This report only applies to the specific samples tested under the stated test conditions. It is the responsibility of the manufacturer to assure that additional production units of this model are manufactured with identical or EMI equivalent electrical and mechanical components. This report is further intended to document changes and modifications to the EUT throughout its life cycle. All documentation will be included as a supplement.

1.2 Purpose

Testing was performed to evaluate the EMC performance of the EUT (Equipment Under Test) in accordance with the applicable requirements, procedures, and criteria defined in the application of regulations and application of standards listed in this report.

1.3 Revision History

Rev.	Date	Description of Revision
.001	18 July 2017	Initial Release

The test results contained in this report refer exclusively to the product(s) presented for testing. No liability may be assumed for models or products not referred to herein. This test report may not be published or duplicated in part without permission of the testing body. This test report by itself does not constitute authorization for the use of any TUV Rheinland test mark. The report must not be used by the client to claim product certification, approval, or endorsement by A2LA.

Report No.:
316761853.001

Page 6 of 28

1.1 Summary of Test Results

Applicant	Timex Group USA Inc. 555 Christian Rd Middlebury CT 06787 USA	Tel	203-346-5603	Contact	Sam Everett
		Fax	203-346-7163	e-mail	severett@timexgroup.com
Description	OmniMOVE Watch	Model	M328A		
Serial Number	Production Prototype	Test Voltage/Freq.	3 V DC Lithium battery		
Test Date Completed:	30 June 2017	Test Engineer	Mark Ryan		
Standards	Description	Severity Level or Limit	Worst-case Values	Test Result	
FCC Part 15, Subpart C Standard	Radio Frequency Devices- Subpart C: Intentional Radiators	See called out parts below	See Below	Complies	
RSS-210 Issue 9 Standard	Low-Power Licence-exempt Radiocommunication Devices Category I Equipment	See called out parts below	See Below	Complies	
FCC Part 15.249:2017 and RSS-210 Annex B.10	Operation within the band 2400 to 2483.5 MHz	See called out parts below	See Below	Complies	
FCC Parts 15.249(a):2017, 15.249(c):2017, RSS-210 B.10(a)	Radiated Output Power for Fundamental and Harmonic Frequencies	Fund: Shall not exceed 50 mV/m at 3m Harmonics: Shall not exceed 500µV/m (0.5 mV/m) at 3m, (unrestricted bands)	4.49 mV/m 50.0 µV/m -	Complies	
FCC Parts 15.249(d):2017, 15.209, 15.215(c):2017, RSS-210 I9 clause B.10, RSS-GEN I4 clauses 8.9 and 8.10	Out-of-Band Spurious Emissions and Band Edges (EUT in Transmit Mode)	Below the applicable limits	33.93 dBµV	Complies	
FCC Parts 15.207(a):2017 and RSS-GEN I4 clause 8.8	Conducted Emissions on AC Mains	NA, The EUT is battery operated only	NA	NA	
RSS-GEN I4 clause 6.6	Occupied Bandwidth	99% BW ≤ 0.5% of center freq.	1.058 MHz	Complies	
FCC Part 2.1093:2017 and RSS-102, Issue 4	RF Exposure and Antenna Gain Calculation	SAR or MPE Requirements	0.318 mW	Complies	

The test results contained in this report refer exclusively to the product(s) presented for testing. No liability may be assumed for models or products not referred to herein. This test report may not be published or duplicated in part without permission of the testing body. This test report by itself does not constitute authorization for the use of any TUV Rheinland test mark. The report must not be used by the client to claim product certification, approval, or endorsement by A2LA.

2 Laboratory Information

2.1 Accreditations

2.1.1 US Federal Communications Commission

TUV Rheinland of North America located at 762 Park Avenue, Youngsville, NC 27596-9470 is accredited by the commission for performing testing services for the general public on a fee basis. This laboratory test facilities have been fully described in reports submitted to and accepted by the FCC (Registration No 90552 and 100881). The laboratory scope of accreditation includes: Title 47 CFR Part 15, and 18. The accreditation is updated every 3 years.

2.1.2 ILAC / A2LA

The laboratory has been assessed and accredited by A2LA in accordance with ISO Standard 17025:2005 (Certificate Number: 3331.05, Master Code: 134288). The scope of laboratory accreditation includes emission and immunity testing. The accreditation is updated annually.

2.1.3 Innovation, Science and Economic Development Canada (ISED)

Registration No.: 2932H-1 The OATS has been accepted by ISED to perform testing to 3 and to 10 meters, based on the test procedures described in ANSI C63.4.

Registration No.: 2932H-2 The 5 meter chamber has been accepted by ISED to perform testing to 3 meters, based on the test procedures described in ANSI C63.4.

2.1.4 Japan – VCCI

The Voluntary Control Council for Interference by Information Technology Equipment (VCCI) is a group that consists of Information Technology Equipment (ITE) manufacturers and EMC test laboratories. The purpose of the Council is to take voluntary control measures against electromagnetic interference from Information Technology Equipment, and thereby contribute to the development of a socially beneficial and responsible state of affairs in the realm of Information Technology Equipment in Japan. TUV Rheinland at the 762 Park Ave. Youngsville, N.C 27596 address has been assessed and approved in accordance with the Regulations for Voluntary Control Measures. (Laboratory Registration No: A-0034).

The test results contained in this report refer exclusively to the product(s) presented for testing. No liability may be assumed for models or products not referred to herein. This test report may not be published or duplicated in part without permission of the testing body. This test report by itself does not constitute authorization for the use of any TUV Rheinland test mark. The report must not be used by the client to claim product certification, approval, or endorsement by A2LA.

2.1.5 Sample Calculation – radiated & conducted emissions

The field strength is calculated by subtracting the Amplifier Gain and adding the Cable Loss and Antenna Correction Factor to the measured reading. The basic equation is as follows:

$$\text{Field Strength (dB}\mu\text{V/m)} = \text{RAW} - \text{AMP} + \text{CBL} + \text{ACF}$$

Where: RAW = Measured level before correction (dB μ V)

AMP = Amplifier Gain (dB)

CBL = Cable Loss (dB)

ACF = Antenna Correction Factor (dB/m)

$$\mu\text{V/m} = 10^{\frac{\text{dB}\mu\text{V/m}}{20}}$$

Sample radiated emissions calculation @ 30 MHz

Measurement + Antenna Factor – Amplifier Gain + Cable loss = Radiated Emissions (dB μ V/m)

$$25 \text{ dB}\mu\text{V/m} + 17.5 \text{ dB} - 20 \text{ dB} + 1.0 \text{ dB} = 23.5 \text{ dB}\mu\text{V/m}$$

2.2 Expanded Measurement Uncertainty

The accumulated measurement uncertainties of the test system in use for the parameters measured were expected not exceed the values given in the following tables.

Per CISPR 16-4-2:2011	U ₉₅
Radiated Disturbance @ 3m, 10m	
30 MHz – 1,000 MHz (Horizontal Polarity)	3m = 4.52 dB,
1.0 GHz – 6.0 GHz	3m = 4.25 dB
> 6.0 GHz	3m = 4.93 dB

U₉₅ = Expanded Uncertainty.

Note:

Expanded measurement uncertainty numbers are shown in the table above. Compliance criteria are not based on measurement uncertainty. The expanded uncertainty at a level of 95% confidence is obtained by multiplying the combined standard uncertainty by a coverage factor of 2 (U₉₆).

Per ETSI TR 100 028 and ETSI TR 100 273	U ₉₅
Frequency Accuracy	
30 MHz – 1000 MHz (Band 1)	1.44 Hz
1.0 GHz – 6.0 GHz (Band 2)	1.78 Hz
> 6.0 GHz (Band 3)	3.13 Hz
Carrier Power Measurement	
Total	1.59 dB
Adjacent Channel Power Measurement	
Total	1.47 dB
Conducted Spurious Emissions Measurement	
Total	4.01 dB
Frequency Deviation Measurement	
Total	1.30 dB
Total Response Measurement	
Total	0.46 dB

U₉₅= Expanded Uncertainty.

Notes:

Expanded measurement uncertainty numbers are shown in the table above. The given uncertainty figures are valid to a confidence level of 95 % (k=2), calculated according to the methods described in ETSI TR 100 028 and ETSI TR 100 273.

2.3 Calibration Traceability

All measurement instrumentation is traceable to the National Institute of Standards and Technology (NIST). Measurement method complies with ANSI/NCSL Z540-1-1994 and ISO Standard 17025:2005. Equipment calibration records are kept on file at the test facility.

The test results contained in this report refer exclusively to the product(s) presented for testing. No liability may be assumed for models or products not referred to herein. This test report may not be published or duplicated in part without permission of the testing body. This test report by itself does not constitute authorization for the use of any TUV Rheinland test mark. The report must not be used by the client to claim product certification, approval, or endorsement by A2LA.

Report No.:
316761853.001

Page 10 of 28

2.4 Measurement Equipment Used

Equipment	Manufacturer	Model #	Serial/Inst #	Last Cal dd/mm/yy	Next Cal dd/mm/yy
Radiated Emissions (5 Meter Chamber)					
Receiver, EMI	Rohde & Schwarz	ESIB40	100043	16-Aug-16	16-Aug-17
Receiver, EMI	Rohde & Schwarz	ESCI 7	100917	16-Aug-16	16-Aug-17
Spectrum Analyzer	Agilent Tec.	E7405A	US39440161	16-Aug-16	16-Aug-17
Amplifier, preamp	Agilent Technologies	8449B	3008A01480	20-Aug-15	20-Aug-17
Ant. BiconiLog	Chase	CBL6140A	1108	06-Oct-15	06-Oct-17
Antenna Horn 1-18GHz	EMCO	3115	5770	23-Mar-17	23-Mar-18
Antenna Horn 18-26.5 GHz	ATM	42-442-6/cal	G181104-01	18-Aug-16	18-Aug-17
Cable, Coax	MicroCaox	MKR300C-0-0-1200-500500	002	17-Aug-16	17-Aug-17
Cable, Coax	MicroCaox	MKR300C-0-1968-500310	005	17-Aug-16	17-Aug-17
Cable, Coax	MicroCaox	UFB29C-1-5905-50U-50U	009	17-Aug-16	17-Aug-17
Cable, Coax	Andrew	FSJ1-50A	045	18-Aug-16	18-Aug-17
General Laboratory Equipment					
Meter, Multi	Fluke	179	90580752	18-Aug-16	18-Aug-17
Meter, Multi	Fluke	233	12430137	15-Aug-16	15-Aug-17
Meter, Temp/Humid/Barom	ExTech	SD700	Q677933	21-Dec-15	21-Dec-17
Meter, Temp/Humid/Barom	ExTech	SD700	Q677942	21-Dec-15	21-Dec-17

3 Product Information

3.1 Product Description

The EUT is a Limited Modular Device (LMD) for use in a variety of wrist watches with a Bluetooth Low-Energy (BLE) The model for the LMD is M328A.

Two sets of each EUT were provided for testing. One is normal a configuration for unintentional cabinet radiation. The second was modified with test firmware to allow the low, medium and high hopping channels to continuously transmit with modulation. External batteries were not included on the modified devices to allow long-term transmissions. Fresh batteries were installed frequently.

3.2 Equipment Modifications

No modifications were needed to bring product into compliance.

3.3 Equivalent Models

No additional models covered by test report.

3.4 Test Plan

The EUT product information, test configuration, mode of operation, test types, test procedures, test levels, pass/failure criteria, in this report were carried out per the product test plan located in appendix A of this report

The test results contained in this report refer exclusively to the product(s) presented for testing. No liability may be assumed for models or products not referred to herein. This test report may not be published or duplicated in part without permission of the testing body. This test report by itself does not constitute authorization for the use of any TUV Rheinland test mark. The report must not be used by the client to claim product certification, approval, or endorsement by A2LA.

4 Radiated Emissions in Transmit mode

4.1 Radiated emissions - FCC Parts 15.249, RSS-210 B.10

The field strength of emissions from intentional radiators operated within these frequency bands shall comply with the following limits:

Fundamental Frequency: 2400 to 2483.5 MHz – 50 mV/m (94 dB μ V/m) at 3m.

Harmonic Frequencies: 500 μ V/m (54 dB μ V/m) at 3m.

Spurious Emissions: To the limits of FCC Part 15.209 and RSS-GEN 7.2.1.

4.1.1 Over View of Test

Results	Complies (as tested per this report)			Date	21 June 2017		
Standard	FCC Parts 15.205, 15.209, 15.215(c), 15.249(a), 15.249(c), 15.249(d) RSS-210 B.10, and RSS-GEN						
Product Model	M328A		Serial#	Production Prototype			
Test Set-up	Tested in a 5m Semi Anechoic chamber, placed on a 1.0m x 1.5m non-conductive table 80cm above the ground plane on a turn-table.						
EUT Powered By	3.0 V DC Lithium battery	Temp	73° F	Humidity	35%	Pressure	998 mbar
Perf. Criteria	(Below Limit)		Perf. Verification		Readings Under Limit		
Mod. to EUT	None		Test Performed By		Mark Ryan		


4.1.2 Test Procedure

Testing was performed in accordance with 47 CFR Part 15, ANSI C63.10:2013, RSS-GEN Issue 4. These test methods are listed under the laboratory's A2LA Scope of Accreditation. This test measures the levels emanating from the EUT, thus evaluating the potential for the EUT to cause radio frequency interference to other electronic devices.

4.1.3 Deviations

Since all emissions outside the band are within the limits of FCC Part 15.209 and RSS-GEN 7.2.1, the emissions shown below are also compliant with FCC Parts 15.205, 15.209, 15.215(c), 15.249(d), RSS-210 B,10, and RSS-GEN 7.2.1.

4.1.1 Test Setup Block Diagram

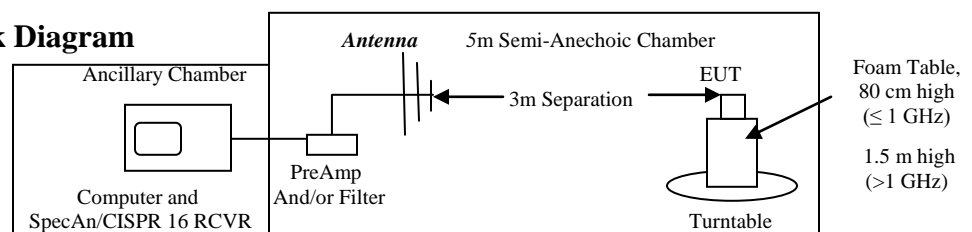

The test results contained in this report refer exclusively to the product(s) presented for testing. No liability may be assumed for models or products not referred to herein. This test report may not be published or duplicated in part without permission of the testing body. This test report by itself does not constitute authorization for the use of any TUV Rheinland test mark. The report must not be used by the client to claim product certification, approval, or endorsement by A2LA.

Report No.:
316761853.001

Page 12 of 28

4.1.1 Final Test

All final radiated spurious emissions measurements were below (in compliance) the limits.

The worst –case emissions are shown below. All other emissions are on file at TUV Rheinland.

4.1.1.1 Worst Case Emissions inside the Frequency Band

Emission Freq (MHz)	ANT Polar (H/V)	ANT Pos (m)	Table Pos (deg)	FIM Value (dBuV)	Amp Gain (dB)	Cable Loss (dB)	ANT Factor (dB/m)	E-Field Value (dBuV/m)	Equivalent EIRP level (mV/m)	Spec Limit (mV/m)
Orientation A:										
2402.00	H	1.6	0	36.09	0.00	5.89	28.54	70.52	3.36	50.00
2402.00	V	1.3	0	27.64	0.00	5.89	28.54	62.07	1.27	50.00
2402.00	H	1.6	0	42.21	0.00	5.89	28.54	76.64	6.79	70.00
2402.00	V	1.3	0	34.86	0.00	5.89	28.54	69.29	2.91	70.00
2440.00	V	1.5	0	31.09	0.00	5.95	28.56	65.60	1.91	50.00
2440.00	V	1.5	0	42.97	0.00	5.95	28.56	77.48	7.48	70.00
2480.00	V	1.7	0	38.30	0.00	5.98	28.68	72.96	4.45	50.00
2480.00	V	1.7	0	44.28	0.00	5.98	28.68	78.94	8.85	70.00
Orientation B:										
2480.00	H	1.6	0	38.83	0.00	5.98	28.68	73.49	4.73	50.00
2480.00	V	1.6	0	29.38	0.00	5.98	28.68	64.04	1.59	50.00
2480.00	H	1.6	0	45.66	0.00	5.98	28.68	80.32	10.38	500.00
2480.00	V	1.6	0	36.43	0.00	5.98	28.68	71.09	3.59	70.00
2440.00	H	1.6	0	38.49	0.00	5.95	28.56	73.00	4.47	50.00
2440.00	H	1.6	0	44.58	0.00	5.95	28.56	79.09	9.01	70.00
2402.00	H	1.6	0	31.88	0.00	5.89	28.54	66.31	2.07	50.00
2402.00	H	1.6	0	43.51	0.00	5.89	28.54	77.94	7.89	70.00
Orientation C:										
2480.00	H	2	0	33.91	0.00	5.98	28.68	68.57	2.68	50.00
2480.00	V	1.9	66	33.62	0.00	5.98	28.68	68.28	2.59	50.00
2480.00	H	2	0	40.31	0.00	5.98	28.68	74.97	5.60	70.00
2480.00	V	1.9	66	40.06	0.00	5.98	28.68	74.72	5.45	70.00
2402.00	H	2	0	32.13	0.00	5.89	28.54	66.56	2.13	50.00
2402.00	V	1.9	66	32.86	0.00	5.89	28.54	67.29	2.31	50.00
2440.00	H	2	0	32.91	0.00	5.95	28.56	67.42	2.35	50.00
2440.00	V	1.9	66	32.62	0.00	5.95	28.56	67.13	2.27	50.00

Spec Margin = E-Field Value - Limit, E-Field Value = FIM Value - Amp Gain + Cable Loss + ANT Factor


Notes: **GREEN = Average Detector, Blue = Peak Detector**

The Limit using the Peak Detector is 20dB higher than the Average Detector limit.

EUT in Orientation B is worst case as shown. All other data is on file at TUV Rheinland.

This **highlighted** frequency and orientation was Highest Emission (2480 MHz, Orientation B).

The test results contained in this report refer exclusively to the product(s) presented for testing. No liability may be assumed for models or products not referred to herein. This test report may not be published or duplicated in part without permission of the testing body. This test report by itself does not constitute authorization for the use of any TUV Rheinland test mark. The report must not be used by the client to claim product certification, approval, or endorsement by A2LA.

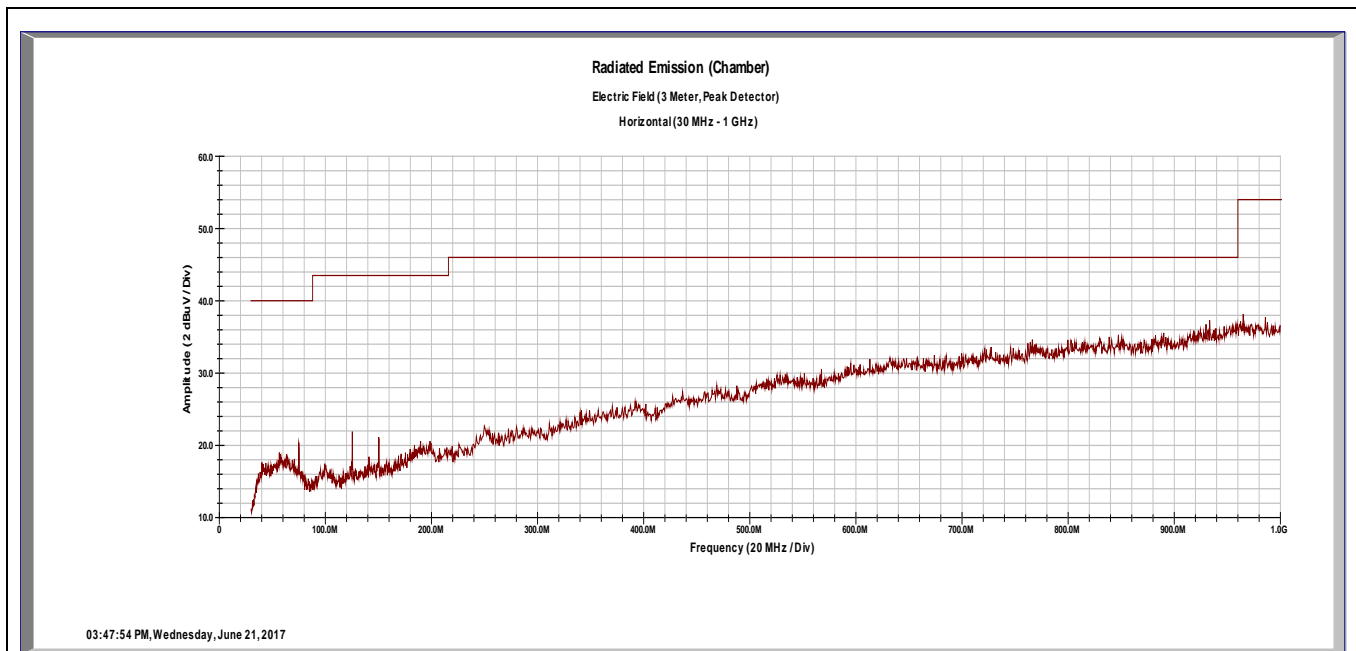4.1.1.2 Emissions Outside the Frequency Band:
Radiated Emissions – 30 MHz to 1000 MHz
Horizontal


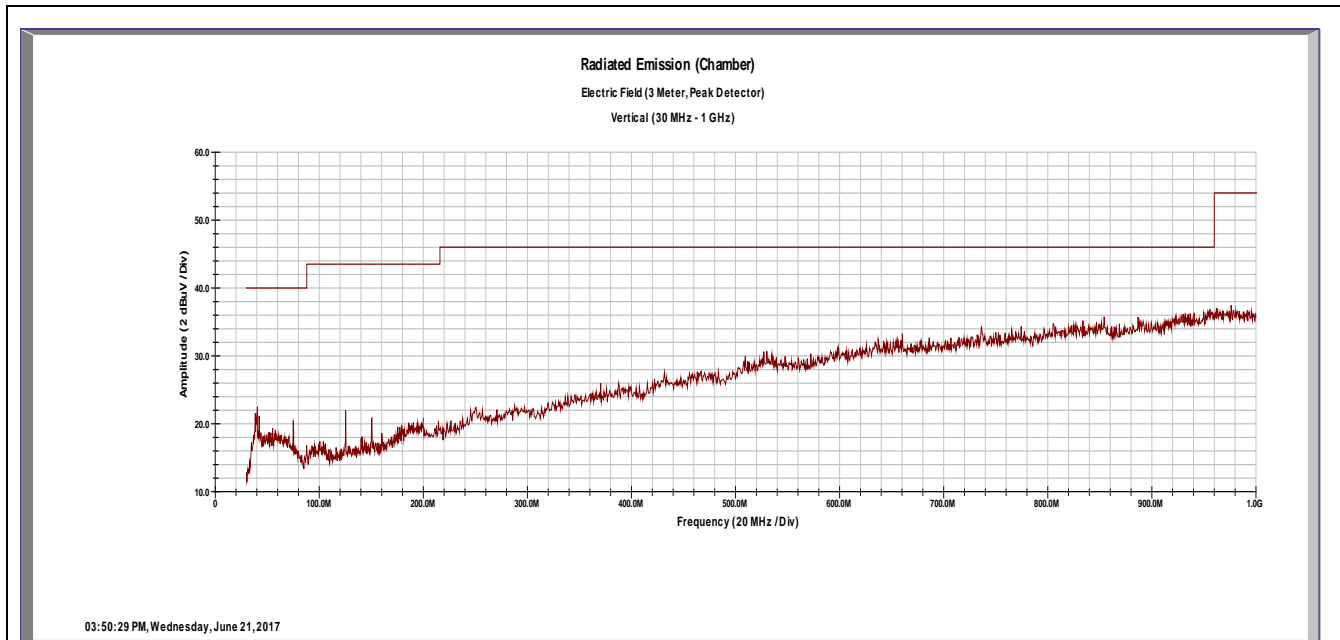
Emission Freq (MHz)	ANT Polar (H/V)	ANT Pos (m)	Table Pos (deg)	FIM Value (dBuV)	Amp Gain (dB)	Cable Loss (dB)	ANT Factor (dB/m)	E-Field Value (dBuV/m)	Spec Limit (dBuV/m)	Spec Margin (dB)

Spec Margin = E-Field Value - Limit, E-Field Value = FIM Value - Amp Gain + Cable Loss + ANT Factor

Notes: The remaining two channels gave very similar results.
 The signals shown below 200 MHz are anomalies in the preamp of the measuring instrument.
 A notch filter at the transmitter fundamental frequency was not used.

The test results contained in this report refer exclusively to the product(s) presented for testing. No liability may be assumed for models or products not referred to herein. This test report may not be published or duplicated in part without permission of the testing body. This test report by itself does not constitute authorization for the use of any TÜV Rheinland test mark. The report must not be used by the client to claim product certification, approval, or endorsement by A2LA.

Radiated Emissions Ch 2 – 30 MHz to 1000 MHz
Vertical




Emission Freq (MHz)	ANT Polar (H/V)	ANT Pos (m)	Table Pos (deg)	FIM Value (dBuV)	Amp Gain (dB)	Cable Loss (dB)	ANT Factor (dB/m)	E-Field Value (dBuV/m)	Spec Limit (dBuV/m)	Spec Margin (dB)

Spec Margin = E-Field Value - Limit, E-Field Value = FIM Value - Amp Gain + Cable Loss + ANT Factor

Notes: The signals shown below 200 MHz are anomalies in the preamp of the measuring instrument. A notch filter at the transmitter fundamental frequency was not used.

The test results contained in this report refer exclusively to the product(s) presented for testing. No liability may be assumed for models or products not referred to herein. This test report may not be published or duplicated in part without permission of the testing body. This test report by itself does not constitute authorization for the use of any TUV Rheinland test mark. The report must not be used by the client to claim product certification, approval, or endorsement by A2LA.

Worst Case Radiated Emissions – 1 to 10 GHz
Horizontal

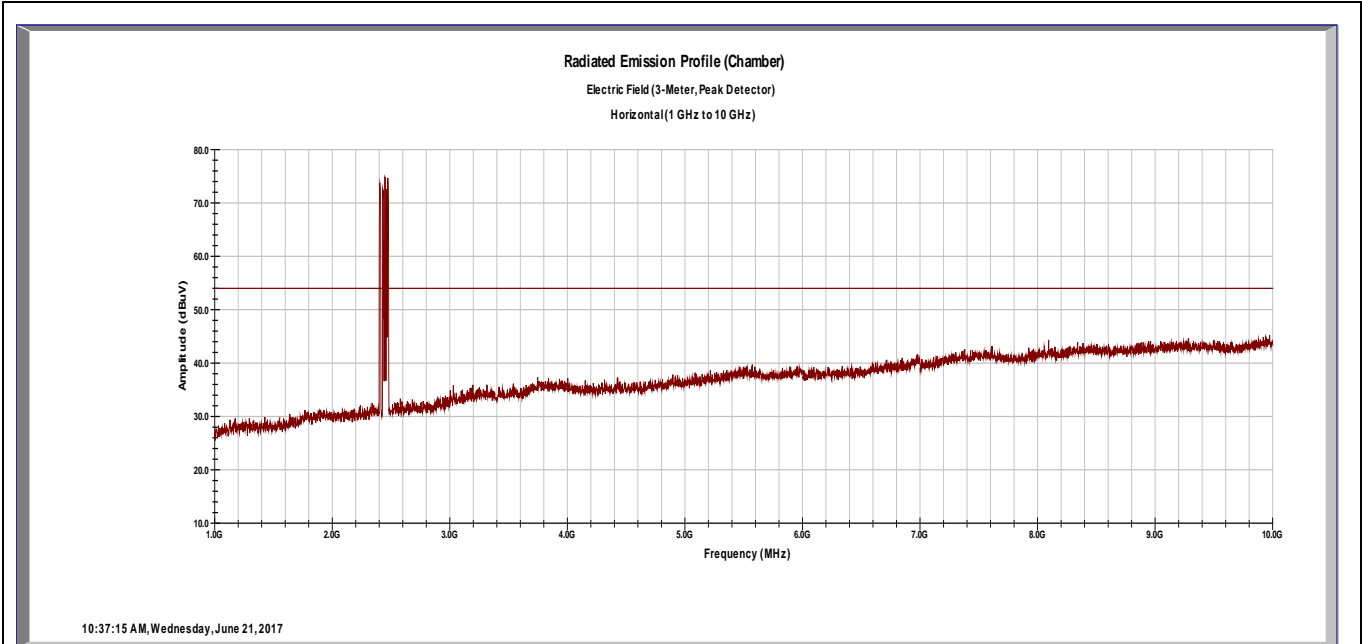

Emission Freq (MHz)	ANT Polar (H/V)	ANT Pos (m)	Table Pos (deg)	FIM Value (dBuV)	Amp Gain (dB)	Cable Loss (dB)	ANT Factor (dB/m)	E-Field Value (dBuV/m)	Spec Limit (dBuV/m)	Spec Margin (dB)
1204.00	H	1	0	12.81	35.04	5.92	25.31	9.01	54.00	-44.99
1204.00	H	1	0	26.80	35.04	5.92	25.31	23.00	74.00	-51.00
4804.00	H	1	0	12.02	33.84	11.60	32.88	22.66	54.00	-31.34
4804.00	H	1	0	25.69	33.84	11.60	32.88	36.33	74.00	-37.67


Spec Margin = E-Field Value - Limit, E-Field Value = FIM Value - Amp Gain + Cable Loss + ANT Factor

Notes: The Emissions from the transmitter was low enough that a filter was not required.
The Emissions shown is **GREEN** are using the Average Detector.
The Emissions shown in **BLUE** are using the Peak Detector.

The test results contained in this report refer exclusively to the product(s) presented for testing. No liability may be assumed for models or products not referred to herein. This test report may not be published or duplicated in part without permission of the testing body. This test report by itself does not constitute authorization for the use of any TUV Rheinland test mark. The report must not be used by the client to claim product certification, approval, or endorsement by A2LA.

Worst Case Radiated Emissions - 1 to 10 GHz

Vertical

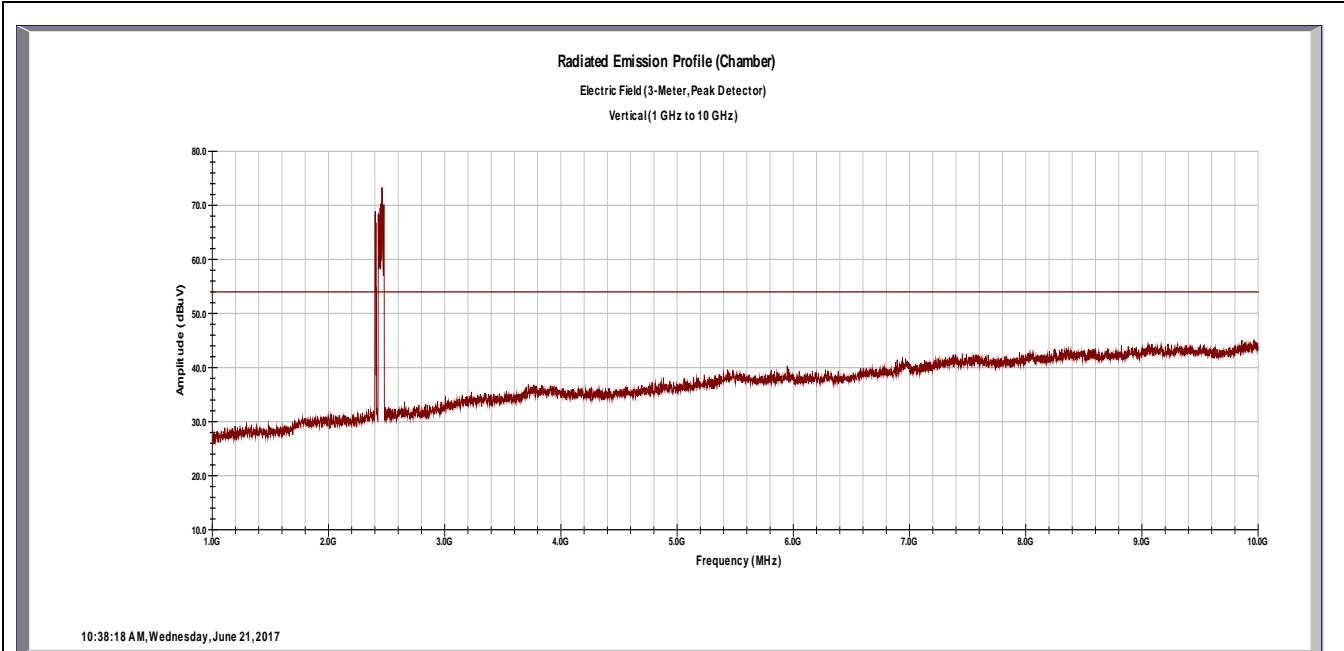

Emission Freq (MHz)	ANT Polar (H/V)	ANT Pos (m)	Table Pos (deg)	FIM Value (dBuV)	Amp Gain (dB)	Cable Loss (dB)	ANT Factor (dB/m)	E-Field Value (dBuV/m)	Spec Limit (dBuV/m)	Spec Margin (dB)
7206.00	V	1	0	13.98	33.61	15.44	35.96	31.77	54.00	-22.23
7206.00	V	1	0	26.51	33.61	15.44	35.96	44.30	74.00	-29.70
				0.00						
9608.00	V	1	0	12.55	34.18	17.77	37.79	33.93	54.00	-20.07
9608.00	V	1	0	25.32	34.18	17.77	37.79	46.70	74.00	-27.30

Spec Margin = E-Field Value - Limit, E-Field Value = FIM Value - Amp Gain + Cable Loss + ANT Factor


Notes: The Emissions from the transmitter was low enough that a filter was not required.

The Emissions shown in **GREEN** are using the Average Detector.

The Emissions shown in **BLUE** are using the Peak Detector.

The test results contained in this report refer exclusively to the product(s) presented for testing. No liability may be assumed for models or products not referred to herein. This test report may not be published or duplicated in part without permission of the testing body. This test report by itself does not constitute authorization for the use of any TUV Rheinland test mark. The report must not be used by the client to claim product certification, approval, or endorsement by A2LA.

Radiated Emissions Ch 2 – 10 to 18 GHz
Horizontal

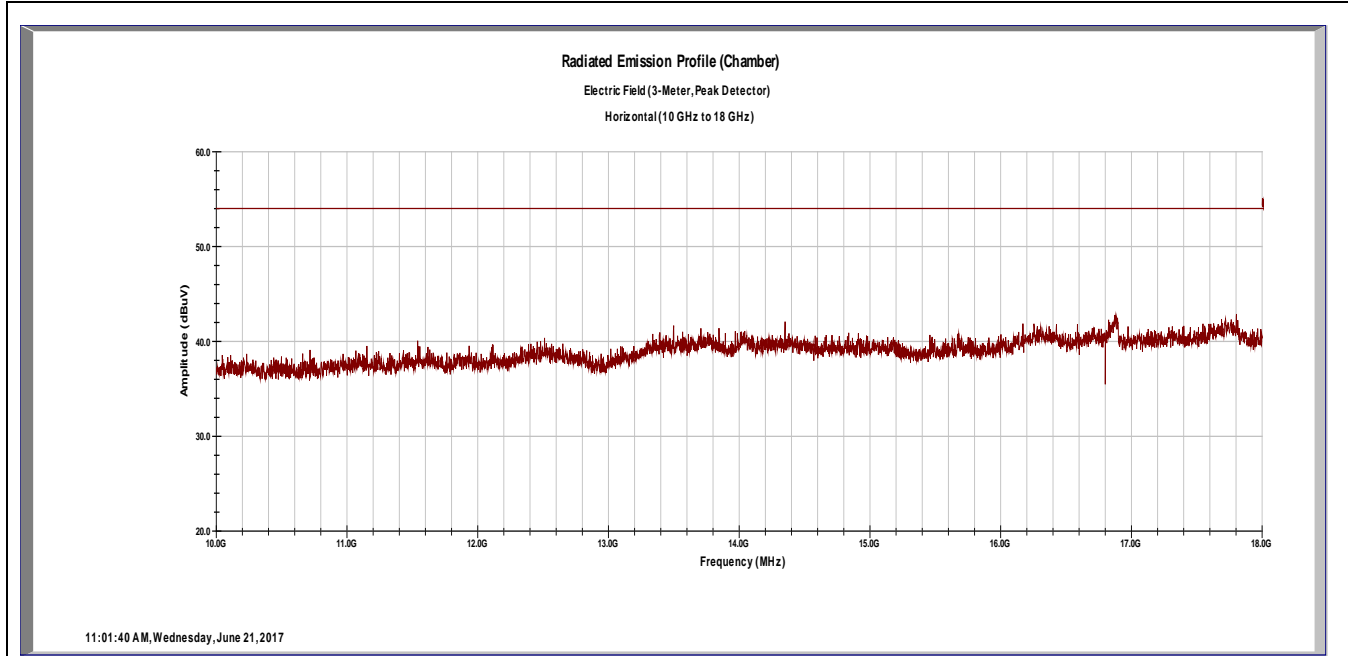


Emission Freq (MHz)	ANT Polar (H/V)	ANT Pos (m)	Table Pos (deg)	FIM Value (dBUV)	Amp Gain (dB)	Cable Loss (dB)	ANT Factor (dB/m)	E-Field Value (dBUV/m)	Spec Limit (dBUV/m)	Spec Margin (dB)

Spec Margin = E-Field Value - Limit, E-Field Value = FIM Value - Amp Gain + Cable Loss + ANT Factor
 Notes: The Emissions from the transmitter was low enough that a filter was not required.
 No measurable emissions noted.
 The Emissions shown in **GREEN** are using the Average Detector.
 The Emissions shown in **BLUE** are using the Peak Detector.

The test results contained in this report refer exclusively to the product(s) presented for testing. No liability may be assumed for models or products not referred to herein. This test report may not be published or duplicated in part without permission of the testing body. This test report by itself does not constitute authorization for the use of any TUV Rheinland test mark. The report must not be used by the client to claim product certification, approval, or endorsement by A2LA.

Radiated Emissions Ch 2 – 10 to 18 GHz
Vertical

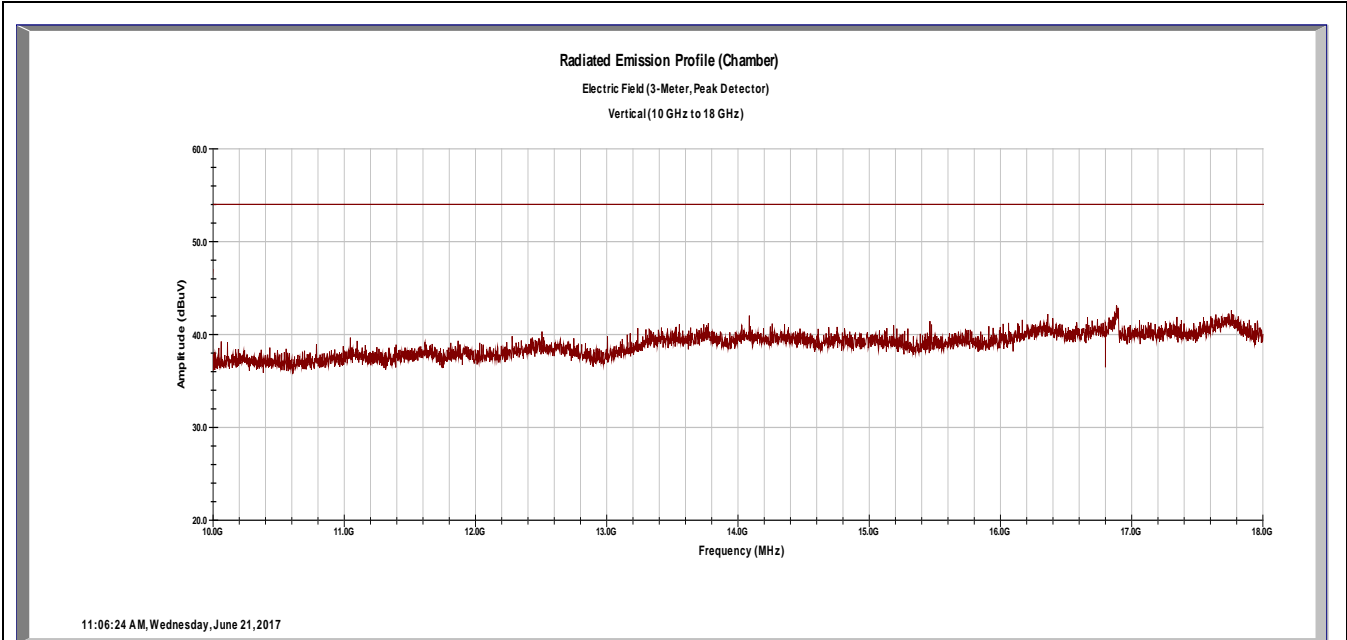

Emission Freq (MHz)	ANT Polar (H/V)	ANT Pos (m)	Table Pos (deg)	FIM Value (dBuV)	Amp Gain (dB)	Cable Loss (dB)	ANT Factor (dB/m)	E-Field Value (dBuV/m)	Spec Limit (dBuV/m)	Spec Margin (dB)

Spec Margin = E-Field Value - Limit, E-Field Value = FIM Value - Amp Gain + Cable Loss + ANT Factor


Notes: The Emissions from the transmitter was low enough that a filter was not required.
No measurable emissions noted.

The Emissions shown in **GREEN** are using the Average Detector.
The Emissions shown in **BLUE** are using the Peak Detector.

The test results contained in this report refer exclusively to the product(s) presented for testing. No liability may be assumed for models or products not referred to herein. This test report may not be published or duplicated in part without permission of the testing body. This test report by itself does not constitute authorization for the use of any TUV Rheinland test mark. The report must not be used by the client to claim product certification, approval, or endorsement by A2LA.

Radiated Emissions Ch 2 – 18 to 25 GHz
Horizontal

Agilent 14:04:39 Jun 21, 2017

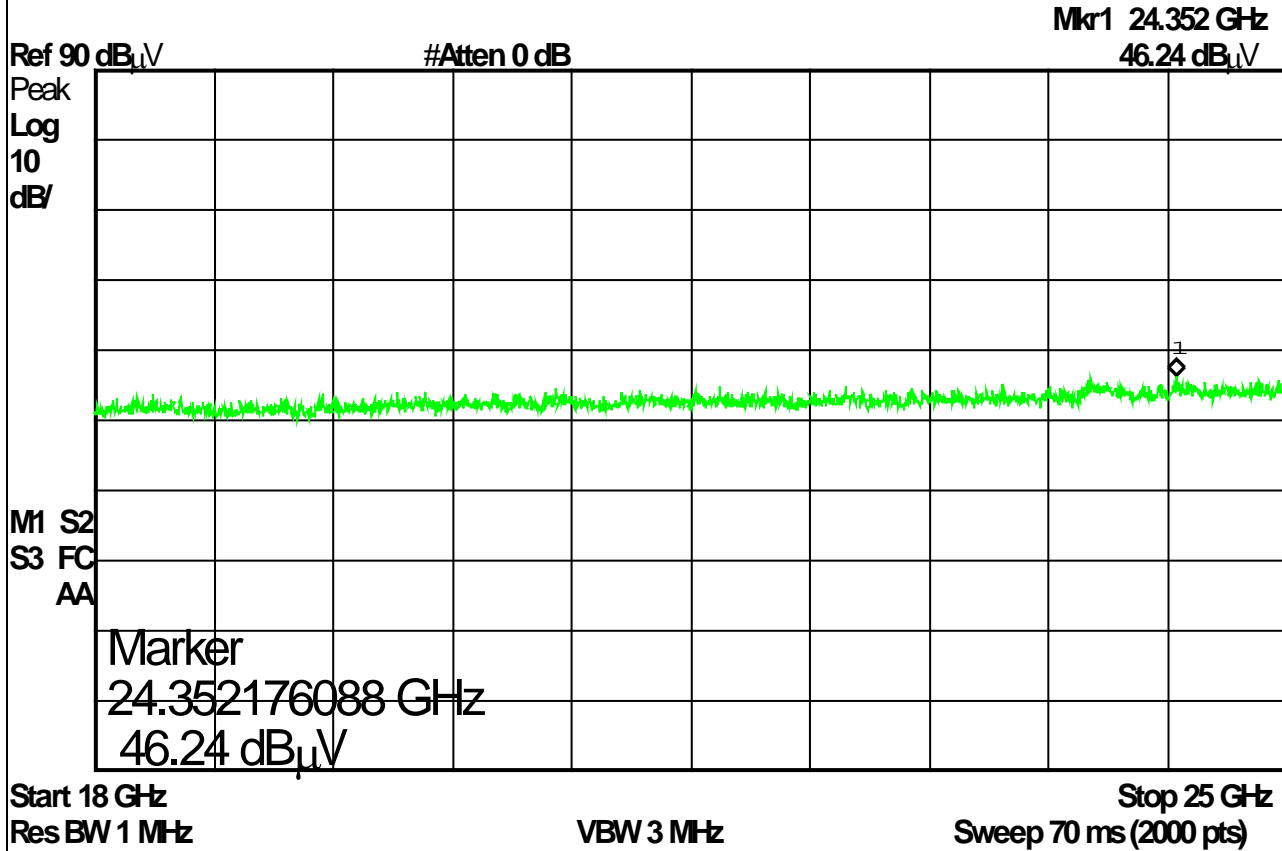

Emission Freq (MHz)	ANT Polar (H/V)	ANT Pos (m)	Table Pos (deg)	FIM Value (dB μ V)	Amp Gain (dB)	Cable Loss (dB)	ANT Factor (dB/m)	E-Field Value (dB μ V/m)	Spec Limit (dB μ V/m)	Spec Margin (dB)

Spec Margin = E-Field Value - Limit, E-Field Value = FIM Value - Amp Gain + Cable Loss + ANT Factor

Notes: No measureable emissions were noted.
No correction factors were used for the above graph. The number of Sweep Points was increased to 8000.
The Measuring distance was decreased to 1 meter.
No filter was used for this frequency range.
The other two channels presented very similar results. Plots for other the channels are on file at TUV Rheinland.

The test results contained in this report refer exclusively to the product(s) presented for testing. No liability may be assumed for models or products not referred to herein. This test report may not be published or duplicated in part without permission of the testing body. This test report by itself does not constitute authorization for the use of any TUV Rheinland test mark. The report must not be used by the client to claim product certification, approval, or endorsement by A2LA.

Report No.:

316761853.001

Page 20 of 28

Radiated Emissions Ch 2 – 18 to 25 GHz
Vertical

Agilent 14:06:08 Jun 21, 2017

Mkr1 24.692 GHz
46.24 dB μ V

Ref 90 dB μ V

#Atten 0 dB

Peak
Log
10
dB

M1 S2
S3 FC
AA

Marker
24.691845922 GHz
46.24 dB μ V

Start 18 GHz

Stop 25 GHz

Res BW 1 MHz

VBW 3 MHz

Sweep 70 ms (2000 pts)

Emission Freq (MHz)	ANT Polar (H/V)	ANT Pos (m)	Table Pos (deg)	FIM Value (dB μ V)	Amp Gain (dB)	Cable Loss (dB)	ANT Factor (dB/m)	E-Field Value (dB μ V/m)	Spec Limit (dB μ V/m)	Spec Margin (dB)

Spec Margin = E-Field Value - Limit, E-Field Value = FIM Value - Amp Gain + Cable Loss + ANT Factor

Notes: No measureable emissions were noted.

No correction factors were used for the above graph. The number of Sweep Points was increased to 8000.

The Measuring distance was decreased to 1 meter.

No filter was used for this frequency range.

The other two channels presented very similar results. Plots for other the channels are on file at TUV Rheinland.

The test results contained in this report refer exclusively to the product(s) presented for testing. No liability may be assumed for models or products not referred to herein. This test report may not be published or duplicated in part without permission of the testing body. This test report by itself does not constitute authorization for the use of any TUV Rheinland test mark. The report must not be used by the client to claim product certification, approval, or endorsement by A2LA.

4.2 Band Edge requirements - FCC Part 15.249(d), RSS-GEN

4.2.1 Test Over View

Results	Complies (as tested per this report)				Date	1 February 2016	
Standard	FCC Part 15.249(d), RSS-GEN						
Product Model	M328A			Serial#	Production Prototype		
Test Set-up	Direct Measurement from antenna port						
EUT Powered By	3.0 V DC Lithium battery	Temp	73° F	Humidity	35%	Pressure	998 mbar
Perf. Criteria	(Below Limit)		Perf. Verification		Readings Under Limit		
Mod. to EUT	None		Test Performed By		Mark Ryan		

4.2.2 Test Procedure

Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or to the general radiated emission limits in Sec. 15.209, whichever is the lesser attenuation.

4.2.3 Deviations

There were no deviations from the test methodology listed in the test plan.

RBW of 100 kHz was chosen as it is within 1% to 5% of the total span. (4.8%)


The VBW of 300 kHz was chosen as it is 3 times the 100 kHz RBW.

The Sweep time was set to Auto.

4.2.4 Final Test

The EUT met the performance criteria requirement as specified in the standards.


4.2.1 Test Setup Block Diagram

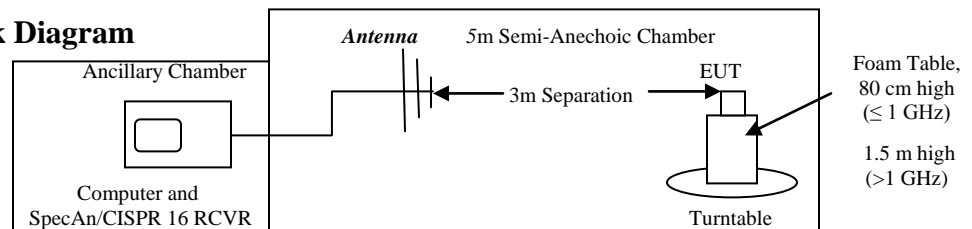

The test results contained in this report refer exclusively to the product(s) presented for testing. No liability may be assumed for models or products not referred to herein. This test report may not be published or duplicated in part without permission of the testing body. This test report by itself does not constitute authorization for the use of any TUV Rheinland test mark. The report must not be used by the client to claim product certification, approval, or endorsement by A2LA.



Marker 2 [T1] REW 100 kHz RF Att 10 dB
 Ref Lvl 38.07 dB μ V VBW 300 kHz
 100 dB μ V 2.39928938 GHz SWI 5 ms Unit dB μ V

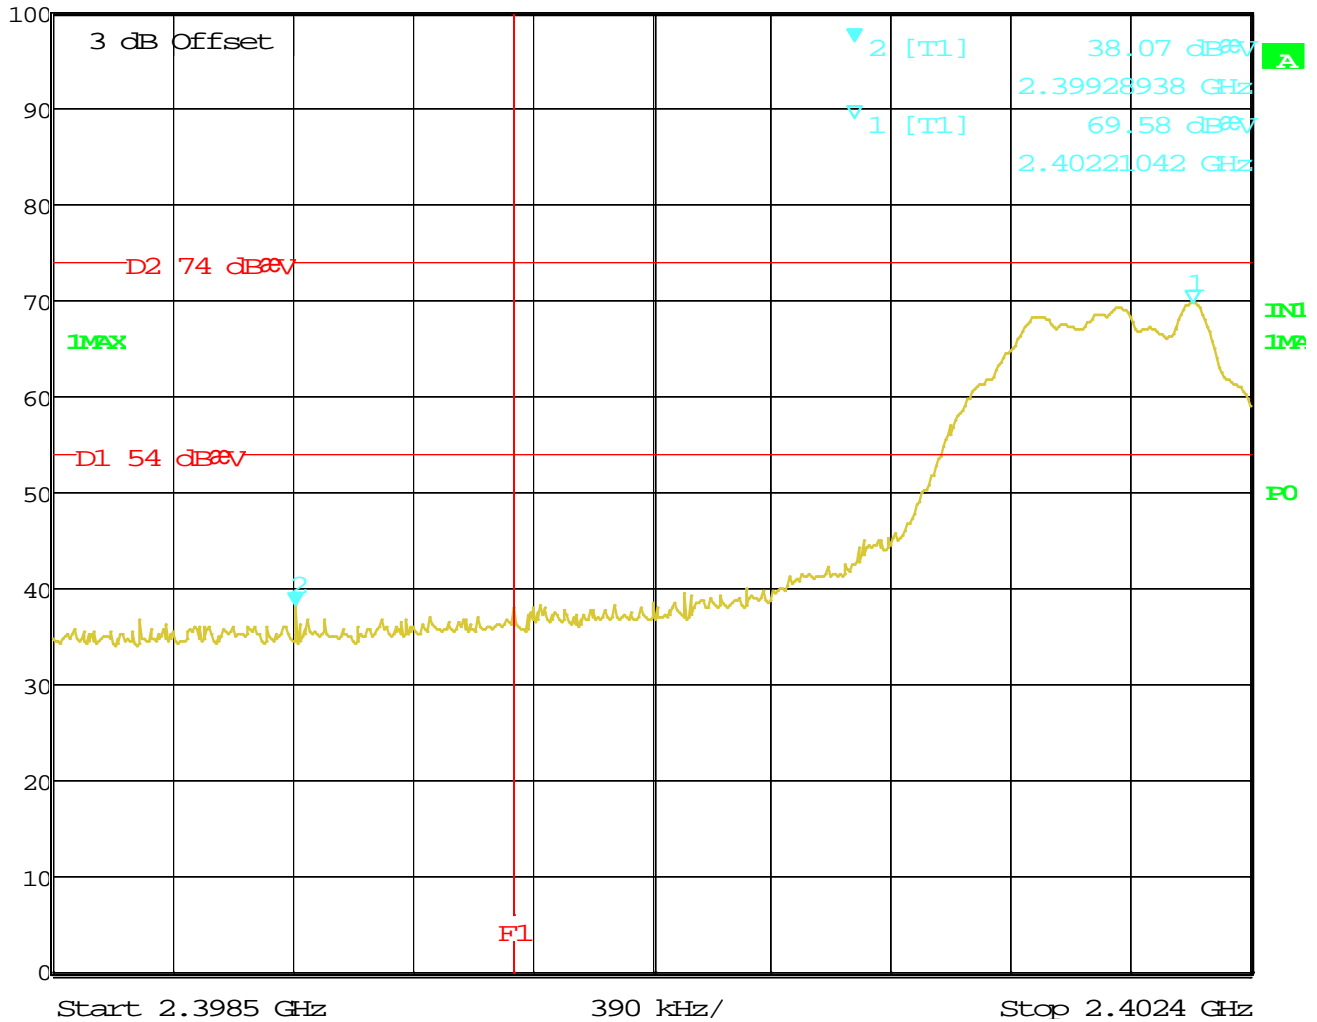

Date: 30.JUN.2017 15:31:44

Notes: Measured using the Peak detector. The Peak level is below the Average Limit
 Band Edge is at 2.4 GHz (Line F1).

The nearest restricted band (2390MHz) is 10 MHz below the band edge

The Highest frequency outside the band is at 38.07 dB μ V/m (using the Peak Detector) which is below the
 Average restricted-band limits)

Figure 1: Lower Band Edge Measurement (Radiated Emission)

The test results contained in this report refer exclusively to the product(s) presented for testing. No liability may be assumed for models or products not referred to herein. This test report may not be published or duplicated in part without permission of the testing body. This test report by itself does not constitute authorization for the use of any TUV Rheinland test mark. The report must not be used by the client to claim product certification, approval, or endorsement by A2LA.


Report No.:

316761853.001

Page 23 of 28



Marker 2 [T1] RBW 100 kHz RF Att 10 dB
 Ref Lvl 38.02 dB μ V VBW 300 kHz
 100 dB μ V 2.48397485 GHz SWI 5 ms Unit dB μ V

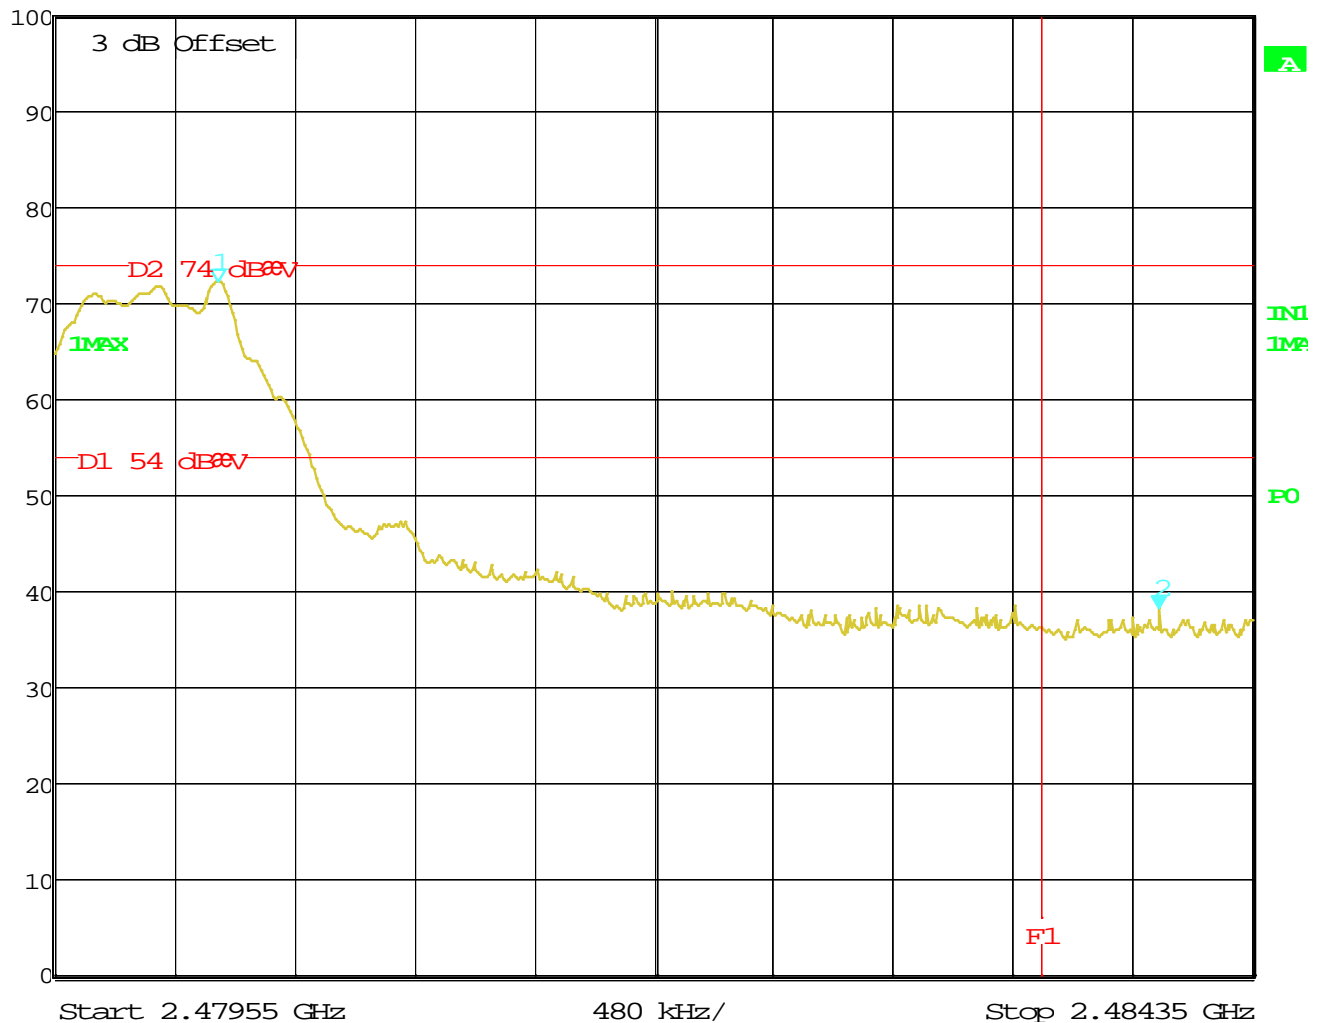

Date: 30.JUN.2017 15:20:45

Note: Measured using the Peak detector. Band Edge is at 2.483.5 MHz (Line F1).

Band edge at 2483.5 MHz is also the start of a restricted band, so the restricted band rules apply.

The Highest frequency outside the band is at 38.02 dB μ V/m (using the Peak Detector) which is below the Average restricted-band limits)

Figure 2: Upper Band Edge Measurement (Radiated Emission)

The EUT is compliant with the rules.

The test results contained in this report refer exclusively to the product(s) presented for testing. No liability may be assumed for models or products not referred to herein. This test report may not be published or duplicated in part without permission of the testing body. This test report by itself does not constitute authorization for the use of any TUV Rheinland test mark. The report must not be used by the client to claim product certification, approval, or endorsement by A2LA.

Report No.:
316761853.001

Page 24 of 28

4.1 Conducted Emissions on AC Mains – FCC 207(a) and RSS-GEN 8.8

This test measures the electromagnet levels of spurious signals generated by the EUT on the AC power line that may affect the performance of other nearby electronic equipment.

4.1.1 Over View of Test

Results	NA EUT is battery operated only			Date	NA		
Standard	FCC Parts 15.207(a):2017 and RSS-GEN I4 clause 8.8						
Product Model	M328A			Serial#	NA		
Test Set-up	Tested in shielded room. EUT placed on table, see test plans for details						
EUT Powered By	3.0 V DC Lithium battery	Temp	NA	Humidity	NA	Pressure	NA
Frequency Range	150 kHz – 30 MHz						
Perf. Criteria	(Below Limit)		Perf. Verification	Readings Under Limit for L1 & Neutral			
Mod. to EUT	None		Test Performed By	NA			

4.1.2 Test Procedure

Conducted emissions tests were performed using the procedures of ANSI C64.4: 2009, including methods for signal maximizations and EUT configuration. The photos included with the report show the EUT in its maximized configuration.

4.1.3 Deviations

The Test sample is battery operated only. It does not have provision for external power of any kind.

4.1.4 Final Test

This test is not applicable for the device submitted for testing

The test results contained in this report refer exclusively to the product(s) presented for testing. No liability may be assumed for models or products not referred to herein. This test report may not be published or duplicated in part without permission of the testing body. This test report by itself does not constitute authorization for the use of any TUV Rheinland test mark. The report must not be used by the client to claim product certification, approval, or endorsement by A2LA.

Report No.:
316761853.001

Page 25 of 28

4.2 99% Power Bandwidth

When the occupied bandwidth limit is not stated in the applicable RSS or reference measurement method, the transmitted signal bandwidth shall be reported as the 99% emission bandwidth, as calculated or measured.

4.2.1 Test Over View

Results	Complies (as tested per this report)				Date	30 June 2017	
Standard	RSS-GEN Issue 4, Clause 6.6						
Product Model	M328A			Serial#	Production Prototype		
Test Set-up	Direct Measurement from antenna port						
EUT Powered By	3 V DC Lithium battery	Temp	73° F	Humidity	50%	Pressure	999 mbar
Perf. Criteria	(Below Limit)			Perf. Verification	Readings Under Limit		
Mod. to EUT	None			Test Performed By	Mark Ryan		

4.2.2 Test Procedure

Using the procedures of RSS-GEN section 6.6;

- The transmitter shall be operated at its maximum carrier power measured under normal test conditions.
- The span of the analyzer shall be set to capture all products of the modulation process, including the emission skirts.
- The resolution bandwidth (RBW) shall be in the range of 1% to 5% of the occupied bandwidth (OBW) and video bandwidth (VBW) shall be approximately 3x RBW.

4.2.3 Deviations

There were no deviations from the test methodology.

4.2.4 Final Results

The measured 99% bandwidth is 1064 kHz.

The EUT met the performance criteria requirement as specified in the test plan of this report and in the standards.

Frequency (MHz)	99% BW (kHz)
2402	1046.09
2440	1058.12
2480	1050.10

99% Power Band Width.

The test results contained in this report refer exclusively to the product(s) presented for testing. No liability may be assumed for models or products not referred to herein. This test report may not be published or duplicated in part without permission of the testing body. This test report by itself does not constitute authorization for the use of any TUV Rheinland test mark. The report must not be used by the client to claim product certification, approval, or endorsement by A2LA.

Report No.:


316761853.001

Page 26 of 28

4.2.1 Final Data



Ref Lvl	Marker 1 [T1]	RBW	30 kHz	RF Att	10 dB
100 dB μ V	70.63 dB μ V	VBW	100 kHz		
	2.44020240 GHz	SWT	6 ms	Unit	dB μ V

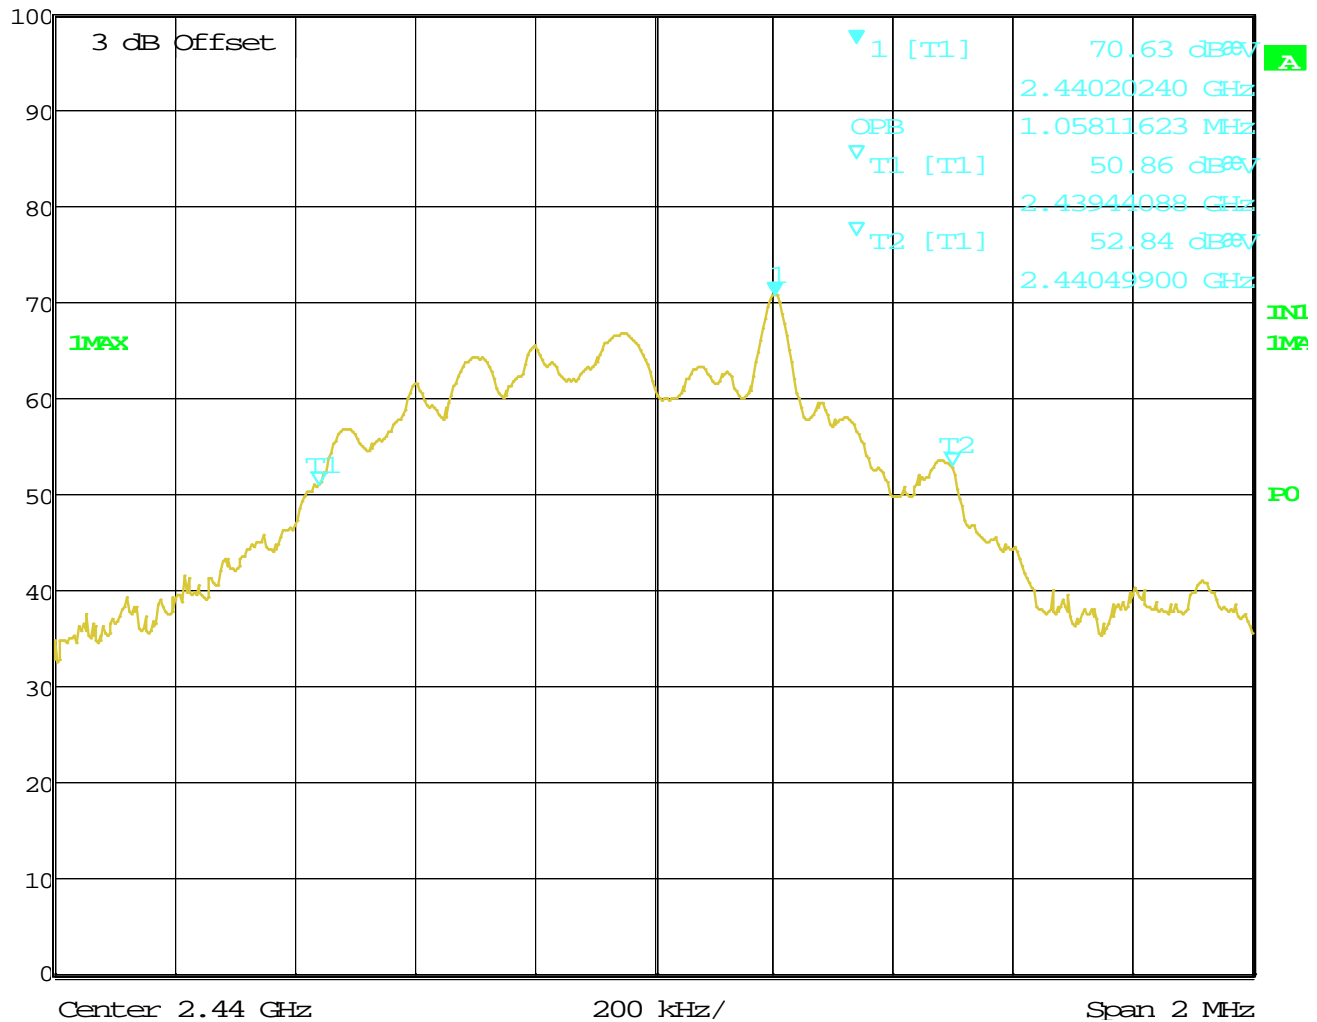

Date: 30.JUN.2017 15:36:49

Figure 3 – 99% Power Bandwidth = 1058.11 kHz. The Worst-Case shown.

Span = 2MHz, RBW = 30 kHz (1% of Span), VBW = 100 kHz ($\geq 3x$ RBW)

The EUT is compliant to the requirements of RSS-GEN 6.6

The test results contained in this report refer exclusively to the product(s) presented for testing. No liability may be assumed for models or products not referred to herein. This test report may not be published or duplicated in part without permission of the testing body. This test report by itself does not constitute authorization for the use of any TUV Rheinland test mark. The report must not be used by the client to claim product certification, approval, or endorsement by A2LA.

5 Test Documentation Requirements - Transmitters

This test report is intended to follow this test plan outlined below unless otherwise stated in this report or quote agreement. The following test plan will give details on product information, test set ups, and product configurations.

5.1 General Information

Client	Timex Group USA Inc
Address	555 Christian Rd
Address	Middlebury CT 06762
Contact Person	Sam Everett
Telephone	203-346-5603
Fax	203-346-7163
e-mail	severett@timexgroup.com

5.1.1 Product Name

iQ+ Move

5.1.2 Model(s) Name

M328A

5.1.3 Equipment Under Test (EUT) Description

Analog time telling wristwatch. Time/Date will update via Bluetooth LE connection with Smartphone apps without any consumer action required. Sub-dial will display the 2nd time zone. INDIGLO® night-light using BLUE color.

5.1.4 Testing Preparation

All necessary test equipment and samples have been provided.

- Apple iPad + Charger (Timex QC 029-01)
- Sample QC 028-01 – Watch head with special firmware to continuously transmit at a high (2.480 GHz), medium (2.440 GHz) and low (2.402 GHz) frequencies.
- Sample QC 028-02 & QC 028-04 – Watch heads that have a consumer load that when paired with the Apple iPad will be put into continuous receive mode.
- Sample QC 028-03 – Watch head the same as Sample QC 028-01 but with an external SMA connector put in place of the antenna.
- * Case back removal tool
- * Case back pliers
- * Extra CR2025 batteries.

Also included are the instructions to put the EUT in a continuous transmit mode at high, medium and low frequency ranges and instructions to allow the EUT to communicate with Apple iPad.

The test results contained in this report refer exclusively to the product(s) presented for testing. No liability may be assumed for models or products not referred to herein. This test report may not be published or duplicated in part without permission of the testing body. This test report by itself does not constitute authorization for the use of any TUV Rheinland test mark. The report must not be used by the client to claim product certification, approval, or endorsement by A2LA.

5.1.1 Styles of Product.

The Model Number M328 IQ+ MOVE describes the internal workings; such as the electronics and BLE transmitter of the basic watch. The style number describes the strap material-color, case finish, dial color, etc. The basic watch is identical to all style numbers.

Examples of the style numbers are as follows:

TW2P932:



TW2P947:



TW2P948:



TW2P949:



TW2P950:



TW2P951:



Complete List of style numbers:

TW2P93200	TW2P93300	TW2P94700	TW2P94800	TW2P94900
TW2P95000	TW2P95100	TW2P95200	TW2P95300	TW2P95400

The test results contained in this report refer exclusively to the product(s) presented for testing. No liability may be assumed for models or products not referred to herein. This test report may not be published or duplicated in part without permission of the testing body. This test report by itself does not constitute authorization for the use of any TUV Rheinland test mark. The report must not be used by the client to claim product certification, approval, or endorsement by A2LA.