

South East Asia Resources Ltd.

DC Low Profile RX

Model Number: 00-001106-00

Prepared for : South East Asia Resources Ltd.
1902-03, Kwong Sang Center, 151-153 Hoi Bun Road,
Kwun Tong, Hong Kong.

Prepared By : Audix Technology (Shenzhen) Co., Ltd.
No. 6, Ke Feng Rd., 52 Block,
Shenzhen Science & Industrial Park,
Nantou, Shenzhen, Guangdong, China

Tel: (0755) 26639496

Report Number : ACS-F06410
Date of Test : Aug.02~08, 2006
Date of Report : Aug.25, 2006

TABLE OF CONTENTS

Description	Page
Test Report Declaration	
1. GENERAL INFORMATION	1-1
1.1. Description of Device (EUT)	1-1
1.2. Test Facility	1-2
1.3. Measurement Uncertainty	1-2
2. POWER LINE CONDUCTED EMISSION TEST.....	2-1
3. RADIATED EMISSION TEST.....	3-1
3.1. Test Equipment.....	3-1
3.2. Block Diagram of Test Setup	3-1
3.3. Radiated Emission Limit 30~1000MHz Standard: FCC Part 15.....	3-2
3.4. EUT Configuration on Test	3-3
3.5. Operating Condition of EUT	3-3
3.6. Test Procedure	3-3
3.7. Radiated Emission Test Results	3-4
4. EDGE BAND TEST.....	4-10
4.1. Test Equipment.....	4-10
4.2. Test Standard	4-10
4.3. Test Procedure	4-10
5. 99% BAND WITH.....	5-12
5.1. Test Equipment.....	5-12
5.2. Test Standard	5-12
5.3. Test Procedure	5-12
6. 20DB BAND WITH	6-14
6.1. Test Equipment.....	6-14
6.2. Test Standard	6-14
6.3. Test Procedure	6-14
7. CORRECTION FACTOR.....	7-16
8. UNIT STOPS TRANSMITTING TIME	8-19
9. DEVIATION TO TEST SPECIFICATIONS	9-1
10. PHOTOGRAPH	10-1
10.1. Photos of Radiated Emission Test (In Anechoic Chamber)	10-1
10.2. Photos of Band Edges Test.....	10-2

APPENDIX I

(5 pages)

TEST REPORT DECLARATION

Applicant : South East Asia Resources Ltd.
 Manufacturer : Acumen Manufacturing Limited
 EUT Description : DC Low Profile RX
 (A) MODEL NO. : 00-001106-00
 (B) SERIAL NO. : N/A
 (C) POWER SUPPLY : DC 6V

Test Procedure Used:

FCC Rules and Regulations Part 15 Subpart C Feb.2006

The device described above is tested by Audix Technology (Shenzhen) Co., Ltd. to determine the maximum emission levels emanating from the device. The maximum emission levels are compared to the FCC Part 15 Subpart C limits for radiated and conducted emissions.

The test results are contained in this test report and Audix Technology (Shenzhen) Co., Ltd. is assumed full responsibility for the accuracy and completeness of tests. Also, this report shows that EUT is technically compliant with FCC requirements.

This report applies to above tested sample only. This report shall not be reproduced in part without written approval of Audix Technology (Shenzhen) Co., Ltd.

This report must not be used by the applicant to claim product endorsement by NVLAP or any agency of the U.S. Government.

Date of Test : Aug.02-08, 2006

Prepared by :

YoYo Wang
 YoYo Wang / Assistant

Reviewer :

Sean Xing / Assistant Manager



Approved & Authorized Signer :

Ken Lu / Deputy Manager

Name of the Representative of the Responsible Party :

Signature :

1. GENERAL INFORMATION

1.1. Description of Device (EUT)

Description : DC Low Profile RX

Model Number : 00-001106-00

Applicant : South East Asia Resources Ltd.
1902-03, Kwong Sang Center, 151-153 Hoi Bun Road, Kwun
Tong, Hong Kong.

Manufacturer : Acumen Manufacturing Limited
Queshan, Industrial Zone, Longhua, Baoan, Shenzhen, China.

Date of Test : Aug.02~08, 2006

1.2. Test Facility

Site Description

- 3m Anechoic Chamber : Jun. 13, 2006 File on Federal
Communication Commission
Registration Number: 90454
- 3m & 10m Anechoic Chamber : Mar.15, 2004 File on Federal
Communication Commission
Registration Number: 794232
- EMC Lab. : Accredited by DATech, German
Registration Number: DAT-P-091/99-01
Feb. 02, 2004
- Accredited by NVLAP, USA
NVLAP Code: 200372-0
Apr.01, 2006

1.3. Measurement Uncertainty

No.	Item	Uncertainty	Remark
1.	Uncertainty for Conducted Emission Test	1.22dB	
2.	Uncertainty for Radiated Emission Test	3.14dB	3m Chamber
3.	Uncertainty for Radiated Emission Test	3.18dB	10m Chamber
4.	Uncertainty for Power Clamp Test	1.38dB	

2. POWER LINE CONDUCTED EMISSION TEST

According to Paragraph (f) of FCC Part 15 section 15.231, Tests to demonstrate compliance with the conducted limits are not required for devices which only employ battery power for operation and which do not operate from the AC power lines or contain provisions for operation while connected to the AC power lines.

3. RADIATED EMISSION TEST

3.1. Test Equipment

The following test equipments are used during the radiated emission Test :

3.1.1. For Anechoic Chamber

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	EMI Spectrum	HP	85422E	3625A00181	May 15, 06	1 Year
2.	Test Receiver	Rohde & Schwarz	ESVS20	830350/005	May 15, 06	1 Year
3.	Amplifier	HP	8447D	2944A07794	Mar.13, 06	1/2 Year
4.	Bilog Antenna	Schaffner	CBL6111C	2598	Jan. 11, 06	1 Year
5.	RF Cable	MIYAZAKI	5D-2W	3# Chamber No.1	Jul. 28, 06	1/2 Year
6.	RF Cable	MIYAZAKI	5D-2W	3# Chamber No.2	Jul. 28, 06	1/2 Year
7.	RF Cable	FUJIKURA	RG-55/U	3# Chamber No.3	Jul. 28, 06	1/2 Year
8.	RF Cable	FUJIKURA	RG-55/U	3# Chamber No.4	Jul. 28, 06	1/2 Year
9.	Coaxial Switch	Anritsu	MP59B	M73989	Jul. 28, 06	1/2 Year

3.2. Block Diagram of Test Setup


3.2.1. Block Diagram of connection between EUT and simulators



(EUT: DC Low Profile RX)

3.2.2. Anechoic Chamber Setup Diagram

ANTENNA TOWER

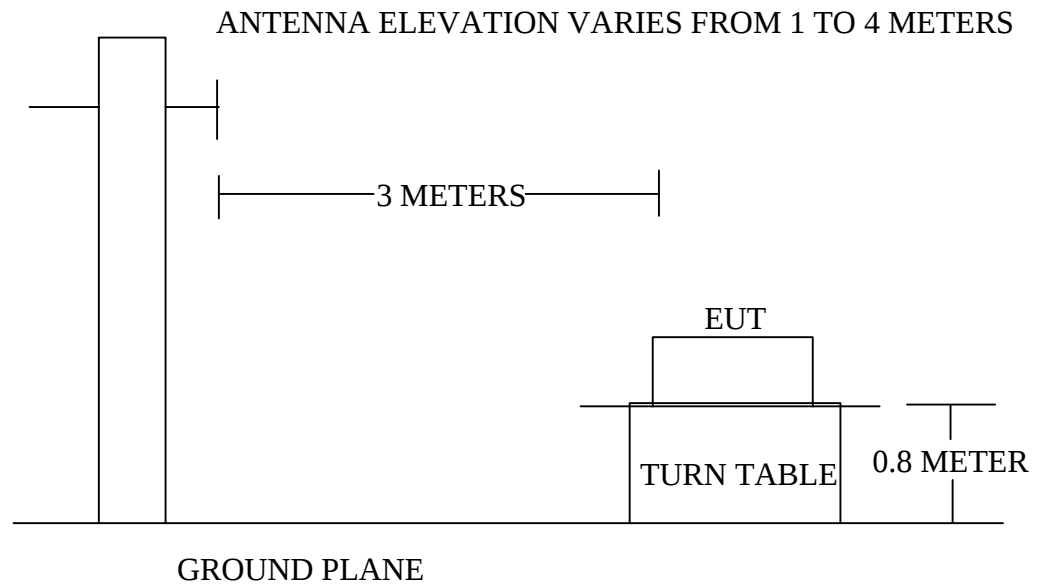

3.3. Radiated Emission Limit 30~1000MHz Standard: FCC Part 15

FREQUENCY MHz	DISTANCE Meters	FIELD STRENGTHS LIMIT	
		$\mu\text{V}/\text{m}$	$\text{dB}(\mu\text{V})/\text{m}$
30 ~ 88	3	100	40.0
88 ~ 216	3	150	43.5
216 ~ 960	3	200	46.0
960 ~ 1000	3	500	54.0
Local Oscillator:	3	94.0 $\text{dB}(\mu\text{V})/\text{m}$	
Above 1000	3	Other: 74.0 $\text{dB}(\mu\text{V})/\text{m}$ (Peak) 54.0 $\text{dB}(\mu\text{V})/\text{m}$ (Average)	

- Remark :
- (1) Emission level $\text{dB}\mu\text{V} = 20 \log$ Emission level $\mu\text{V}/\text{m}$
 - (2) The smaller limit shall apply at the cross point between two frequency bands.
 - (3) Distance is the distance in meters between the measuring instrument, antenna and the closest point of any part of the device or system.

3.4. EUT Configuration on Test

The following equipment are installed on Radiated Emission Test to meet the commission requirements and operating regulations in a manner which tends to maximize its emission characteristics in normal application.

3.4.1. DC Low Profile RX (EUT)

Model Number	:	00-001106-00
Serial Number	:	N/A
Manufacturer	:	Acumen Manufacturing Limited

3.5. Operating Condition of EUT

3.5.1. Setup the EUT as shown in Section 3.2..

3.5.2. Let the EUT work in test modes (TX) and test it.

3.6. Test Procedure

The EUT and its simulators are placed on a turn table, which is 0.8 meter high above ground. The turn table can rotate 360 degrees to determine the position of the maximum emission level. The EUT is set 3 meters away from the receiving antenna, which is mounted on a antenna tower. The antenna can be moved up and down between 1 meter and 4 meters to find out the maximum emission level. Broadband antenna (calibrated bilog antenna) is used as receiving antenna. Both horizontal and vertical polarization of the antenna is set on Test. In order to find the maximum emission levels, all of the interface cables must be manipulated according to ANSI C63.4-2003 on radiated emission Test.

The bandwidth of the EMI test receiver (R&S ESVS20) is set at 120kHz for frequency range from 30MHz to 1000 MHz.

The bandwidth of the VBW is set at 300kHz and RBW is set at 120kHz for measurement below 1GHz.

The frequency range from 30MHz to 1000MHz and above 1000MHz are checked.


The test modes (TX) is tested in Anechoic Chamber and all the scanning waveforms are attached in Appendix II.

3.7. Radiated Emission Test Results

PASS.



No.6 Ke Feng Road,Block 52,
Nan shan Science&Industry
shen zhen Guangdong
<http://www.audix.com.cn>

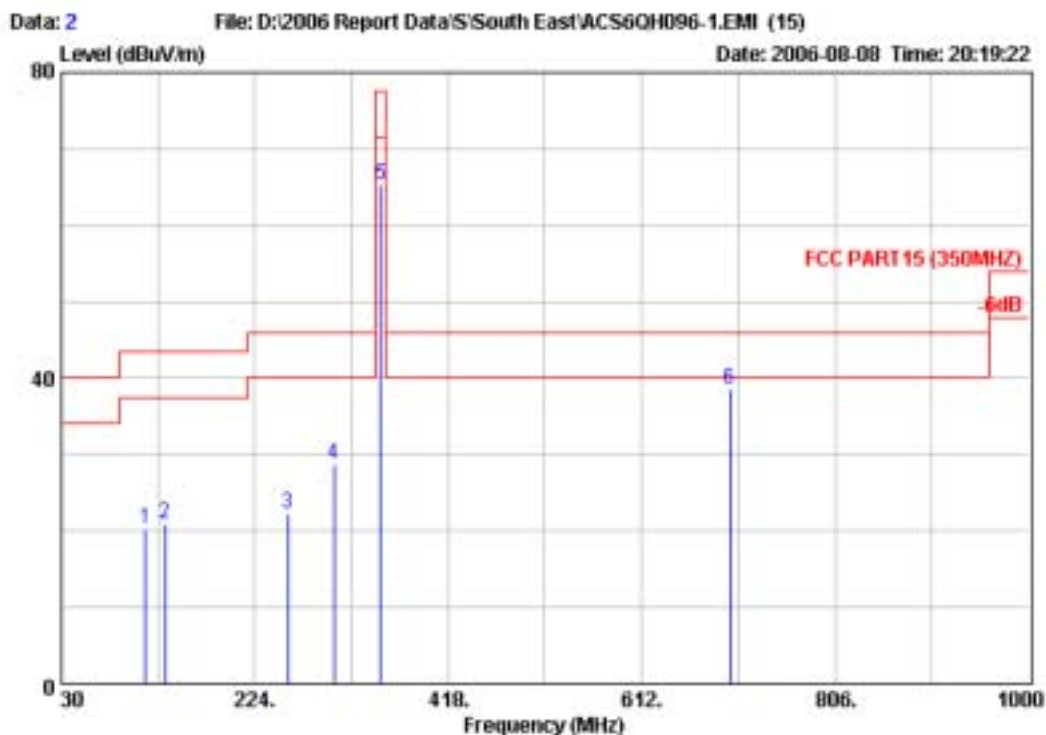


Site : 3# Chamber
Condition : FCC PART15 (350MHZ) 3m 2598FACTOR HORIZONTAL
EUT : DC Low Profile FCC
M/N : 00-001106-00
OP Condition : TX mode
Test Spec : DC 6V
Test Engineer : Iceman
Comment : Temp 23°C Humi 53%
Memo :

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level Factor	Cable Loss	
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/n	dB
1	114.39	20.22	-23.28	43.50	6.24	11.77	2.21
2	133.79	20.84	-22.66	43.50	6.56	11.93	2.35
3	256.98	22.35	-23.65	46.00	5.02	13.70	3.63
4	303.54	28.74	-17.26	46.00	10.86	13.88	4.00
5	349.98	65.36	-12.14	77.50	45.70	15.30	4.36
6	699.96	38.57	-7.43	46.00	11.09	21.06	6.42

1. All readings are Quasi-Peak values.
2. Emission Level = Antenna Factor + Cable Loss + Meter Reading



No.6 Ke Feng Road,Block 52,
Nan shan Science&Industry
shen zhen Guangdong
<http://www.audix.com.cn>

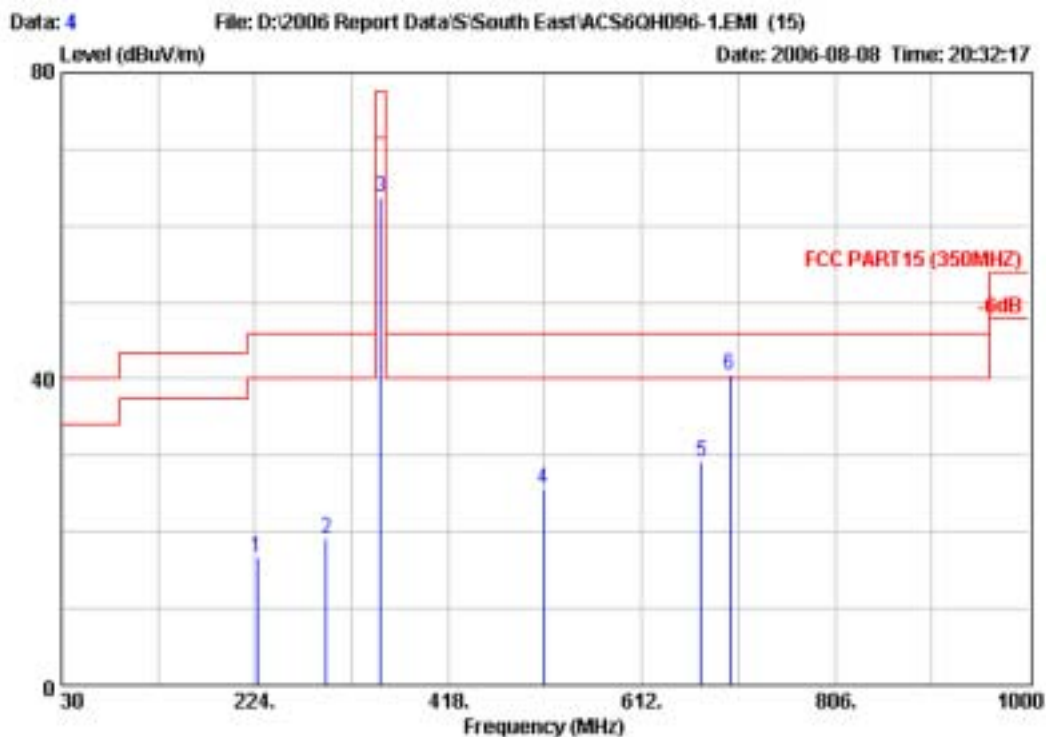

Site : 3# Chamber
Condition : FCC PART15 (350MHz) 3m 25%FACTOR VERTICAL
EUT : DC Low Profile RX
M/N : 00-001106-00
OP Condition : TX mode
Test Spec : DC 6V
Test Engineer : Iceman
Comment : Temp:23°C Humi:53%
Memo :

	Freq	Level	Over	Limit	ReadAntenna	Cable
	MHz	dBuV/m	Limit	Line	Level Factor	Loss
			dB	dBuV/m	dBuV	dB/m
1	225.94	16.78	-29.22	46.00	2.25	11.15
2	295.78	19.17	-26.83	46.00	1.92	13.32
3	349.98	63.82	-13.68	77.50	44.66	14.80
4	514.03	25.57	-20.43	46.00	2.09	18.10
5	672.14	29.14	-16.86	46.00	2.48	20.59
6	699.96	40.63	-5.37	46.00	13.26	20.95


1. All readings are Quasi-Peak values.
2. Emission Level = Antenna Factor + Cable Loss + Meter Reading



Audix Technology (Shanghai) Co., Ltd.
 3F #34Bldg. No.680 GuiPing Rd.,
 CaoHeJiang Hi-Tech Park,
 Shanghai, China 200233
 Tel:+86-21-64955500 Fax:+86-21-64955491
 audixaci@8848.net

Data#: 5

File#: D:\2006 data\s\South East\ACS6QH096-1 EMI

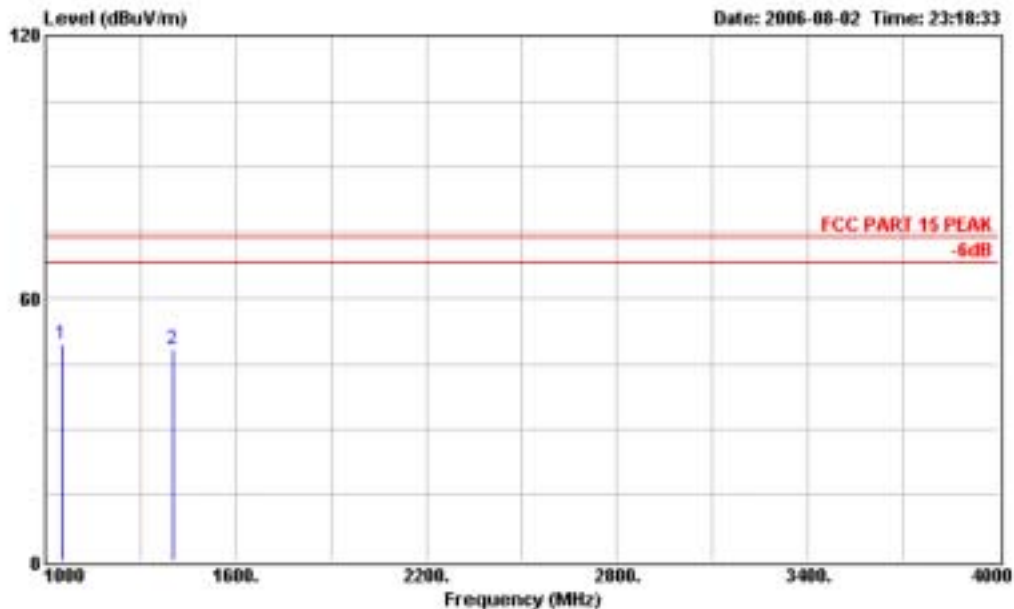

Site : site
 Condition : FCC PART 15 PEAK 3m 3115 FACTOR HORIZONTAL
 EUT : DC Low Profile RX
 M/N : 00.001106-00
 OP Condition : TX mode
 Test Spec : DC 6V
 Test Engineer : IceMan
 Comment : Temp:23°C Humi:53%

	Freq	Level	Over	Limit	Read	Probe	Cable	
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	Remark
1	1051.000	49.37	-24.63	74.00	21.34	24.50	3.53	Peak
2	1405.000	48.19	-25.81	74.00	18.56	25.20	4.43	Peak


1. All readings are Average and Peak values.
2. Emission Level = Probe Factor + Meter Reading + Cable Loss
3. The bandwidth of the VBW is set at 1MHz and RBW is set at 1MHz for measurement above 1GHz.



Audix Technology (Shanghai) Co., Ltd.
 3F #34Bldg. No.680 GuiPing Rd.,
 CaoHeJing Hi-Tech Park,
 Shanghai, China 200233
 Tel:+86-21-64955500 Fax:+86-21-64955491
 audixaci@8848.net

Data#: 2

File#: D:\2006 data\s\South East\ACS6QH096-1 EMI

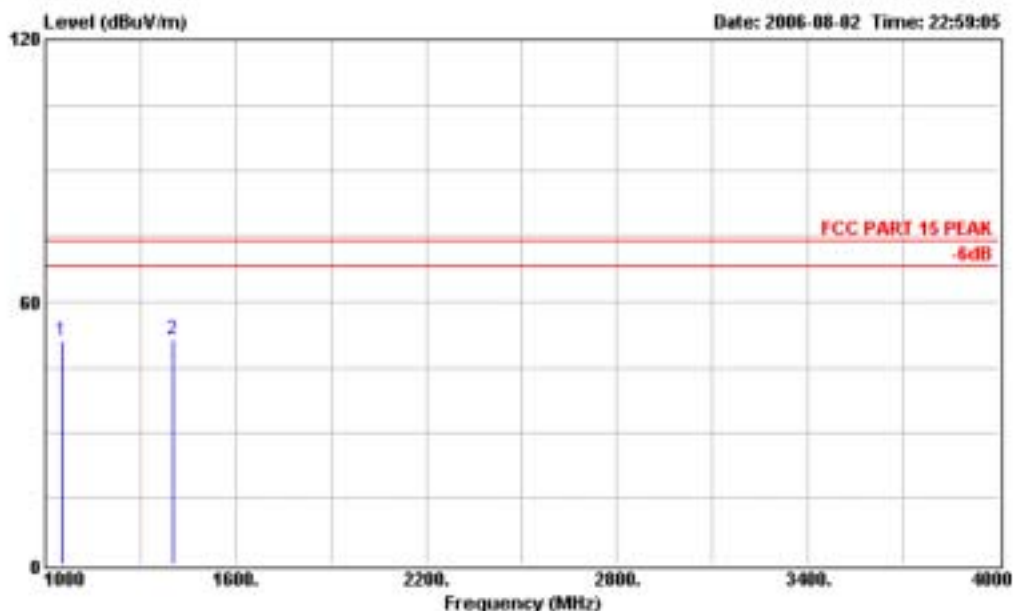

Site : site
 Condition : FCC PART 15 PEAK 3m 3115 FACTOR VERTICAL
 EUT : DC Low Profile RX
 M/N : 00-001106-00
 OP Condition : TX mode
 Test Spec : DC 6V
 Test Engineer : IceMan
 Comment : Temp:23°C Humid:53%

	Freq	Level	Over Limit	Limit	Read Level	Probe Factor	Cable Loss	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	
1	1051.000	51.08	-22.92	74.00	23.05	24.50	3.53	Peak
2	1405.000	51.37	-22.63	74.00	21.74	25.20	4.43	Peak


1. All readings are Average and Peak values.
2. Emission Level = Probe Factor + Meter Reading + Cable Loss
3. The bandwidth of the VBW is set at 1MHz and RBW is set at 1MHz for measurement above 1GHz.



Audix Technology (Shanghai) Co., Ltd.
 3F #34Bldg. No.680 GuiPing Rd.,
 CaoHeJing Hi-Tech Park,
 Shanghai, China 200233
 Tel: +86-21-64955500 Fax: +86-21-64955491
 audixaci@8848.net

Data#: 6

File#: D:\2006 data\s\South East\ACS6QH096-1 EMI

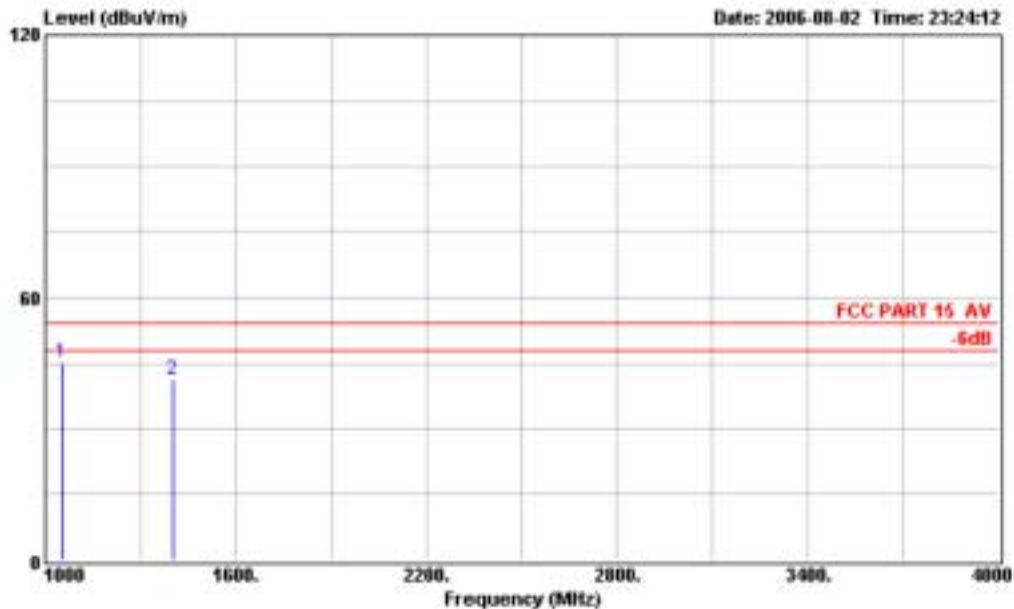

Site : site
 Condition : FCC PART 15 AV3m 3115 FACTOR HORIZONTAL
 EUT : DC Low Profile RX
 M/N : 00-001106-00
 OP Condition : TX mode
 Test Spec : DC 6V
 Test Engineer : Iceman
 Comment : Temp:23°C Humi:53%

	Freq	Level	Over	Limit	Read	Probe	Cable	
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	Remark
1	1051.000	45.37	-8.63	54.00	17.34	24.50	3.53	Average
2	1405.000	41.19	-12.81	54.00	11.56	25.20	4.43	Average


1. All readings are Average and Peak values.
2. Emission Level = Probe Factor + Meter Reading + Cable Loss
3. The bandwidth of the VBW is set at 1MHz and RBW is set at 1MHz for measurement above 1GHz.



Audix Technology (Shanghai) Co., Ltd.
 3F #34Bldg. No.680 GuiPing Rd.,
 CaoHeJing Hi-Tech Park,
 Shanghai, China 200233
 Tel: +86-21-64955500 Fax: +86-21-64955491
 audixaci@8848.net

Data#: 3

File#: D:\2006 data\s\South East\ACS6QHD96-1 EMI

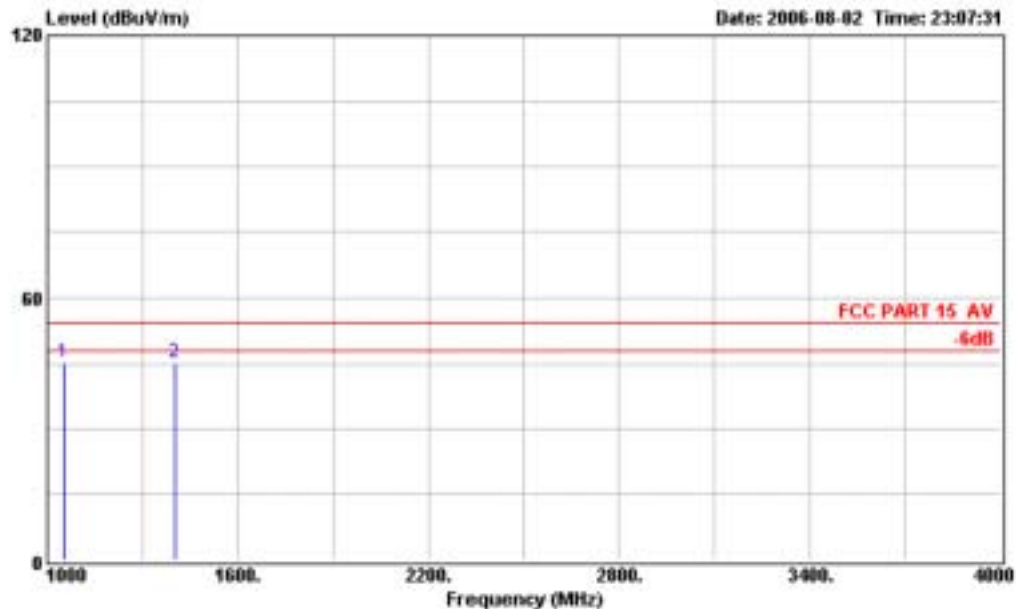

Site : site
 Condition : FCC PART 15 AV3m 3115 FACTOR VERTICAL
 EUT : DC Low Profile RX
 M/N : 00-001106-00
 OP Condition : TX mode
 Test Spec : DC 6V
 Test Engineer : IceMan
 Comment : Temp:23°C Humi:53%

	Freq	Level	Over	Limit	Read	Probe	Cable	
	MHz	dBuV/m	Limit	Line	Level	Factor	Loss	Remark
			dB	dBuV/m	dBuV	dB	dB	
1	1051.000	45.08	-8.92	54.00	17.05	24.50	3.53	Average
2	1405.000	45.37	-8.63	54.00	15.74	25.20	4.43	Average

1. All readings are Average and Peak values.
2. Emission Level = Probe Factor + Meter Reading + Cable Loss
3. The bandwidth of the VBW is set at 1MHz and RBW is set at 1MHz for measurement above 1GHz.

4. EDGE BAND TEST

4.1. Test Equipment

The following test equipments are used during the bandwidth test:

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	EMI Spectrum	HP	85422E	3625A00181	May 15, 06	1 Year
2.	Test Receiver	Rohde & Schwarz	ESVS20	830350/005	May 15, 06	1 Year
3.	Amplifier	HP	8447D	2944A07794	Mar.13, 06	1/2 Year
4.	Bilog Antenna	Schaffner	CBL6111C	2598	Jan. 11, 06	1 Year
5.	RF Cable	MIYAZAKI	5D-2W	3# Chamber No.1	Jul. 28, 06	1/2 Year
6.	RF Cable	MIYAZAKI	5D-2W	3# Chamber No.2	Jul. 28, 06	1/2 Year
7.	RF Cable	FUJIKURA	RG-55/U	3# Chamber No.3	Jul. 28, 06	1/2 Year
8.	RF Cable	FUJIKURA	RG-55/U	3# Chamber No.4	Jul. 28, 06	1/2 Year
9.	Coaxial Switch	Anritsu	MP59B	M73989	Jul. 28, 06	1/2 Year

4.2. Test Standard

The test completeness FCC Part 15 C

4.3. Test Procedure

PASS.


The testing data was attached in the next pages.



No.6 Ke Feng Road,Block 52,
Nan shan Science&Industry
shen zhen Guangdong
<http://www.audix.com.cn>

Data: 5

File: D:\2006 Report Data\South East\ACS6QH096-1.EMI (15)

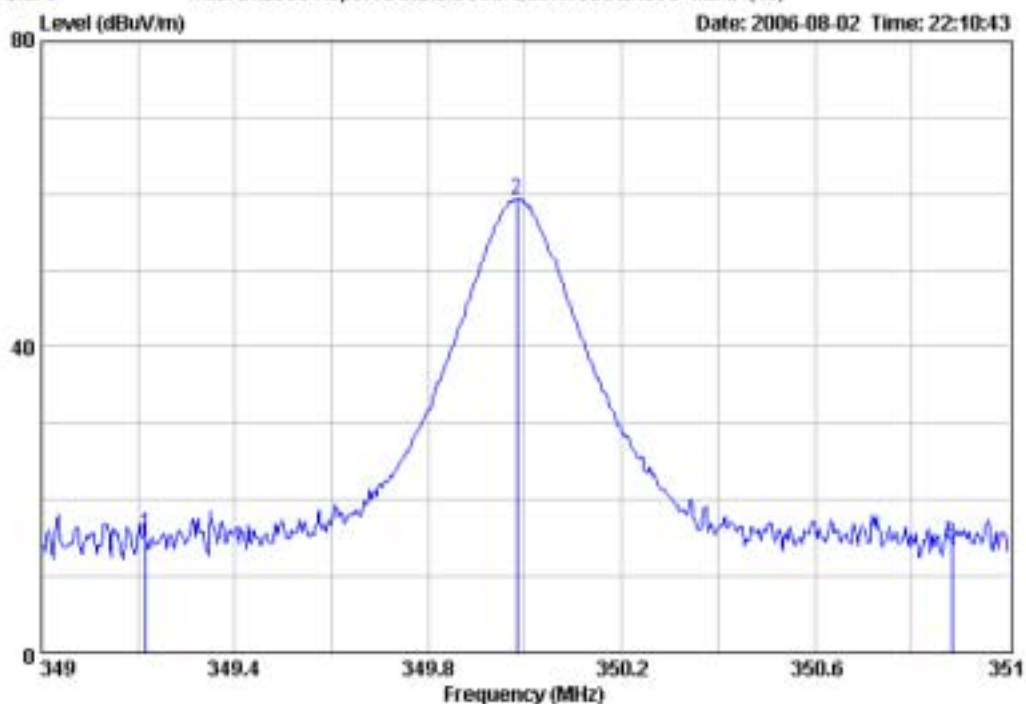

Site : 3# Chamber
Condition : 3m 2598FACTOR VERTICAL
EUT : DC Low Profile FCC
M/N : 00-001106-00
OP Condition : TX mode
Test Spec : DC 6V
Test Engineer : Iceman
Comment : Temp 23°C Humi 53%
Memo : bandwidth

	Freq	Level	Over	Limit	ReadAntenna	Cable
	MHz	dBuV/m	Limit	Line	Level Factor	Loss
			dB	dBuV/m	dBuV	dB/m
1	349.22	15.52	-----	-----	24.02	14.77
2	349.98	59.23	-----	-----	67.70	14.80
3	350.88	14.22	-----	-----	22.69	14.80

5. 99% BAND WITH

5.1. Test Equipment

The following test equipments are used during the bandwidth test:

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	EMI Spectrum	HP	85422E	3625A00181	May 15, 06	1 Year
2.	Test Receiver	Rohde & Schwarz	ESVS20	830350/005	May 15, 06	1 Year
3.	Amplifier	HP	8447D	2944A07794	Mar.13, 06	1/2 Year
4.	Bilog Antenna	Schaffner	CBL6111C	2598	Jan. 11, 06	1 Year
5.	RF Cable	MIYAZAKI	5D-2W	3# Chamber No.1	Jul. 28, 06	1/2 Year
6.	RF Cable	MIYAZAKI	5D-2W	3# Chamber No.2	Jul. 28, 06	1/2 Year
7.	RF Cable	FUJIKURA	RG-55/U	3# Chamber No.3	Jul. 28, 06	1/2 Year
8.	RF Cable	FUJIKURA	RG-55/U	3# Chamber No.4	Jul. 28, 06	1/2 Year
9.	Coaxial Switch	Anritsu	MP59B	M73989	Jul. 28, 06	1/2 Year

5.2. Test Standard

The test completeness FCC Part 15 C

5.3. Test Procedure

PASS.


The testing data was attached in the next pages.



No.6 Ke Feng Road,Block 52,
Nan shan Science&Industry
shen zhen Guangdong
<http://www.audix.com.cn>

Data: 7

File: D:\2006 Report Data\South East\ACS60H096-1.EMI (15)

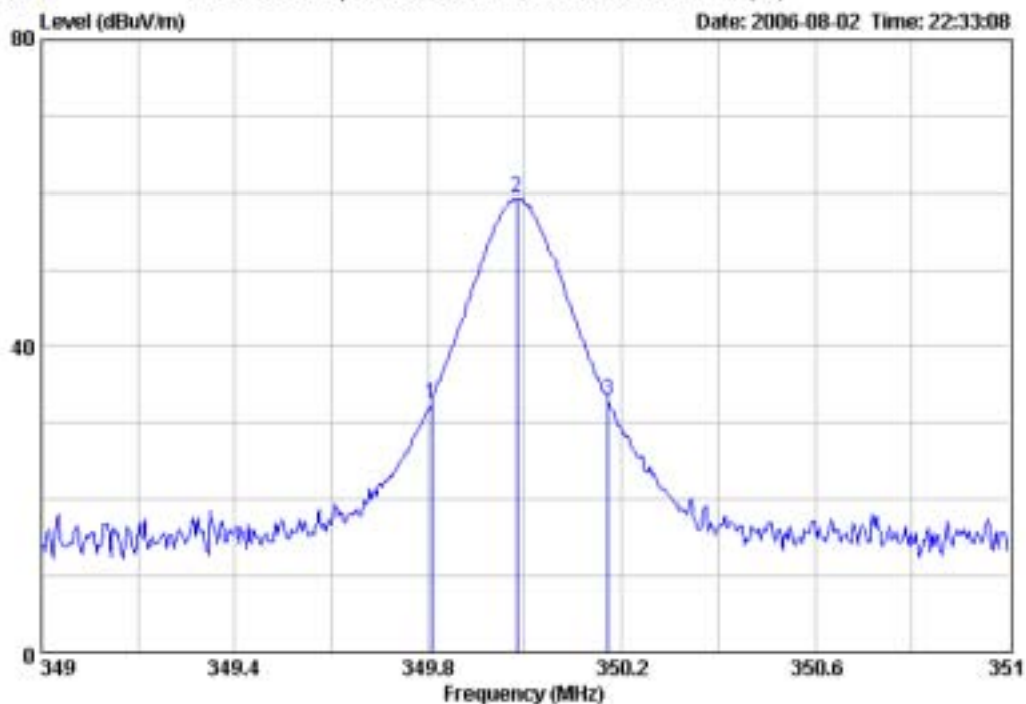

Site : 3# Chamber
Condition : 3m 2598FACTOR VERTICAL
EUT : DC Low Profile FCC
M/N : 00-001106-00
OP Condition : TX mode
Test Spec : DC 6V
Test Engineer : Iceman
Comment : Temp:23°C Humi:53%
Memo : 99% BW:366KHz
Sweep Time:100ms

	Freq	Level	Over	Limit	ReadAntenna	Cable
	MHz	dBuV/m	Limit	Line	Level Factor	Loss
			dB	dBuV/m	dBuV	dB/m
1	349.81	32.62	-----	-----	41.12	14.77
2	349.98	59.23	-----	-----	67.70	14.80
3	350.17	32.98	-----	-----	41.45	14.80

6. 20DB BAND WITH

6.1. Test Equipment

The following test equipments are used during the bandwidth test:

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	EMI Spectrum	HP	85422E	3625A00181	May 15, 06	1 Year
2.	Test Receiver	Rohde & Schwarz	ESVS20	830350/005	May 15, 06	1 Year
3.	Amplifier	HP	8447D	2944A07794	Mar.13, 06	1/2 Year
4.	Bilog Antenna	Schaffner	CBL6111C	2598	Jan. 11, 06	1 Year
5.	RF Cable	MIYAZAKI	5D-2W	3# Chamber No.1	Jul. 28, 06	1/2 Year
6.	RF Cable	MIYAZAKI	5D-2W	3# Chamber No.2	Jul. 28, 06	1/2 Year
7.	RF Cable	FUJIKURA	RG-55/U	3# Chamber No.3	Jul. 28, 06	1/2 Year
8.	RF Cable	FUJIKURA	RG-55/U	3# Chamber No.4	Jul. 28, 06	1/2 Year
9.	Coaxial Switch	Anritsu	MP59B	M73989	Jul. 28, 06	1/2 Year

6.2. Test Standard

The test completeness FCC Part 15 C

6.3. Test Procedure

PASS.


The testing data was attached in the next pages.



No.6 Ke Feng Road Block 52,
Nan shan Science&Industry
shen zhen Guangdong
<http://www.audix.com.cn>

Data: 6


File: D:\2006 Report Data\S\South East\ACS6QH096-1.EMI (15)

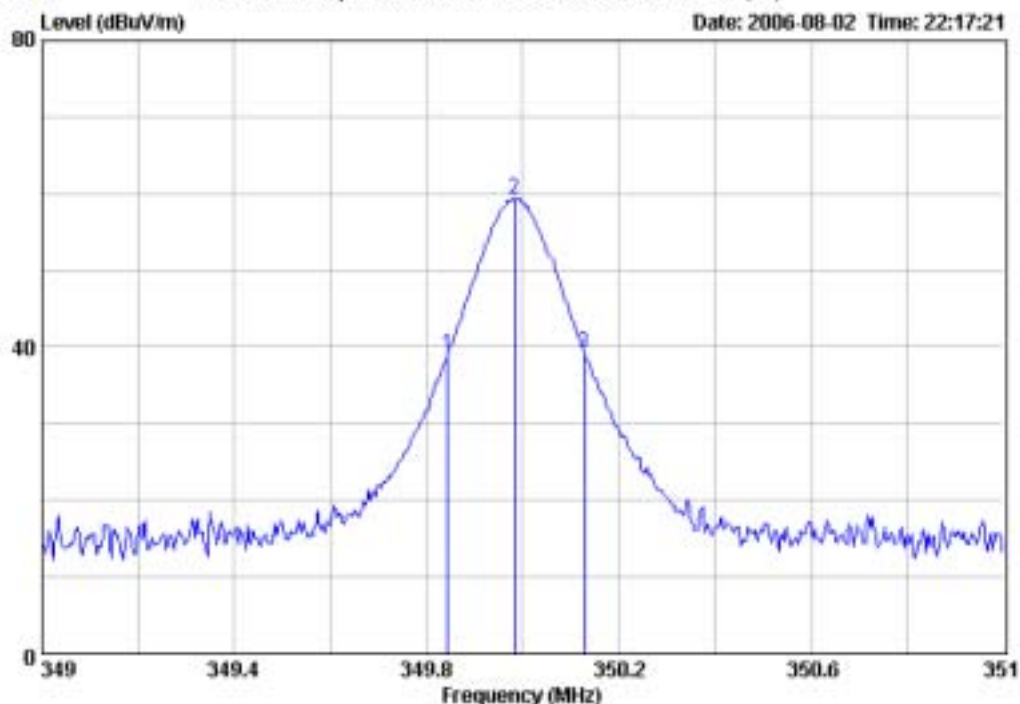


Site : 3W Chamber
Condition : 3m 2598FACTOR VERTICAL
EUT : DC Low Profile RX
M/N : 00-001106-00
OP Condition : TX mode
Test Spec : DC 6V
Test Engineer : lceman
Comment : Temp.23C Humi.53%
Memo : 20dB bandwidth=284KHz

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level Factor	Cable Loss	
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB
1	349.84	38.93	-----	-----	47.43	14.77	4.36
2	349.98	59.23	-----	-----	67.70	14.80	4.36
3	350.13	39.16	-----	-----	47.63	14.80	4.36

7. CORRECTION FACTOR

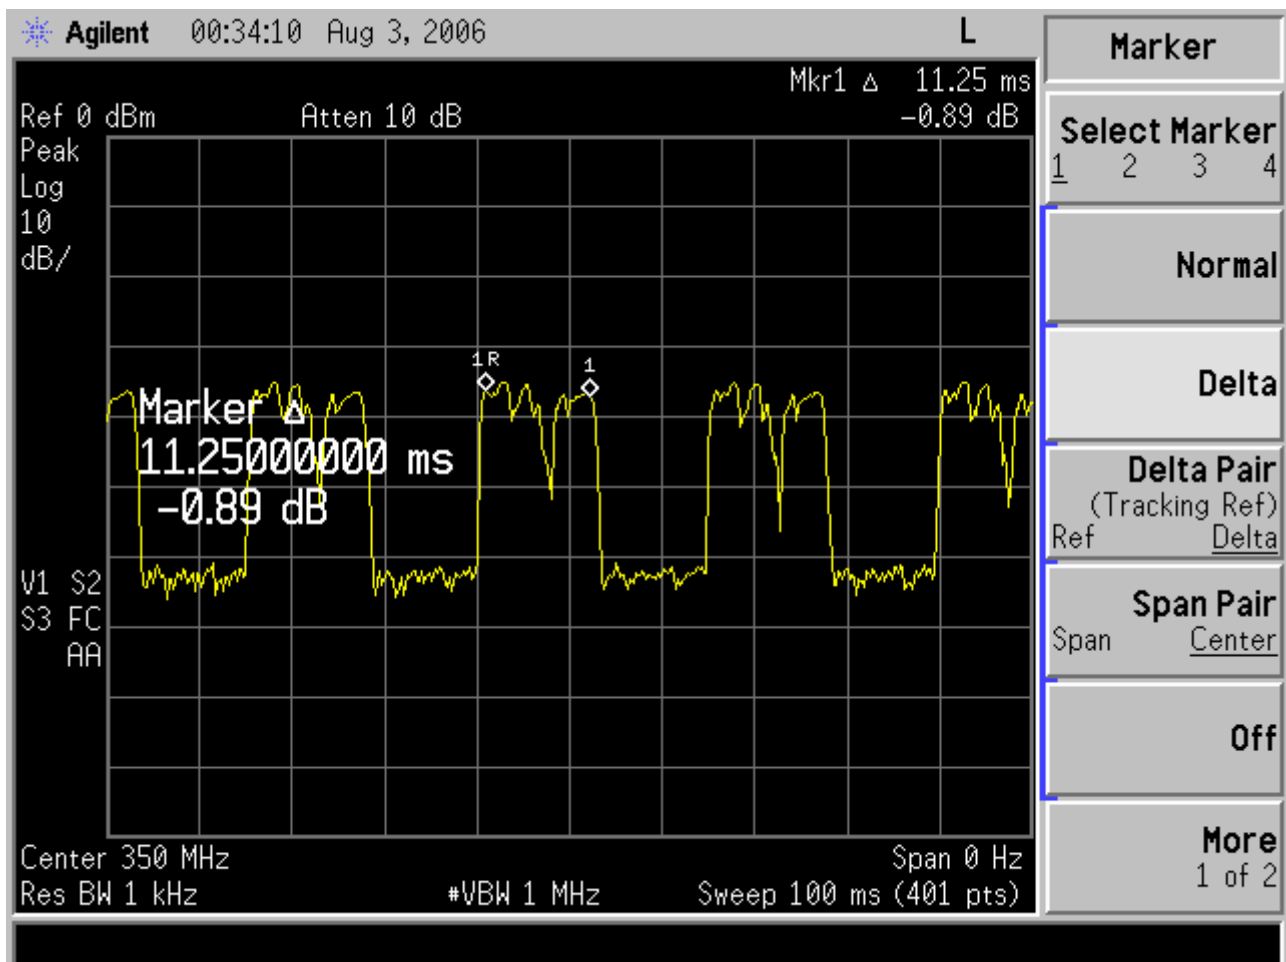

ON time=11.25ms

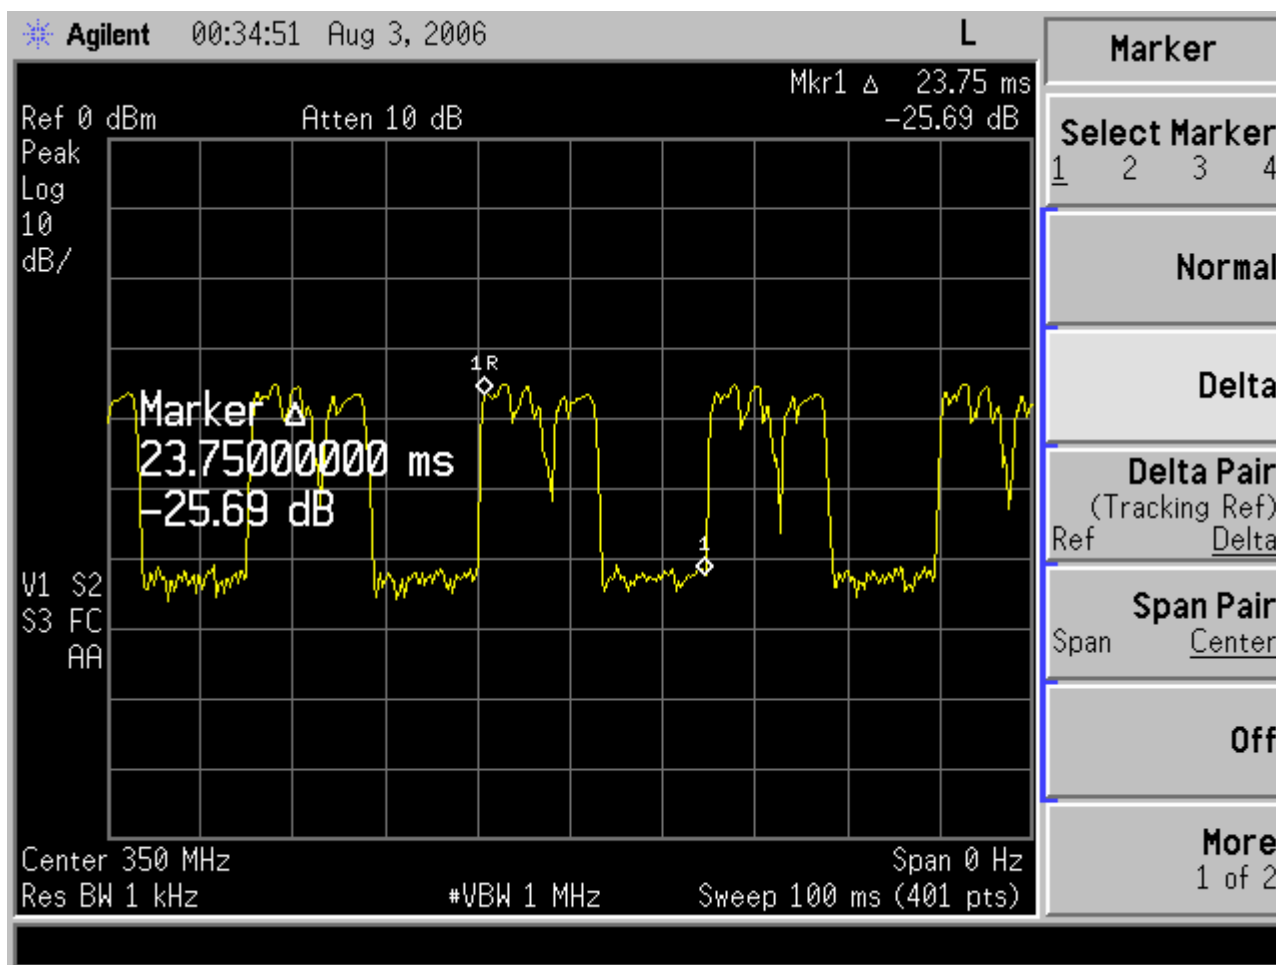

ON time+OFF time=23.75ms

Correction factor=20log(ON time/ON time+OFF time)=20log(11.25ms/23.75ms)=-6.49dB


Freq(MHz)	Peak Level (dBuV)	Correction factor(dB)	After Correction(dBuV) HORIZONTAL	Limit(dBuV)
1050.180	49.37	6.49	42.88	54.00
1405.000	48.19	6.49	41.70	54.00

1050.180&1405.000,Those peak levels and SUBTRACT the correction factor, Those are BELOW the AVERAGE limit of 54 dBuV so they PASS.

Freq(MHz)	Peak Level (dBuV)	Correction factor(dB)	After Correction(dBuV) VERTICAL	Limit(dBuV)
1050.180	45.37	6.49	38.88	54.00
1405.000	41.19	6.49	34.70	54.00

1050.180&1405.000,Those peak levels and SUBTRACT the correction factor, Those are BELOW the AVERAGE limit of 54 dBuV so they PASS.

8. UNIT STOPS TRANSMITTING TIME

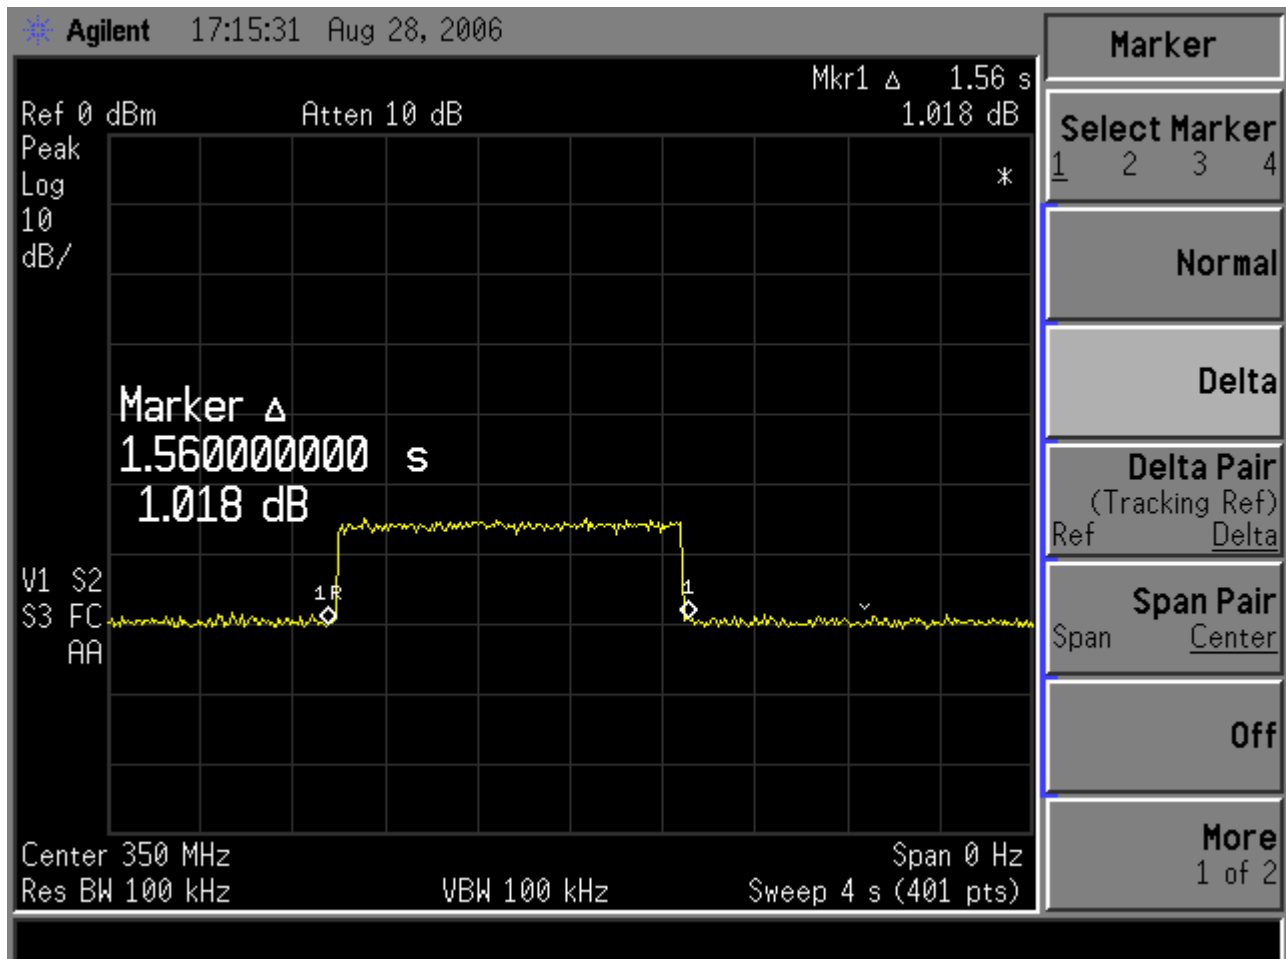


9. DEVIATION TO TEST SPECIFICATIONS

[NONE]

APPENDIX I



No.6 Ke Feng Road,Block 52,
Nan shan Science&Industry
shen zhen Guangdong
<http://www.audix.com.cn>

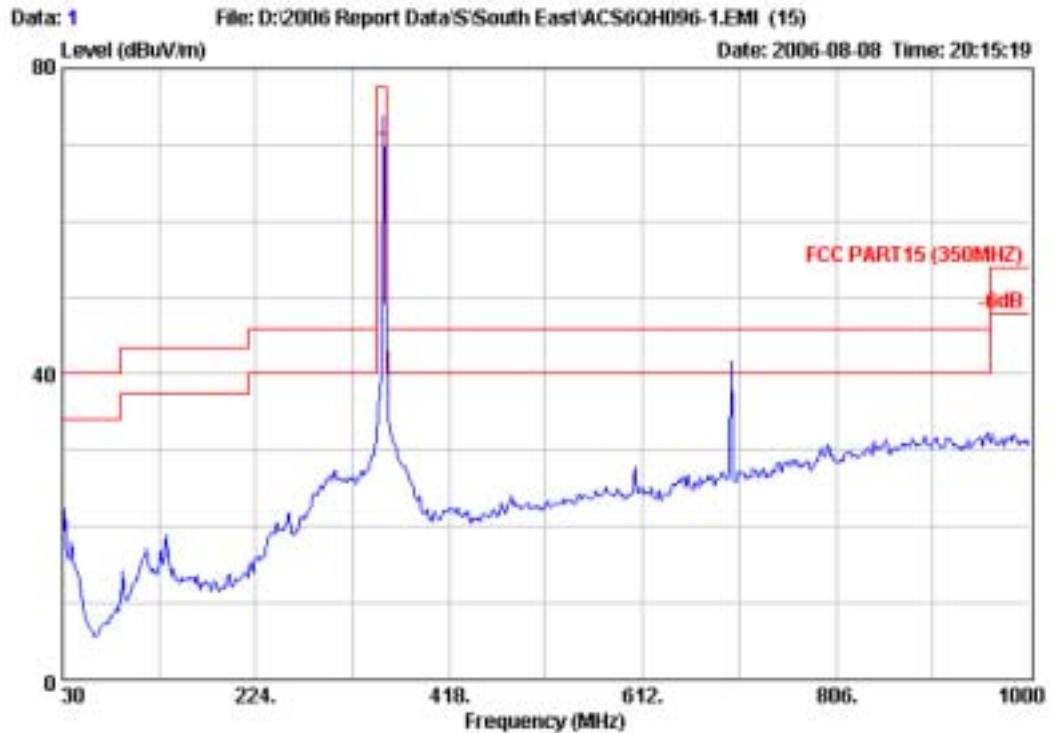


Site	: 3# Chamber
Condition	: FCC PART15 (350MHZ) 3m 25%FACTOR HORIZONTAL
EUT	: DC Low Profile FCC
M/N	: 00-001106-00
OP Condition	: TX mode
Test Spec	: DC 6V
Test Engineer	: Iceman
Comment	: Temp 23°C Humi 53%
Memo	:



No.6 Ke Feng Road,Block 52,
Nan shan Science&Industry
shen zhen Guangdong
<http://www.audix.com.cn>

Data: 3

File: D:\2006 Report Data\S\South East\ACS6QH096-1.EMI (15)

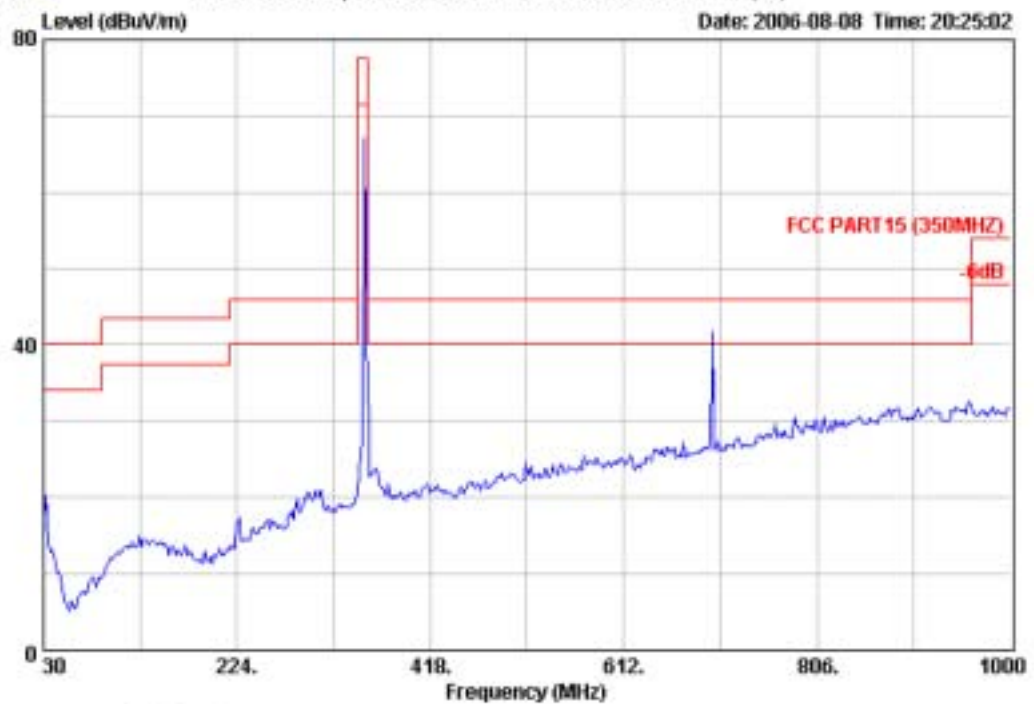


Site	: 3# Chamber
Condition	: FCC PART15 (350MHZ) 3m 2598FACTOR VERTICAL
EUT	: DC Low Profile FCC
M/N	: 00-001106-00
OP Condition	: TX mode
Test Spec	: DC 6V
Test Engineer	: Iceman
Comment	: Temp 23°C Humi 53%
Memo	:



Audix Technology (Shanghai) Co., Ltd.
3F #34Bldg. No.680 GulPing Rd.,
CaoHeJing Hi-Tech Park,
Shanghai, China 200233
Tel:+86-21-64955500 Fax:+86-21-64955491
audixaci@8848.net

Data#: 4 File#: D:\2006 data\s\South East\ACS6QH096-1_EMI

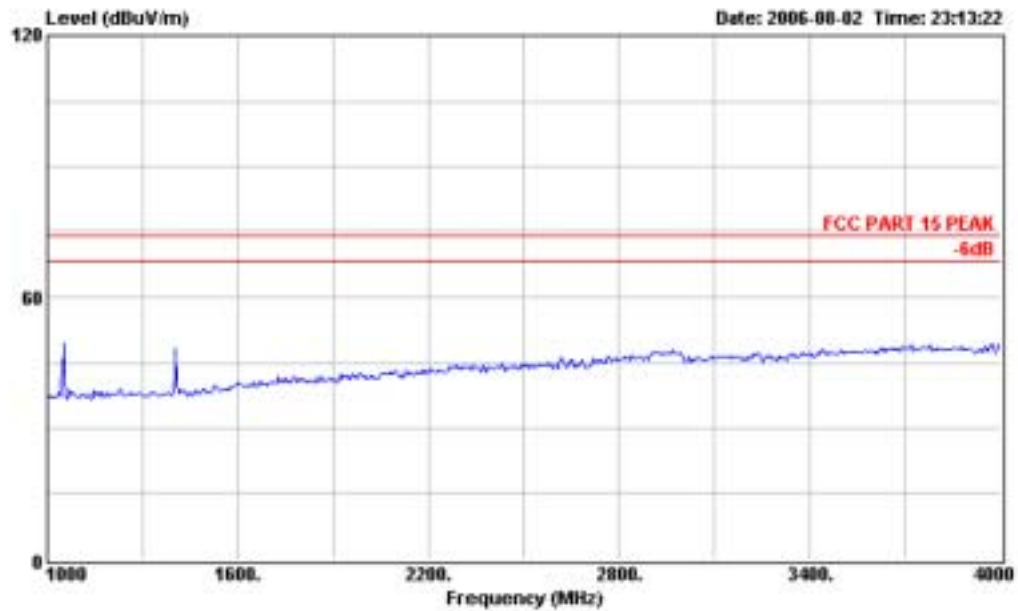


Site : site
Condition : FCC PART 15 PEAK 3m 3115 FACTOR HORIZONTAL
EUT : DC Low Profile RX
M/N : 00-001106-00
OP Condition : TX mode
Test Spec : DC 6V
Test Engineer : Iceman
Comment : Temp:23°C Humi:53%



Audix Technology (Shanghai) Co., Ltd.
3F #34Bldg. No.680 GulPing Rd.,
CaoHeJing Hi-Tech Park,
Shanghai, China 200233
Tel:+86-21-64955500 Fax:+86-21-64955491
audixaci@8848.net

Data#: 1 File#: D:\2006 data\s\South East\ACS6QH096-1.EMI

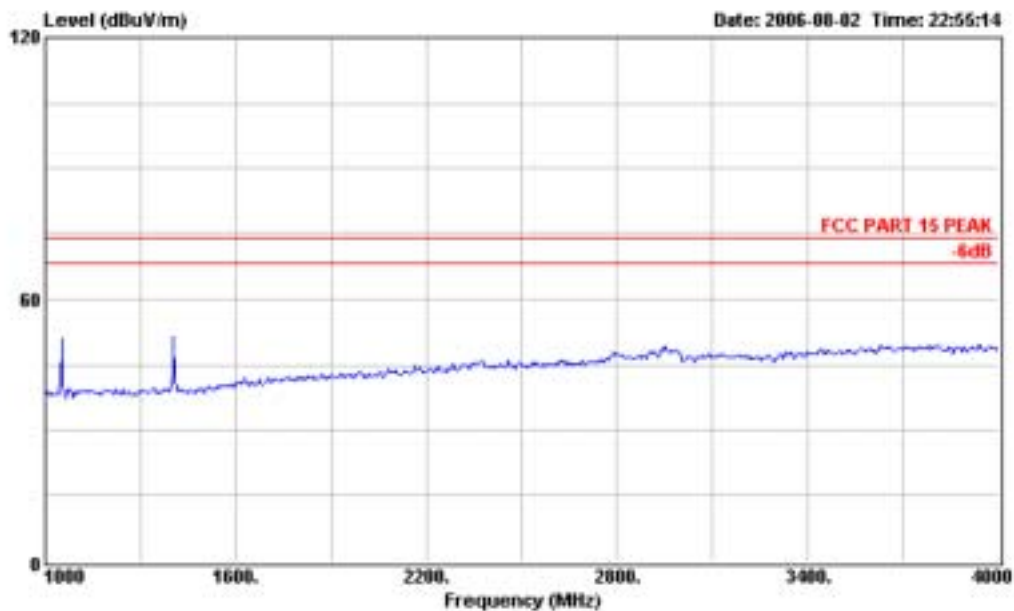

Site : site
Condition : FCC PART 15 PEAK 3m 3115 FACTOR VERTICAL
EUT : DC Low Profile RX
M/N : 00-001106-00
OP Condition : TX mode
Test Spec : DC 6V
Test Engineer : Iceman
Comment : Temp:23°C Humid:53%