



Test Report - FCC PART 15.247 / DTS

Prepared For: Crestron Electronics Inc.

Approved for Release By:

Signature: Bruno Clavier

Name & Title: Bruno Clavier, General Manager

Date of Signature 8/18/2021

This test report shall not be reproduced except in full without the written and signed permission of Timco Engineering Inc. (IIA). This test report relates only to the items tested as identified and is not valid for any subsequent changes or modifications made to the equipment under test.



Table of Contents

1.	CUSTOMER INFORMATION.....	4
1.1	TEST RESULT SUMMARY	4
2.	LOCATION OF TESTING	6
2.1	TEST LABORATORY	6
2.2	TESTING WAS PERFORMED, REVIEWED BY	6
3.	TEST SAMPLE(S) (EUT/DUT).....	7
3.1	DESCRIPTION OF THE EUT.....	7
3.2	CONFIGURATION OF EUT	8
3.3	TEST SETUP OF EUT.....	8
4.	TEST METHODS & APPLICABLE REGULATORY LIMITS.....	9
4.1	TEST METHODS/STANDARDS/GUIDANCE:	9
4.2	APPLIED LIMITS AND REGULATORY LIMITS:.....	9
5.	MEASUREMENT UNCERTAINTY.....	9
6.	ENVIRONMENTAL CONDITIONS	9
6.1	TEMPERATURE & HUMIDITY.....	9
7.	LIST OF TEST EQUIPMENT AND TEST FACILITY.....	10
7.1	LIST OF TEST EQUIPMENT	10
8.	TEST RESULTS	11
8.1	99% OCCUPIED BANDWIDTH	12
8.1.1	99% Occupied Bandwidth Test Data / Spectrum Plots, 2405 MHz.....	13
8.1.2	99% Occupied Bandwidth Test Data / Spectrum Plots, 2440 MHz	14
8.1.3	99% Occupied Bandwidth Test Data / Spectrum Plots, 2480 MHz	15
8.1.4	6dB Occupied Bandwidth Test Data / Spectrum Plots, 2405 MHz.....	16
8.1.5	6dB Occupied Bandwidth Test Data / Spectrum Plots, 2440 MHz	17
8.1.6	6dB Occupied Bandwidth Test Data / Spectrum Plots, 2480 MHz	18
8.2	DTS CONDUCTED OUTPUT POWER.....	19
8.2.1	Conducted Output Power Test Data / Spectrum Plots, 2405 MHz.....	20
8.2.2	Conducted Output Power Test Data / Spectrum Plots, 2440 MHz.....	21
8.2.3	Conducted Output Power Test Data / Spectrum Plots, 2480 MHz.....	22
8.3	POWER SPECTRAL DENSITY (PSD).....	23
8.3.1	Power Spectral Density (PSD) Test Data / Spectrum Plots, 2405 MHz	24
8.3.2	Power Spectral Density (PSD) Test Data / Spectrum Plots, 2440 MHz	25
8.3.3	Power Spectral Density (PSD) Test Data / Spectrum Plots, 2480 MHz	26
8.1	RADIATED EMISSIONS.....	27
8.1.1	Radiated Emissions Test Data, 2405MHz	28
8.1.2	Radiated Emissions Test Data, 2440MHz.....	28
8.1.3	Radiated Emissions Test Data, 2480MHz.....	29
8.2	BAND-EDGE MEASUREMENTS	30



Timco Engineering, Inc., an IIA Company
849 NW State Road 45, Newberry, Florida 32669
(352) 472-5500 / testing@timcoengr.com

8.2.1	Lower Band Edge Plot.....	31
8.2.2	Upper Band Edge Plot.....	32
9.	ANNEX-A - PHOTOGRAPHS OF THE EUT.....	33
10.	ANNEX-B – TEST SETUP PHOTOGRAPHS.....	33
11.	HISTORY OF TEST REPORT CHANGES.....	33



Timco Engineering, Inc., an IIA Company
849 NW State Road 45, Newberry, Florida 32669
(352) 472-5500 / testing@timcoengr.com

1. Customer Information

Applicant: CRESTRON ELECTRONICS INC
Address: 15 Volvo Drive
Rockleigh NJ 07647 United States

1.1 Test Result Summary

The following test procedure and guidance were used for measuring KDB 996369 D04 Module Integration Guide v01, May 1 2019, Section 3 and ANSI C63.10-2013. Full test results are available in this report.

No additions to the test methods were needed. There were no deviations, or exclusions from the test methods. No test results are from external providers or from the customer. The test results relate only to the items tested. Timco does not offer opinions and interpretations, only a pass/fail statement.



The Following is for Test item FCC ID: EROCENGW1

FCC Clauses	Description of the requirements	Result (Pass, Fail or N/A)
Applicable Clauses from Part 2 or KDB		
KDB 558074 D01	Duty Cycle	
KDB 558074 D01	99 % Bandwidth	for reporting only
KDB 558074 D01	Band-edge measurements	Pass
Applicable Clauses from Part 15.247		
15.247 (a) (1)	FHSS (i,ii,iii)	N/A
15.247 (a) (2)	6dB Bandwidth	Pass
15.247 (b) (1)	FHSS conducted output power for 2.400-2483.5 MHz	N/A
15.247 (b) (2)	FHSS conducted output power for 902-928 MHz	N/A
15.247 (b) (3)	DTS conducted output power	Pass
15.247 (b) (4)	Conducted output power >6dBi	Pass
15.247 (c) (1)	Ant Gain >6dBi Fixed PtP	
15.247 (c) (2)	Ant Gain >6dBi MIMO	
15.247 (d) / 15.215 (b)	Spurious Emissions (Out of Band) Emissions in nonrestricted frequency bands	Pass
15.247 (e)	Power Spectral Density (PSD)	Pass
15.247 (f)	Hybrid System requirements	
15.247 (g)	FHSS System requirements	N/A
15.247 (h)	FHSS spectrum sensing	N/A
Applicable Clauses from Part 2 and Part 15 Subpart C		
15.203	Antenna requirements	
15.205	Restricted bands of operation	
15.207	AC Power Conducted Emissions	N/A
15.209	Radiated Emissions	
15.211	Tunnel Radio Systems	N/A
15.212 (a)	Single Modular Transmitter	
15.212 (b)	Limited Modular Transmitter	
15.213	Cable Locating Equipment	N/A



Timco Engineering, Inc., an IIA Company
 849 NW State Road 45, Newberry, Florida 32669
 (352) 472-5500 / testing@timcoengr.com

2. Location of Testing

2.1 Test Laboratory


Timco Engineering Inc. is a subsidiary of Industrial Inspection & Analysis, Inc. ("IIA"). Testing was performed at Timco's permanent laboratory located at 849 NW State Road 45, Newberry, Florida 32669

FCC test firm # 578780
 FCC Designation # US1070
 FCC site registration is under A2LA certificate # 0955.01
 ISED Canada test site registration # 2056A
 EU Notified Body # 1177
 For all designations see A2LA scope # 0955.01

2.2 Testing was performed, reviewed by

Dates of Testing: 7/1/2021 – 7/2/2021

Signature:



Sr. EMC Engineer
 EMC-003838-NE



Name & Title:

Tim Royer, EMC Engineer

Date of Signature

8/18/2021



3. Test Sample(s) (EUT/DUT)

The test sample was received: 7/2/2021

3.1 Description of the EUT

A description as well as unambiguous identification of the EUT(s) tested. Where more than one sample is required for technical reasons (such as the use of connected units for the purpose of conducted output power testing where the product units will have integral antennas), each specific test shall identify which unit was tested.

Identification	
FCC ID:	EROCENGW1
Brief Description	CEN-GW1 Sub GHz Radios
Model(s) #	M201913001
Firmware version	V2.4881.22497
Software version	n/a
Serial number	Engineering Sample 1

Technical Characteristics	
Technology	WB-DSSS
Frequency Range	2405-2480 MHz
Modulation	OQPSK
Antenna Type	External Connector

Antenna Characteristics			
Frequency Range	Mode / BW	Ant Gain 1	Ant Gain 2
2405 – 2480	n/a	2 dBi	n/a



3.2 Configuration of EUT

Test Modes					
Band	Mode (#)	Mode (Type)	Test Frequencies	Modulation	Number of Antennas
2405 – 2480	1	GFSK	2405 MHz, 2440 MHz, 2480 MHz	OQPSK	1

Operating conditions during Testing:

No modifications of the device under test (including firmware, specific software settings, and input/output signal levels to the EUT).

Peripherals used during Testing:

A laptop provided by the manufacturer was used to program the EUT.

3.3 Test Setup of EUT

Equipment, antenna, and cable arrangement. The setup of the equipment and cable or wire placement on the test site that produces the highest radiated and the highest ac power line conducted emissions shall be shown clearly and described. Information on the orientation of portable equipment during testing shall be included. Drawings or photographs may be used for this purpose.

Test Setups are included in the test report.



4. Test methods & Applicable Regulatory Limits

4.1 Test methods/Standards/Guidance:

Test procedures and guidance for measuring Digital Transmission System (DTS) are provided in the FCC KDB 558074 D01 DTS Measurement Guidance and in Clause 11 of ANSI C63.10-2013.

- 1) ANSI C63.10-2013
- 2) FCC KDB 558074 D01

4.2 Applied Limits and Regulatory Limits:

- 3) FCC CFR 47 Part 15.247

5. Measurement Uncertainty

Parameter	Uncertainty (dB)
Conducted Emissions	± 3.14 dB
Radiated Emissions (9kHz – 30 MHz)	± 3.08 dB
Radiated Emissions (30 – 200 MHz)	± 2.16 dB
Radiated Emissions (200 – 1000 MHz)	± 2.15 dB
Radiated Emissions (1 GHz – 18 GHz)	± 2.14 dB
Radiated Emissions (18 GHz – 40 GHz)	± 2.31 dB
Note: The uncertainties provided in this table represent an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of K=2.	

6. Environmental Conditions

6.1 Temperature & Humidity

Measurements performed at the test site did not exceed the following:

Temperature	23 C +/- 5%
Humidity	55% +/- 5%
Barametric pressure	30.05 inHg
Note: Specific environmental conditions that are applicable to a specific test are available in the test result section.	



7. List of Test Equipment and Test Facility

The test equipment used identified by type, manufacturer, serial number, or other identification and the date on which the next calibration or service check is due.

Description of the firmware or software used to operate EUT for testing purposes.

A complete list of all test equipment used shall be included with the test report. The manufacturer’s model and serial numbers, and date of last calibration, and calibration interval shall be included. Measurement cable loss, measuring instrument bandwidth and detector function, video bandwidth, if appropriate, and antenna factors shall also be included where applicable.

7.1 List of Test Equipment

Type	Device	Manufacturer	Model	SN #	Current Cal	Cal Due
Antenna	Biconical 1057	Eaton	94455-1	1057	10/16/20	10/16/2023
Antenna, NSA	Log-Periodic 1243	Eaton	96005	1243	5/4/21	5/3/2024
Antenna	Double-Ridged Horn/ETS Horn 1	ETS-Lindgren	3117	00035923	2/25/20	2/24/2023
Antenna	Double-Ridged Horn/ETS Horn 2	ETS-Lindgren	3117	00041534	10/14/20	10/14/2023
Antenna	Double-Ridged Horn 18-40 GHz	EMCO	3116	9011-2145	10/19/20	10/19/2023
CHAMBER	CHAMBER	Panashield	3M	N/A	3/12/19	3/11/2022
Pre-amp	Pre-amp	RF-LAMBDA	RLNA00M45GA	NA	2/27/19	2/26/2022
Receiver	EMI Test Receiver R&S ESU 40	Rohde & Schwarz	ESU 40	100320	8/28/18	8/27/2021

Software	Author	Version	Validation Or
ESU Firmware	Rohde & Schwarz	4.43 SP3; BIOS v5.1-24-3	2018
RSCCommander	Rohde & Schwarz	1.6.4	2014



Timco Engineering, Inc., an IIA Company
849 NW State Road 45, Newberry, Florida 32669
(352) 472-5500 / testing@timcoengr.com

8. Test Results

The results of the test are usually indicated in the form of tables, spectrum analyzer plots, charts, sample calculations, as appropriate for each test procedure.

A description and/or a block diagram of the test setup is usually provided.


The measurement results, along with the appropriate limits for comparison, may be presented in tabular or graphical form. In addition, any variation in the measurement environment may be reported if applicable (e.g., a significant change of temperature that could affect the cable loss and amplifier response).

Unless noted otherwise in the referenced standard, the measurements of **ac power-line conducted emissions and conducted power output** will be reported in units of dB μ V. Unless noted otherwise in the referenced standard, the measurements of **radiated emissions** will be reported in units of decibels, referenced to one microvolt per meter (dB μ V/m) for electric fields, or to one ampere per meter (dBA/m) for magnetic fields, at the distance specified in the appropriate standards or requirements. The measurements of antenna-conducted power for receivers may be reported in units of dB μ V if the impedance of the measuring instrument is also reported. Otherwise, antenna-conducted power will be reported in units of decibels referenced to one milliwatt (dBm). All formulas for data conversions and conversion factors, if used, will be included in this measurement report.

8.1 99% Occupied Bandwidth

Requirement from FCC KDB 558074 D01 and test procedure from ANSI C63.10-2013 section 6.9.3


Setup



99% BW Test Results


Tuned Frequency (MHz)	99% BW (MHz)	6dB BW (MHz)
2405	2.235	1.77
2440	2.249	1.84
2480	2.245	1.86

8.1.1 99% Occupied Bandwidth Test Data / Spectrum Plots, 2405 MHz

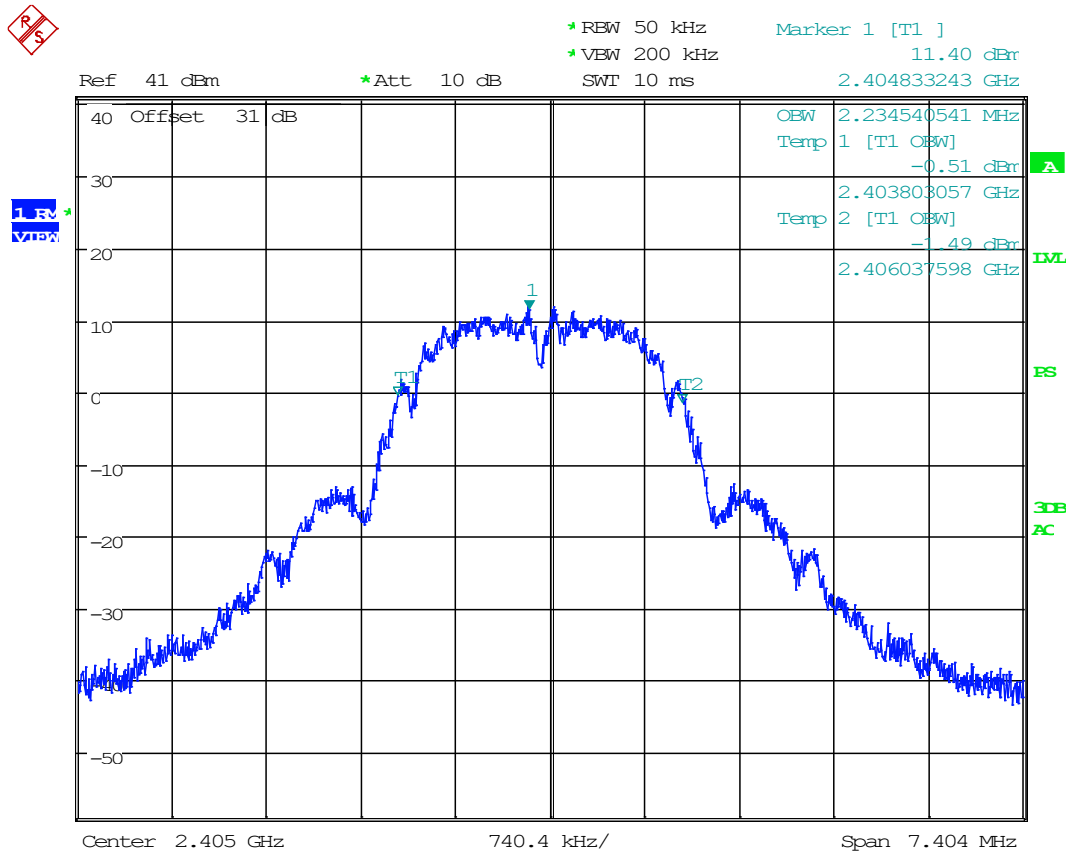

Date: 1.FEB.2003 03:24:59


8.1.2 99% Occupied Bandwidth Test Data / Spectrum Plots, 2440 MHz

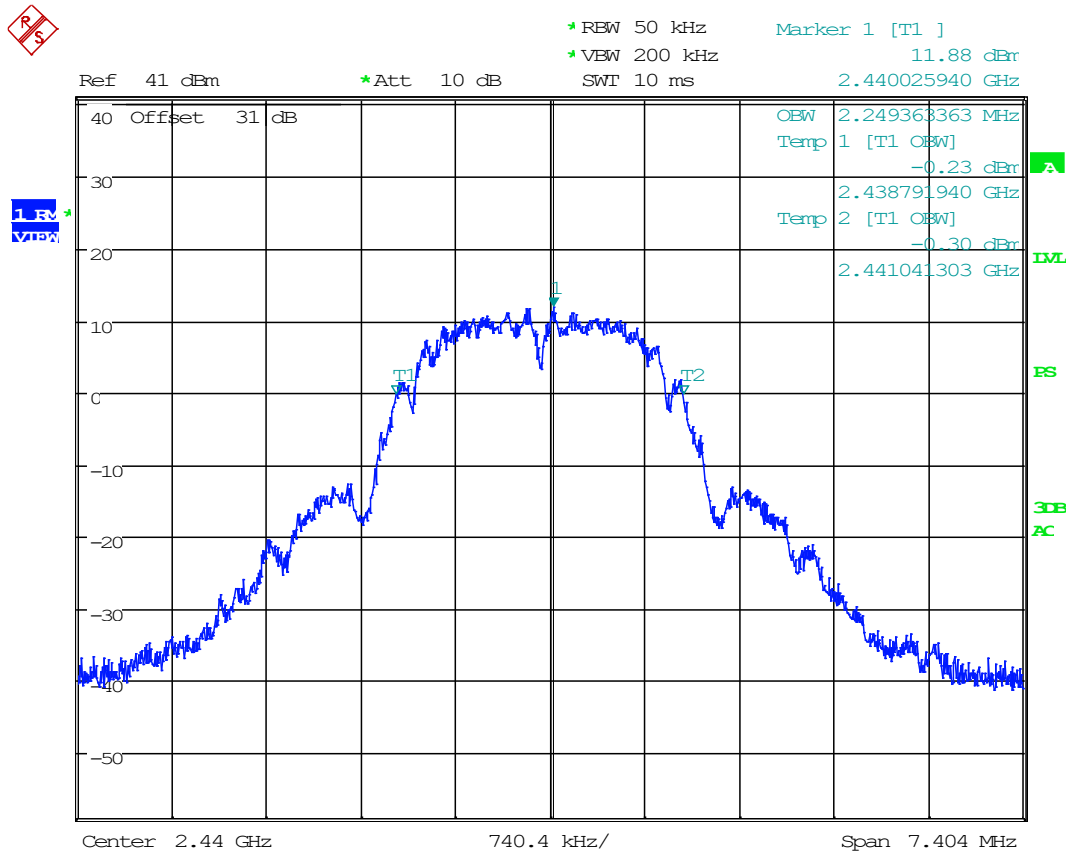

Date: 1.FEB.2003 03:27:39




8.1.3 99% Occupied Bandwidth Test Data / Spectrum Plots, 2480 MHz

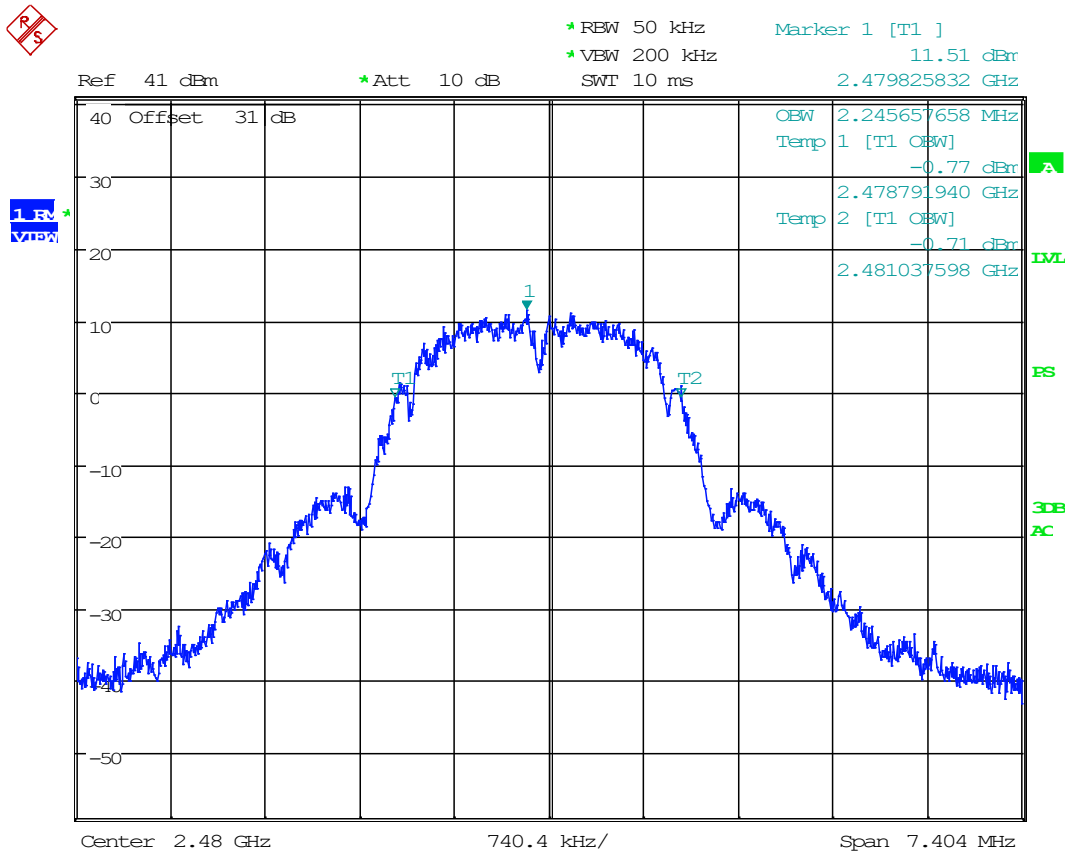

Date: 1.FEB.2003 03:29:34


8.1.4 6dB Occupied Bandwidth Test Data / Spectrum Plots, 2405 MHz

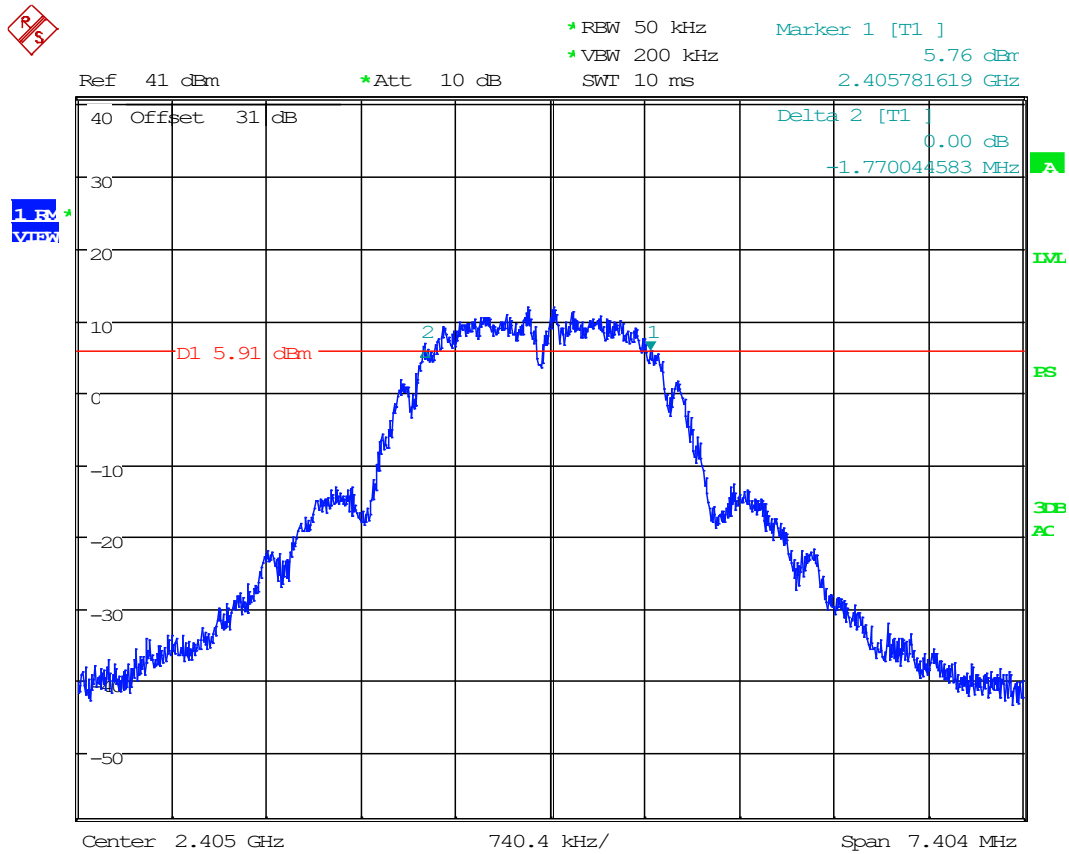

Date: 1.FEB.2003 03:26:04




8.1.5 6dB Occupied Bandwidth Test Data / Spectrum Plots, 2440 MHz

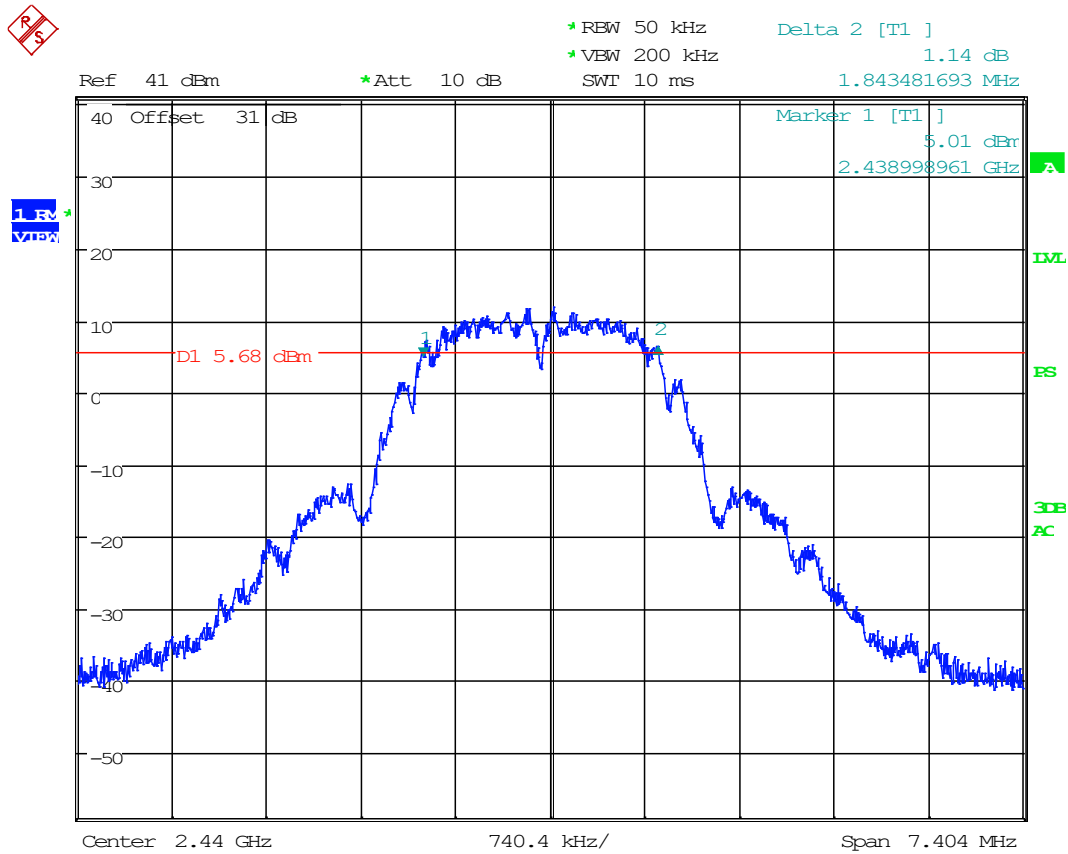

Date: 1.FEB.2003 03:27:12

8.1.6 6dB Occupied Bandwidth Test Data / Spectrum Plots, 2480 MHz

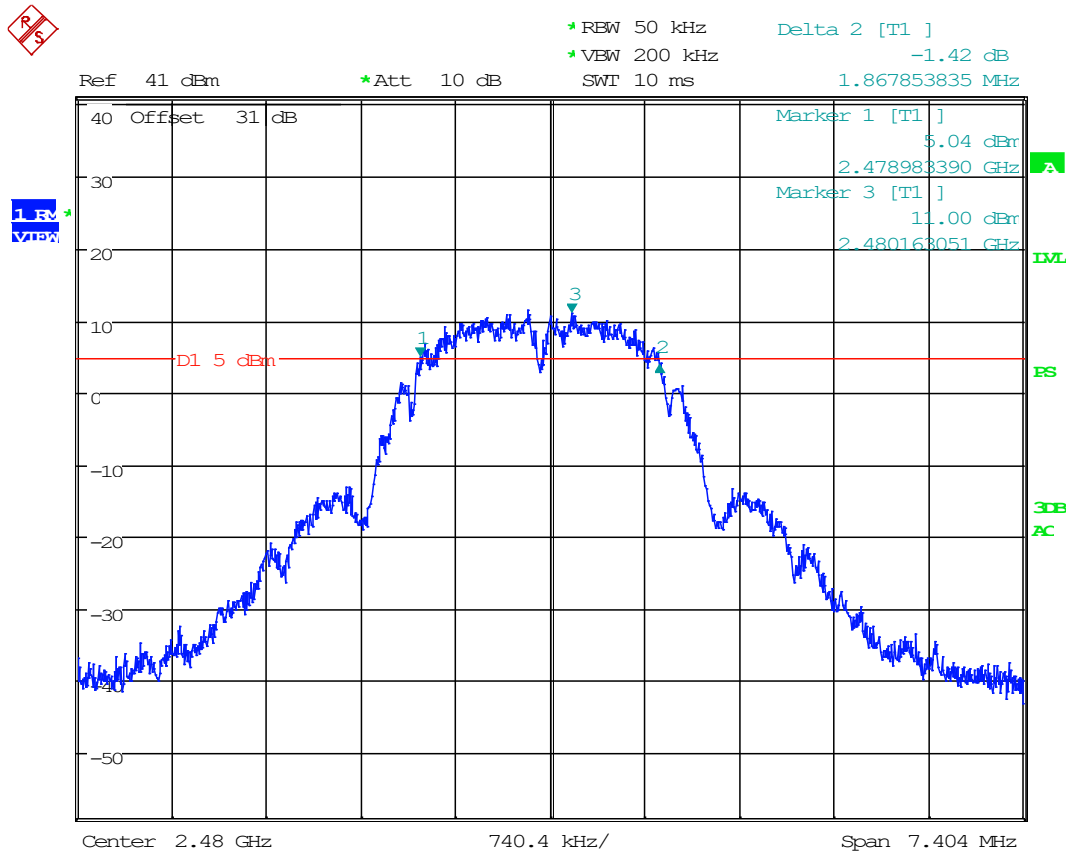


Date: 1.FEB.2003 03:30:17

8.2 DTS conducted output power

Limits from FCC Part 15.247 (b) (3) and test procedure from ANSI C63.10-2013 section 11.9

Setup




Conducted Output Power Test Results

Tuned Frequency (MHz)	Power Output (dBm)
2405	18.18
2440	18.13
2480	17.92

- MAXIMUM Conducted Output Power = 18.18 dBm


8.2.1 Conducted Output Power Test Data / Spectrum Plots, 2405 MHz

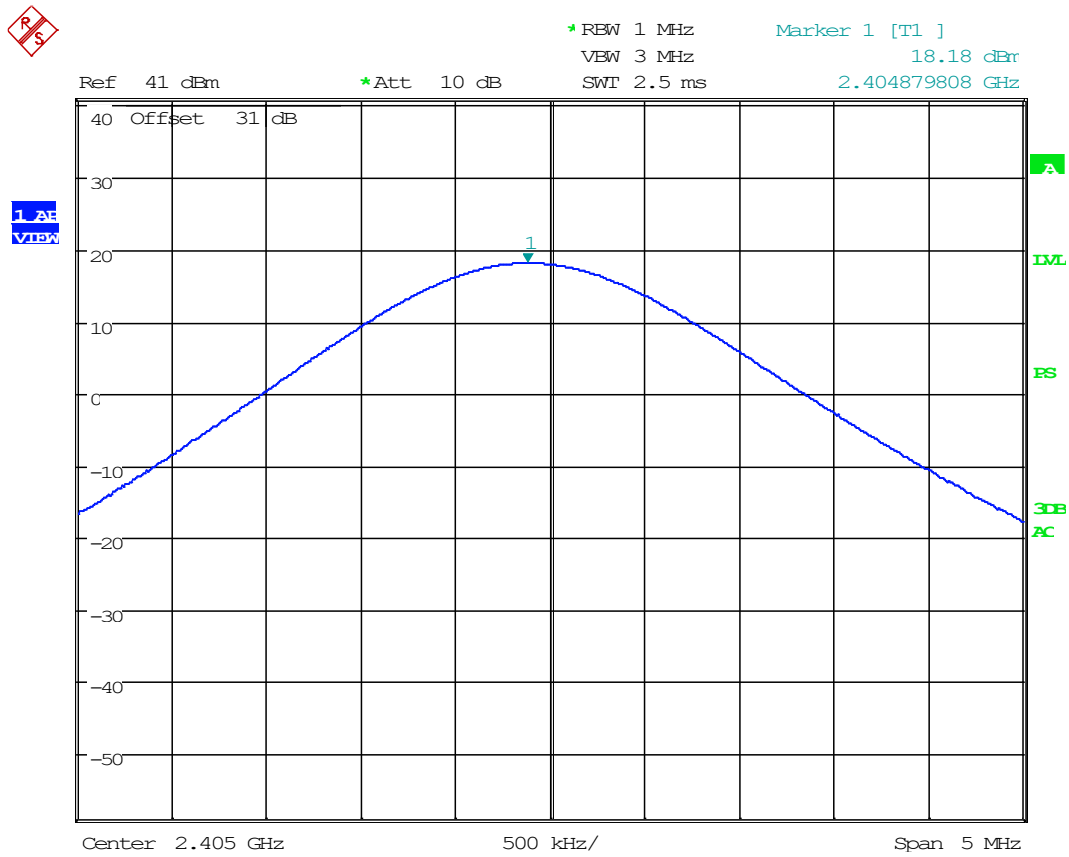

Date: 1.FEB.2003 01:30:37




8.2.2 Conducted Output Power Test Data / Spectrum Plots, 2440 MHz

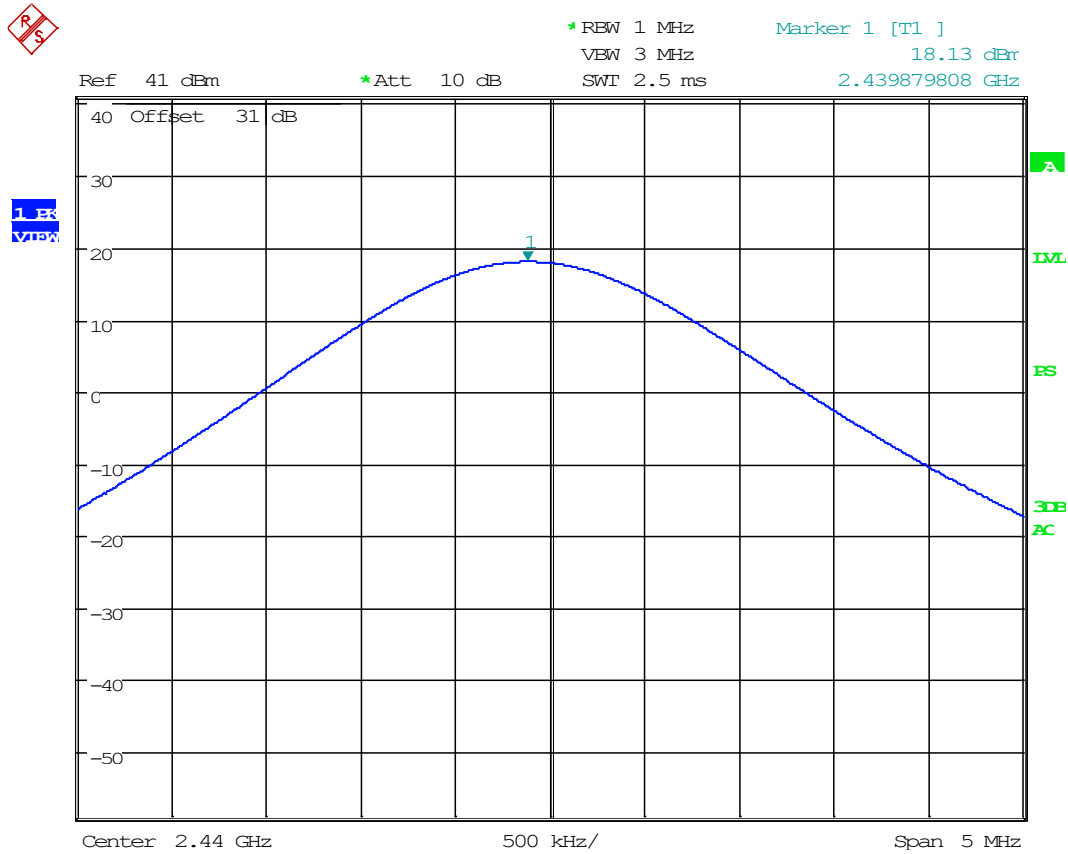

Date: 1.FEB.2003 01:29:32



8.2.3 Conducted Output Power Test Data / Spectrum Plots, 2480 MHz

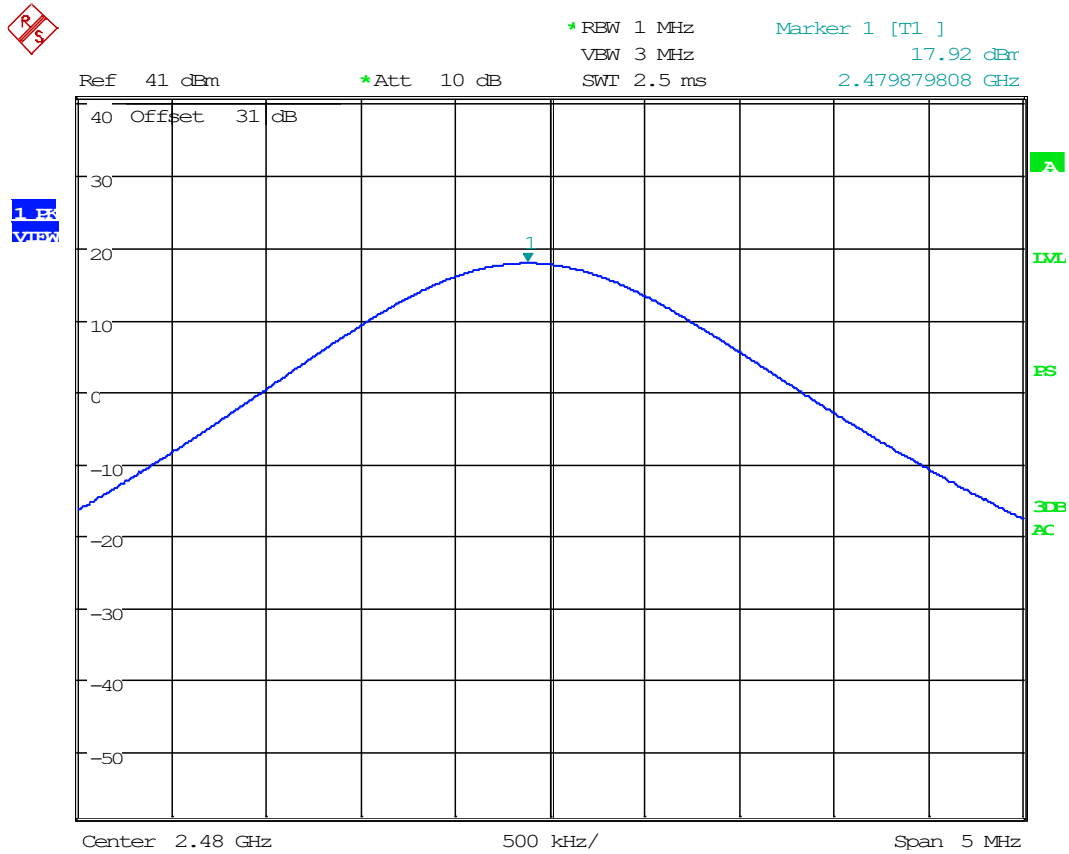


Date: 1.FEB.2003 01:31:23

8.3 Power Spectral Density (PSD)

Limits from FCC Part 15.247 (e) and test procedure from ANSI C63.10-2013 section 11.10


Setup



PSD Test Results


LoRa (Long Range)	
Tuned Frequency (MHz)	PSD Level (dBm)
2405	6.82
2440	6.63
2480	6.93

8.3.1 Power Spectral Density (PSD) Test Data / Spectrum Plots, 2405 MHz

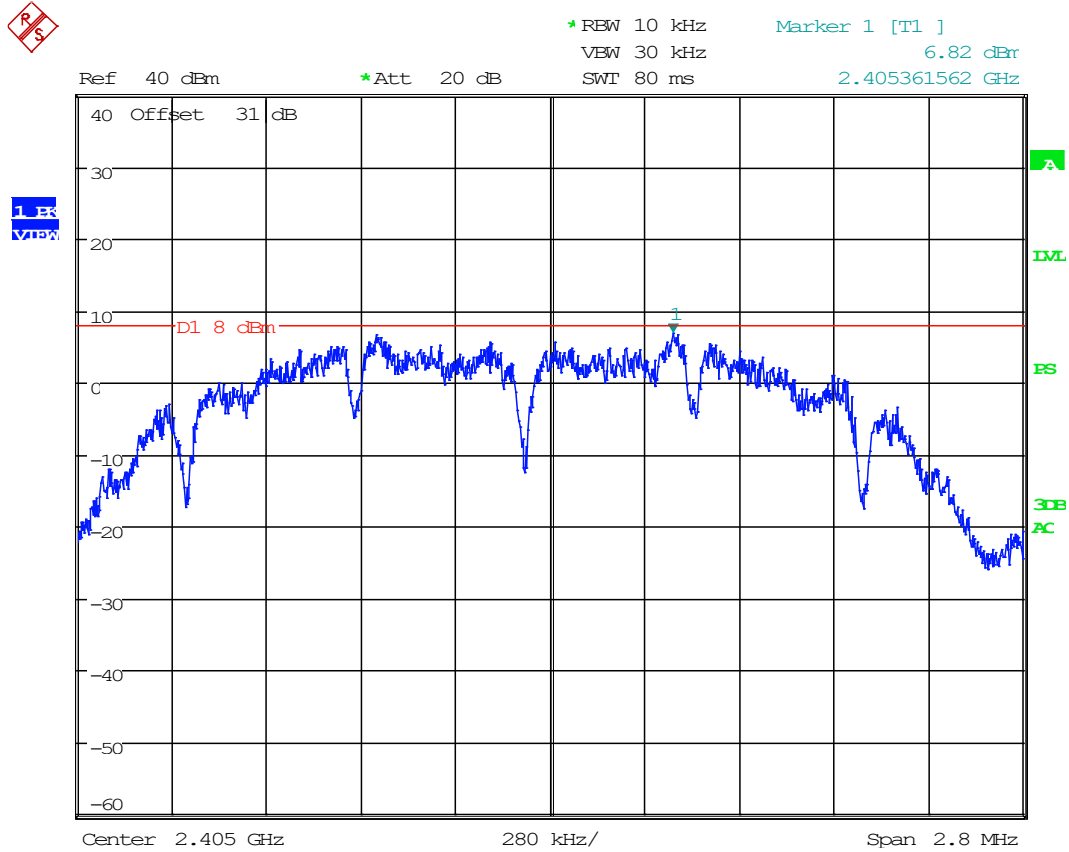

Date: 1.FEB.2003 03:32:50


8.3.2 Power Spectral Density (PSD) Test Data / Spectrum Plots, 2440 MHz

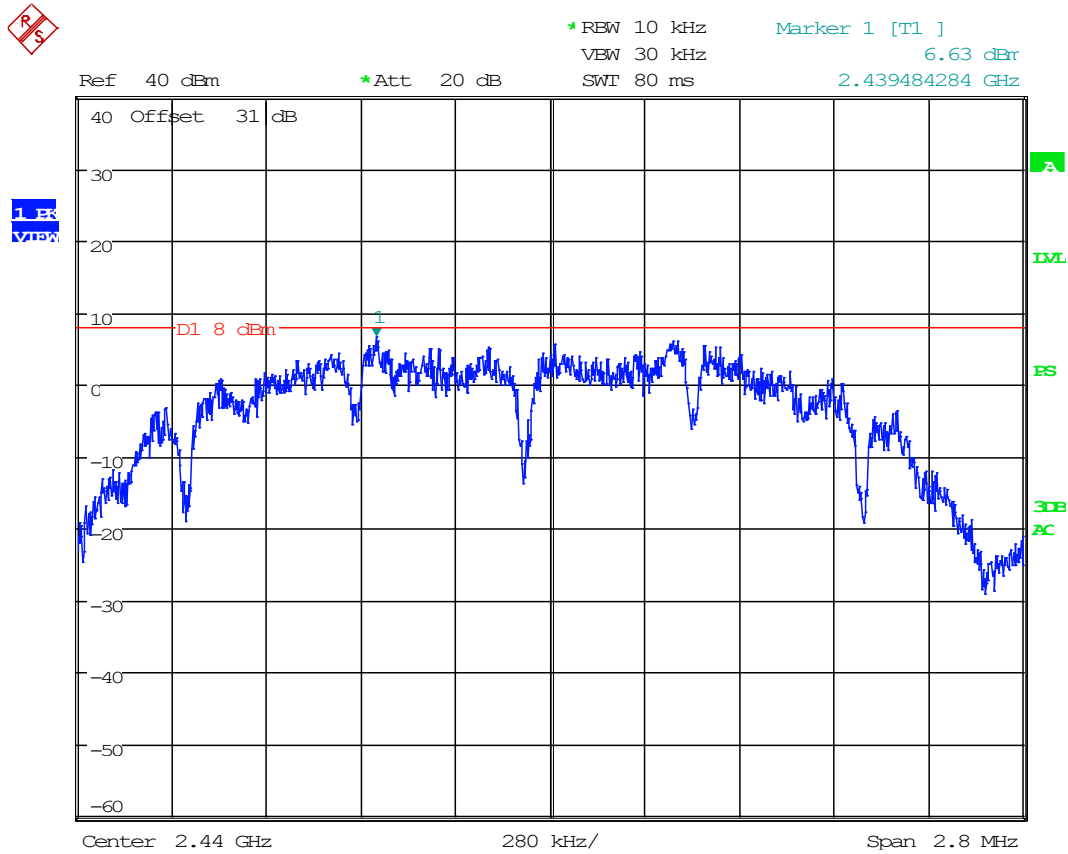

Date: 1.FEB.2003 03:33:23





8.3.3 Power Spectral Density (PSD) Test Data / Spectrum Plots, 2480 MHz

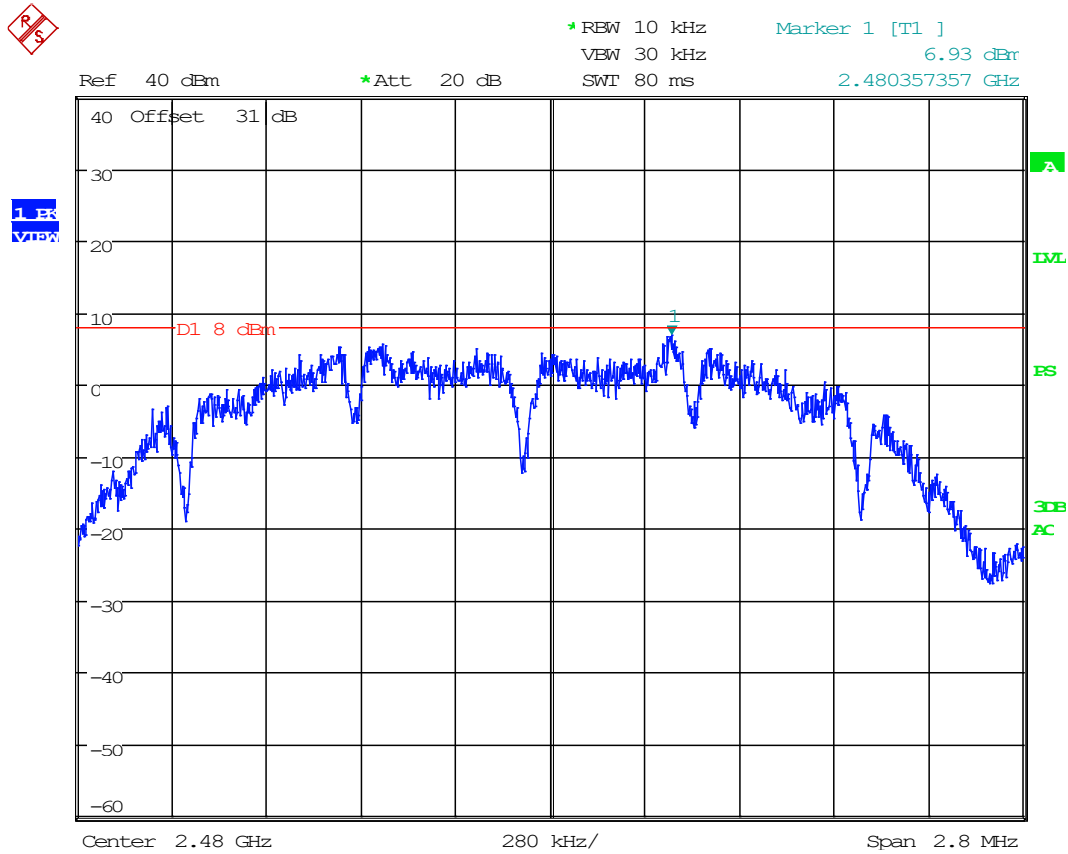

Date: 1.FEB.2003 03:32:08

8.1 Radiated Emissions

Limits from FCC Part 15.247 (d) and 15.215 (b) and test procedure from ANSI C63.10-2013 section 11.11

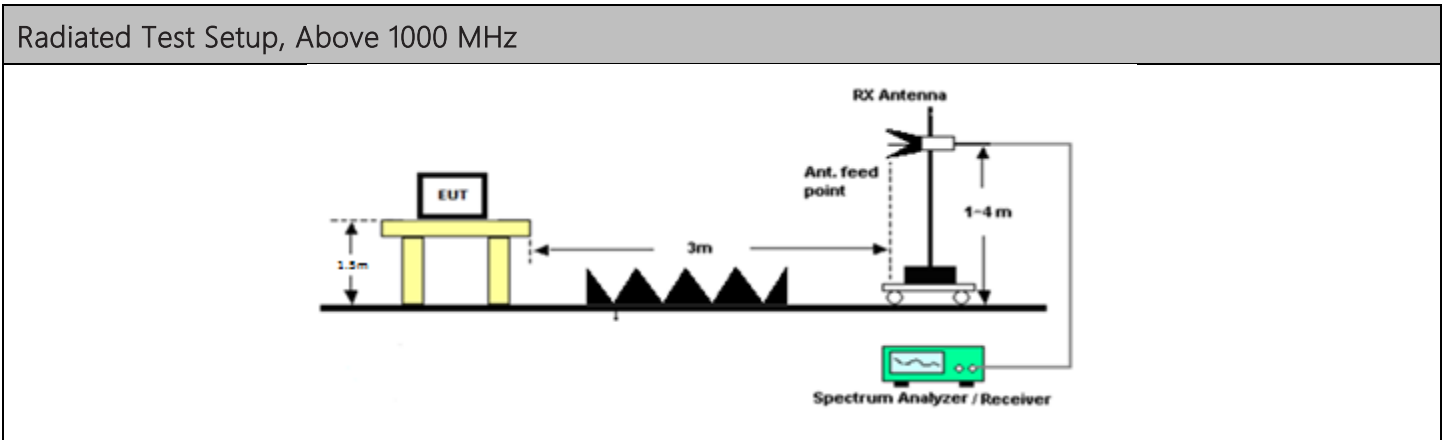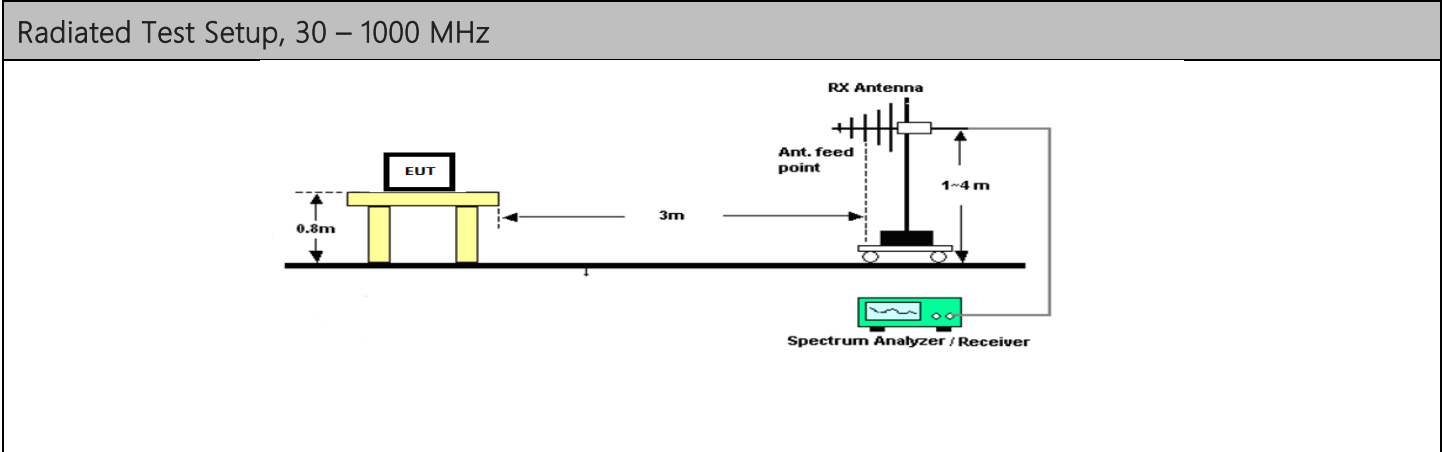



Radiated Emissions in Restricted Bands, Tabular Data

8.1.1 Radiated Emissions Test Data, 2405MHz

Tuned Frequency (MHz)	Emission Frequency (MHz)	15.205 Restricted Band	15.205, 15.35, 15.247(d) Detector	Meter Reading (dBµV)	Antenna Polarity	Coax Loss (dB)	Duty Cycle Correction (dB)	Antenna Correction Factor (dB/m)	Distance (m)	Field Strength (dBµV/m)	Limit (dBµV/m)	Margin (dB)
2405.00	4810.00	X	PK	20.20	H	7.11	0.00	33.93	3.00	61.25	73.98	12.73
2405.00	4810.00	X	PK	20.30	V	7.11	0.00	33.93	3.00	61.35	73.98	12.63
2405.00	4810.00	X	AVG	7.30	H	7.11	0.00	33.93	3.00	48.35	53.98	5.63
2405.00	4810.00	X	AVG	7.30	V	7.11	0.00	33.93	3.00	48.35	53.98	5.63
2405.00	7215.00		PK	20.00	H	9.53	0.00	36.38	3.00	65.91	96.48	30.57
2405.00	7215.00		PK	20.20	V	9.53	0.00	36.38	3.00	66.11	96.48	30.37
2405.00	9620.00		PK	20.60	H	10.72	0.00	36.67	3.00	67.98	96.48	28.49
2405.00	9620.00		PK	19.80	V	10.72	0.00	36.67	3.00	67.18	96.48	29.29
2405.00	12025.00	X	PK	-14.90	H	12.31	0.00	39.09	3.00	36.50	73.98	37.48
2405.00	12025.00	X	PK	-14.90	V	12.31	0.00	39.09	3.00	36.50	73.98	37.48
2405.00	12025.00	X	AVG	-27.40	H	12.31	0.00	39.09	3.00	24.00	53.98	29.98
2405.00	12025.00	X	AVG	-27.40	V	12.31	0.00	39.09	3.00	24.00	53.98	29.98
2405.00	14430.00		PK	21.00	H	13.35	0.00	39.79	3.00	74.14	96.48	22.34
2405.00	14430.00		PK	20.60	V	13.35	0.00	39.79	3.00	73.74	96.48	22.74
2405.00	16835.00		PK	21.70	H	14.62	0.00	42.36	3.00	78.68	96.48	17.80
2405.00	16835.00		PK	21.40	V	14.62	0.00	42.36	3.00	78.38	96.48	18.10
2405.00	19240.00	X	PK	-16.70	H	16.08	0.00	44.73	3.00	44.11	73.98	29.87
2405.00	19240.00	X	PK	-16.60	V	16.08	0.00	44.73	3.00	44.21	73.98	29.77
2405.00	19240.00	X	AVG	-29.50	H	16.08	0.00	44.73	3.00	31.31	53.98	22.67
2405.00	19240.00	X	AVG	-29.50	V	16.08	0.00	44.73	3.00	31.31	53.98	22.67
2405.00	21645.00		PK	22.50	H	16.84	0.00	44.29	3.00	83.63	96.48	12.85
2405.00	21645.00		PK	23.90	V	16.84	0.00	44.29	3.00	85.03	96.48	11.45
2405.00	24050.00		PK	23.60	H	17.94	0.00	45.24	3.00	86.79	96.48	9.69
2405.00	24050.00		PK	23.90	V	17.94	0.00	45.24	3.00	87.09	96.48	9.39

8.1.2 Radiated Emissions Test Data, 2440MHz

Tuned Frequency (MHz)	Emission Frequency (MHz)	15.205 Restricted Band	15.205, 15.35, 15.247(d) Detector	Meter Reading (dBµV)	Antenna Polarity	Coax Loss (dB)	Duty Cycle Correction (dB)	Antenna Correction Factor (dB/m)	Distance (m)	Field Strength (dBµV/m)	Limit (dBµV/m)	Margin (dB)
2440.00	4880.00	X	PK	20.40	H	7.33	0.00	33.93	3.00	61.66	73.98	12.32
2440.00	4880.00	X	PK	19.90	V	7.33	0.00	33.93	3.00	61.16	73.98	12.82
2440.00	4880.00	X	AVG	7.60	H	7.33	0.00	33.93	3.00	48.86	53.98	5.12
2440.00	4880.00	X	AVG	7.50	V	7.33	0.00	33.93	3.00	48.76	53.98	5.22
2440.00	7320.00	X	PK	19.70	H	9.61	0.00	36.24	3.00	65.55	73.98	8.43
2440.00	7320.00	X	PK	19.50	V	9.61	0.00	36.24	3.00	65.35	73.98	8.63
2440.00	7320.00	X	AVG	7.10	H	9.61	0.00	36.24	3.00	52.95	53.98	1.03
2440.00	7320.00	X	AVG	7.20	V	9.61	0.00	36.24	3.00	53.05	53.98	0.93
2440.00	9760.00		PK	19.40	H	10.98	0.00	36.83	3.00	67.20	96.48	29.27
2440.00	9760.00		PK	19.40	V	10.98	0.00	36.83	3.00	67.20	96.48	29.27
2440.00	12200.00	X	PK	-15.00	H	12.52	0.00	39.23	3.00	36.75	73.98	37.23
2440.00	12200.00	X	PK	-13.80	V	12.52	0.00	39.23	3.00	37.95	73.98	36.03
2440.00	12200.00	X	AVG	-27.20	H	12.52	0.00	39.23	3.00	24.55	53.98	29.43
2440.00	12200.00	X	AVG	-27.40	V	12.52	0.00	39.23	3.00	24.35	53.98	29.63
2440.00	14640.00		PK	21.80	H	13.68	0.00	40.27	3.00	75.75	96.48	20.73
2440.00	14640.00		PK	20.70	V	13.68	0.00	40.27	3.00	74.65	96.48	21.83
2440.00	17080.00		PK	21.40	H	14.72	0.00	42.43	3.00	78.55	96.48	17.92
2440.00	17080.00		PK	21.60	V	14.72	0.00	42.43	3.00	78.75	96.48	17.72
2440.00	19520.00	X	PK	-16.20	H	15.67	0.00	44.71	3.00	44.18	73.98	29.80
2440.00	19520.00	X	PK	-16.30	V	15.67	0.00	44.71	3.00	44.08	73.98	29.90
2440.00	19520.00	X	AVG	-29.40	H	15.67	0.00	44.71	3.00	30.98	53.98	23.00
2440.00	19520.00	X	AVG	-28.90	V	15.67	0.00	44.71	3.00	31.48	53.98	22.50
2440.00	21960.00		PK	23.10	H	16.92	0.00	44.46	3.00	84.48	96.48	12.00
2440.00	21960.00		PK	23.50	V	16.92	0.00	44.46	3.00	84.88	96.48	11.60
2440.00	24400.00		PK	23.40	H	18.20	0.00	45.26	3.00	86.86	96.48	9.61
2440.00	24400.00		PK	23.00	V	18.20	0.00	45.26	3.00	86.46	96.48	10.01






8.1.3 Radiated Emissions Test Data, 2480MHz

Tuned Frequency (MHz)	Emission Frequency (MHz)	15.205 Restricted Band	15.205, 15.35, 15.247(d) Detector	Meter Reading (dBµV)	Antenna Polarity	Coax Loss (dB)	Duty Cycle Correction (dB)	Antenna Correction Factor (dB/m)	Distance (m)	Field Strength (dBµV/m)	Limit (dBµV/m)	Margin (dB)
2480.00	4960.00	X	PK	20.20	H	7.72	0.00	33.96	3.00	61.88	73.98	12.10
2480.00	4960.00	X	PK	20.00	V	7.72	0.00	33.96	3.00	61.68	73.98	12.30
2480.00	4960.00	X	AVG	7.30	H	7.72	0.00	33.96	3.00	48.98	53.98	5.00
2480.00	4960.00	X	AVG	7.30	V	7.72	0.00	33.96	3.00	48.98	53.98	5.00
2480.00	7440.00	X	PK	20.60	H	9.56	0.00	36.01	3.00	66.18	73.98	7.80
2480.00	7440.00	X	PK	20.20	V	9.56	0.00	36.01	3.00	65.78	73.98	8.20
2480.00	7440.00	X	AVG	7.40	H	9.56	0.00	36.01	3.00	52.98	53.98	1.00
2480.00	7440.00	X	AVG	7.40	V	9.56	0.00	36.01	3.00	52.98	53.98	1.00
2480.00	9920.00		PK	19.20	H	11.15	0.00	37.08	3.00	67.43	96.48	29.05
2480.00	9920.00		PK	19.30	V	11.15	0.00	37.08	3.00	67.53	96.48	28.95
2480.00	12400.00	X	PK	-14.80	H	12.54	0.00	39.23	3.00	36.97	73.98	37.01
2480.00	12400.00	X	PK	-15.30	V	12.54	0.00	39.23	3.00	36.47	73.98	37.51
2480.00	12400.00	X	AVG	-27.70	H	12.54	0.00	39.23	3.00	24.07	53.98	29.91
2480.00	12400.00	X	AVG	-27.70	V	12.54	0.00	39.23	3.00	24.07	53.98	29.91
2480.00	14880.00		PK	21.10	H	13.44	0.00	40.29	3.00	74.84	96.48	21.64
2480.00	14880.00		PK	21.40	V	13.44	0.00	40.29	3.00	75.14	96.48	21.34
2480.00	17360.00		PK	21.20	H	15.01	0.00	42.52	3.00	78.73	96.48	17.75
2480.00	17360.00		PK	21.70	V	15.01	0.00	42.52	3.00	79.23	96.48	17.25
2480.00	19840.00	X	PK	-16.10	H	16.21	0.00	44.49	3.00	44.60	73.98	29.38
2480.00	19840.00	X	PK	-15.90	V	16.21	0.00	44.49	3.00	44.80	73.98	29.18
2480.00	19840.00	X	AVG	-28.40	H	16.21	0.00	44.49	3.00	32.30	53.98	21.68
2480.00	19840.00	X	AVG	-28.60	V	16.21	0.00	44.49	3.00	32.10	53.98	21.88
2480.00	22320.00	X	PK	-18.00	H	17.02	0.00	44.79	3.00	43.81	73.98	30.17
2480.00	22320.00	X	PK	-17.80	V	17.02	0.00	44.79	3.00	44.01	73.98	29.97
2480.00	22320.00	X	AVG	-30.80	H	17.02	0.00	44.79	3.00	31.01	53.98	22.97
2480.00	22320.00	X	AVG	-31.00	V	17.02	0.00	44.79	3.00	30.81	53.98	23.17
2480.00	24800.00		PK	23.00	H	18.07	0.00	45.49	3.00	86.57	96.48	9.91
2480.00	24800.00		PK	23.70	V	18.07	0.00	45.49	3.00	87.27	96.48	9.21

8.2 Band-edge measurements


Requirement from FCC KDB 558074 D01 and test procedure from ANSI C63.10-2013 section 11.13

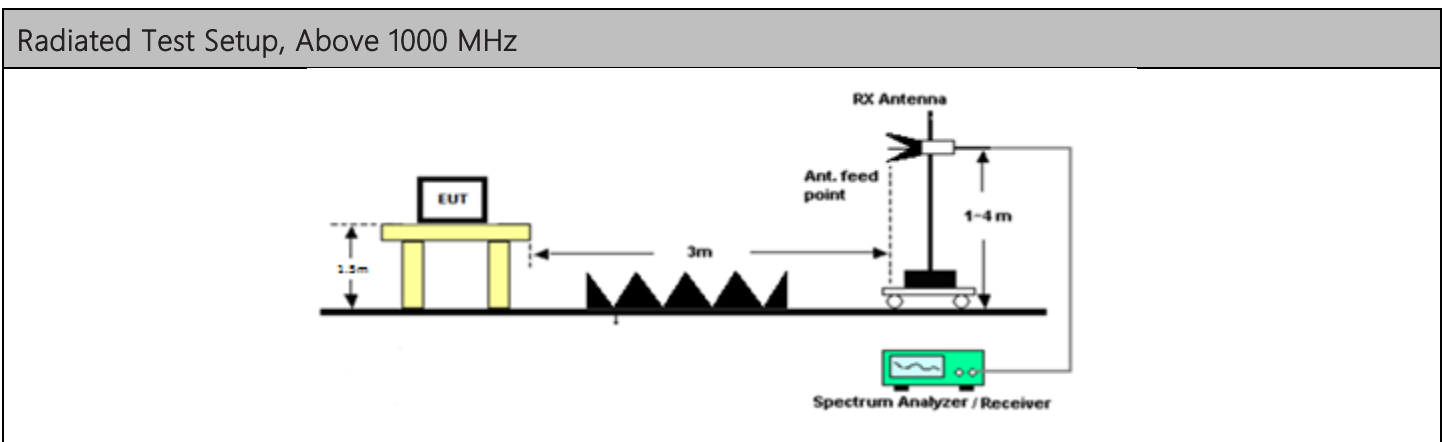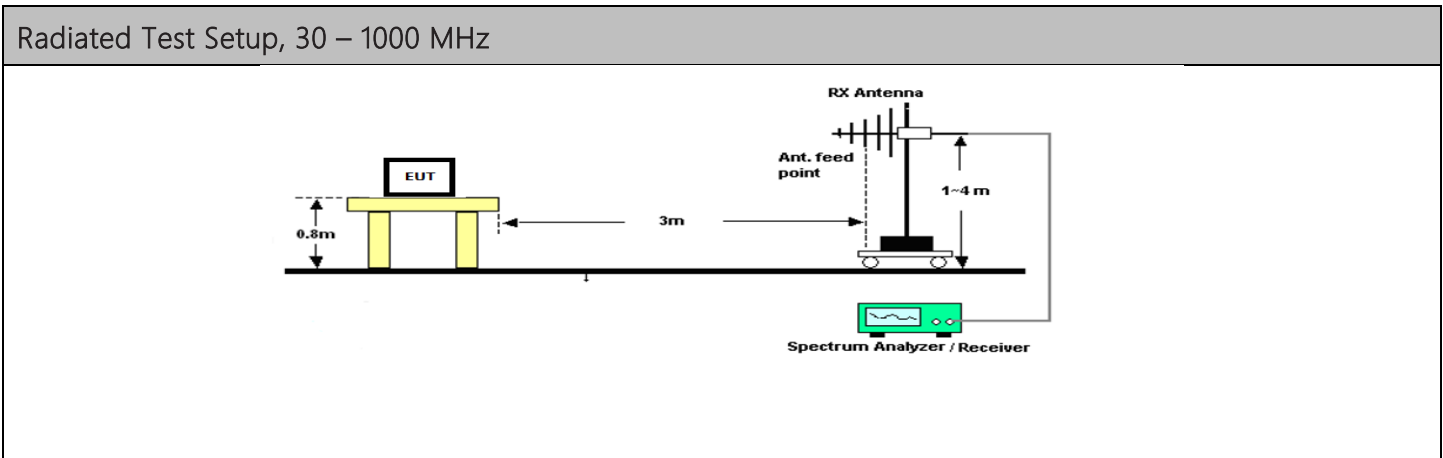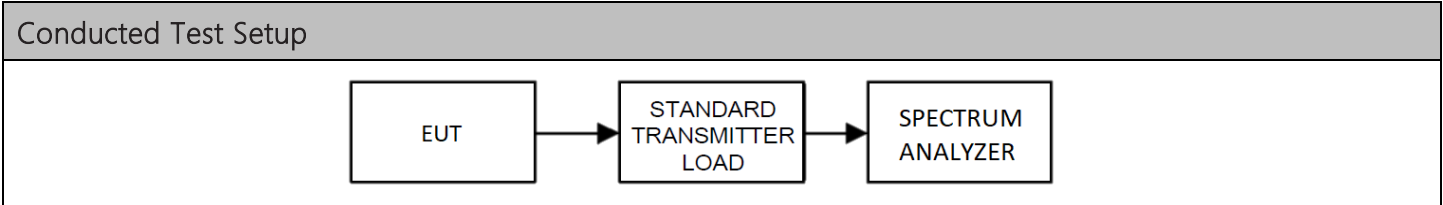



Band-edge Spectrum Plots


8.2.1 Lower Band Edge Plot

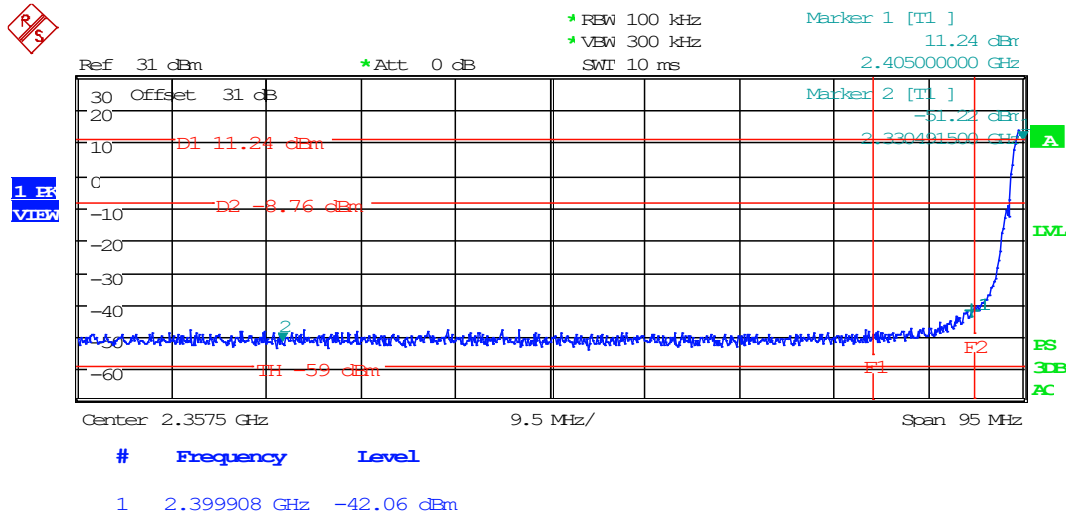

Date: 1.FEB.2003 03:35:12



8.2.2 Upper Band Edge Plot

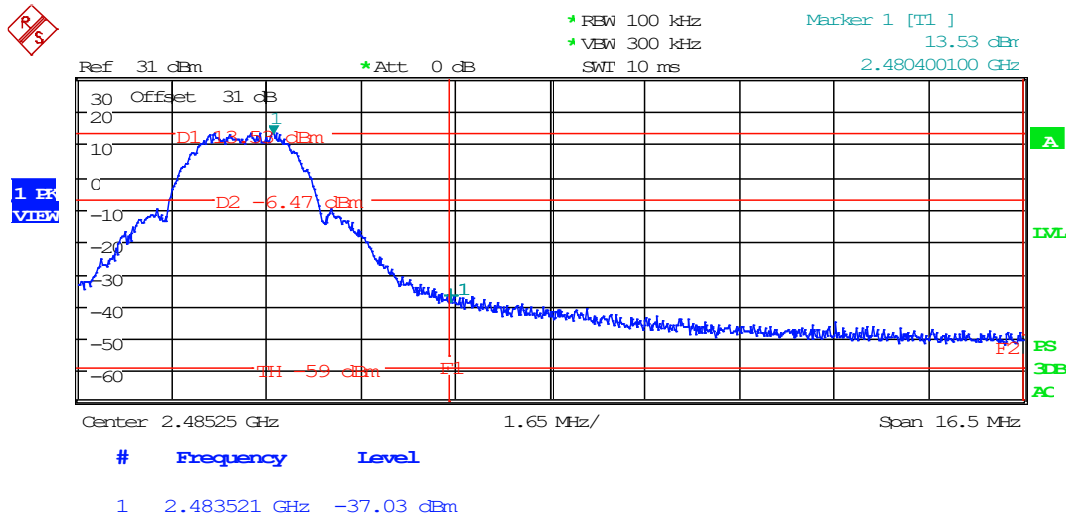

Date: 1.FEB.2003 03:36:24

Tuned Frequency (MHz)	Emission Frequency (MHz)	15.205 Restricted Band	15.205, 15.35, 15.247(d) Detector	Meter Reading (dBμV)	Antenna Polarity	Coax Loss (dB)	Duty Cycle Correction (dB)	Antenna Correction Factor (dB/m)	Distance (m)	Field Strength (dBμV/m)	Limit (dBμV/m)	Margin (dB)
2480.00	2483.52	X	PK	16.24	H	5.62	0.00	32.13	3.00	53.99	73.98	19.99
2480.00	2483.52	X	PK	25.71	V	5.62	0.00	32.13	3.00	63.46	73.98	10.52
2480.00	2483.52	X	AVG	4.74	H	5.62	0.00	32.13	3.00	42.49	53.98	11.49
2480.00	2483.52	X	AVG	14.44	V	5.62	0.00	32.13	3.00	52.19	53.98	1.79



9. ANNEX-A - Photographs of the EUT

Photographs of the EUT and any manufacturer supplied accessories to be used with the EUT are in separate supplementary documents labelled EXTERNAL PHOTOS and INTERNAL PHOTOS.

10. ANNEX-B – Test Setup Photographs

Test setup photographs are located in a separate supplementary ANNEX-B document.

11. History of Test Report Changes

Test Report #	Revision #	Description	Date of Issue
TR_2627-21_FCC_15.247 DTS_1	1	Initial release	7/2/2021
TR_2627-21_FCC_15.247 DTS_2	2	Updated table on page 12	8/18/2021
TR_2627-21_FCC_15.247 DTS_3	3	Updated table on page 12	8/20/2021
TR_2627-21_FCC_15.247 DTS_4	4	Updated technology, modulation and antenna gain – Page 7 and 8	9/09/2021



Timco Engineering, Inc., an IIA Company
849 NW State Road 45, Newberry, Florida 32669
(352) 472-5500 / testing@timcoengr.com

END OF TEST REPORT
