



Test Report

FCC Part 15, Subpart C, Section 15.247 Industry Canada RSS-210, Issue 8

Report Number: CWD7041-Cert

Model: CWD7041

FCC ID: EROCWD7041
IC: 5683C-CWD7041

Date: June 16, 2011

Prepared by: Grace Lin
Grace Lin, Sr. Compliance Engineer

Date: June 16, 2011

Reviewed by: Wayne Owens
Wayne Owens, Director of Program Management

Date: June 16, 2011



Table of Contents

1. GENERAL DESCRIPTION	3
1.1 PRODUCT DESCRIPTION	3
1.2 TEST METHODOLOGY	3
1.3 TEST FACILITY	3
1.4 TEST EQUIPMENT	4
1.5 EVALUATION SUMMARY	4
2. SYSTEM TEST CONFIGURATION	5
2.1 JUSTIFICATION	5
2.2 BLOCK DIAGRAM	5
2.3 EUT EXERCISE SOFTWARE AND MODE(S) OF OPERATION	5
2.4 CABLES	5
2.5 SPECIAL ACCESSORIES	6
2.6 SUPPORT EQUIPMENT	6
2.7 EQUIPMENT MODIFICATIONS	6
3. EVALUATION	7
3.1 ANTENNA REQUIREMENTS	7
3.2 6 DB BANDWIDTH	8
3.3 99% BANDWIDTH	11
3.4 POWER OUTPUT	13
3.5 BAND EDGE	16
3.6 CONDUCTED SPURIOUS EMISSIONS	18
3.7 POWER SPECTRAL DENSITY	22
3.8 RADIATED SPURIOUS EMISSIONS	25
3.9 RECEIVER RADIATED EMISSIONS	27
3.10 RECEIVER AC POWER LINE CONDUCTED EMISSIONS	30



1. General Description

1.1 Product Description

The equipment under test (EUT) is a Crestron 2.4GHz two-way RF transceiver module, model: CWD7041.

1.2 Test Methodology

Measurements were performed according to the following procedures and standards:

- 1) ANSI C63.4: 2003
- 2) FCC Procedure, "Measurement of Digital Transmission Systems Operating under Section 15.247", March 23, 2005
- 3) Industry Canada RSS-Gen Issue 2
- 4) Industry Canada RSS-210 Issue 7
- 5) Industry Canada ICES-003 Issue 4

All measurements were performed in a 3-meter semi-anechoic chamber and the control room.

1.3 Test Facility

The 3-meter semi-anechoic chamber used to collect conducted and radiated emission data is located at 22 Link Drive, Rockleigh, New Jersey. This test facility has been placed on file with the FCC, Registration Number: 412871, and Industry Canada, Site Number: 5683C-1.



1.4 Test Equipment

Description	Model	Serial No.	Frequency Range	Calibration Date
R&S EMI Receiver	ESU40	100076	20 Hz – 40 GHz	Dec. 10, 2010
Teseq Bilog Antenna	CBL 6112D	25231	30 MHz – 2 GHz	Dec. 8, 2010
ETS-Lindgren Double Ridge Horn Antenna	3117	00047560	1 GHz – 18 GHz	Feb. 4, 2011
R&S Preamplifier	TS-PR18	100044	30 MHz – 18 GHz	Dec. 2, 2010
ETS-Lindgren Standard Gain Horn Antenna	3160-09	00078911	18 GHz – 26.5 GHz	Dec. 3, 2010
R&S Preamplifier	TS-PR26	100030	18 GHz – 26.5 GHz	Dec. 6, 2010
Solar Electronics LISN	9252-50-R-24-N	068545	10 kHz – 50 MHz	Feb. 15, 2011

*Mechanical inspection

1.5 Evaluation Summary

Rule Section		Description/Parameters	Results
FCC	IC		
§15.203	N/A	Antenna Requirement	Complies
§15.247(a)(2)	§A8.2(a) of RSS-210	6 dB Bandwidth, 500 kHz	Complies
N/A	§4.6.1 of RSS-Gen	99% Occupied Bandwidth	(for reporting purpose)
§15.247(b)(3)	§A8.4(4) of RSS-210	Power Output, conducted, 1 Watt (30dBm)	Complies
§15.247(d)	§2.1, §A8.5 of RSS-210	Band Edge	Complies
§15.247(d)	§A8.5 of RSS-210	Conducted Spurious Emissions, 20 dBc	Complies
§15.247(e)	§A8.2(b) of RSS-210	Power Spectral Density (PSD), 8 dBm in any 3 kHz band.	Complies
§15.205, §15.209, §15.247(d)	§2.2, §2.7, §A8.5 of RSS-210	Radiated Spurious Emissions	Complies
§15.101(b)	§6 of RSS-Gen	Receiver Radiated Emission	Complies
§15.107	§7.2.2 of RSS-Gen	Receiver AC Power Line Conducted Emissions	Complies

Note:

The channels selected for test were 11, 18, and 26.


2. System Test Configuration

2.1 Justification

The EUT was connected to a test board. A DC power supply supplied power to the EUT through the test board. A computer supplied test commands through a test box and the test board.

2.2 Block Diagram

Block diagram is shown below.

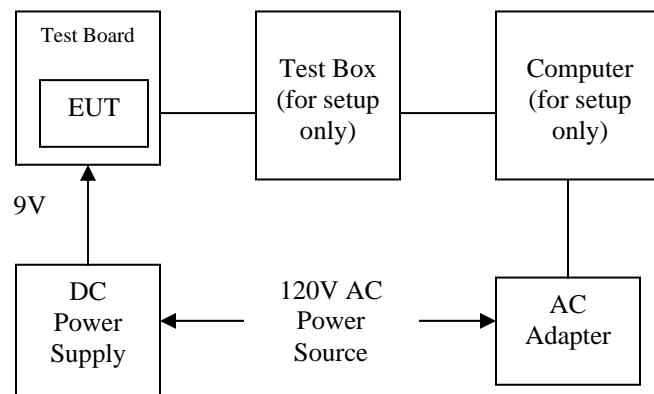

2.3 EUT Exercise Software and Mode(s) of Operation

The EUT was configured to transmit continuously. Channels 11 (2405 MHz), 18 (2440 MHz), and 26 (2480 MHz) were selected for test.

2.4 Cables

Qty	Description	Length (m)	From - To	Shielded/ Unshielded
1	Power Cord	1.5	Power Source – PoE Injector	Unshielded
1	AWG#18	1	DC Power Supply – Test Board	Unshielded
1	Cat 5e (Crossover)	1.5	Computer – Test Box	Unshielded
1	USB	2.0	Computer – Test Box	Unshielded



2.5 *Special Accessories*

There are no special accessories for compliance of this EUT.

2.6 *Support equipment*

No	Description	Manufacturer	Model No	Serial No
1	Laptop Computer	DELL	D800	DLZZQ91 (Service Tag)
2	AC Adapter	DELL	LA90PS0-00	CN-0DF266-71615-62R-04D0
3	DC Power Supply	BK Precision	1670	281-2152
4	Test Board	Crestron	PA07030	CNA7227643
8	Test Box	Ember	EM-ISA3-B4A	00:0D:6F:00:1B:4A

2.7 *Equipment Modifications*

There were no modifications installed during compliance measurements.



3. Evaluation

3.1 *Antenna Requirements*

This module is validated with a ceramic chip antenna, soldered to the PCB. Antenna specifications are included in Theory of Operation.

The antennas' connectors are unique in the sense of complying with FCC §15.203, §15.204(b), and §15.204(c).




3.2 6 dB Bandwidth

Performance Criterion: The minimum 6 dB bandwidth shall be at least 500 kHz.

Test Results: Complies

Test Details: Refers to the following block diagram, data table, and receiver screen captures. The EUT was tested in a continuous transmit mode at the maximum power level at the boost mode.




Channel	Frequency (MHz)	6 dB Bandwidth (kHz)
11	2405	1594.6
18	2440	1570.5
26	2480	1570.5

Note: The RF level in the plots is relative and is not the indication of RF output power.




6 dB Bandwidth, Channel 11:

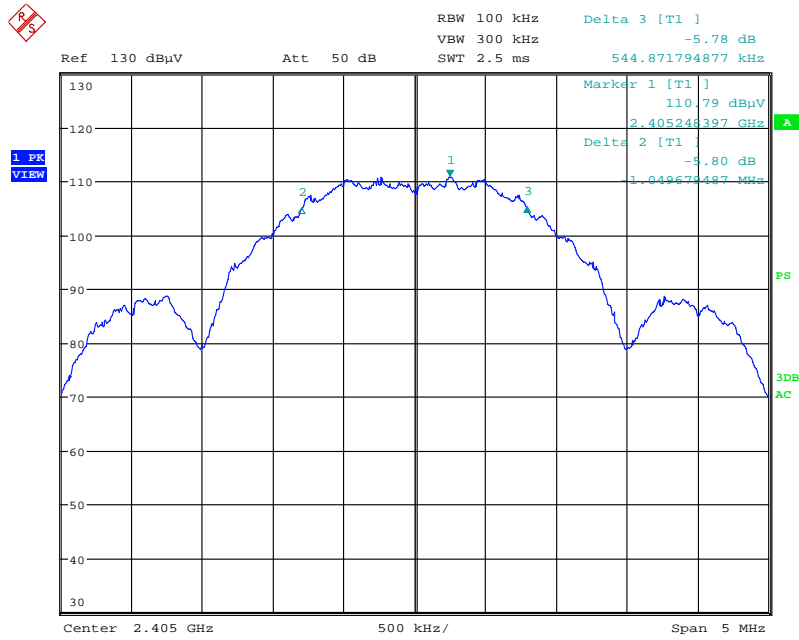

Date: 16.JUN.2011 13:14:29

6 dB Bandwidth, Channel 18:

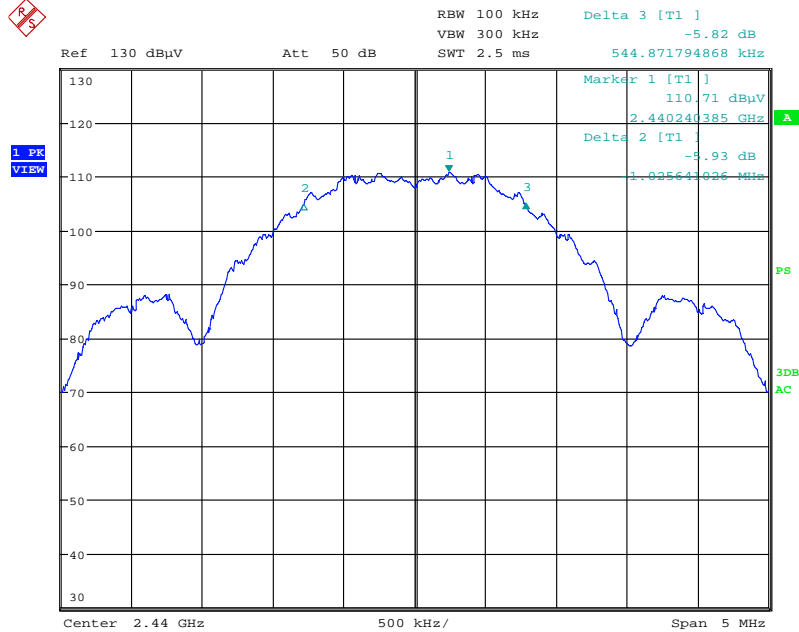


Date: 16.JUN.2011 13:17:36



6 dB Bandwidth, Channel 26:



Ref 130 dBuV Att 50 dB RBW 100 kHz Delta 3 [T1]
VBW 300 kHz -5.92 dB
SWT 2.5 ms 544.871794864 kHz

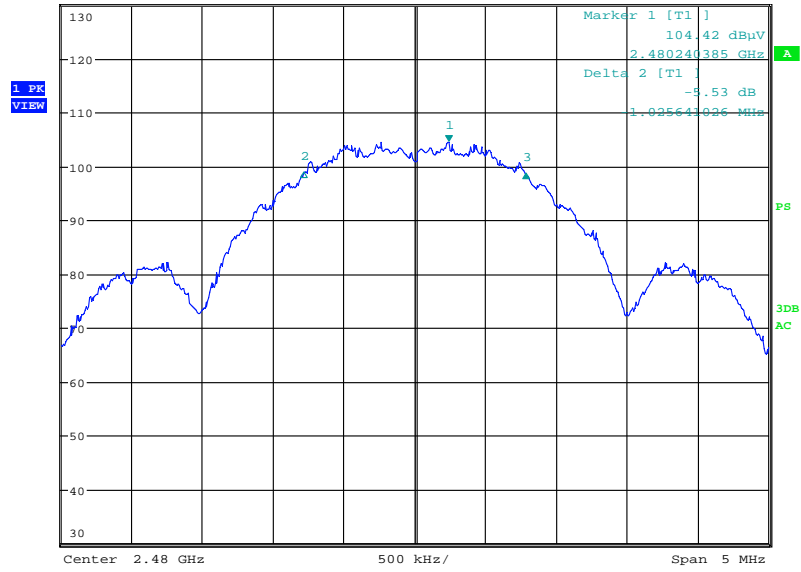

Date: 16.JUN.2011 13:21:21



3.3 99% Bandwidth


Test Details: Refers to the following block diagram, data table, and receiver screen captures. The EUT was tested in a continuous transmit mode at the maximum power level at the boost mode.



Channel	Frequency (MHz)	99% Bandwidth (MHz)
11	2405	2.468
18	2440	2.444
26	2480	2.452

Note: The RF level in the plots is relative and is not the indication of RF output power.


99% Bandwidth, Channel 11:

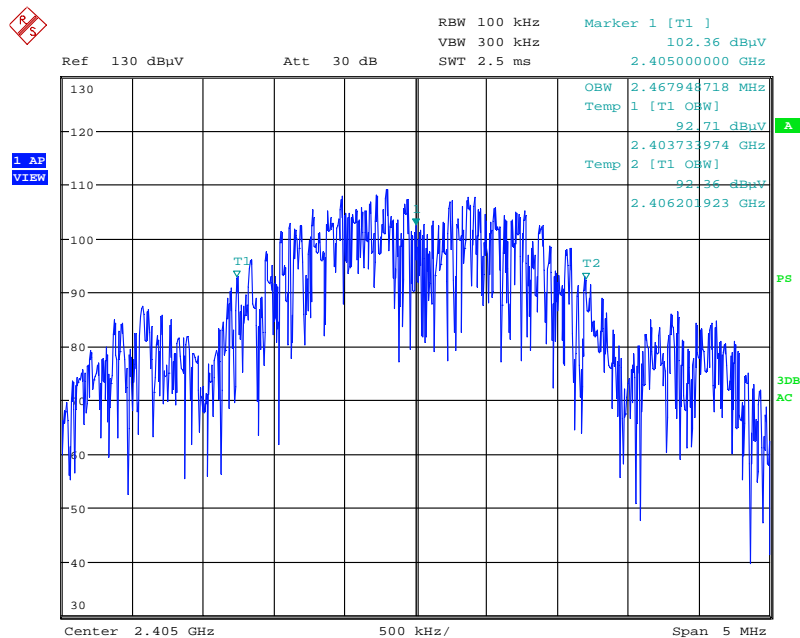

Date: 16.JUN.2011 13:15:33




99% Bandwidth, Channel 18:

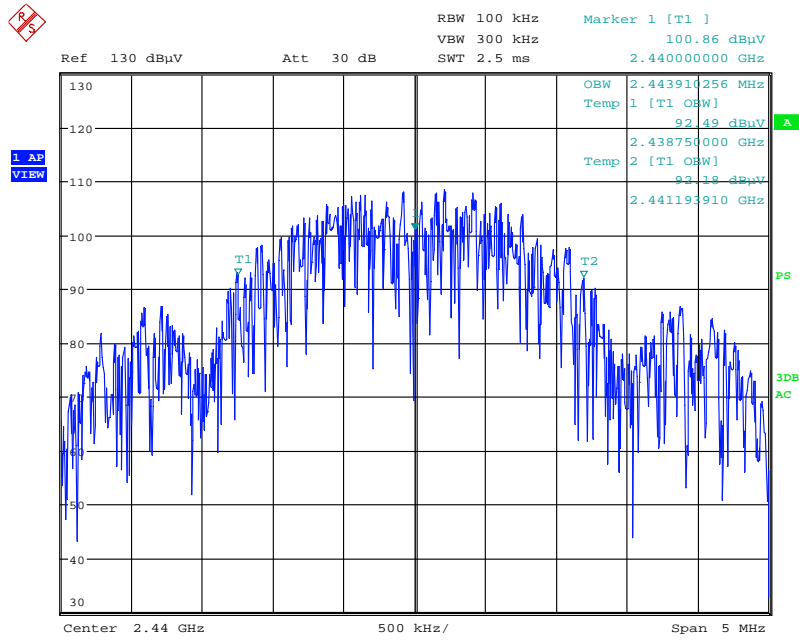

Date: 16.JUN.2011 13:19:07

99% Bandwidth, Channel 26:

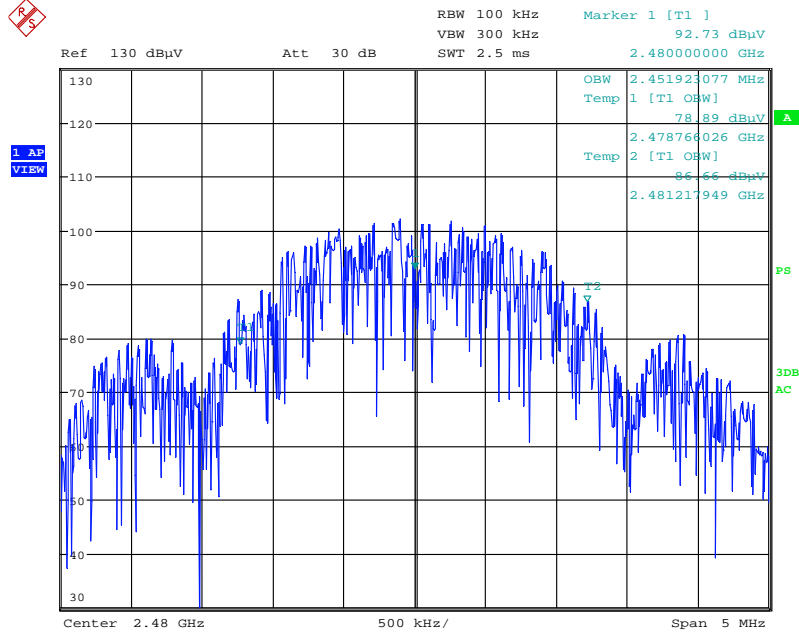

Date: 16.JUN.2011 13:22:46



3.4 Power Output

Performance Criterion: The maximum peak conducted output power shall not exceed 1 Watt.

Test Results: Complies

Test Details: The EUT was tested in a continuous transmit mode with maximum power levels of 3 (channels 11 and 18) and 239 (channel 26) at boost mode. Refers to the following block diagram, data table, and receiver screen captures.




Channel	Frequency (MHz)	Power Level	Power	
			dBm	mW
11	2405	8	7.96	6.2517
18	2440	8	7.63	5.7943
26	2480	0	1.47	1.4028

Note: The insertion loss was compensated for in the receiver.




Power Output, Channel 11:

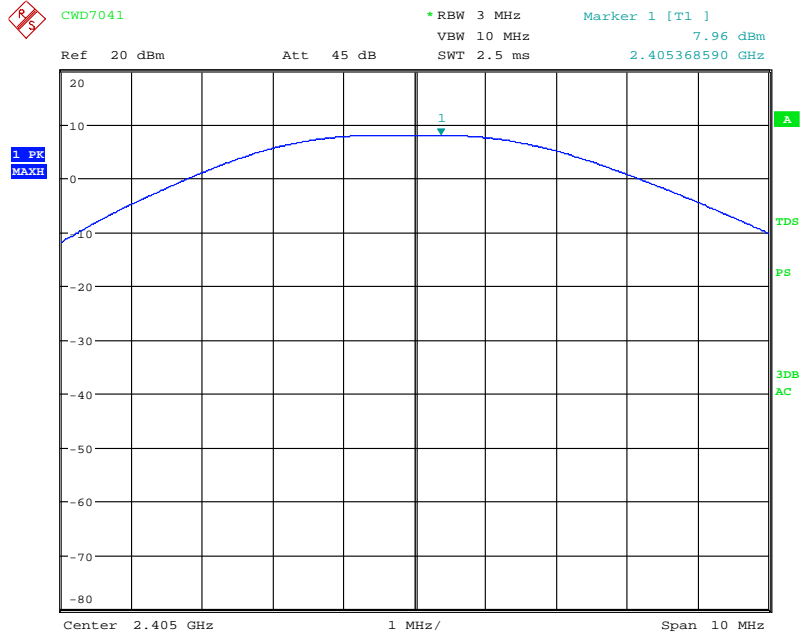

Date: 16.JUN.2011 11:56:10

Power Output, Channel 18:

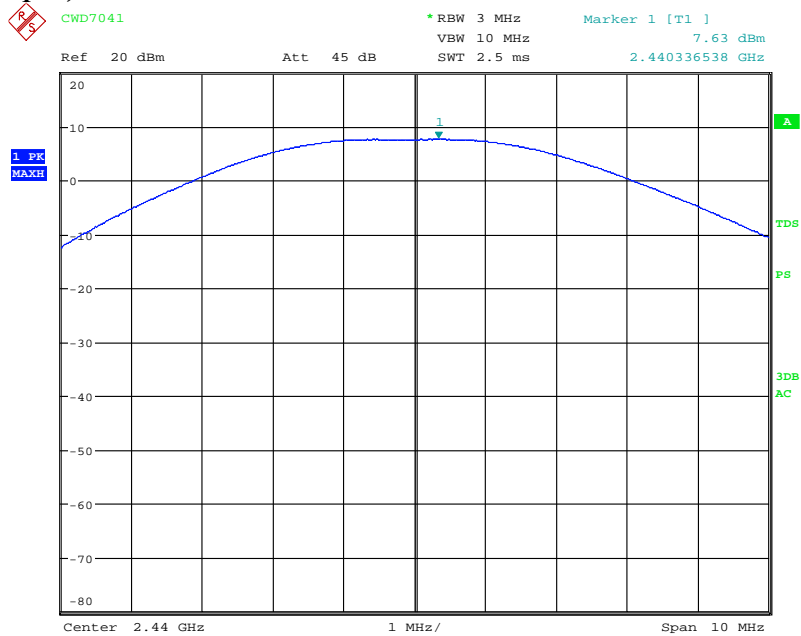

Date: 16.JUN.2011 11:53:40



Power Output, Channel 26:



CWD7041

*RBW 3 MHz

Marker 1 [T1]

VBW 10 MHz

1.47 dBm


SWT 2.5 ms

2.480176282 GHz

Ref 20 dBm

Att 45 dB

1 PK
MAXH

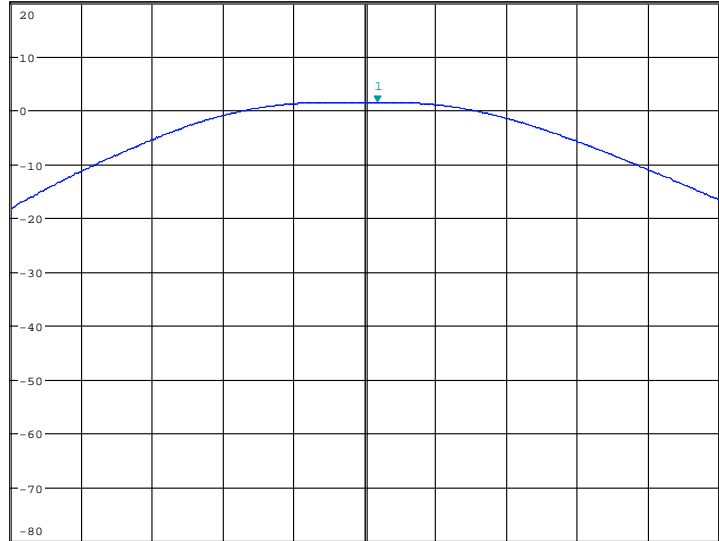

Date: 16.JUN.2011 11:51:20




3.5 *Band Edge*

Performance Criterion: In any 100 kHz bandwidth outside the frequency band, the RF power shall be at least 20 dB below that in the 100 kHz bandwidth within the band.


Test Results: Complies

Test Details: Refers to the following block diagram and receiver screen captures





Band Edge:

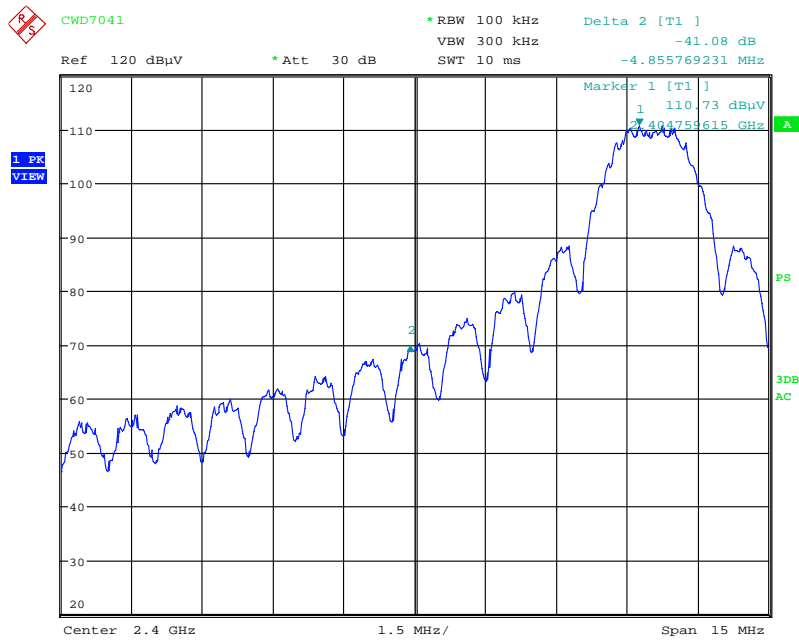

Date: 16.JUN.2011 13:29:52



Date: 16.JUN.2011 13:37:45




3.6 *Conducted Spurious Emissions*

Performance Criterion: In any 100 kHz bandwidth outside the frequency band, the radio frequency power shall be at least 20 dB below that in the 100 kHz bandwidth within the band.

Test Results: Complies


Test Details: Refers to the following block diagram and receiver screen captures

Note: The EUT was tested in a continuous transmit mode at the maximum power level at the boost mode. The RF level in the screen captures is relative and is not the indication of RF output power.






Conducted Spurious Emission – Channel 11

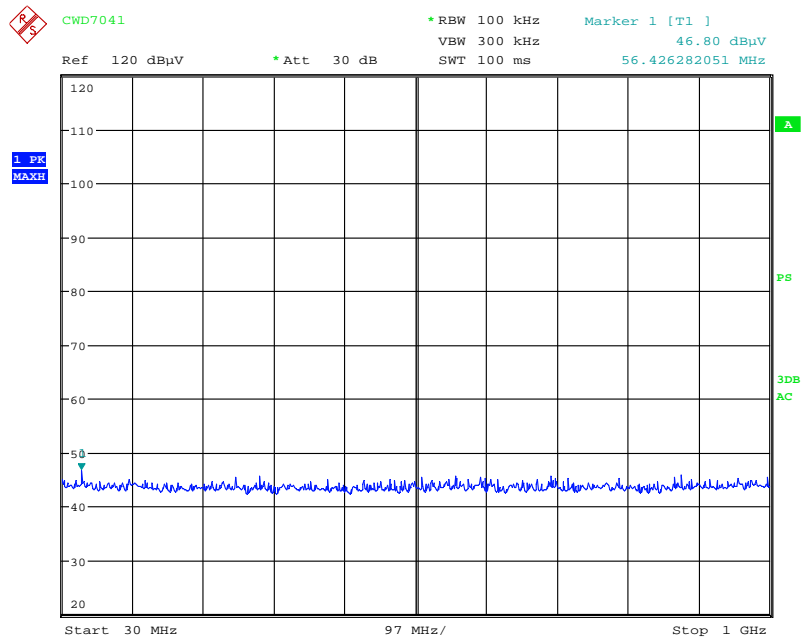


Date: 16.JUN.2011 13:30:55

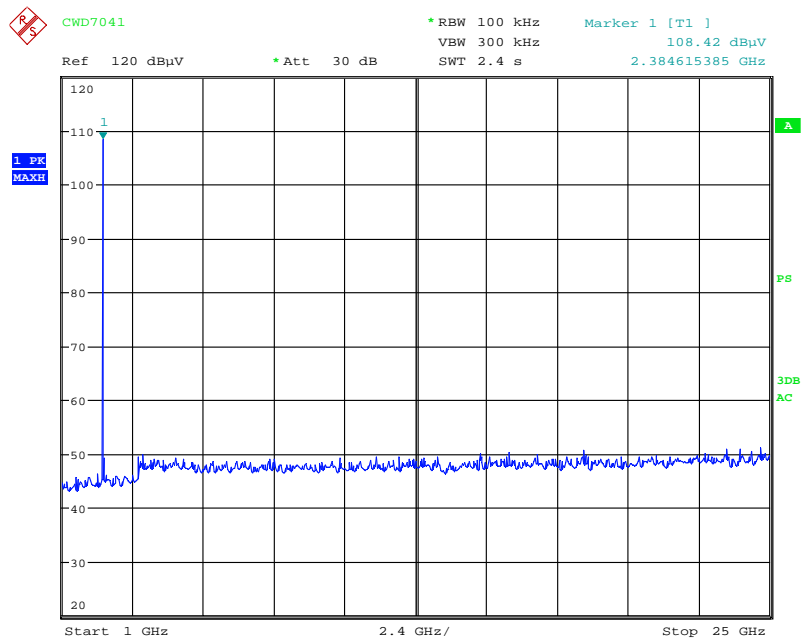


Date: 16.JUN.2011 13:31:51



Conducted Spurious Emission – Channel 18

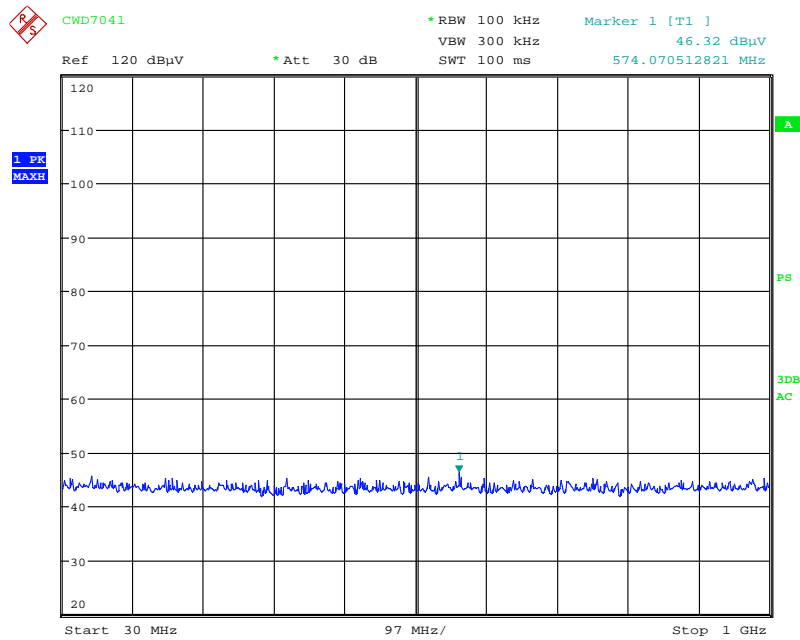


Date: 16.JUN.2011 13:33:44

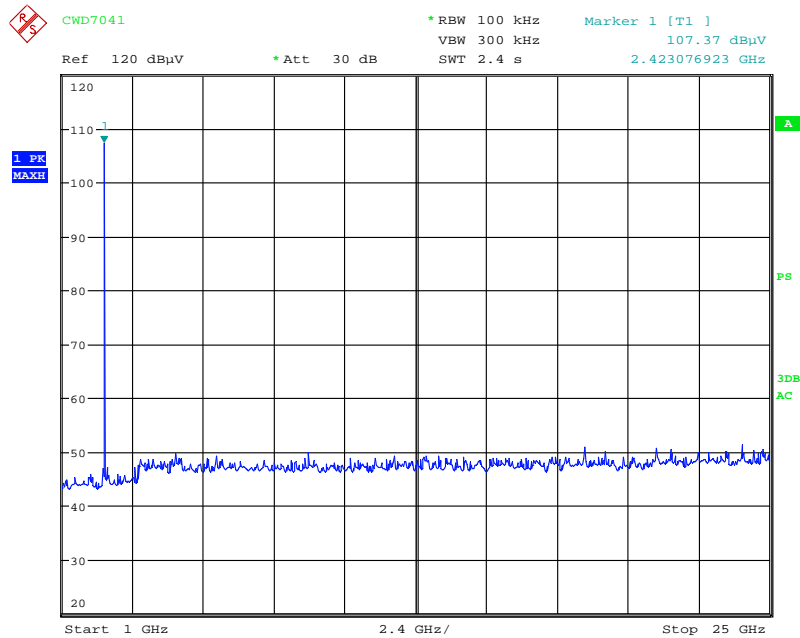


Date: 16.JUN.2011 13:33:04



Conducted Spurious Emission – Channel 26

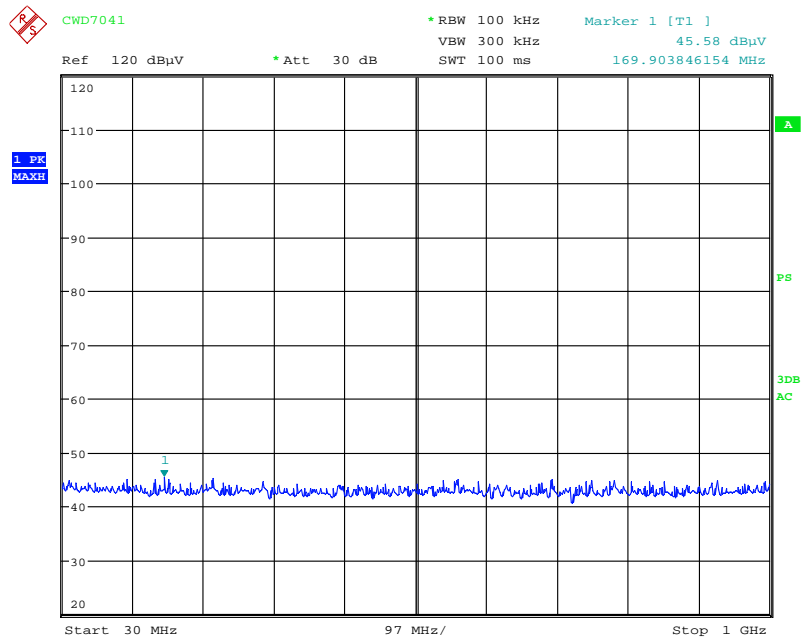

Date: 16.JUN.2011 13:35:17

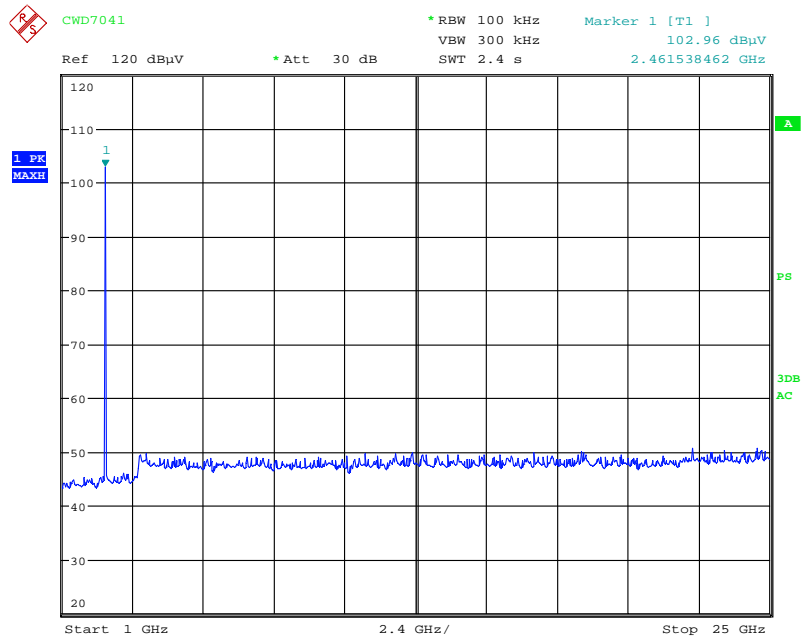

Date: 16.JUN.2011 13:36:15




3.7 Power Spectral Density

Performance Criterion: The power spectral density shall not be greater than 8 dBm in any 3 kHz band.

Test Results: Complies


Test Details: The EUT was tested in a continuous transmit mode with maximum power levels of 3 (channels 11 and 18) and 239 (channel 26). Refers to the following table and receiver screen captures. The insertion loss was compensated for in the receiver.



Channel	Frequency (MHz)	Power Spectral Density (dBm)
11	2405	-6.68
18	2440	-6.92
26	2480	-13.09




Power Spectral Density, Channel 11:

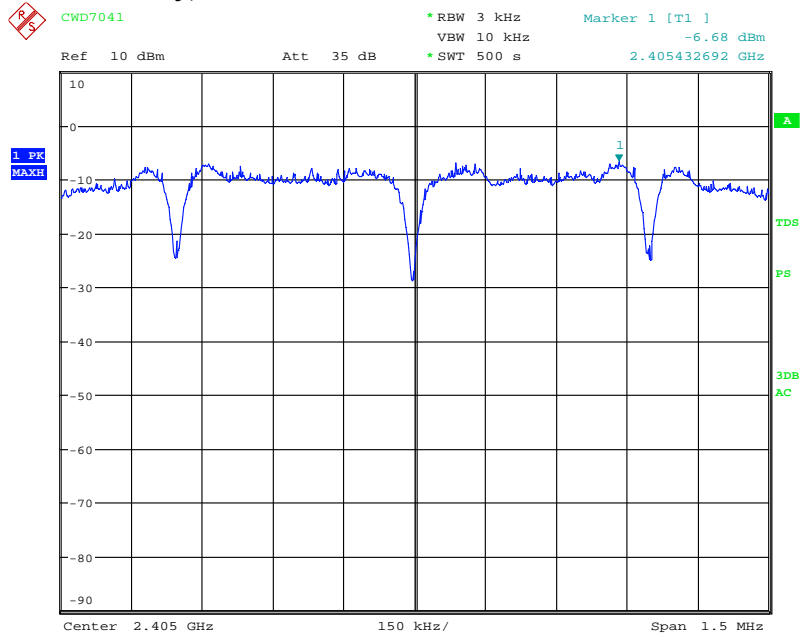

Date: 16.JUN.2011 12:06:26


Power Spectral Density, Channel 18:

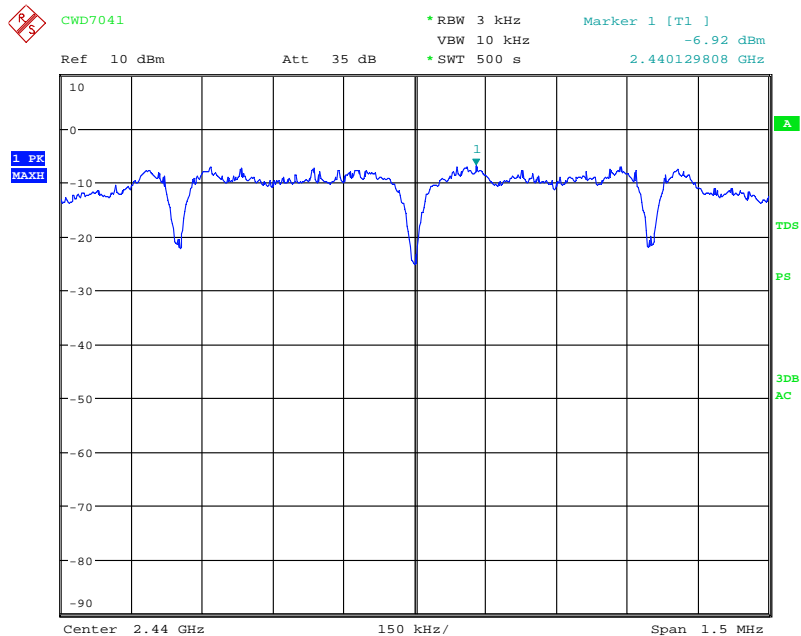

Date: 16.JUN.2011 12:46:48



Power Spectral Density, Channel 26:

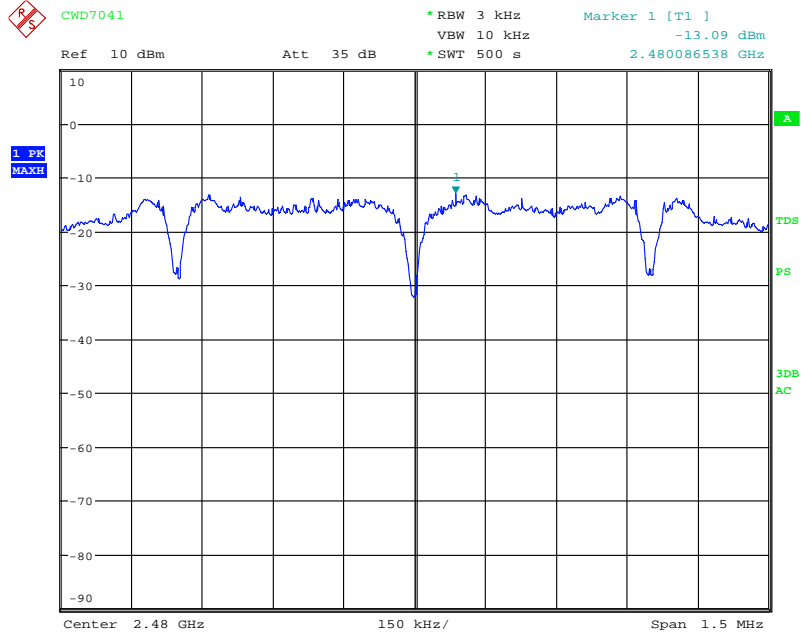

Date: 16.JUN.2011 13:09:40

3.8 Radiated Spurious Emissions

Performance Criterion: Radiated spurious emissions which fall in the restricted bands must comply with the radiated emission limits specified in FCC § 15.209(a) and Table 2 of IC RSS-210.


Test Results: Complies

Test Details: Radiated spurious emission was performed from 30 MHz to the tenth harmonics of the carrier. For each scan of radiated emission measurement, the procedures for maximizing emissions were followed. The EUT was rotated and antenna height was varied between 1 m and 4 m in order to maximize the emission. Measurements in both horizontal and vertical polarities were made and the data was recorded. All radiated emission measurements, up to 18 GHz, were performed at 3-meter distance between an antenna and the EUT. All radiated emission measurements, above 18 GHz, were performed at 0.3-meter distance between an antenna and the EUT.


The peak level of radiated emissions above 1 GHz was measured with a resolution bandwidth (RBW) of 1 MHz and a video bandwidth (VBW) of 3 MHz.

For harmonics/spurs that fall in the restricted band, the radiated spurious emissions above 1 GHz were measured with RBW of 1 MHz, VBW of 10 Hz, and Sweep of Auto. The unit was configured for continuous operation.


EUT was tested in three orthogonal orientations (XY, YZ, and ZX planes).

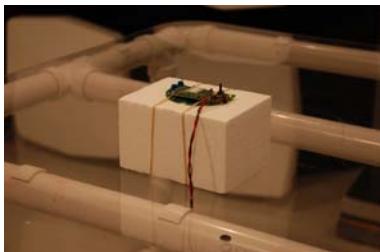

EUT = XY

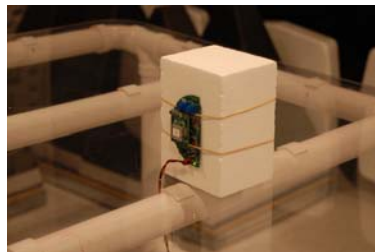


EUT = YZ

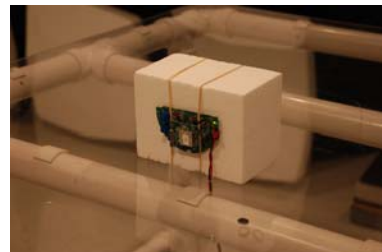

EUT = ZX

Refers to the following block diagram and data table for test data. Antenna factor, cable loss, and preamplifier gain were compensated for in the receiver. A factor of 20 dB/decade applies to measurements made at a closer distance than the limit distance before comparing to the limits. Calculation of duty cycle correction factor is included in the Theory of Operation.

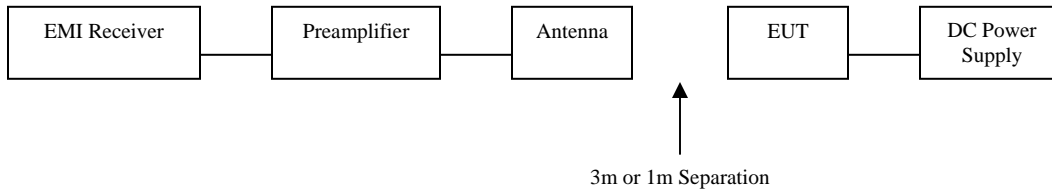

CWD7041 Radiated Spurious Emissions, Boost Mode

Antenna Polarization	Frequency (MHz)	Channel No.	Power Setting (Level)	EUT Orientation	Measured Data (dBuV/m)	Duty Cycle Correction Factor (dB)	Corrected Data	Limit (dBuV/m)	Margin (dB)	Antenna Height (cm)	Turtable Degree	Detector
H	2405	11	8	YZ	101.62	-	-	-	-	200.6	4.6	AVE
H	2405	11	8	YZ	104.04	-	-	-	-	200.6	4.6	PK
H	2390	11	8	YZ	38.77	17.7	21.07	54	32.93	200.6	4.6	AVE
H	2390	11	8	YZ	49.38	0	49.38	74	24.62	200.6	4.6	PK
H	4810	11	8	YZ	41.88	17.7	24.18	54	29.82	199.2	26.9	AVE
H	4810	11	8	YZ	53.16	0	53.16	74	20.84	199.2	26.9	PK
H	12025	11	8	YZ	40.34	17.7	22.64	54	31.36	196.6	348.7	AVE
H	12025	11	8	YZ	53.11	0	53.11	74	20.89	196.6	348.7	PK
H	19240 (NF)*	11	8	YZ	34.57	17.7	16.87	54	37.13	-	-	AVE
H	19240 (NF)*	11	8	YZ	47.88	0	47.88	74	26.12	-	-	PK
H	2440	18	8	YZ	104.86	-	-	-	-	191.0	359.9	AVE
H	2440	18	8	YZ	107.15	-	-	-	-	191.0	359.9	PK
H	4880	18	8	YZ	40.00	17.7	22.30	54	31.70	177.4	7.2	AVE
H	4880	18	8	YZ	51.64	0	51.64	74	22.36	177.4	7.2	PK
H	7320	18	8	YZ	36.45	17.7	18.75	54	35.25	127.1	349.7	AVE
H	7320	18	8	YZ	49.93	0	49.93	74	24.07	127.1	349.7	PK
H	12200	18	8	YZ	43.90	17.7	26.20	54	27.80	173.4	349.7	AVE
H	12200	18	8	YZ	56.18	0	56.18	74	17.82	173.4	349.7	PK
H	19520 (NF)*	18	8	YZ	34.43	17.7	16.73	54	37.27	-	-	AVE
H	19520 (NF)*	18	8	YZ	48.44	0	48.44	74	25.56	-	-	PK
H	2480	26	0	YZ	100.51	-	-	-	-	190.9	9.0	AVE
H	2480	26	0	YZ	102.84	-	-	-	-	190.9	9.0	PK
H	2483.5	26	0	YZ	63.81	17.7	46.11	54	7.89	190.9	9.0	AVE
H	2483.5	26	0	YZ	73.45	0	73.45	74	0.55	190.9	9.0	PK
H	2483.5	25	8	YZ	48.26	17.7	30.56	54	23.44	190.9	9.0	AVE
H	2483.5	25	8	YZ	61.58	0	61.58	74	12.42	190.9	9.0	PK
H	4960	26	0	YZ	33.76	17.7	16.06	54	37.94	190.9	347.7	AVE
H	4960	26	0	YZ	47.60	0	47.60	74	26.40	190.9	347.7	PK
H	7440 (NF)	26	0	YZ	33.38	17.7	15.68	54	38.32	-	-	AVE
H	7440 (NF)	26	0	YZ	47.11	0	47.11	74	26.89	-	-	PK
H	12400 (NF)	26	0	YZ	38.03	17.7	20.33	54	33.67	-	-	AVE
H	12400 (NF)	26	0	YZ	50.87	0	50.87	74	23.13	-	-	PK
H	19840 (NF)*	26	0	YZ	34.02	17.7	16.32	54	37.68	-	-	AVE
H	19840 (NF)*	26	0	YZ	48.30	0	48.30	74	25.70	-	-	PK
H	22320 (NF)*	26	0	YZ	34.12	17.7	16.42	54	37.58	-	-	AVE
H	22320 (NF)*	26	0	YZ	48.41	0	48.41	74	25.59	-	-	PK

NF: Noise Floor
 *: Tested at 1m

Tested: June 14-16, 2011
 Tested by: Grace Lin

3.9 Receiver Radiated Emissions


Performance Criterion: Receiver radiated emissions must meet the requirements of Table 1 of IC RSS-Gen. Receivers operating above 960 MHz or below 30 MHz are exempt from complying with the technical provisions of FCC Part 15 Subpart B.

Test Results: Complies


Test Details: Radiated emission was performed from 30 MHz to the fifth harmonics of the carrier. For each scan of radiated emission measurement, the procedures for maximizing emissions were followed. The EUT was rotated and antenna height was varied between 1 m and 4 m in order to maximize the emission. Measurements in both horizontal and vertical polarities were made and the data was recorded. All radiated emission measurements, up to 18 GHz, were performed at 3-meter distance between an antenna and the EUT.

For the measurement of radiated emission at the frequency range 30-1000MHz, measurement was made by using a quasi-peak detector with a 120 kHz bandwidth. For the frequency range above 1 GHz, measurement was made using an average detector with a 1 MHz bandwidth.


EUT was tested in three orthogonal orientations (XY, YZ, and ZX planes).

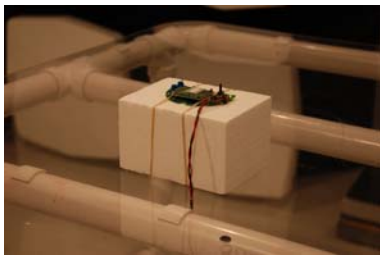

EUT = XY

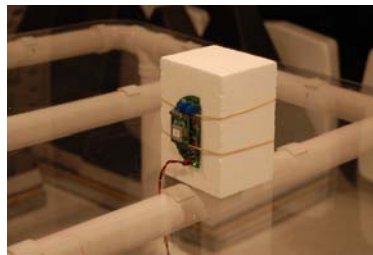


EUT = YZ

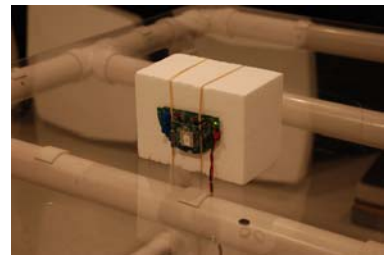


EUT = ZX

Refers to the following block diagram, data table, and receiver screen captures for test data. Antenna factor, cable loss, and preamplifier gain were compensated for in the receiver.

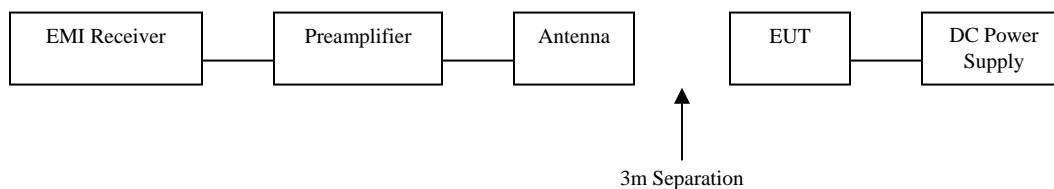



Receiver Radiated Emission, 30MHz – 1 GHz:

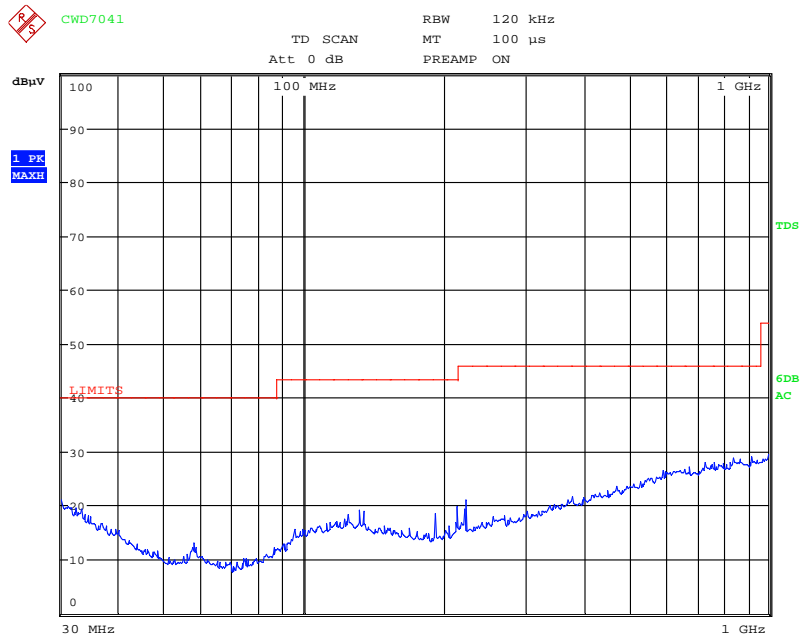


Date: 14.JUN.2011 11:57:35



Receiver Radiated Emission, above 1 GHz:




TD SCAN RBW 1 MHz
MT 100 ms
Att 0 dB PREAMP OFF

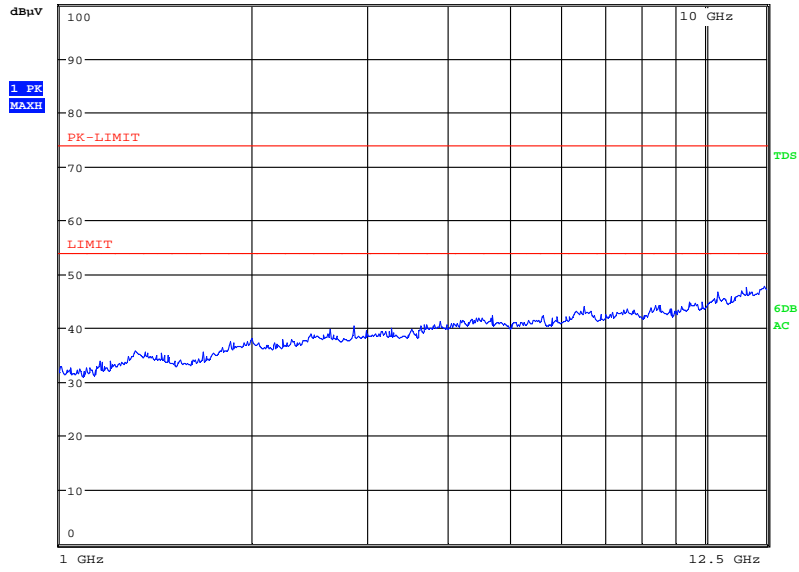

Date: 14.JUN.2011 13:49:15



TD SCAN RBW 120 kHz
MT 100 µs
Att 0 dB PREAMP OFF

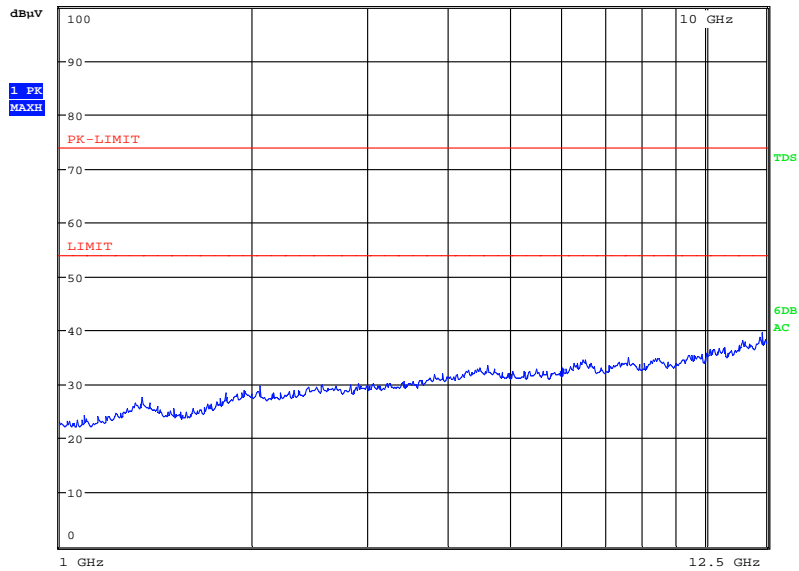

Date: 14.JUN.2011 13:53:53




3.10 Receiver AC Power Line Conducted Emissions

Performance Criterion: AC power line conducted emissions shall not exceed the limits specified in FCC § 15.107 and Table 2 of IC RSS-Gen.


Test Results: Complies.

Test Details: AC power line conducted emissions were performed from 150 kHz to 30 MHz and measured with a resolution bandwidth of 9 kHz. EUT was set in the receiving mode. Refers to the following screen captures (using a peak detector) and block diagram.






Line 1:

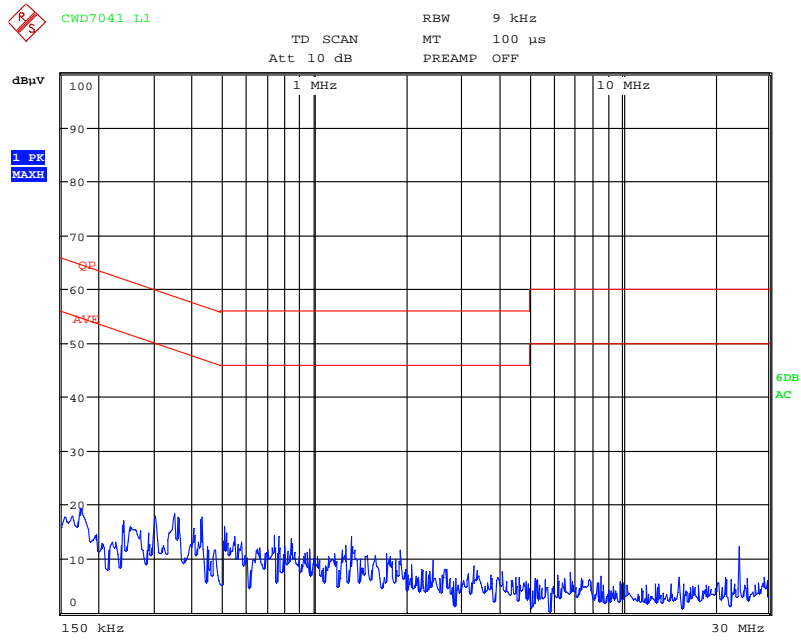

Date: 15.JUN.2011 14:53:04

Line 2:

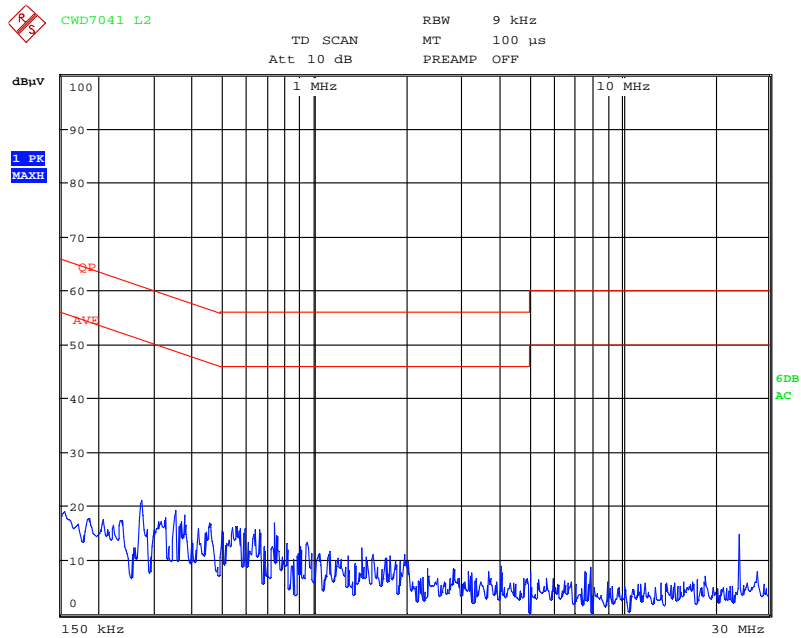

Date: 15.JUN.2011 14:54:34