



# RF Exposure Evaluation Report

<b>APPLICANT</b>	CRESTRON ELECTRONICS INC
<b>ADDRESS</b>	15 VOLVO DRIVE ROCKLEIGH NJ 07647 USA
<b>FCC ID</b>	EROCWD7787
<b>MODEL NUMBER</b>	M201910001
<b>PRODUCT DESCRIPTION</b>	RF WIRELESS ZIGBEE TRANSCEIVER
<b>DATE SAMPLE RECEIVED</b>	12/5/2019
<b>FINAL TEST DATE</b>	12/5/2019
<b>PREPARED BY</b>	Tim Royer
<b>TEST RESULTS</b>	<input checked="" type="checkbox"/> PASS <input type="checkbox"/> FAIL

Report Number	Report Version	Description	Issue Date
3315UT19 MPETestReport_	---	Initial Issue	1/21/2020

**THE ATTACHED REPORT SHALL NOT BE REPRODUCED EXCEPT IN FULL WITHOUT THE WRITTEN APPROVAL OF TIMCO ENGINEERING, INC.**



## TABLE OF CONTENTS

<b>GENERAL REMARKS .....</b>	<b>2</b>
<b>GENERAL INFORMATION .....</b>	<b>3</b>
<b>ANTENNA INFORMATION .....</b>	<b>3</b>
<b>MPE CALCULATION .....</b>	<b>4</b>
<b>MPE TABLE .....</b>	<b>5</b>
GENERAL UNCONTROLLED EXPOSURE .....	5
GENERAL CONTROLLED EXPOSURE .....	5

## GENERAL REMARKS

### Summary

The device under test does:

- Fulfill the general approval requirements as identified in this test report and was selected by the customer.
- Not fulfill the general approval requirements as identified in this test report

### Attestations

This equipment has been tested in accordance with the standards identified in this test report. To the best of my knowledge and belief, these tests were performed using the measurement procedures described in this report.

All instrumentation and accessories used to test products for compliance to the indicated standards are calibrated regularly in accordance with ISO 17025 requirements.

I attest that the necessary measurements were made at:

**Timco Engineering Inc.**  
**849 NW State Road 45**  
**Newberry, FL 32669**  
**Designation #: US1070**

**Prepared by:**



<b>Name and Title</b>	Tim Royer, Project Manager / EMC Testing Engineer
<b>Date</b>	01/21/2020

## GENERAL INFORMATION

<b>EUT Description</b>	CRESTRON ELECTRONICS INC		
<b>Model Number</b>	M201910001		
<b>EUT Power Source</b>	<input checked="" type="checkbox"/> 110–120Vac, 50–60Hz	<input type="checkbox"/> DC Power	<input type="checkbox"/> Battery Operated
<b>Test Item</b>	<input type="checkbox"/> Engineering Prototype	<input type="checkbox"/> Pre-Production	<input checked="" type="checkbox"/> Production
<b>Type of Equipment</b>	<input type="checkbox"/> Fixed	<input checked="" type="checkbox"/> Mobile	<input type="checkbox"/> Portable
<b>Antenna Connector</b>	SMA		
<b>Test Conditions</b>	The temperature was 26°C Relative humidity of 50%.		
<b>Modification to the EUT</b>	No Modification to EUT.		
<b>Applicable Standards</b>	FCC CFR 47 Part 2.1091		
<b>Test Facility</b>	Timco Engineering Inc. at 849 NW State Road 45 Newberry, FL 32669 USA. Designation #: US1070		

## ANTENNA INFORMATION

Antenna is Provided	Type	Max Gain (dBi)
No	n/a	0.0

## POWER OUTPUT OF EUT

Tuned Frequency (MHz)	Power Output (dBm)
2405	19.46
2445	19.22
2480	19.25

Measured Power Output = 0.88 W

## MPE CALCULATION


The minimum separation distance is calculated as follows:

$$E(V/m) = \frac{\sqrt{30 \times P \times G}}{d}$$

$$\text{Power density: } P_d(mW/cm^2) = \frac{E^2}{3770}$$

## MPE LIMITS

*Figure 1. FCC Limits for Maximum Permissible Exposure (MPE)  
Plane-wave Equivalent Power Density*

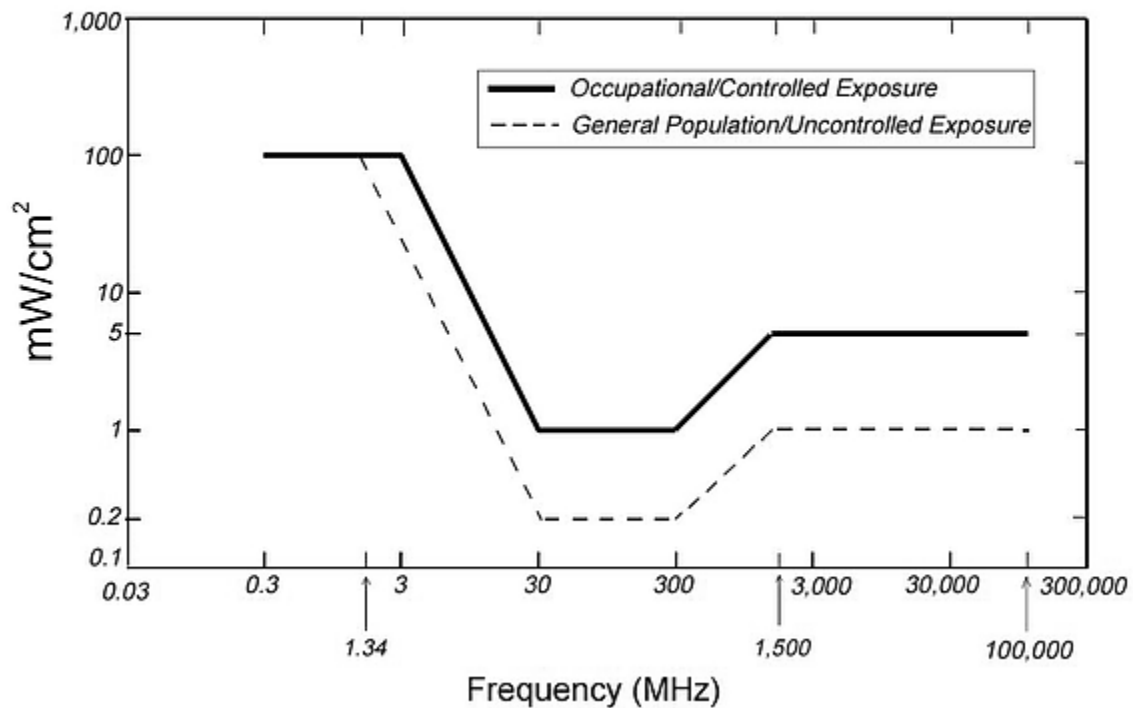


## MPE Table

### General Uncontrolled Exposure

The limit for General Uncontrolled Exposure Environment is calculated as shown in FCC Pt. 1.1310, Table B:

Variable	Value
Max Power	0.088 W
Frequency Range	2400 – 2483.5 MHz
Duty Cycle (at full power)	100%
Max Antenna Gain	0 dBi
Coax Loss	0 dB
Power Density	1 mW/cm <sup>2</sup>
Minimum Separation Distance	20 cm

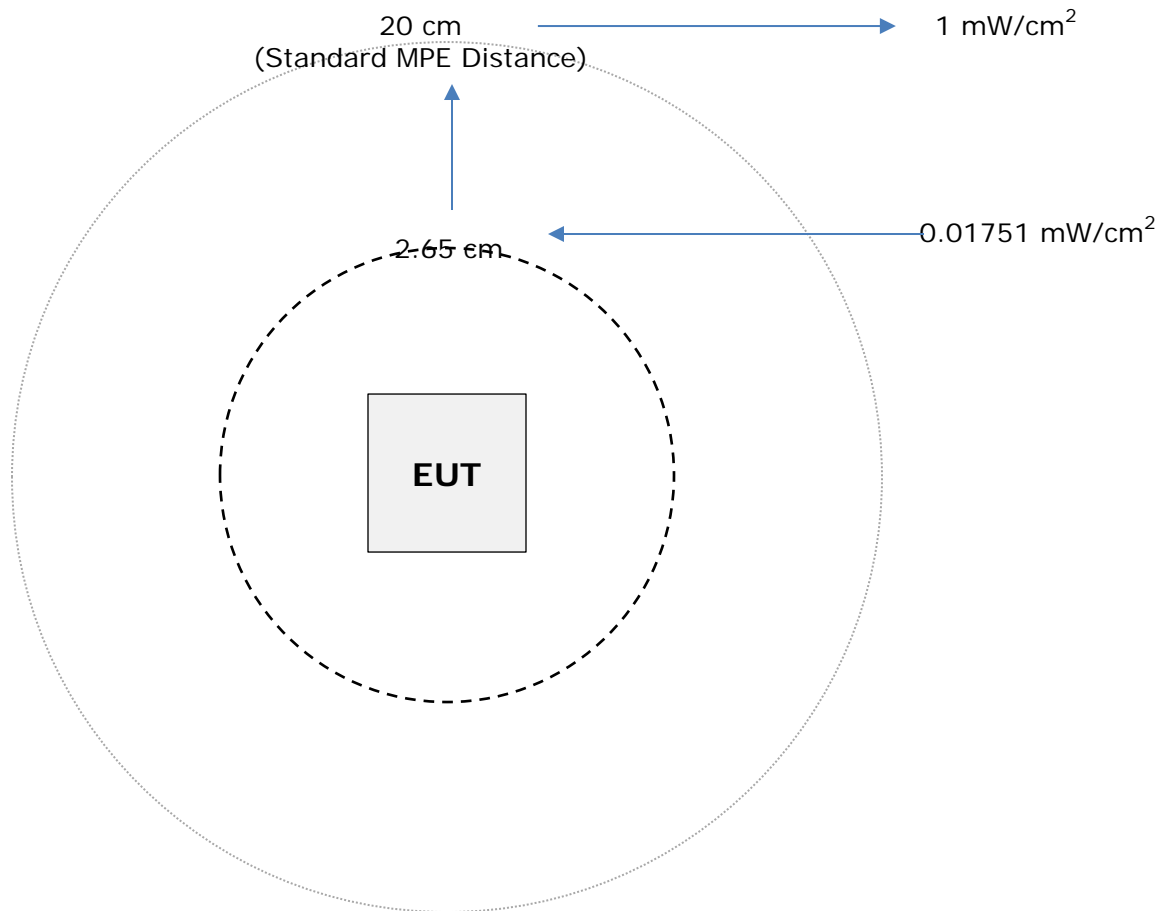

## General Controlled Exposure

The limit for General Controlled Exposure Environment is calculated as shown in FCC Pt. 1.1310, Table A:

Variable	Value
Max Power	0.088 W
Frequency Range	2400 – 2483.5 MHz
Duty Cycle (at full power)	100%
Max Antenna Gain	0 dBi
Coax Loss	0 dB
Power Density	5 mW/cm <sup>2</sup>
Minimum Separation Distance	20 cm

