

# Crestron Electronics, Inc.

15 Volve Drive Rockleigh,  
NJ 07647. USA  
800.237.2041  
201.767.3400

**crestron.com**



AT	BE	CY	CZ	DK	EE	FI
FR	DE	EL	HU	IE	IT	LV
LT	LU	MT	NL	PL	PT	SK
SI	ES	SE	UK	BG	RO	HR

In all EU member states, operation of 5150 -  
5350 MHz is restricted to indoor use only.

For Certification, Warranty and RMA  
information, please visit [crestron.com](http://crestron.com)




**M201928001**

Tabletop Meeting Device


**Quick Start Guide**

## Hardware Hookup

Make connections as shown in the following diagram.

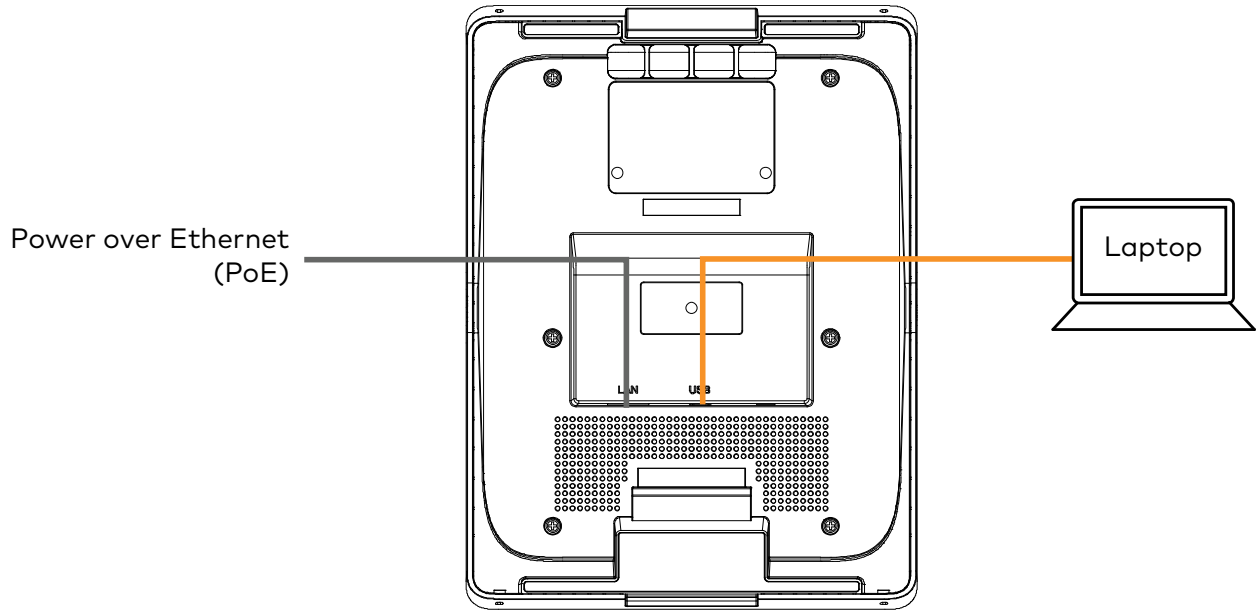

If using the included power supply to provide PoE to the UC-2, connect the supply as shown below.

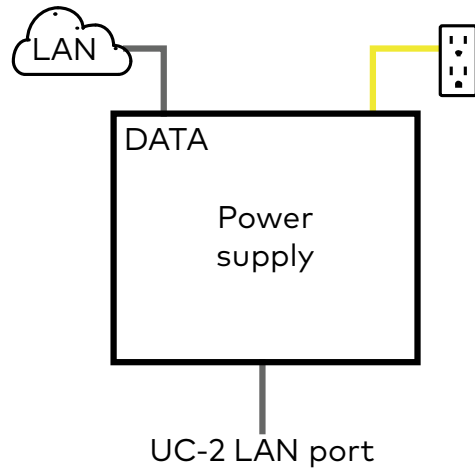

Connect a laptop computer with the included USB cable to the USB port and use the laptop's UC software for a conference call.

## Sign In

1. Use your Microsoft Teams™ software credentials to log into the unit.

## Use Your Laptop's UC Software

The UC-2 can also be used as an audio peripheral for your laptop computer's UC software to make a call.

1. Connect the USB cable to the computer.
2. On the computer's UC software, select "Crestron UC-2 (Echo Canceling Speakerphone)" as the audio device. The UC-2 can now be used as an audio peripheral.

## **CRESTRON UC-2 Specifications**

### **Display:**

Touch Screen: 7" capacitive touch screen (5 points of simultaneous contact)

LCD: 1280×800 resolution

### **Audio:**

Speaker: 4 ohm, 7 W Speaker

Microphone: Four Digital I2S MEMS sensor, Sensitivity -26dB, SNR 64dBA

### **Processor:**

Type: Dual-core Cortex-A72 and Quad-core Cortex-A53

Basic Frequency: 1.8 GHz

### **Memory:**

RAM: 2GB DDR3L RAM (256Mb x 16bit x 4)

Flash: 16GB

### **Communications:**

Wi-Fi®: Dual-band 802.11a/b/g/n/ac (2.4GHz & 5GHz)

Bluetooth®: Bluetooth V5.0+EDR

Ethernet: 10/100/1000Mbps

### **PoE Input:**

Max Input voltage: 57 V

Integrated PoE: 802.3af Class 3 and 802.3at, Class 4

**Ports:**

Ethernet: (1) RJ-45, 100/1000 Mbps Base-T Ethernet port with LED status indicators

USB: (1) Micro USB port

Security: (1) Kensington™ security port

**Environment:**

Operating Temperature: 32° to 104° F (0° to 40° C)


Operating Humidity: 10% to 90% (non-condensing)

**Dimensions:**

Height: 3.02 in. (76 mm)

Width: 7.17 in. (182 mm)

Depth: 9.61 in. (244 mm)

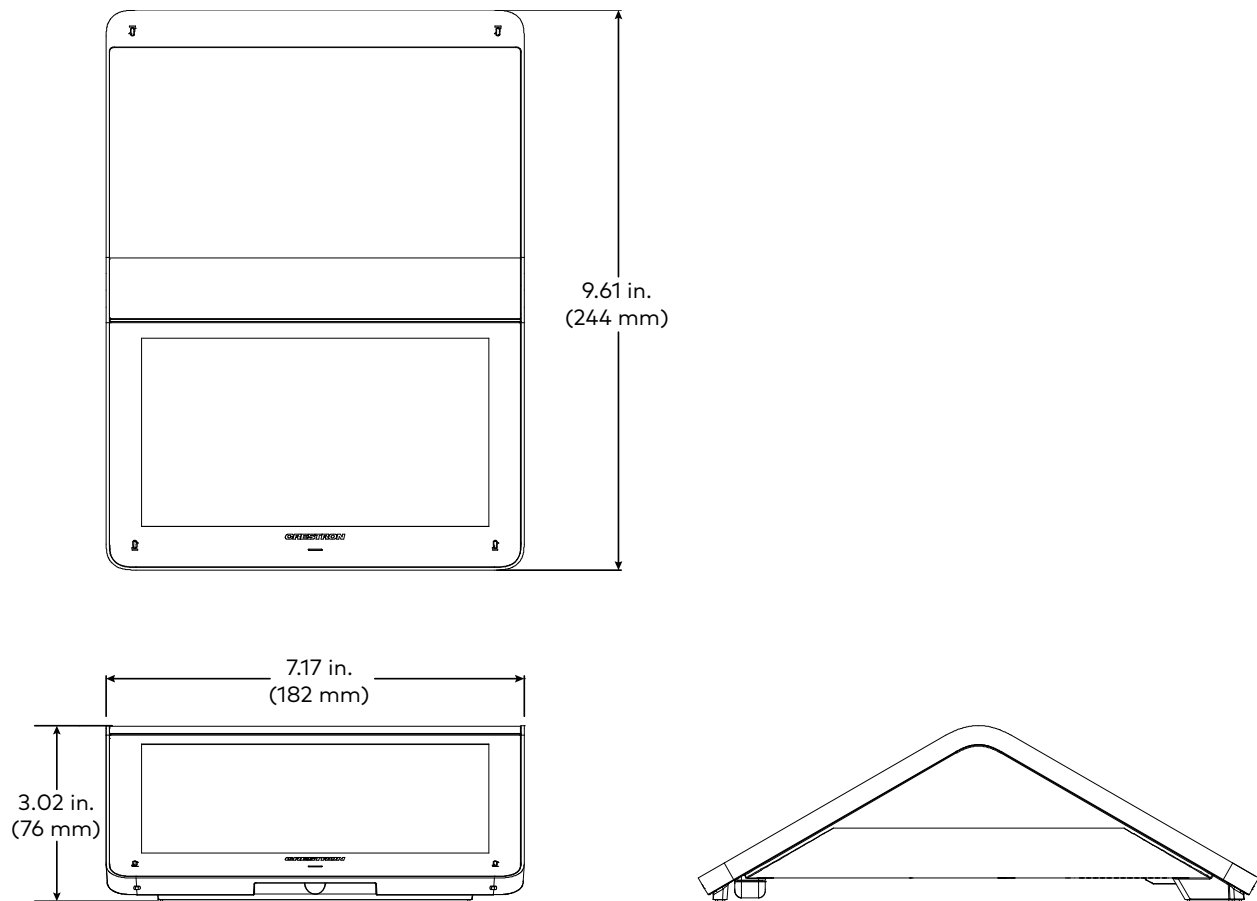

# Crestron Flex Tabletop Conference System

## Getting Started

Scan the QR code to view the Quick Start Guide.



[www.crestron.com/docs/8625](http://www.crestron.com/docs/8625)

For additional information, visit  
[www.crestron.com/model/6510609](http://www.crestron.com/model/6510609).

## Certification and Compliance

**Regulatory Model:** M201928001

### Federal Communications Commission (FCC) Compliance Statement

This device complies with part 15 of the FCC Rules. Operation is subject to the following conditions: (1) This device may not cause harmful interference and (2) this device must accept any interference received, including interference that may cause undesired operation.

**CAUTION:** Changes or modifications not expressly approved by the manufacturer responsible for compliance could void the user's authority to operate the equipment.



**NOTE:** This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

This equipment complies with radiation exposure limits set forth for an uncontrolled environment. This transmitter must not be co-located or operating in conjunction with any other antenna or transmitter.

This equipment should be installed and operated with minimum distance 20cm between the radiator & your body.

**ISED/C** Caution: This device complies with Innovation, Science, and Economic Development Canada licence-exempt RSS standard(s). Operation is subject to the following two conditions: (1) this device may not cause interference, and (2) this device must accept any interference, including interference that may cause undesired operation of the device.

**ISED RF Exposure Statement:** The device is in compliance with RF exposure guidelines, users can obtain Canadian information on RF exposure and compliance. The minimum distance from body to use the device is 20cm.

Après examen de ce matériel aux conformités ou aux limites d'intensité de champ RF, les utilisateurs peuvent sur l'exposition aux radiofréquences et la conformité and compliance d'acquérir les informations correspondantes. La distance minimale du corps à utiliser le dispositif est de 20cm.

5150-5350 MHz is restricted to indoor use only.

### Industry Canada (IC) Compliance Statement

CAN ICES-3 (B)/NMB-3(B)

This product is Listed to applicable UL® Standards and requirements tested by Underwriters Laboratories Inc.

Ce produit est homologué selon les normes et les exigences UL applicables par Underwriters Laboratories Inc.



## Legal

The product warranty can be found at [www.crestron.com/warranty](http://www.crestron.com/warranty).

The specific patents that cover Crestron products are listed at [www.crestron.com/legal/patents](http://www.crestron.com/legal/patents).

Certain Crestron products contain open source software. For specific information, visit [www.crestron.com/opensource](http://www.crestron.com/opensource).

Crestron and the Crestron logo are either trademarks or registered trademarks of Crestron Electronics, Inc. in the United States and/or other countries. The ETL logo is either a trademark or registered trademark of Intertek Testing Services NA in the United States and/or other countries. UL and the UL logo are either trademarks or registered trademarks of Underwriters Laboratories, Inc. in the United States and/or other countries. Other trademarks, registered trademarks, and trade names may be used in this document to refer to either the entities claiming the marks and names or their products. Crestron disclaims any proprietary interest in the marks and names of others. Crestron is not responsible for errors in typography or photography.

©2020 Crestron Electronics, Inc.

### **Crestron Electronics, Inc.**

15 Volvo Drive, Rockleigh, NJ 07647

Tel: 888.CRESTRON

Fax: 201.767.7656

[www.crestron.com](http://www.crestron.com)

Product Information - Doc. 8624A

(2055149)

03/12/20