



# EMC Measurement/Technical Report

on

Bluetooth™ Module

WML-C09, WML-C10

Report Reference: 4\_MITSU\_0102\_BTT\_FCCa

7 Layers AG  
Borsigstr. 11  
40880 Ratingen  
Germany

**Note:**

The following test results relate only to the devices specified in this document. This report shall not be reproduced in parts without the written approval of the testing laboratory.

---

Registergericht - registered in:  
Ratingen, HRB 3264  
Aufsichtsratsvorsitzende -  
Chairman of the Supervisory Board:  
Dr. Sabine Grobecker

Vorstand - Board of Directors:  
Dr. Wolfgang Dahm  
Dr. Hans-Jürgen Meckelburg

7 layers AG, Borsigstrasse 11  
40880 Ratingen, Germany  
Phone: +49 (0) 2102 749 0  
Fax: +49 (0) 2102 749 350  
<http://www.7Layers.com>

---



## Table of Contents

<b>0. Summary</b>	<b>3</b>
0.1 Technical Report Summary	3
0.2 Measurement Summary	4
<b>1. Administrative Data</b>	<b>6</b>
1.1 Testing Laboratory	6
1.2 Project Data	6
1.3 Applicant Data	6
1.4 Manufacturer Data	6
<b>2. Product Labeling</b>	<b>7</b>
2.1 FCC ID Label	7
2.2 Location of Label on the EUT	7
<b>3. Testobject Data</b>	<b>8</b>
3.1 General EUT Description	8
3.2 EUT Main Components	9
3.3 Ancillary Equipment	9
3.4 EUT Setups	9
3.5 Operating Modes	10
<b>4. Measurement Results</b>	<b>11</b>
- Conducted Emissions	-
4.1 Occupied Bandwidth	11
4.2 Output Power	14
4.3 Spurious Emissions Conducted	17
4.4 Spurious Emissions Radiated	19
4.5 Dwell Time	23
4.6 Power Density	25
4.7 Channel Separation	27
- Processing Gain	-
<b>5. Testequipment</b>	<b>28</b>
<b>6. Foto Report</b>	<b>30</b>
<b>7. Setup Drawings</b>	<b>33</b>
<b>8. Annex</b>	<b>35</b>
Measurement plots	25 Pages



## **0 Summary**

### **0.1 Technical Report Summary**

**Type of Authorization:**

Certification for an Intentional Radiator (Frequency Hopping Spread Spectrum)

**Applicable FCC Rules:**

Prepared in accordance with the requirements of FCC Rules and Regulations as listed in 47 CFR Ch.1 Parts 0 to 19 (10-1-98 Edition). The following subparts are applicable to the results in this test report.

Part 2, Subpart J - Equipment Authorization Procedures, Certification Sections

Part 15, Subpart C - Intentional Radiators

§ 15.201 Equipment authorization requirement

§ 15.203 Antenna requirements

§ 15.207 Conducted limits

§ 15.209 Radiated emission limits; general requirements

§ 15.247 Operation within the bands 902-928 MHz, 2400-2483,5 MHz and 5725-5850 MHz

**Note:**

The tests were selected and performed with reference to the FCC Public Notice DA 00-705, released March 30, 2000

**Summary Test Results:**

**The equipment under test fulfilled the requirements of the applied FCC rules.**



## 0.2 Measurement Summary

### **FCC Part 15, Subpart C § 15.247 (a) (1) (ii)**

#### **Occupied Bandwidth**

The measurement was performed according to ANSI C63.4 1992

<b>OP Mode</b>	<b>Setup</b>	<b>Port</b>	<b>Final Result</b>
op-mode 1	setup 1	temporary antenna connector	passed
op-mode 2	setup 1	temporary antenna connector	passed
op-mode 3	setup 1	temporary antenna connector	passed
op-mode 4	setup 1	temporary antenna connector	passed
op-mode 5	setup 1	temporary antenna connector	passed

### **FCC Part 15, Subpart C § 15.247 (b) (1)**

#### **Peak Power Output**

The measurement was performed according to FCC §15.31 10-1-1998

<b>OP Mode</b>	<b>Setup</b>	<b>Port</b>	<b>Final Result</b>
op-mode 1	setup 1	temporary antenna connector	passed
op-mode 2	setup 1	temporary antenna connector	passed
op-mode 3	setup 1	temporary antenna connector	passed
op-mode 4	setup 1	temporary antenna connector	passed
op-mode 5	setup 1	temporary antenna connector	passed

### **FCC Part 15, Subpart C § 15.247 (c)**

#### **Spurious RF Conducted Emissions**

The measurement was performed according to FCC §15.31 10-1-1998

<b>OP Mode</b>	<b>Setup</b>	<b>Port</b>	<b>Final Result</b>
op-mode 1	setup 1	temporary antenna connector	passed
op-mode 2	setup 1	temporary antenna connector	passed
op-mode 3	setup 1	temporary antenna connector	passed

### **FCC Part 15, Subpart C § 15.247 (c), §15.35 (b), § 15.209**

#### **Spurious Radiated Emissions**

The measurement was performed according to ANSI C63.4 1992

<b>OP Mode</b>	<b>Setup</b>	<b>Port</b>	<b>Final Result</b>
op-mode 1	setup 2	enclosure	passed
op-mode 2	setup 2	enclosure	passed
op-mode 3	setup 2	enclosure	passed

### **FCC Part 15, Subpart C § 15.247 (g)**

#### **Dwell Time**

The measurement was performed according to FCC §15.31 10-1-1998

<b>OP Mode</b>	<b>Setup</b>	<b>Port</b>	<b>Final Result</b>
op-mode 4	setup 1	temporary antenna connector	passed
op-mode 5	setup 1	temporary antenna connector	passed

### **FCC Part 15, Subpart C § 15.247 (g)**



---

**Power Density**

The measurement was performed according to FCC §15.31 10-1-1998

<b>OP Mode</b>	<b>Setup</b>	<b>Port</b>	<b>Final Result</b>
op-mode 4	setup 1	temporary antenna connector	passed
op-mode 5	setup 1	temporary antenna connector	passed

---

**FCC Part 15, Subpart C § 15.247 (a) (1)**

---

**Channel Separation**

The measurement was performed according to FCC §15.31 10-1-1998

<b>OP Mode</b>	<b>Setup</b>	<b>Port</b>	<b>Final Result</b>
op-mode 6	setup 1	temporary antenna connector	passed

Responsible for  
Accreditation Scope: \_\_\_\_\_

Responsible  
for Test Report: \_\_\_\_\_



## **1. Administrative Data**

### **1.1 Testing Laboratory**

Company Name: 7 Layers AG  
Address: Borsigstr. 11  
40880 Ratingen  
Germany

This facility has been fully described in a report submitted to the FCC and accepted in a letter dated February 07, 2000 under the registration number 96716.

The test facility is also accredited by the following accreditation organisation:

- Deutscher Akkreditierungs Rat      DAR-Registration no. TTI-P-G 178/99-10

Responsible for Accreditation Scope: Dipl.-Ing Bernhard Retka  
Dipl.-Ing Arndt Stöcker

### **1.2 Project Data**

Responsible for Test Report: Dipl.-Ing. Robert Machulec  
Receipt of EUT: 17.05.02  
Date of Test(s): 20.05-22.05.02; 15.06.02  
Date of Report: 27.06.02

### **1.3 Applicant Data**

Company Name: Mitsumi Electronics Co. Ltd.  
Address: 8-8-2, Kokuryo-cho  
ZIP 182-8557  
chohu-shi, 182-8557 Tokyo  
Japan  
Contact Person: Mr. Takashi Watanabe

### **1.4 Manufacturer Data**

Company Name: see applicant  
Address:

Contact Person:



## **2.0 Product Labeling**

### **2.1 FCC ID Label:**

At the time of the test report there was no FCC label available.

### **2.2 Location of Label on the EUT:**

see above

### 3. Testobject Data

#### 3.1 General EUT Description

<b>Equipment under Test:</b>	Bluetooth™ Module
<b>Type Designation:</b>	WML-C09, WML-C10
<b>Kind of Device: (optional)</b>	Bluetooth transceiver module
<b>Voltage Type:</b>	DC
<b>Voltage level:</b>	3,3 V

#### General product description:

Bluetooth is a short-range radio link intended to be a cable replacement between portable and/or fixed electronic devices.

Bluetooth operates in the unlicensed ISM Band at 2.4 GHz. In the US a band of 83.5 MHz width is available. In this band, 79 RF channels spaced 1MHz apart are defined. The channel is represented by a pseudo-random hopping sequence through the 79 channels. The channel is divided into time slots, with a nominal slot length of 625µs, where each slot corresponds to different RF hop frequencies. The nominal hop rate is 1600 hops/s. All frequencies are equally used. The average time of occupancy is 0.3797 s within a 30 second period. The symbol rate on the channel is 1 Ms/s.

#### The EUT provides the following ports:

##### Ports

temporary antenna connector  
Enclosure

**The main components of EUT are listed and described in Chapter 3.2**



### 3.2 EUT Main components: Type, S/N, Short Descriptions etc. used in this Test Report

Short Description	Equipment under Test	Type Designation	Serial No.	HW Status	SW Status	Date of Receipt
EUT A (19020a01)	Bluetooth Module	WML-C09	DJ66T	Rev. 1	Rev. 14.3	17.05.02
EUT A is equipped with a temporary antenna connector.						
EUT B (19020c01)	Bluetooth Module	WML-C10	DJ71T	Rev. 1	Rev. 14.3	17.05.02
EUT B is equipped with an internal antenna.						

**NOTE: The short description is used to simplify the identification of the EUT in this test report**

### 3.3 Ancillary Equipment

For the purposes of this test report, ancillary equipment is defined as equipment which is used in conjunction with the EUT to provide additional operational and control features to the EUT. It is necessary to configure the system in a typical fashion, as a customer would normally use it.

Short Description	Equipment under Test	Type Designation	HW Status	SW Status	Serial No.	FCC Id
AE 2	CSR Development board (CSR)	-	-	-	-	-
AE 1	Mitsumi Control board	-	-	-	AG31T	-

### 3.4 EUT Setups

This chapter describes the combination of EUT's and ancillary equipment used for testing.

Setup No.	Combination of EUTs	Description
setup 1	EUT A + AE 1	For conducted RF measurements
setup 2	EUT B + AE 2	For radiated RF measurements

### 3.5 Operating Modes

This chapter describes the operating modes of the EUT's used for testing.

<b>Op. Mode</b>	<b>Description of Operating Modes</b>	<b>Remarks</b>
op-mode 1	Loopback mode on 2402 MHz	The R&S tester PTW 60 was used as a master and the EUT was configured to be a slave. Data (DH 1 packet, PRBS 9) was sent from the master to the slave and returned back by the slave.
op-mode 2	Loopback mode on 2441 MHz	The R&S tester PTW 60 was used as a master and the EUT was configured to be a slave. Data (DH 1 packet, PRBS 9) was sent from the master to the slave and returned back by the slave.
op-mode 3	Loopback mode on 2480 MHz	The R&S tester PTW 60 was used as a master and the EUT was configured to be a slave. Data (DH 1 packet, PRBS 9) was sent from the master to the slave and returned back by the slave.
op-mode 4	inquiry mode	
op-mode 5	paging mode	
op-mode 6	10 neighbouring channels	The EUT is set to transmit on ten neighbouring channels one after the other to see the channel separation.

## 4. Test Results

### 4.1 Occupied Bandwidth

**Standard** FCC Part 15, 10-1-98  
Subpart C

**The test was performed according to:** ANSI C63.4 1992

#### 4.1.1 Test Description

The test set-up was made in accordance to the general provisions of ANSI C63.4-1992.

The Equipment Under Test (EUT) was setup in a shielded room to perform the occupied bandwidth measurements.

The reference level is the level of the highest amplitude signal observed from the transmitter at either the fundamental frequency or first-order modulation products in all typical modes of operation, including the unmodulated carrier, even if atypical.

The results recorded were measured with the modulation which produce the worst-case (widest) occupied bandwidth.

The resolution bandwidth for measuring the reference level and the occupied bandwidth was 10 kHz.

The reference level of the spectrum analyser was set equal to the reference level of the EUT.

#### 4.1.2 Test Limits

- FCC Part 15, Subpart C, §15.247 (a) (1) (ii)
- (1) Frequency hopping systems operating in the 2400 - 2483.5 MHz band should use at least 75 hopping frequencies.
  - (2) The average time of occupancy on any frequency should not be greater than 0.4 seconds within a 30 second period.
  - (3) The maximum 20 dB bandwidth of the hopping channel is 1MHz.

#### 4.1.3 Test Protocol

Temperature: 23 °C  
Air Pressure: 1020 hPa  
Humidity: 30 %

Op. Mode	Setup	Port	Test Parameter
op-mode 1	setup 1	temporary antenna connector	

20 dB Bandwidth MHz	Remarks
0,8424	Please see annex for the measurement plot.

Remark: none



Temperature: 23 °C  
Air Pressure: 1020 hPa  
Humidity: 30 %

Op. Mode	Setup	Port	Test Parameter
op-mode 2	setup 1	temporary antenna connector	

20 dB Bandwidth MHz	Remarks
0,8344	Please see annex for the measurement plot.

Remark: none

Temperature: 23 °C  
Air Pressure: 1020 hPa  
Humidity: 30 %

Op. Mode	Setup	Port	Test Parameter
op-mode 3	setup 1	temporary antenna connector	

20 dB Bandwidth MHz	Remarks
0,8424	Please see annex for the measurement plot.

Remark: none

Temperature: 27 °C  
Air Pressure: 1018 hPa  
Humidity: 36 %

Op. Mode	Setup	Port	Test Parameter
op-mode 4	setup 1	temporary antenna connector	

20 dB Bandwidth MHz	Remarks
0,612	Please see annex for the measurement plot.

Remark: none

Temperature: 23 °C  
Air Pressure: 1022 hPa  
Humidity: 41 %

Op. Mode	Setup	Port	Test Parameter
op-mode 5	setup 1	temporary antenna connector	

20 dB Bandwidth MHz	Remarks
0,668	Please see annex for the measurement plot.

Remark: none



#### 4.1 .4 Test result: Occupied Bandwidth

FCC Part 15, Subpart J	Op. Mode	Setup	Port	Result
	op-mode 1	setup 1	temporary antenna connector	<b>passed</b>
	op-mode 2	setup 1	temporary antenna connector	<b>passed</b>
	op-mode 3	setup 1	temporary antenna connector	<b>passed</b>
	op-mode 4	setup 1	temporary antenna connector	<b>passed</b>
	op-mode 5	setup 1	temporary antenna connector	<b>passed</b>

## 4. 2 Peak Power Output

**Standard** FCC Part 15, 10-1-98  
Subpart C

**The test was performed according to:** FCC §15.31 10-1-1998

### 4. 2 .1 Test Description

The Equipment Under Test (EUT) was set up in a shielded room to perform the output power measurements.

The results recorded were measured with the modulation which produces the worst-case (highest) output power.

The resolution bandwidth for measuring the output power was 1 MHz.

The reference level of the spectrum analyser was set equal to the output power of the EUT.

The EUT was connected to the spectrum analyzer via a short coax cable (Type: Rosenberger RTK 161, 1m, SMA connectors), with a known loss.

### 4. 2 .2 Test Limits

FCC Part 15, Subpart C, §15.247 (b) (1)

(1) For frequency hopping systems operating in the band 2400 - 2483,5 MHz or 5725 - 5850 MHz and for all direct sequence systems: 1 Watt

Used conversion factor: Limit (dBm) = 10 log (Limit (W)/1mW)

==> Maximum Output Power: 30 dBm

### 4. 2 .3 Test Protocol

Temperature: 23 °C

Air Pressure: 1020 hPa

Humidity: 30 %

Op. Mode	Setup	Port	Test Parameter
op-mode 1	setup 1	temporary antenna connector	

Output Power dBm	Remarks
0,53	The EIRP including antenna gain (2,1 dBi) is 2,63 dBm

Remark: Please see annex for the measurement plot.



Temperature: 23 °C  
Air Pressure: 1020 hPa  
Humidity: 30 %

Op. Mode	Setup	Port	Test Parameter
op-mode 2	setup 1	temporary antenna connector	

Output Power dBm	Remarks
0,54	The EIRP including antenna gain (2,1 dBi) is 2,64 dBm

Remark: Please see annex for the measurement plot.

Temperature: 23 °C  
Air Pressure: 1020 hPa  
Humidity: 30 %

Op. Mode	Setup	Port	Test Parameter
op-mode 3	setup 1	temporary antenna connector	

Output Power dBm	Remarks
0,69	The EIRP including antenna gain (2,1 dBi) is 2,79 dBm

Remark: Please see annex for the measurement plot.

Temperature: 27 °C  
Air Pressure: 1018 hPa  
Humidity: 36 %

Op. Mode	Setup	Port	Test Parameter
op-mode 4	setup 1	temporary antenna connector	

Output Power dBm	Remarks
0,09	The EIRP including antenna gain (2,1 dBi) is 2,19 dBm

Remark: Please see annex for the measurement plot.

Temperature: 27 °C  
Air Pressure: 1018 hPa  
Humidity: 36 %

Op. Mode	Setup	Port	Test Parameter
op-mode 5	setup 1	temporary antenna connector	

Output Power dBm	Remarks
0,04	The EIRP including antenna gain (2,1 dBi) is 2,14 dBm

Remark: Please see annex for the measurement plot.



#### 4.2 .4 Test result: Peak Power Output

FCC Part 15, Subpart	Op. Mode	Setup	Port	Result
	op-mode 1	setup 1	temporary antenna connector	<b>passed</b>
	op-mode 2	setup 1	temporary antenna connector	<b>passed</b>
	op-mode 3	setup 1	temporary antenna connector	<b>passed</b>
	op-mode 4	setup 1	temporary antenna connector	<b>passed</b>
	op-mode 5	setup 1	temporary antenna connector	<b>passed</b>



### 4.3 Spurious RF Conducted Emissions

**Standard** FCC Part 15, 10-1-98  
Subpart C

**The test was performed according to:** FCC §15.31 10-1-1998

#### 4.3.1 Test Description

The Equipment Under Test (EUT) was set up in a shielded room to perform the output power measurements

The EUT was connected to spectrum analyzer via a short coax cable (Type: Rosenberger RTK 161, 1m, SMA connectors), with a known loss.

Analyser settings:

- Detector: Peak-Maxhold
- Frequency range: 30 – 25000 MHz
- Resolution Bandwidth (RBW): 100 kHz
- Video Bandwidth (VBW): 100 kHz
- Sweep Time: Coupled

The reference level of the spectrum analyser was set equal to the reference level of the EUT.

#### 4.3.2 Test Limits

FCC Part 15, Subpart C, §15.247 (c)

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power.

#### 4.3.3 Test Protocol

Temperature: 23 °C

Air Pressure: 1020 hPa

Humidity: 30 %

Op. Mode	Setup	Port	Test Parameter
op-mode 1	setup 1	temporary antenna connector	

Frequency MHz	Measured Value dBm	Correction Factor dB	Corrected Value dBm	Reference Value dBm	Limit dBm	Delta to Limit dB
30,00			-49,15	0,45	-19,55	29,60
4784,00			-48,98	0,45	-19,55	29,43
7186,00			-51,71	0,45	-19,55	32,16

Remark: Please see annex for the measurement plot.



Temperature: 23 °C  
 Air Pressure: 1020 hPa  
 Humidity: 30 %

Op. Mode	Setup	Port	Test Parameter
op-mode 2	setup 1	temporary antenna connector	

Frequency MHz	Measured Value dBm	Correction Factor dB	Corrected Value dBm	Reference Value dBm	Limit dBm	Delta to Limit dB
30,00			-48,35	0,43	-19,57	28,78
4884,00			-46,59	0,43	-19,57	27,02
6885,00			-56,70	0,43	-19,57	37,13

Remark: Please see annex for the measurement plot.

Temperature: 23 °C  
 Air Pressure: 1020 hPa  
 Humidity: 30 %

Op. Mode	Setup	Port	Test Parameter
op-mode 3	setup 1	temporary antenna connector	

Frequency MHz	Measured Value dBm	Correction Factor dB	Corrected Value dBm	Reference Value dBm	Limit dBm	Delta to Limit dB
30,00			-48,01	0,65	-19,35	28,66
4934,00			-45,08	0,65	-19,35	25,73
6885,00			-56,59	0,65	-19,35	37,24

Remark: Please see annex for the measurement plot.

#### 4.3 .4 Test result: Spurious RF Conducted Emissions

FCC Part 15, Subpart J	Op. Mode	Setup	Port	Result
	op-mode 1	setup 1	temporary antenna connector	<b>passed</b>
	op-mode 2	setup 1	temporary antenna connector	<b>passed</b>
	op-mode 3	setup 1	temporary antenna connector	<b>passed</b>

## 4. 4 Spurious Radiated Emissions

**Standard** FCC Part 15, 10-1-98  
Subpart C

**The test was performed according to:** ANSI C63.4 1992

### 4. 4 .1 Test Description

The test set-up was made in accordance to the general provisions of ANSI C63.4-1992.

The Equipment Under Test (EUT) was set up on a non-conductive table 1.0 x 2.0 m in the semi-anechoic chamber. The test was performed at an EUT to receiving antenna distance of 3m.

The radiated emissions measurements was made in a typical installation configuration.

The measurement procedure consists of four steps. It is implemented into EMI test software ES-K1 from R&S.

Step 1: Preliminary scan

Preliminary test to identify the highest amplitudes relative to the limit.

Settings for step 1:

- Detector: Peak-Maxhold
- Frequency range: 30 – 1000 MHz
- Frequency steps: 60 kHz
- IF-Bandwidth: 120 kHz
- Measuring time / Frequency step: 100 µs
- Turntable angle range: -180 to 180 °
- Turntable stepsize: 90°
- Height variation range: 1 – 3m
- Height variation stepsize: 2m
- Polarisation: Horizontal + Vertical

Intention of this step is, to determine the radiated EMI-profile of the EUT. With this data, the test system performs ( to reduce the number of final measurements) a data reduction with the following parameters:

- Offset for acceptance analysis: Limit line – 10 dB
- Maximum number of final measurements: 12

Step 2:

With the frequencies determined in step 1, an additional measurement with the following settings will be performed. Intention of this step is, to find out the approximate turntable angle and antenna height for each frequency.

Settings for step 2:

- Detector: Peak – Maxhold
- Measured frequencies: in step 1 determined frequencies
- IF – Bandwidth: 120 kHz
- Measuring time: 100ms
- Turntable angle range: -180 to 180 °
- Turntable stepsize: 45°
- Height variation range: 1 – 4m
- Height variation stepsize: 0,5m
- Polarisation: horizontal + vertical

After this step the EMI test system has determined the following values for each frequency (of step 1):

- Frequency
- Azimuth value (of turntable)
- Antenna height

The last two values have now the following accuracy:

- Azimuth value (of turntable): 45°
- Antenna height: 0,5m

Step 3:

In this step the accuracy of the turntable azimuth and antenna height will be improved. This is necessary to find out the maximum value of every frequency.

For each frequency the turntable azimuth and antenna height, which was determined in step 3, will be adjusted.

The turntable azimuth will be slowly varied by +/- 22,5° around this value. During this action the value of emission is continuously measured. The turntable azimuth at the highest emission will be recorded and adjusted. In this position the antenna height is also slowly varied by +/- 25 cm around the antenna height determined in step 3. During this action the value of emission is also continuously measured. The antenna height of the highest emission will also be recorded and adjusted.

Settings for step 3:

- Detector: Peak – Maxhold
- Measured frequencies: in step 1 determined frequencies
- IF – Bandwidth: 120 kHz
- Measuring time: 100ms
- Turntable angle range: -22,5° to + 22,5 ° around the value determined in step 2
- Height variation range: -0,25m to + 0,25m around the value determined in step 2

Step 4:

With the settings determined in step 3, the final measurement will be performed:

EMI receiver settings for step 4:

- Detector: Quasi-Peak(< 1GHz)
- Measured frequencies: in step 1 determined frequencies
- IF – Bandwidth: 120 kHz
- Measuring time: 1s

The following modifications apply to the measurement procedure for the frequency range above 1 GHz:

The measurement distance was reduced to 1m. The results were extrapolated by the extrapolation factor of 20 dB/decade (invers linear-distance for field strength measurements, invers linear-distance squared for the power reference level measurements). Due to the fact that in this frequency range a double ridged wave guided horn antenna (up to 18 GHz) and a horn antenna (18-25 GHz) are used, the steps 2-4 are omitted. Step 1 was performed with one height of the receiving antenna only.

Detector: Peak, Average

RBW = VBW = 1 MHz, above 7 GHz 100 kHz

After the measurement a plot will be generated which contains a diagram with the results of the preliminary scan and a chart with the frequencies and values of the results of the final measurement.

#### 4. 4 .2 Test Limits

FCC Part 15, Subpart C, §15.247 (c)

(2) A radiated emission test applies to harmonic/spurs that fall in the restricted bands as listed in § 15.205(a). The maximum permitted QP (< 1GHz) and average (> 1GHz) field strength is listed in § 15.209(a).

(3)

FCC Part 15, Subpart C, §15.209, Radiated Emission Limits

Frequency Range (MHz):	Class B Limit (dBµV/m)
30 – 88	40,0
88 – 216	43,5
216 – 960	46,0
above 960	54,0

§15.35(b)

..., there is also a limit on the radio frequency emissions, as measured using instrumentation with a peak detector function, corresponding to 20 dB above the maximum permitted average limit....

Used conversion factor: Limit (dBµV/m) = 20 log (Limit (µV/m)/1µV/m)

#### 4. 4 .3 Test Protocol

Temperature: 25 °C

Air Pressure: 1018 hPa

Humidity: 36 %

Op. Mode	Setup	Port	Test Parameter					
op-mode 1	setup 2	enclosure						
Polarisation	Frequency MHz	Corrected Value dBµV/m			Limit QP/AV dBµV/m	Limit Peak dBµV/m	Delta to AV/QP Limit/dB	Delta to Peak Limit dB
		QP	Peak	AV				
Vertical	325,72	39,80			46,00		6,20	
Vertical	4804,00		43,00	31,80	54,00	74,00	22,20	31,00

Remark: No further spurious emission in the range 20 dB below the limit found.

Temperature: 25 °C  
 Air Pressure: 1018 hPa  
 Humidity: 36 %

Op. Mode	Setup	Port	Test Parameter					
op-mode 2	setup 2	enclosure						
Polarisation	Frequency MHz	Corrected Value dBµV/m			Limit QP/AV dBµV/m	Limit Peak dBµV/m	Delta to AV/QP Limit/dB	Delta to Peak Limit dB
		QP	Peak	AV				
Vertical	325,72	39,00			46,00		7,00	
Vertical	4882,00		44,52	33,52	54,00	74,00	20,48	29,48
Vertical	7323,00		46,12	33,94	54,00	74,00	20,06	27,88

Remark: No further spurious emission in the range 20 dB below the limit found.

Temperature: 25 °C  
 Air Pressure: 1018 hPa  
 Humidity: 36 %

Op. Mode	Setup	Port	Test Parameter					
op-mode 3	setup 2	enclosure						
Polarisation	Frequency MHz	Corrected Value dBµV/m			Limit QP/AV dBµV/m	Limit Peak dBµV/m	Delta to AV/QP Limit/dB	Delta to Peak Limit dB
		QP	Peak	AV				
Vertical	325,72	39,80			46,00		6,20	
Vertical	2484,00		50,90	38,10	54,00	74,00	15,90	23,10
Vertical	4960,00		47,60	36,80	54,00	74,00	17,20	26,40
Vertical	7440,00		44,40	32,60	54,00	74,00	21,40	29,60

Remark: No further spurious emission in the range 20 dB below the limit found.

#### 4.4 .4 Test result: Spurious Radiated Emissions

FCC Part 15, Subpart C	Op. Mode	Setup	Port	Result
	op-mode 1	setup 2	enclosure	<b>passed</b>
	op-mode 2	setup 2	enclosure	<b>passed</b>
	op-mode 3	setup 2	enclosure	<b>passed</b>

#### 4.5 Dwell Time

**Standard** FCC Part 15, 10-1-98  
Subpart C

**The test was performed according to:** FCC §15.31 10-1-1998

##### 4.5.1 Test Description

The Equipment Under Test (EUT) was set up in a shielded room to perform the output power measurements.

The reference level of the spectrum analyser was set equal to the output power of the EUT.

The EUT was connected to the spectrum analyzer via a short coax cable (Type: Rosenberger RTK 161, 1m, SMA connectors), with a known loss.

To determine the dwell time, 3 single measurements are necessary. The first plot shows the activity for an complete inquiry/paging on one channel. The second plot shows the repetition rate on one channel, and the third plot shows the duration of the burst used in inquiry/paging.

With this 3 single values the dwell time of the channel can be calculated.

##### 4.5.2 Test Limits

FCC Part 15, Subpart C, §15.247 (g)

The dwell time of the channel shall be less than 400 ms in a 30 s period

##### 4.5.3 Test Protocol

Temperature: 27 °C  
Air Pressure: 1018 hPa  
Humidity: 36 %

Op. Mode	Setup	Port	Test Parameter
op-mode 4	setup 1	temporary antenna connector	

Dwell time ms	Remarks
95,6841	$(3 * 2,5475s / 10ms) * 125,2\mu s = 95,6841ms$

Remark: Please see annex for the measurement plot.



Temperature: 27 °C  
 Air Pressure: 1018 hPa  
 Humidity: 36 %

Op. Mode	Setup	Port	Test Parameter
op-mode 5	setup 1	temporary antenna connector	

Dwell time ms	Remarks
31,92	$(5,0998s/20ms) * 125,2\mu s = 15,213ms$

Remark: Please see annex for the measurement plot.

#### 4.5 .4 Test result: Dwell Time

FCC Part 15, Subpart 1	Op. Mode	Setup	Port	Result
	op-mode 4	setup 1	temporary antenna connector	<b>passed</b>
	op-mode 5	setup 1	temporary antenna connector	<b>passed</b>



## 4. 6 Power Density

**Standard** FCC Part 15, 10-1-98  
Subpart C

**The test was performed according to:** FCC §15.31 10-1-1998

### 4. 6 .1 Test Description

The Equipment Under Test (EUT) was set up in a shielded room to perform the output power measurements

The EUT was connected to spectrum analyzer via a short coax cable (Type: Rosenberger RTK 161, 1m, SMA connectors), with a known loss.

The Analyser settings are according 15.247 (d):

- Detector: Peak-Maxhold
- Span: 2 MHz
- Resolution Bandwidth (RBW): 3 kHz
- Video Bandwidth (VBW): 3 kHz
- Sweep Time: Coupled

The reference level of the spectrum analyser was set equal to the reference level of the EUT.

### 4. 6 .2 Test Limits

FCC Part 15, Subpart C, §15.247 (g)

The power density shall be below 8 dBm measured with a resolution bandwidth of 3 kHz.

### 4. 6 .3 Test Protocol

Temperature: 27 °C

Air Pressure: 1018 hPa

Humidity: 36 %

Op. Mode	Setup	Port	Test Parameter
op-mode 4	setup 1	temporary antenna connector	

Power Density dBm/3 kHz	Remarks
-9,7	Please see annex for the measurement plot.

Remark: none



Temperature: 27 °C  
 Air Pressure: 1022 hPa  
 Humidity: 36 %

Op. Mode	Setup	Port	Test Parameter
op-mode 5	setup 1	temporary antenna connector	

Power Density dBm/3 kHz	Remarks
-11,63	Please see annex for the measurement plot.

Remark: none

#### 4.6 .4 Test result: Power Density

FCC Part 15, Subpart 1	Op. Mode	Setup	Port	Result
	op-mode 4	setup 1	temporary antenna connector	<b>passed</b>
	op-mode 5	setup 1	temporary antenna connector	<b>passed</b>

## 4.7 Channel Separation

**Standard** FCC Part 15, 10-1-98  
Subpart C

**The test was performed according to:** FCC §15.31 10-1-1998

### 4.7.1 Test Description

The Equipment Under Test (EUT) was set up in a shielded room to perform the output power measurements

The EUT was connected to spectrum analyzer via a short coax cable (Type: Rosenberger RTK 161, 1m, SMA connectors), with a known loss.

Analyser settings:

- Detector: Peak-Maxhold
- Span: 10 MHz
- Resolution Bandwidth (RBW): 300 kHz
- Video Bandwidth (VBW): 300 kHz
- Sweep Time: Coupled

The reference level of the spectrum analyser was set equal to the reference level of the EUT.

### 4.7.2 Test Limits

FCC Part 15, Subpart C, § 15.247 (a) (1)

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater.

### 4.7.3 Test Protocol

Temperature: 27 °C  
Air Pressure: 1018 hPa  
Humidity: 36 %

Op. Mode	Setup	Port	Test Parameter
op-mode 6	setup 1	temporary antenna connector	

Channel Separation MHz	Remarks
1	Please see annex for the measurement plot.

Remark: none

### 4.7.4 Test result: Channel Separation

FCC Part 15, Subpart C	Op. Mode	Setup	Port	Result
	op-mode 6	setup 1	temporary antenna connector	<b>passed</b>

## 5. Testequipment

### *EUT Digital Signalling System*

<b>Equipment</b>	<b>Type</b>	<b>Serial No.</b>	<b>Manufacturer</b>
Digital Radio Communication Tester	CMD 55	831050/020	Rohde & Schwarz

### *EMI Test System*

<b>Equipment</b>	<b>Type</b>	<b>Serial No.</b>	<b>Manufacturer</b>
Signal Generator	SMR 20	846834/008	Rohde & Schwarz
EMI Analyzer	ESI 26	830482/004	Rohde & Schwarz
Comparison Noise Emitter	CNE III	99/016	York

### *EMI Radiated Auxiliary Equipment*

<b>Equipment</b>	<b>Type</b>	<b>Serial No.</b>	<b>Manufacturer</b>
Cable "ESI to Horn Antenna"	RTK 081	W18.04+3599/001	Rosenberger
Loop Antenna	HFH2-Z2	829324/006	Rohde & Schwarz
Log.-per. Antenna	HL 562 Ultralog	830547/003	Rohde & Schwarz
Biconical dipole	VUBA 9117	9117108	Schwarzbeck
Double-ridged horn	HF 906	357357/002	Rohde & Schwarz
Cable "ESI to EMI Antenna"	RTK081+Aircell7	W18.01+W38.01a	Huber+Suhner
Double-ridged horn	HF 906	357357/001	Rohde & Schwarz


### *EMI Conducted Auxiliary Equipment*

<b>Equipment</b>	<b>Type</b>	<b>Serial No.</b>	<b>Manufacturer</b>
Two-Line V-Network	ESH 3-Z5	829996/002	Rohde & Schwarz


## Auxiliary Test Equipment

Equipment	Type	Serial No.	Manufacturer
Broadband Resist. Power Divider SMA	1515 / 93459	LN673	Weinschel
Digital Multimeter 02	Voltcraft M-3860M	IJ095955	Conrad
Digital Multimeter 01	Voltcraft M-3860M	IJ096055	Conrad
Digital Oscilloscope	TDS 784C	B021311	Tektronix
Fibre optic link Satellite	FO RS232 Link	181-018	Pontis
Notch Filter ultra stable	WRCA800/960-6EE	24	Wainwright
Broadband Resist. Power Divider N	1506A / 93459	LM390	Weinschel
I/Q Modulation Generator	AMIQ-B1	832085/018	Rohde & Schwarz
Temperature Chamber	VT 4002	58566002150010	Vötsch
Temperature Chamber	S-1.2C-B	393/25-1389-27RF	Thermotron
ThermoHygro_01	430202		Fischer
Signal Generator	SMIQ 03B	832492/061	Rohde & Schwarz
Temperature Chamber	KWP 120/70	59226012190010	Weiss
Fibre optic link Transceiver	FO RS232 Link	182-018	Pontis

## 6. Foto Report

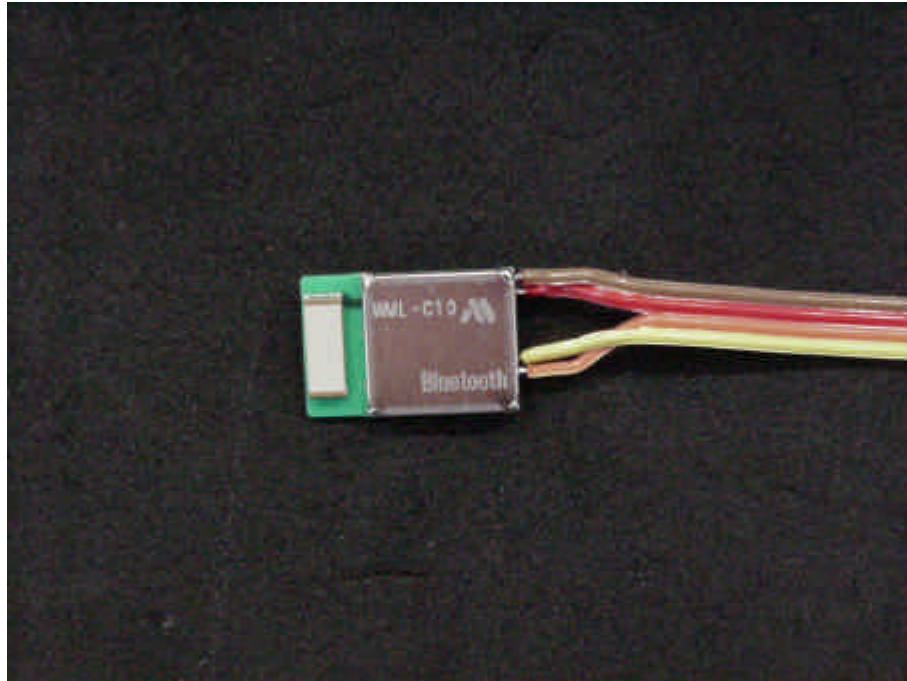


Picture 1 : EUT (for radiated tests)

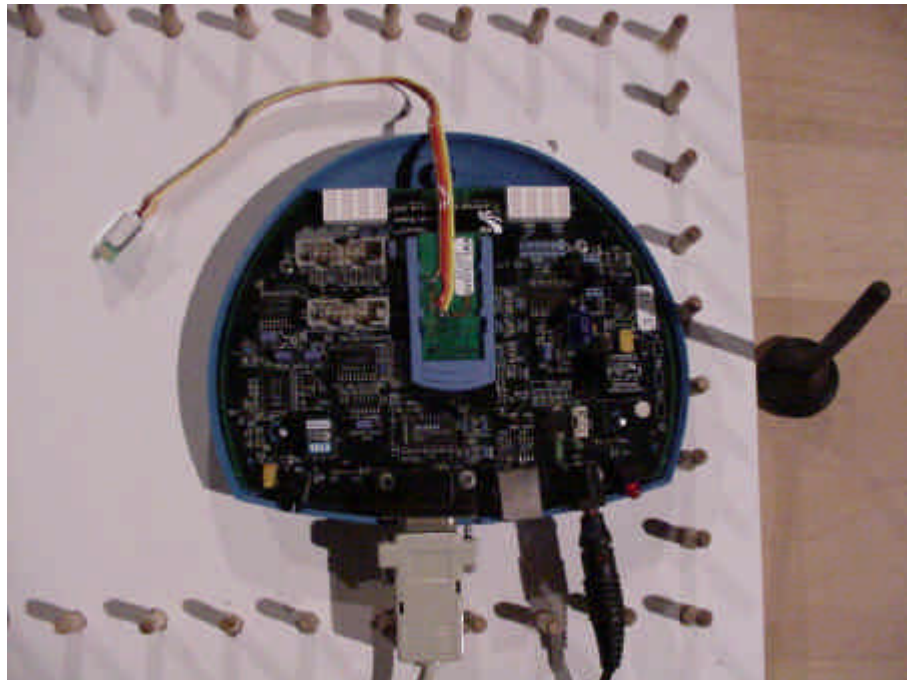


Picture 2 : EUT connected to the CSR development board




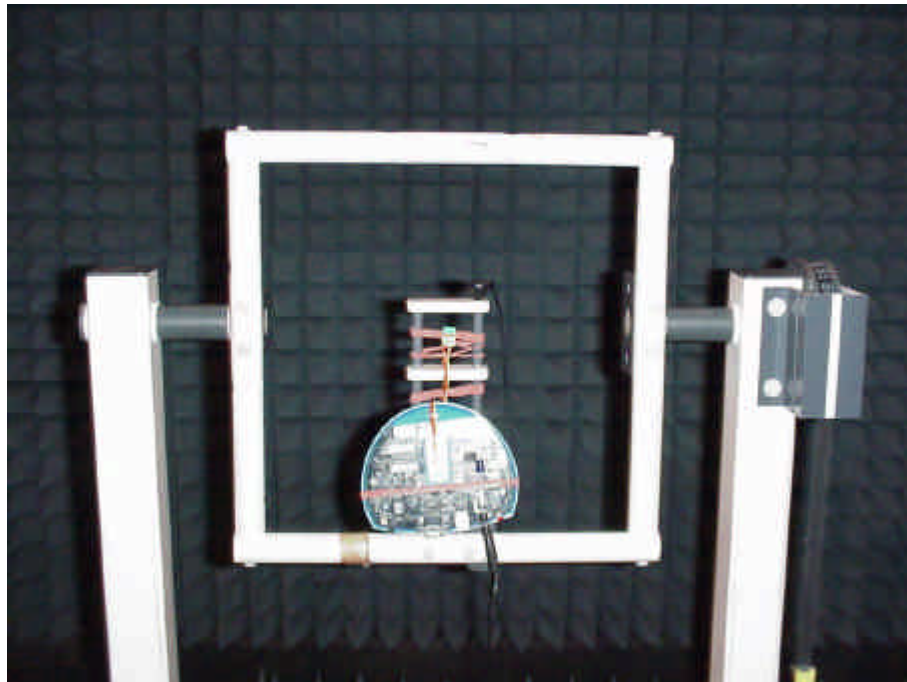

Picture 3 : Setup for radiated measurements

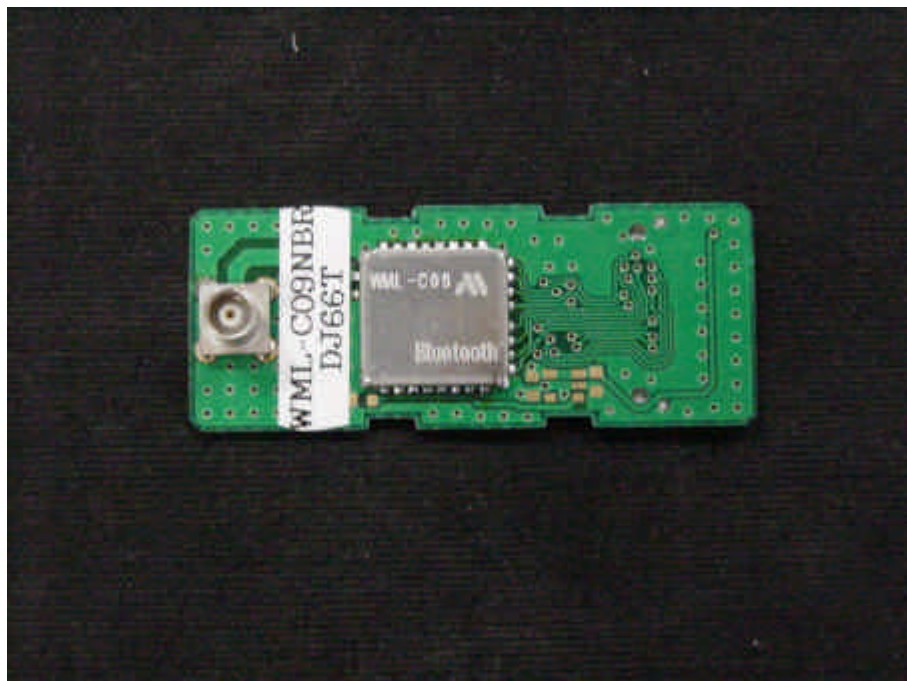

Picture 4 : EUT for conducted tests

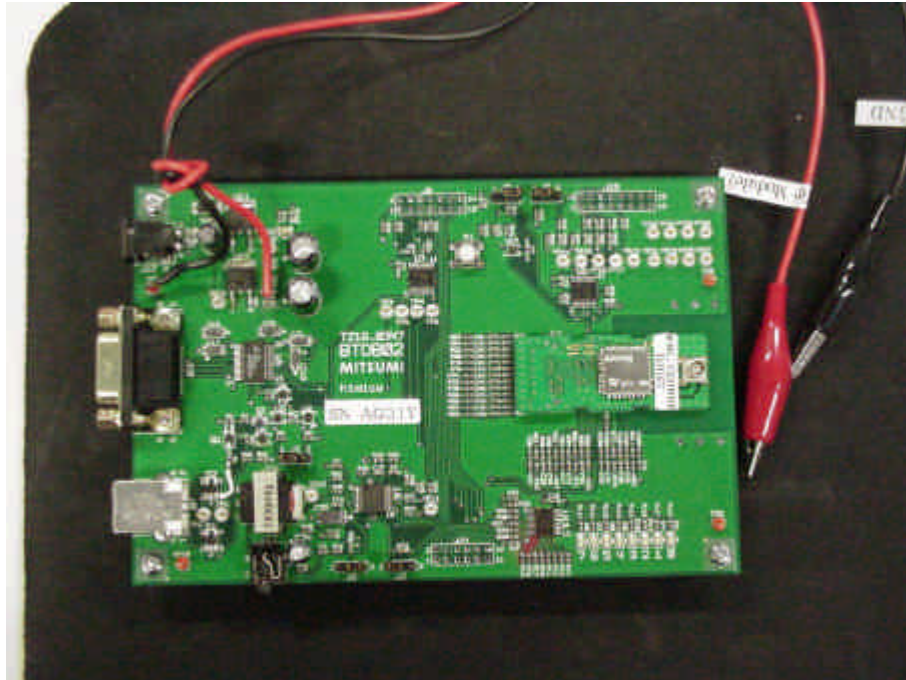


**Picture 5 : EUT for conducted tests in the Mitsumi control board**



## 7. Setup Drawings



**Drawing 1** : Setup for radiated measurements

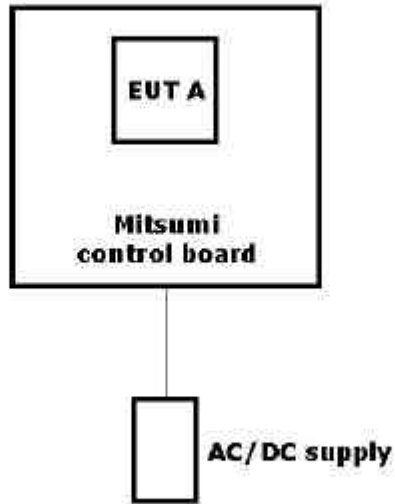


**Drawing 2 : Setup for conducted measurements**

## 8. Annex

### Measurement plots

#### Occupied Bandwidth

**Op. Mode**    **Setup**            **Port**  
 op-mode 1    setup 1            temporary  
    antenna  
    connector

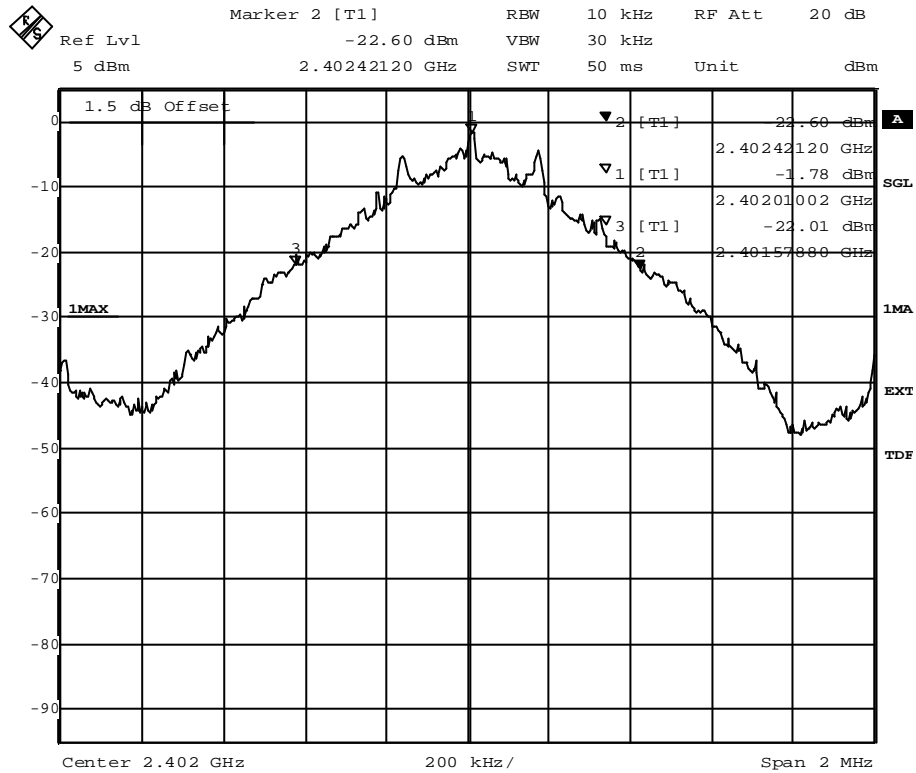


Title: 20dB Bandwidth  
 Comment A: CH B: 2402 MHz; 20dB bandwidth (kHz):842.4  
 Date: 20.MAY.2002 12:57:39

#### 20 dB bandwidth



**Op. Mode**    **Setup**        **Port**  
 op-mode 2    setup 1        temporary  
    antenna  
    connector

Marker 2 [T1]                      RBW    10 kHz    RF Att    20 dB  
 Ref Lvl                                -21.92 dBm    VBW    30 kHz  
 5 dBm                                 2.44141320 GHz    SWT    50 ms    Unit        dBm

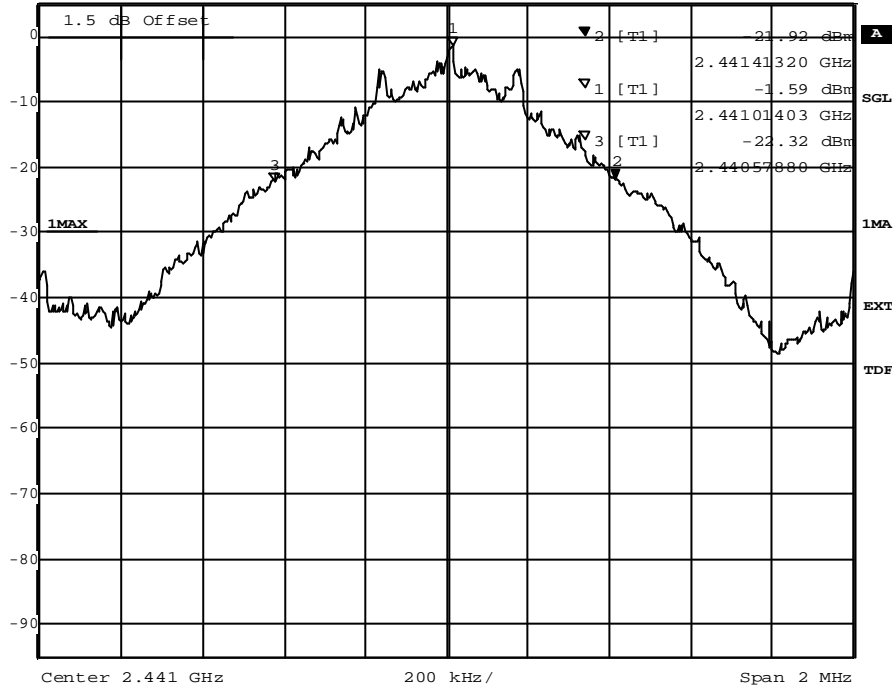


Title:                      20dB Bandwidth  
 Comment A:    CH M: 2441 MHz; 20dB bandwidth (kHz):834.4  
 Date:                      20.MAY.2002 13:16:34

**20 dB bandwidth**



**Op. Mode**    **Setup**        **Port**  
 op-mode 3    setup 1        temporary  
    antenna  
    connector

Marker 2 [T1]                      RBW    10 kHz    RF Att    20 dB  
 Ref Lvl                                -22.25 dBm    VBW    30 kHz  
 5 dBm                                 2.48042120 GHz    SWT    50 ms    Unit        dBm

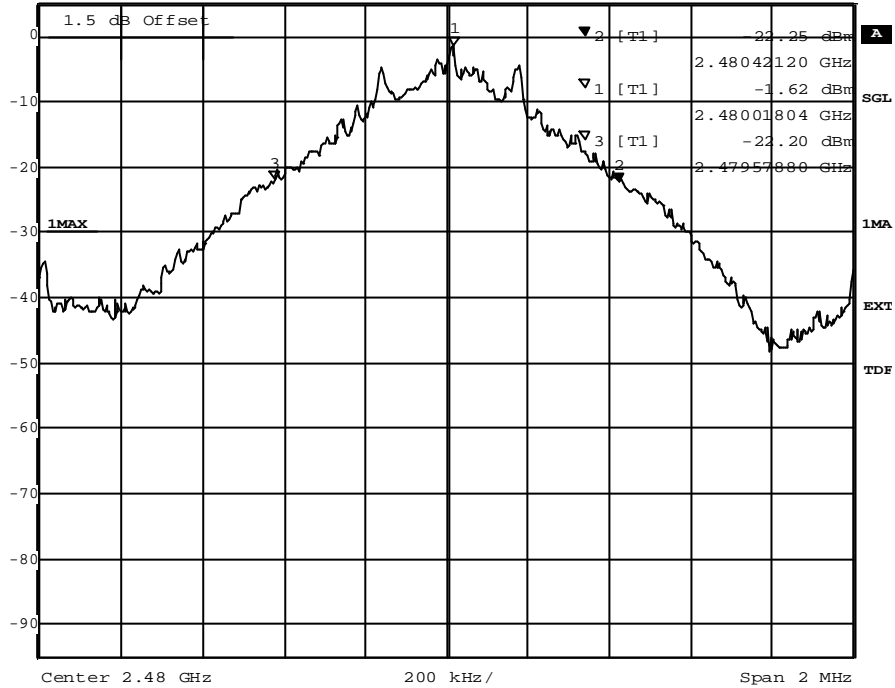

Title:                      20dB Bandwidth  
 Comment A:    CH T: 2480 MHz; 20dB bandwidth (kHz):842.4  
 Date:                      20.MAY.2002 12:37:44

**20 dB bandwidth**




**Op. Mode**    **Setup**    **Port**  
op-mode 4    setup 1    temporary  
   antenna  
   connector



13.Jun 02 21:33  
Ref 35.5 dBm

\*Att 40 dB

\*RBW 10 kHz    Delta 3 [T1]  
\*VBW 30 kHz    -19.47 dB  
SWT 20 ms    -324.00000000 kHz

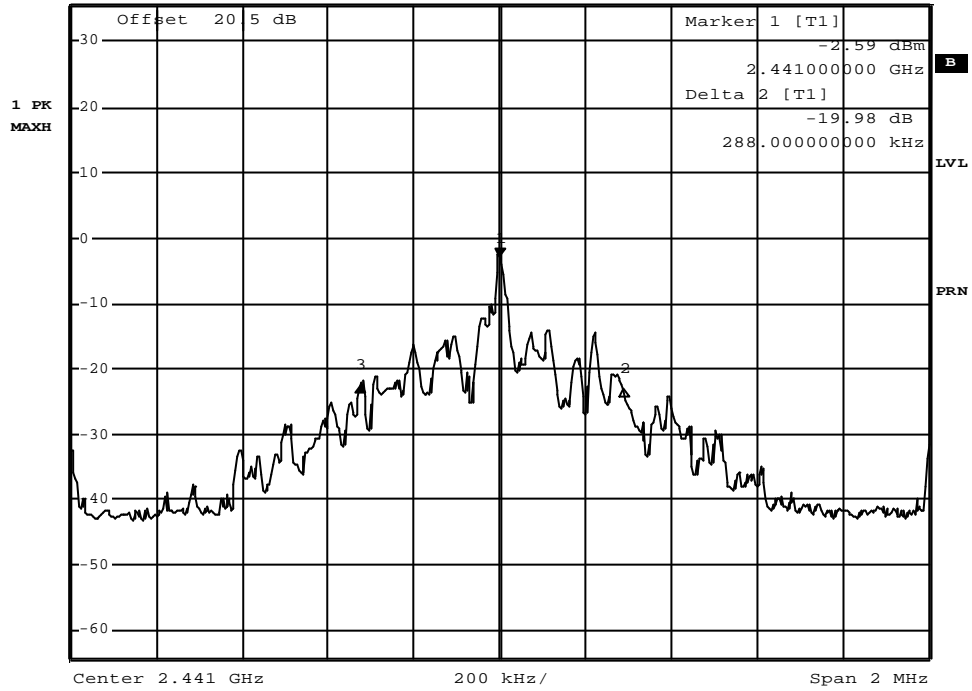

Date: 13.JUN.2002 21:33:50


**20 dB bandwidth**



**Op. Mode**    **Setup**    **Port**  
 op-mode 5    setup 1    temporary  
    antenna  
    connector



15.Jun 02 16:13    \*RBW 10 kHz    Delta 3 [T1]  
 Ref 35.5 dBm    \*Att 40 dB    \*VBW 30 kHz    -19.04 dB  
    SWT 20 ms    -380.00000000 kHz

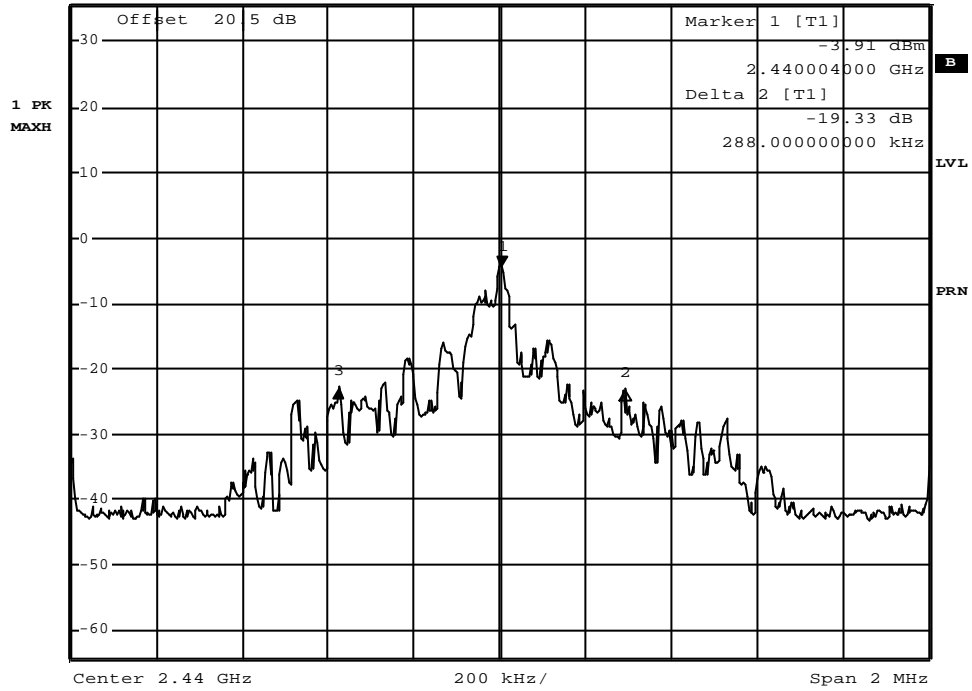


Date: 15.JUN.2002 16:13:52

20 dB bandwidth



### Peak Power Output

**Op. Mode**    **Setup**            **Port**  
op-mode 1    setup 1            temporary  
   antenna  
   connector

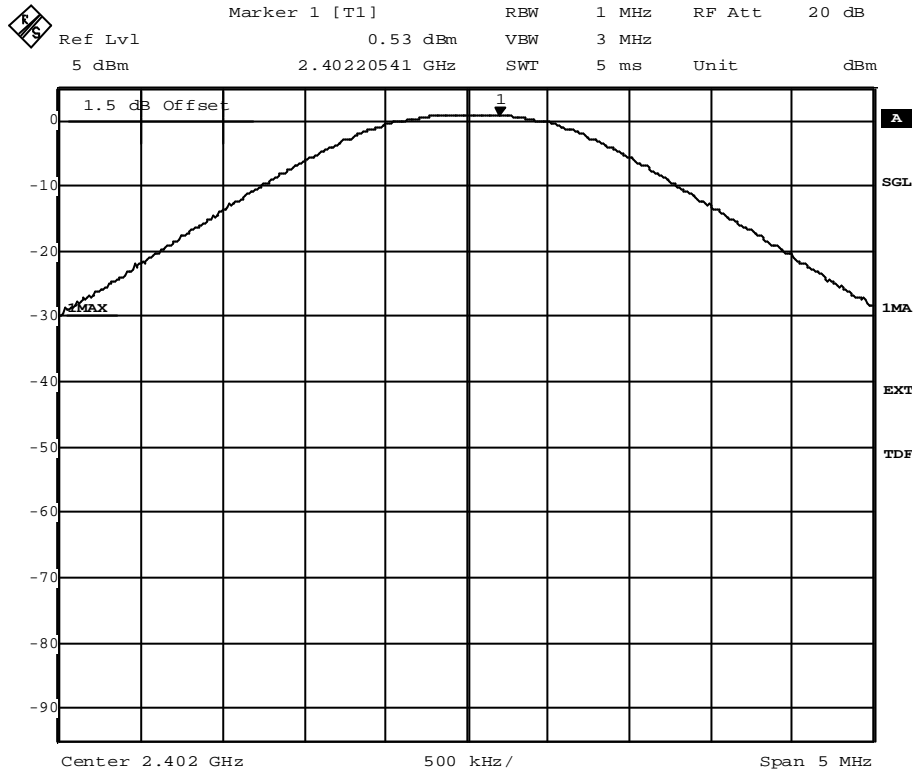


Title:      Peak outputpower Power  
Comment A:    CH B: 2402 MHz  
Date:      20.MAY.2002 12:58:07

**peak output power**





**Op. Mode**    **Setup**        **Port**  
op-mode 2    setup 1        temporary  
   antenna  
   connector

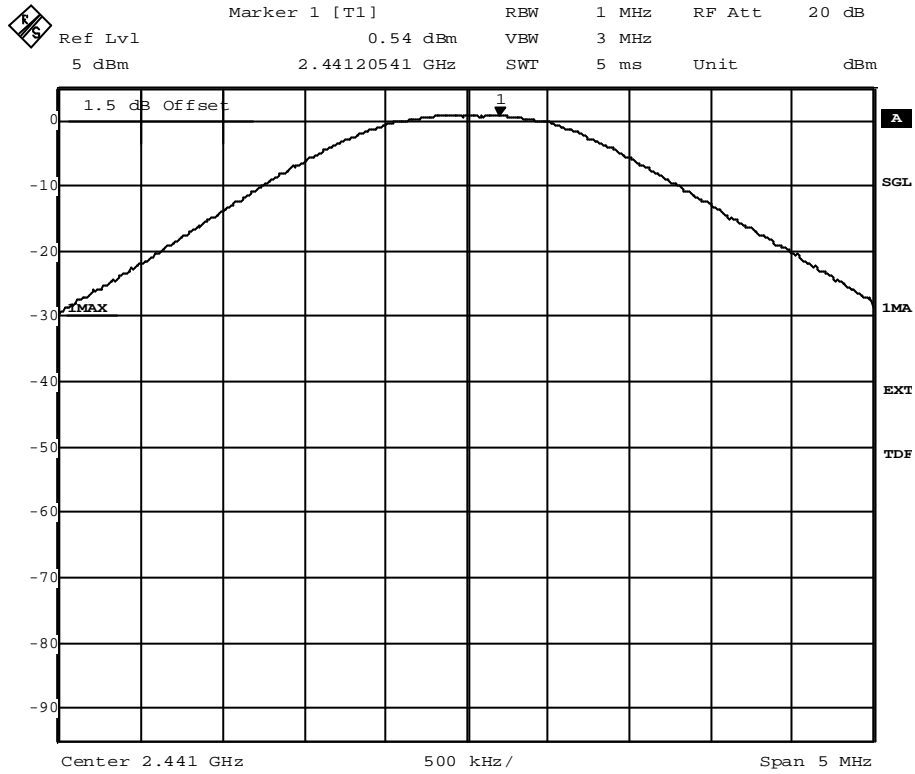


Title:            Peak outputpower Power  
Comment A:    CH M: 2441 MHz  
Date:           20.MAY.2002 13:17:01

**peak output power**



**Op. Mode**    **Setup**            **Port**  
 op-mode 3    setup 1            temporary  
    antenna  
    connector

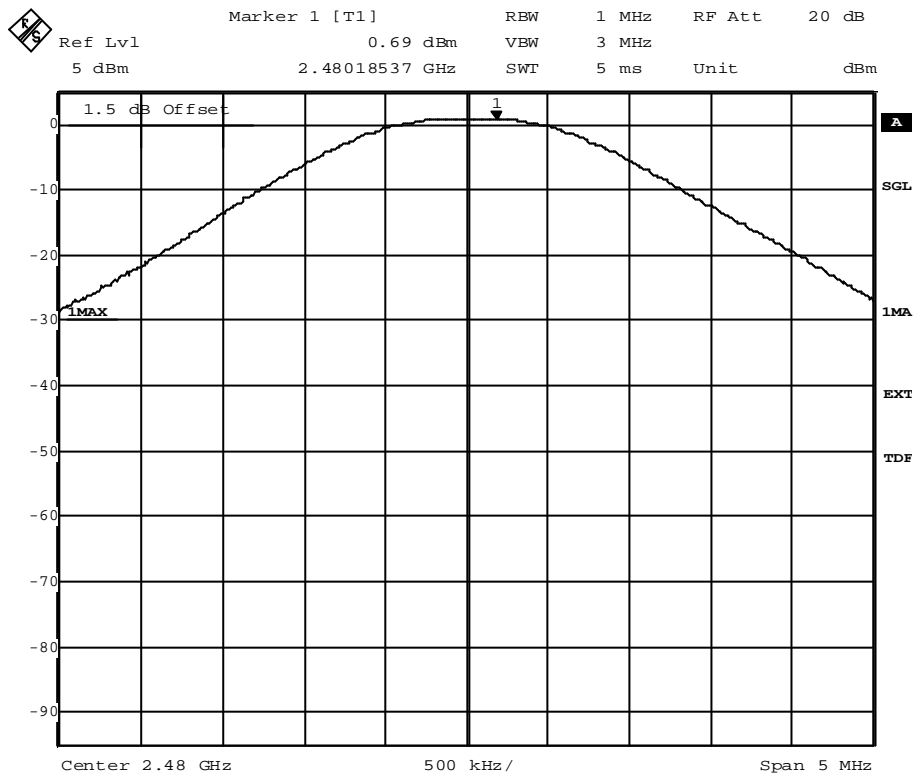


Title:        Peak outputpower Power  
 Comment A:  CH T: 2480 MHz  
 Date:        20.MAY.2002 12:38:10

**peak output power**




**Op. Mode**    **Setup**    **Port**  
op-mode 4    setup 1    temporary  
   antenna  
   connector

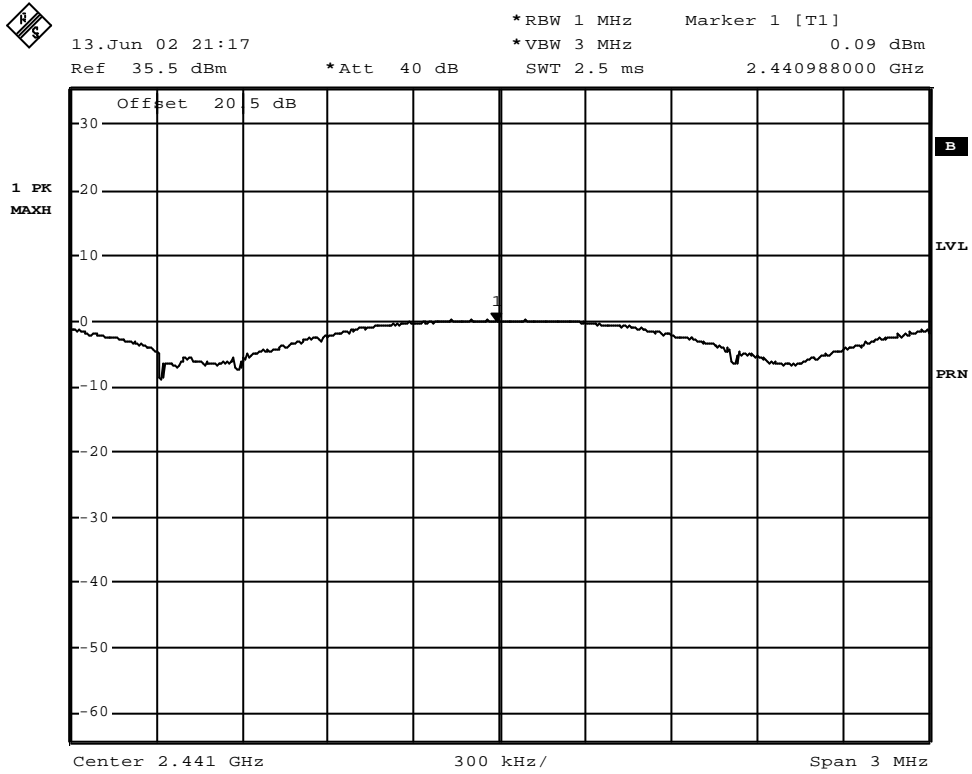

Date: 13.JUN.2002 21:17:46

**peak output power**

**Op. Mode**    **Setup**    **Port**  
 op-mode 5    setup 1    temporary  
    antenna  
    connector

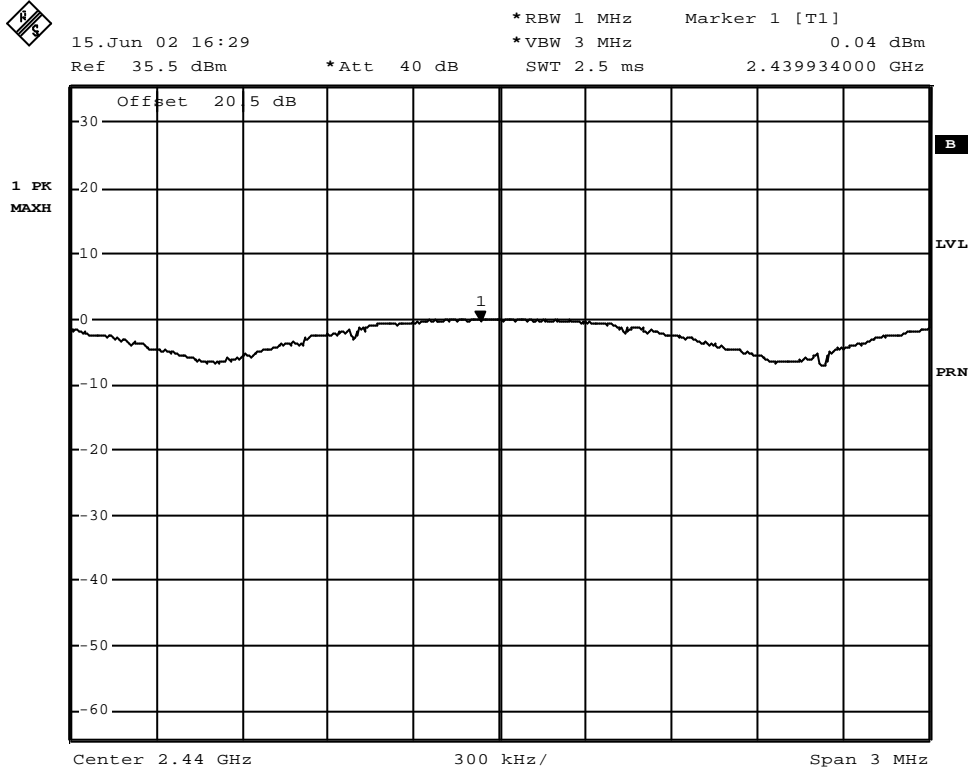


Date: 15.JUN.2002 16:29:13

**peak output power**




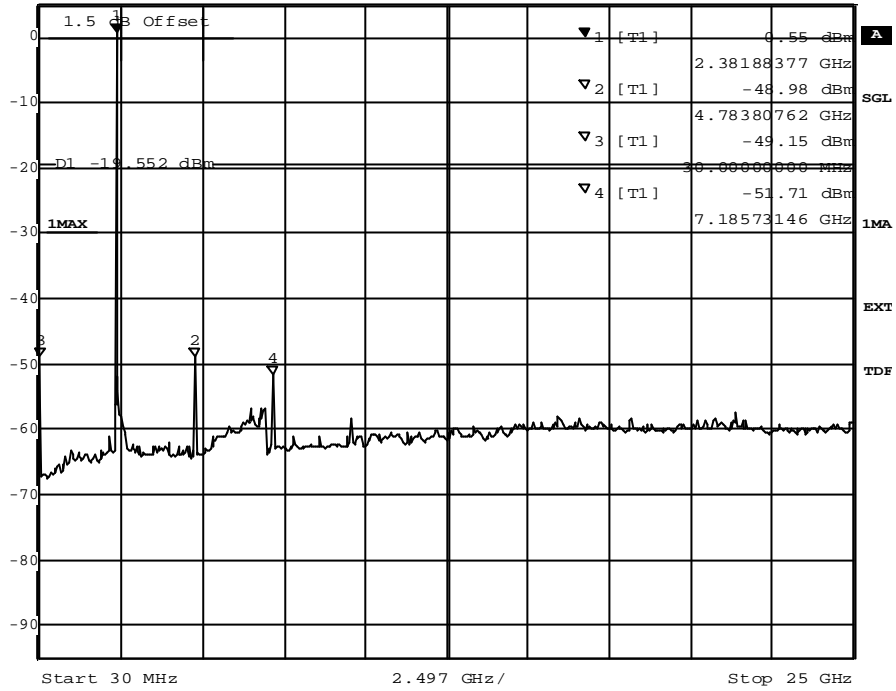
## Spurious RF Conducted Emissions

**Op. Mode**    **Setup**        **Port**  
 op-mode 1    setup 1        temporary  
    antenna  
    connector

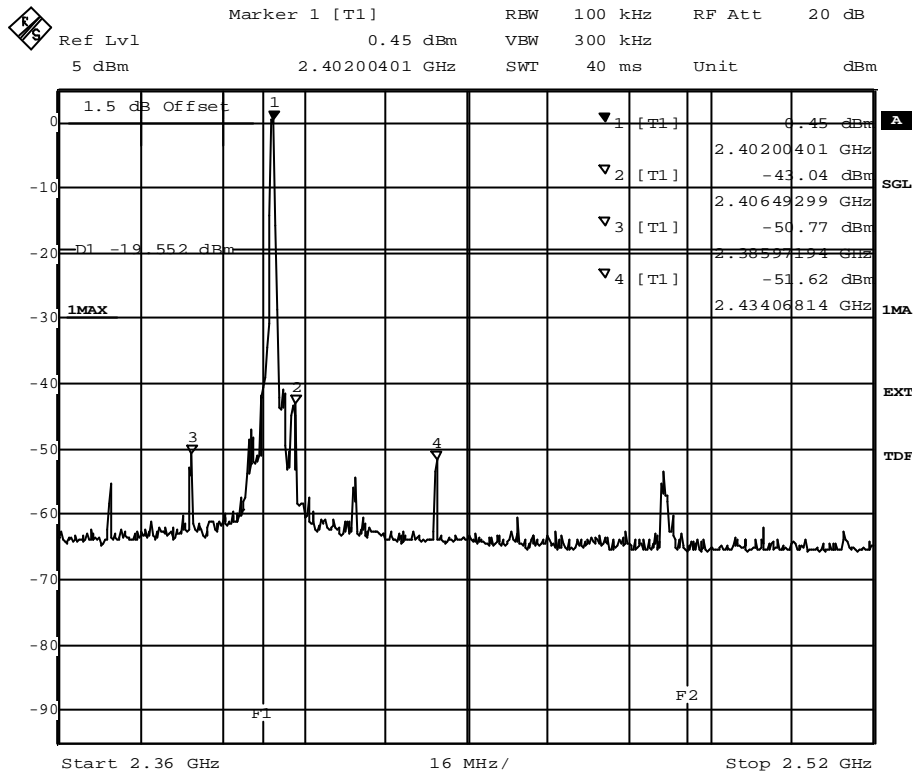

Title:                      Band Edge Compliance  
 Comment A:                CH B: 2402 MHz  
 Date:                        20.MAY.2002 12:42:16


 Marker 1 [T1] RBW 100 kHz RF Att 20 dB  
 Ref Lvl 0.55 dBm VBW 300 kHz  
 5 dBm 2.38188377 GHz SWT 330 s Unit dBm




Title: spurious emissions  
 Comment A: CH B: 2402 MHz  
 Date: 20.MAY.2002 12:53:54




**Op. Mode**    **Setup**        **Port**  
 op-mode 2    setup 1        temporary  
    antenna  
    connector


Marker 1 [T1]                      RBW    100 kHz    RF Att    20 dB  
 Ref Lvl                                0.43 dBm    VBW    300 kHz  
 5 dBm                                 2.44112224 GHz    SWT    40 ms    Unit        dBm

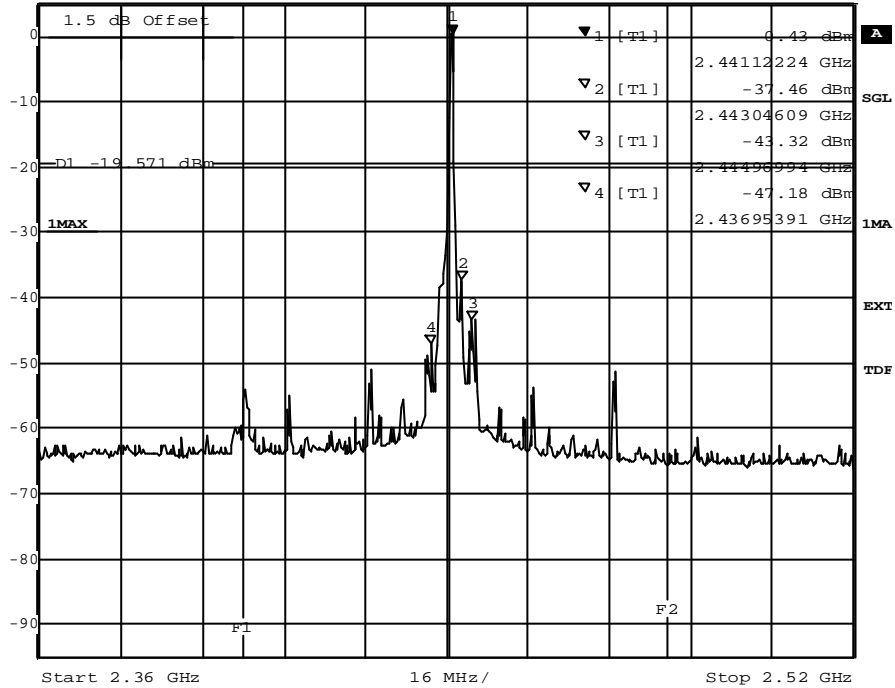

Title:                      Band Edge Compliance  
 Comment A:                CH M: 2441 MHz  
 Date:                        20.MAY.2002 13:01:20

**Band edge compliance**


 Marker 1 [T1] RBW 100 kHz RF Att 20 dB  
 Ref Lvl 0.65 dBm VBW 300 kHz  
 5 dBm 2.43192385 GHz SWT 330 s Unit dBm

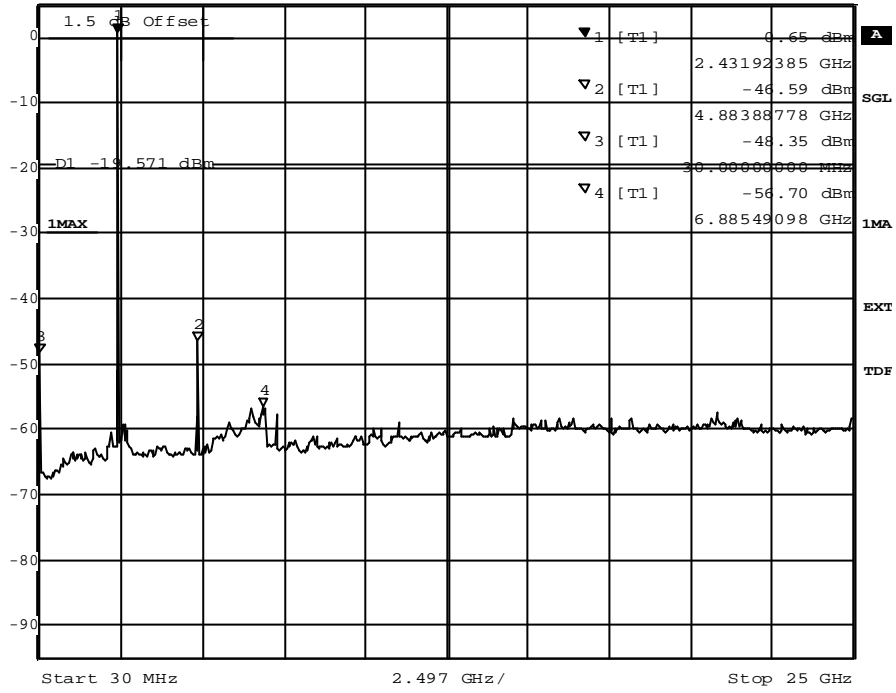

Title: spurious emissions  
 Comment A: CH M: 2441 MHz  
 Date: 20.MAY.2002 13:12:57


**Spurious emissions**






**Op. Mode**    **Setup**        **Port**  
 op-mode 3    setup 1        temporary  
    antenna  
    connector


Marker 1 [T1]                      RBW    100 kHz    RF Att    20 dB  
 Ref Lvl                                0.65 dBm    VBW    300 kHz  
 5 dBm                                 2.48024048 GHz    SWT    40 ms    Unit        dBm

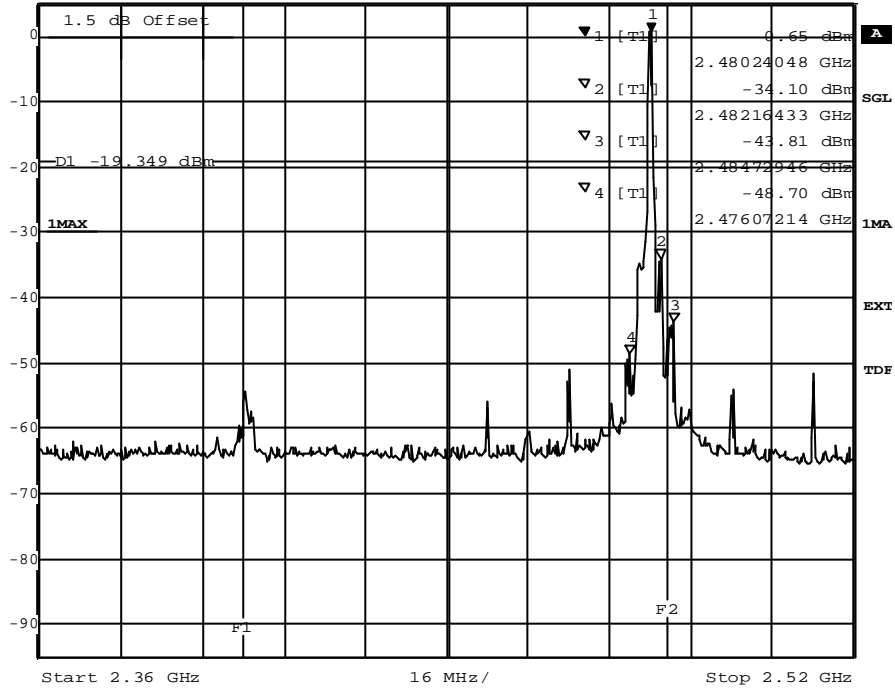

Title:                      Band Edge Compliance  
 Comment A:                CH T: 2480 MHz  
 Date:                        20.MAY.2002 12:22:21

**Band edge compliance**

 Marker 1 [T1] RBW 100 kHz RF Att 20 dB  
 Ref Lvl 0.63 dBm VBW 300 kHz  
 5 dBm 2.48196393 GHz SWT 330 s Unit dBm

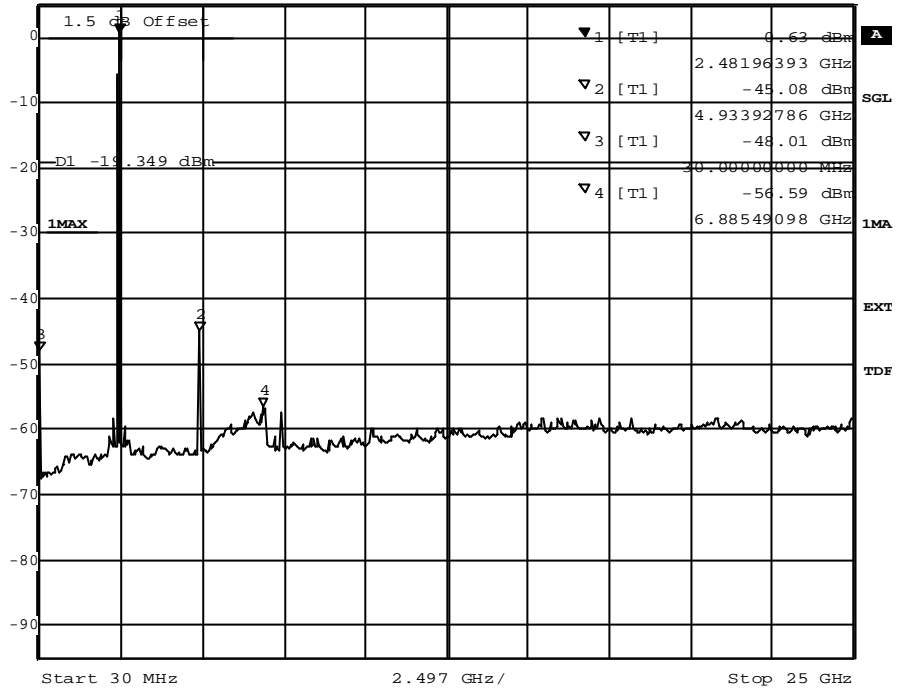


Title: spurious emissions  
 Comment A: CH T: 2480 MHz  
 Date: 20.MAY.2002 12:33:59

**Spurious emissions**

## Dwell Time

**Op. Mode**   **Setup**      **Port**  
op-mode 4    setup 1      temporary  
   antenna  
   connector

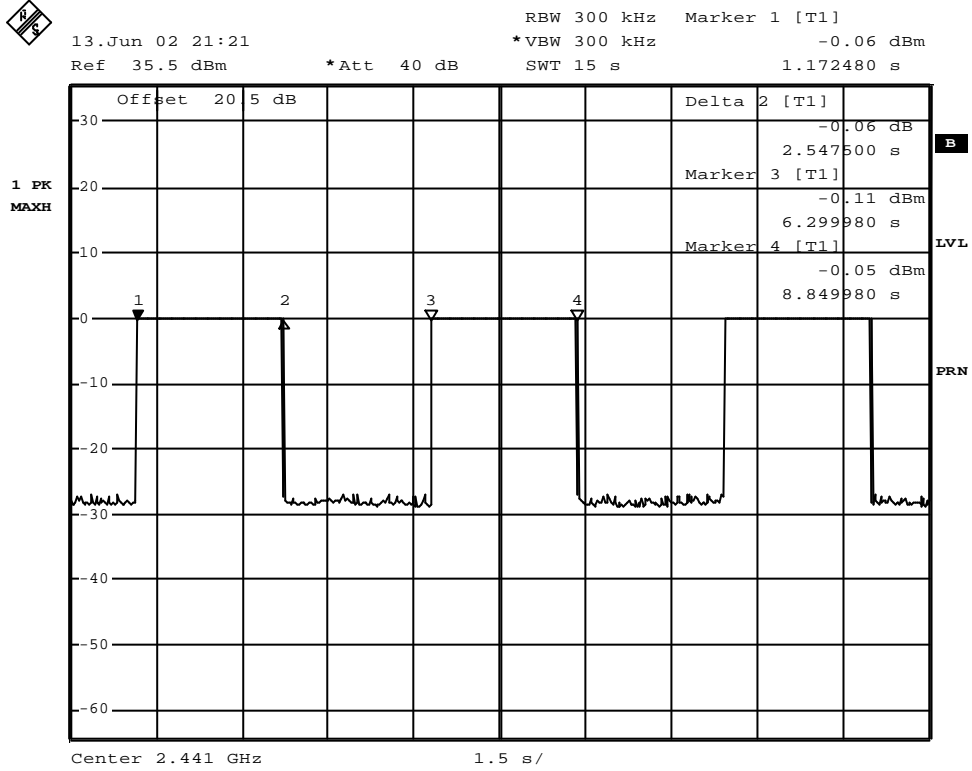

Date: 13.JUN.2002 21:21:32


**Dwell time**



13.Jun 02 21:24  
Ref 35.5 dBm

\*Att 40 dB

RBW 300 kHz Delta 3 [T1]  
\*VBW 300 kHz 0.01 dB  
SWT 100 ms -10.000000 ms

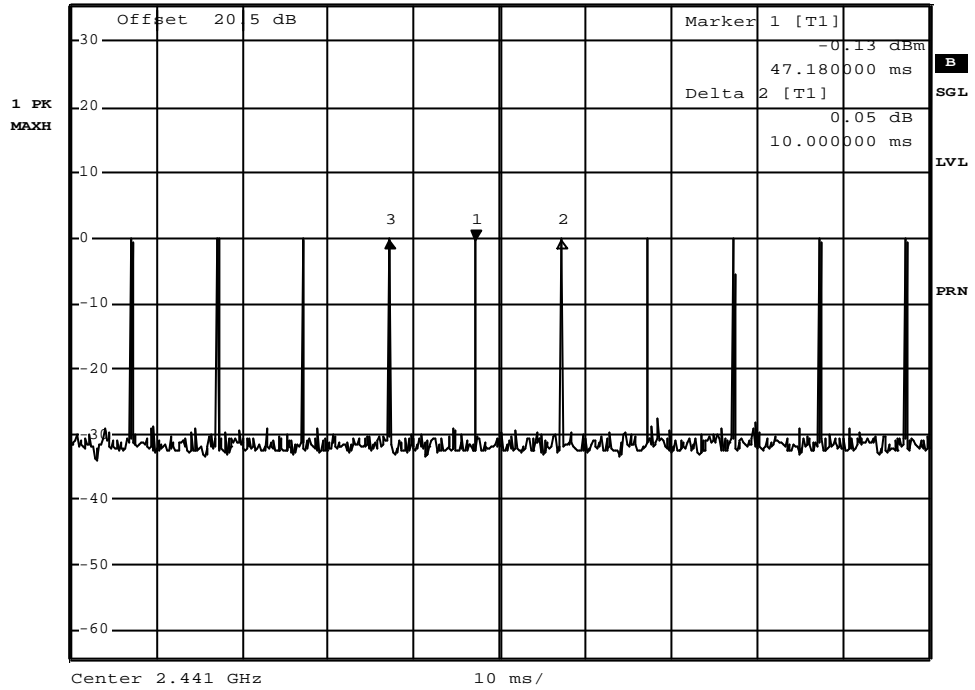

Date: 13.JUN.2002 21:24:49


**Dwell time**



13.Jun 02 21:25  
 Ref 35.5 dBm

\*Att 40 dB

RBW 300 kHz Delta 2 [T1]  
 \*VBW 300 kHz -0.06 dB  
 SWT 200  $\mu$ s 125.200000  $\mu$ s

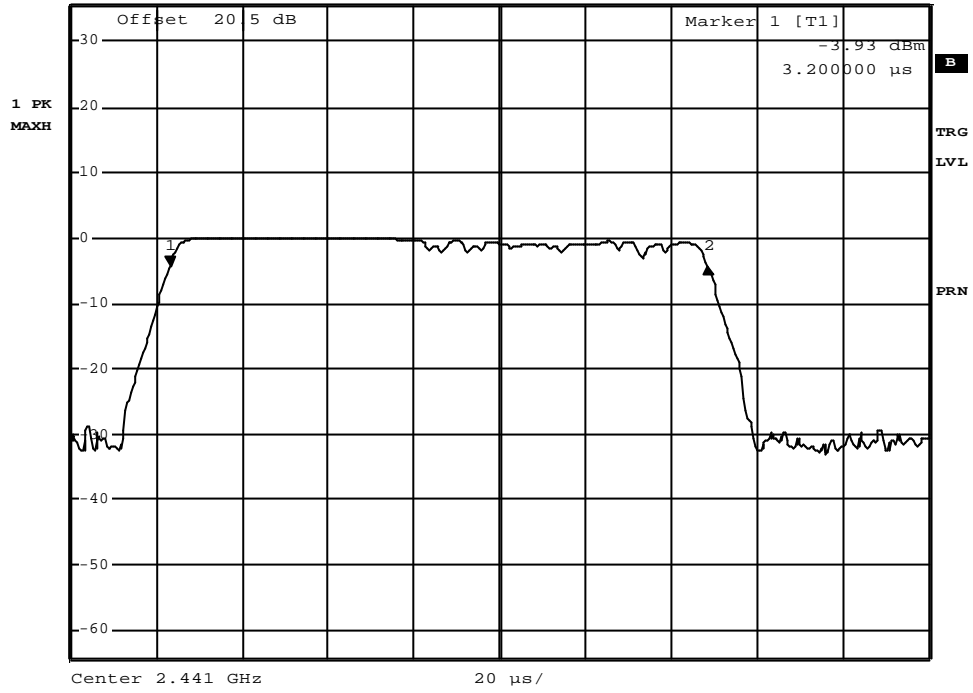

Date: 13.JUN.2002 21:25:53

**Dwell time**




**Op. Mode**    **Setup**    **Port**  
op-mode 5    setup 1    temporary  
   antenna  
   connector



15.Jun 02 16:22  
Ref 35.5 dBm

\*Att 40 dB

RBW 300 kHz    Delta 2 [T1]  
\*VBW 300 kHz    -0.09 dB  
SWT 15 s    5.099800 s

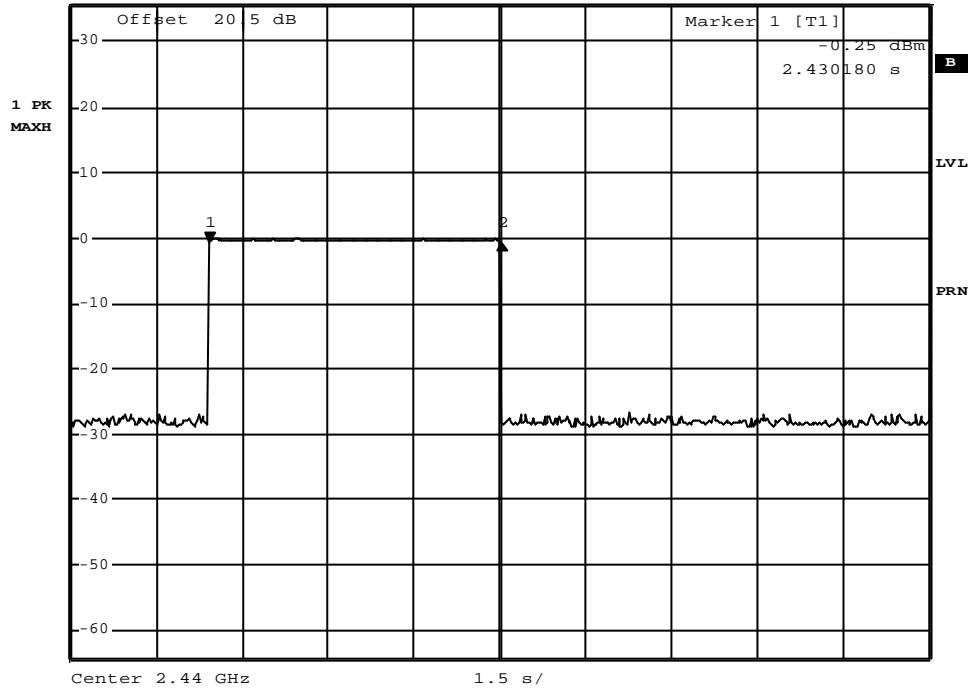


Date: 15.JUN.2002 16:22:55

**Dwell time**



15.Jun 02 16:24 RBW 300 kHz Delta 3 [T1]  
 Ref 35.5 dBm \*Att 40 dB \*VBW 300 kHz 0.10 dB  
 SWT 100 ms -20.000000 ms

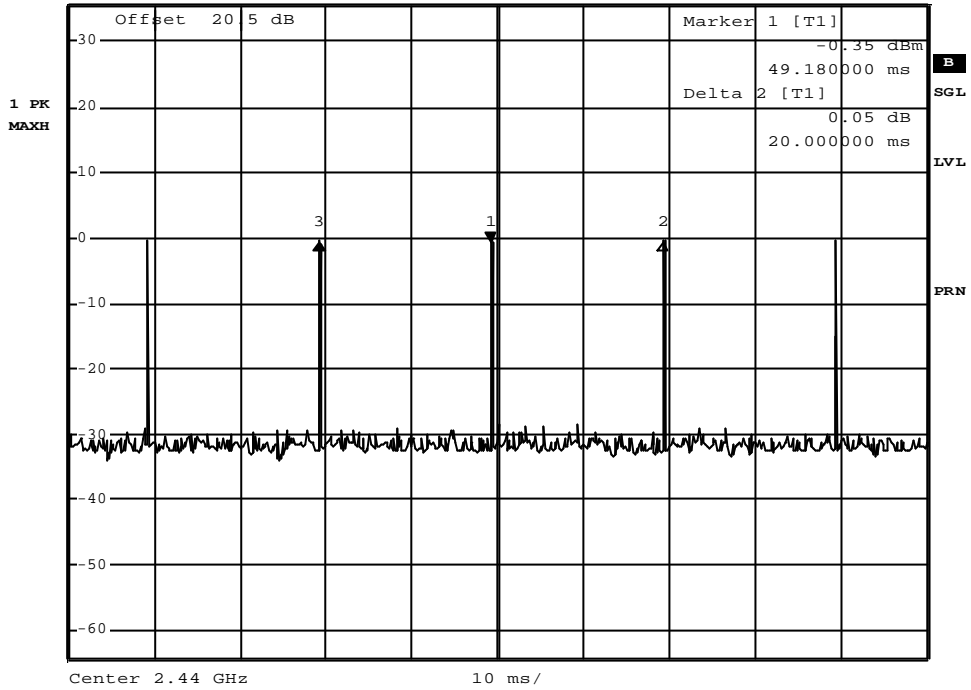


Date: 15.JUN.2002 16:24:06

**Dwell time**



15.Jun 02 16:25 RBW 300 kHz Delta 2 [T1]  
 Ref 35.5 dBm \*Att 40 dB \*VBW 300 kHz 0.12 dB  
 SWT 200  $\mu$ s 125.200000  $\mu$ s

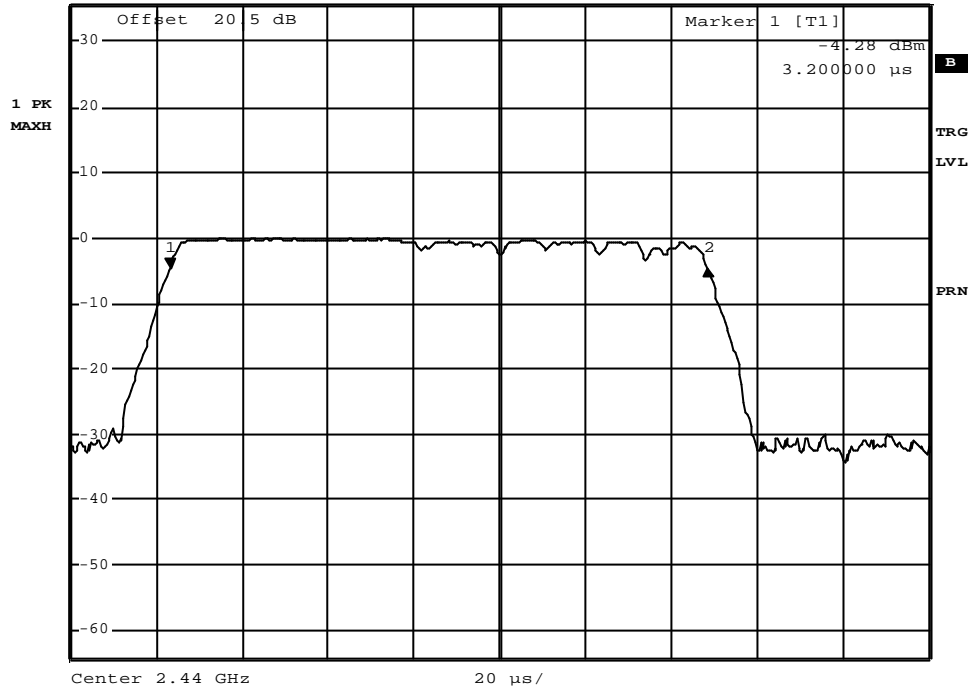

Date: 15.JUN.2002 16:25:23


**Dwell time**





### Power Density

**Op. Mode**    **Setup**        **Port**  
op-mode 4    setup 1        temporary  
   antenna  
   connector

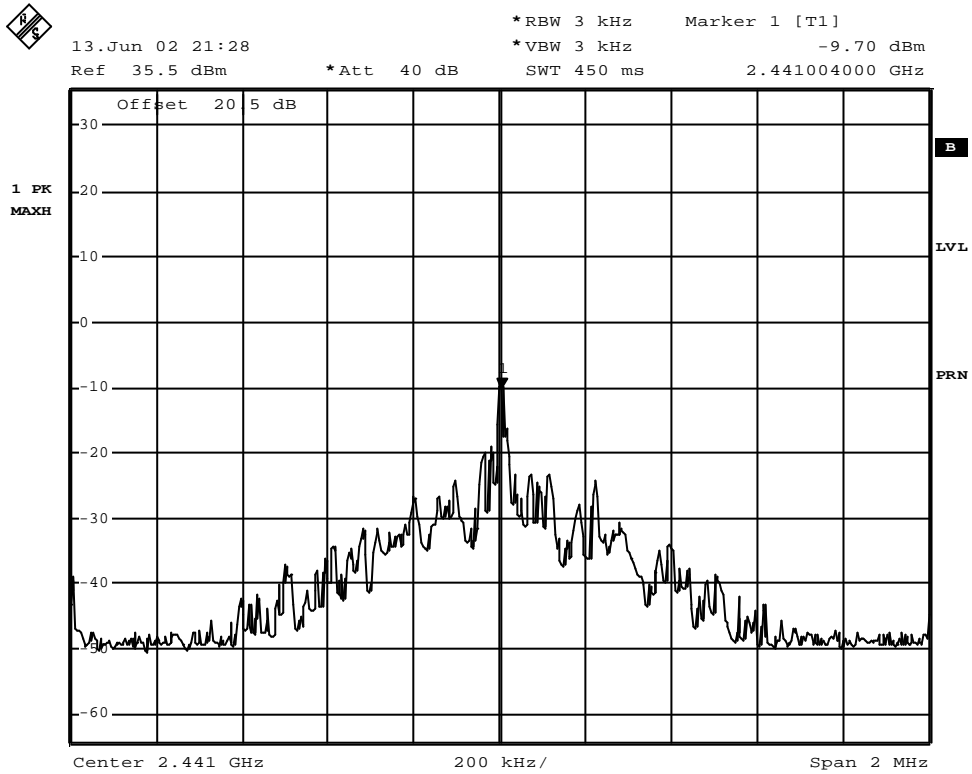

Date: 13.JUN.2002 21:28:31

power density




**Op. Mode**    **Setup**    **Port**  
op-mode 5    setup 1    temporary  
   antenna  
   connector



15.Jun 02 16:17  
Ref 35.5 dBm

\*Att 40 dB

\*RBW 3 kHz    Marker 1 [T1]  
\*VBW 3 kHz    -11.63 dBm  
SWT 450 ms    2.440008000 GHz

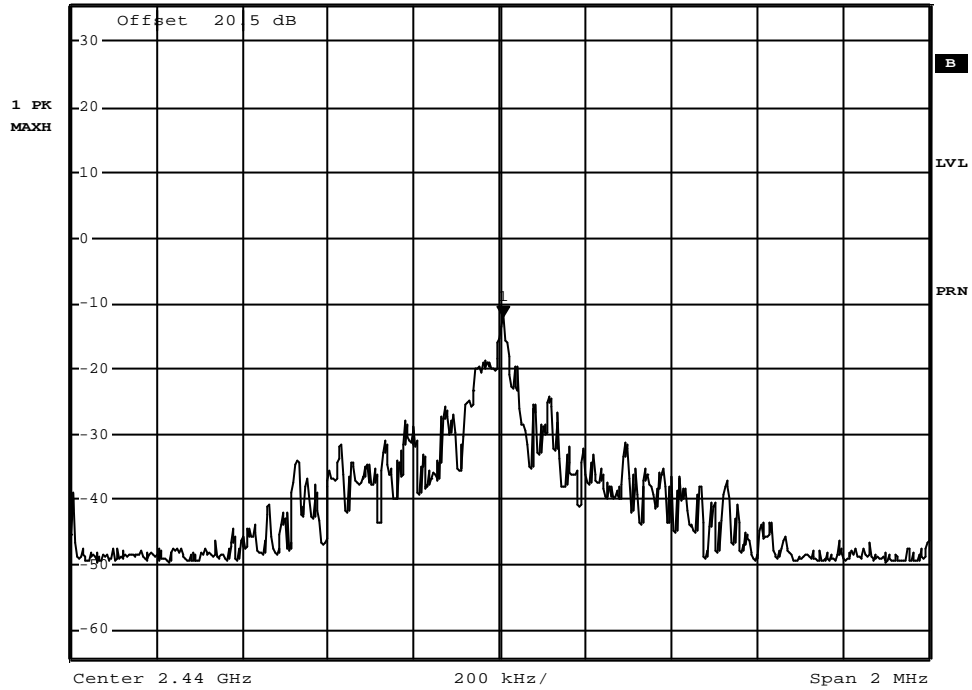

Date:    15.JUN.2002    16:17:43

**power density**

