

**FCC ID: ESD-SA806866R8**

**Exhibit 2**

**Engineering Reports**  
**b)Radiated Spurious Emissions (2.1053)**



# Assessment of Compliance

for

Field Strength of Spurious Radiation in accordance with the  
FCC Rules & Regulations Part 2.1053 and 90

Rugged handheld computer with  
integrated wireless communications

Sidearm ALL-Terrain Handheld PCä

Melard Technologies, Inc.



October 2000

MELB-RIM CDPD Ardis-3603

51 Spectrum Way Nepean ON K2R 1E6  
Tel: (613) 820-2730 Fax: (613) 820-4161  
email: [info@aprel.com](mailto:info@aprel.com)

## Engineering Report

**Subject:** Measurement of Field Strength of Spurious  
Radiation in accordance with the  
FCC Rules & Regulations Part 2.1053 and 90

**FCC ID:** ESD-SA806866R8

**Equipment:** Rugged handheld computer with integrated wireless  
communications

**Model:** Sidearm ALL-Terrain Handheld PC™

**Client:** Melard Technologies Inc.  
28 Kaysal Court  
Armonk, NY 10504  
USA

**Project #:** MELB-Ardis Sidearm - 3603

**Prepared By:** APREL Laboratories,  
Regulatory Compliance Division

**Approved by:**

*Jay Sarkar*

**Date:**

*Jan 29, 2007*

**Jay Sarkar:** Technical Director, Standards & Certification

**Submitted by:**

*Jay Sarkar*

**Date:**

*Jan 29, 2007*

**Jay Sarkar:** Technical Director, Standards & Certification

**Released by:**

*Dr. Jack J. Wojcik*

**Date:**

*Jan 29/07*

**Dr. Jack J. Wojcik, P.Eng.**

"SOLUTIONS FOR THE WIRELESS FUTURE"

**FCC ID:** ESD-SA806866R8  
**Applicant:** Melard Technologies Inc.  
**Equipment:** Rugged handheld computer with integrated wireless communication  
**Model:** Sidearm ALL-Terrain Handheld PC™  
**Standard:** FCC Rules and Regulations Part 2.1053 and 90

## ENGINEERING SUMMARY

This report contains the results of Field Strength of Spurious Radiation measurement performed on a MELARD Rugged handheld computer with integrated wireless communication operating with a built-in Research in Motion ARDIS radio transmitter. The measurements were carried out in accordance with the FCC Rules and Regulations Part 2.1053 and 90. The product was evaluated for spurious when it was set at the maximum power level.

(The results presented in this report relate only to the sample tested.)

## Summary of the Results

Test Description	Page No.	Test Set-up Figure No.	Results Summary
Field Strength of Spurious Radiation Ref. Paragraph 2.1053 and 90	8	1	<b>Passed</b>

## INTRODUCTION

### General

This report describes the results of the Field Strength of Spurious Radiation measurement conducted on a Melard Rugged handheld Computer with integrated wireless communications model Sidearm ALL-Terrain Handheld PC™ operating with a built-in Research in Motion ARDIS radio transmitter, .

### Test Facility

The tests were performed for Melard Technologies Inc. by APREL Laboratories at APREL's EMI facility located in Nepean, Ontario, Canada. The laboratory operates an (3m and 10m) Open Area Test Site (OATS). The measurement facility is calibrated in accordance with ANSI C63.4-1992.

A description of the measurement facility in accordance with the radiated and AC line conducted test site criteria per ANSI C63.4-1992 is on file with the Federal Communications Commission and is in compliance with the requirements of Section 2.948 of the Commissions rules and regulations.

***APREL's registration number is 90416***

APREL is accredited by Standard Council of Canada. APREL is also accredited by Industry Canada and recognised by the Federal Communications Commissions (FCC).

### Standard

The evaluation and analysis were conducted in accordance with FCC Rules and Regulations Parts 2.1053 and the appropriate limits (90).

### Test Equipment

The test equipment used during the evaluation is listed in Appendix A with calibration due dates.

### Environmental Conditions

Measurements were conducted in open area test site.

- Temperature: 24 °C ± 2
- Relative Humidity: 30 - 50 %
- Air Pressure: 101 kPa ± 3

## FCC SUBMISSION INFORMATION

**FCC ID:** **ESD-SA806866R8**

**Equipment:** Rugged handheld computer with integrated wireless communication

**Model:** Sidearm ALL-Terrain Handheld PC™

**For:** Certification

**Applicant:** **Melard Technologies Inc.**  
28 Kaysal Court  
Armonk, NY 10504  
U.S.A.

**Manufacturer:** **Melard Technologies Inc.**  
28 Kaysal Court  
Armonk, NY 10504  
U.S.A.

**Evaluated by:** **APREL Laboratories**  
51 Spectrum Way  
Nepean, Ontario  
Canada K2R 1E6

**Test:** Field Strength of Spurious Radiation

**Ref:** FCC Parts 2.1046 and 90.210

**Criteria:** Emission **Mask G:**

The permitted maximum level of spurious emission is  $43 + 10 \log (P)$  dB below the unmodulated carrier power of the transmitter (P). This was calculated to be 84.6 dB $\mu$ V/m at 3 meters.

**Set-up:** See Figure 1.a

**Conditions:** Voltage Supply: 7.4/8.4 DC Battery

**Equipment:** See Appendix A.

**Procedure:** The final measurements were taken at APREL Laboratory's open area test site (OATS) measurement facility. This open area test site is calibrated to ANSI C63.4 document and a description of the measurement facility is on file with the Federal Communications Commission and is in compliance with the requirements of Section 2.948 of the Commissions rules and regulations. (FCC Registration No.:90416).

The **DUI** was configured to operate at maximum power with appropriate modulation. Special software was employed in order that the transmitter was processing data in a normal manner.

Prior to final measurement in the OATS, preliminary radiated spurious emissions were scanned in a shielded enclosure at a distance of 1 m using biconical, log-periodic and horn antennas in order to determine the characteristic frequencies of the field strength of spurious emissions. Based on this information, measurements were performed in the OATS at these characteristic frequencies using calibrated antennas.

All field strength measurements were made with a spectrum analyser and the appropriate calibrated antenna for the frequency range from 9 kHz up to 10<sup>th</sup> harmonics of the transmit frequency (see equipment list for the calibrated antenna used). **The Power of the carrier frequency was also measured in the OATS.**



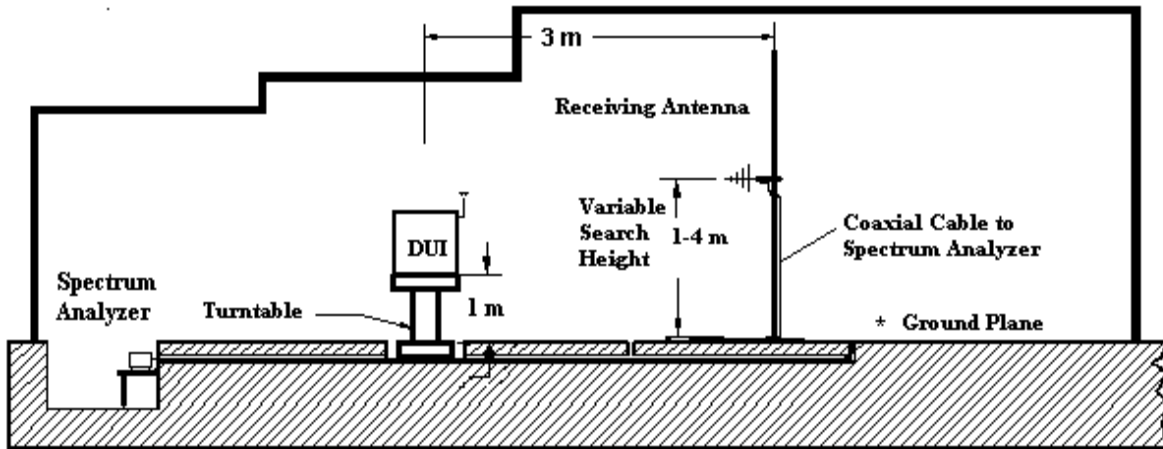


Figure 1.a Test set up for the Field Strength of Spurious Radiation Measurement in OATS  
(Not to scale)



Fig. 1.b APREL's OATS (Open Area Test Site)

The equipment under test was placed on a turntable positioned 3 meters away from the calibrated receiving antenna, which in turn was connected to the spectrum analyzer. For each identified frequency, the received signal was maximized by the positioning of the turntable and the height of the antenna. The process was repeated for both horizontal and vertical polarisation.

Information submitted includes the relative radiated power of each spurious emissions with reference to the calculated 84.6 dB $\mu$ V/m limit per 90.210 assuming all emissions are radiated from half-wave dipole antenna.

Measurements given in the spurious emissions test result tables contain: analyzer reading, correction factor, and final reading. The final field strength level are derived from the analyzer measurement and the correction factor (antenna factor and cable loss) as shown in the following example:

#### Sample Calculation

A. Spectrum analyzer reading

At 1630.00 MHz, a spurious level of 38.4 dB $\mu$ V @ 3 meters is measured.

B. Correction factor (antenna factor and cable loss)

Cable loss: 0.5 dB

Antenna Factor: 26.6 dB

Total Correction Factor:  $0.5 + 26.6 = 27.1$  dB/m

C. Final reading (Field Strength of spurious emission):

$$C = A + B$$

$$C = 38.2 \text{ dB}\mu\text{V} + 27.1 \text{ dB}$$

$$C = 65.5 \text{ dB}\mu\text{V/m @ 3 meters}$$

D. The criteria level.

The field intensity, which would be produced by the transmitter carrier operating into a half-wave dipole antenna (gain of 1.64), at a distance of 3 m, was calculated using the following formula:

$$\text{Field Strength of unmodulated carrier (dB}\mu\text{V/m)} = 10 \log_{10} (\text{PtG}/4\pi r^2) + 146 \text{ dB}$$

Pt is transmitter carrier power, unmodulated

G is gain, 1.64

R is distance, 3 meters

Criteria (reference) level at 3 meters from 0.661 Watt (ERP) into half-wave dipole antenna is 84.6 dB $\mu$ V/m.

E = Margin (spurious emission below the reference level)

$$E = D - C$$

$$E = 84.6 \text{ dB}\mu\text{V/m} - 65.5 \text{ dB}\mu\text{V/m}$$

$$E = 19.1 \text{ dB}\mu\text{V/m}$$

**Results:**      **Passed.**      **See Tables 1 and 2**

**Table 1**  
 Field Strength of Spurious Radiation  
 Transmitter Frequency: 815.00 MHz  
 Antenna Polarization: Vertical  
**Resolution Bandwidth:**  
 10 kHz (below 1 GHz)  
 100 kHz (above 1 GHz)

Frequency (MHz)	Measured Level (dB $\mu$ V)	Correction Factor (dB/m)	Field Strength (dB $\mu$ V/m)	Criteria Level (dB $\mu$ V/m)	Margin (dB)
	"A"	"B"	"C"	"D"	"E"
815.00 Carrier	101.9	22.9	124.8	-	-
1630.00 2 <sup>nd</sup> harmonic	38.4	27.1	65.5	84.6	19.1
2445.00 3 <sup>rd</sup> harmonic	51.1	32.0	83.1	84.6	1.5
3260.00 4 <sup>th</sup> harmonic	24.3	38.3	62.6	84.6	22.0
4075.00 5 <sup>th</sup> harmonic	43.8	40.5	84.3	84.6	0.3
4890.00 6 <sup>th</sup> harmonic	20.0 noise floor	44.7	64.7	84.6	19.9
5705.00 7 <sup>th</sup> harmonic	22.5	51.8	74.3	84.6	10.3
6520.00 8 <sup>th</sup> harmonic	20.0 noise floor	58.9	78.9	84.6	5.7

Test performed by: Ku Celia Pomon Date: October, 2000



**Table 2**  
 Field Strength of Spurious Radiation  
 Transmitter Frequency: 815.00 MHz  
 Antenna Polarization: Horizontal  
**Resolution Bandwidth:**  
 10 kHz (below 1 GHz)  
 100 kHz (above 1 GHz)

Frequency (MHz)	Measured Level (dB $\mu$ V)	Correction Factor (dB/m)	Field Strength (dB $\mu$ V/m)	Criteria Level (dB $\mu$ V/m)	Margin (dB)
	"A"	"B"	"C"	"D"	"E"
815.00 Carrier	91.7	22.9	114.6	-	-
1630.00 2 <sup>nd</sup> harmonic	34.8	27.1	61.9	84.6	22.7
2445.00 3 <sup>rd</sup> harmonic	48.4	32.0	80.4	84.6	4.2
3260.00 4 <sup>th</sup> harmonic	21.6 noise floor	38.3	59.9	84.6	24.7
4075.00 5 <sup>th</sup> harmonic	22.1	40.5	62.6	84.6	22.0
4890.00 6 <sup>th</sup> harmonic	19.7 noise floor	44.7	64.4	84.6	20.2
5705.00 7 <sup>th</sup> harmonic	19.8 noise floor	51.8	71.6	84.6	13.0
6520.00 8 <sup>th</sup> harmonic	19.7 noise floor	58.9	78.6	84.6	6.0

Test performed by: Kulcha Roman Date: October, 2000

# APPENDIX A

## List of Test Equipment

### List of Equipment

Description	Range	Manufacturer	Model #	APREL Asset #	Cal. Due Date
Spectrum Analyzer	9 kHz - 3 GHz	Anritsu	MS2661C	301330	Dec 10, 2000
Spectrum Analyzer	9 kHz - 30 GHz	Anritsu	MS2667C	301436	Nov 3, 2000
Biconical Antenna	20 MHz - 200 MHz	Eaton	94455-1	100890	July 21, 2001
Log - Periodic Antenna	200 MHz -1.0 GHz	Eaton	ALP-1	100761	July 21, 2001
Horn Antenna	1 – 18 GHz	APREL Inc.	AA – 118	100553	March 12, 2001
Anechoic Shielded Room	10 kHz - 10 GHz	APREL Inc.	–	301329	N/A
OATS	30 MHz – 1 GHz	APREL Inc.	3 m & 10 m	N/A	N/A
Mast with the Controller	1 m – 4 m	EMCO	1051 – 12	100507	N/A
Turntable with the Controller	0° - 360°	EMCO	1060 – 1.241	100506	N/A
Notch Filter	DC - 6 GHz	APREL Inc.	NFLT-835	301470	CBT
Attenuator	20 dB	Pasternack	PE 7002-20	301370	May 18, 2001
Amplifier (LNA)	30-1000 MHz	APREL Inc.	APRLNA-001	301415	June 20, 2001

# APPENDIX B

## PHOTOGRAPHS





**Melard Sidearm ALL-Terrain Handheld PC™  
With the RIM R802D-2-0 Ardis**



**Sidearm ALL-Terrain Handheld PC™ Tested for Spurious Emissions at the OATS**