

FCC TEST REPORT

for

47 CFR Part 15 Subpart C

Equipment : Smart-Phone
Trade Name : iDo 、 KINPO
Model No. : S600 、 SP70A 、 Qool
Filing Type : Certification
Applicant : Kinpo Electronics, Inc.
10TH FL., 99 NAN-KING E. RD., SEC. 5, TAIPEI,
TAIWAN, (105) R.O.C.

- The test result refers exclusively to the test presented test model / sample.
- Without written approval of SPORTON International Inc., the test report shall not be reproduced except in full.
- **Certificate or Test Report must not be used by the applicant to claim the product in this test report endorsement by NVLAP or any agency of U.S. government.**
- The data shown in this test report were carried out on Jul. 02, 2005 at Sporton International Inc. LAB.



Dr. Daniel Lee
EMC/SAR Manager

SPORTON International Inc.

6F, No.106, Sec. 1, Hsin Tai Wu Rd., Hsi Chih, Taipei Hsien, Taiwan, R.O.C.

SPORTON International Inc.

TEL : 886-2-2696-2468

FAX : 886-2-2696-2255



Table of Contents

History of this test report.....	ii
1. General Description of Equipment under Test.....	1
-2.0. Applicant.....	1
-1.0. Manufacturer.....	1
1.0. Basic Description of Equipment under Test.....	1
2.0. Feature of Equipment under Test.....	2
2. Test Configuration of Equipment under Test.....	3
1.0. Test Manner.....	3
2.0. Test Mode.....	3
3.0. Connection Diagram of Test System.....	4
4.0. Ancillary Equipment List.....	4
3. RF Utility.....	5
4. General Information of Test.....	6
1.0. Test Voltage.....	6
2.0. Standard for Methods of Measurement.....	6
3.0. Test in Compliance with.....	6
4.0. Frequency Range Investigated.....	6
5.0. Test Distance.....	6
2. Report of Measurements and Examinations.....	7
1.0. List of Measurements and Examinations.....	7
2.0. Hopping Channel Separation.....	8
2.0. Number of Hopping Frequency.....	12
2.0 Dwell Time of Each Frequency within a 30 Seconds Period.....	18
3.0 Output Power.....	38
4.0 100kHz Bandwidth of Frequency Band Edges.....	42
5.0 Conducted Emission.....	46
6.0 Radiated Emission Measurement.....	49
7.0 Antenna Requirements.....	55
2. List of Measuring Equipments Used.....	56
3. Uncertainty Evaluation.....	57
Appendix A. External Product Photograph	
Appendix B. Internal Photograph	
Appendix C. Setup Photograph	



History of this test report

Original Report Issue Date: Jul. 26, 2005

Report Issue Date	Description



1. General Description of Equipment under Test

1.1. Applicant

Kinpo Electronics, Inc.

10TH FL., 99 NAN-KING E. RD., SEC. 5, TAIPEI, TAIWAN, (105) R.O.C.

1.2. Manufacturer

Kinpo International Ltd.

Palm Grove House, P.O. Box 438, Road Town, Tortola, British Virgin Islands.

1.3. Basic Description of Equipment under Test

Equipment	: Smart-Phone
Trade Name	: iDo 、KINPO
Model No.	: S600 、SP70A 、Qool
Power Supply Type	: Switching, DC 4.2V
AC Power Cord	: AC 120V, Non-shielded, Wall-mount, 1.8meter, 2pin
Earpiece	: CGVL2000054
Battery	: Kinpo Electronics, Inc., SXXXX(X=0~9 or A~Z or a~z or blank or -)
Adapter	: Phihong Technology Co., Ltd., PSC11R-050

1.4. Feature of Equipment under Test

Product Feature & Specification				
1. Modulation Type/Data Rate	GFSK			
2. Frequency Range.	2400 MHz ~ 2483.5 MHz			
3. Number o f Channels	79			
4. Carrier Frequency of each channel	2402MHz+n*1MHz, n=0~78			
5. Channel Spacing	1 MHz			
6. Maximum Output Power to Antenna (Normal condition)	3.98 dBm			
7. Type of Antenna Connector	HRS MS-156			
8. Antenna Type	Embedded IFA			
9. Antenna Gain	-2 dBi			
10. Power Rating (DC/AC, Voltage)	3.8V / 1.2A			
11. Function Type	Transmitter		Transceiver	V



2. Test Configuration of Equipment under Test

2.1. Test Manner


- a. The EUT has been associated with peripherals pursuant to ANSI C63.4-2003 and configuration operated in a manner tended to maximize its emission characteristics in a typical application.
- b. For spurious emission below 1GHz, only one channel of each application was tested because it is not related to channel selection.
- c. The EUT is programmed to transmit signal continuously for all testings.
- d. Frequency range investigated: conduction 150 kHz to 30 MHz, radiation 30 MHz to 25000MHz.

2.2. Test Mode

Application	Bluetooth
Radiated Emission	Mode 1: Tx_CH00_2402 MHz Mode 2: Tx_CH39_2441 MHz Mode 3: Tx_CH78_2480 MHz
Conducted Emission	Mode 1: PCS Idle + MP3 Player + Camera + USB Link + Earphone

2.3. Connection Diagram of Test System

<Conducted Emission & Radiation Emission>

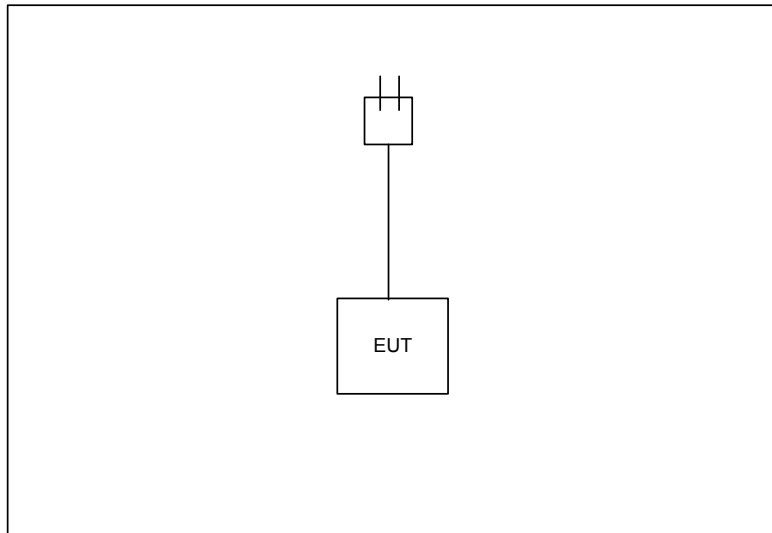

2.4. Ancillary Equipment List

N/A



3. RF Utility

Programmed RF utility "Bluetest" installed in EUT can transmit continuous Tx signal.



4. General Information of Test

Test Site Location : No. 52, Hwa Ya 1st Rd., Hwa Ya Technology Park,
Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C.
TEL : 886-3-327-3456
FAX : 886-3-318-0055
Test Site No : CO01-HY, 03CH06-HY

4.1. Test Voltage

AC 120V

4.2. Standard for Methods of Measurement

ANSI C63.4-2003

4.3. Test in Compliance with

47 CFR Part 15 Subpart C

4.4. Frequency Range Investigated

Conduction: from 150 kHz to 30 MHz
Radiation: from 30 MHz to 25000MHz

4.5. Test Distance

The test distance of radiated emission from antenna to EUT is 3 m.

5. Report of Measurements and Examinations

5.1. List of Measurements and Examinations

FCC Rule	Description of Test	Result	Section
15.247(a)(1)	Hopping Channel Separation	Pass	5.2
15.247(a)(1)(iii)	Number of Hopping Frequency Used	Pass	5.3
15.247(a)(1)	Hopping Channel Bandwidth	Pass	5.4
15.247(a)(1)(iii)	Dwell Time of Each Frequency within a 30 Second Period	Pass	5.5
15.247(b)(1)	Output Power	Pass	5.6
15.247(c)	100kHz Bandwidth of Frequency Band Edges	Pass	5.7
15.207	Conducted Emission	Pass	5.8
15.209	Radiated Emission	Pass	5.9
15.203	Antenna Requirement	Pass	5.10

5.2. Hopping Channel Separation


5.2.1. Measuring Instruments :

As described in chapter 6 of this test report.

5.2.2. Test Procedure :

1. The transmitter output was connected to the spectrum analyzer directly.
2. Set RBW of spectrum analyzer to 30kHz and VBW to 100kHz.
3. The Hopping Channel Separation is defined as the channel is separated with the next channel.

5.2.3. Test Setup Layout :

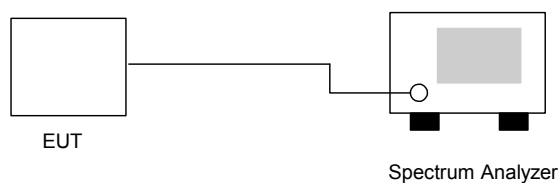

5.2.4. Test Result : The spectrum analyzer plots are attached as below

- Temperature: 26°C
- Relative Humidity: 53%
- Test Enginner : Jay


Channel	Frequency (MHz)	Hopping Channel Separation (MHz)	Limits (MHz)	Plot Ref. No.
00	2402	1.0	0.770	Mode 1
39	2441	1.0	0.740	Mode 2
78	2480	1.0	0.760	Mode 3

Remark: Limit is the greater one of 25kHz or the 20dB bandwidth of the hopping channel.



5.2.5 Hopping Channel Separation


Mode 1: CH00 (2402MHz)

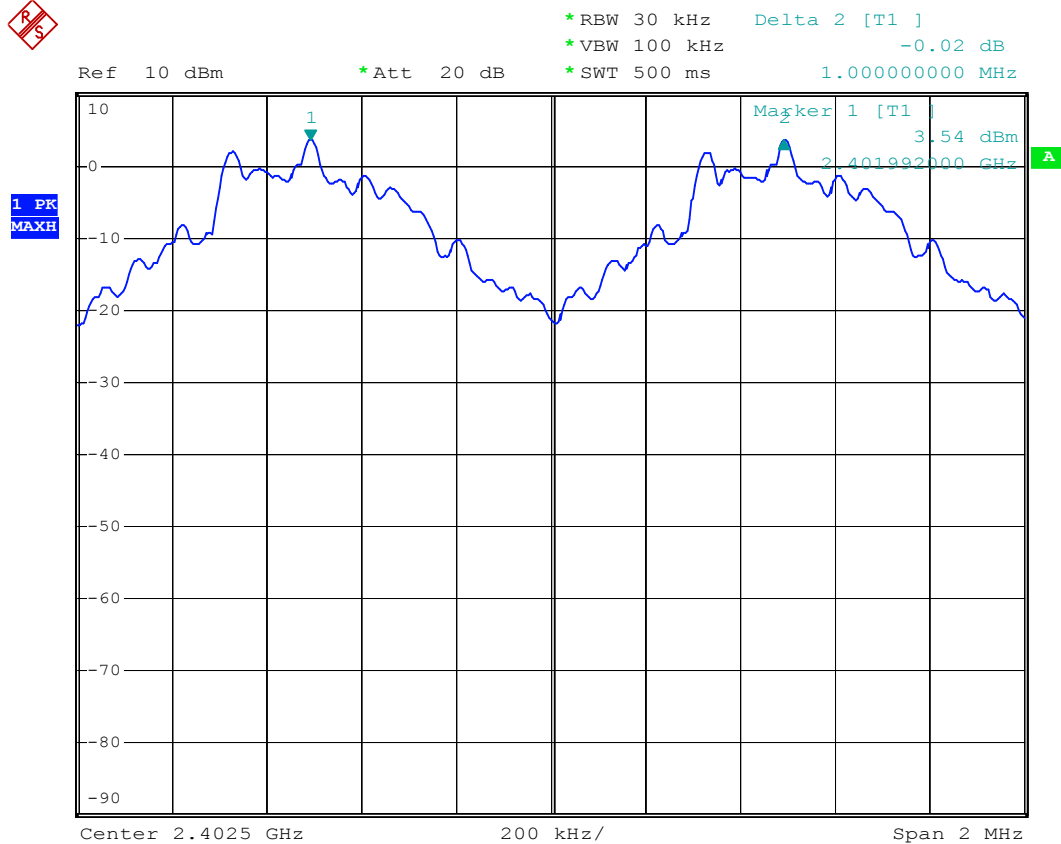

Date: 2.JUL.2005 15:21:21




Mode 2: CH39 (2441MHz)

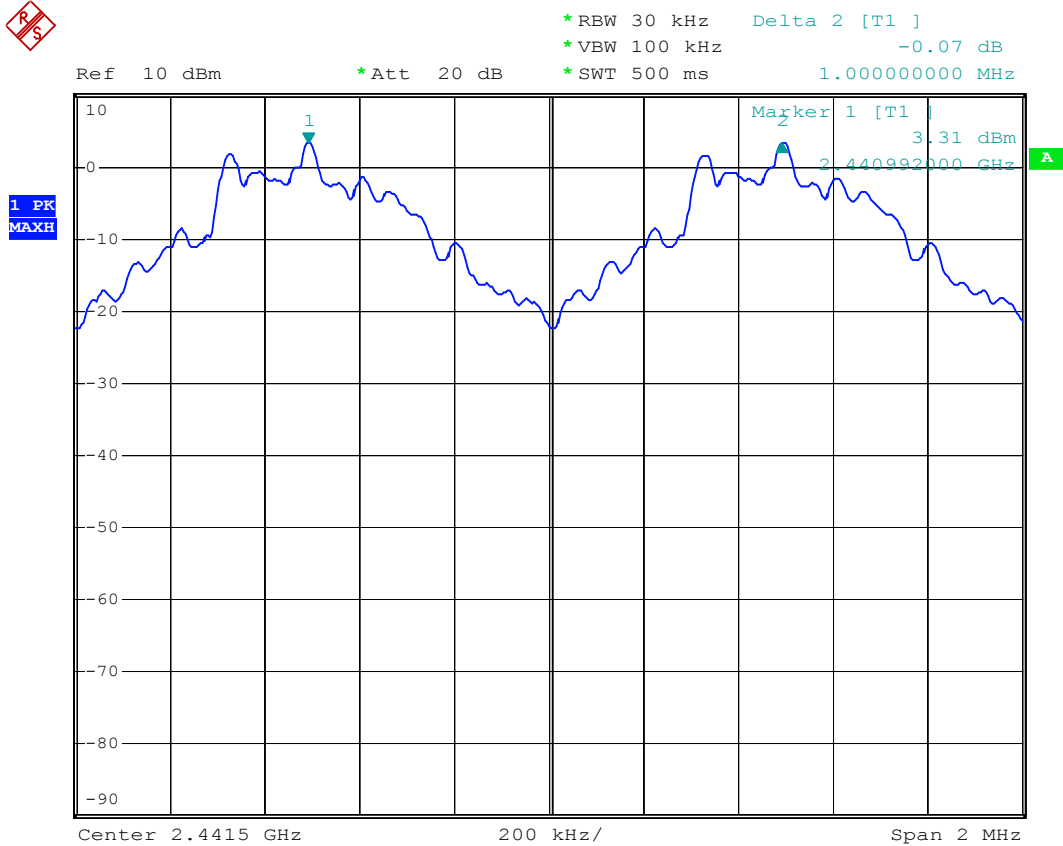

Date: 2.JUL.2005 15:22:48



Mode 3: CH78 (2480MHz)

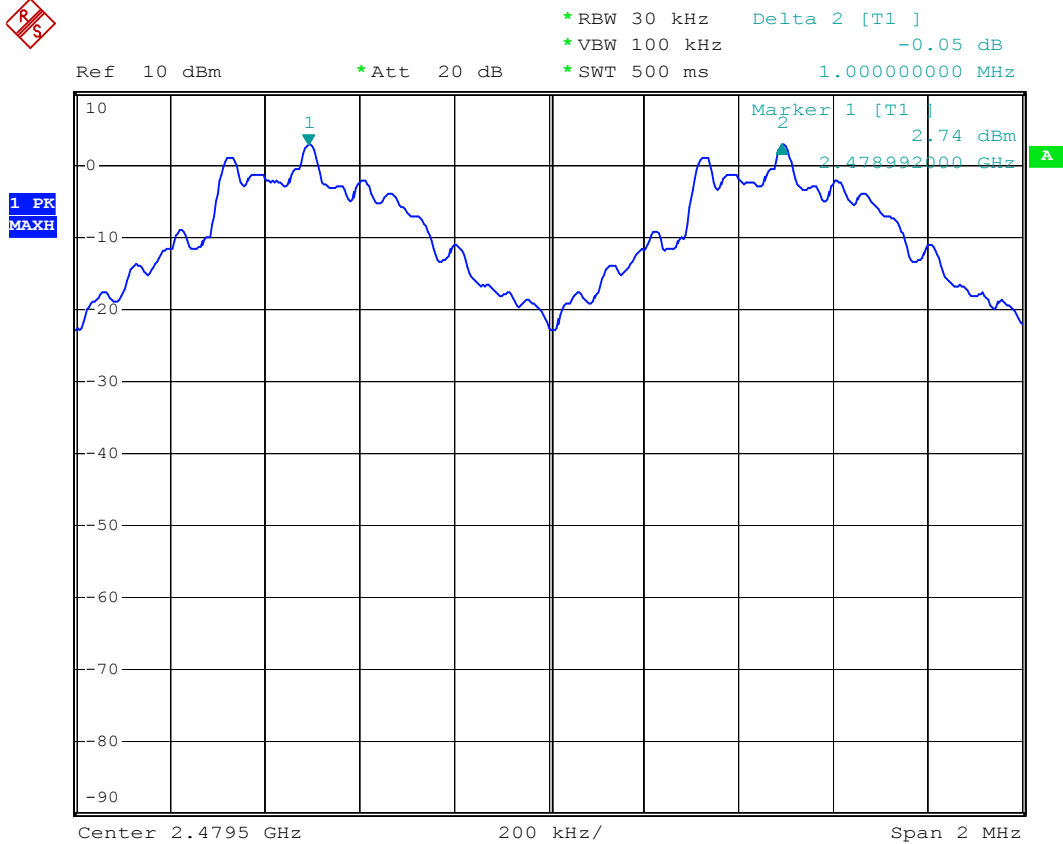

Date: 2.JUL.2005 15:23:49

5.3. Number of Hopping Frequency


5.3.1. Measuring Instruments :

As described in chapter 6 of this test report.

5.3.2. Test Procedure :

1. The transmitter output was connected to the spectrum analyzer directly.
2. Set RBW of spectrum analyzer to 100kHz and VBW to 100kHz.
3. The number of hopping frequency used is defined as the device has the numbers of total channel.

5.3.3. Test Setup Layout :

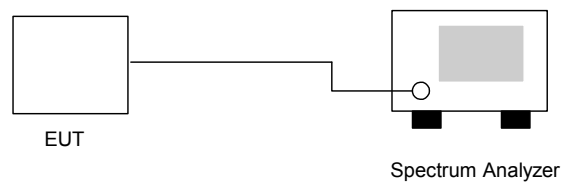


5.3.4. Test Result : See spectrum analyzer plots below

- Temperature: 26°C
- Relative Humidity: 53%
- Test Enginner : Jay

Number of Hopping Frequency (Channel)	Limits (Channel)
79	15



5.3.5 Number of Hopping Frequency

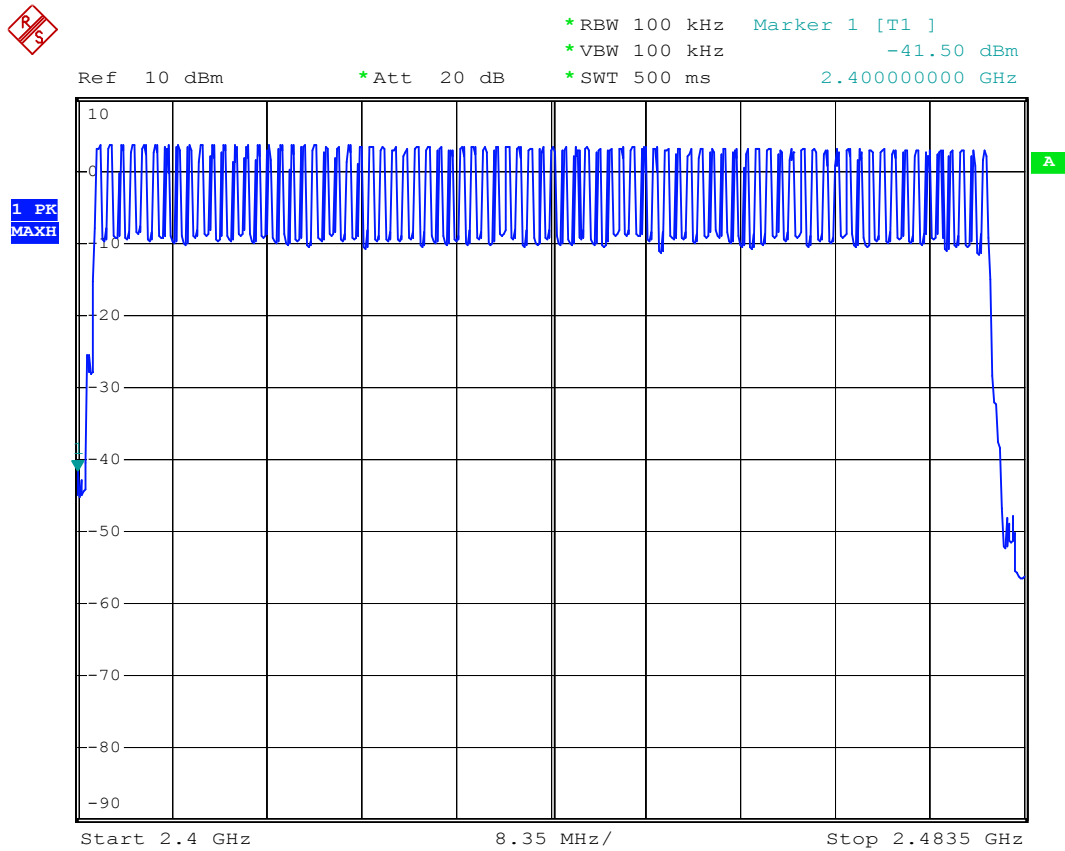

Date: 2.JUL.2005 15:36:33

5.4 Hopping Channel Bandwidth


5.4.1 Measuring Instruments :

As described in chapter 6 of this test report.

5.4.2 Test Procedure :

1. The transmitter output was connected to the spectrum analyzer directly.
2. Set RBW of spectrum analyzer to 30kHz and VBW to 300kHz.
3. The Hopping Channel bandwidth is defined as the frequency range where the power is higher than peak power minus 20dB.

5.4.3 Test Setup Layout :

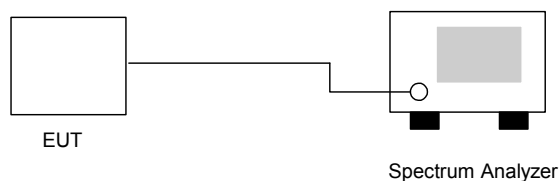

5.4.4 Test Result : See spectrum analyzer plots below

- Temperature: 26°C
- Relative Humidity: 53%
- Test Engineer : Jay

Channel	Frequency (MHz)	Hopping Channel Bandwidth (MHz)	Limits (MHz)	Plot Ref. No.
00	2402	0.770	1.0	Mode 1
39	2441	0.740	1.0	Mode 2
78	2480	0.760	1.0	Mode 3



5.4.5 Hopping Channel Bandwidth

Mode 1: CH00 (2402MHz)



Date: 2.JUL.2005 15:17:37



Mode 2: CH39 (2441MHz)



Date: 2.JUL.2005 15:16:33



Mode 3: CH78 (2480MHz)



Date: 2.JUL.2005 15:14:56

5.5 Dwell Time of Each Frequency within a 30 Seconds Period


5.5.1 Measuring Instruments :

As described in chapter 6 of this test report.

5.5.2 Test Procedure :

1. The transmitter output was connected to the spectrum analyzer directly.
2. Set RBW of spectrum analyzer to 1MHz and VBW to 1MHz.
3. Set the center frequency on any frequency would be measured and set the frequency span to zero span.
4. The equation = $30 \times (1600/79) \times t$ (t = the time duration of one single pulse)

5.5.3 Test Setup Layout :

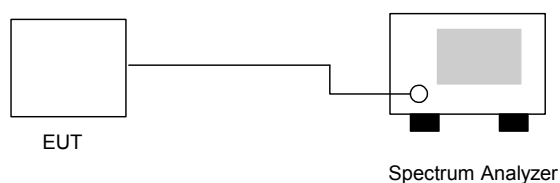

5.5.4 Test Result : See spectrum analyzer plots below

- Temperature: 26°C
- Relative Humidity: 53%
- Test Enginner : Jay

Ch00

Package Mode	Average Hopping Channel	Package Transfer Time (us)	Dwell Time (s)	Limit (s)
DH1	10.1	550	0.18	0.4
DH3	5	1820	0.29	0.4
DH5	3.4	3080	0.33	0.4

CH39

Package Mode	Average Hopping Channel	Package Transfer Time (us)	Dwell Time (s)	Limit (s)
DH1	10.1	550	0.18	0.4
DH3	5.1	1810	0.29	0.4
DH5	3.4	3050	0.33	0.4

CH78

Package Mode	Average Hopping Channel	Package Transfer Time (us)	Dwell Time (s)	Limit (s)
DH1	10.1	550	0.18	0.4
DH3	5	1810	0.29	0.4
DH5	3.3	3070	0.32	0.4


※ Remark:

1. Dwell Time=79(channels) x 0.4(s) x average hopping channel x package transfer time
2. 79channels come from the Hopping Channel number.
3. Average Hopping Channel = hops/sweep time
4. t: Package Transfer Time(us)




5.5.5 Dwell Time

DH1 (CH00)

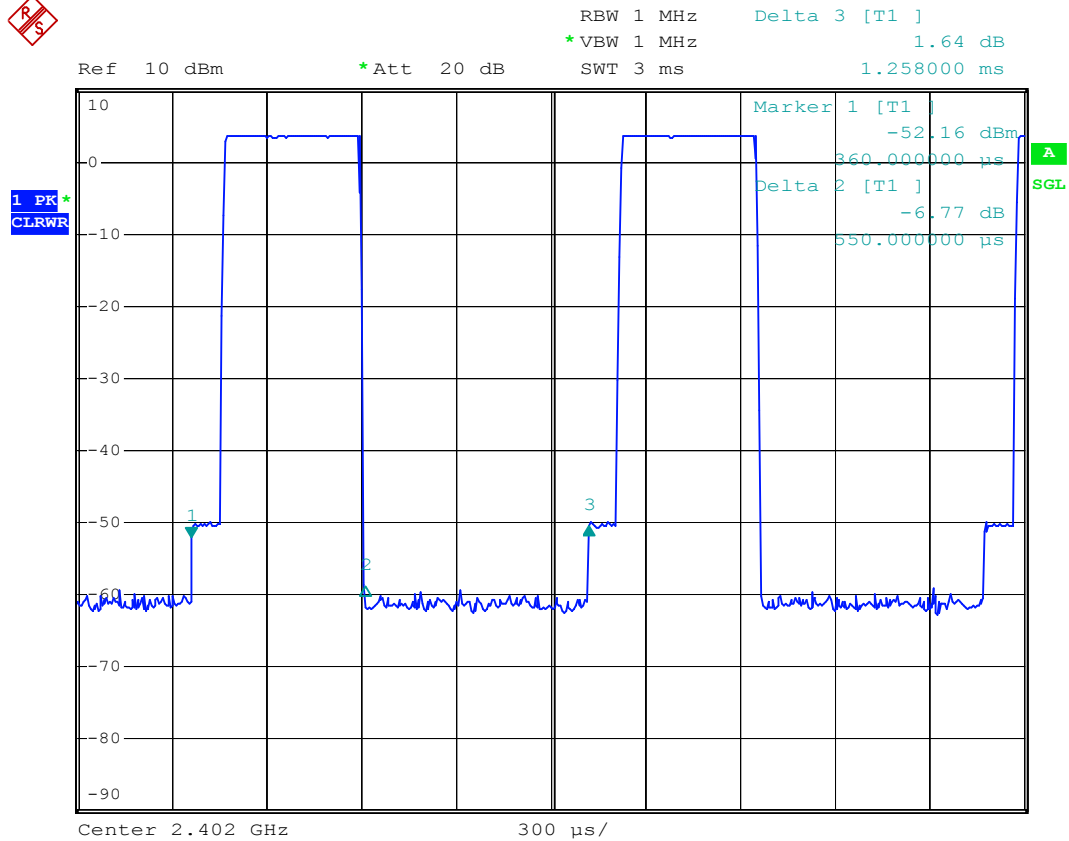

Date: 2.JUL.2005 16:12:06

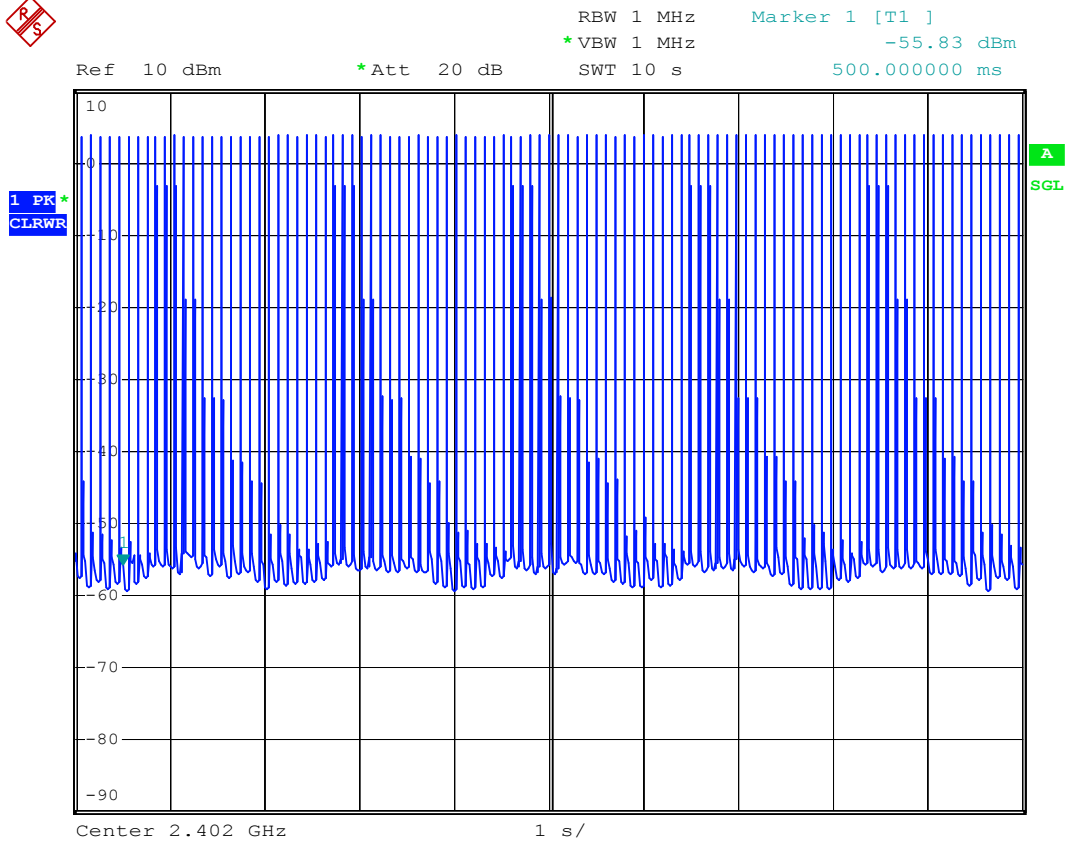


Date: 2.JUL.2005 15:45:29




DH1 (CH39)



1 PK*
CLRWR

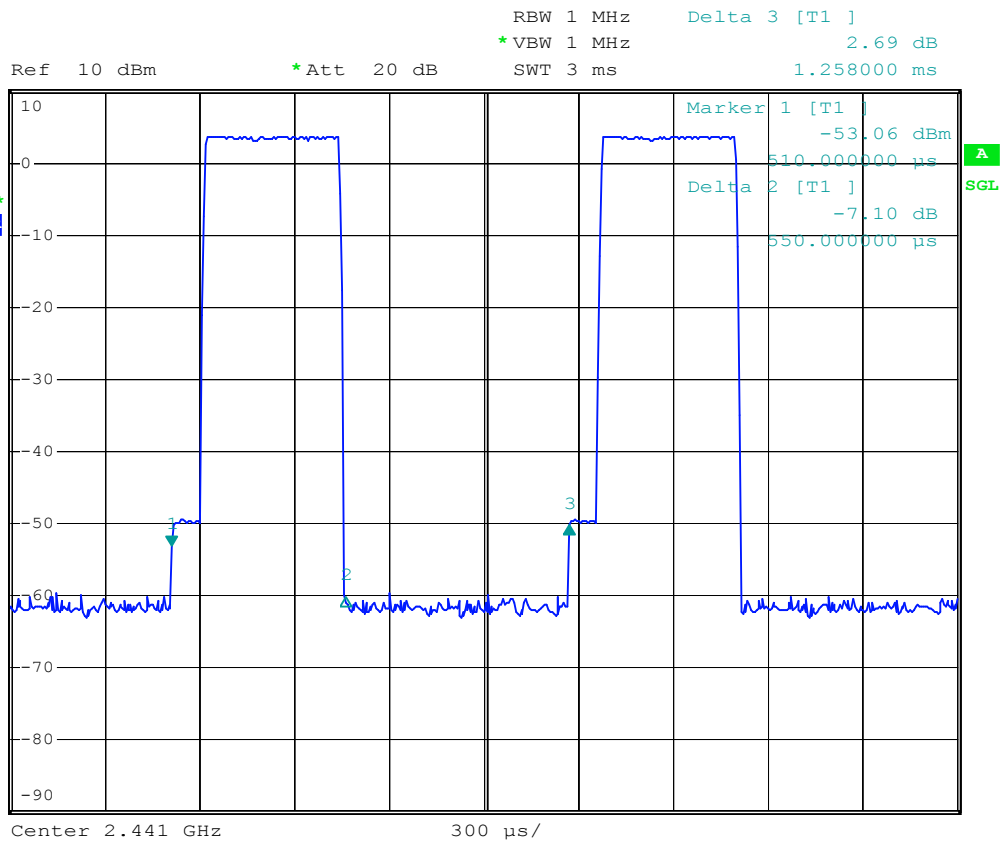


Date: 2.JUL.2005 16:13:43

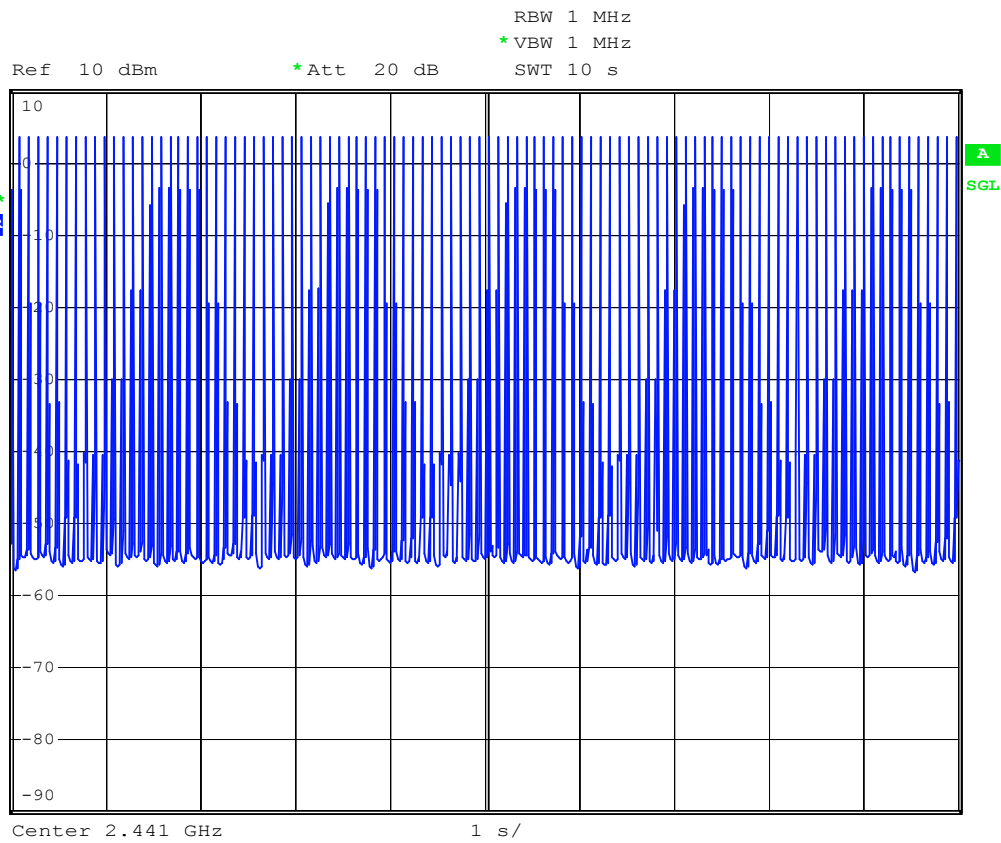


Date: 2.JUL.2005 16:05:08



DH1 (CH78)

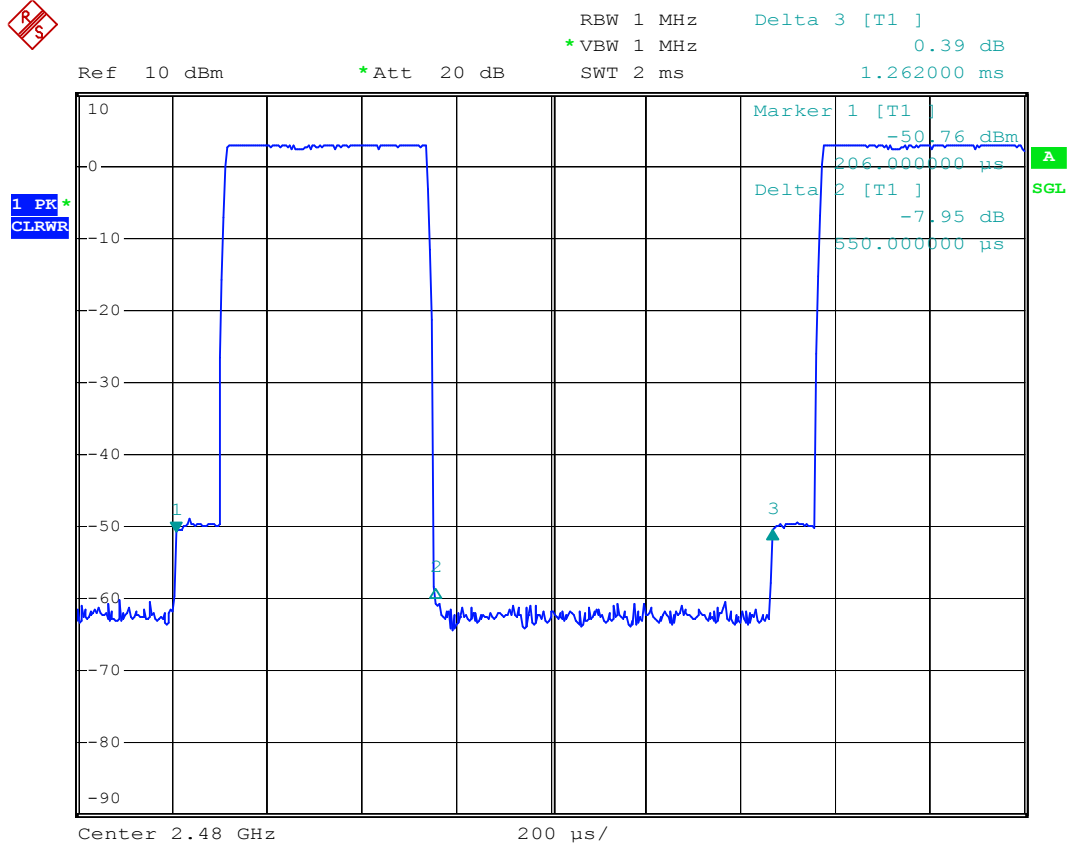


Date: 2.JUL.2005 16:18:57

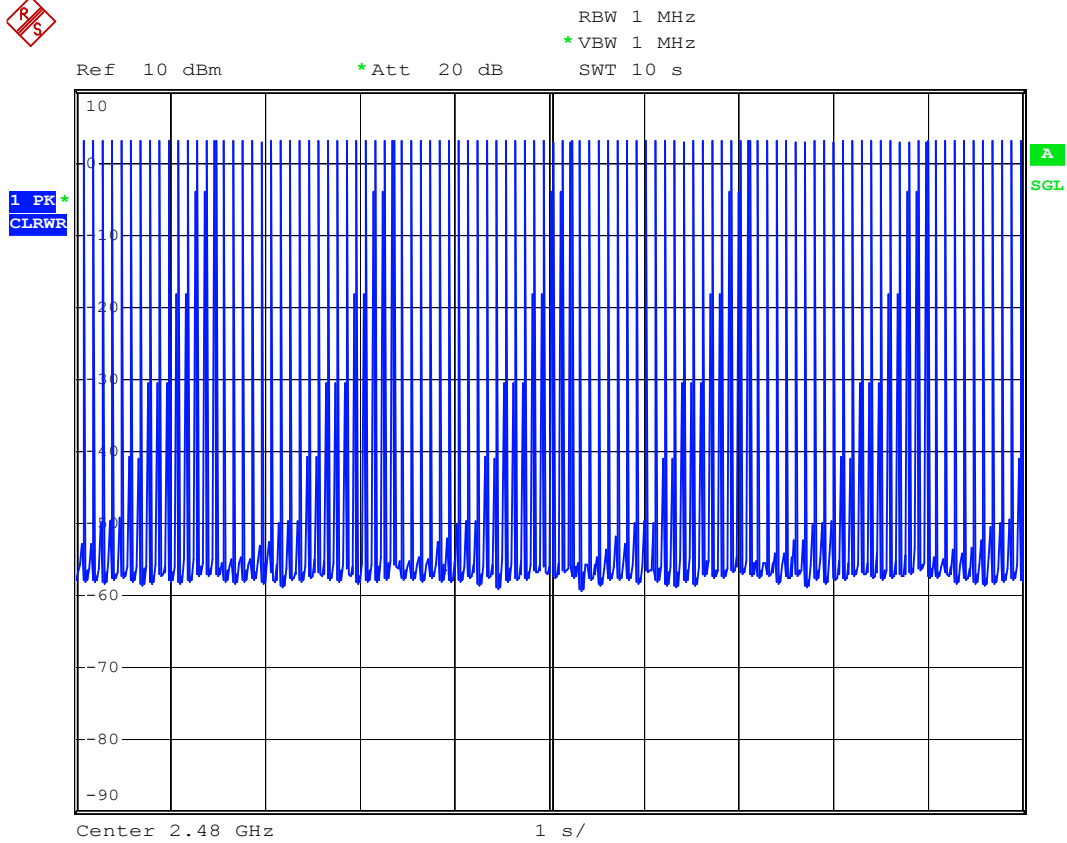


Date: 2.JUL.2005 16:06:00



DH3 (CH00)

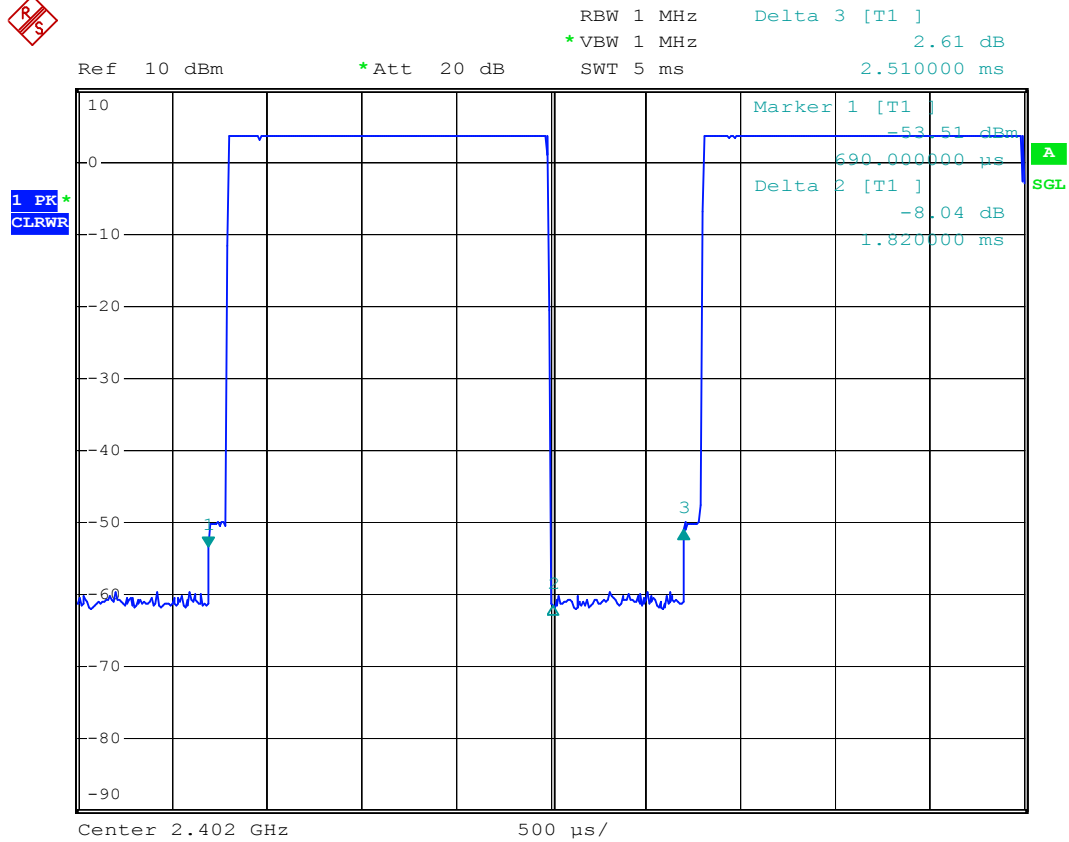


Date: 2.JUL.2005 16:10:38

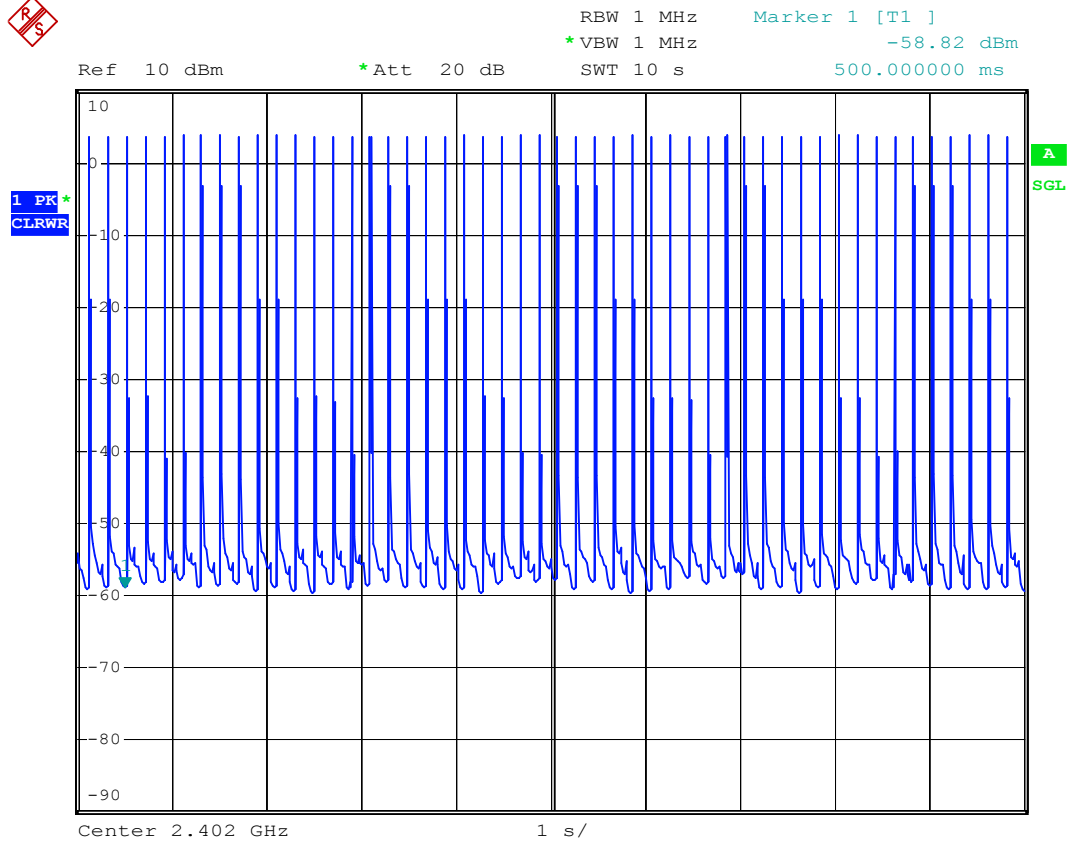


Date: 2.JUL.2005 15:43:35



DH3 (CH39)

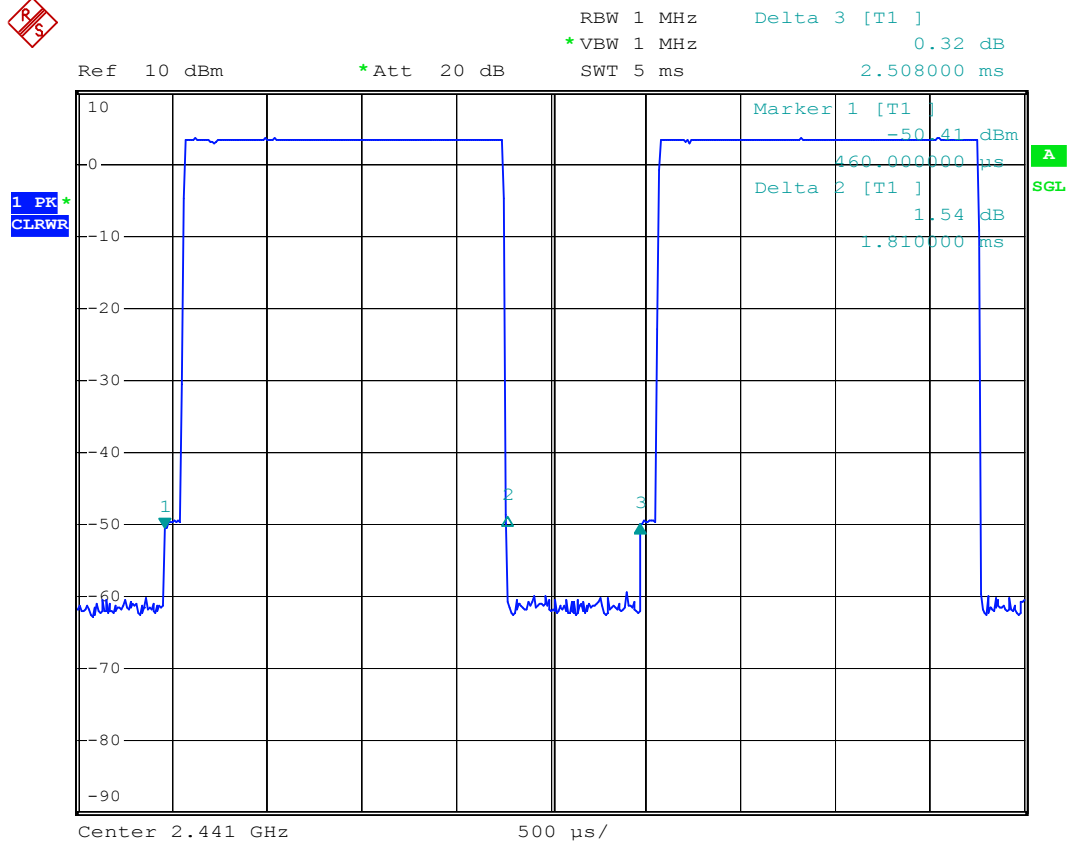


Date: 2.JUL.2005 16:14:36

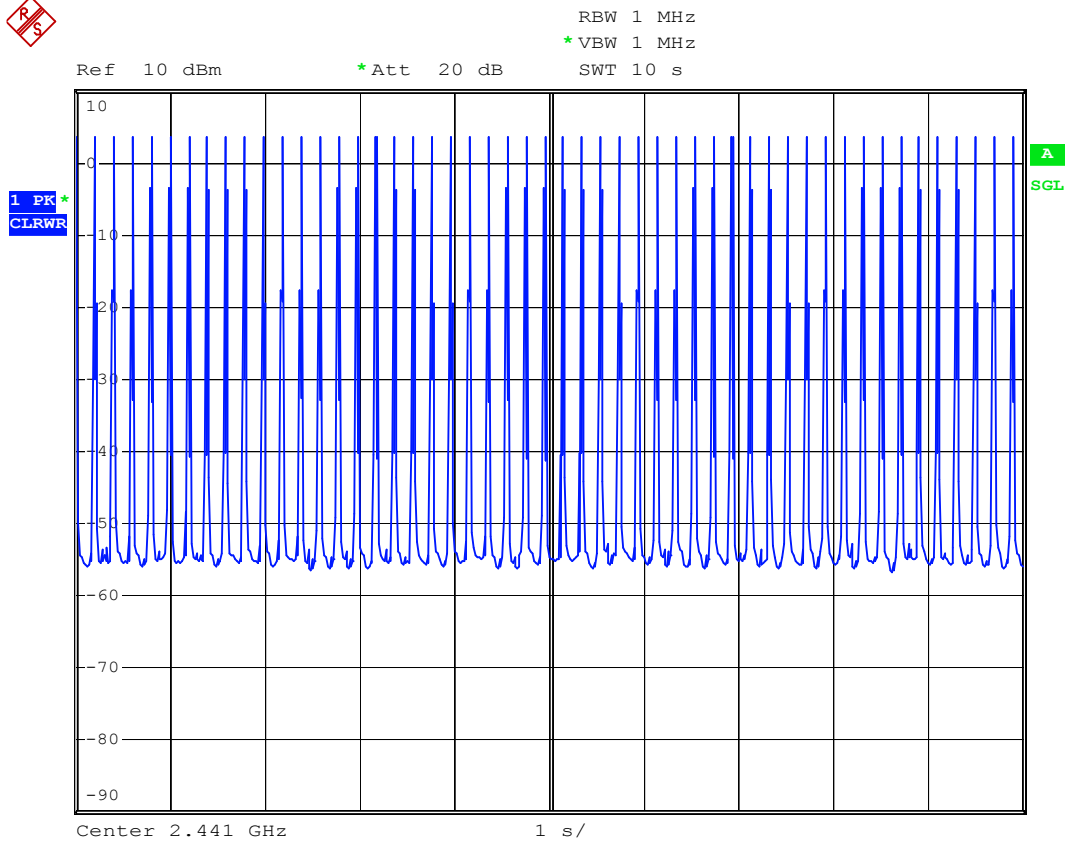


Date: 2.JUL.2005 16:04:22



DH3 (CH78)

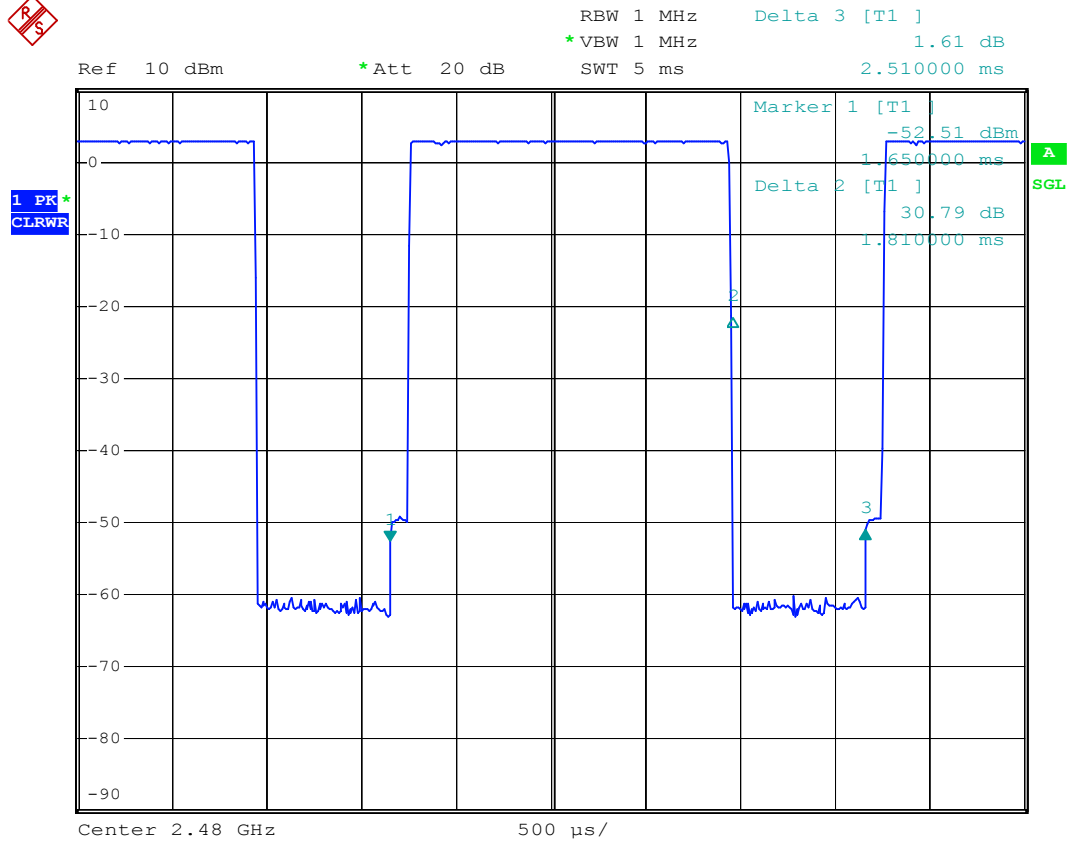


Date: 2.JUL.2005 16:17:53

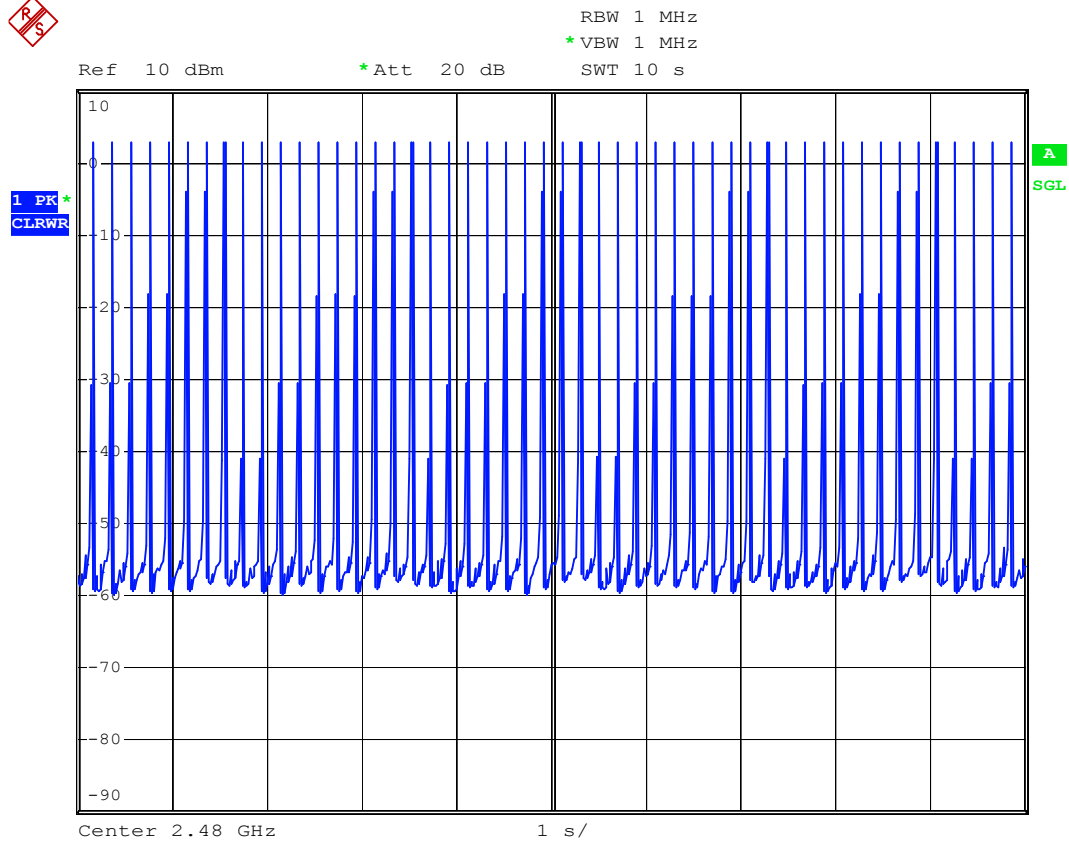


Date: 2.JUL.2005 16:06:41



DH5 (CH00)

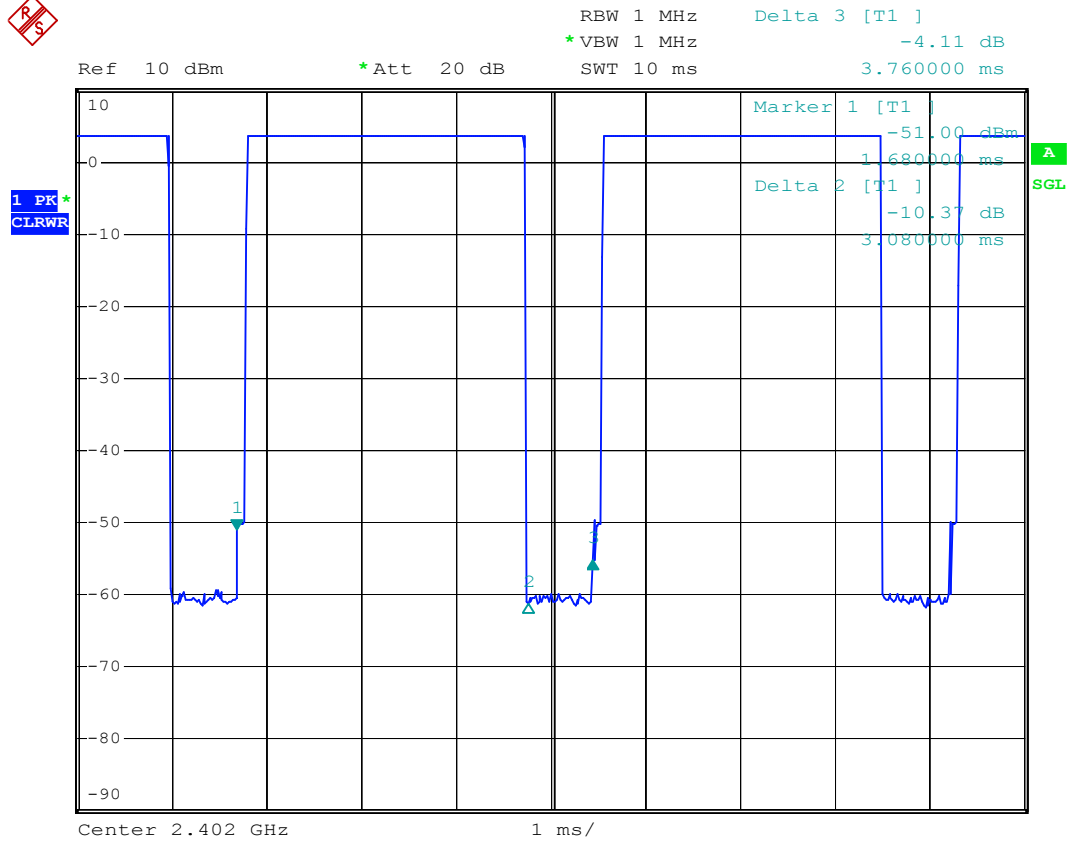


Date: 2.JUL.2005 16:09:33

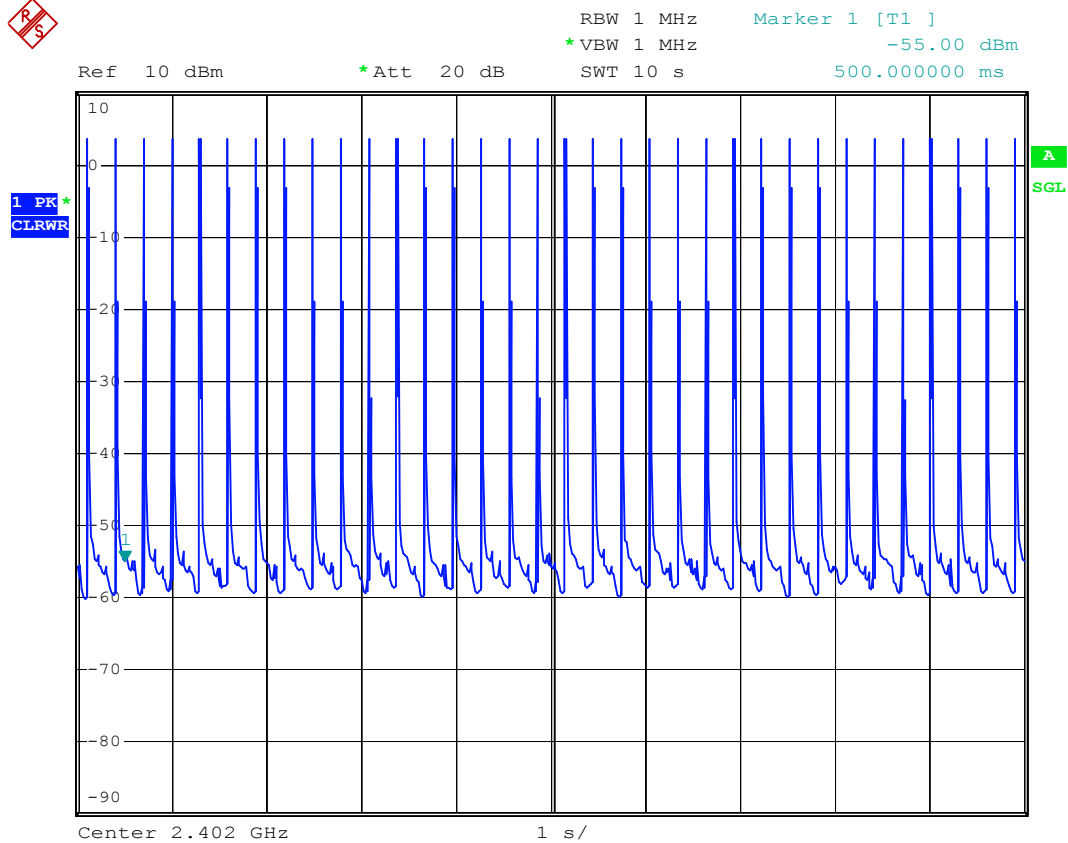


Date: 2.JUL.2005 15:44:51



DH5 (CH39)

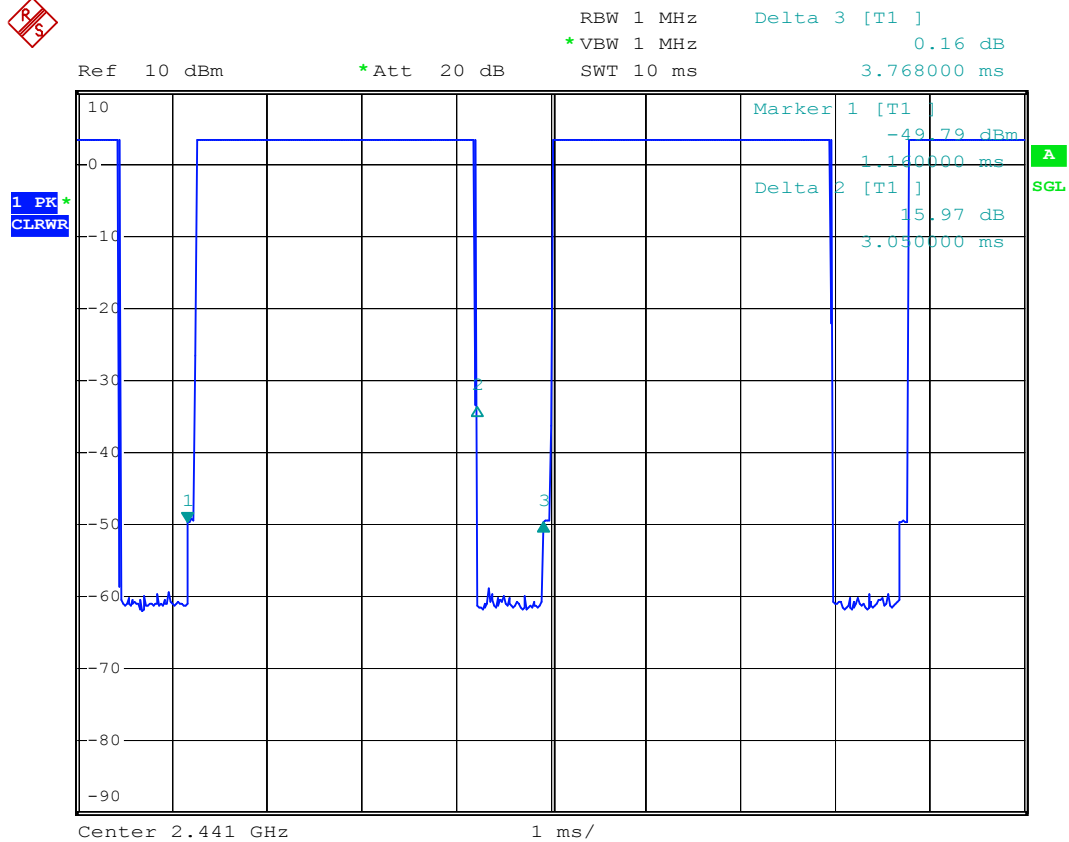


Date: 2.JUL.2005 16:16:12

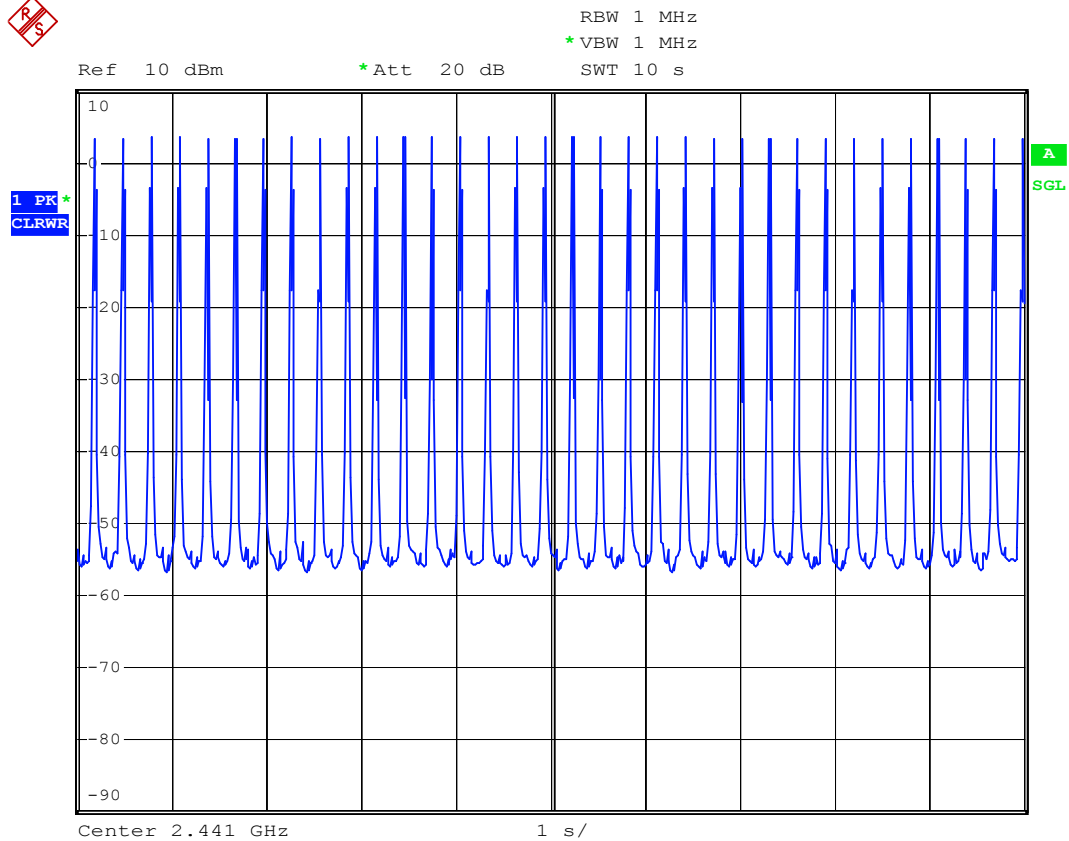


Date: 2.JUL.2005 16:03:39



DH5 (CH78)

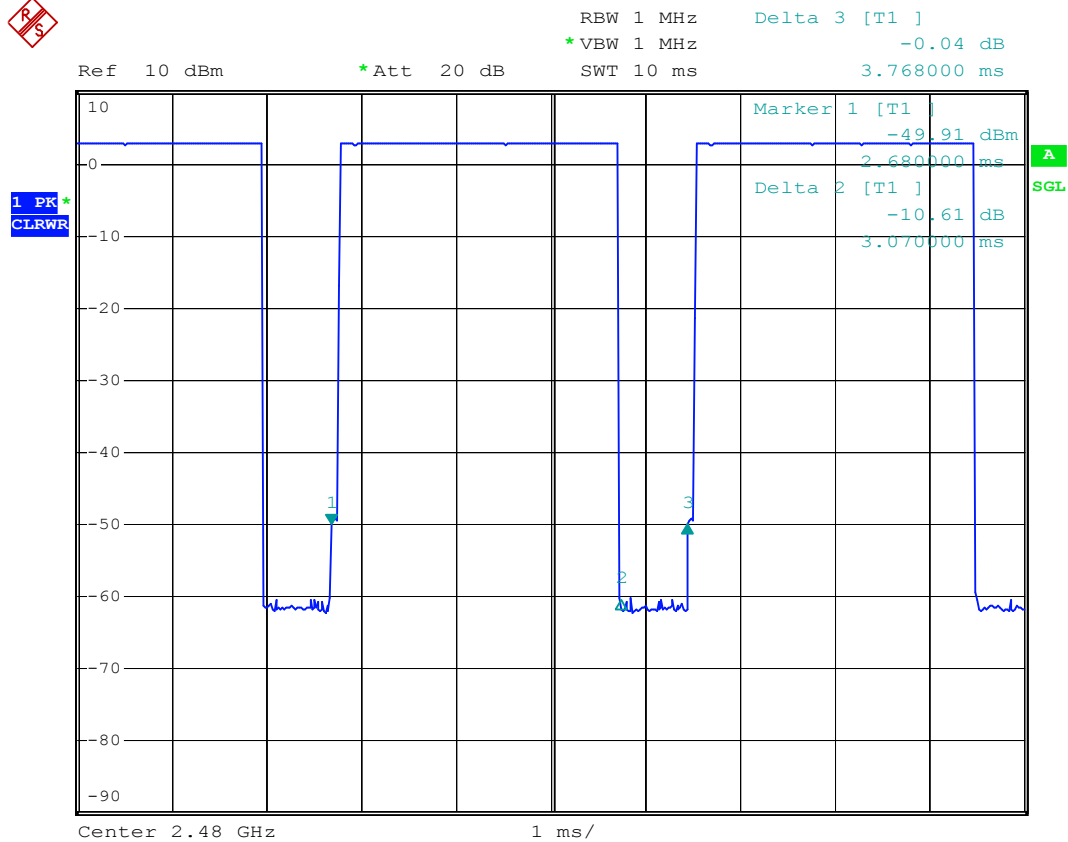

Date: 2.JUL.2005 16:17:01

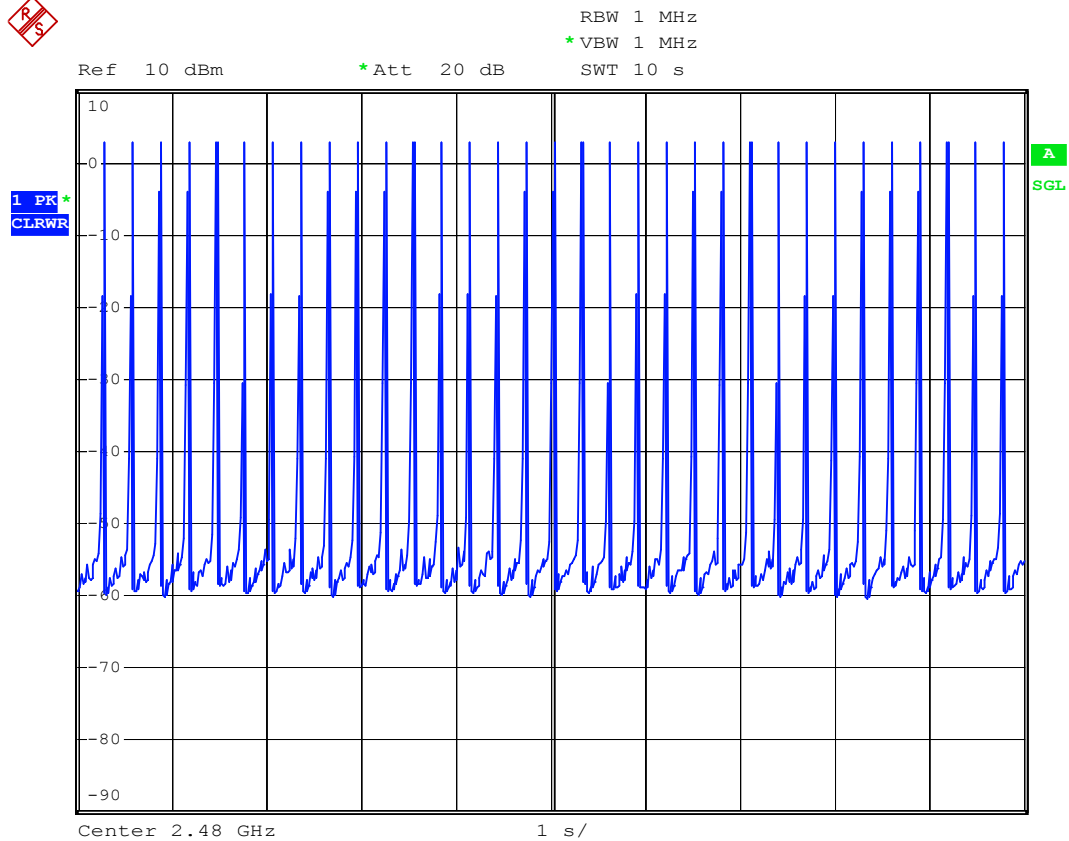

Date: 2.JUL.2005 16:07:24

5.6 Output Power


5.6.1 Measuring Instruments :

As described in chapter 6 of this test report.

5.6.2 Test Procedure :

1. The transmitter output was connected to the spectrum analyzer directly.
2. The center frequency of the spectrum analyzer was set to the fundamental frequency and set RBW to 3MHz and VBW to 3MHz.

5.6.3 Test Setup Layout :

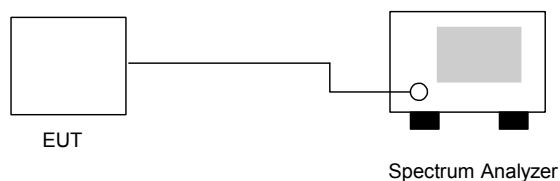

5.6.4 Test Result : See spectrum analyzer plots below


- Temperature: 26°C
- Relative Humidity: 53%
- Test Engineer : Jay

Channel	Frequency (MHz)	Measured Output Power (dBm)	Limits (Watt/dBm)	Plot Ref. No.
00	2402	3.98	1W/30 dBm	Mode 1
39	2441	3.79	1W/30 dBm	Mode 2
78	2480	3.19	1W/30 dBm	Mode 3



5.6.5 Output Power


Mode 1: CH00 (2402MHz)

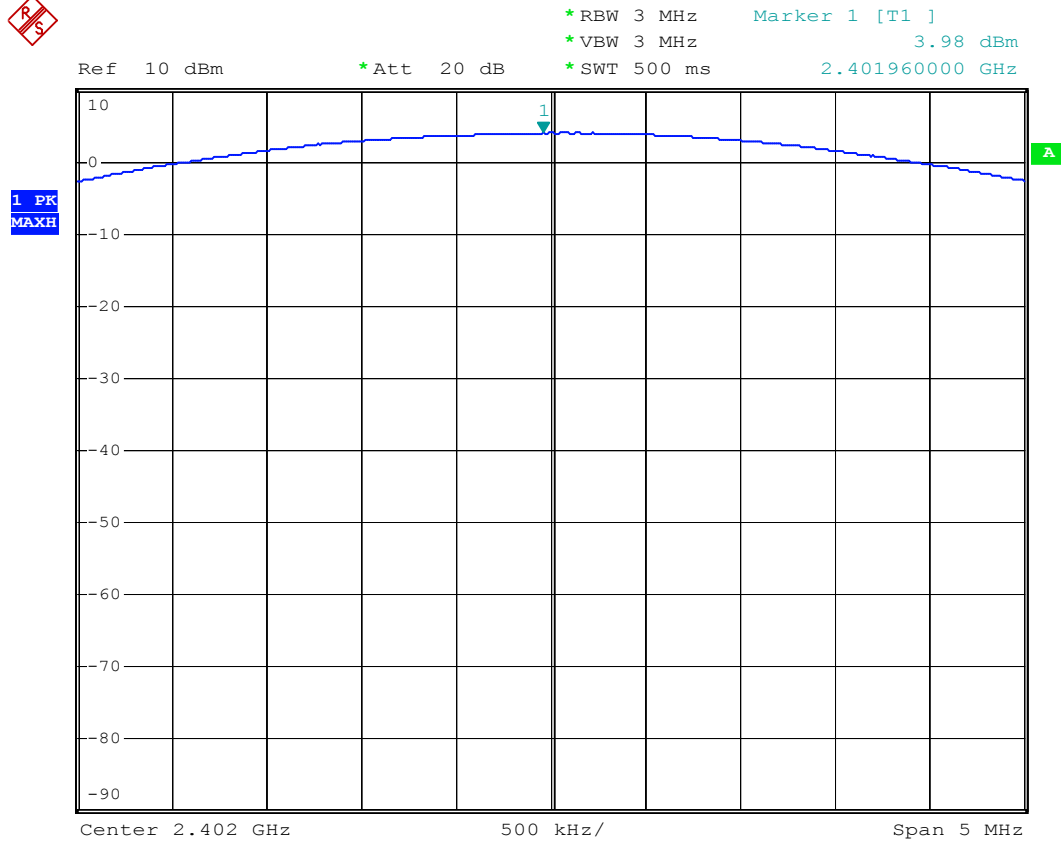

Date: 2.JUL.2005 15:11:36




Mode 2: CH39 (2441MHz)

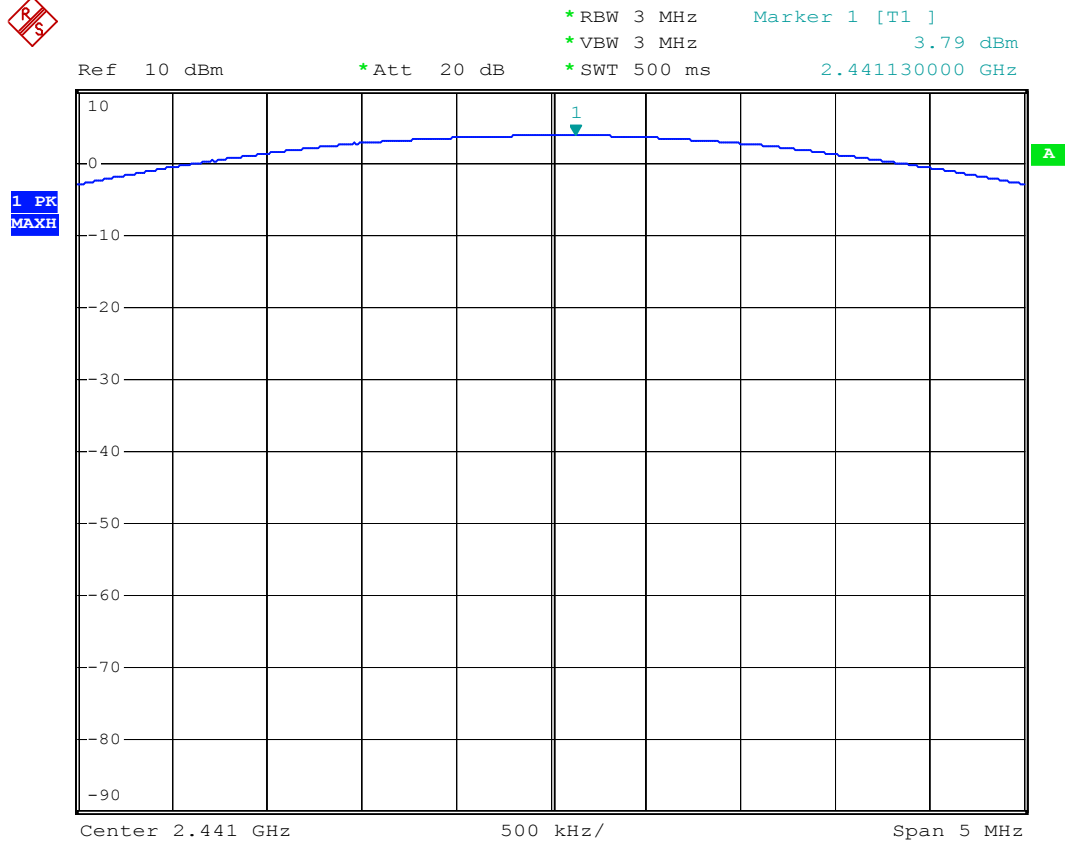

Date: 2.JUL.2005 15:11:08



Mode 3: CH78 (2480MHz)

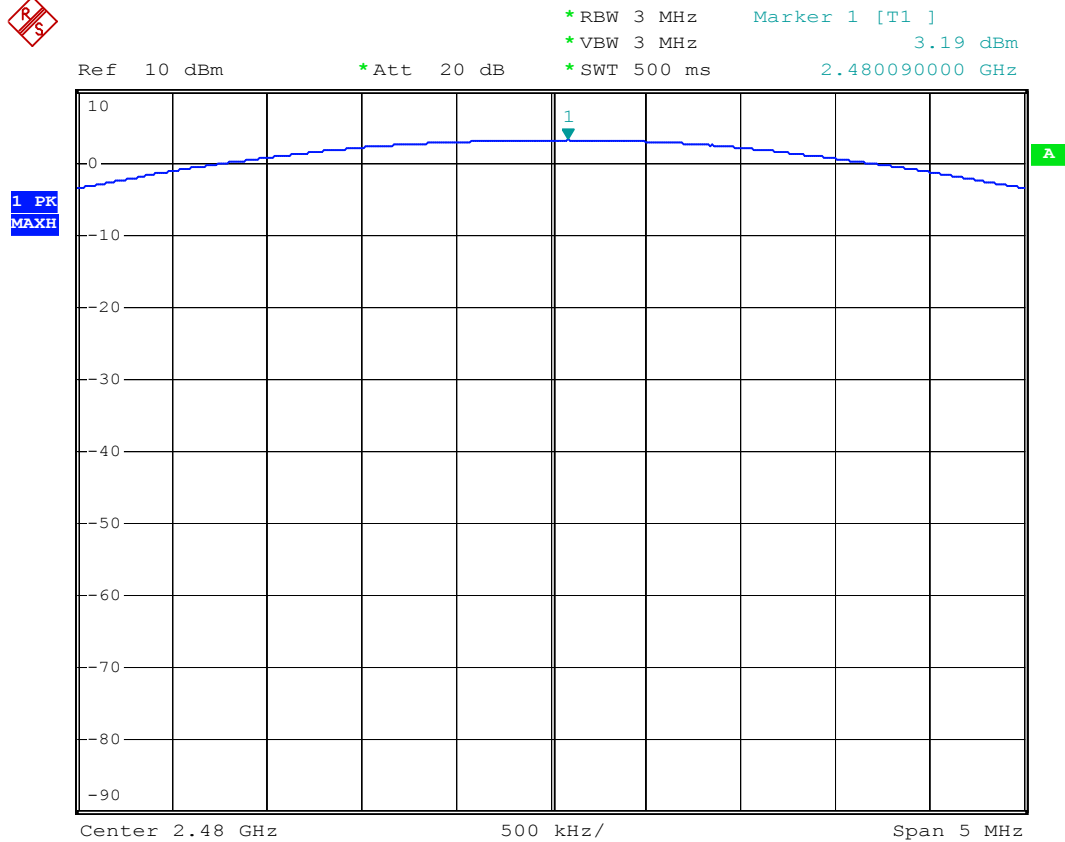

Date: 2.JUL.2005 15:12:07



5.7 100kHz Bandwidth of Frequency Band Edges

5.7.1 Measuring Instruments :

As described in chapter 6 of this test report.

5.7.2 Test Procedure :

1. The transmitter output was connected to the spectrum analyzer via a low lose cable.
2. Set both RBW and VBW of spectrum analyzer to 100kHz with suitable frequency span including 100 kHz bandwidth from band edge.
3. The band edges was measured and recorded.

5.7.3 Test Result :

- Temperature: 26°C
- Relative Humidity: 53%
- Test Enginner : Jay

Test Result in lower band (Channel 00) : PASS

Test Result in higher band(Channel 78) : PASS

5.7.4 Note on Band edge Emission

CH00 (Horizontal)

Frequency	Level	Over Limit	Limit Line	Read Level	Factor	Preamp Factor	Cable Loss	Ant Pos	Table Pos	Detect Mode
(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dBuV)	(dB)	(dB)	(dB)	(cm)	(deg)	
2390.00	49.59	-24.41	74.00	50.13	-0.54	35.46	4.43	100	0	Peak
2390.00	38.94	-15.06	54.00	39.48	-0.54	35.46	4.43	199	175	Average

CH00 (Vertical)

Frequency	Level	Over Limit	Limit Line	Read Level	Factor	Preamp Factor	Cable Loss	Ant Pos	Table Pos	Detect Mode
(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dBuV)	(dB)	(dB)	(dB)	(cm)	(deg)	
2390.00	48.36	-25.64	74.00	48.90	-0.54	35.46	4.43	200	0	Peak
2390.00	38.79	-15.21	54.00	39.33	-0.54	35.46	4.43	188	154	Average

**CH78 (Horizontal)**

Frequency	Level	Over	Limit	Read		Preamp	Cable	Ant	Table	Detect
		Limit	Line	Level	Factor	Factor	Loss	Pos	Pos	
(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dBuV)	(dB)	(dB)	(dB)	(cm)	(deg)	Mode
2483.50	73.52	-0.48	74.00	74.10	-0.58	35.51	4.52	200	0	Peak
2483.50	48.87	-5.13	54.00	49.45	-0.58	35.51	4.52	198	336	Average


CH78 (Vertical)

Frequency	Level	Over	Limit	Read		Preamp	Cable	Ant	Table	Detect
		Limit	Line	Level	Factor	Factor	Loss	Pos	Pos	
(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dBuV)	(dB)	(dB)	(dB)	(cm)	(deg)	Mode
2483.50	71.95	-2.05	74.00	72.53	-0.58	35.51	4.52	100	0	Peak
2483.50	46.58	-7.42	54.00	47.16	-0.58	35.51	4.52	147	132	Average



5.7.5 Frequency Band Edge

Mode 1: CH00 (2402 MHz)

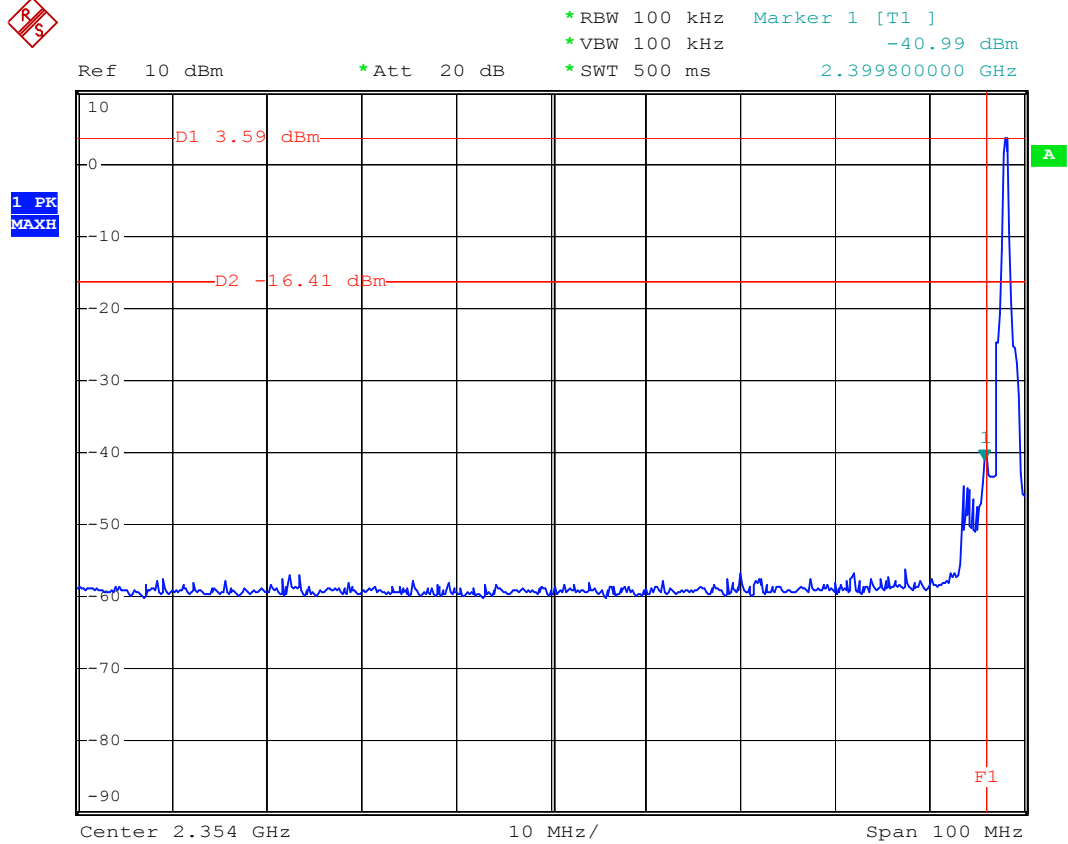

Date: 2.JUL.2005 15:28:46



Mode 3: CH78 (2480 MHz)




*RBW 100 kHz Marker 1 [T1]
*VBW 100 kHz -57.06 dBm
*SWT 500 ms 2.483700000 GHz

Ref 10 dBm

*Att 20 dB

1 PK
MAXH

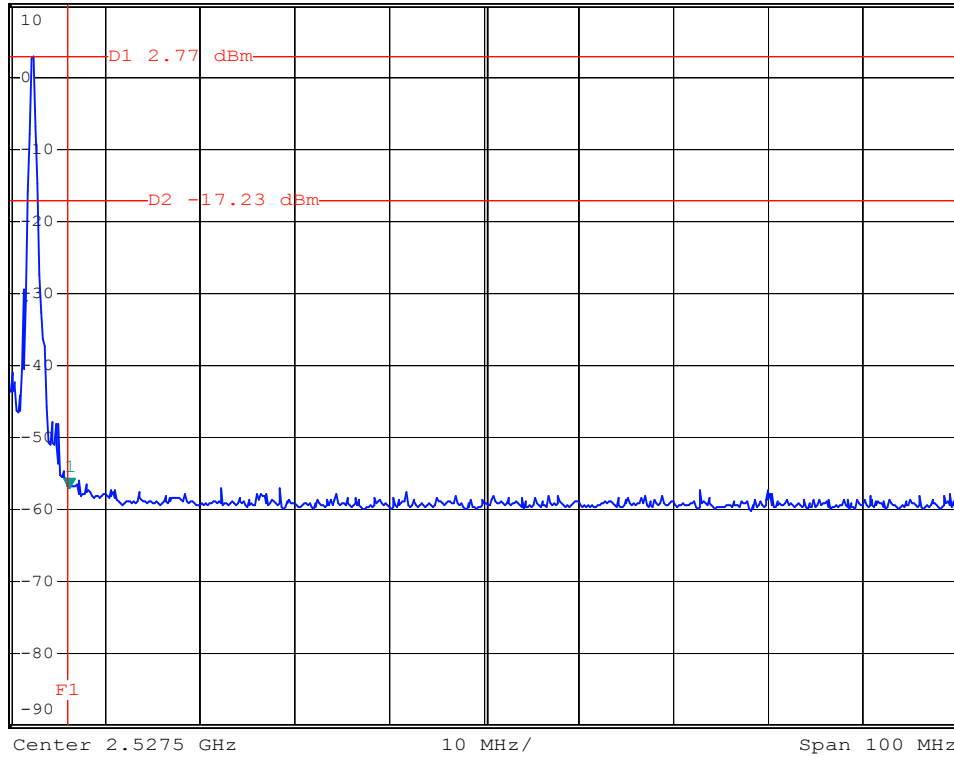

Date: 2.JUL.2005 15:27:08

5.8 Conducted Emission

5.8.1 Measuring Instruments

As described in chapter 6 of this test Report.


5.8.2 Test Procedures :

- a. The EUT was placed 0.4 meter from the conducting wall of the shielding room was kept at least 80 centimeters from any other grounded conducting surface.
- b. Connect EUT to the power port of a line impedance stabilization network (LISN).
- c. All the support units are connected to the other LISN.
- d. The LISN provides 50 ohm coupling impedance for the measuring instrument.
- e. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
- f. Both sides of AC line were checked for maximum conducted interference.
- g. The frequency range from 150 kHz to 30 MHz was searched.
- h. Set the test-receiver system to Peak Detect Function and specified bandwidth with Maximum Hold Mode.

5.8.3 Test Data


- Temperature : 26 °C
- Relating Humidity : 53 %
- Test Enginner : Jay
- Test Mode : Mode 1

■ The test that passed at minimum margin was marked by the frame in the following table.

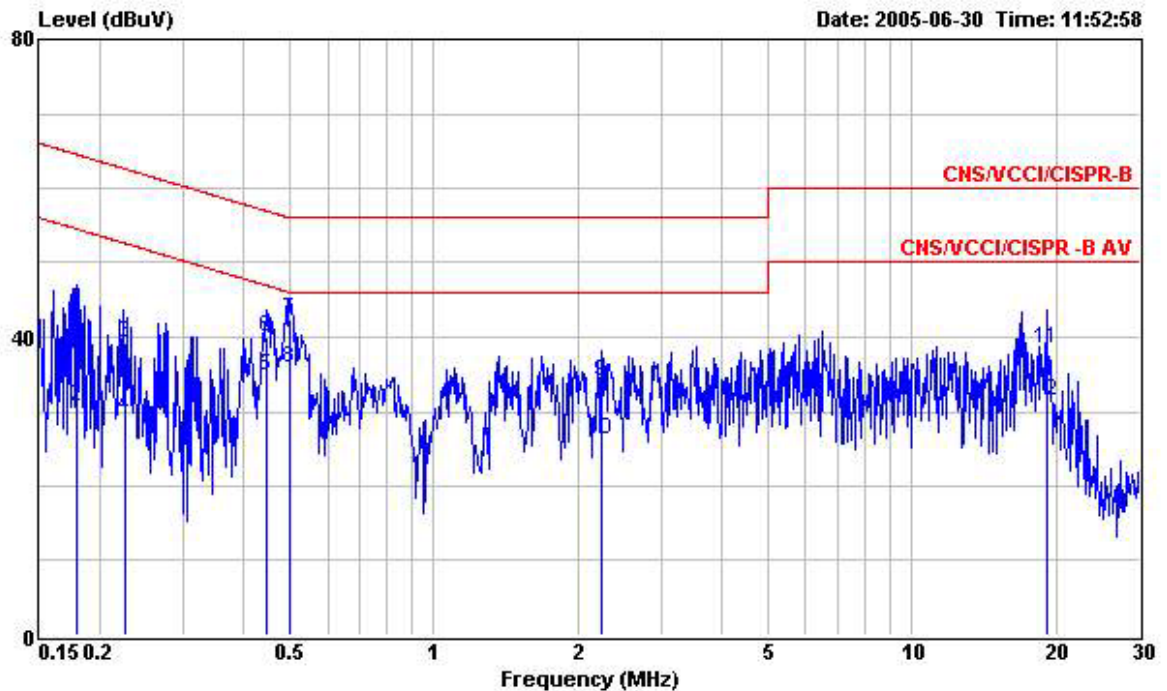

Site : CO01-HY
 Condition : CNS/VCCI/CISPR-B 2005 2001/008 LINE
 EUT : MOBILE PHONE
 Power : 110Vac/50Hz
 Model : FD562024
 Memo : PCS 1900 IDLE + MP3 PLAYER + CAMERA
 : +USB LINK MODE + EARPHONE

	Freq	Level	Over Limit	Limit Line	Read Level	Probe Factor	Cable Loss	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1	0.179	42.52	-22.01	64.53	42.40	0.10	0.02	QP
2	0.179	30.57	-23.96	54.53	30.45	0.10	0.02	Average
3	0.227	39.19	-23.38	62.57	39.06	0.10	0.03	QP
4	0.227	29.42	-23.15	52.57	29.29	0.10	0.03	Average
5	0.447	34.85	-12.08	46.93	34.70	0.10	0.05	Average
6	0.447	39.97	-16.96	56.93	39.82	0.10	0.05	QP
7	0.499	42.46	-13.56	56.02	42.31	0.10	0.05	QP
8	0.499	35.80	-10.22	46.02	35.65	0.10	0.05	Average
9	2.251	34.11	-21.89	56.00	33.93	0.12	0.06	QP
10	2.251	26.13	-19.87	46.00	25.95	0.12	0.06	Average
11	19.164	38.38	-21.62	60.00	37.95	0.30	0.13	QP
12	19.164	31.37	-18.63	50.00	30.94	0.30	0.13	Average

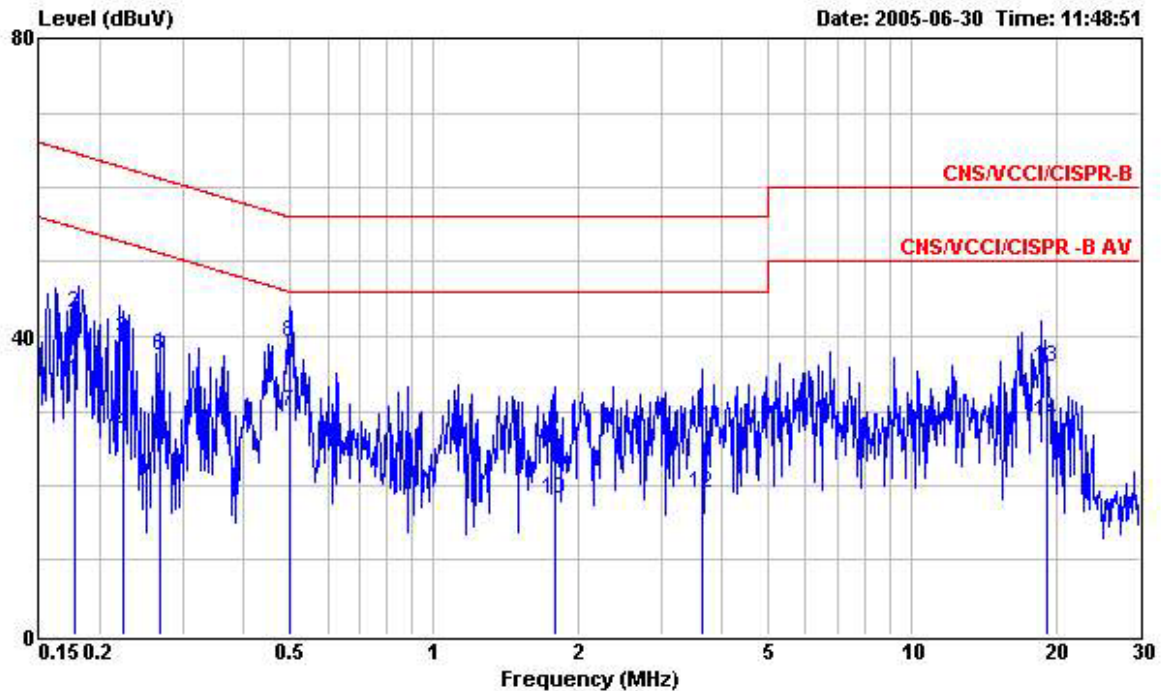

Site : CO01-HY
 Condition : CNS/VCCI/CISPR-B 2005 2001/008 NEUTRAL
 EUT : MOBILE PHONE
 Power : 110Vac/50Hz
 Model : FD562024
 Memo : PCS 1900 IDLE + MP3 PLAYER + CAMERA
 : +USB LINK MODE + EARPHONE

	Freq	Level	Over Limit	Limit Line	Read Level	Probe Factor	Cable Loss	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1	0.177	33.92	-20.70	54.62	33.80	0.10	0.02	Average
2	0.177	43.06	-21.56	64.62	42.94	0.10	0.02	QP
3	0.225	39.80	-22.83	62.63	39.67	0.10	0.03	QP
4	0.225	27.12	-25.51	52.63	26.99	0.10	0.03	Average
5	0.268	26.48	-24.69	51.17	26.35	0.10	0.03	Average
6	0.268	37.51	-23.66	61.17	37.38	0.10	0.03	QP
7	0.499	29.83	-16.19	46.02	29.68	0.10	0.05	Average
8	0.499	39.14	-16.88	56.02	38.99	0.10	0.05	QP
9	1.790	27.30	-28.70	56.00	27.14	0.10	0.06	QP
10	1.790	18.24	-27.76	46.00	18.08	0.10	0.06	Average
11	3.641	27.67	-28.33	56.00	27.43	0.19	0.05	QP
12	3.641	18.88	-27.12	46.00	18.64	0.19	0.05	Average
13	19.095	35.79	-24.21	60.00	35.36	0.30	0.13	QP
14	19.095	28.70	-21.30	50.00	28.27	0.30	0.13	Average

5.9 Radiated Emission Measurement


5.9.1 Measuring Instruments

As described in chapter 6 of this Report.

5.9.2 Test Procedures

1. The EUT was placed on a rotatable table top 0.8 meter above ground.
2. The EUT was set 3 meters from the interference receiving antenna which was mounted on the top of a variable height antenna tower.
3. The table was rotated 360 degrees to determine the position of the highest radiation.
4. The antenna is a broadband antenna and its height is varied between one meter and four meters above ground to find the maximum value of the field strength for both horizontal polarization and vertical polarization of the antenna.
5. For each suspected emission, the EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading.
6. Set the test-receiver system to Peak or CISPR quasi-peak Detect Function and specified bandwidth with Maximum Hold Mode.
7. For testing below 1GHz, If the emission level of the EUT in peak mode was 3 dB lower than the limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be repeated one by one using the quasi-peak method and reported.
8. For testing above 1GHz, the emission level of the EUT in peak mode was 20dB lower than average limit (that means the emission level in average mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.

5.9.3 Typical Test Setup Layout of Radiated Emission

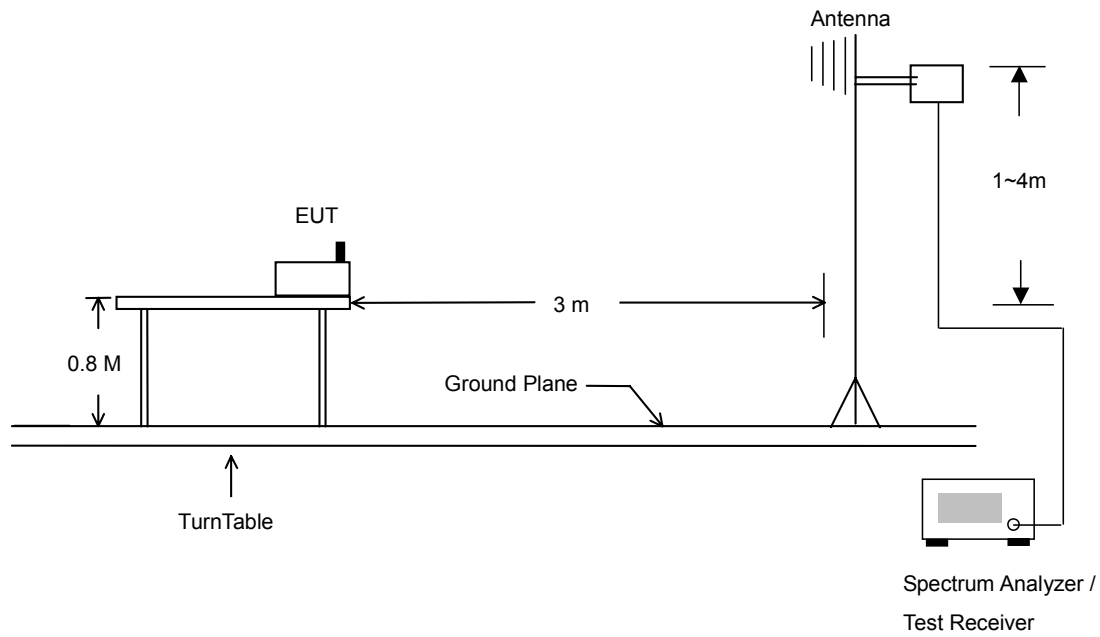

5.9.4 Test Data

- Temperature : 28 °C
- Relating Humidity : 58 %
- Test Enginner : Jay
- Test Mode : Mode 1
- Polarization : Horizontal

■ The test that passed at the minimum margin was marked by the frame in the following test record

	Freq	Level	Over Limit	Limit Line	Read Level	Factor	Preamp Factor	Cable Loss	Ant Pos	Table Pos	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB	cm	deg	
1	2390.00	38.94	-15.06	54.00	39.48	-0.54	35.46	4.43	199	175	Average
2	2390.00	49.59	-24.41	74.00	50.13	-0.54	35.46	4.43	100	0	Peak
3 @	2402.00	97.58			98.12	-0.54	35.46	4.43	100	0	Peak
4 X	2402.00	69.45			69.99	-0.54	35.46	4.43	199	175	Average
5	2483.50	43.40	-30.60	74.00	43.97	-0.58	35.51	4.52	100	0	Peak
6	2483.50	38.78	-15.22	54.00	39.36	-0.58	35.51	4.52	199	175	Average

Remark: #3 and #4 Fundamental Signal

- Test Mode : Mode 1
- Polarization : Vertical

■ The test that passed at minimum margin was marked by the frame in the following table.

	Freq	Level	Over Limit	Limit Line	Read Level	Factor	Preamp Factor	Cable Loss	Ant Pos	Table Pos	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB	cm	deg	
1	2390.00	48.36	-25.64	74.00	48.90	-0.54	35.46	4.43	200	0	Peak
2	2390.00	38.79	-15.21	54.00	39.33	-0.54	35.46	4.43	188	154	Average
3 X	2402.00	69.59			70.13	-0.54	35.46	4.43	188	154	Average
4 @	2402.00	102.19			102.75	-0.56	35.46	4.43	200	0	Peak
5	2483.50	43.91	-30.09	74.00	44.48	-0.58	35.51	4.52	200	0	Peak
6	2483.50	38.75	-15.25	54.00	39.33	-0.58	35.51	4.52	188	154	Average

Remark: #3 and #4 Fundamental Signal

- Test Mode : Mode 2
- Polarization : Horizontal

The test that passed at minimum margin was marked by the frame in the following table.

	Freq	Level	Over Limit	Limit Line	Read Level	Factor	Preamp Factor	Cable Loss	Ant Pos	Table Pos	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB	cm	deg	
1	131.79	32.00	-11.50	43.50	50.49	-18.49	31.59	1.59	400	0	Peak
2	166.89	32.65	-10.85	43.50	52.27	-19.61	31.43	1.94	400	0	Peak
3 @	267.33	36.07	-9.93	46.00	51.84	-15.77	30.90	2.23	400	0	Peak

	Freq	Level	Over Limit	Limit Line	Read Level	Factor	Preamp Factor	Cable Loss	Ant Pos	Table Pos	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB	cm	deg	
1 @	400.80	40.71	-5.29	46.00	52.51	-11.80	30.78	3.08	100	0	Peak
2 @	665.40	36.56	-9.44	46.00	44.01	-7.45	30.64	4.54	100	0	Peak
3 @	780.90	40.12	-5.88	46.00	44.55	-4.43	30.07	4.29	100	0	Peak

	Freq	Level	Over Limit	Limit Line	Read Level	Factor	Preamp Factor	Cable Loss	Ant Pos	Table Pos	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB	cm	deg	
1	2390.00	44.32	-29.68	74.00	44.87	-0.54	35.46	4.43	200	0	Peak
2	2390.00	38.89	-15.11	54.00	39.43	-0.54	35.46	4.43	165	9	Average
3 @	2441.00	101.15			101.72	-0.57	35.47	4.46	200	0	Peak
4 @	2441.00	71.70			72.27	-0.57	35.47	4.46	165	9	Average
5	2483.50	43.40	-30.60	74.00	43.98	-0.58	35.51	4.52	200	0	Peak
6	2483.50	38.81	-15.19	54.00	39.39	-0.58	35.51	4.52	165	9	Average

Remark: #3 and #4 Fundamental Signal

- Test Mode : Mode 2
- Polarization : Vertical

■ The test that passed at minimum margin was marked by the frame in the following table.

	Freq	Level	Over Limit	Limit Line	Read Level	Factor	Preamp Factor	Cable Loss	Ant Pos	Table Pos	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB	cm	deg	
1 @	74.28	36.15	-3.85	40.00	59.92	-23.77	31.61	1.21	400	0	Peak
2 @	87.24	36.72	-3.28	40.00	58.51	-21.79	31.56	1.32	400	0	Peak
3 @	195.78	36.03	-7.47	43.50	55.55	-19.52	31.26	1.98	400	0	Peak

	Freq	Level	Over Limit	Limit Line	Read Level	Factor	Preamp Factor	Cable Loss	Ant Pos	Table Pos	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB	cm	deg	
1 @	453.30	36.81	-9.19	46.00	47.92	-11.12	30.83	3.26	100	1	Peak
2 @	500.90	36.97	-9.03	46.00	46.86	-9.89	30.52	3.52	100	1	Peak
3 @	666.80	41.03	-4.97	46.00	48.55	-7.51	30.64	4.46	100	1	Peak

	Freq	Level	Over Limit	Limit Line	Read Level	Factor	Preamp Factor	Cable Loss	Ant Pos	Table Pos	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB	cm	deg	
1	2390.00	44.88	-29.12	74.00	45.42	-0.54	35.46	4.43	100	0	Peak
2	2390.00	38.93	-15.07	54.00	39.47	-0.54	35.46	4.43	100	279	Average
3 @	2441.00	100.68			101.25	-0.57	35.47	4.46	100	0	Peak
4 @	2441.00	71.61			72.17	-0.56	35.49	4.49	100	279	Average
5	2483.50	43.60	-30.40	74.00	44.18	-0.58	35.51	4.52	100	0	Peak
6	2483.50	38.81	-15.19	54.00	39.39	-0.58	35.51	4.52	100	279	Average

Remark: #3 and #4 Fundamental Signal

- Test Mode : Mode 3
- Polarization : Horizontal

■ The test that passed at minimum margin was marked by the frame in the following table.

	Freq	Level	Over Limit	Limit Line	Read Level	Factor	Preamplifier Factor	Cable Loss	Ant Pos	Table Pos	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB	cm	deg	
1 @	2390.00	38.89	-15.11	54.00	39.43	-0.54	35.46	4.43	198	336	Average
2 @	2390.00	44.03	-29.97	74.00	44.57	-0.54	35.46	4.43	200	0	Peak
3 @	2480.00	98.69			99.27	-0.58	35.51	4.52	200	0	Peak
4 @	2480.00	70.44			71.02	-0.58	35.51	4.52	198	336	Average
5 @	2483.50	73.52	-0.48	74.00	74.10	-0.58	35.51	4.52	200	0	Peak
6 @	2483.50	48.87	-5.13	54.00	49.45	-0.58	35.51	4.52	198	336	Average

Remark: #3 and #4 Fundamental Signal.

- Test Mode : Mode 3
- Polarization : Vertical

■ The test that passed at minimum margin was marked by the frame in the following table.

	Freq	Level	Over Limit	Limit Line	Read Level	Factor	Preamplifier Factor	Cable Loss	Ant Pos	Table Pos	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB	cm	deg	
1 @	2390.00	38.93	-15.07	54.00	39.47	-0.54	35.46	4.43	147	132	Average
2 @	2390.00	43.92	-30.08	74.00	44.47	-0.54	35.46	4.43	100	0	Peak
3 @	2480.00	99.78			100.36	-0.58	35.51	4.52	100	0	Peak
4 @	2480.00	68.45			69.03	-0.58	35.51	4.52	147	132	Average
5 @	2483.50	71.95	-2.05	74.00	72.53	-0.58	35.51	4.52	100	0	Peak
6 @	2483.50	46.58	-7.42	54.00	47.16	-0.58	35.51	4.52	147	132	Average

Remark: #4 and #5 Fundamental Signal

Remark: The spurious emission is too low to be taken except the data above.



5.10 Antenna Requirements

5.10.1 Standard Applicable

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no other antenna except assembled by the responsible party shall be used with the device.

And according to FCC 47 CFR Section 15.247 (b), if directional gain of transmitting antennas is greater than 6dBi, the power shall be reduced by the same level in dB comparing to gain minus 6dBi.

5.10.2 Antenna Connected Construction

The antenna used in this product is a Fixed Internal Antenna with PIFA connector and it is considered to meet antenna requirement of FCC.

6. List of Measuring Equipments Used

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Due Date	Remark
EMC Receiver	R&S	ESCS 30	100174	9kHz – 2.75GHz	Feb. 19, 2005	Feb. 19, 2006	Conduction (CO01-HY)
LISN	MessTec	NNB-2/16 Z	2001/009	9kHz – 30MHz	Apr. 26, 2005	Apr. 26, 2006	Conduction (CO01-HY)
LISN (Support Unit)	MessTec	NNB-2/16 Z	2001/008	9kHz – 30MHz	May 06, 2005	May 06, 2006	Conduction (CO01-HY)
EMI Filter	LINDGREN	LRE-2060	1004	< 450Hz	N/A	N/A	Conduction (CO01-HY)
EMI Filter	LINDGREN	N6006	201052	0 – 60Hz	N/A	N/A	Conduction (CO01-HY)
RF Cable-CON	Suhner Switzerland	RG223/U	CB029	9kHz – 30MHz	Dec. 23, 2004	Dec. 23, 2005	Conduction (CO01-HY)
Spectrum analyzer	Agilent	E4408B	MY44211030	9KHz-26.5GHz	Jul. 27, 2004	Jul. 26, 2005	Radiation (03CH06-HY)
Receiver	R&S	ESCS30	100356	9KHz-2.75GHz	Jun. 29, 2005	Jun. 27, 2006	Radiation (03CH06-HY)
Controller	INN-CO	CO2000	114/8000604/L	N/A	N/A	N/A	Radiation (03CH06-HY)
Bilog Antenna	SCHAFFNER	CBL6112B	2885	30MHz -2GHz	Nov. 21, 2004	Nov. 20, 2005	Radiation (03CH06-HY)
Horn Antenna	Com-Power	AH118	071025	1G-18G	Feb. 01, 2005	Jun. 31, 2006	Radiation (03CH06-HY)
SHF-EHF Horn	SCHWARZBECK	BBHA 9170	9170-249	14G - 40G	Jul. 21, 2004	Jul. 20, 2005	Radiation (03CH06-HY)
Turn Table	INN-CO	DS2000	420/650/00	0 ~ 360 degree	N/A	N/A	Radiation (03CH06-HY)
Antenna Mast	INN-CO	MM3000	114/8000604/L	1 m - 4 m	N/A	N/A	Radiation (03CH06-HY)
Base Station Emulator	Agilent	E5515C	GB43460754	Qual-band	Jan. 12, 2004	Jan. 12, 2006	Base Station
Radio Communication Tester	R&S	CMU200	105934	Qual-band	Aug. 24, 2004	Aug. 24, 2005	Base Station
Thermal Chamber	Ten Billion	TTH-D35P	N/A	N/A	NCR	NCR	EMS Chamber

7. Uncertainty Evaluation

Uncertainty of Radiated Emission Evaluation (30MHz ~ 1000MHz)

Contribution	Uncertainty of x_i		$u(x_i)$
	dB	Probability Distribution	
Receiver reading	0.41	Normal(k=2)	0.21
Antenna factor calibration	0.83	Normal(k=2)	0.42
Cable loss calibration	0.25	Normal(k=2)	0.13
Pre Amplifier Gain calibration	0.27	Normal(k=2)	0.14
RCV/SPA specification	2.50	Rectangular	0.72
Antenna Factor Interpolation for Frequency	1.00	Rectangular	0.29
Site imperfection	1.43	Rectangular	0.83
Mismatch Receiver VSWR $\Gamma_1 = 0.20$ Antenna VSWR $\Gamma_2 = 0.23$ Uncertainty = $20\log(1 - \Gamma_1 \Gamma_2)$	+0.39/-0.41	U-shaped	0.28
combined standard uncertainty $U_c(y)$	1.27		
Measuring uncertainty for a level of confidence of 95% $U = 2U_c(y)$	2.54		

Uncertainty of Radiated Emission Evaluation (1GHz ~ 40GHz)

Contribution	Uncertainty of x_i		$u(x_i)$	C_i	$C_i * u(x_i)$
	dB	Probability Distribution			
Receiver reading	± 0.10	Normal(k=1)	0.10	1	0.10
Antenna factor calibration	± 1.70	Normal(k=2)	0.85	1	0.85
Cable loss calibration	± 0.50	Normal(k=2)	0.25	1	0.25
Receiver Correction	± 2.00	Rectangular	1.15	1	1.15
Antenna Factor Directional	± 1.50	Rectangular	0.87	1	0.87
Site imperfection	± 2.80	Triangular	1.14	1	1.14
Mismatch Receiver VSWR $\Gamma_1 = 0.197$ Antenna VSWR $\Gamma_2 = 0.194$ Uncertainty = $20\log(1 - \Gamma_1 \Gamma_2 \Gamma_3)$	+0.34/-0.35	U-shaped	0.244	1	0.244
Combined standard uncertainty $U_c(y)$	2.36				
Measuring uncertainty for a level of confidence of 95% $U = 2U_c(y)$	4.72				