

APPLICANT

Detection Systems, Inc.
130 Perinton Parkway
Fairport, NY 14450

MANUFACTURER

Detection Systems, Inc.
130 Perinton Parkway
Fairport, NY 14450

TEST SPECIFICATION: ~~FCC Rules and Regulations Part 15, Subpart C, Para. 15.231~~

TEST PROCEDURE: ~~ANSI C63.4:1992~~

TEST SAMPLE DESCRIPTION

BRANDNAME: Detection Systems, Inc. MODEL: SE88

TYPE: Pulsed RF Transmitter

POWER REQUIREMENTS: 3 VDC derived from CR2032 lithium battery

FREQUENCY OF OPERATION: 304 MHz

TESTS PERFORMED

Para. 15.231(e), Radiated Emissions, Fundamental and Harmonics

Para. 15.231(b), Radiated Emissions, Spurious Case

Para. 15.231(c), Occupied Bandwidth

Duty Cycle Determination

REPORT OF MEASUREMENTS

Applicant: Detection Systems, Inc.

Device: Pulsed RF Transmitter

FCC ID: ESV-0117-05



Retlif Testing Laboratories

Test Report No. R-9089-1

FCC ID: ESV-0117-05

REPORT OF MEASUREMENTS (continued)

TEST RESULTS

- 15.231 (a) - The device is used as a transmitter for security purposes.
- 15.231 (a)(1) & - The transmitter is manually operated and ceases transmission within 5
15.231(2) seconds after deactivation.
- 15.231 (a)(3) - The transmitter does perform periodic transmissions which exceed one per hour. However, the device complies the additional requirements of paragraph 15.231(e).
- 15.231 (a)(4)- The device is employed for RC purposes involving security and when activated to signal an alarm, operates during the pendency of the alarm condition.
- 15.231 (b) - The fundamental field strength did not exceed 2,233 $\mu\text{V/M}$ (Average) at a test distance of 3 meters. In addition, the requirements of section 15.35 for averaging pulsed emissions and for limiting peak emissions were met.
- The field strength of harmonic and spurious emissions did not exceed 223 $\mu\text{V/M}$ (AVERAGE).
- 15.231 (c) - The device operates at 304 MHz. The bandwidth of emissions did not exceed 0.25% of the operating frequency (760 kHz).


DETERMINATION OF FIELD STRENGTH LIMITS

The field strength limits shown below are found in Section 15.231.

	Frequency		Limit
F1	=	260	3750 = L1
Fo	=	304	Lo
F2	=	470	12500 = L2

The formula below was utilized to determine the limits:

$$\text{Limit} = L1 + [(Fo-F1)(L2-L1)/(F2-F1)]$$




Retlif Testing Laboratories

Test Report No. R-9089-1
FCC ID: ESV 0117 05

Solving yields:

Fundamental Limit = 2,233 $\mu\text{V/M}$ (AVERAGE) @ 3 Meters

Harmonic Limit = 223 $\mu\text{V/M}$ (AVERAGE) @ 3 Meters



Retlif Testing Laboratories

Test Report No. R-9089-1

FCC ID: ESV 0117 05

REPORT OF MEASUREMENTS (continued)

DETERMINATION OF DUTY CYCLE

Duty cycle information was provided by Detection System. Details can be found in a separate file named SE88 Tech-descrip.doc

SPECTRUM ANALYZER DESENSITIZATION CONSIDERATIONS

Due to the nature of the emissions being measured, care was taken to ensure that the resolution bandwidth of the spectrum analyzer was adequate to provide accurate measurements. The following formula was utilized:

Setting pulse desensitization equal to zero and utilizing the minimum observed pulse width of 100 μ s yields a minimum required bandwidth of 6,667 Hz. FCC specified bandwidths of 100kHz and 1MHz were utilized below and above 1GHz, respectively.

GENERAL NOTES

1. All readings were taken utilizing a peak detector function at a test distance of 3 meters.
2. The duty cycle was applied to the peak readings in order to determine the average value of the emissions.
3. All measurements were made with a 3 VDC derived from a new CR2032 lithium battery.
4. The frequency range was scanned from 30 MHz to 3.1 GHz. All emissions not reported were more than 20 dB below the specified limit.



Retlif Testing Laboratories

Test Report No. R-9089-1
FCC ID: ESV 0117 05

EQUIPMENT LIST

Radiated Emissions

EN	Type	Manufacturer	Description	Model No.	Cal Date	Due Date
128C	Double Ridge Guide	Eaton Corporation	1 GHz - 18 GHz	96001	09/18/2000	09/18/2001
133	Broadband Pre-Amplifier	Electro-Metrics	10 kHz - 1 GHz, 26dB	BPA-1000	06/26/2001	06/26/2002
141A	Graphics Plotter	Hewlett Packard	N/A	7470A	03/05/2001	03/05/2002
206B	6.0 dB Attenuator	Texscan	0 - 1.0 GHz	FP-50 - 6 dB	06/26/2001	06/26/2002
523	Biconilog	Electro-Mechanics	26 - 2000 MHz	3142B	06/08/2000	08/08/2001
543	Preamplifier	Hewlett Packard	1.0 GHz - 26.5 GHz	8449B	06/27/2001	06/27/2002
544	EMC Analyzer	Hewlett Packard	9.0 kHz - 1.8 GHz	8591EM	12/14/2000	12/14/2001
617	Interference Analyzer	Electro-Metrics	10 kHz - 1 GHz	EMC-30	02/27/2001	02/27/2002
R105	Spectrum Analyzer	Agilent	9 kHz - 26.5 GHz	E4407B	02/17/2001	02/17/2002



Retlif Testing Laboratories


Test Report No. R-9089-1

FCC ID: ESV-0117-05

FCC 15.231

RADIATED EMISSIONS, FUNDAMENTAL & SPURIOUS CASE

Please refer to separate electronic file named Refundharm.doc and Respur.doc



Retlif Testing Laboratories


Test Report No. R-9089-1

FCC ID: ESV-0117-05

FCC 15.231(c)

OCCUPIED BANDWIDTH


Please refer to separate electronic file named Occbw.pdf



Retlif Testing Laboratories

Test Report No. R-9089-1

FCC ID: ESV-0117-05

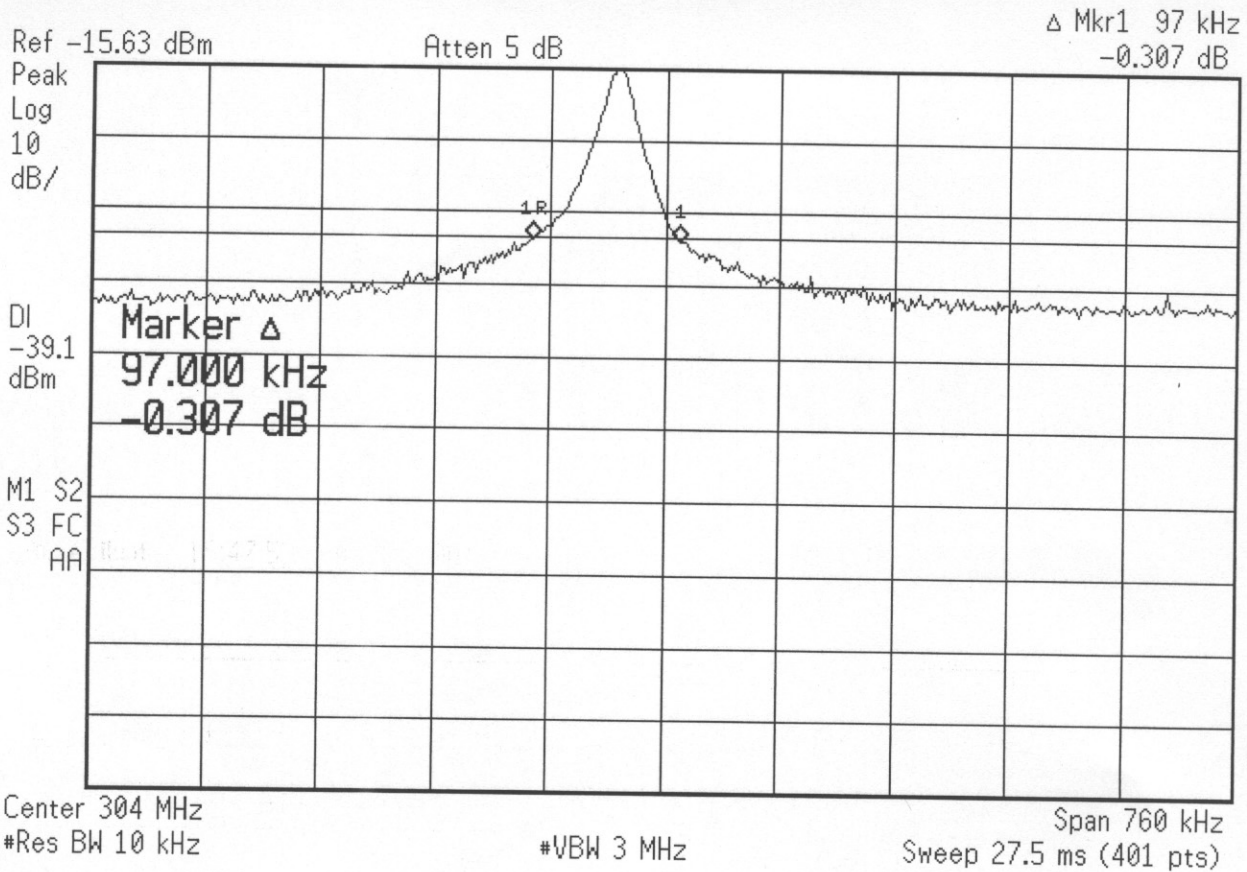

Customer:	Detection Systems
Test Sample:	304 MHz pulsed RF Transmitter
Model No.:	SE88 FCC ID: ESV-0117-05
Test Method:	Occupied Bandwidth
Notes:	Bandwidth does not exceed 0.25% of center frequency (760 kHz) at the 20 dB down points
Date:	July 13, 2001
Tech:	T. Schneider
Sheet:	1 of 1



Retlif Testing Laboratories

Report No. R-9089-11

Test Method:	FCC Part 15 Subpart C Radiated Emissions, Fundamental & Harmonic Emissions						
Customer:	Detection Systems			Job No.	R-9089-1		
Test Sample:	304MHz Transmitter			Paragraph:	15.231		
Model No.:	SE88			FCC ID:	ESV-0117-05		
Operating Mode:	Continuously Transmitting a 304MHz Signal						
Technician:	Peter Lananna			Date:	July 17, 2001		
Notes:	Test Distance: 3 Meters Detector: Peak, Unless otherwise specified						
Test Freq.	Antenna Pol./Height	EUT Orientation	Meter Reading	Correction Factor	Corrected Reading	Converted Reading	Peak Limit
MHz	(V/H)/Meters	X / Y / Z	dBuV	dB	dBuV/m	uV/m	uV/m
304	H / 2.0	X	80.6	-4.2	76.4	6606.9	22,333
	H / 1.0	Y	84.3	-4.2	80.1	10115.8	
	H / 2.0	Z	80.3	-4.2	76.1	6382.6	
	V / 1.8	X	84.7	-4.2	80.5	10592.5	
	V / 1.0	Y	70.8	-4.2	66.6	2138.0	
304	V / 2.0	Z	83.4	-4.2	79.2	9120.1	22,333
608	H / 1.0	X	39.0	3.4	42.4	131.8QP	200QP
	H / 1.3	Y	39.0	3.4	42.4	131.8QP	
	H / 2.0	Z	36.0	3.4	39.4	93.3QP	
	V / 1.0	X	37.2	3.4	40.6	107.2QP	
	V / 1.8	Y	35.0	3.4	38.4	83.2QP	
608	V / 1.0	Z	40.0	3.4	43.4	147.9QP	200QP
912	H / 1.0	X	22.6	8.4	31.0	35.5*	2233
	H / 1.0	Y	22.6	8.4	31.0	35.5*	
	H / 1.0	Z	39.2	8.4	47.6	239.9	
	V / 1.0	X	41.4	8.4	49.8	309.0	
	V / 1.0	Y	22.6	8.4	31.0	35.5*	
912	V / 1.0	Z	42.7	8.4	51.1	358.9	2233
1216	H / 2.3	X	50.1	-3.2	46.9	221.3	5000
	H / 2.0	Y	49.3	-3.2	46.1	201.8	
	H / 1.0	Z	47.7	-3.2	44.5	167.9	
	V / 1.3	X	52.4	-3.2	49.2	288.4	
	V / 1.8	Y	50.0	-3.2	46.8	218.8	
1216	V / 1.8	Z	49.4	-3.2	46.2	204.2	5000
1520	H / 1.0	X	39.6	-0.3	39.3	92.3*	5000
	H / 1.0	Y	39.6	-0.3	39.3	92.3*	
	H / 1.0	Z	39.6	-0.3	39.3	92.3*	
	V / 1.0	X	39.6	-0.3	39.3	92.3*	
	V / 1.0	Y	39.6	-0.3	39.3	92.3*	
1520	V / 1.0	Z	39.6	-0.3	39.3	92.3*	5000
The frequency range was scanned from 30 MHz to 3.1 GHz. All emissions not recorded were more							
Than 10 dB below the specified limit. Emissions from the EUT do not exceed the specified limits.							
*=Noise Floor Measurements (Minimum system sensitivity)							



Retlif Testing Laboratories

Retlif Job Number R-9089-1

Test Method:	FCC Part 15 Subpart C Radiated Emissions, Fundamental & Harmonic Emissions						
Customer:	Detection Systems	Job No.:	R-9089-1				
Test Sample:	304MHz Transmitter	Paragraph:	15.231				
Model No.:	SE88	FCC ID:	ESV-0117-05				
Operating Mode:	Continuously Transmitting a 304MHz Signal						
Technician:	Peter Lananna	Date:	July 17, 2001				
Notes:	Test Distance: 3 Meters Detector: Peak, unless otherwise specified						
Test Freq.	Antenna Pol./Height	EUT Orientation	Meter Reading	Correction Factor	Corrected Reading	Converted Reading	Peak Limit
MHz	(V/H)-Meters	X / Y / Z	dBuV	dB	dBuV/m	uV/m	uV/m
1824	H / 1.0	X	39.9	3.0	42.9	139.6*	2233
	H / 1.0	Y	39.9	3.0	42.9	139.6*	
	H / 1.0	Z	39.9	3.0	42.9	139.6*	
	V / 1.0	X	39.9	3.0	42.9	139.6*	
	V / 1.0	Y	39.9	3.0	42.9	139.6*	
1824	V / 1.0	Z	39.9	3.0	42.9	139.6*	2233
2128	H / 1.0	X	36.4	0.4	36.8	69.2*	2233
	H / 1.0	Y	36.4	0.4	36.8	69.2*	
	H / 1.0	Z	36.4	0.4	36.8	69.2*	
	V / 1.0	X	36.4	0.4	36.8	69.2*	
	V / 1.0	Y	36.4	0.4	36.8	69.2*	
2128	V / 1.0	Z	36.4	0.4	36.8	69.2*	2233
2432	H / 1.0	X	35.2	3.8	39.0	89.1*	2233
	H / 1.0	Y	35.2	3.8	39.0	89.1*	
	H / 1.0	Z	35.2	3.8	39.0	89.1*	
	V / 1.0	X	35.2	3.8	39.0	89.1*	
	V / 1.0	Y	35.2	3.8	39.0	89.1*	
2432	V / 1.0	Z	35.2	3.8	39.0	89.1*	2233
2736	H / 1.0	X	34.4	7.1	41.5	118.9*	5000
	H / 1.0	Y	34.4	7.1	41.5	118.9*	
	H / 1.0	Z	34.4	7.1	41.5	118.9*	
	V / 1.0	X	34.4	7.1	41.5	118.9*	
	V / 1.0	Y	34.4	7.1	41.5	118.9*	
2736	V / 1.0	Z	34.4	7.1	41.5	118.9*	5000
3040	H / 1.0	X	39.6	6.4	46.0	199.5*	2233
	H / 1.0	Y	39.6	6.4	46.0	199.5*	
	H / 1.0	Z	39.6	6.4	46.0	199.5*	
	V / 1.0	X	39.6	6.4	46.0	199.5*	
	V / 1.0	Y	39.6	6.4	46.0	199.5*	
3040	V / 1.0	Z	39.6	6.4	46.0	199.5*	2233
The frequency range was scanned from 30 MHz to 3.1 GHz. All emissions not recorded were more Than 10 dB below the specified limit. Emissions from the EUT do not exceed the specified limits.							
*=Noise Floor Measurements (Minimum system sensitivity)							



Retlif Testing Laboratories

Retlif Job Number R-9089-1

Test Method:	FCC Part 15 Subpart C Radiated Emissions, Fundamental & Harmonic Emissions						
Customer:	Detection Systems			Job No.	R-9089-1		
Test Sample:	304MHz Transmitter			Paragraph:	15.231		
Model No.:	SE88			FCC ID:	ESV-0117-05		
Operating Mode:	Continuously Transmitting a 304MHz Signal						
Technician:	Peter Lananna			Date:	July 17, 2001		
Notes:	Test Distance: 3 Meters			Duty Cycle: 7.6%			
	Detector: Peak, unless otherwise specified			Duty Cycle Correction: - 22.4 dB			
Test Freq.	Antenna Pol./Height	EUT Orientation	Peak Reading	Correction Factor	Corrected Reading	Converted Reading	Avg. Limit
MHz	(V/H)-Meters	X / Y / Z	dBuV	dB	dBuV/m	UV/m	uV/m
304	H / 2.0	X	76.4	-22.4	54.0	501.2	2233
	H / 1.0	Y	80.1	-22.4	57.7	767.4	
	H / 2.0	Z	76.1	-22.4	53.7	484.2	
	V / 1.8	X	80.5	-22.4	58.1	803.5	
	V / 1.0	Y	66.6	-22.4	44.2	162.2	
304	V / 2.0	Z	79.2	-22.4	56.8	691.8	2233
608	H / 1.0	X	42.4	N/A	42.4	131.8QP	200QP
	H / 1.3	Y	42.4	N/A	42.4	131.8QP	
	H / 2.0	Z	39.4	N/A	39.4	93.3QP	
	V / 1.0	X	40.6	N/A	40.6	107.2QP	
	V / 1.8	Y	38.4	N/A	38.4	83.2QP	
608	V / 1.0	Z	43.4	N/A	43.4	147.9QP	200QP
912	H / 1.0	X	31.0	-22.4	8.6	2.7*	223
	H / 1.0	Y	31.0	-22.4	8.6	2.7*	
	H / 1.0	Z	47.6	-22.4	25.2	18.2	
	V / 1.0	X	49.8	-22.4	27.4	23.4	
	V / 1.0	Y	31.0	-22.4	8.6	2.7*	
912	V / 1.0	Z	51.1	-22.4	28.7	27.2	223
1216	H / 2.3	X	46.9	-22.4	24.5	16.8	500
	H / 2.0	Y	46.1	-22.4	23.7	15.3	
	H / 1.0	Z	44.5	-22.4	22.1	12.7	
	V / 1.3	X	49.2	-22.4	26.8	21.9	
	V / 1.8	Y	46.8	-22.4	24.4	16.6	
1216	V / 1.8	Z	46.2	-22.4	23.8	15.5	500
1520	H / 1.0	X	39.3	-22.4	16.9	7.0*	500
	H / 1.0	Y	39.3	-22.4	16.9	7.0*	
	H / 1.0	Z	39.3	-22.4	16.9	7.0*	
	V / 1.0	X	39.3	-22.4	16.9	7.0*	
	V / 1.0	Y	39.3	-22.4	16.9	7.0*	
1520	V / 1.0	Z	39.3	-22.4	16.9	7.0*	500
The frequency range was scanned from 30 MHz to 3.1 GHz. All emissions not recorded were more							
Than 10 dB below the specified limit. Emissions from the EUT do not exceed the specified limits							
*=Noise Floor Measurements (Minimum system sensitivity)							



Retlif Testing Laboratories

Retlif Job Number R-9089-1

Test Method:	FCC Part 15 Subpart C Radiated Emissions, Fundamental & Harmonic Emissions						
Customer:	Detection Systems	Job No.:	R-9089-1				
Test Sample:	304MHz Transmitter	Paragraph:	15.231				
Model No.:	SE88	FCC ID:	ESV-0117-05				
Operating Mode:	Continuously Transmitting a 304MHz Signal						
Technician:	Peter Lananna	Date:	July 17, 2001				
Notes:	Test Distance: 3 Meters		Duty Cycle: 7.6%				
	Detector: Peak, unless otherwise specified		Duty Cycle Correction: - 22.4 dB				
Test Freq.	Antenna Pol./Height	EUT Orientation	Peak Reading	Correction Factor	Corrected Reading	Converted Reading	Avg. Limit
MHz	(V/H)-Meters	X / Y / Z	dBuV	dB	dBuV/m	uV/m	UV/m
1824	H / 1.0	X	42.9	-22.4	20.5	10.6*	223
	H / 1.0	Y	42.9	-22.4	20.5	10.6*	
	H / 1.0	Z	42.9	-22.4	20.5	10.6*	
	V / 1.0	X	42.9	-22.4	20.5	10.6*	
	V / 1.0	Y	42.9	-22.4	20.5	10.6*	
1824	V / 1.0	Z	42.9	-22.4	20.5	10.6*	223
2128	H / 1.0	X	36.8	-22.4	14.4	5.2*	223
	H / 1.0	Y	36.8	-22.4	14.4	5.2*	
	H / 1.0	Z	36.8	-22.4	14.4	5.2*	
	V / 1.0	X	36.8	-22.4	14.4	5.2*	
	V / 1.0	Y	36.8	-22.4	14.4	5.2*	
2128	V / 1.0	Z	36.8	-22.4	14.4	5.2*	223
2432	H / 1.0	X	39.0	-22.4	16.6	6.8*	223
	H / 1.0	Y	39.0	-22.4	16.6	6.8*	
	H / 1.0	Z	39.0	-22.4	16.6	6.8*	
	V / 1.0	X	39.0	-22.4	16.6	6.8*	
	V / 1.0	Y	39.0	-22.4	16.6	6.8*	
2432	V / 1.0	Z	39.0	-22.4	16.6	6.8*	223
2736	H / 1.0	X	41.5	-22.4	19.1	9.0*	223
	H / 1.0	Y	41.5	-22.4	19.1	9.0*	
	H / 1.0	Z	41.5	-22.4	19.1	9.0*	
	V / 1.0	X	41.5	-22.4	19.1	9.0*	
	V / 1.0	Y	41.5	-22.4	19.1	9.0*	
2736	V / 1.0	Z	41.5	-22.4	19.1	9.0*	223
3040	H / 1.0	X	46.0	-22.4	23.6	15.1*	223
	H / 1.0	Y	46.0	-22.4	23.6	15.1*	
	H / 1.0	Z	46.0	-22.4	23.6	15.1*	
	V / 1.0	X	46.0	-22.4	23.6	15.1*	
	V / 1.0	Y	46.0	-22.4	23.6	15.1*	
3040	V / 1.0	Z	46.0	-22.4	23.6	15.1*	223
The frequency range was scanned from 30 MHz to 3.1 GHz. All emissions not recorded were more Than 10 dB below the specified limit. Emissions from the EUT do not exceed the specified limits.							
*=Noise Floor Measurements (Minimum system sensitivity)							



Retlif Testing Laboratories

Retlif Job Number R-9089-1